



Test report No. : 10059811S
Page : 1 of 20
Issued date : September 24, 2013
FCC ID : MLBHLIK6-3T
Revised date : October 11, 2013


RADIO TEST REPORT

Test Report No.: 10059811S

Applicant : Honda Lock Mfg. Co., Ltd.
Type of Equipment : Keyless transmitter
Model No. : HLIK6-3T
Test regulation : FCC Part15 Subpart C: 2013
FCC ID : MLBHLIK6-3T
Test result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test: August 30 to September 9, 2013

Tested by: 
Makoto Hosaka
Engineer of WiSE Japan,
UL Verification Service

Approved by : 
Go Ishiwata
Manager of WiSE Japan,
UL Verification Service



- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
☒ There is no testing item of "Non-accreditation".

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

13-EM-F0429

REVISION HISTORY

Original Test Report No.: 10059811S

[illegible]

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Contents

	<u>Page</u>
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.)	4
SECTION 3: Test specification, procedures & results.....	5
SECTION 4: Operation of E.U.T. during testing.....	7
SECTION 5: Automatically deactivate.....	8
SECTION 6: Radiated emission (Fundamental and Spurious emission)	9
SECTION 7: 20dB bandwidth & Occupied bandwidth (99%)	11
Contents of APPENDIXES.....	12
APPENDIX 1: Data of radio tests	13
APPENDIX 2: Test instruments	17
APPENDIX 3: Photographs of test setup	18

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 1: Customer information

Company Name : Honda Lock Mfg. Co., Ltd.
Address : 535-14 Oaza-Ishizue, Takanezawamachi, Shioya-Gun, Tochigi, Japan
Telephone Number : +81-50-3757-5619
Facsimile Number : +81-28-680-1045
Contact Person : Takashi Arai

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Keyless transmitter
Model No. : HLIK6-3T
Serial No. : Refer to 4.2 in this report.
Rating : DC3.0V
Receipt Date of Sample : June 18 and September 9, 2013
Country of Mass-production : Japan
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab.

2.2 Product description

Model: HLIK6-3T (referred to as the EUT in this report) is a Keyless transmitter.

Clock frequency(ies) in the system : 2MHz

<Radio part>

Equipment type : Transmitter
Frequency of operation : 433.92MHz
Type of modulation : FSK
Antenna type : Pattern
Emission designation : F1D
Operating temperature range : -20 to +60 deg.C

FCC 15.31 (e)

The test was performed with a new battery (DC3.0V) and the stable voltage was supplied to the EUT during the tests. Therefore, the EUT complies with the requirement.

FCC 15.203

The equipment and its antenna comply with this requirement since the antenna is mounted inside of the EUT.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 3: Test specification, procedures & results

3.1 Test specification

Test specification : FCC Part 15 Subpart C: 2013, final revised on June 11, 2013 and effective July 11, 2013
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.209 Radiated emission limits, general requirements
Section 15.231 Periodic operation in the band 40.66 - 40.70 MHz and above 70 MHz

3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted emission	ANSI C63.4:2009 7. AC powerline conducted emission measurements	FCC 15.207	-	N/A *1)	N/A	N/A
Automatically deactivate	ANSI C63.4:2009 13. Measurement of intentional radiators	FCC 15.231 (a)(1)	Radiated	N/A	-	Complied
Electric field strength of Fundamental emission	ANSI C63.4:2009 13. Measurement of intentional radiators	FCC 15.231(b)	Radiated	N/A	0.6dB Freq.: 433.920MHz Polarization: Horizontal	Complied
Electric field strength of Spurious emission	ANSI C63.4:2009 13. Measurement of intentional radiators	FCC 15.205 FCC 15.209 FCC 15.231 (b)	Radiated	N/A	5.9dB Freq.: 2169.600MHz Polarization: Horizontal Detector: Average	Complied
20dB bandwidth	ANSI C63.4:2009 13. Measurement of intentional radiators	FCC 15.231 (c)	Radiated	N/A	-	-

Note: UL Japan's Work Procedures No. 13-EM-W0420 and 13-EM-W0422

*1) The test is not applicable since the EUT does not have AC Mains.

3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Worst Margin	Results
Occupied Bandwidth (99%)	ANSI C63.4:2009 13. Measurement of intentional radiators, RSS-Gen 4.6.1	RSS-210 A1.1.3 RSS-Gen 4.6.1	Radiated	-	-

Note: UL Japan's Work Procedures No. 13-EM-W0420 and 13-EM-W0422

* Other than above, no addition, exclusion nor deviation has been made from the standard.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Item	Frequency range	No.1 SAC ^{*1} (±)	No.2 SAC (±)	No.3 SAC (±)
Radiated emission (Measurement distance: 3m)	9kHz-30MHz	3.7 dB	3.7 dB	3.6 dB
	30MHz-300MHz	4.8 dB	5.0 dB	4.8 dB
	300MHz-1GHz	5.0 dB	5.0 dB	4.8 dB
	1GHz-18GHz	4.9 dB	4.9 dB	4.9 dB

*1: SAC=Semi-Anechoic Chamber

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Bandwidth Measurement:

Uncertainty for this test was: (±) 5.4%

3.5 Test location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number : +81 463 50 6400

Facsimile number : +81 463 50 6401

JAB Accreditation No. : RTL02610

	FCC Registration No.	IC Registration No.	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
<input checked="" type="checkbox"/> No.1 Semi-anechoic chamber	697847	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10m
<input type="checkbox"/> No.2 Semi-anechoic chamber	697847	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10m
<input type="checkbox"/> No.3 Semi-anechoic chamber	697847	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5m
<input type="checkbox"/> No.4 Semi-anechoic chamber	-	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
<input type="checkbox"/> No.1 Shielded room	-	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
<input type="checkbox"/> No.2 Shielded room	-	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
<input type="checkbox"/> No.3 Shielded room	-	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
<input type="checkbox"/> No.4 Shielded room	-	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
<input type="checkbox"/> No.5 Shielded room	-	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
<input type="checkbox"/> No.6 Shielded room	-	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-

3.6 Test setup, Data of test & Test instruments

Refer to APPENDIX 1 to 3.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 4: Operation of E.U.T. during testing

4.1 Operating mode

The EUT exercise program used during testing was designed to exercise the various system components in a manner similar to typical use.

Test item	Operating mode	Tested frequency
Automatically deactivate	Normal use mode	
Other items	Transmitting (FSK) *1)	433.920MHz

*1) The software of this mode is the same as one of normal product, except that EUT continues to transmit when transmitter button is being pressed (For Normal use mode, EUT stops to transmit in a given time, even if transceiver button is being pressed.) End users cannot change the settings of the output power of the product.

Power settings : Setting is controlled by the firmware and cannot be changed.
Software : GHR-H003-0010_140.HEX ver.1.4.0

Justification: The system was configured in typical fashion (as customer would normally use it) for testing.

4.2 Configuration and peripherals

A: EUT

* Test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remark
A	Keyless transmitter	HLIK6-3T	*1)	Honda Lock Mfg. Co., Ltd.	EUT

*1) Automatically deactivate: 186, other items: 1

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 5: Automatically deactivate

Test procedure

The time was measured with a spectrum analyzer and a search coil placed by the EUT.

Limit: A manually transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Summary of the test results: Pass
Refer to APPENDIX 2.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 6: Radiated emission (Fundamental and Spurious emission)

6.1 Operating environment

The test was carried out in a semi-anechoic chamber.

Temperature : Refer to APPENDIX 2.

Humidity : Refer to APPENDIX 2.

6.2 Test configuration

EUT was placed on a polyethylene platform of nominal size, 0.5m by 0.5m, raised 0.8m above the conducting ground plane. Photographs of the set up are shown in Appendix 1.

6.3 Test conditions

Frequency range : 9kHz - 5GHz

EUT position : Table top

6.4 Test procedure

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m
Frequency: From 9kHz to 30MHz at distance 3m

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for vertical polarization (antenna angle: 0deg.to 360deg.) and horizontal polarization. Drawing of the antenna direction is shown in Figure 2.

Frequency: From 30MHz to 5GHz at distance 3m (Refer to Figure 1).

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function.

<9kHz to 30MHz>

	9kHz to 90kHz & 110kHz to 150kHz	90kHz to 110kHz	150kHz to 490kHz	490kHz to 30MHz
Detector type	PK/AV	QP	PK/AV	QP
IF Bandwidth	200Hz	200Hz	9kHz	9kHz
Measuring antenna	Loop			

* FCC 15 Section 15.31 (f)(2) (9kHz-30MHz)

9kHz – 490kHz [Limit at 3m]= [Limit at 300m]-40log (3[m]/300[m])

490kHz – 30MHz [Limit at 3m]= [Limit at 30m]-40log (3[m]/30[m])

<30MHz to 5GHz>

	30MHz to 1GHz	Above 1GHz	
Detector type	QP	PK	AV
IF Bandwidth	120kHz	RBW 1MHz, VBW:3MHz	RBW 1MHz, VBW:10Hz
Measuring antenna	Biconical (30-299.99MHz) Logperiodic (300MHz-1GHz)	Horn	

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

The noise levels were measured at each position and key inside or outside of all three axes X, Y and Z, and the position that has the maximum noise was determined. With the position, the noise levels of all the frequencies were measured.

Combinations of the worst case

	Frequency Antenna polarization	Carrier	Spurious	
			Below 1GHz	Above 1GHz
Blade: Outside	Horizontal	X	X	X
	Vertical	Y	Y	Z

6.5 Results

Summary of the test results : Pass

Refer to APPENDIX 2.

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401

Figure 1. Direction of the Loop Antenna

Side View (Vertical)





Side View (Horizontal)

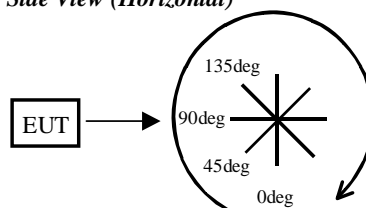


Front side: 0 deg.
Forward direction: clockwise

Top View (Horizontal)



Antenna was not rotated.

Figure 2. Antenna angle

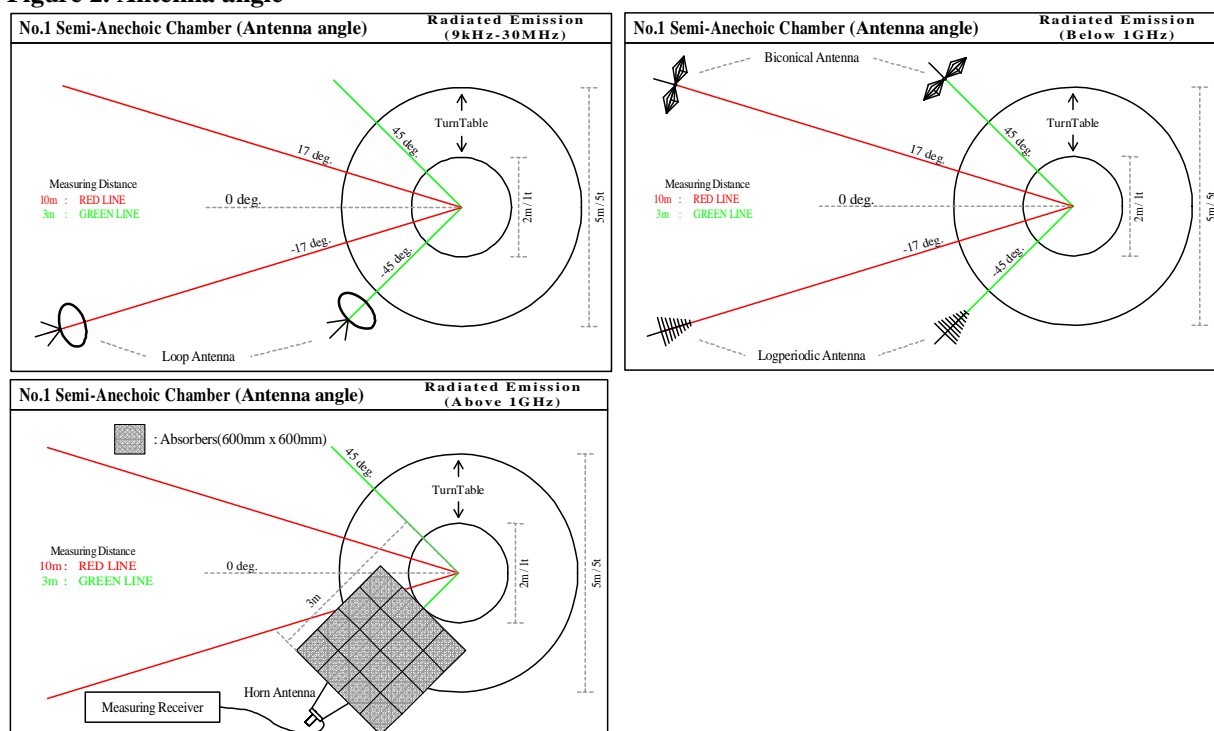

SECTION 7: 20dB bandwidth & Occupied bandwidth (99%)

Test procedure

The bandwidth was measured with a spectrum analyzer and a search coil placed by the EUT.

Summary of the test results: Pass

Refer to APPENDIX 2.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Contents of APPENDIXES

APPENDIX 1: Data of Radio tests

Automatically deactivate
Radiated emission
Bandwidth

APPENDIX 2: Test instruments

Test instruments

APPENDIX 3: Photographs of test setup

Radiated emission
Pre-check of the worst case

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401

Automatically deactivate: FCC 15.231(a)(1)

UL Japan, Inc.
Shonan EMC Lab. No.1 Semi-Anechoic Chamber
Order No. : 10059811S
Regulation : FCC Part15C Section 15.231(a)(1)
Regulation : RSS-210 A1.1.1(a)
Test Distance : -
Date : September 9, 2013
Temperature : 24deg.C
Humidity : 51%RH
ENGINEER : Makoto Hosaka

Company : Honda Lock Mfg. Co., Ltd.
Equipment : Keyless transmitter
Model : HLIJ6-3T
Sample No. : 186
Power : DC 3.0V (Battery)
Mode : Transmitting (433.92 MHz)

Time of Transmitting [sec]	Limit [sec]	Result
0.245	5	PASS

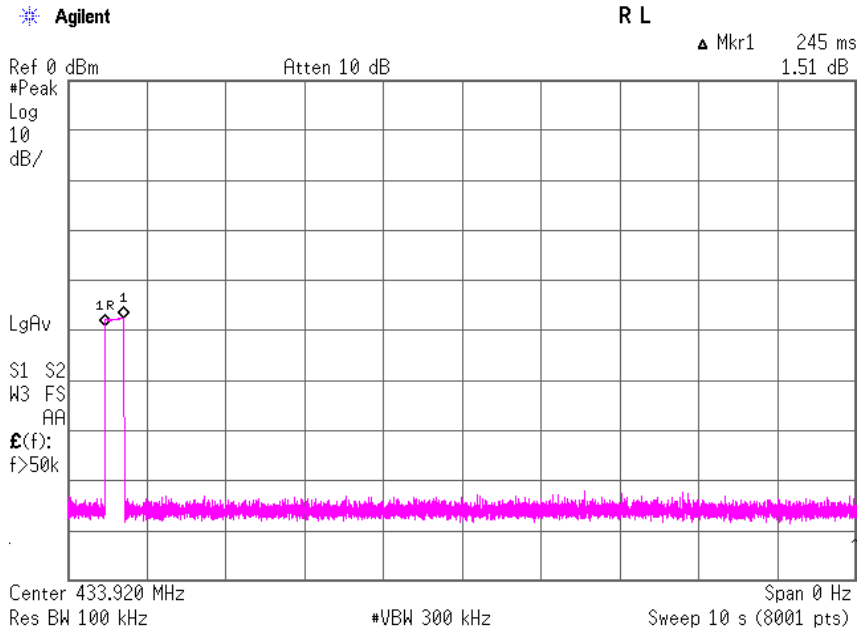

Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)

UL Japan, Inc.

Shonan EMC Lab. No.1 Semi-Anechoic Chamber

Order No. : 10059811S

Company : Honda Lock Mfg. Co., Ltd.
 Equipment : Keyless transmitter
 Model : HLIK6-3T
 Sample No. : 1
 Power : DC 3.0V (Battery)
 Mode : Transmitting (433.92 MHz)

Regulation : FCC Part15C Section 15.231(b), 15.209
 Regulation : RSS-210 A1.1 (Table A), A1.1.2
 Test Distance : 3m
 Date : August 30, 2013
 Temperature : 24deg.C
 Humidity : 51%RH
 ENGINEER : Makoto Hosaka

Quasi-Peak detector

Frequency [MHz]	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark
	Hor	Ver					Hor	Ver		Hor	Ver	
433.920	77.4	77.0	16.6	18.1	31.9	-	80.2	79.8	80.8	0.6	1.0	Carrier
867.840	39.1	34.0	22.6	20.0	31.6	-	50.1	45.0	60.8	10.7	15.8	Outside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

Peak detector

Frequency [MHz]	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark Inside or Outside of Restricted Bands
	Hor	Ver					Hor	Ver		Hor	Ver	
1301.760	60.6	54.0	25.3	4.1	40.9	-	49.1	42.5	73.9	24.8	31.4	Inside
1735.680	57.2	55.0	26.1	4.0	41.0	-	46.3	44.1	80.8	34.5	36.7	Outside
2169.600	66.0	60.8	27.2	4.4	41.0	-	56.6	51.4	80.8	24.2	29.4	Outside
2603.520	64.0	63.9	28.6	5.1	40.9	-	56.8	56.7	80.8	24.0	24.1	Outside
3037.440	56.6	56.4	29.1	5.4	41.3	-	49.8	49.6	80.8	31.0	31.2	Outside
3471.360	53.0	53.3	28.4	5.7	41.7	-	45.4	45.7	80.8	35.4	35.1	Outside
3905.280	55.7	53.2	30.1	5.9	42.0	-	49.7	47.2	73.9	24.2	26.7	Inside
4339.200	57.2	56.7	30.6	6.2	42.2	-	51.8	51.3	73.9	22.1	22.6	Inside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

Average detector

Frequency [MHz]	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark Inside or Outside of Restricted Bands
	Hor	Ver					Hor	Ver		Hor	Ver	
1301.760	58.2	49.2	25.3	4.1	40.9	-	46.7	37.7	53.9	7.2	16.2	Inside
1735.680	53.6	50.2	26.1	4.0	41.0	-	42.7	39.3	60.8	18.1	21.5	Outside
2169.600	64.3	58.1	27.2	4.4	41.0	-	54.9	48.7	60.8	5.9	12.1	Outside
2603.520	61.7	61.6	28.6	5.1	40.9	-	54.5	54.4	60.8	6.3	6.4	Outside
3037.440	51.8	50.9	29.1	5.4	41.3	-	45.0	44.1	60.8	15.8	16.7	Outside
3471.360	44.7	44.0	28.4	5.7	41.7	-	37.1	36.4	60.8	23.7	24.4	Outside
3905.280	49.5	44.3	30.1	5.9	42.0	-	43.5	38.3	53.9	10.4	15.6	Inside
4339.200	51.3	50.2	30.6	6.2	42.2	-	45.9	44.8	53.9	8.0	9.1	Inside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amplifier)

REMARKS

Antenna Type: 30M-300MHz Biconical / 300M-1000MHz Logperiodic / 1G-5GHz Horn

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).


*Below 30MHz: No noise detected signal from EUT.

Burst rate confirmation (Fundamental)

Company	: Honda Lock Mfg. Co., Ltd.	UL Japan, Inc.	
Equipment	: Keyless transmitter	Shonan EMC Lab. No.1 Semi-Anechoic Chamber	
Model	: HLIK6-3T	Order No.	: 10059811S
Sample No.	: 1	Regulation	: FCC Part15C Section 15.231(b), 15.35(c)
Power	: DC 3.0V (Battery)	Regulation	: RSS-210 & RSS-Gen
Mode	: Transmitting (433.92 MHz)	Test Distance	: 3m
		Date	: August 30, 2013
		Temperature	: 24deg.C
		Humidity	: 51%RH
		ENGINEER	: Makoto Hosaka

ON time [usec]	Cycle [usec]	Duty (On time / Cycle)	Duty [dB]
2000	2000	1.00	0.00

*Duty = 20log (On time / Cycle)

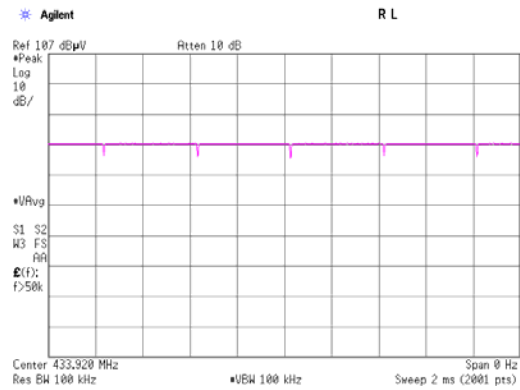

20dB Bandwidth: FCC 15.231(c)

UL Japan, Inc.

Shonan EMC Lab. No.1 Semi-Anechoic Chamber


Order No. : 10059811S

Company : Honda Lock Mfg. Co., Ltd.
 Equipment : Keyless transmitter
 Model : HLIK6-3T
 Sample No. : 1
 Power : DC 3.0V (Battery)
 Mode : Transmitting (433.92 MHz)

Regulation : FCC Part15C Section 15.231(c)
 Regulation : RSS-210 A1.1.3
 Test Distance : 3m
 Date : August 30, 2013
 Temperature : 24deg.C
 Humidity : 51%RH
 ENGINEER : Makoto Hosaka


Bandwidth Limit : fundamental Frequency 433.92 X 0.25% = 1084.8kHz

20dB Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
166.5	1084.8	PASS

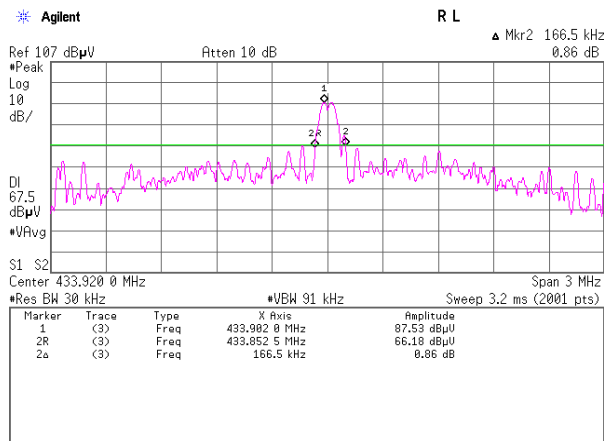

Bandwidth Limit : fundamental Frequency 433.92 X 0.25% = 1084.8kHz

99% Occupied Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
110.6804	1084.8	PASS

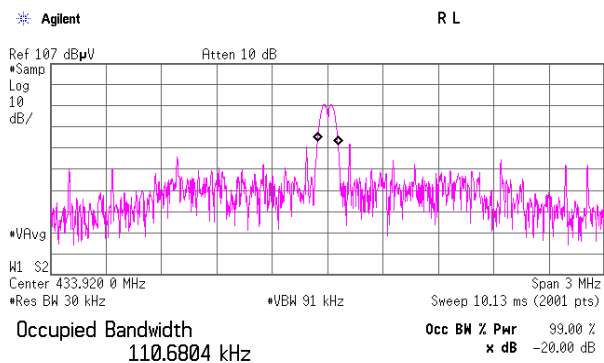

Transmit Freq Error 1.819 kHz
 x dB Bandwidth 178.774 kHz*

Test Report No : 10059811S

APPENDIX 2

Test Instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
SAF-01	Pre Amplifier	SONOMA	310N	290211	RE	2013/02/12 * 12
SAT6-05	Attenuator	JFW	50HF-006N	-	RE	2013/02/12 * 12
KAT3-09	Attenuator	JFW IND. INC.	50HF-003N	-	RE	2013/08/23 * 12
SAT10-01	Attenuator	JFW	50HF-010N	-	RE	2013/02/12 * 12
SBA-01	Biconical Antenna	Schwarzbeck	BBA9106	91032664	RE	2012/10/08 * 12
SCC-A1/A3/A5/A7/A8/A13/SRSE-01	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-269(RF Selector)	RE	2013/04/04 * 12
SCC-A2/A4/A6/A7/A8/A13/SRSE-01	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-269(RF Selector)	RE	2013/04/04 * 12
SLA-01	Logperiodic Antenna	Schwarzbeck	UHALP9108A	UHALP 9108-A 0888	RE	2012/11/18 * 12
SOS-01	Humidity Indicator	A&D	AD-5681	4062555	RE	2013/02/27 * 12
STR-01	Test Receiver	Rohde & Schwarz	ESU40	100093	RE	2012/10/04 * 12
SJM-08	Measure	PROMART	SEN1935	-	RE	-
SAEC-01(NSA)	Semi-Anechoic Chamber	TDK	SAEC-01(NSA)	1	RE	2013/07/03 * 12
COTS-SEMI-1	EMI Software	TSJ	TEPTO-DV(RE,CE,RFI,MF)	-	RE	-
SAF-04	Pre Amplifier	TOYO Corporation	TPA0118-36	1440489	RE	2013/03/19 * 12
SCC-G01	Coaxial Cable	Suhner	SUCOFLEX 104A	46497/4A	RE	2013/04/09 * 12
SCC-G21	Coaxial Cable	Suhner	SUCOFLEX 104	296169/4	RE	2013/05/22 * 12
SHA-01	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-725	RE	2013/08/12 * 12
SFL-01	Highpass Filter	MICRO-TRONICS	HPM50115	001	RE	2012/12/18 * 12
SLP-02	Loop Antenna	Rohde & Schwarz	HFH2-Z2	100218	RE	2012/10/31 * 12
SAT6-07	Attenuator	JFW	50HF-006N	-	RE	2013/02/12 * 12
SSA-02	Spectrum Analyzer	Agilent	E4448A	MY48250106	RE	2013/03/28 * 12

The expiration date of the calibration is the end of the expired month .

As for some calibrations performed after the tested dates , those test equipment have been controlled by means of an unbroken chains of calibrations .

All equipment is calibrated with valid calibrations . Each measurement data is traceable to the national or international standards .

Test Item :

RE: Radiated emission ,