



# RADIO TEST REPORT

Test Report No. : 10828763H-A-R1

**Applicant** : Honda Lock Mfg. Co., Ltd.  
**Type of Equipment** : 2R Smart Key system (ECU)  
**Model No.** : HLSS-3  
**FCC ID** : MLBHLSS-3A  
**Test regulation** : FCC Part 15 Subpart C: 2015  
**Test Result** : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. This report is a revised version of 10828763H-A. 10828763H-A is replaced with this report.

**Date of test:** June 16 and 17, 2015

**Representative test engineer:**

Shinya Watanabe  
Engineer  
Consumer Technology Division

**Approved by:**

Motoya Imura  
Engineer  
Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation. \*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429



---

**CONTENTS** **PAGE**

---

**SECTION 1: Customer information ..... 4**  
**SECTION 2: Equipment under test (E.U.T.)..... 4**  
**SECTION 3: Test specification, procedures & results ..... 5**  
**SECTION 4: Operation of E.U.T. during testing..... 8**  
**SECTION 5: Radiated emission (Fundamental and Spurious Emission) ..... 9**  
**SECTION 6: -26dB Bandwidth..... 11**  
**SECTION 7: 99% Occupied Bandwidth..... 11**  
**APPENDIX 1: Test data ..... 12**  
    **Radiated Emission below 30MHz (Fundamental and Spurious Emission) ..... 12**  
    **Radiated Emission above 30MHz (Spurious Emission)..... 13**  
    **-26dB Bandwidth and 99% Occupied Bandwidth ..... 14**  
**APPENDIX 2: Test instruments ..... 15**  
**APPENDIX 3: Photographs of test setup ..... 16**  
    **Radiated Emission..... 16**  
    **Worst Case Position ..... 17**

## **SECTION 1: Customer information**

Company Name : Honda Lock Mfg. Co., Ltd.  
Address : 535-14 Oaza-Ishizue, Takanezawamachi, Shioya-Gun, Tochigi,  
329-1225 Japan  
Telephone Number : +81-50-3757-5700  
Facsimile Number : +81-28-680-1045  
Contact Person : Sadanori Watarai

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : 2R Smart Key system (ECU)  
Model No. : HLSS-3  
Serial No. : Refer to Section 4, Clause 4.2  
Rating supplied from ECU : DC 12 V  
Receipt Date of Sample : April 18, 2015  
Country of Mass-production : Japan  
Condition of EUT : Production prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab

### **2.2 Product description**

Model No: HLSS-3 (referred to as the EUT in this report) is the 2R Smart Key system (ECU).

#### **General Specification**

Clock frequencies in the system : 8 MHz

#### **Radio Specification**

##### **[Transmitter]**

Radio Type : Transceiver  
Frequency of Operation : 133.3 kHz  
Modulation : ASK  
Antenna type : Ferrite coil antenna  
Method of Frequency Generation : Crystal  
Operating voltage (Radio part) : DC 5.0 V  
Operating temperature range : -20 to +80 deg. C

##### **[Receiver] \*1)**

Radio Type : Receiver  
Frequency of Operation : 433.92 MHz  
Operating temperature range : -20 to +80 deg. C  
Receiver Bandwidth : 120 kHz

\*1) The test of receiver part was performed separately from this test report, and the conformability is confirmed.

---

## **UL Japan, Inc.**

### **Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### **SECTION 3: Test specification, procedures & results**

#### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart C: 2015, final revised on January 21, 2015

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.207 Conducted Emission  
Section 15.209 Radiated emission limits, general requirements

\* The EUT complies with FCC Part 15 Subpart B: 2014, final revised on December 23, 2014.

#### **FCC Part 15.31 (e)**

This test was performed with the New Battery (DC 12 V) and the constant voltage was supplied to this EUT during the tests. Therefore, this EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the vehicle. Therefore, the equipment complies with the antenna requirement of Section 15.203.

#### **3.2 Procedures and results**

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	Conducted Emission	<FCC> ANSI C63.4:2009 7. AC powerline conducted emission measurements <IC> RSS-Gen 8.8	<FCC> Section 15.207 <IC> RSS-Gen 8.8	-	N/A *1)	N/A	N/A
2	Electric Field Strength of Fundamental Emission	<FCC> ANSI C63.4:2009 13. Measurement of intentional radiators <IC> RSS-Gen 6.4, 6.12	<FCC> Section 15.209 <IC> RSS-210 2.5.1 RSS-Gen 8.9	Radiated	N/A	7.0 dB 133.3 kHz AV (PK with Duty factor)	Complied
3	Electric Field Strength of Spurious Emission	<FCC> ANSI C63.4:2009 13. Measurement of intentional radiators <IC> RSS-Gen 6.4, 6.13	<FCC> Section 15.209 <IC> RSS-210 2.5.1 RSS-Gen 8.9	Radiated	N/A	17.1 dB 764.336 MHz Horizontal, QP	Complied
4	-26dB Bandwidth	<FCC> ANSI C63.4:2009 13. Measurement of intentional radiators <IC> -	<FCC> Reference data <IC> -	Radiated	N/A	N/A	N/A

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

\*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.3 Addition to standard

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	99 % Occupied Band Width	RSS-Gen 6.6	-	Radiated	N/A	N/A	N/A

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

#### EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k = 2$ .

Test room (semi-anechoic chamber)	Radiated emission						
	(3 m*)(+dB)				(1 m*)(+dB)		(0.5 m*)(+dB)
	9 kHz - 30 MHz	30 MHz - 300 MHz	300 MHz - 1 GHz	1 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 26.5 GHz	26.5 GHz - 40 GHz
No.1	4.3 dB	5.5 dB	6.3 dB	5.5 dB	5.8 dB	5.8 dB	4.3 dB
No.2	4.2 dB	5.4 dB	6.3 dB	5.4 dB	5.7 dB	5.9 dB	5.6 dB
No.3	4.4 dB	5.4 dB	6.4 dB	5.2 dB	5.5 dB	5.8 dB	5.5 dB
No.4	4.7 dB	5.6 dB	6.4 dB	5.3 dB	5.7 dB	5.9 dB	5.5 dB

\*3 m / 1 m / 0.5 m = Measurement distance

#### Radiated emission test(3 m)

The data listed in this test report has enough margin, more than the site margin.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab. \*NVLAP Lab. code: 200572-0  
 4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
 Telephone : +81 596 24 8999 Facsimile : +81 596 24 8124

	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	N/A	-
No.9 measurement room	-	8.0 x 4.6 x 2.8	2.4 x 2.4	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

## UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
 Telephone : +81 596 24 8999  
 Facsimile : +81 596 24 8124


## SECTION 4: Operation of E.U.T. during testing

### 4.1 Operating Modes

Test mode	Remarks
Continuous Transmitting mode	-

Justification : The system was configured in typical fashion (as a user would normally use it) for testing.

### 4.2 Configuration and peripherals

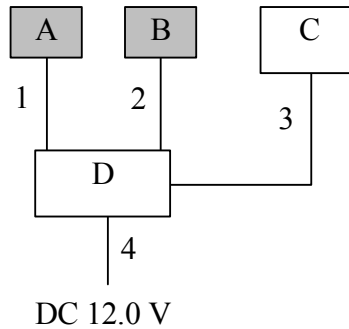

\*Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

#### Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remark
A	ANTENNA ASSY, LF	MJT-7B000-000	150214	Honda Lock Mfg. Co., Ltd.	EUT
B	2R Smart Key system (ECU)	HLSS-3	4	Honda Lock Mfg. Co., Ltd.	EUT
C	2R Smart Key system (Receiver)	HLSS-1	021960	Honda Lock Mfg. Co., Ltd.	-
D	CHECKER BOX	-	-	Honda Lock Mfg. Co., Ltd.	-

#### List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Antenna Cable	1.5	Unshielded	Unshielded	-
2	Signal Cable	0.5	Unshielded	Unshielded	-
3	Signal Cable	0.5	Unshielded	Unshielded	-
4	DC Cable	2.5	Unshielded	Unshielded	-

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



**SECTION 5: Radiated emission (Fundamental and Spurious Emission)**

**Test Procedure**

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

Frequency : From 9 kHz to 30 MHz

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for vertical polarization (antenna angle: 0 deg., 45 deg., 90 deg., and 135 deg.) and horizontal polarization.

\*Refer to Figure 1 about Direction of the Loop Antenna.

Frequency : From 30 MHz to 1 GHz

The measuring antenna height varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

The test was made with the detector (RBW / VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

**Test Antennas are used as below;**

Frequency	Below 30 MHz	30 MHz to 300 MHz	300 MHz to 1 GHz	Above 1 GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

Frequency	From 9 kHz to 90 kHz and From 110 kHz to 150 kHz	From 90 kHz to 110 kHz	From 150 kHz to 490 kHz	From 490 kHz to 30 MHz	From 30 MHz to 1 GHz	Above 1 GHz	
Instrument used	Test Receiver					Spectrum Analyzer	
Detector	PK / AV	QP	PK / AV	QP	QP	PK	AV
IF Bandwidth	200 Hz	200 Hz	9 kHz	9 kHz	120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 10 Hz
Test Distance	3 m *1)	3 m *1)	3 m *1)	3 m *2)	3 m	3 m	3 m

\*1) Distance Factor:  $40 \times \log(3 \text{ m} / 300 \text{ m}) = -80 \text{ dB}$

\*2) Distance Factor:  $40 \times \log(3 \text{ m} / 30 \text{ m}) = -40 \text{ dB}$

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open field test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

These tests were performed in semi anechoic chamber. Therefore the measured level of emissions may be higher than if measurements were made without a ground plane.

However test results were confirmed to pass against standard limit.

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Measurement range** : 9 kHz - 1 GHz  
**Test data** : APPENDIX 1  
**Test result** : Pass

Date: June 16, 2015

Test engineer: Kenshi Shimomura, Shinichi Miyazono

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

**Figure 1: Direction of the Loop Antenna**

*Side View (Vertical)*

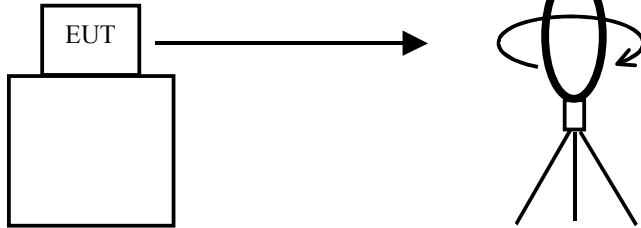


.....  
*Top View (Horizontal)*

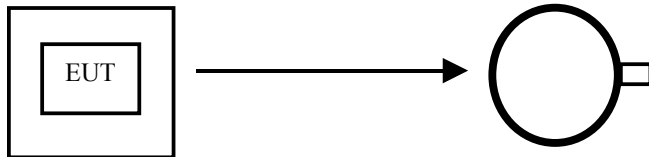

Antenna was not rotated.

.....

*Top View (Vertical)*

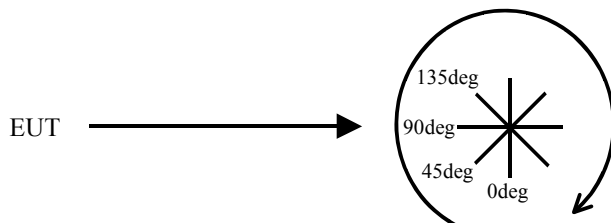

Front side: 0 deg.  
Forward direction: clockwise

## **SECTION 6: -26dB Bandwidth**

### **Test Procedure**

The measurement was performed in the antenna height to gain the maximum of Electric field strength.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
-26 dB Bandwidth	100 kHz	1 kHz	3.3 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

Test data : APPENDIX 1  
Test result : Pass

## **SECTION 7: 99% Occupied Bandwidth**

### **Test Procedure**

The measurement was performed in the antenna height to gain the maximum of Electric field strength.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
99 % Occupied Bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak *1)	Max Hold *1)	Spectrum Analyzer

\*1) The measurement was performed with Peak detector, Max Hold since the duty cycle was not 100 %.  
Peak hold was applied as Worst-case measurement.

Test data : APPENDIX 1  
Test result : Pass

## APPENDIX 1: Test data

### Radiated Emission below 30MHz (Fundamental and Spurious Emission)

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber  
Order No. : 10828763H  
Date : 06/16/2015  
Temperature/ Humidity : 25deg. C / 40 % RH  
Engineer : Kenshi Shimomura  
Mode : Continuous Transmitting mode 133.3kHz

#### PK or QP

Ant Deg [deg] or Polarity [Hori/Vert]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0	0.13330	PK	104.8	19.6	-74.0	32.4	-	18.0	45.0	27.0	Fundamental
0	0.26660	PK	71.5	19.6	-74.0	32.4	-	-15.3	39.1	54.4	
0	0.39990	PK	62.3	19.6	-73.9	32.3	-	-24.3	35.6	59.9	
0	0.53320	QP	41.7	19.5	-33.9	32.3	-	-5.0	33.1	38.1	
0	0.66650	QP	53.3	19.5	-33.8	32.3	-	6.7	31.1	24.4	
0	0.79980	QP	35.9	19.5	-33.8	32.3	-	-10.7	29.5	40.2	
0	0.93310	QP	47.3	19.5	-33.8	32.3	-	0.7	28.2	27.5	
0	1.06640	QP	32.9	19.5	-33.8	32.3	-	-13.7	27.0	40.7	
0	1.19970	QP	40.9	19.5	-33.8	32.3	-	-5.7	26.0	31.7	
0	1.33300	QP	31.9	19.5	-33.7	32.3	-	-14.6	25.1	39.7	
90	22.52770	QP	36.3	19.4	-32.6	32.3	-	-9.2	29.5	38.7	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Ampriifier)

#### PK with Duty factor

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0	0.133	AV	104.8	19.6	-74.0	32.4	0.0	18.0	25.0	7.0	
0	0.267	AV	71.5	19.6	-74.0	32.4	0.0	-15.3	19.1	34.4	
0	0.400	AV	62.3	19.6	-73.9	32.3	0.0	-24.3	15.6	39.9	

Result = Reading + Ant Factor + Loss (Cable + Attenuator + Filter + D.Factor) - Gain(Ampriifier) + Duty factor \*

\* Since the peak emission result satisfied the average limit, duty factor was omitted.

#### Result of the fundamental emission at 3m without Distance factor

#### PK or QP

Ant Deg [deg]	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
0	0.13300	PK	104.8	19.6	6.0	32.4	-	98.0	-	-	Fundamental

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Ampriifier)

\* All spurious emissions lower than this result.

\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Emission above 30MHz (Spurious Emission)


### DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Ise EMC Lab. No.2 Semi Anechoic Chamber  
Date : 2015/06/16

Report No. : 10828763H  
Temp./Humi. : 25deg.C / 40% RH  
Engineer : Shinichi Miyazono

Mode / Remarks : Tx 133.3KHz (30-1000MHz)

LIMIT : FCC15.209 3m, below 1GHz:QP, above 1GHz:PK  
All other spurious emissions were less than 20dB for the limit.

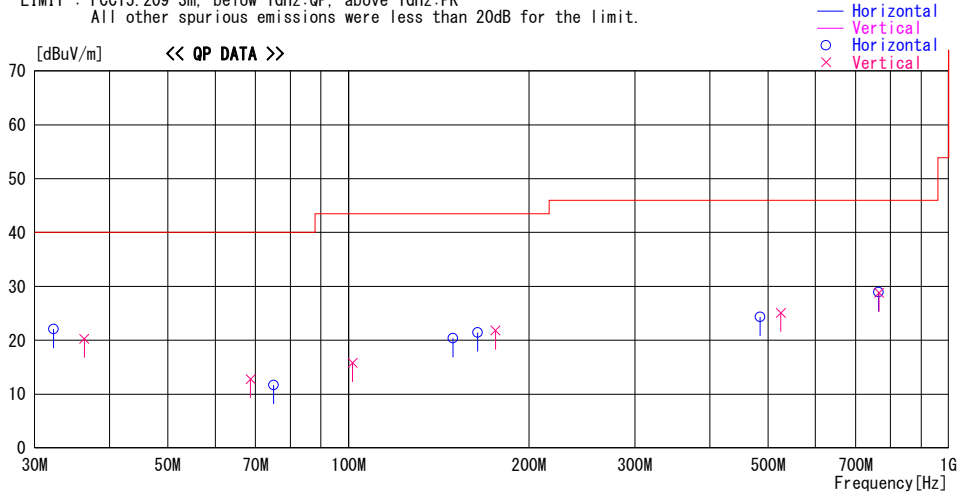

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Loss& Gain [dB]							
32.289	27.3	QP	16.5	-21.7	22.1	49	300	Hori.	40.0	17.9	
36.300	26.6	QP	15.4	-21.7	20.3	0	100	Vert.	40.0	19.7	
68.700	27.7	QP	6.3	-21.2	12.8	108	100	Vert.	40.0	27.2	
75.100	26.4	QP	6.5	-21.2	11.7	359	298	Hori.	40.0	28.3	
101.550	26.2	QP	10.3	-20.7	15.8	100	100	Vert.	43.5	27.7	
149.275	25.8	QP	14.9	-20.3	20.4	49	298	Hori.	43.5	23.1	
175.799	25.6	QP	16.2	-20.0	21.8	0	100	Vert.	43.5	21.7	
164.099	25.8	QP	15.7	-20.1	21.4	227	298	Hori.	43.5	22.1	
485.498	24.6	QP	18.5	-18.8	24.3	359	205	Hori.	46.0	21.7	
525.165	24.7	QP	18.9	-18.5	25.1	359	100	Vert.	46.0	20.9	
764.336	24.3	QP	21.5	-16.9	28.9	359	205	Hori.	46.0	17.1	
765.503	24.2	QP	21.5	-16.9	28.8	359	100	Vert.	46.0	17.2	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz--HORN  
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE - GAIN(AMP))

\*The test result is rounded off to one or two decimal places, so some differences might be observed


**UL Japan, Inc.**  
**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999  
Facsimile : +81 596 24 8124

**-26dB Bandwidth and 99% Occupied Bandwidth**

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber
Order No.	10828763H
Date	06/17/2015
Temperature/ Humidity	22 deg. C / 52% RH
Engineer	Shinya Watanabe
Mode	Continuous Transmitting mode 133.3kHz

Mode	Frequency [kHz]	-26dB Bandwidth [kHz]	99% Occupied Bandwidth [kHz]
Tx 133.3kHz	133.3	15.149	12.7166

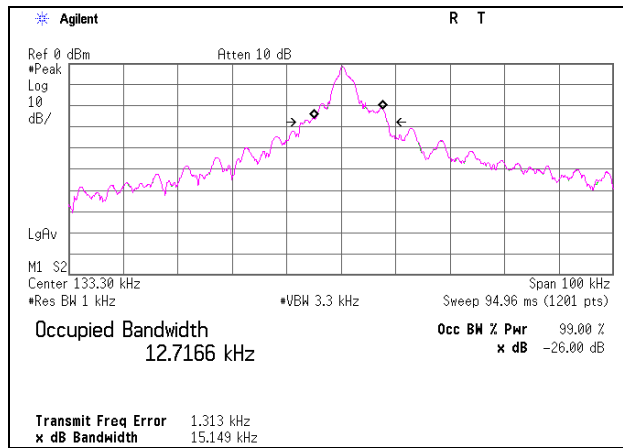

## **APPENDIX 2: Test instruments**

### **EMI test equipment**

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE	2014/06/25 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE	2015/01/13 * 12
MJM-14	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MSA-14	Spectrum Analyzer	Agilent	E4440A	MY48250080	RE	2014/10/17 * 12
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	100300	RE	2014/06/03 * 12
MLPA-01	Loop Antenna	Rohde & Schwarz	HFH2-Z2	100017	RE	2014/10/04 * 12
MCC-13	Coaxial Cable	Fujikura	3D-2W(12m)/ 5D-2W(5m)/ 5D-2W(0.8m)/ 5D-2W(1m)	-	RE	2015/02/06 * 12
MCC-143	Coaxial Cable	UL Japan	-	-	RE	2014/07/28 * 12
MPA-13	Pre Amplifier	SONOMA INSTRUMENT	310	260834	RE	2015/03/10 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	BK7970	RE	2014/11/11 * 12
MBA-02	Biconical Antenna	Schwarzbeck	BBA9106	VHA91032008	RE	2014/10/18 * 12
MLA-02	Logperiodic Antenna	Schwarzbeck	USLP9143	201	RE	2014/10/18 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	-	RE	2015/02/06 * 12
MPA-09	Pre Amplifier	Agilent	8447D	2944A10845	RE	2014/09/26 * 12

**The expiration date of the calibration is the end of the expired month.**

**All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.**

**As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.**

**Test Item:**

**RE: Spurious emission**

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124