


Type HC-49/U03

Oscillator Frequency 7.3728 MHz

Dimensions (mm)

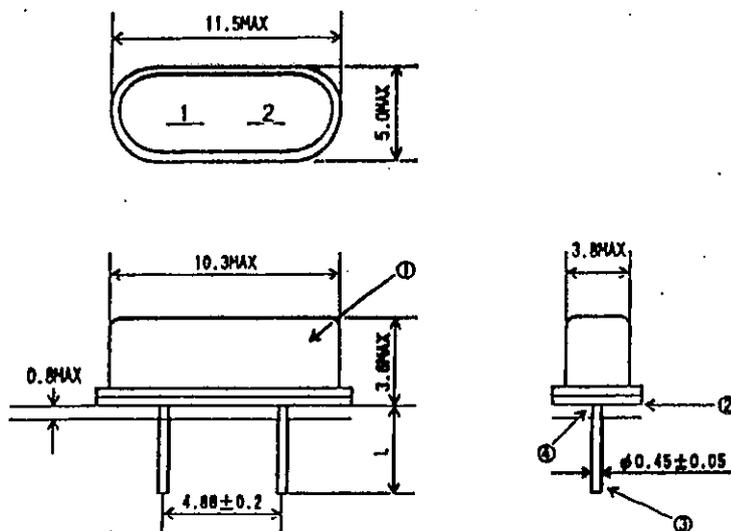

Mode of Oscillation	Fundamental
Operating Temperature Range	-30 ~ +85 °C
Storage Temperature Range	-40 ~ +100 °C
Frequency Tolerance (at 25 ± 3 °C)	± 50 ppm
Frequency Stability	± 50 ppm
Crystal Impedance	Less than 250 Ω
Load Capacitance	14pF ~ 16pF
Drive Level	Less than 500 μW
Aging	± 2 ppm/Year