

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Test Report

Product Name: UHF TRANSCEIVER

FCC ID: MMA701545B

Applicant:

**MIDLAND RADIO CORPORATION
5900 PARRETTA DRIVE
KANSAS CITY MO 64120
USA**

Date Receipt: 5/24/2006

Date Tested: 7/12/2006

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

COVER SHEET

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TABLE OF CONTENTS LIST

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

TEST REPORT:

PAGE 1.....	GENERAL INFORMATION & TECHNICAL DESCRIPTION
PAGE 2.....	TECHNICAL DESCRIPTION CONTINUED
	RF POWER OUTPUT
PAGE 3.....	MODULATION CHARACTERISTICS
	AUDIO FREQUENCY RESPONSE PLOT
PAGE 4.....	AUDIO LOW PASS FILTER PLOT
PAGE 5-6.....	MODULATION LIMITING PLOT
PAGE 6-10.....	OCCUPIED BANDWIDTH
PAGE 11-12.....	SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE 13-18.....	FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE 19.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 20.....	FREQUENCY STABILITY
PAGE 21-26.....	TRANSIENT FREQUENCY STABILITY
PAGE 27.....	EQUIPMENT LIST

EXHIBITS CONTAINING:

SCHEMATIC DIAGRAM
PARTS LIST
OPERATING MANUAL
SERVICE MANUAL
LABEL SAMPLE
LABEL LOCATION
EXTERNAL PHOTOGRAPHS
INTERNAL PHOTOGRAPHS
TUNING PROCEDURE
OPERATIONAL DESCRIPTION
TEST SET UP PHOTOGRAPHS

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

TABLE OF CONTENTS

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

GENERAL INFORMATION REQUIRED FOR CERTIFICATION OF A LICENSED TRANSMITTER

Part 2.1033(c) (1) (2) MIDLAND RADIO CORPORATION will manufacture the
FCCID: MMA701545B VHF TRANSCEIVER in quantity,
for use under FCC RULES PART 90.

Part 2.1033(c) TECHNICAL DESCRIPTION

Part 2.1033(c) (3) Instruction book. A draft copy of the instruction
manual is included as an exhibit.

Part 2.1033(c) (4) Type of Emission: 10K6F3E

Part 90.209

Part 90.207

$B_n = 2M + 2DK$
 $M = 3000$
 $D = 2300$
 $B_n = 2(3000) + 2(2300) = 10.6k$ narrow 12.5 kHz

Part 2.1033(c) (4) Type of Emission: 14K8F3E

Part 90.207

$B_n = 2M + 2DK$
 $M = 3000$
 $D = 4400$
 $B_n = 2(3000) + 2(4400) = 14.8k$ wide 25 kHz

Part 2.1033(c) (5) Frequency Range: 440 - 475 MHz

Part 90.209 (b) (5)

Part 2.1033(c) (6) (7) Power Output shall not exceed 59 Watts into a 50 ohm
Part 90.205 resistive load. There are no user power controls.

Part 2.1033(c) (8) DC Voltages and Current into Final Amplifier:
POWER INPUT:

FINAL AMPLIFIER ONLY

INPUT POWER - (13.6V) (8A) = 108.80 Watts

Part 2.1033(c) (9) **Tune-up procedure.** The tune-up procedure is
included as an exhibit.

Part 2.1033(c) (10) **Complete Circuit Diagrams:** Circuit and block
diagrams are included as exhibits.

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Part 2.1033(c) (10) : Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description.

Part 2.1033(c) (11) : A photograph or drawing of the equipment identification label is included as an exhibit.

Part 2.1033(c) (12) : Photographs of the equipment of sufficient clarity to reveal equipment construction and layout and label location are included as an exhibit.


Part 2.1033(c) (13) : For equipment employing digital modulation, a detailed description of the modulation technique. This UUT uses FSK to modulate the transmitter.

Part 2.1033(c) (14) : The data required for 2.1046 through 2.1057 is submitted below.

Part 2.1046(a) RF POWER OUTPUT

RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

OUTPUT POWER:	HIGH - 45.7 Watts
	LOW - 5.5 Watts

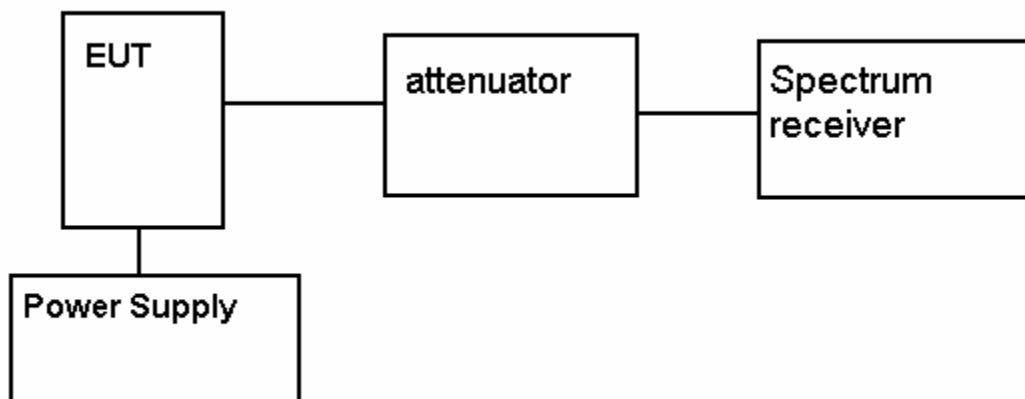

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 2 of 27

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Part 2.1047 (a) (b) Modulation characteristics:


AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 - 5000Hz shall be submitted. The audio frequency response curve is shown below.

AUDIO FREQUENCY RESPONSE PLOT

1099AUT6 AUDIO FREQ RESPONSE PLOT

07/12/06 14:25:28

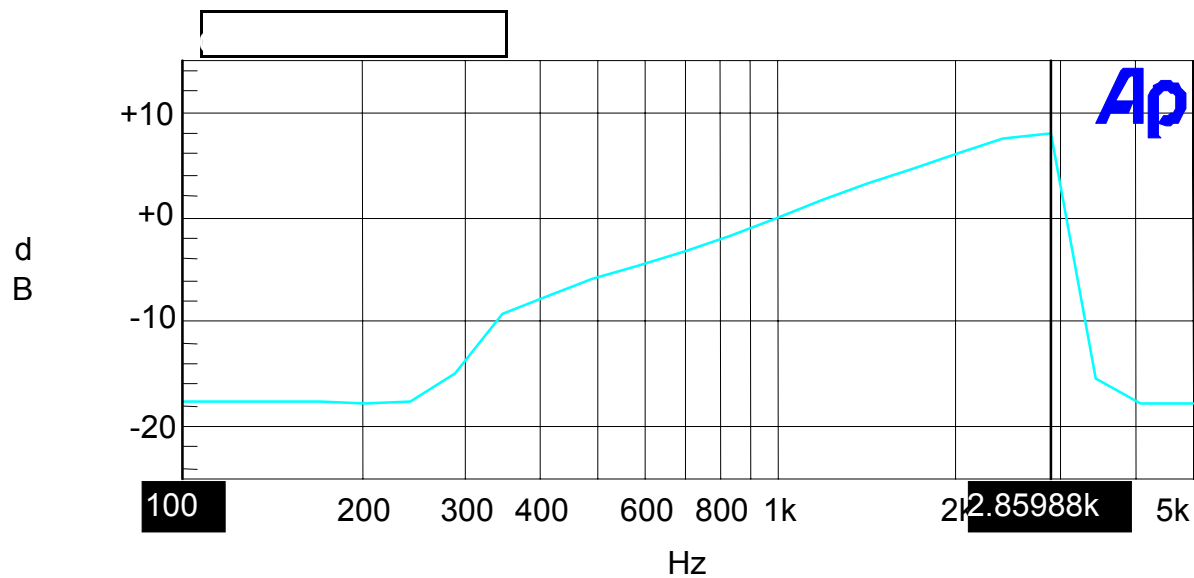

Color	Line Style	Thick	Data	Axis	Cursor1
Cyan	Solid	1	Anlr.Level A!Normalize	Left	..

MaxFreq.at1

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 3 of 27

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>


888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Part 2.1047(a) Voice modulated communication equipment: For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

AUDIO LOW PASS FILTER

1099AUT6 AUDIO LOW PASS FILTER PLOT

07/12/06 14:34:42

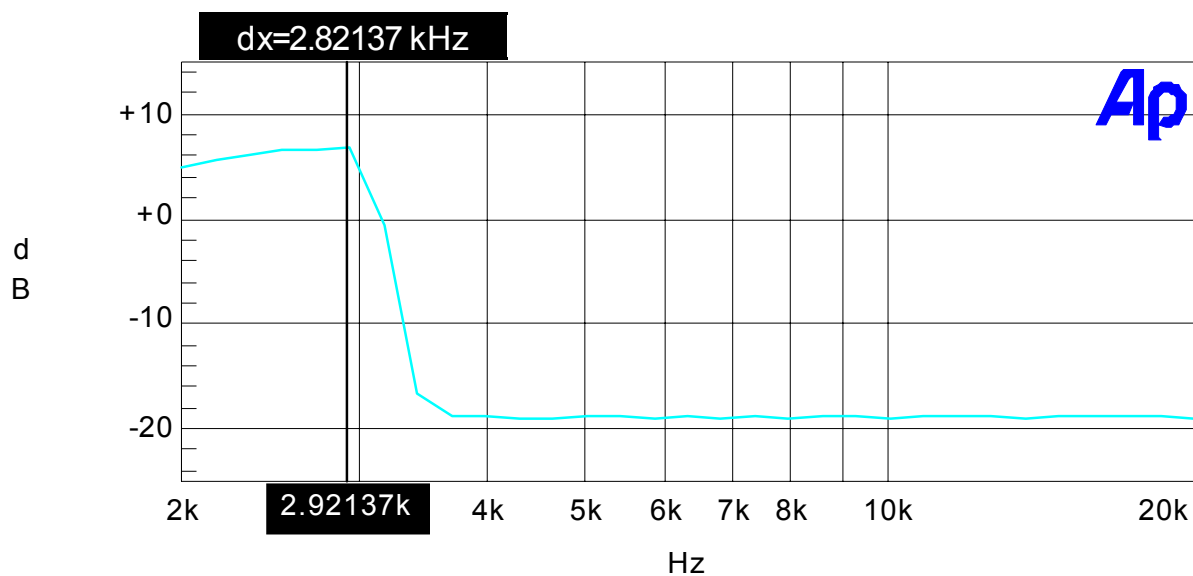

Color	Line Style	Thick	Data	Axis	Cursor1	Cursor2
Cyan	Solid	1	Anlr.Level A	Left	..	..

MaxFreq.at1

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 4 of 27

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com


Part 2.1047(b) Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 2500 Hz.

MODULATION LIMITING PLOT

Modulation Limiting Plots:
2.5 KHz (Green), 1.0 KHz (Blue), and 300 Hz (Yellow)

NARROW MODULATION

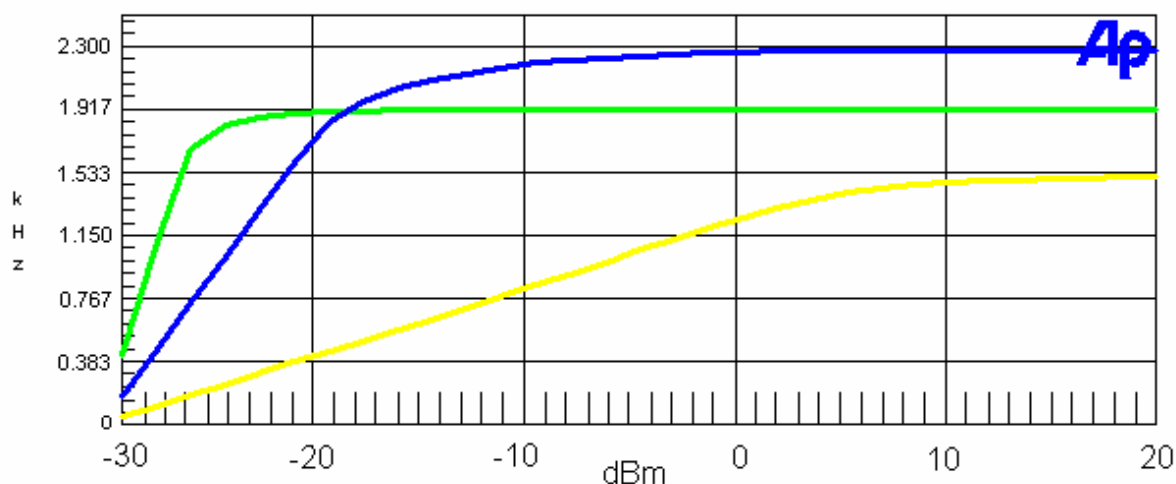

Color	Line Style	Thick	Data	Axis
Green	Solid	3	Anlr.Level A	Left
Blue	Solid	3	Anlr.Level A	Left
Yellow	Solid	3	Anlr.Level A	Left

modulation limiting.at1

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 5 of 27

TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Modulation Limiting Plots:
2.5 KHz (Green), 1.0 KHz (Blue), and 300 Hz (Yellow)

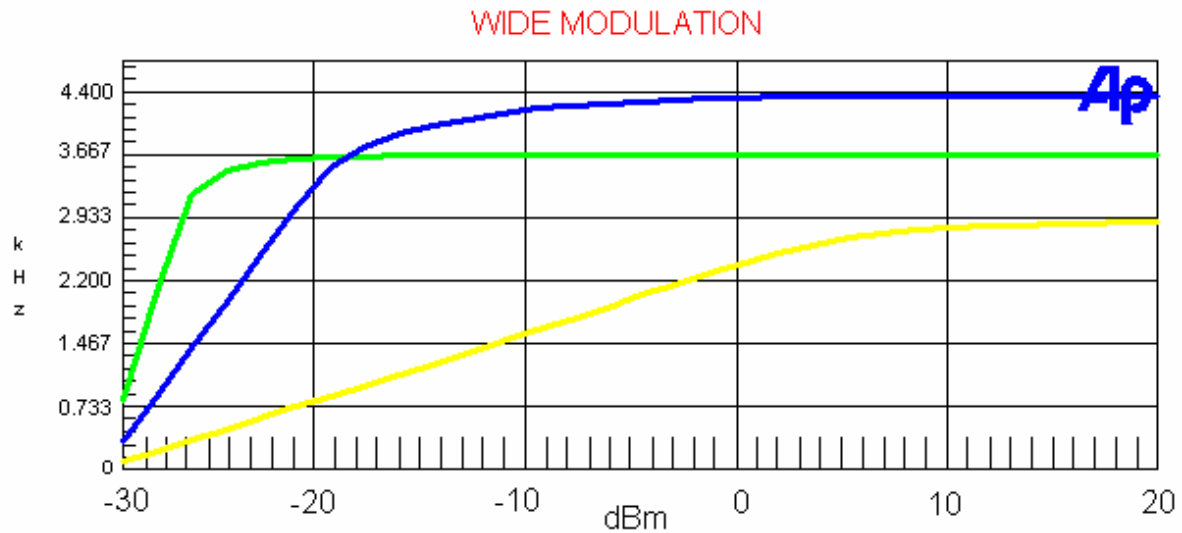

Color	Line Style	Thick	Data	Axis
Green	Solid	3	Anlr.Level A	Left
Blue	Solid	3	Anlr.Level A	Left
Yellow	Solid	3	Anlr.Level A	Left

modulation limiting.at1

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 6 of 27

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Part 2.1049 Occupied bandwidth:

Part 2.1049(c) EMISSION BANDWIDTH:

Part 90.210(b) 25kHz Channel Spacing

Data in the plots show that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35 dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least $43 + 10\log(P)$ dB.

Part 90.210(c) 12.5kHz Channel Spacing Not Equipped with a Low Pass Filter

For transmitters that are not equipped with an audio low pass filter pursuant to S90.211 (b), the power of any emission must be attenuated below the unmodulated carrier output power as follows; (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5 kHz but not more than 10 kHz: At least $83 \log(f_d/5)$ dB; (2) ON any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 10 kHz, but not more than 250% of the authorized bandwidth: At least $29 \log(f_d/11)$ dB or 50 dB, whichever is the lesser attenuation; (3) On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: At least $43 + 10 \log(P_o)$ dB.

Part 90.210(d) Emission Mask D - 12.5 kHz channel BW equipment.

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27 (f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10\log(P)$ dB or 70 dB, whichever is the lesser attenuation.

Part 90.210(e) Emission Mask E - 6.25 kHz channel BW equipment.

For transmitters designed to operate with a 6.25 kHz bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 7 of 27

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>


888.472.2424 F 352.472.2030 email: sid@timcoengr.com

- (1) On any frequency from the center of the authorized bandwidth f_0 to 3.0 kHz removed from f_0 : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(f_d - 3.0 \text{ kHz})$ or $55 + 10 \log(P)$ or 65, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized
- (4) bandwidth by more than 4.6 kHz: At least $55 + 10 \log(P)$ dB or 65 dB, whichever is the lesser attenuation.

Test procedure: TIA/EIA-603 Para 2.2.11.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

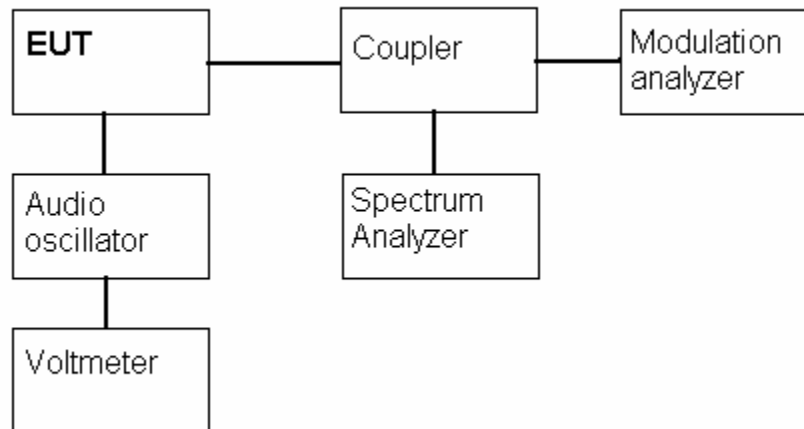

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 8 of 27

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

OCCUPIED BANDWIDTH PLOT


NOTES:

OCCUPIED BANDWIDTH -- WIDE

MIDLAND RADIO CORP

FCC ID: MMA 70-1545B

FCC 90.210 Mask B

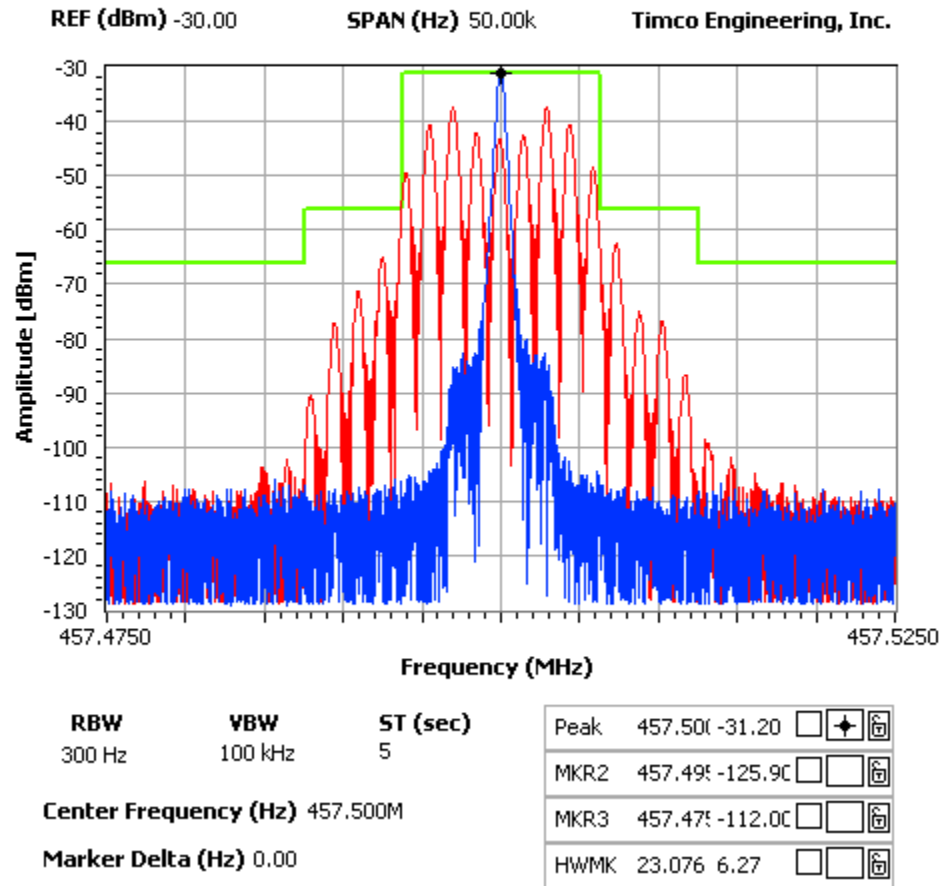

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

OCCUPIED BANDWIDTH PLOT


NOTES:

OCCUPIED BANDWIDTH -- NARROW

MIDLAND RADIO CORP

FCC ID: MMA 70-1545B

FCC 90.210 Mask D

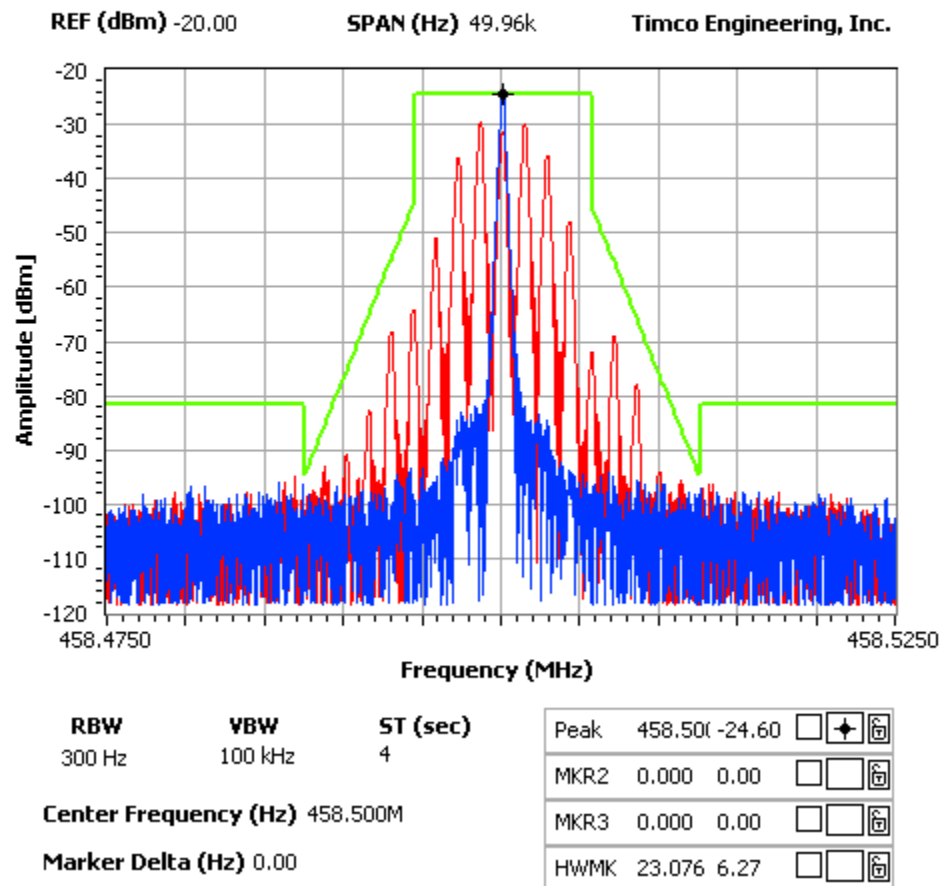

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 10 of 27

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Part 2.1051(a) Spurious emissions at antenna terminals (conducted):

Data below shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

FCC Limit: Low Power: $43+10\log(5.5) = 50.40$ dB
High Power: $43+10\log(45.7) = 59.60$ dB

TF HIGH POWER	EF	dB below carrier	TF LOW POWER	EF	dB below carrier
440.10000	440.10000	0	440.00000	440.00000	0
	880.20000	-94.9		880.00000	-86.8
	1320.30000	-81.2		1320.00000	-86.5
	1760.40000	-98.0		1760.00000	-89.4
	2200.50000	-89.5		2200.00000	-88.0
	2640.60000	-96.1		2640.00000	-90.7
	3080.70000	-95.1		3080.00000	-90.7
	3520.80000	-93.5		3520.00000	-89.6
	3960.90000	-97.0		3960.00000	-87.2
	4401.00000	-86.8		4400.00000	-91.1
457.80000	457.80000	0	457.50000	457.50000	0
	915.60000	-95.8		915.00000	-87.2
	1373.40000	-81.7		1372.50000	-88.0
	1831.20000	-98.0		1830.00000	-91.2
	2289.00000	-88.2		2287.50000	-87.7
	2746.80000	-98.4		2745.00000	-91.6
	3204.60000	-86.2		3202.50000	-84.4
	3662.40000	-95.0		3660.00000	-87.5
	4120.20000	-96.1		4117.50000	-89.3
	4578.00000	-97.9		4575.00000	-90.6

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 11 of 27

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com


Part 2.1051(a) Spurious emissions at antenna terminals (conducted):

Data below shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

FCC Limit: Low Power: $43+10\log(5.5) = 50.40$ dB
High Power: $43+10\log(45.7) = 59.60$ dB

TF HIGH POWER	EF	dB below carrier	TF LOW POWER	EF	dB below carrier
475.98750	475.98750	0	474.95000	474.95000	0
	951.97500	-90.1		949.90000	-95.0
	1427.96250	-86.7		1424.85000	-79.0
	1903.95000	-89.3		1899.80000	-98.2
	2379.93750	-86.2		2374.75000	-89.2
	2855.92500	-90.6		2849.70000	-98.5
	3331.91250	-80.3		3324.65000	-80.7
	3807.90000	-90.7		3799.60000	-98.4
	4283.88750	-91.2		4274.55000	-96.7
	4759.87500	-91.3		4749.50000	-95.8

Method of Measuring Conducted Spurious Emissions

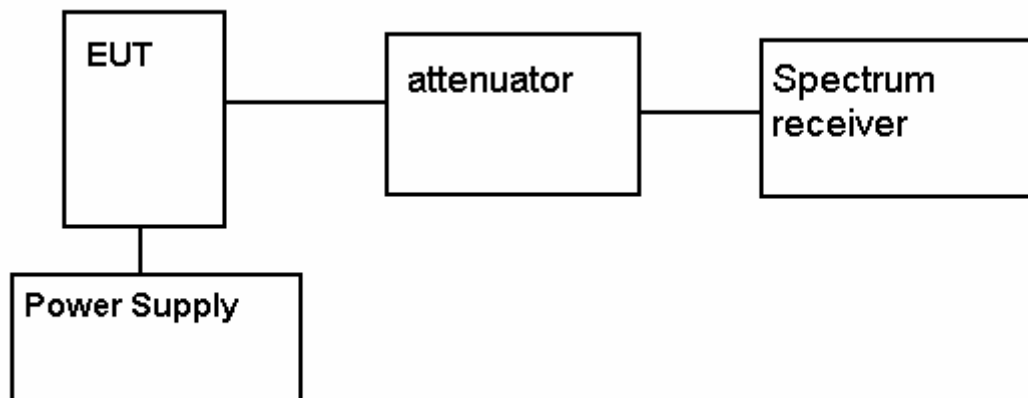

METHOD OF MEASUREMENT: The procedure used was TIA/EIA-603 STANDARD without any exceptions. The measurements were made at TIMCO ENGINEERING INC. 849 N.W. State Road 45, Newberry, Florida 32669.

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 12 of 27

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Part 2.1053 Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Low Power: $43+10\log(5.5) = 50.40$ dB
High Power: $43+10\log(45.7) = 59.60$ dB

TEST DATA WITHOUT REMOTE CABLE KIT ATTACHED:

TEST DATA - HIGH POWER:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
440.10	0	0
880.20	H	71.41
1320.30	V	74.13
1760.40	H	95.29
2200.50	V	94.83
2640.60	V	95.45
3080.70	H	100.25
3520.80	H	91.95
3960.90	H	102.61
4401.00	H	104.76

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
457.80	0	0
915.60	V	79.87
1373.40	V	85.86
1831.20	H	94.35
2289.00	V	87.64
2746.80	V	91.29
3204.60	V	86.07
3662.40	H	92.73
4120.20	H	91.5
4578.00	V	92.42

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Part 2.1053 Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS:

Low Power:	$43+10\log(5.5) = 50.40 \text{ dB}$
High Power:	$43+10\log(45.7) = 59.60 \text{ dB}$

TEST DATA WITHOUT REMOTE CABLE KIT ATTACHED:

TEST DATA - HIGH POWER:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
474.95	0	0
949.90	V	73.43
1424.85	H	91.19
1899.80	H	93.83
2374.75	H	96.44
2849.70	H	96.42
3324.65	V	81.7
3799.60	H	95.23
4274.55	H	97.54
4749.50	V	94.13

TEST DATA - LOW POWER:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
440.00	0	0
880.00	H	70.81
1320.00	H	76.03
1760.00	H	84.29
2200.00	V	85.93
2640.00	V	88.25
3080.00	V	88.05
3520.00	H	82.35
3960.00	H	94.01
4400.00	H	95.26

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio MMA\1099AUT6\1099AUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Part 2.1053

FIELD STRENGTH OF SPURIOUS EMISSIONS

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Low Power: $43+10\log(5.5) = 50.40$ dB
High Power: $43+10\log(45.7) = 59.60$ dB

TEST DATA WITHOUT REMOTE CABLE KIT ATTACHED:

TEST DATA - LOW POWER:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
457.50	0	0
915.00	H	73.17
1372.50	V	77.06
1830.00	H	82.95
2287.50	V	87.54
2745.00	V	86.39
3202.50	V	79.57
3660.00	H	82.33
4117.50	H	93.5
4575.00	H	92.82

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
475.99	0	0
951.98	V	72.53
1427.96	H	79.19
1903.95	H	83.23
2379.94	H	95.04
2855.93	V	87.82
3331.91	H	75.9
3807.90	H	86.63
4283.89	H	94.14
4759.88	H	93.43

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Part 2.1053 FIELD STRENGTH OF SPURIOUS EMISSIONS

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Low Power: $43+10\log(5.5) = 50.40$ dB
High Power: $43+10\log(45.7) = 59.60$ dB

TEST DATA WIT REMOTE CABLE KIT ATTACHED:

TEST DATA - HIGH POWER:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
440.10	0	0
880.20	V	74.21
1320.30	V	69.83
1760.40	H	91.29
2200.50	H	96.93
2640.60	H	101.45
3080.70	H	99.85
3520.80	H	90.85
3960.90	H	96.51
4401.00	H	101.86

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
457.80	0	0
915.60	H	65.87
1373.40	H	80.16
1831.20	H	81.85
2289.00	H	99.84
2746.80	H	102.59
3204.60	H	94.07
3662.40	H	91.83
4120.20	H	95.3
4578.00	H	101.62

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Part 2.1053 FIELD STRENGTH OF SPURIOUS EMISSIONS

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Low Power: $43+10\log(5.5) = 50.40$ dB
High Power: $43+10\log(45.7) = 59.60$ dB

TEST DATA WIT REMOTE CABLE KIT ATTACHED:

TEST DATA - HIGH POWER:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
474.95	0	0
949.90	H	68.63
1424.85	H	79.09
1899.80	V	82.03
2374.75	V	94.34
2849.70	V	105.42
3324.65	H	87.1
3799.60	H	93.43
4274.55	H	103.84
4749.50	V	102.53

TEST DATA - LOW POWER:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
440.00	0	0
880.00	H	68.91
1320.00	H	71.73
1760.00	H	81.59
2200.00	H	92.73
2640.00	H	97.15
3080.00	H	90.75
3520.00	H	83.15
3960.00	H	91.81
4400.00	V	92.26

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Part 2.1053

FIELD STRENGTH OF SPURIOUS EMISSIONS

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Low Power: $43+10\log(5.5) = 50.40$ dB

High Power: $43+10\log(45.7) = 59.60$ dB

TEST DATA WITH REMOTE CABLE KIT ATTACHED:

TEST DATA - LOW POWER:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
457.50	0	0
915.00	V	67.17
1372.50	H	75.16
1830.00	H	82.15
2287.50	V	86.64
2745.00	V	92.29
3202.50	H	84.27
3660.00	H	85.23
4117.50	H	93.4
4575.00	V	92.12

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
475.99	0	0
951.98	H	69.43
1427.96	H	75.89
1903.95	V	80.33
2379.94	H	93.44
2855.93	V	91.12
3331.91	H	75.5
3807.90	H	85.13
4283.89	V	91.74
4759.88	H	91.93

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Method of Measuring Radiated Spurious Emissions

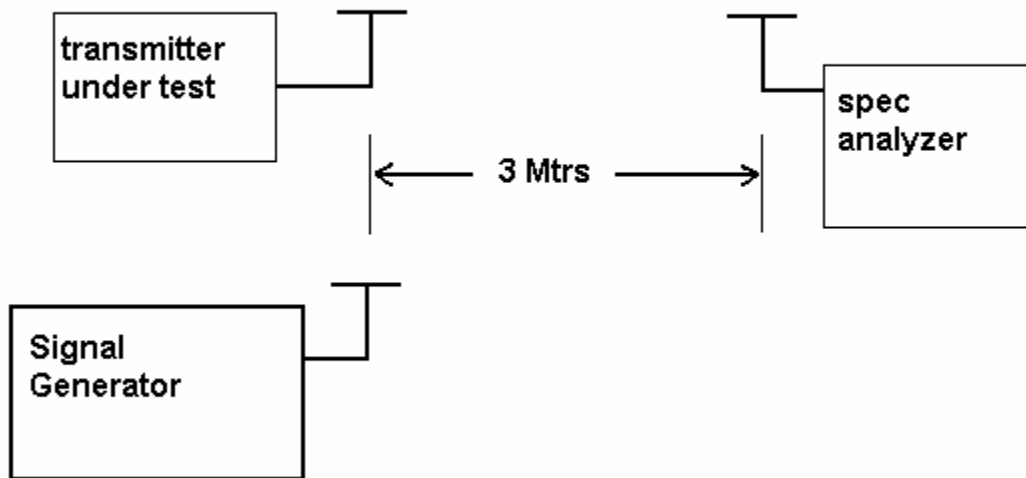

METHOD OF MEASUREMENTS: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 19 of 27

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Part 2.1055 Frequency stability:

Part 90.213(a) (1) 90.266(b) (3)

Frequency Stability Requirement:

Temperature range requirements: -30 to +50° C.

Voltage Variation +,- 15%.

Measurement procedure per TIA/EIA 603.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 457.500 000 MHz

TEMPERATURE °C	FREQUENCY MHz	PPM
REFERENCE _____	457.500 143	0.00
-30 _____	457.500 430	0.63
-20 _____	457.500 323	0.39
-10 _____	457.500 130	-0.03
0 _____	457.500 136	-0.02
+10 _____	457.500 191	0.10
+20 _____	457.500 162	0.04
+30 _____	457.500 062	-0.18
+40 _____	457.499 955	-0.41
+50 _____	457.499 823	-0.70

<u>BATT</u>	<u>%BATT.</u>	<u>DATA</u>	<u>PPM</u>
	-15%	457.500 131	-0.03
	+15%	457.500 125	-0.04

RESULTS OF MEASUREMENTS: The test results indicates that the EUT meets the requirements.

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Part 2.1055(a)(1) Frequency stability:
Part 90.214 Transient Frequency Behavior

REQUIREMENTS: Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time Intervals	Maximum frequency difference	All Equipment	
		150-174 MHz	421-512 MHz

Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels

t_1^4	±25.0 kHz	5.0 mS	10.0 mS
t_2	±12.5 kHz	20.0 mS	25.0 mS
t_3^4	±25.0 kHz	5.0 mS	10.0 mS

Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels

t_1^4	±12.5 kHz	5.0 mS	10.0 mS
t_2	±6.25 kHz	20.0 mS	25.0 mS
t_3^4	±12.5 kHz	5.0 mS	10.0 mS

Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels

t_1^4	±6.25 kHz	5.0 mS	10.0 mS
t_2	±3.125 kHz	20.0 mS	25.0 mS
t_3^4	±6.25 kHz	5.0 mS	10.0 mS

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 21 of 27

TIMCO ENGINEERING INC.

849 NW State Road 45


Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TEST PROCEEDURE: TIA/EIA TS603 PARA 2.2.19, the levels were set as follows;

1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.

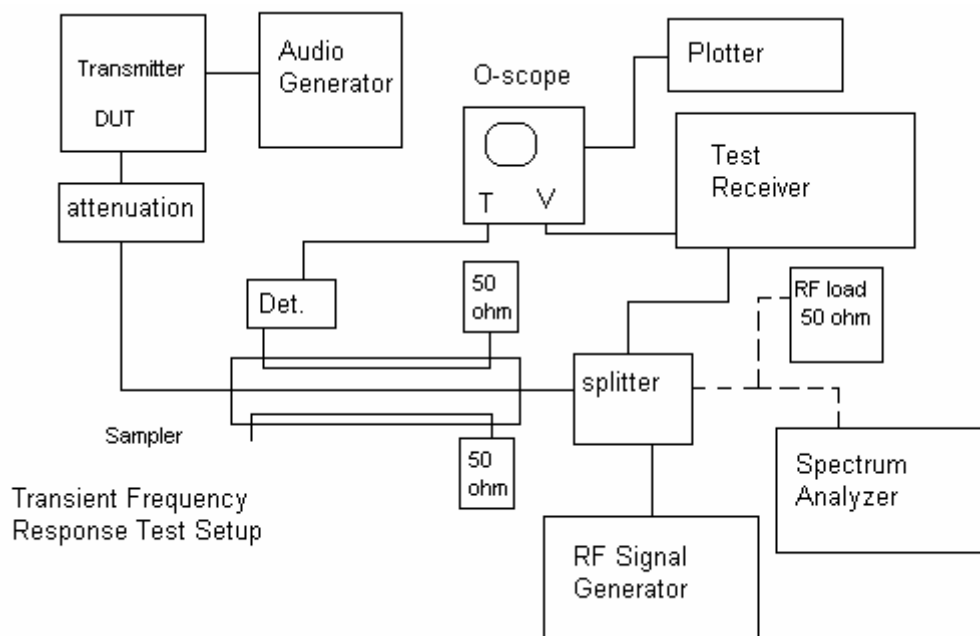

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 22 of 27


TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

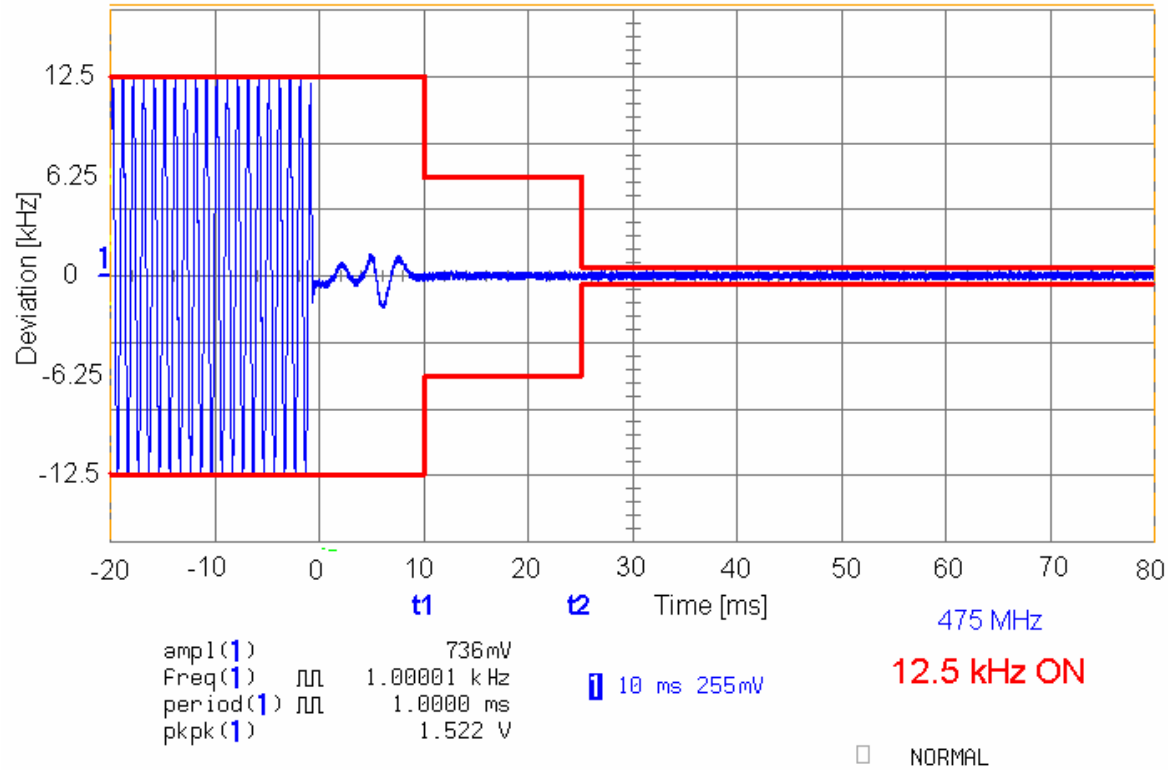

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 23 of 27


TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

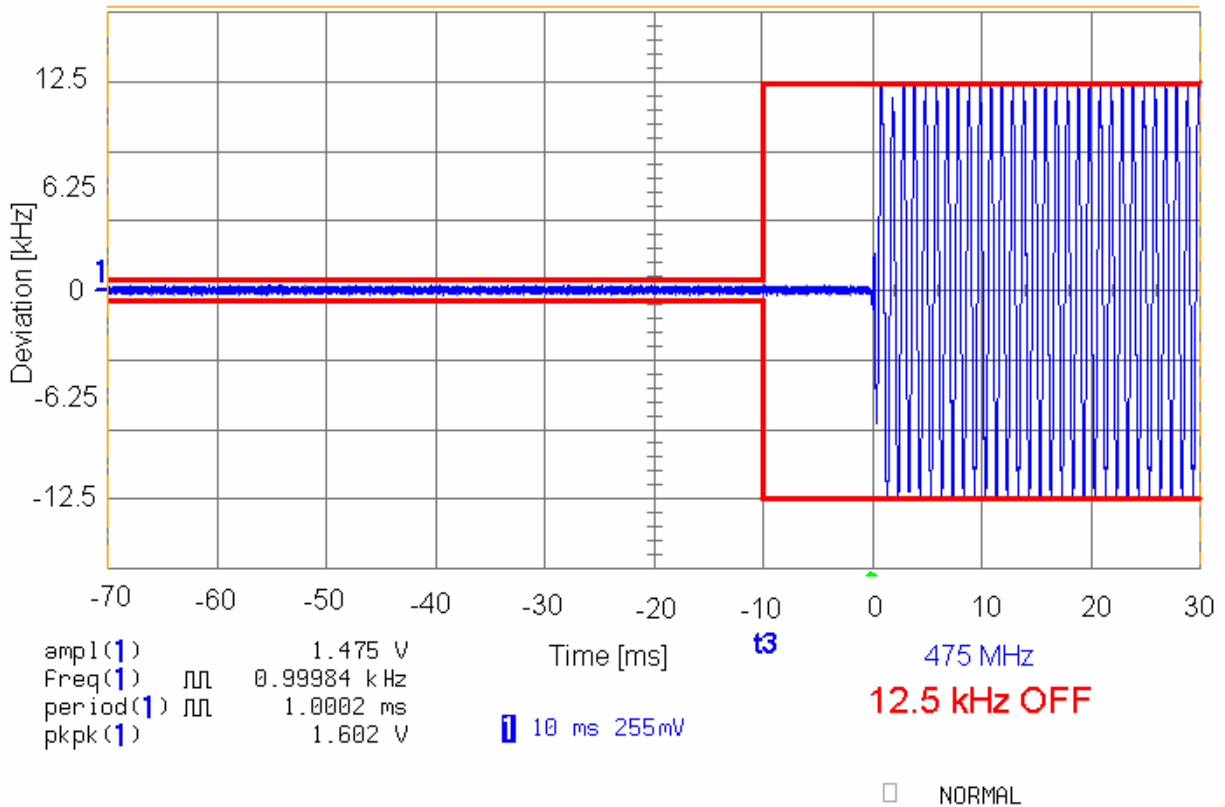


APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 24 of 27

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

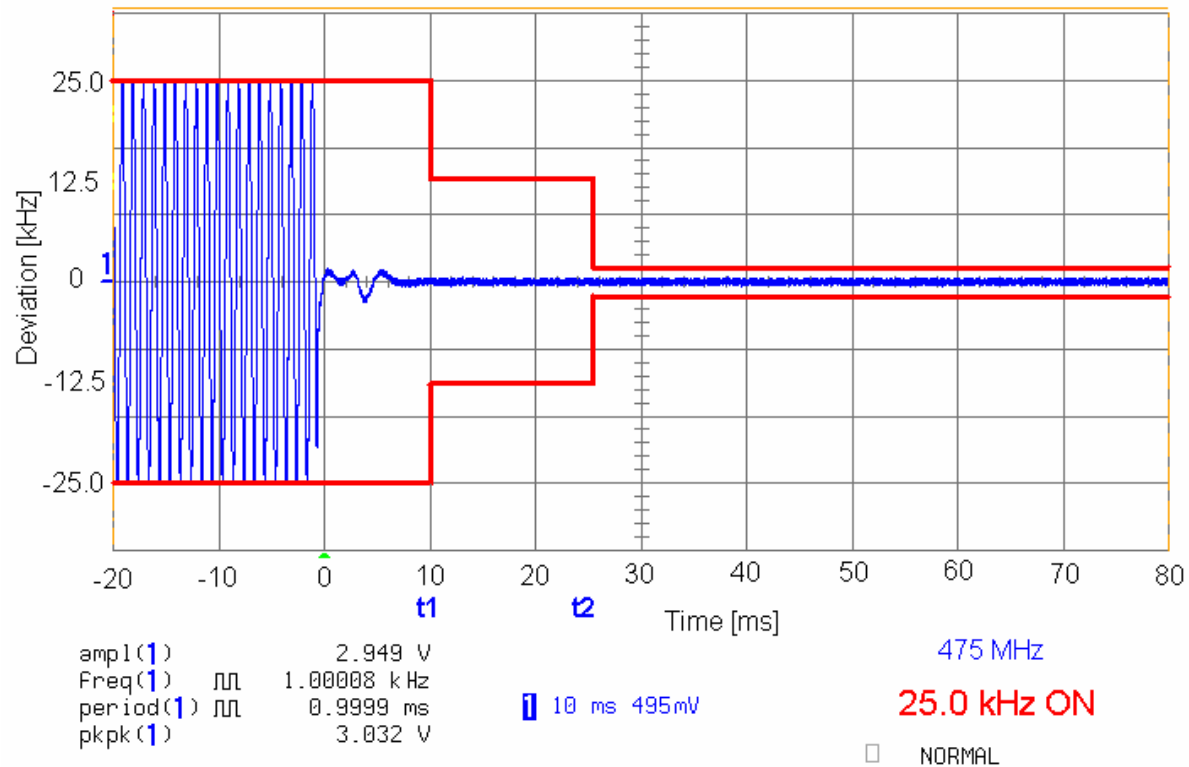


TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

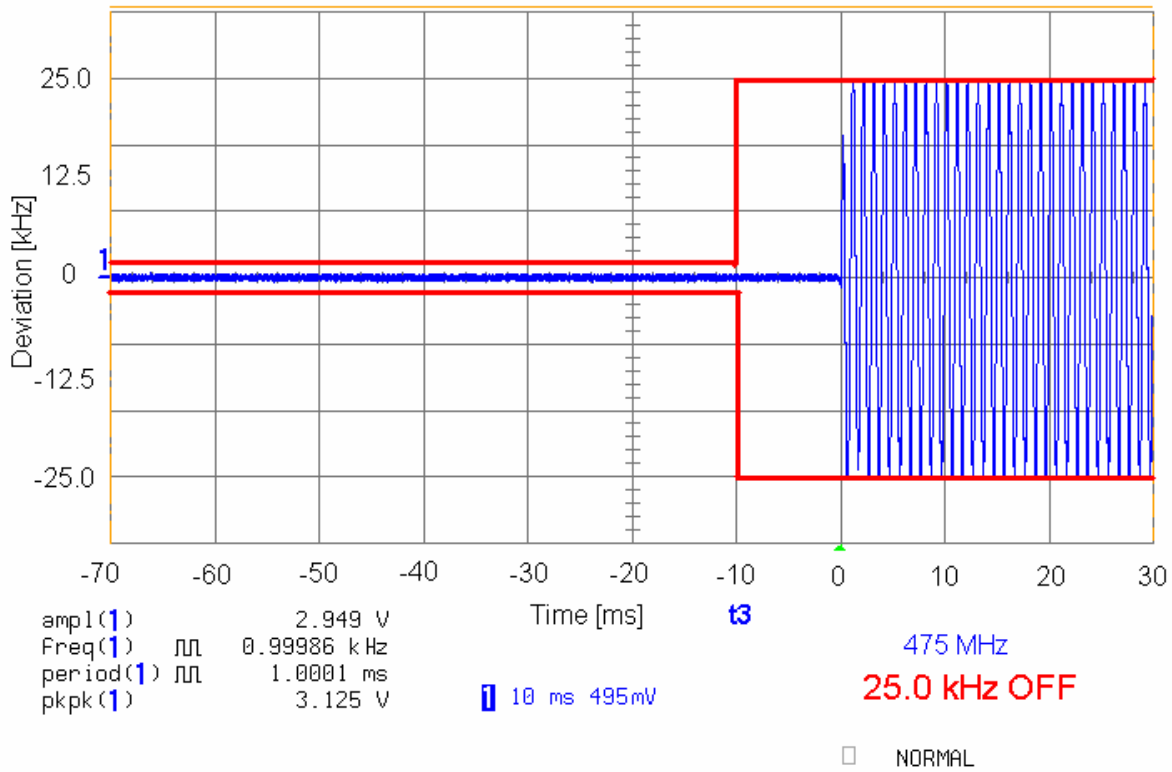

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 26 of 27

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

EMC Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 12/7/05	12/7/07
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 12/7/05	12/7/07
Analyzer Tan Tower Quasi- Peak Adapter	HP	85650A	3303A01690	CAL 12/8/05	12/8/07
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 12/8/05	12/8/07
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	CAL 4/29/05	4/29/07
Antenna: Log- Periodic	Electro-Metrics	LPA-25	1122	CAL 8/26/04	8/26/06
Antenna: Double-Ridged Horn	Electro-Metrics	RGA-180	2319	CAL 12/29/04	12/29/06
LISN	Electro-Metrics	ANS-25/2	2604	CAL 8/27/04	8/27/06
Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 7/16/04	7/16/06

APPLICANT: MIDLAND RADIO CORPORATION

FCC ID: MMA701545B

REPORT #: M\MidlandRadio_MMA\1099AUT6\1099AUT6TestReport.doc

Page 27 of 27