



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)



Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)

Test Lab Certificate No. 2470.01

## SAR TEST REPORT (FCC/IC)

RF EXPOSURE EVALUATION		SPECIFIC ABSORPTION RATE	
APPLICANT		MIDLAND RADIO CORPORATION	
DEVICE UNDER TEST (DUT)		PORTABLE UHF PTT RADIO TRANSCEIVER (ANALOG/DIGITAL)	
DEVICE FREQUENCY RANGE		380 - 470 MHz	
DEVICE MODEL(S)		STP404A	
DEVICE IDENTIFIER(S)		FCC ID: MMA90404	
APPLICATION TYPE		Certification	
STANDARD(S) APPLIED		FCC 47 CFR §2.1093	
		Health Canada Safety Code 6	
PROCEDURE(S) APPLIED		FCC OET Bulletin 65, Supplement C (01-01)	
		Industry Canada RSS-102 Issue 2	
		IEEE 1528-2003	
		IEC 62209-1:2005	
FCC DEVICE CLASSIFICATION		Licensed Non-Broadcast Transmitter Held to Face (TNF)	
IC DEVICE CLASSIFICATION		Land Mobile Radio Transmitter/Receiver (27.41-960 MHz)	
RF EXPOSURE CATEGORY		Occupational / Controlled	
RF EXPOSURE EVALUATION(S)		Face-held & Body-worn	
DATE(S) OF EVALUATION		September 23, 2008	
TEST REPORT SERIAL NO.		090308MMA-T933-S90U	
TEST REPORT REVISION NO.		Revision 1.0	Initial Release
TEST REPORT SIGNATORIES		Testing Performed By	Test Report Prepared By
		Sean Johnston Celltech Labs Inc.	Jonathan Hughes Celltech Labs Inc.
TEST LAB AND LOCATION		Celltech Compliance Testing and Engineering Lab	
		21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada	
TEST LAB CONTACT INFO.		Tel.: 250-765-7650	Fax: 250-765-7645
		info@celltechlabs.com	www.celltechlabs.com
TEST LAB ACCREDITATION(S)		 Test Lab Certificate No. 2470.01	

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)	Frequency Range:	380 - 470 MHz			
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 1 of 46	



Date(s) of Evaluation  
September 23, 2008

Test Report Issue Date  
October 02, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)



Test Lab Certificate No. 2470.01

## DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

<b>Test Lab Information</b>		<b>Name</b>	CELLTECH LABS INC.					
		<b>Address</b>	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada					
<b>Applicant Information</b>		<b>Name</b>	<b>MIDLAND RADIO CORPORATION</b>					
		<b>Address</b>	5900 Parretta Drive, Kansas City, MO 64120 USA					
<b>Standard(s) Applied</b>		<b>FCC</b>	47 CFR §2.1093					
		<b>IC</b>	Health Canada Safety Code 6					
<b>Procedure(s) Applied</b>		<b>FCC</b>	OET Bulletin 65, Supplement C (Edition 01-01)					
		<b>IC</b>	RSS-102 Issue 2					
		<b>IEEE</b>	1528-2003					
		<b>IEC</b>	62209-1:2005					
<b>Device Classification(s)</b>		<b>FCC</b>	Licensed Non-Broadcast Transmitter Held to Face (TNF)					
		<b>IC</b>	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz)					
<b>Device RF Exposure Category</b>		<b>Portable</b>	Occupational / Controlled Environment					
<b>Device Identifier(s)</b>		<b>FCC ID:</b>	MMA90404					
		<b>Model(s)</b>	STP404A					
		<b>Serial No.</b>	080540662 (REV: A)					
<b>Device Description</b>		Portable UHF Push-To-Talk (PTT) Radio Transceiver (Analog/Digital)						
<b>Transmit Frequency Range(s)</b>		380 - 470 MHz						
<b>Max. RF Output Power Tested</b>		5.4 Watts	37.32 dBm	Conducted	380 MHz			
		5.4 Watts	37.32 dBm	Conducted	425 MHz			
		5.4 Watts	37.32 dBm	Conducted	470 MHz			
<b>Antenna Type(s) Tested</b>		Detachable Whip		Length: 163 mm				
<b>Battery Type(s) Tested</b>		Lithium-ion Rechargeable		7.5 V, 1800 mAh				
		Alkaline Battery Case		6x Duracell Procell AA (1.5 V)				
<b>Body-worn Accessories Tested</b>		Belt-Clip		Contains Metal Components				
		Nylon Case with Belt-Clip		Contains Metal Components				
<b>Audio Accessories Tested</b>		Speaker-Microphone (Model: ACC720)						
<b>Max. SAR Level(s) Evaluated</b>		Face-held	<b>3.53 W/kg</b>	1g	50% duty cycle			
		Body-worn	<b>3.82 W/kg</b>	1g	50% duty cycle			
<b>FCC/IC Spatial Peak SAR Limit</b>		Head/Body	8.0 W/kg	1g	50% duty cycle			
Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6 for the Occupational/Controlled Exposure environment. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 2, IEEE 1528-2003 and IEC 62209-1:2005. All measurements were performed in accordance with the SAR system manufacturer recommendations.								
I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.								
The results and statements contained in this report pertain only to the device(s) evaluated.								
This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.								
<b>Test Report Approved By</b>			<b>Sean Johnston</b>	<b>Celltech Labs Inc.</b>				



<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)			<b>Frequency Range:</b>	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 2 of 46		

Date(s) of Evaluation

September 23, 2008

Test Report Serial No.

090308MMA-T933-S90U

Test Report Revision No.

Rev. 1.0 (Initial Release)

Test Report Issue Date

October 02, 2008

Description of Test(s)

Specific Absorption Rate

RF Exposure Category

Occupational (Controlled)



Test Lab Certificate No. 2470.01

## TABLE OF CONTENTS

<b>1.0 INTRODUCTION</b>	<b>4</b>
<b>2.0 SAR MEASUREMENT SYSTEM</b>	<b>4</b>
<b>3.0 MEASUREMENT SUMMARY</b>	<b>5</b>
<b>4.0 DETAILS OF SAR EVALUATION</b>	<b>6</b>
<b>5.0 EVALUATION PROCEDURES</b>	<b>6</b>
<b>6.0 SYSTEM PERFORMANCE CHECK</b>	<b>7</b>
<b>7.0 SIMULATED EQUIVALENT TISSUES</b>	<b>8</b>
<b>8.0 SAR LIMITS</b>	<b>8</b>
<b>9.0 ROBOT SYSTEM SPECIFICATIONS</b>	<b>9</b>
<b>10.0 PROBE SPECIFICATION (ET3DV6)</b>	<b>10</b>
<b>11.0 SIDE PLANAR PHANTOM</b>	<b>10</b>
<b>12.0 VALIDATION PLANAR PHANTOM</b>	<b>10</b>
<b>13.0 DEVICE HOLDER</b>	<b>10</b>
<b>14.0 TEST EQUIPMENT LIST</b>	<b>11</b>
<b>15.0 MEASUREMENT UNCERTAINTIES</b>	<b>12</b>
<b>MEASUREMENT UNCERTAINTIES (CONT.)</b>	<b>13</b>
<b>16.0 REFERENCES</b>	<b>14</b>
<b>APPENDIX A - SAR MEASUREMENT DATA</b>	<b>15</b>
<b>APPENDIX B - SYSTEM PERFORMANCE CHECK DATA</b>	<b>28</b>
<b>APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS</b>	<b>31</b>
<b>APPENDIX D - SAR TEST SETUP &amp; DUT PHOTOGRAPHS</b>	<b>34</b>
<b>APPENDIX E - SYSTEM VALIDATION</b>	<b>45</b>
<b>APPENDIX F - PROBE CALIBRATION</b>	<b>46</b>

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)			<b>Frequency Range:</b>	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 3 of 46		



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)




Test Lab Certificate No. 2470.01

## 1.0 INTRODUCTION

This measurement report demonstrates that the Midland Radio Corporation Model: STP404A Portable UHF PTT Radio Transceiver complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]), IC RSS-102 Issue 2 (see reference [4]), IEEE 1528-2003 (see reference [5]) and IEC 62209-1:2005 (see reference [6]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

## 2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

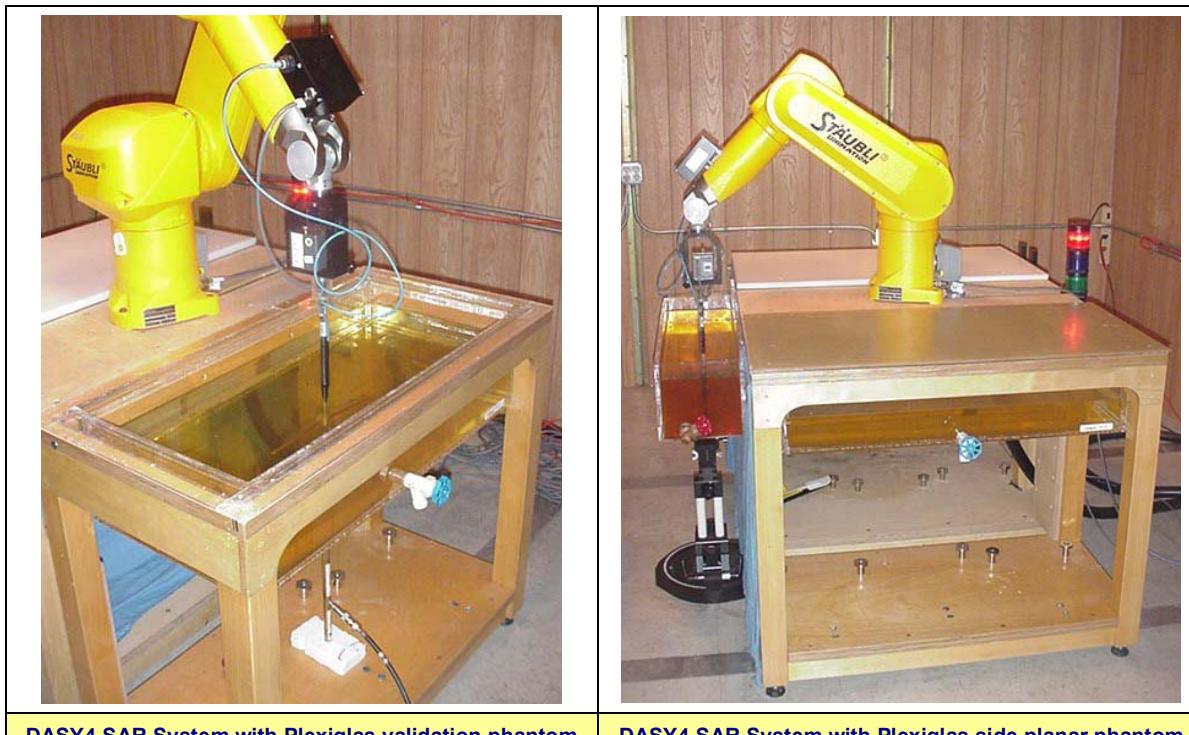

DASY4 SAR System with Plexiglas validation phantom

DASY4 SAR System with Plexiglas side planar phantom

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)		Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 46	

Date(s) of Evaluation  
September 23, 2008Test Report Serial No.  
090308MMA-T933-S90UTest Report Revision No.  
Rev. 1.0 (Initial Release)Test Report Issue Date  
October 02, 2008Description of Test(s)  
Specific Absorption RateRF Exposure Category  
Occupational (Controlled)

Test Lab Certificate No. 2470.01

### 3.0 MEASUREMENT SUMMARY

## SAR EVALUATION RESULTS

Test Type	Freq.	Ch.	Test Mode	Battery Type	Accessory Type(s)		Device Position to Planar Phantom	Device Spacing to Planar Phantom	Cond. Power Before Test	Measured SAR 1g (W/kg)		SAR Drift During Test	Scaled SAR with droop 1g (W/kg)	
										Duty Cycle			Duty Cycle	
					MHz	Body-worn	Audio			cm	Watts		100%	50%
Face	425	Mid	CW	Li-Ion	n/a	n/a	Front Side	2.5	5.4	5.62	2.81	-0.383	6.14	3.07
Face	425	Mid	CW	Alkaline	n/a	n/a	Front Side	2.5	5.4	4.53	2.27	-0.946	5.63	2.82
Face	380	Low	CW	Li-Ion	n/a	n/a	Front Side	2.5	5.4	6.55	3.28	-0.327	7.06	3.53
Face	470	High	CW	Li-Ion	n/a	n/a	Front Side	2.5	5.4	2.42	1.21	-0.219	2.55	1.27
Body	425	Mid	CW	Li-Ion	Belt-Clip	Speaker-Mic	Back Side	1.5	5.4	4.75	2.38	-0.310	5.10	2.55
Body	425	Mid	CW	Alkaline	Belt-Clip	Speaker-Mic	Back Side	1.5	5.4	4.21	2.11	-1.21	5.56	2.78
Body	425	Mid	CW	Li-Ion	Nylon Case	Speaker-Mic	Back Side	2.5	5.4	3.89	1.95	-0.297	4.17	2.08
Body	380	Low	CW	Li-Ion	Belt-Clip	Speaker-Mic	Back Side	1.5	5.4	7.24	3.62	-0.231	7.64	3.82
Body	470	High	CW	Li-Ion	Belt-Clip	Speaker-Mic	Back Side	1.5	5.4	2.25	1.13	-0.401	2.47	1.23

### SAR LIMIT(S)

### BRAIN

### BODY

### SPATIAL PEAK

### RF EXPOSURE CATEGORY

FCC 47 CFR 2.1093	Health Canada Safety Code 6	8.0 W/kg	8.0 W/kg	averaged over 1 gram	Occupational / Controlled
-------------------	-----------------------------	----------	----------	----------------------	---------------------------

Test Date	September 23, 2008			September 23, 2008			Measured Fluid Type	Brain	Body	Unit	
Fluid Type	450 MHz Brain			450 MHz Body			Atmospheric Pressure	101.1	101.1	kPa	
Dielectric Constant $\epsilon_r$	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	Relative Humidity	35	35	%	
	43.5	$\pm 5\%$	44.4	+2.1%	56.7	$\pm 5\%$	56.7	0.0%	Ambient Temperature	23.8	23.5
Fluid Type	450 MHz Brain			450 MHz Body			Fluid Temperature	22.8	22.5	°C	
Conductivity $\sigma$ (mho/m)	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	Fluid Depth	$\geq 15$	$\geq 15$	cm	
	0.87	$\pm 5\%$	0.89	+2.3%	0.94	$\pm 5\%$	0.93	-1.0%	$\rho$ (Kg/m <sup>3</sup> )	1000	

### Notes

1.	Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.									
2.	The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.									
3.	For the face-held SAR evaluations the radio was tested with both battery types at the mid channel and the worst-case battery configuration was evaluated at the low and high channels. For the body-worn SAR evaluations the radio was tested with both battery types and body-worn accessories (note: nylon case does not support alkaline battery case) at the mid channel and the worst-case battery and body-worn accessory configuration was evaluated at the low and high channels.									
4.	The power droop of the DUT measured by the DASY4 system for the duration of the SAR evaluations was added to the measured SAR levels to report scaled SAR results as shown in the above test data table. A SAR-versus-Time power droop evaluation was performed in the test configuration that reported the maximum-scaled SAR level and the test configuration that reported the maximum power droop. See Appendix A (SAR Test Plots) for SAR-versus-Time power droop evaluation plot.									
5.	The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within +/-2°C of the fluid temperature reported during the dielectric parameter measurements.									
6.	The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).									

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)	Frequency Range:	380 - 470 MHz			
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 5 of 46	

	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 4.0 DETAILS OF SAR EVALUATION

The Midland Radio Corporation Model: STP404A Portable UHF PTT Radio Transceiver described in this report was compliant for localized Specific Absorption Rate (Occupational / Controlled Exposure) based on the test provisions and conditions described below. Detailed photographs of the test setup are shown in Appendix D.

1. The DUT was evaluated for face-held SAR with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm spacing was maintained between the front side of the DUT and the outer surface of the planar phantom.
2. The DUT was evaluated for body-worn SAR with the alkaline battery case and attached belt-clip accessory. The back of the radio was placed parallel to, and touching, the outer surface of the planar phantom. The belt-clip accessory attached to the alkaline battery case provided a 1.5 cm spacing from the back of the DUT to the outer surface of the planar phantom.
3. The DUT was evaluated for body-worn SAR with the lithium-ion battery pack and attached belt-clip accessory. The back of the radio was placed parallel to, and touching, the outer surface of the planar phantom. The belt-clip accessory attached to the lithium-ion battery pack provided a 1.5 cm spacing from the back of the DUT to the outer surface of the planar phantom.
4. The DUT was evaluated for body-worn SAR with the lithium-ion battery pack and placed inside the nylon case accessory. The back of the nylon case accessory was placed parallel to, and belt-clip touching, the outer surface of the planar phantom. The nylon case accessory with attached belt-clip provided a 2.5 cm spacing from the back of the DUT to the outer surface of the planar phantom.
5. The body-worn SAR evaluations were performed with the customer-supplied speaker-microphone accessory connected to the audio port on the side of the radio.
6. The DUT was tested in unmodulated continuous transmit mode (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
7. The conducted power levels referenced in this report were measured by Celltech Labs Inc. prior to the SAR evaluations at the antenna connector of the DUT using a Gigatronics 8652A Universal Power Meter in accordance with the procedures described in FCC 47 CFR §2.1046 and IC RSS-Gen.

## 5.0 EVALUATION PROCEDURES

- (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.  
 (ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm. An area scan was determined as follows:
  - c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
  - d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
 A 1g and 10g spatial peak SAR was determined as follows:
  - e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
  - f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
  - g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.


<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)		<b>Frequency Range:</b>	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 6 of 46			

## 6.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations a system check was performed using a Plexiglas planar phantom and 450 MHz dipole (see Appendix B for system performance check test plot). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of  $\pm 10\%$  from the system validation target SAR value (see Appendix E for system validation procedures).

### SYSTEM PERFORMANCE CHECK EVALUATION

Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant $\epsilon_r$			Conductivity $\sigma$ (mho/m)			$\rho$ (Kg/m <sup>3</sup> )	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Freq. MHz	Sys. Val Target	Meas.	Dev.	Sys. Val Target	Meas.	Dev.	Sys. Val Target	Meas.	Dev.					
Sep 23	Brain	1.18 $\pm 10\%$	1.22	+3.4%	43.4 $\pm 5\%$	44.4	+2.3%	0.89 $\pm 5\%$	0.89	0.0%	1000	23.8	22.8	$\geq 15$	35	101.1
	450															
Note(s)	1. The target SAR value is referenced from the System Validation procedure performed by Celltech Labs Inc. (see Appendix E).															
	2. The target dielectric parameters are referenced from the System Validation procedure performed by Celltech Labs Inc. (see Appendix E).															
	3. The fluid temperature was measured prior to and after the system performance check to ensure the temperature remained within $\pm 2^\circ\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.															

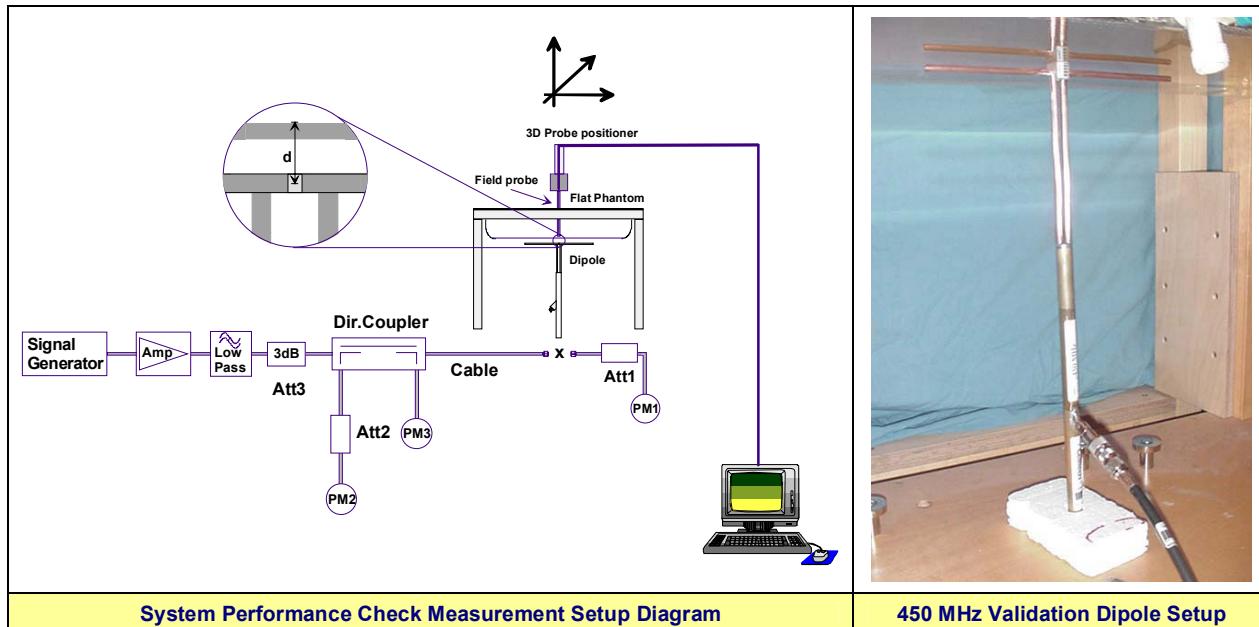

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404		
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)	Frequency Range:	380 - 470 MHz				
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 7 of 46			



Date(s) of Evaluation  
September 23, 2008

Test Report Issue Date  
October 02, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## 7.0 SIMULATED EQUIVALENT TISSUES

The simulated tissue mixtures consisted of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide was added and visual inspection made to ensure air bubbles were not trapped during the mixing process. The fluid was prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz Brain	450 MHz Body
	System Check & DUT Evaluation	
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

## 8.0 SAR LIMITS

SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	(General Population / Uncontrolled Exposure)	(Occupational / Controlled Exposure)
Spatial Average (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.			
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.			
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)			Frequency Range:	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 8 of 46		



Date(s) of Evaluation  
September 23, 2008

Test Report Issue Date  
October 02, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## 9.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44 Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	ET3DV6
Serial No.	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<u>Evaluation Phantom</u>	
Type	Side Planar Phantom
Shell Material	Plexiglas
Bottom Thickness	2.0 mm ± 0.1 mm
Outer Dimensions	75.0 cm (L) x 22.5 cm (W) x 20.5 cm (H); Back Plane: 25.7 cm (H)
<u>Validation Phantom (≤ 450MHz)</u>	
Type	Planar Phantom
Shell Material	Plexiglas
Bottom Thickness	6.2 mm ± 0.1 mm
Outer Dimensions	86.0 cm (L) x 39.5 cm (W) x 21.8 cm (H)

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)			Frequency Range:	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 9 of 46		



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## 10.0 PROBE SPECIFICATION (ET3DV6)

Construction:	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)
Calibration:	In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm$ 8%)
Frequency:	10 MHz to > 6 GHz; Linearity: $\pm$ 0.2 dB (30 MHz to 3 GHz)
Directivity:	$\pm$ 0.2 dB in brain tissue (rotation around probe axis) $\pm$ 0.4 dB in brain tissue (rotation normal to probe axis)
Dynamic Range:	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm$ 0.2 dB
Surface Detect:	$\pm$ 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions:	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application:	General dosimetry up to 3 GHz Compliance tests of mobile phone



ET3DV6 E-Field Probe

## 11.0 SIDE PLANAR PHANTOM

The side planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The side planar phantom is mounted on the side of the DASY4 compact system table.



Plexiglas Side Planar Phantom

## 12.0 VALIDATION PLANAR PHANTOM

The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for system validations at 450MHz and below. The validation planar phantom is mounted to the table of the DASY4 compact system.



Plexiglas Validation Planar Phantom

## 13.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.



Device Holder

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)		Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 10 of 46					

 Celltech Testing and Engineering Services Ltd.	Date(s) of Evaluation September 23, 2008	Test Report Serial No. 090308MMA-T933-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date October 02, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

## 14.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE DATE
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	NA	NA
x	-Robot	00046	599396-01	NA	NA
x	-DAE4	00019	353	22Apr08	22Apr09
x	-ET3DV6 E-Field Probe	00017	1590	21Jul08	21Jul09
x	-450 MHz Validation Dipole	00024	136	25Jul08	25Jul09
	-SAM Phantom V4.0C	00154	1033	NA	NA
	-Barski Planar Phantom	00155	03-01	NA	NA
x	-Plexiglas Side Planar Phantom	00156	161	NA	NA
x	-Plexiglas Validation Planar Phantom	00157	137	NA	NA
	ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	NA	NA
x	HP 85070C Dielectric Probe Kit	00033	US39240170	NA	NA
x	Gigatronics 8652A Power Meter	00007	1835272	23Apr08	23Apr09
x	Gigatronics 80701A Power Sensor	00014	1833699	23Apr08	23Apr09
x	HP 8753ET Network Analyzer	00134	US39170292	28Apr08	28Apr09
x	HP 8648D Signal Generator	00005	3847A00611	NR	NR
	Rohde & Schwarz SMR20 Signal Generator	00006	100104	NR	NR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	NR	NR
	Amplifier Research 10W1000C Power Amplifier	00041	27887	NR	NR
	Nextec NB00383 Microwave Amplifier	00151	0535	NR	NR
Abbr.	NA = Not Applicable		NR = Not Required		

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)		Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 11 of 46	



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## 15.0 MEASUREMENT UNCERTAINTIES

### UNCERTAINTY BUDGET FOR DEVICE EVALUATION

Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	$V_i$ or $V_{eff}$
<b>Measurement System</b>						
Probe calibration (450 MHz)	6.65	Normal	1	1	6.65	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	0.7	1.9	∞
Spherical isotropy of the probe	9.6	Rectangular	1.732050808	0.7	3.9	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	0.8	Rectangular	1.732050808	1	0.5	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0.8	Rectangular	1.732050808	1	0.5	∞
Integration time	2.6	Rectangular	1.732050808	1	1.5	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
<b>Test Sample Related</b>						
Device positioning	2.9	Normal	1	1	2.9	12
Device holder uncertainty	3.6	Normal	1	1	3.6	8
Power drift	5	Rectangular	1.732050808	1	2.9	∞
<b>Phantom and Setup</b>						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	2.3	Normal	1	0.64	1.5	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.1	Normal	1	0.6	1.3	∞
<b>Combined Standard Uncertainty</b>						
<b>Expanded Uncertainty (k=2)</b>						

Measurement Uncertainty Table in accordance with IEEE 1528-2003 and IEC 62209-1:2005

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)		Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 12 of 46	



Date(s) of Evaluation  
September 23, 2008

Test Report Issue Date  
October 02, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## MEASUREMENT UNCERTAINTIES (CONT.)

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	$V_i$ or $V_{eff}$
<b>Measurement System</b>						
Probe calibration (450 MHz)	6.65	Normal	1	1	6.65	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	0.8	Rectangular	1.732050808	1	0.5	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
<b>Dipole</b>						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
<b>Phantom and Setup</b>						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	0	Normal	1	0.64	0.0	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.3	Normal	1	0.6	1.4	∞
<b>Combined Standard Uncertainty</b>						
<b>Expanded Uncertainty (k=2)</b>						
Measurement Uncertainty Table in accordance with IEEE 1528-2003 and IEC 62209-1:2005						

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)		Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 13 of 46	

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 <small>IAC-MRA ACCREDITED</small>
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 16.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] IEC International Standard 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)		<b>Frequency Range:</b>	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 14 of 46			



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## APPENDIX A - SAR MEASUREMENT DATA

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)			<b>Frequency Range:</b>	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 15 of 46		

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 <small>IAC-MRA</small> <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/23/2008

## Face-held SAR - Mid Channel - 425 MHz

**DUT: Midland Model: KNG-P400; Type: Portable UHF PTT Radio Transceiver; Serial: 080540662**

Ambient Temp: 23.8°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 425 MHz; Duty Cycle: 1:1

Communication System: FM UHF (CW)

RF Output Power: 5.4 Watts (Conducted)

**7.5V 1800mAh Lithium-ion Rechargeable Battery**

Medium: HSL450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.89$  mho/m;  $\epsilon_r = 44.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

## Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Mid Channel

**Area Scan (8x22x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.88 mW/g

## Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Mid Channel


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 85.5 V/m; Power Drift = -0.383 dB

Peak SAR (extrapolated) = 7.64 W/kg

**SAR(1 g) = 5.62 mW/g; SAR(10 g) = 4.2 mW/g**

Maximum value of SAR (measured) = 5.86 mW/g

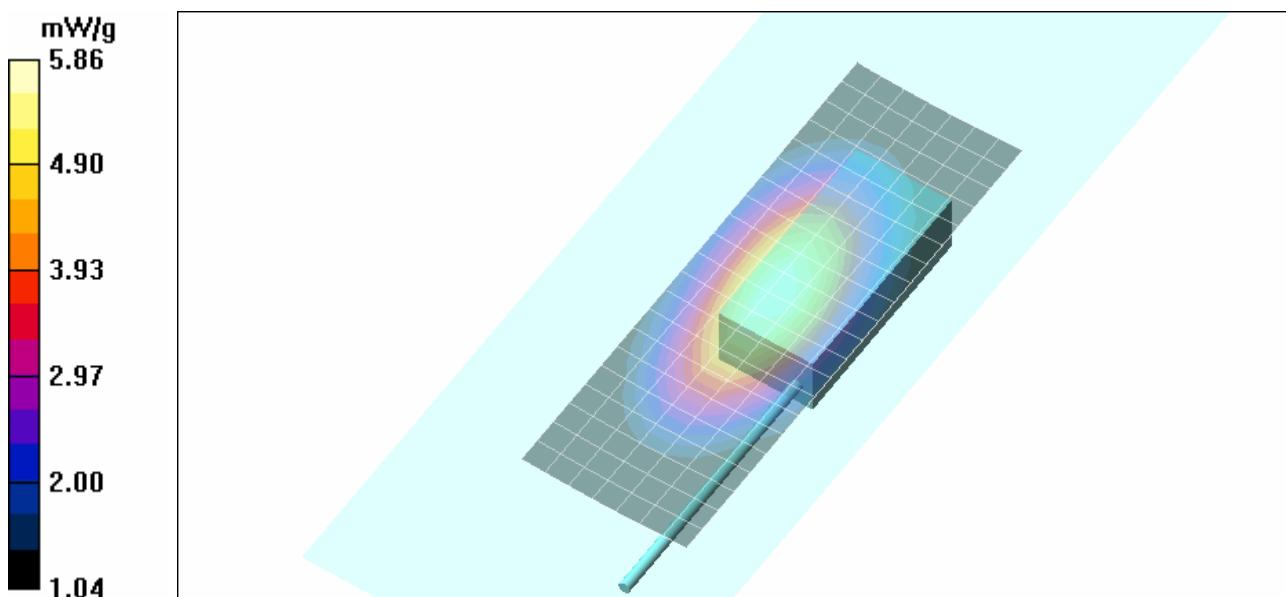

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)			<b>Frequency Range:</b>	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 16 of 46		

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 <small>IAC-MRA</small> <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/23/2008

### Face-held SAR - Mid Channel - 425 MHz

**DUT: Midland Model: KNG-P400; Type: Portable UHF PTT Radio Transceiver; Serial: 080540662**

Ambient Temp: 23.8°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 425 MHz; Duty Cycle: 1:1

Communication System: FM UHF (CW)

RF Output Power: 5.4 Watts (Conducted)

**Alkaline Battery Case (6x 1.5V Duracell Procell)**

Medium: HSL450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.89$  mho/m;  $\epsilon_r = 44.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Mid Channel

**Area Scan (8x22x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.36 mW/g

### Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Mid Channel


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 79.6 V/m; Power Drift = -0.946 dB

Peak SAR (extrapolated) = 6.23 W/kg

**SAR(1 g) = 4.53 mW/g; SAR(10 g) = 3.38 mW/g**

Maximum value of SAR (measured) = 4.74 mW/g

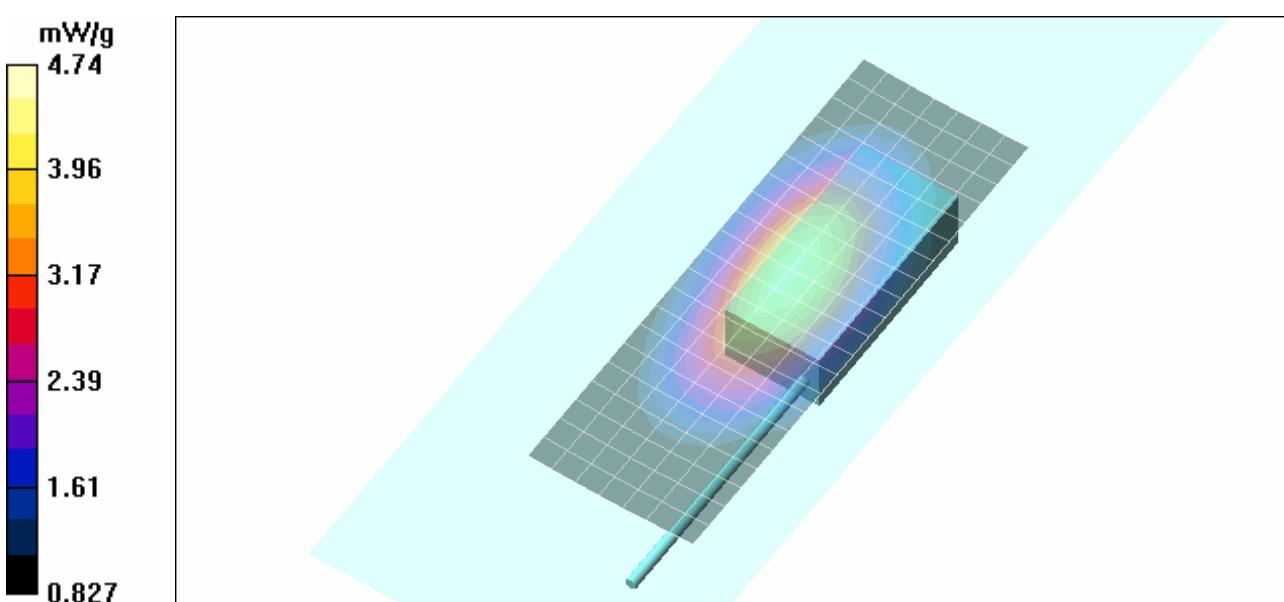

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)			<b>Frequency Range:</b>	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 17 of 46		

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 <small>IAC-MRA</small> <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/23/2008

## Face-held SAR - Low Channel - 380 MHz

**DUT: Midland Model: KNG-P400; Type: Portable UHF PTT Radio Transceiver; Serial: 080540662**

Ambient Temp: 23.8°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 380 MHz; Duty Cycle: 1:1

Communication System: FM UHF (CW)

RF Output Power: 5.4 Watts (Conducted)

**7.5V 1800mAh Lithium-ion Rechargeable Battery**

Medium: HSL450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.89$  mho/m;  $\epsilon_r = 44.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

## Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Low Channel

**Area Scan (8x22x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.39 mW/g

## Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Low Channel


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 90.9 V/m; Power Drift = -0.327 dB

Peak SAR (extrapolated) = 8.97 W/kg

**SAR(1 g) = 6.55 mW/g; SAR(10 g) = 4.92 mW/g**


Maximum value of SAR (measured) = 6.80 mW/g

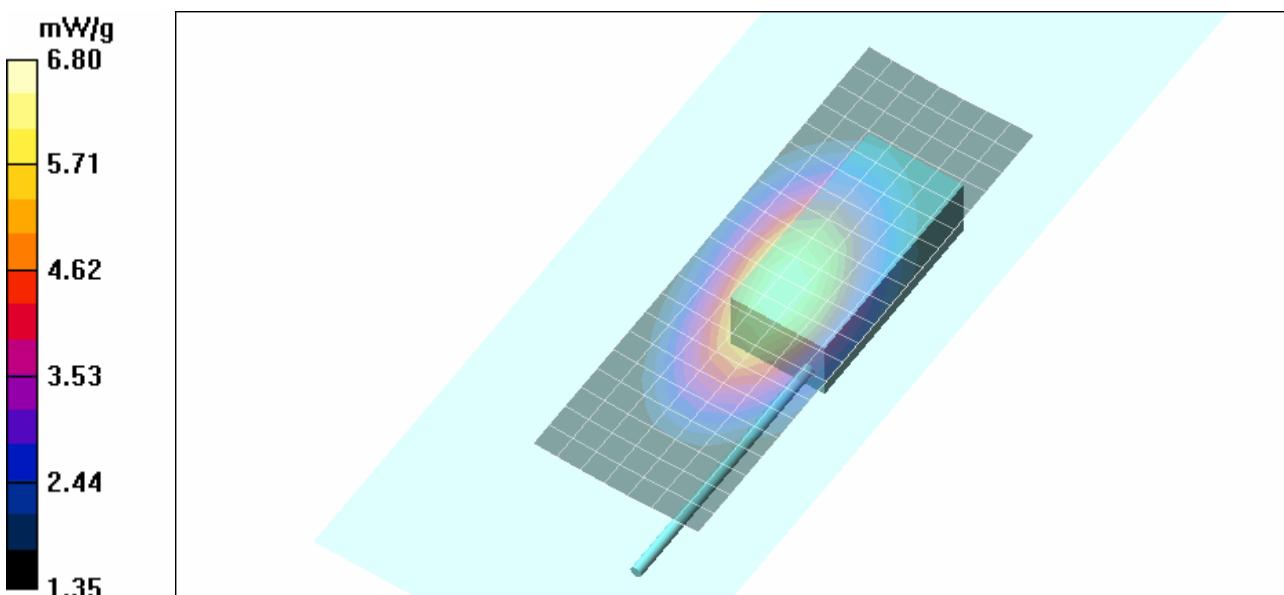

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)			<b>Frequency Range:</b>	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 18 of 46		

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 IAC-MRA  ACCREDITED
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## Z-Axis Scan

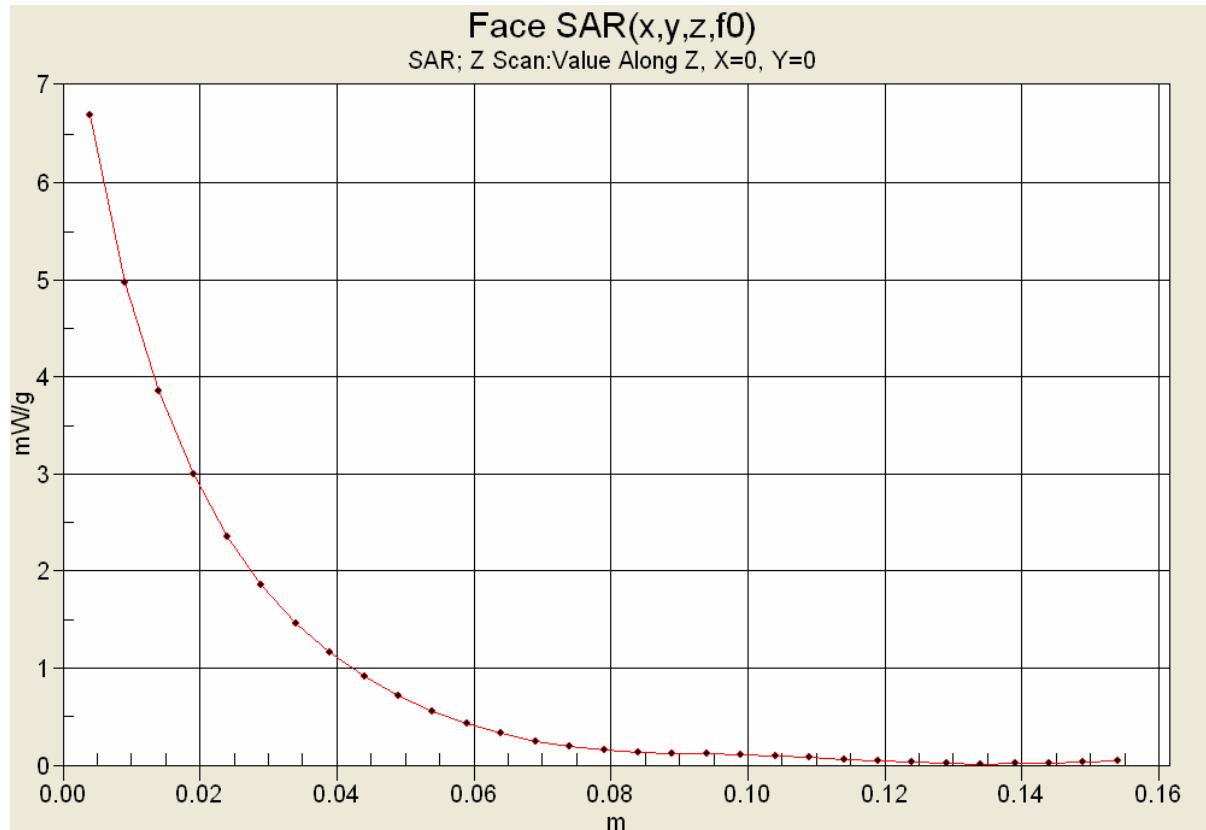

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)			Frequency Range:	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 19 of 46		

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 <small>IAC-MRA</small> <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/23/2008

### Face-held SAR - High Channel - 470 MHz

**DUT: Midland Model: KNG-P400; Type: Portable UHF PTT Radio Transceiver; Serial: 080540662**

Ambient Temp: 23.8°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 470 MHz; Duty Cycle: 1:1

Communication System: FM UHF (CW)

RF Output Power: 5.4 Watts (Conducted)

**7.5V 1800mAh Lithium-ion Rechargeable Battery**

Medium: HSL450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.89$  mho/m;  $\epsilon_r = 44.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - High Channel

**Area Scan (8x22x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.59 mW/g

### Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - High Channel


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 56.8 V/m; Power Drift = -0.219 dB

Peak SAR (extrapolated) = 3.34 W/kg

**SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.8 mW/g**

Maximum value of SAR (measured) = 2.53 mW/g

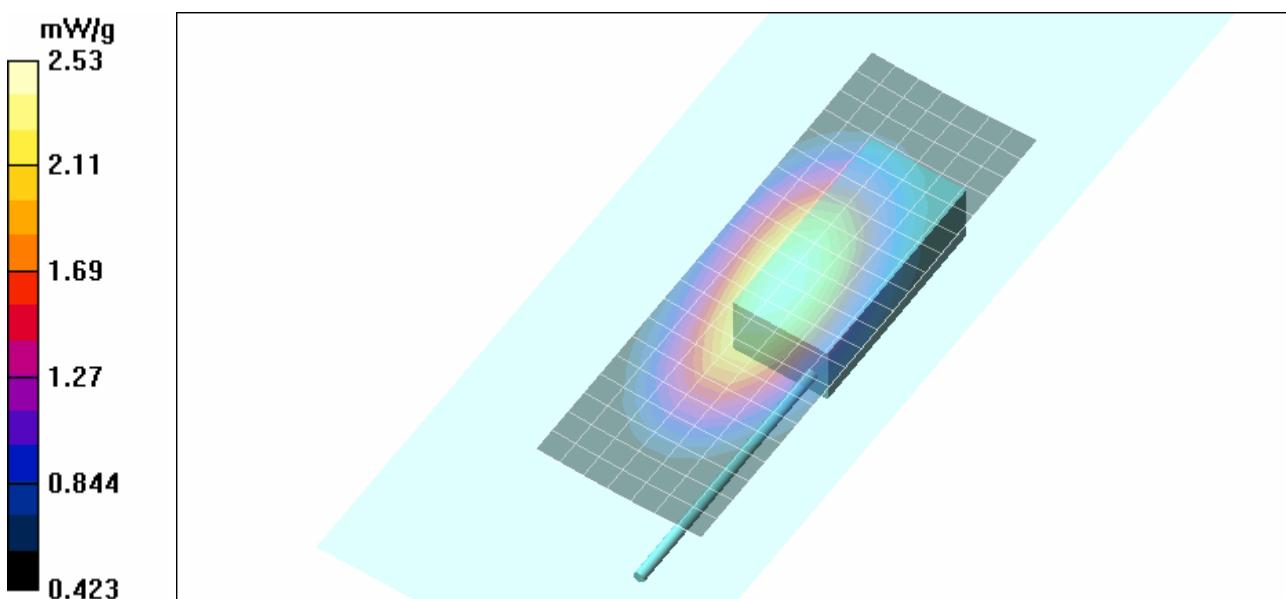

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)			<b>Frequency Range:</b>	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 20 of 46		

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 <small>IAC-MRA</small>
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/23/2008

## Body-worn SAR - Mid Channel - 425 MHz

**DUT: Midland Model: KNG-P400; Type: Portable UHF PTT Radio Transceiver; Serial: 080540662**

**Body-worn Accessory: Belt-Clip (P/N: 550-070-2002)**

**Audio Accessory: Speaker-Microphone (Model: ACC720)**

Ambient Temp: 23.5°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 425 MHz; Duty Cycle: 1:1

Communication System: FM UHF (CW)

RF Output Power: 5.4 Watts (Conducted)

**7.5V 1800mAh Lithium-ion Rechargeable Battery**

Medium: MSL450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.93$  mho/m;  $\epsilon_r = 56.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Mid Channel

**Area Scan (8x22x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.19 mW/g

### Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Mid Channel


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 68.5 V/m; Power Drift = -0.310 dB

Peak SAR (extrapolated) = 6.55 W/kg

**SAR(1 g) = 4.75 mW/g; SAR(10 g) = 3.5 mW/g**

Maximum value of SAR (measured) = 4.98 mW/g

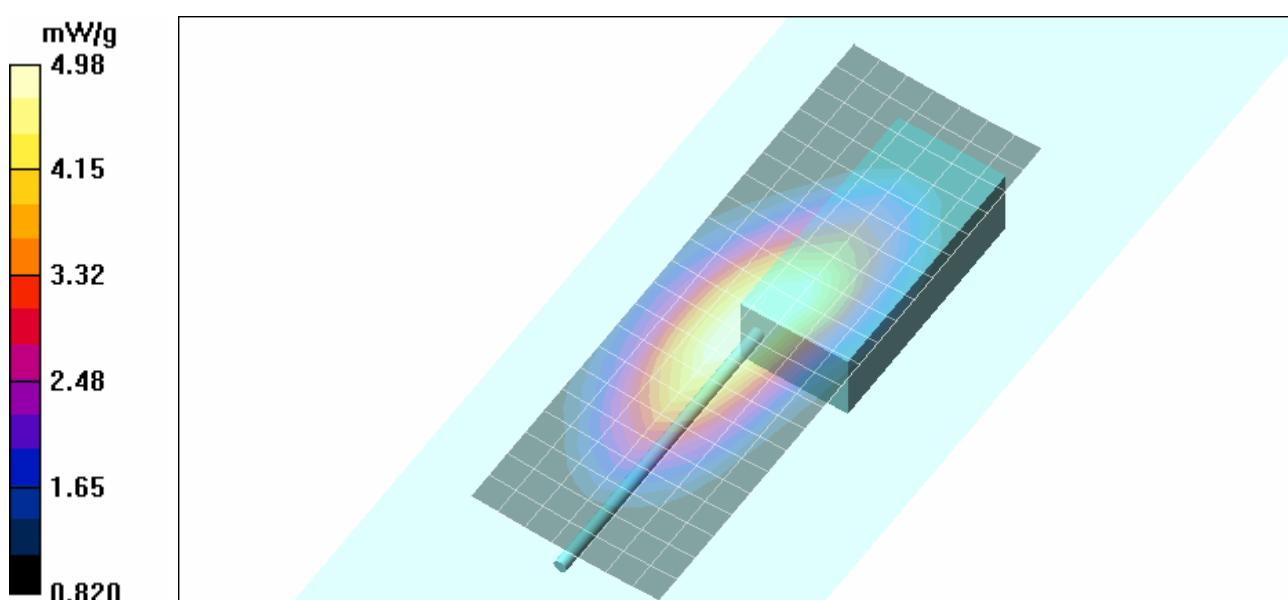

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)	<b>Frequency Range:</b>	380 - 470 MHz			
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 21 of 46			

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 <small>IAC-MRA</small> <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/23/2008

## Body-worn SAR - Mid Channel - 425 MHz

**DUT: Midland Model: KNG-P400; Type: Portable UHF PTT Radio Transceiver; Serial: 080540662**

**Body-worn Accessory: Belt-Clip (P/N: 550-070-2002)**

**Audio Accessory: Speaker-Microphone (Model: ACC720)**

Ambient Temp: 23.5°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 425 MHz; Duty Cycle: 1:1

Communication System: FM UHF (CW)

RF Output Power: 5.4 Watts (Conducted)

**Alkaline Battery Case (6x 1.5V Duracell Procell)**

Medium: MSL450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.93$  mho/m;  $\epsilon_r = 56.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 22/04/2008

- Phantom: Side Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Mid Channel

**Area Scan (8x22x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.63 mW/g

### Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Mid Channel


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 73.4 V/m; Power Drift = -1.21 dB

Peak SAR (extrapolated) = 5.94 W/kg

**SAR(1 g) = 4.21 mW/g; SAR(10 g) = 3.08 mW/g**

Maximum value of SAR (measured) = 4.41 mW/g

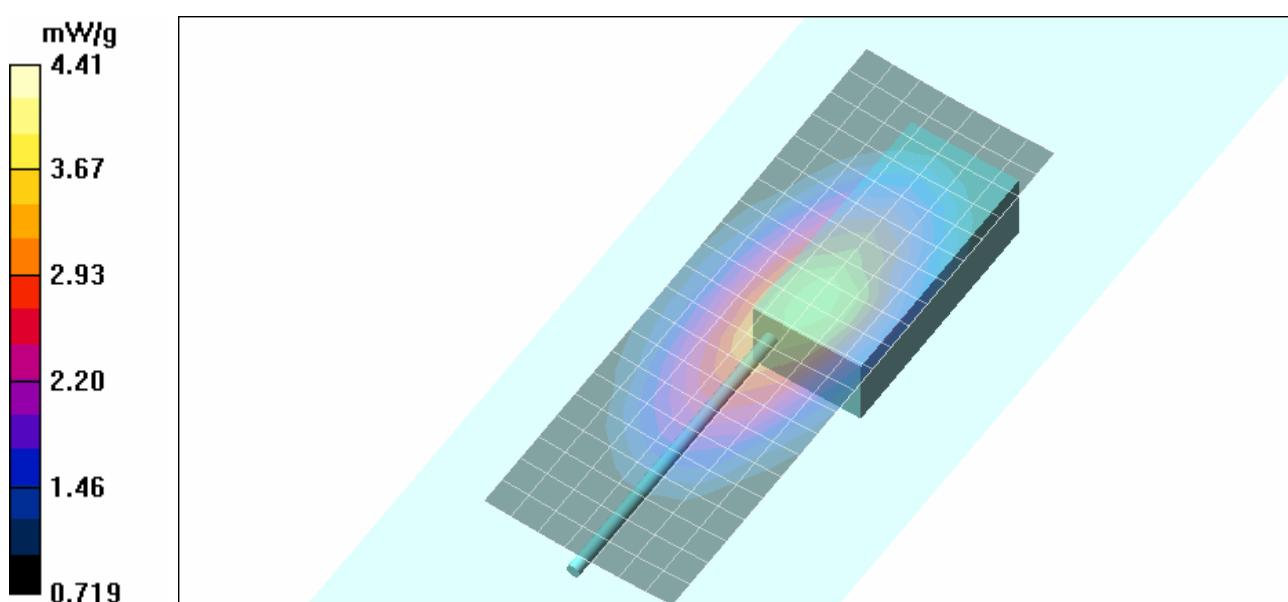

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404		
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)	<b>Frequency Range:</b>	380 - 470 MHz				
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 22 of 46			



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## SAR-versus-Time Power Droop Evaluation

Body-worn Configuration - Belt-Clip accessory

Alkaline Battery Case - Mid Channel (425 MHz)



Max SAR: 4.81174 mW/g

End SAR: 3.46416 mW/g (-1.43 dB)

SAR after 340s: 3.73554 mW/g (-1.10 dB)

(340s = Zoom Scan Duration)

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404		
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)	Frequency Range:	380 - 470 MHz				
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 23 of 46			

 Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/23/2008

### Body-worn SAR - Mid Channel - 425 MHz

**DUT: Midland Model: KNG-P400; Type: Portable UHF PTT Radio Transceiver; Serial: 080540662**

**Body-worn Accessory: Nylon Case with Belt-Clip (Model: ACC306)**

**Audio Accessory: Speaker-Microphone (Model: ACC720)**

Ambient Temp: 23.5°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 425 MHz; Duty Cycle: 1:1

Communication System: FM UHF (CW)

RF Output Power: 5.4 Watts (Conducted)

**7.5V 1800mAh Lithium-ion Rechargeable Battery**

Medium: MSL450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.93$  mho/m;  $\epsilon_r = 56.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 22/04/2008

- Phantom: Side Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Body-worn SAR - 2.5 cm Nylon Case & Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Mid Channel

**Area Scan (8x22x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.50 mW/g

### Body-worn SAR - 2.5 cm Nylon Case & Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Mid Channel


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 62.2 V/m; Power Drift = -0.297 dB

Peak SAR (extrapolated) = 5.84 W/kg

**SAR(1 g) = 3.89 mW/g; SAR(10 g) = 2.81 mW/g**

Maximum value of SAR (measured) = 4.06 mW/g

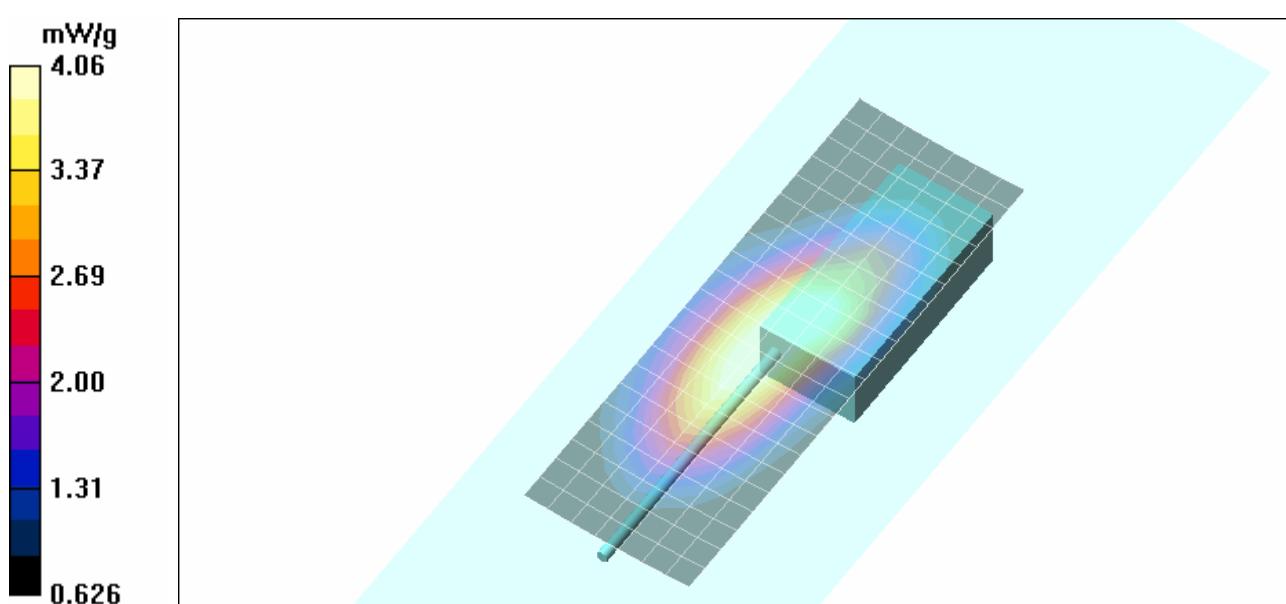

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404		
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)	<b>Frequency Range:</b>	380 - 470 MHz				
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 24 of 46			

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 IAC-MRA  ACCREDITED
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/23/2008

## Body-worn SAR - Low Channel - 380 MHz

**DUT: Midland Model: KNG-P400; Type: Portable UHF PTT Radio Transceiver; Serial: 080540662**

**Body-worn Accessory: Belt-Clip (P/N: 550-070-2002)**

**Audio Accessory: Speaker-Microphone (Model: ACC720)**

Ambient Temp: 23.5°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 380 MHz; Duty Cycle: 1:1

Communication System: FM UHF (CW)

RF Output Power: 5.4 Watts (Conducted)

**7.5V 1800mAh Lithium-ion Rechargeable Battery**

Medium: MSL450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.93$  mho/m;  $\epsilon_r = 56.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 22/04/2008

- Phantom: Side Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Low Channel

**Area Scan (8x22x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.34 mW/g

### Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Low Channel


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 88.2 V/m; Power Drift = -0.231 dB

Peak SAR (extrapolated) = 9.97 W/kg

**SAR(1 g) = 7.24 mW/g; SAR(10 g) = 5.41 mW/g**

Maximum value of SAR (measured) = 7.58 mW/g

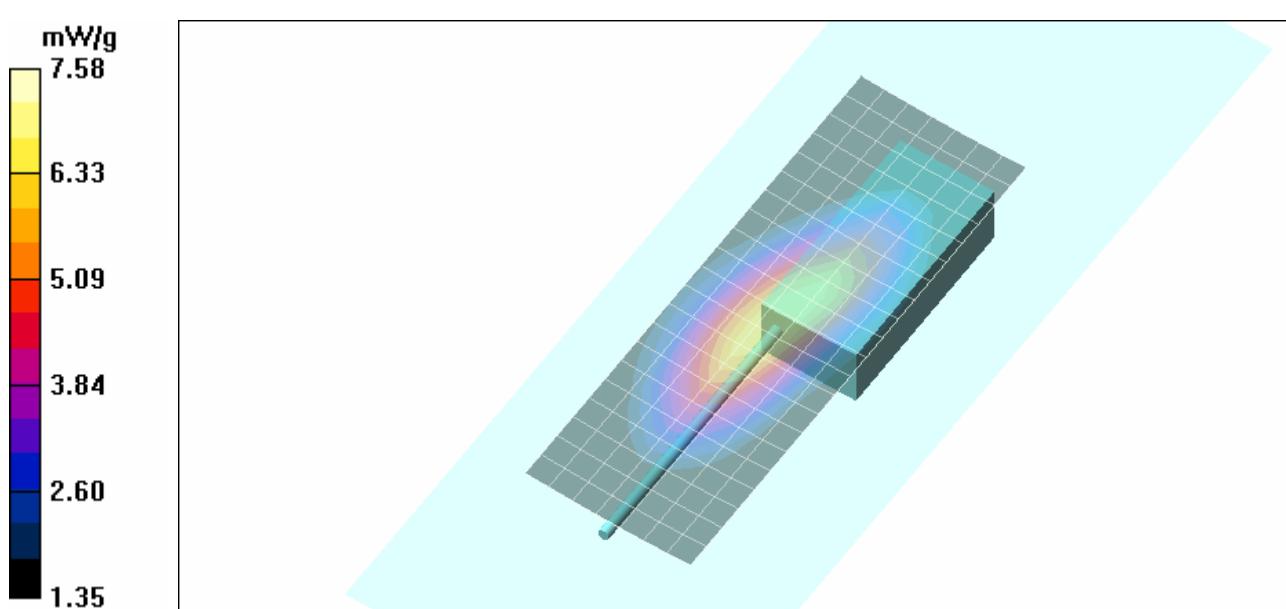

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404		
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)	<b>Frequency Range:</b>	380 - 470 MHz				
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 25 of 46			



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008


Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)




Test Lab Certificate No. 2470.01

## Z-Axis Scan

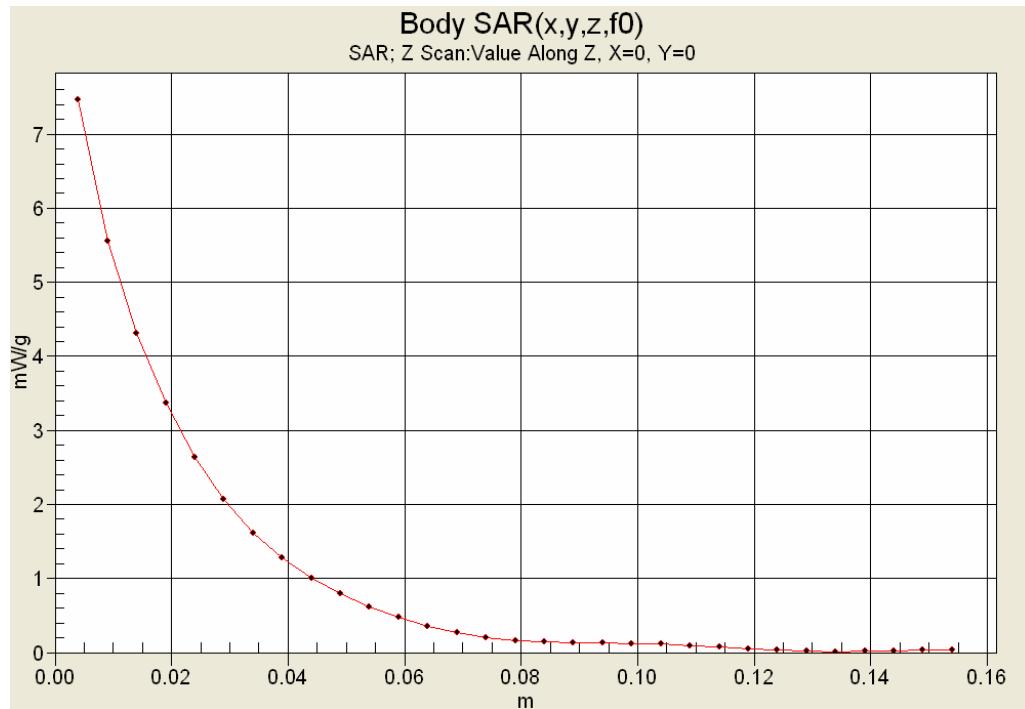

## SAR-versus-Time Power Drift Evaluation

Body-worn Configuration - Belt-Clip accessory  
Lithium-ion Battery - Low Channel (380 MHz)

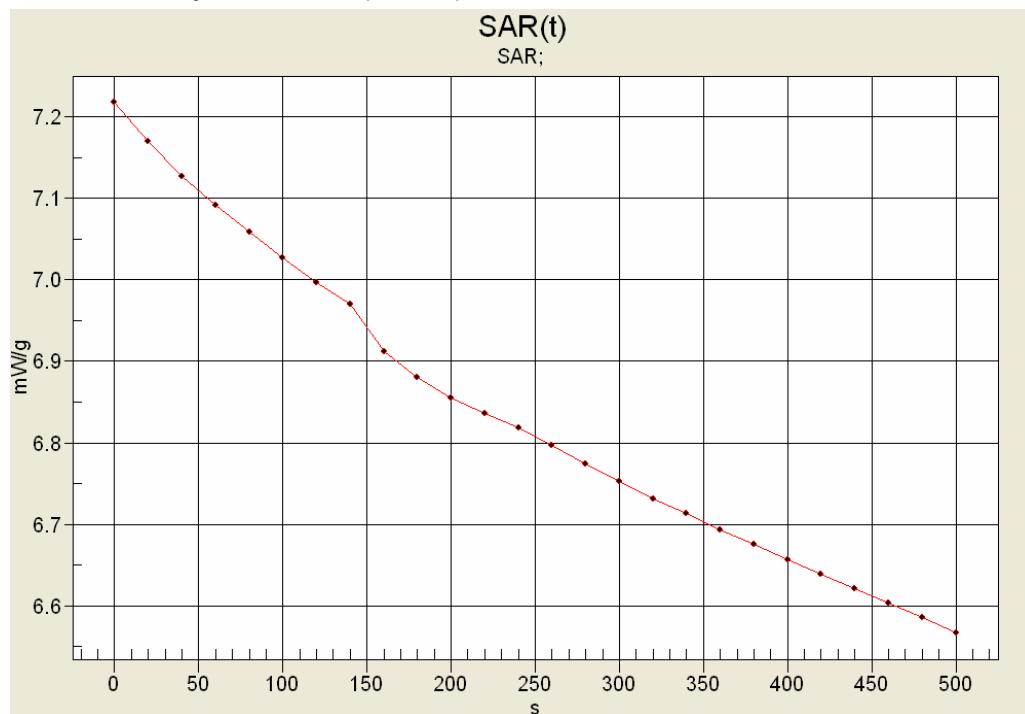

Max SAR: 7.21754 mW/g

End SAR: 6.56725 mW/g (-0.410 dB)

SAR after 340s: 6.7136 mW/g (-0.314 dB)

(340s = Zoom Scan Duration)

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404		
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)	Frequency Range:	380 - 470 MHz				
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 26 of 46			

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 <small>IAC-MRA</small> <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/23/2008

## Body-worn SAR - High Channel - 470 MHz

DUT: Midland Model: KNG-P400; Type: Portable UHF PTT Radio Transceiver; Serial: 080540662

**Body-worn Accessory: Belt-Clip (P/N: 550-070-2002)**

**Audio Accessory: Speaker-Microphone (Model: ACC720)**

Ambient Temp: 23.5°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 470 MHz; Duty Cycle: 1:1

Communication System: FM UHF (CW)

RF Output Power: 5.4 Watts (Conducted)

**7.5V 1800mAh Lithium-ion Rechargeable Battery**

Medium: MSL450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.93$  mho/m;  $\epsilon_r = 56.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - High Channel

**Area Scan (8x22x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.14 mW/g

### Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - High Channel


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 49.0 V/m; Power Drift = -0.401 dB

Peak SAR (extrapolated) = 3.17 W/kg

**SAR(1 g) = 2.25 mW/g; SAR(10 g) = 1.63 mW/g**

Maximum value of SAR (measured) = 2.36 mW/g

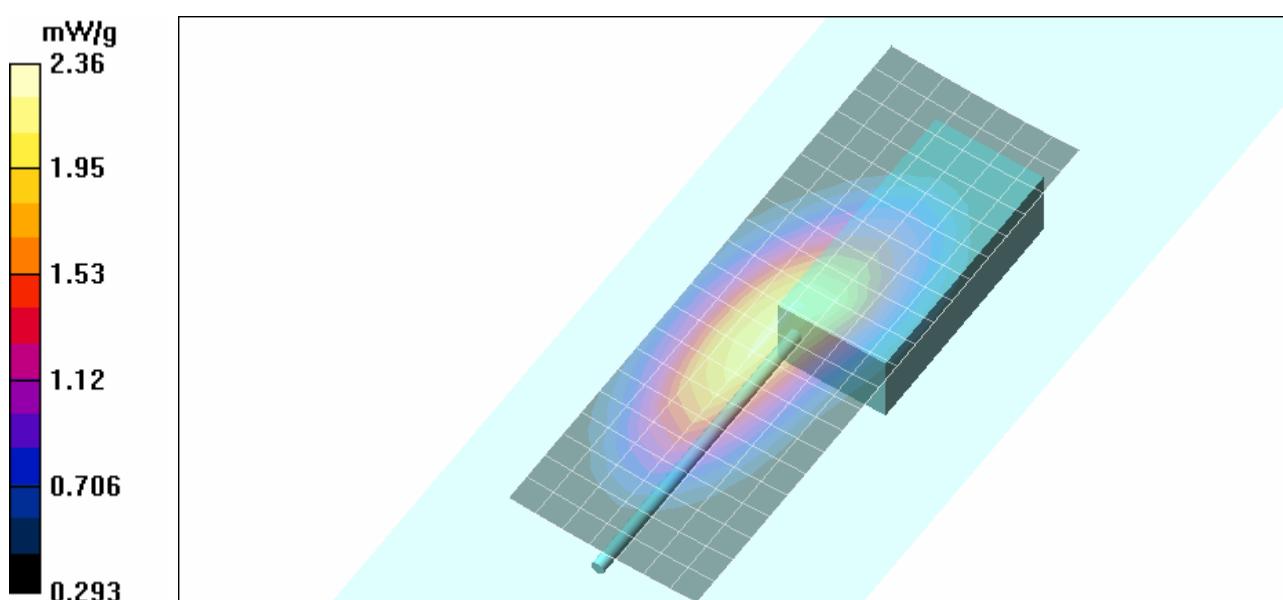

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)	<b>Frequency Range:</b>	380 - 470 MHz			
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 27 of 46			



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)		<b>Frequency Range:</b>	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 28 of 46	

 Testing and Engineering Services Ltd.	Date(s) of Evaluation	Test Report Serial No.	Test Report Revision No.	 Test Lab Certificate No. 2470.01
	September 23, 2008	090308MMA-T933-S90U	Rev. 1.0 (Initial Release)	
Test Report Issue Date	Description of Test(s)	RF Exposure Category		
October 02, 2008	Specific Absorption Rate	Occupational (Controlled)		

Date Tested: 09/23/2008

## System Performance Check - 450 MHz Dipole - HSL

**DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Validation: 07/25/2008**

Ambient Temp: 23.8°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.89$  mho/m;  $\epsilon_r = 44.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Validation Planar; Type: Plexiglas; Serial: TE#137
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### System Performance Check - 450 MHz Dipole

**Area Scan (6x11x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 1.21 mW/g

### System Performance Check - 450 MHz Dipole


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5$ mm,  $dy=7.5$ mm,  $dz=5$ mm

Reference Value = 40.0 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 1.90 W/kg

**SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.812 mW/g**


Maximum value of SAR (measured) = 1.30 mW/g

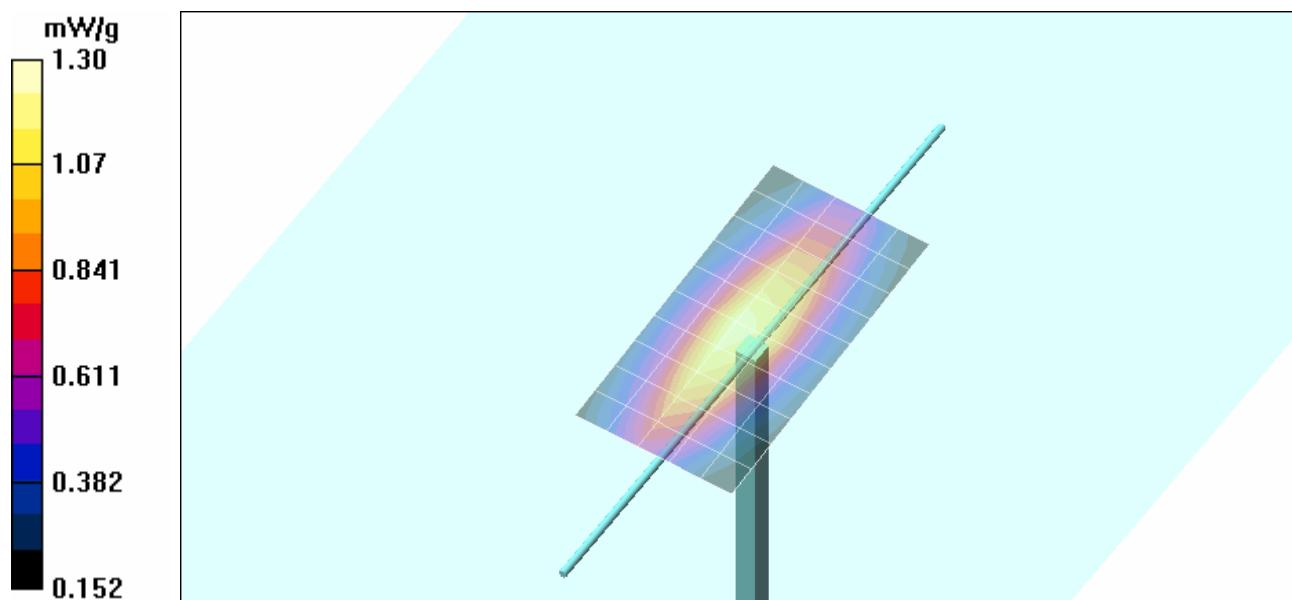

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)	Description of Test(s):	Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 29 of 46			

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 IAC-MRA  ACCREDITED
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## Z-Axis Scan

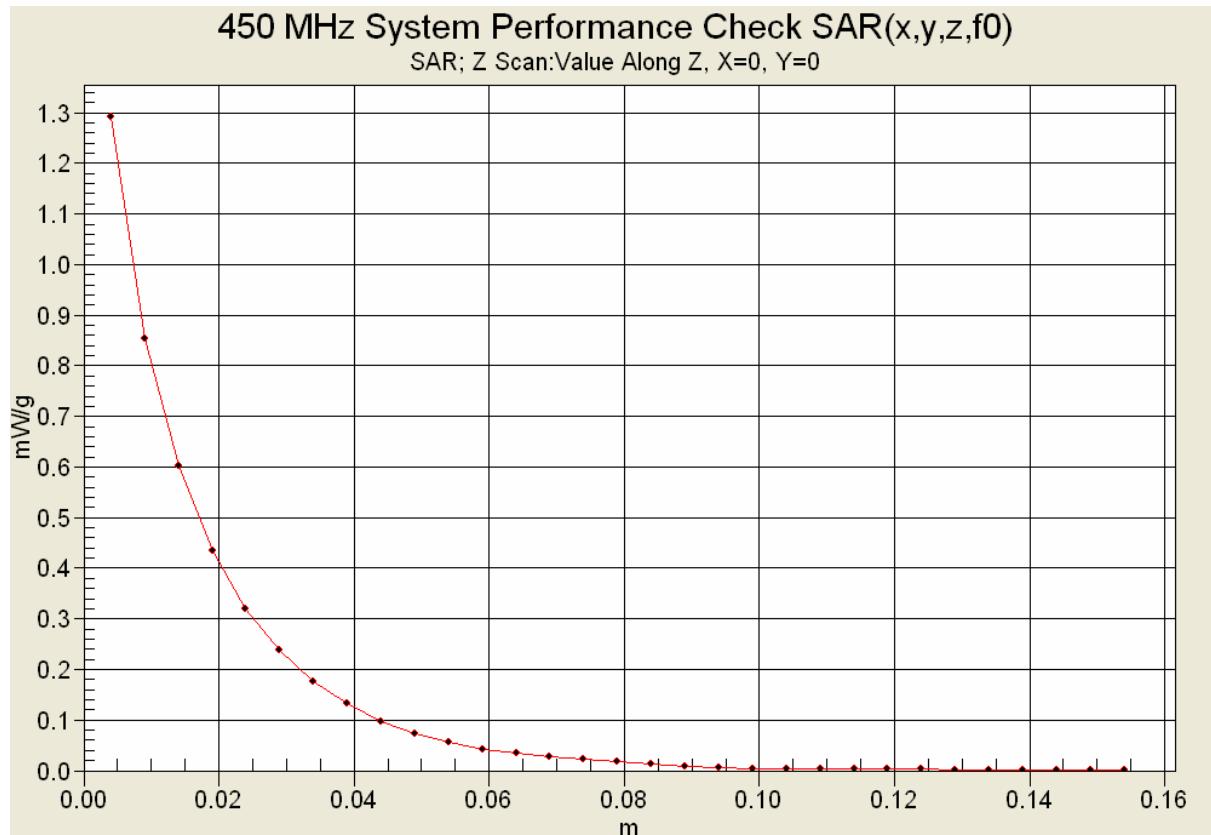

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)			<b>Frequency Range:</b>	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 30 of 46		



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)			<b>Frequency Range:</b>	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 31 of 46		

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	  <small>Test Lab Certificate No. 2470.01</small>
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 450 MHz System Performance Check & DUT Evaluation (Brain)

---

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

23/Sep/2008

Frequency (GHz)

FCC\_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

---

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	46.60	0.80
0.3600	44.58	0.87	46.30	0.81
0.3700	44.46	0.87	46.15	0.82
0.3800	44.34	0.87	45.58	0.83
0.3900	44.22	0.87	45.68	0.84
0.4000	44.10	0.87	45.59	0.85
0.4100	43.98	0.87	45.08	0.86
0.4200	43.86	0.87	45.01	0.87
0.4300	43.74	0.87	44.61	0.88
0.4400	43.62	0.87	44.72	0.89
<b>0.4500</b>	<b>43.50</b>	<b>0.87</b>	<b>44.41</b>	<b>0.89</b>
0.4600	43.45	0.87	44.13	0.90
0.4700	43.40	0.87	43.97	0.92
0.4800	43.34	0.87	43.69	0.92
0.4900	43.29	0.87	43.55	0.93
0.5000	43.24	0.87	43.27	0.94
0.5100	43.19	0.87	43.08	0.95
0.5200	43.14	0.88	42.89	0.96
0.5300	43.08	0.88	42.67	0.97
0.5400	43.03	0.88	42.63	0.98
0.5500	42.98	0.88	42.38	0.99

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)		Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 32 of 46	

 Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> September 23, 2008	<u>Test Report Serial No.</u> 090308MMA-T933-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 02, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 450 MHz DUT Evaluation (Body)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

23/Sep/2008

Frequency (GHz)

FCC\_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC\_eB FCC Limits for Body Epsilon

FCC\_sB FCC Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	58.10	0.86
0.3600	57.60	0.93	58.25	0.87
0.3700	57.50	0.93	57.80	0.88
0.3800	57.40	0.93	57.95	0.88
0.3900	57.30	0.93	57.52	0.89
0.4000	57.20	0.93	57.37	0.90
0.4100	57.10	0.93	57.40	0.91
0.4200	57.00	0.94	57.29	0.92
0.4300	56.90	0.94	57.01	0.92
0.4400	56.80	0.94	56.85	0.93
<b>0.4500</b>	<b>56.70</b>	<b>0.94</b>	<b>56.73</b>	<b>0.93</b>
0.4600	56.66	0.94	56.63	0.94
0.4700	56.62	0.94	56.62	0.95
0.4800	56.58	0.94	56.52	0.96
0.4900	56.54	0.94	56.25	0.96
0.5000	56.51	0.94	56.14	0.98
0.5100	56.47	0.94	56.11	0.98
0.5200	56.43	0.95	55.87	0.99
0.5300	56.39	0.95	55.75	1.00
0.5400	56.35	0.95	55.86	1.00
0.5500	56.31	0.95	55.76	1.02

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)		Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 33 of 46	



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)			<b>Frequency Range:</b>	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 34 of 46		



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate



RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## FACE-HELD SAR TEST SETUP PHOTOGRAPHS

2.5 cm Spacing from Front Side of DUT to Planar Phantom  
DUT with Lithium-ion Battery Pack

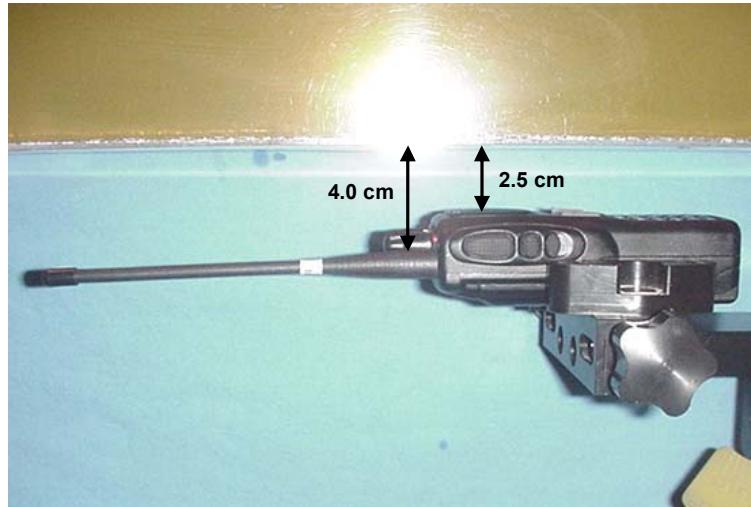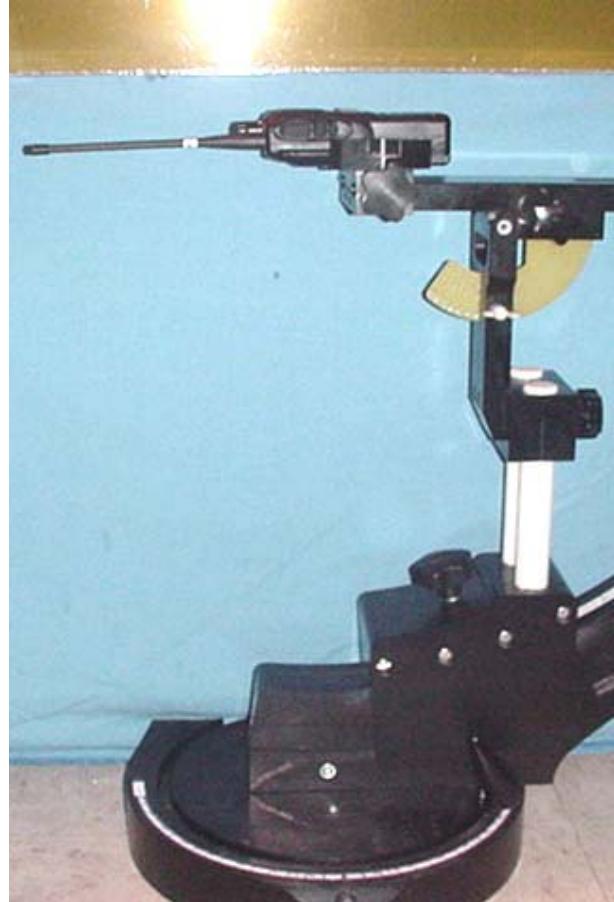

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404		
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)	Frequency Range:	380 - 470 MHz				
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 35 of 46			



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate


RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## FACE-HELD SAR TEST SETUP PHOTOGRAPHS

2.5 cm Spacing from Front Side of DUT to Planar Phantom  
DUT with Alkaline Battery Case

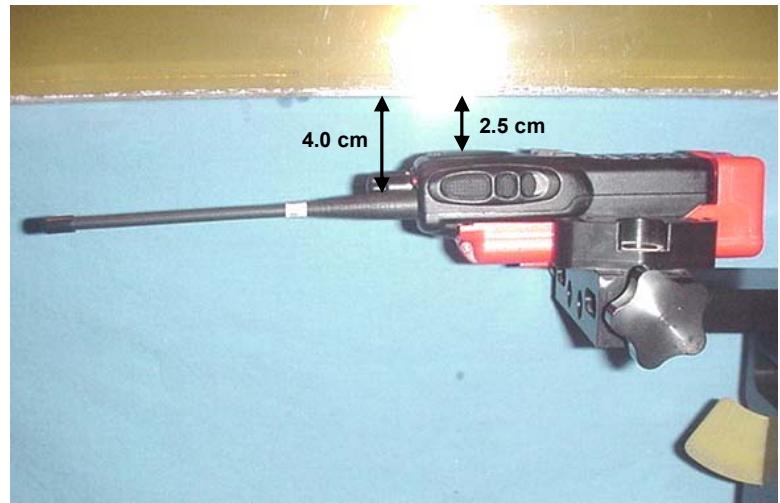

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)		Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 36 of 46					

**Date(s) of Evaluation**

September 23, 2008

**Test Report Serial No.**

090308MMA-T933-S90U

**Test Report Revision No.**

Rev. 1.0 (Initial Release)

**Test Report Issue Date**

October 02, 2008

**Description of Test(s)**

Specific Absorption Rate

**RF Exposure Category**

Occupational (Controlled)





Test Lab Certificate No. 2470.01

**BODY-WORN SAR TEST SETUP PHOTOGRAPHS**

1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

DUT with Belt-Clip Accessory &amp; Lithium-ion Battery Pack


DUT with Speaker-Microphone Audio Accessory

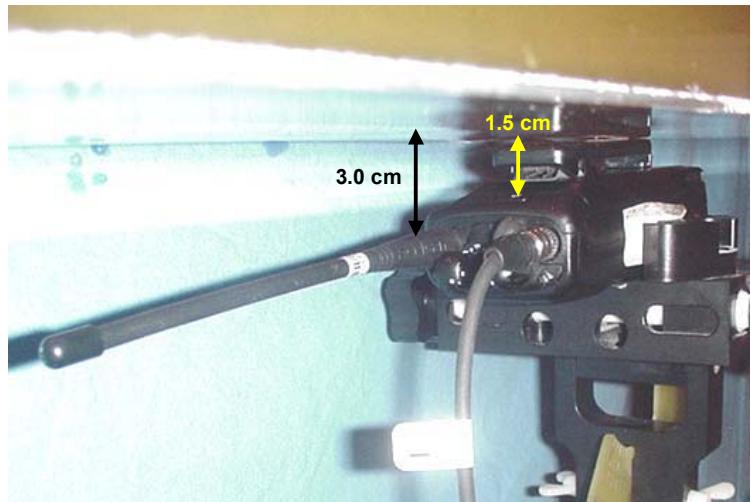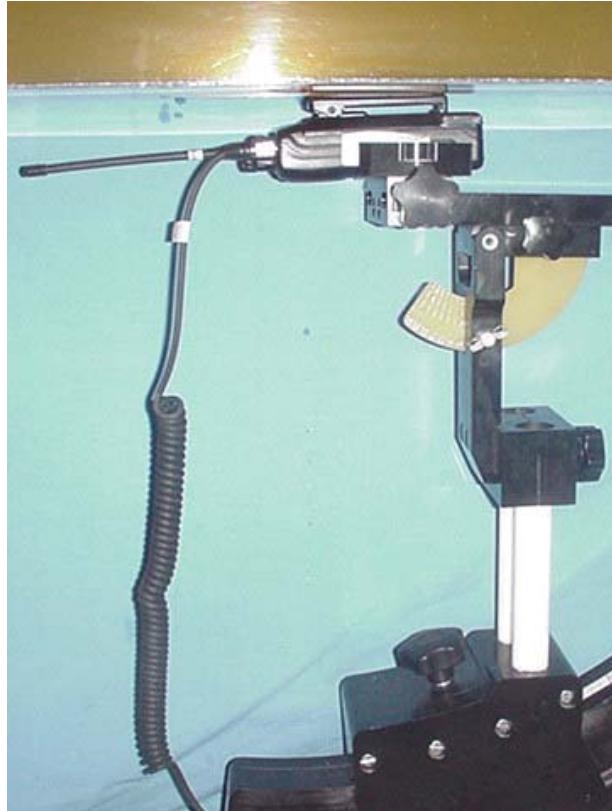

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)			Frequency Range:	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 37 of 46		

## BODY-WORN SAR TEST SETUP PHOTOGRAPHS



1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom  
DUT with Belt-Clip Accessory & Alkaline Battery Case  
DUT with Speaker-Microphone Audio Accessory

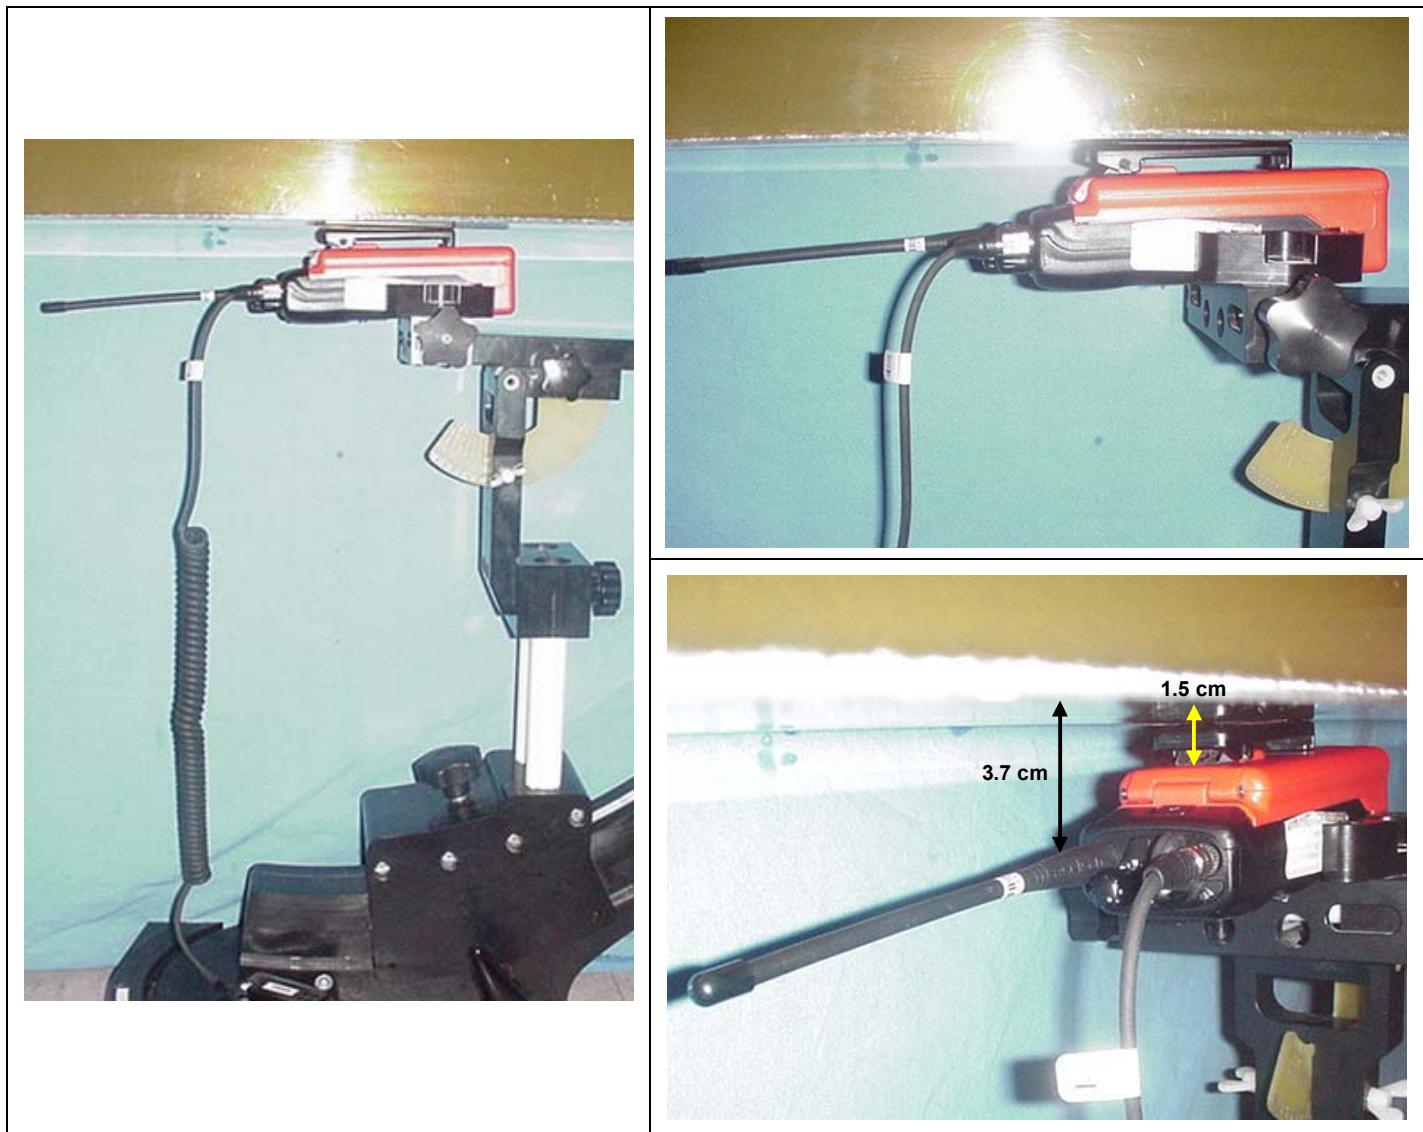

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)		Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 38 of 46					

## BODY-WORN SAR TEST SETUP PHOTOGRAPHS

2.5 cm Nylon Case & Belt-Clip Spacing from Back Side of DUT to Planar Phantom  
DUT with Nylon Case & Belt-Clip Accessory & Lithium-ion Battery Pack  
DUT with Speaker-Microphone Audio Accessory

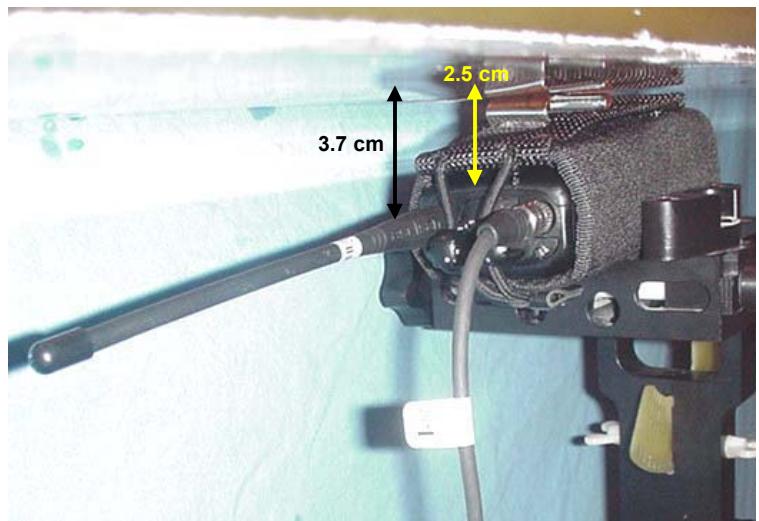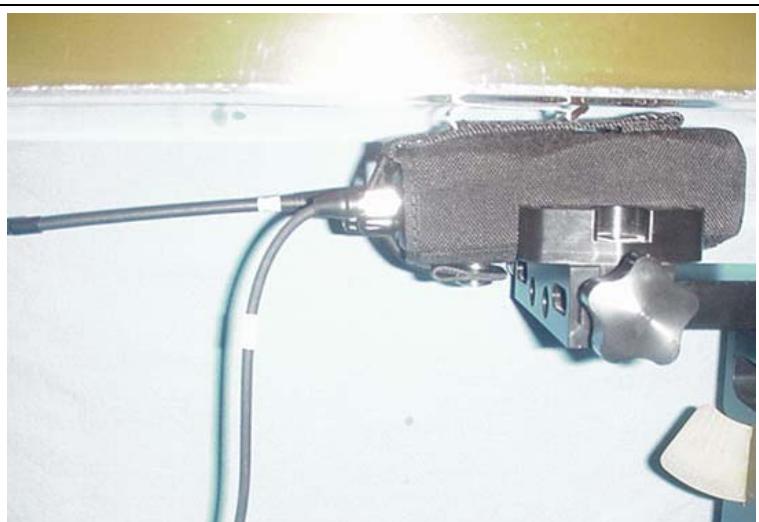

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)		Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					



Date(s) of Evaluation  
September 23, 2008

Test Report Issue Date  
October 02, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## DUT PHOTOGRAPHS



Front Side of DUT with  
Lithium-ion Battery

Front Side of DUT w/  
Alkaline Batt. Case

Front Side of DUT with  
Nylon Case accessory

Back Side of DUT with  
Lithium-ion Battery

Back Side of DUT w/  
Alkaline Batt. Case

Back Side of DUT with  
Nylon Case & Belt-Clip



Detachable Whip Antenna (Model: ACC-165E)

DUT with Li-ion Batt. & Belt-Clip

DUT with Speaker-Mic

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)		Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 40 of 46



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## DUT PHOTOGRAPHS



Left Side of DUT with Lithium-ion Battery & Belt-Clip Accessory



Right Side of DUT with Lithium-ion Battery & Belt-Clip Accessory



Belt-Clip (P/N: 550-070-2002)



Top End with Li-ion Battery & Belt-Clip



Bottom End with Li-ion Battery & Belt-Clip



Belt-Clip (P/N: 550-070-2002)

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)		Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 41 of 46					



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## DUT PHOTOGRAPHS



Left Side of DUT with Alkaline Battery Case (P/N: 90-1015) & Belt-Clip Accessory (P/N: 550-070-2002)



Right Side of DUT with Alkaline Battery Case (P/N: 90-1015) & Belt-Clip Accessory (P/N: 550-070-2002)

Alkaline Batt. Case & Belt-Clip



Top End with Alkaline Batt. Case & Belt-Clip

Bottom End with Alkaline Batt. Case & Belt-Clip

Alkaline Battery Case (P/N: 90-1015)

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)		Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 42 of 46		

## DUT PHOTOGRAPHS

		
Alkaline Battery Case (P/N: 90-1015) with Duracell Procell Batteries (x6)	Alkaline Battery Case (P/N: 90-1015) with batteries removed	DUT with Alkaline Battery Case (P/N: 90-1015) & Speaker-Microphone Accessory (Model: ACC720)
		
Lithium-ion Battery Pack - Front Side	Lithium-ion Battery Pack - Back Side	DUT Battery Housing

Applicant:	Midland Radio Corporation	Model(s):	STP404A	FCC ID:	MMA90404	
DUT Type:	Portable UHF PTT Radio Transceiver (Analog/Digital)		Frequency Range:	380 - 470 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 43 of 46	

## DUT PHOTOGRAPHS



Left Side of DUT with Nylon Case & Belt-Clip Accessory (Model: ACC306)



Right Side of DUT with Nylon Case & Belt-Clip Accessory (Model: ACC306)



DUT with Nylon Case & Speaker-Microphone



Top End with Nylon Case & Belt-Clip



Bottom End with Nylon Case & Belt-Clip



Top End of Nylon Case Accessory (Model: ACC306)

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)			<b>Frequency Range:</b>	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 44 of 46	



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## APPENDIX E - SYSTEM VALIDATION

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)			<b>Frequency Range:</b>	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 45 of 46		

 Celltech Testing and Engineering Services Ltd.	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:	SV450B-072508-R1.0
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz
Fluid Type:		Brain		

## 450 MHz SYSTEM VALIDATION

Type:

**450 MHz Validation Dipole**

Asset Number:

**00024**

Serial Number:

**136**

Place of Validation:

**Celltech Labs Inc.**

Date of Validation:

**July 25, 2008**

Celltech Labs Inc. certifies that the 450 MHz System Validation was performed on the date indicated above.

Validated by:

**Sean Johnston**

Signature:




## 1. Dipole Construction & Electrical Characteristics


The validation dipole was constructed in accordance with the requirements specified in IEEE Standard 1528-2003 and International Standard IEC 62209-1:2005. The electrical properties were measured using an HP 8753ET Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 15.0 mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:

Feed point impedance at 450 MHz       $\text{Re}\{Z\} = 58.207 \Omega$   
 $\text{Im}\{Z\} = 5.6914 \Omega$

Return Loss at 450 MHz      -20.703 dB

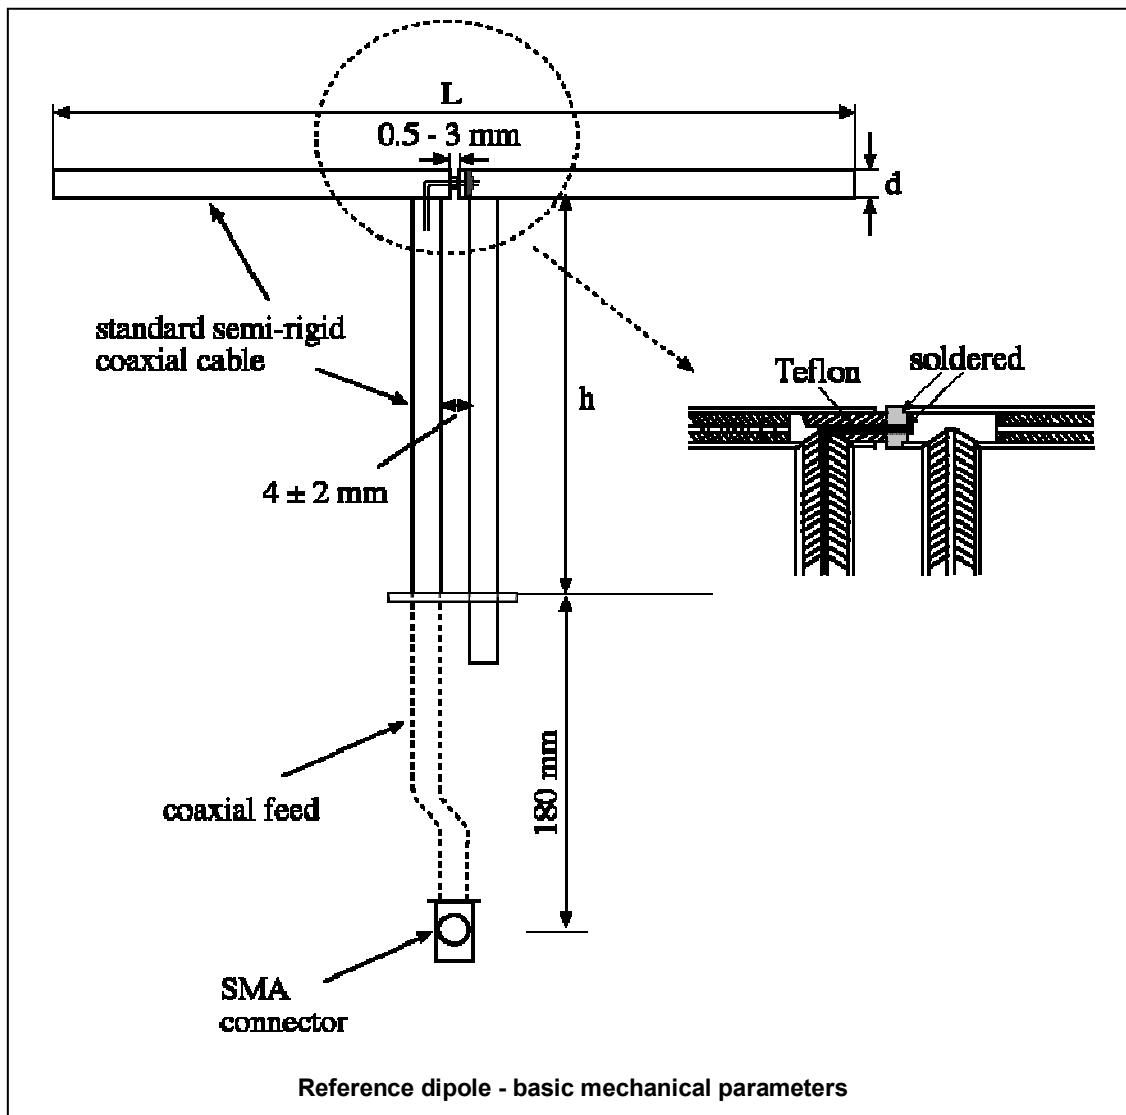

## 2. Validation Dipole VSWR Data

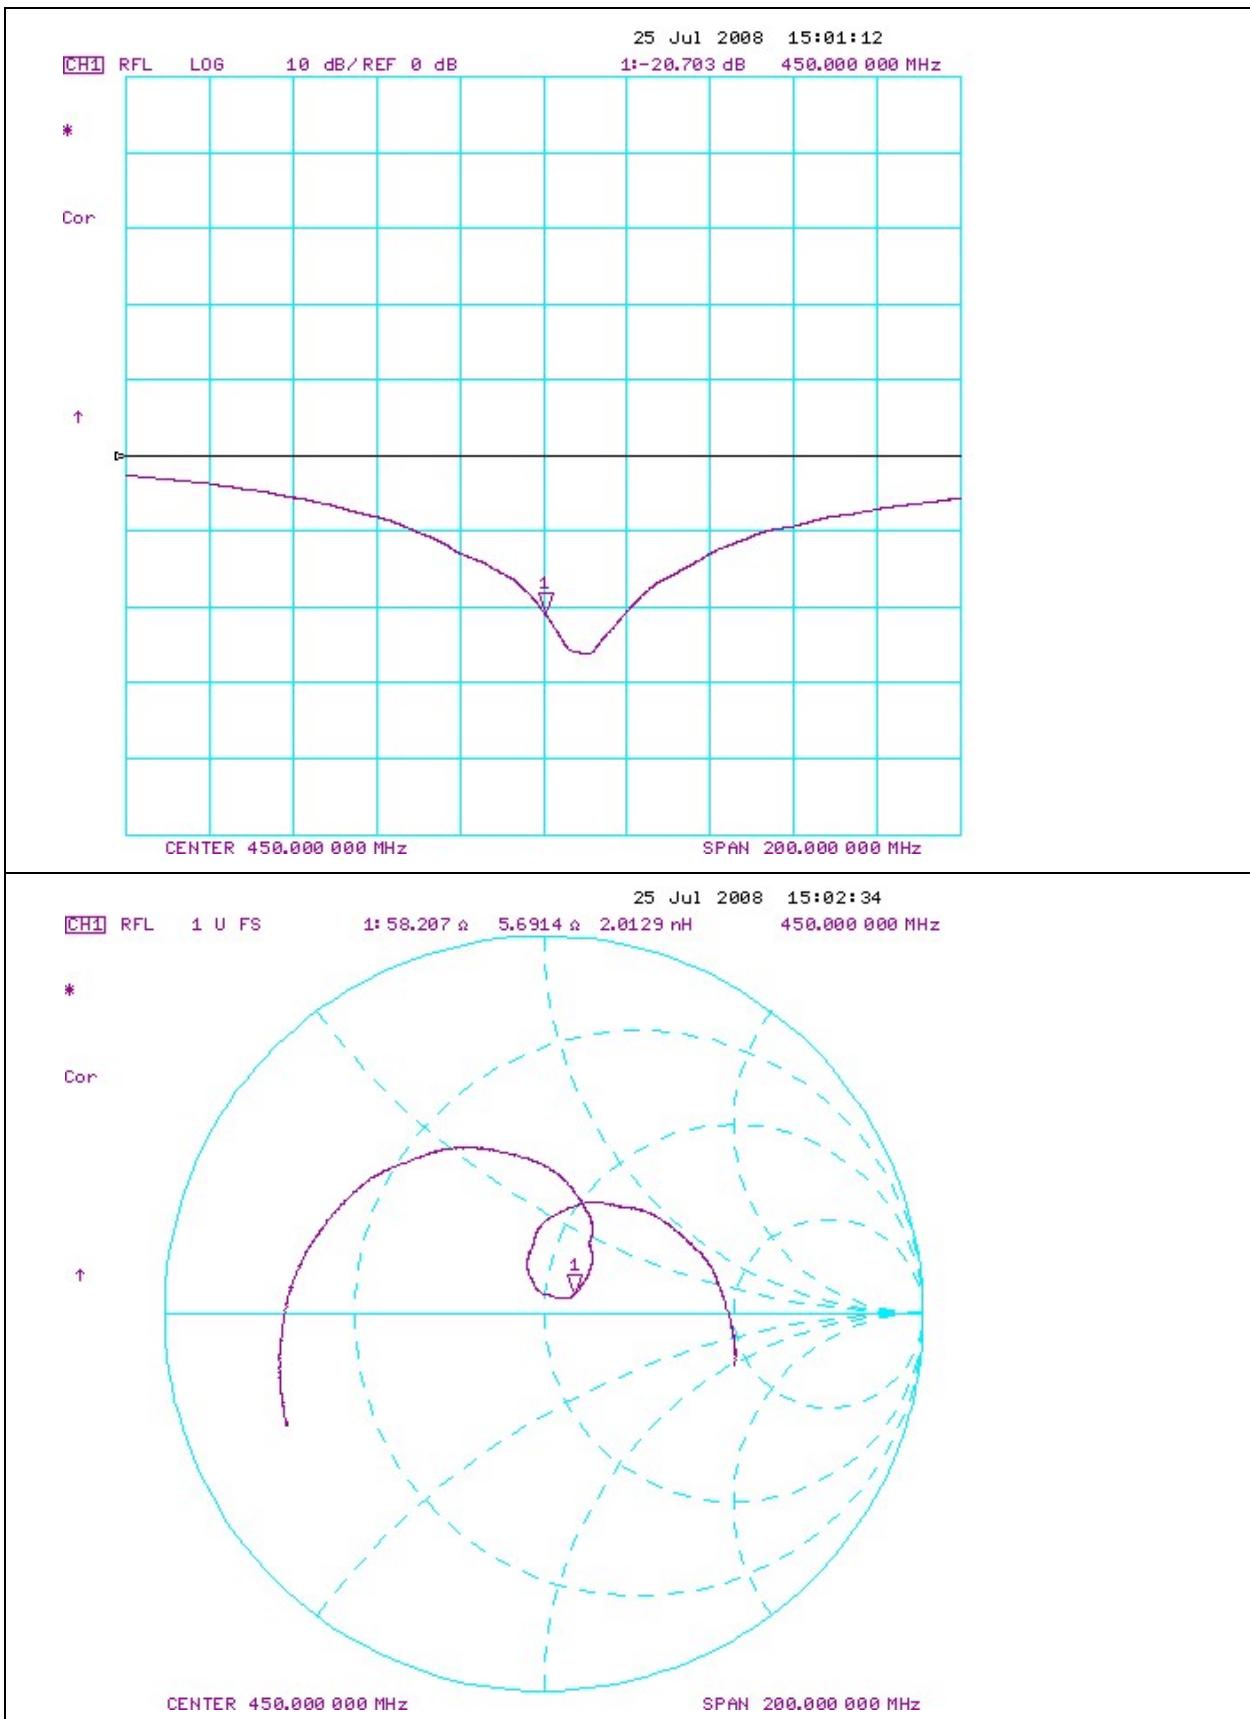

 Celltech Testing and Engineering Services Inc.	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:		SV450B-072508-R1.0
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type: Brain

### 3. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	396.0	250.0	6.0
<b>450</b>	<b>270.0</b>	<b>167.0</b>	<b>6.0</b>
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.5	30.4	3.6
3000	41.5	25.0	3.6

### 4. Validation Phantom

The validation phantom (planar) was constructed using relatively low-loss tangent Plexiglas material.

The inner dimensions of the validation phantom are as follows:




Length: 83.5 cm  
 Width: 36.9 cm  
 Height: 21.8 cm

The bottom section of the validation phantom is constructed of  $6.2 \pm 0.1$ mm Plexiglas.

### 5. Test Equipment List

TEST EQUIPMENT	ASSET NO.	SERIAL NO.	DATE OF CAL.	CAL. DUE DATE
SPEAG DASY4 Measurement Server	00158	1078	N/A	N/A
SPEAG Robot	00046	599396-01	N/A	N/A
SPEAG DAE4	00019	353	22Apr08	22Apr09
SPEAG ET3DV6 E-Field Probe	00017	1590	21Jul08	21Jul09
450 MHz Validation Dipole	00024	136	25Jul08	25Jul09
Plexiglas Validation Planar Phantom	00157	137	N/A	N/A
HP 85070C Dielectric Probe Kit	00033	US39240170	N/A	N/A
Gigatronics 8652A Power Meter	00007	1835272	23Apr08	23Apr09
Gigatronics 80701A Power Sensor	00014	1833699	23Apr08	23Apr09
HP 8753ET Network Analyzer	00134	US39170292	28Apr08	28Apr09
HP 8648D Signal Generator	00005	3847A00611	NCR	NCR
Amplifier Research 5S1G4 Power Amplifier	00106	26235	NCR	NCR

## 6. Dimensions of Plexiglas Planar Phantom

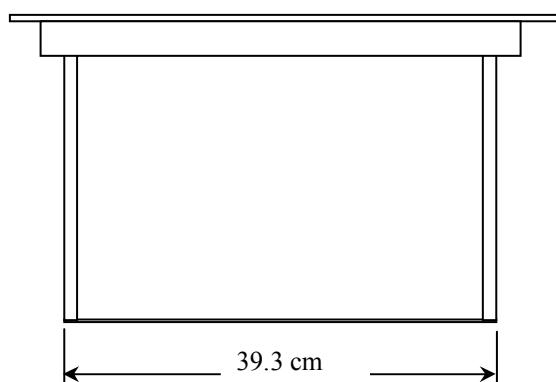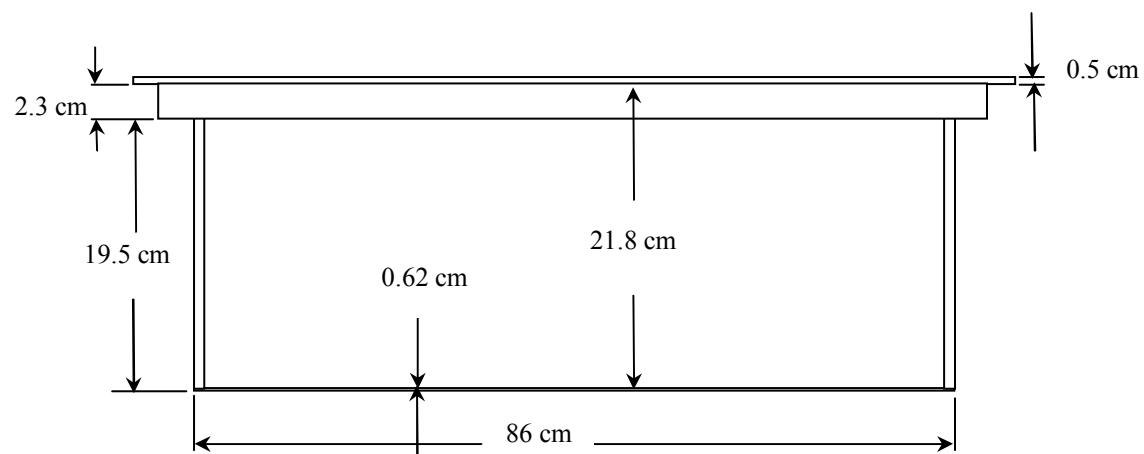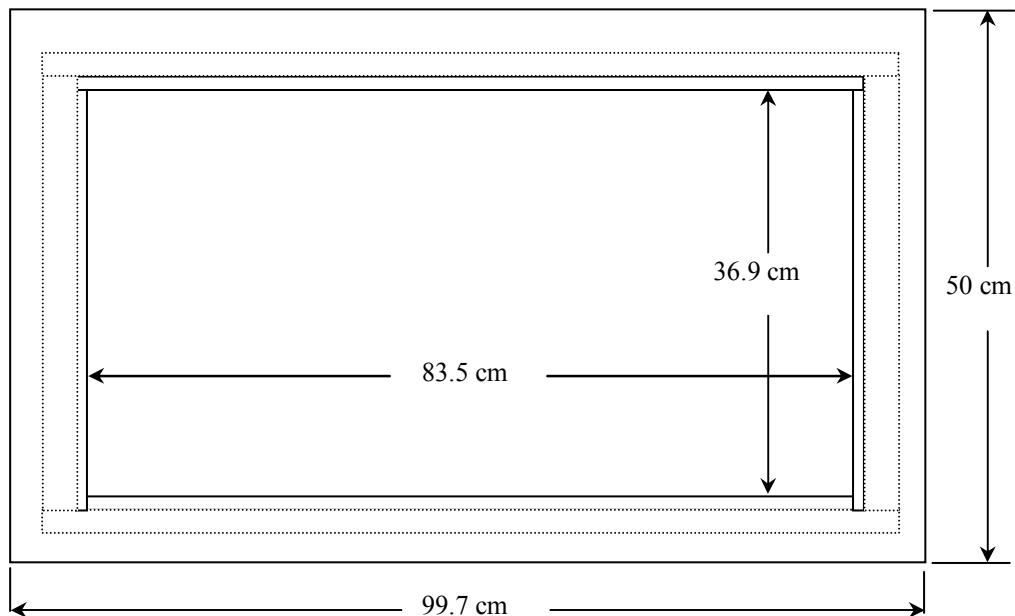

## **7. 450 MHz System Validation Setup**



<b>Celltech</b> Testing and Engineering Services Inc.	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:	SV450B-072508-R1.0
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz


## 8. 450 MHz Validation Dipole Setup



## 9. SAR Measurement

Measurements were made using a dosimetric E-field probe ET3DV6 (S/N: 1590, Conversion Factor 7.66). The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the procedures described below.

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

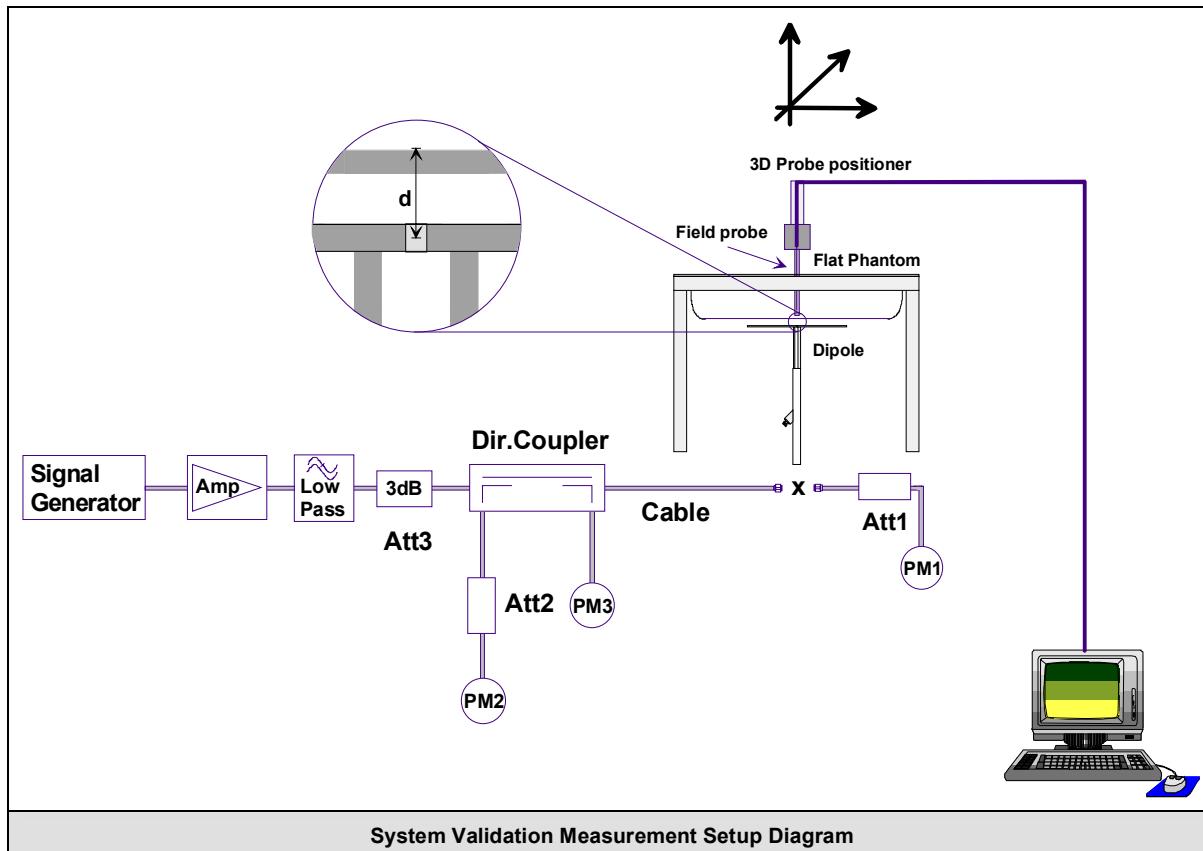

 Celltech Testing and Engineering Services Inc.	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:		SV450B-072508-R1.0	
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:	Brain

## 10. Measurement Conditions

The validation phantom was filled with 450 MHz Brain tissue simulant.

Relative Permittivity: 43.4 (-0.2% deviation from target)

Conductivity: 0.89 mho/m (+2.3% deviation from target)

Fluid Temperature: 23.1°C (Start of Test) / 23.2°C (End of Test)

Fluid Depth: ≥ 15.0 cm

Environmental Conditions:

Ambient Temperature: 24.1°C

Barometric Pressure: 100.9 kPa

Humidity: 31%

The 450 MHz Brain tissue simulant consisted of the following ingredients:

Ingredient	Percentage by weight
Water	38.56%
Sugar	56.32%
Salt	3.95%
HEC	0.98%
Dowicil 75	0.19%
<b>IEEE/IEC Target Dielectric Parameters (450 MHz):</b>	<b><math>\epsilon_r = 43.5 (+/- 5\%)</math></b>
	<b><math>\sigma = 0.87 \text{ S/m} (+/- 5\%)</math></b>

## 11. System Validation SAR Results

SAR @ 0.25W Input averaged over 1g (W/kg)			SAR @ 1W Input averaged over 1g (W/kg)																																																								
IEEE/IEC Target	Measured	Deviation	IEEE/IEC Target	Measured	Deviation																																																						
1.23	+/- 10%	1.18	-4.0%	4.92	+/- 10%																																																						
SAR @ 0.25W Input averaged over 10g (W/kg)			SAR @ 1W Input averaged over 10g (W/kg)																																																								
IEEE/IEC Target	Measured	Deviation	IEEE/IEC Target	Measured	Deviation																																																						
0.825	+/- 10%	0.775	-6.1%	3.30	+/- 10%																																																						
<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>1 g SAR</th> <th>10 g SAR</th> <th>Local SAR at surface (above feed-point)</th> <th>Local SAR at surface (y = 2 cm offset from feed-point)<sup>a</sup></th> </tr> </thead> <tbody> <tr> <td>300</td><td>3.0</td><td>2.0</td><td>4.4</td><td>2.1</td></tr> <tr> <td>450</td><td>4.9</td><td>3.3</td><td>7.2</td><td>3.2</td></tr> <tr> <td>835</td><td>9.5</td><td>6.2</td><td>4.1</td><td>4.9</td></tr> <tr> <td>900</td><td>10.8</td><td>6.9</td><td>16.4</td><td>5.4</td></tr> <tr> <td>1450</td><td>29.0</td><td>16.0</td><td>50.2</td><td>6.5</td></tr> <tr> <td>1800</td><td>38.1</td><td>19.8</td><td>69.5</td><td>6.8</td></tr> <tr> <td>1900</td><td>39.7</td><td>20.5</td><td>72.1</td><td>6.6</td></tr> <tr> <td>2000</td><td>41.1</td><td>21.1</td><td>74.6</td><td>6.5</td></tr> <tr> <td>2450</td><td>52.4</td><td>24.0</td><td>104.2</td><td>7.7</td></tr> <tr> <td>3000</td><td>63.8</td><td>25.7</td><td>140.2</td><td>9.5</td></tr> </tbody> </table>					Frequency (MHz)	1 g SAR	10 g SAR	Local SAR at surface (above feed-point)	Local SAR at surface (y = 2 cm offset from feed-point) <sup>a</sup>	300	3.0	2.0	4.4	2.1	450	4.9	3.3	7.2	3.2	835	9.5	6.2	4.1	4.9	900	10.8	6.9	16.4	5.4	1450	29.0	16.0	50.2	6.5	1800	38.1	19.8	69.5	6.8	1900	39.7	20.5	72.1	6.6	2000	41.1	21.1	74.6	6.5	2450	52.4	24.0	104.2	7.7	3000	63.8	25.7	140.2	9.5
Frequency (MHz)	1 g SAR	10 g SAR	Local SAR at surface (above feed-point)	Local SAR at surface (y = 2 cm offset from feed-point) <sup>a</sup>																																																							
300	3.0	2.0	4.4	2.1																																																							
450	4.9	3.3	7.2	3.2																																																							
835	9.5	6.2	4.1	4.9																																																							
900	10.8	6.9	16.4	5.4																																																							
1450	29.0	16.0	50.2	6.5																																																							
1800	38.1	19.8	69.5	6.8																																																							
1900	39.7	20.5	72.1	6.6																																																							
2000	41.1	21.1	74.6	6.5																																																							
2450	52.4	24.0	104.2	7.7																																																							
3000	63.8	25.7	140.2	9.5																																																							
Numerical reference SAR values for reference dipole and flat phantom normalized to 1 W (IEEE 1528-2003; IEC 62209-1:2005)																																																											

Date Tested: 07/25/2008

## System Validation - 450 MHz Dipole - HSL

**DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Validation: 07/25/2008**

Ambient Temp: 24.1°C; Fluid Temp: 23.1°C; Barometric Pressure: 100.9 kPa; Humidity: 31%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.89$  mho/m;  $\epsilon_r = 43.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Validation Planar; Type: Plexiglas; Serial: TE#137
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### 450 MHz Dipole - System Validation

**Area Scan (6x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.18 mW/g

### 450 MHz Dipole - System Validation


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 38.3 V/m; Power Drift = 0.000 dB


Peak SAR (extrapolated) = 1.88 W/kg

**SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.775 mW/g**

Maximum value of SAR (measured) = 1.27 mW/g

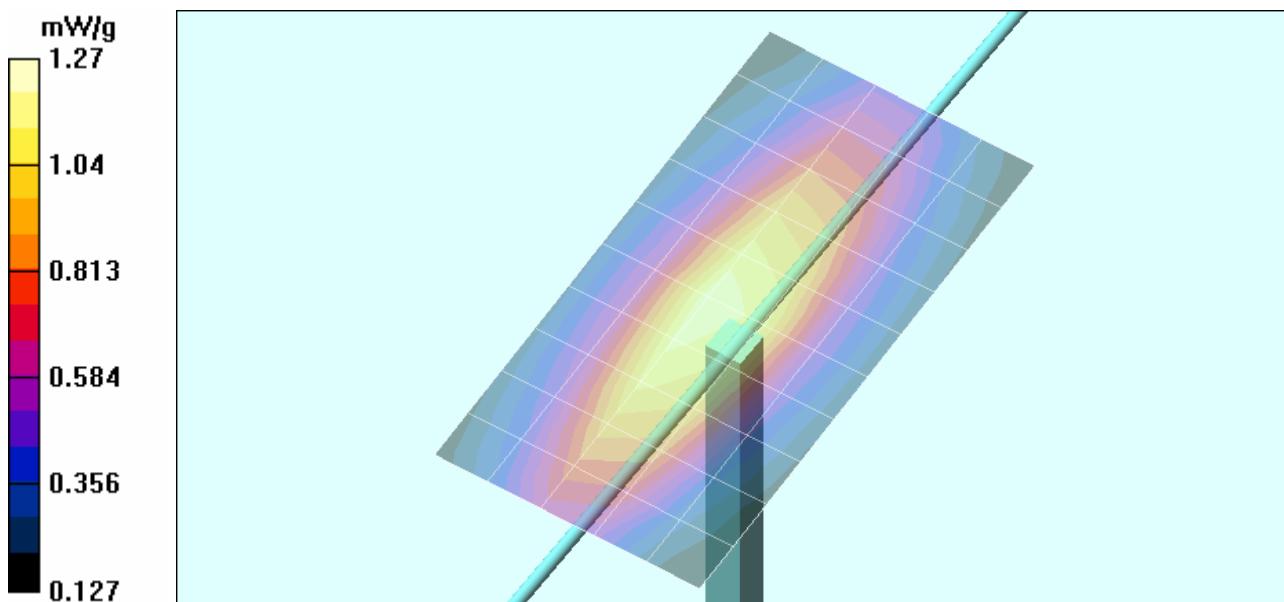

## Z-Axis Scan

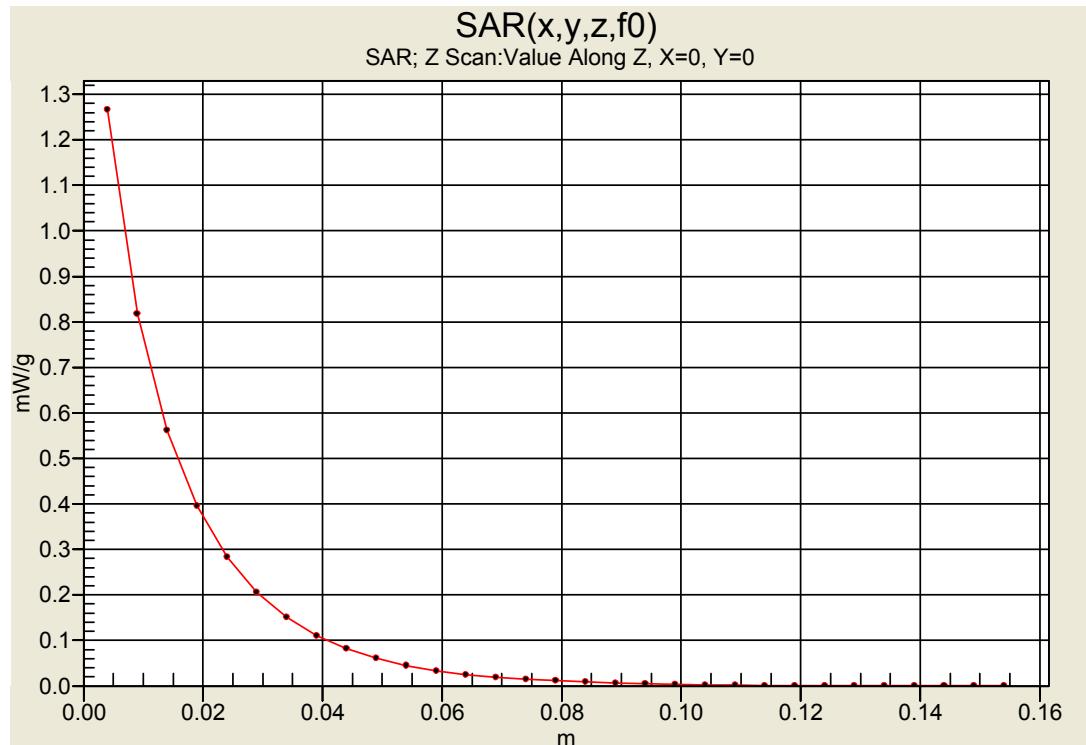

## 12. Measured Fluid Dielectric Parameters

### System Validation - 450 MHz (Brain)

\*\*\*\*\*

CellTech Labs Inc.

Test Result for UIM Dielectric Parameter

Fri 25/Jul/2008

Frequency (GHz)

IEEE\_eH IEEE 1528-2003 Limits for Head Epsilon

IEEE\_sH IEEE 1528-2003 Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

Freq	IEEE_eH	IEEE_sH	Test_e	Test_s
0.3500	44.70	0.87	46.31	0.80
0.3600	44.58	0.87	45.65	0.82
0.3700	44.46	0.87	45.27	0.82
0.3800	44.34	0.87	45.47	0.83
0.3900	44.22	0.87	44.76	0.84
0.4000	44.10	0.87	44.57	0.87
0.4100	43.98	0.87	44.63	0.86
0.4200	43.86	0.87	44.66	0.86
0.4300	43.74	0.87	43.79	0.89
0.4400	43.62	0.87	43.68	0.87
0.4500	43.50	0.87	43.44	0.89
0.4600	43.45	0.87	43.27	0.90
0.4700	43.40	0.87	43.17	0.90
0.4800	43.34	0.87	43.66	0.91
0.4900	43.29	0.87	42.68	0.92
0.5000	43.24	0.87	42.39	0.95
0.5100	43.19	0.87	42.24	0.94
0.5200	43.14	0.88	41.96	0.95
0.5300	43.08	0.88	42.42	0.95
0.5400	43.03	0.88	41.99	0.97
0.5500	42.98	0.88	41.92	0.98

 Testing and Engineering Services Inc.	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:		SV450B-072508-R1.0	
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:	Brain

### 13. Measurement Uncertainties

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value $\pm\%$	Probability Distribution	Divisor	$c_i$ 1g	Uncertainty Value $\pm\%$ (1g)	$V_i$ or $V_{eff}$
<b>Measurement System</b>						
Probe calibration (450 MHz)	6.65	Normal	1	1	6.65	$\infty$
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	$\infty$
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	$\infty$
Spatial resolution	0	Rectangular	1.732050808	1	0.0	$\infty$
Boundary effects	0.8	Rectangular	1.732050808	1	0.5	$\infty$
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	$\infty$
Detection limit	1	Rectangular	1.732050808	1	0.6	$\infty$
Readout electronics	0.3	Normal	1	1	0.3	$\infty$
Response time	0	Rectangular	1.732050808	1	0.0	$\infty$
Integration time	0	Rectangular	1.732050808	1	0.0	$\infty$
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	$\infty$
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	$\infty$
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	$\infty$
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	$\infty$
<b>Dipole</b>						
Dipole Positioning	2	Normal	1.732050808	1	1.2	$\infty$
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	$\infty$
<b>Phantom and Setup</b>						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	$\infty$
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	$\infty$
Liquid conductivity (measured)	2.3	Normal	1	0.64	1.5	$\infty$
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	$\infty$
Liquid permittivity (measured)	0.2	Normal	1	0.6	0.1	$\infty$
<b>Combined Standard Uncertainty</b>						
<b>Expanded Uncertainty (<math>k=2</math>)</b>						
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 and IEC 62209-1:2005						



Date(s) of Evaluation  
September 23, 2008

Test Report Serial No.  
090308MMA-T933-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
October 02, 2008

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## APPENDIX F - PROBE CALIBRATION

<b>Applicant:</b>	Midland Radio Corporation	<b>Model(s):</b>	STP404A	<b>FCC ID:</b>	MMA90404	
<b>DUT Type:</b>	Portable UHF PTT Radio Transceiver (Analog/Digital)			<b>Frequency Range:</b>	380 - 470 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 46 of 46		

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Client **Celltech**

Certificate No: **ET3-1590\_Jul08**

## **CALIBRATION CERTIFICATE**

Object **ET3DV6 - SN:1590**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-12.v5 and QA CAL-23.v3**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **July 21, 2008**


Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41495277	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41498087	1-Apr-08 (No. 217-00788)	Apr-09
Reference 3 dB Attenuator	SN: S5054 (3c)	1-Jul-08 (No. 217-00865)	Jul-09
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-08 (No. 217-00787)	Apr-09
Reference 30 dB Attenuator	SN: S5129 (30b)	1-Jul-08 (No. 217-00866)	Jul-09
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (No. ES3-3013_Jan08)	Jan-09
DAE4	SN: 660	3-Sep-07 (No. DAE4-660_Sep07)	Sep-08
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-07)	In house check: Oct-08

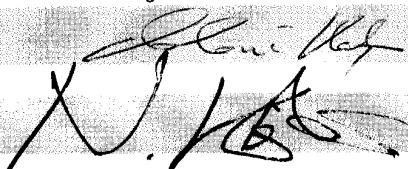Calibrated by:	Name	Function	Signature
	<b>Katja Pokovic</b>	Technical Manager	
Approved by:	<b>Niels Kuster</b>	Quality Manager	

Issued: July 21, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



### Glossary:

TSL	tissue simulating liquid
NORM $x,y,z$	sensitivity in free space
ConvF	sensitivity in TSL / NORM $x,y,z$
DCP	diode compression point
Polarization $\phi$	$\phi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- $NORMx,y,z$ : Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).  $NORMx,y,z$  are only intermediate values, i.e., the uncertainties of  $NORMx,y,z$  does not effect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- $NORM(f)x,y,z = NORMx,y,z * frequency\_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCPx,y,z$ : DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to  $NORMx,y,z * ConvF$  whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# **Probe ET3DV6**

# **SN:1590**

**Manufactured:** March 19, 2001  
**Last calibrated:** May 20, 2005  
**Recalibrated:** July 21, 2008

**Calibrated for DASY Systems**

**(Note: non-compatible with DASY2 system!)**

## DASY - Parameters of Probe: ET3DV6 SN:1590

### Sensitivity in Free Space<sup>A</sup>

NormX	<b>1.81</b> $\pm$ 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormY	<b>2.00</b> $\pm$ 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	<b>1.72</b> $\pm$ 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$

### Diode Compression<sup>B</sup>

DCP X	<b>87</b> mV
DCP Y	<b>92</b> mV
DCP Z	<b>85</b> mV

### Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

### Boundary Effect

TSL                    835 MHz                    Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance	<b>3.7</b> mm	<b>4.7</b> mm
SAR <sub>be</sub> [%]                    Without Correction Algorithm	10.7	7.2
SAR <sub>be</sub> [%]                    With Correction Algorithm	0.8	0.5

### Sensor Offset

Probe Tip to Sensor Center                    **2.7** mm


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.



## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

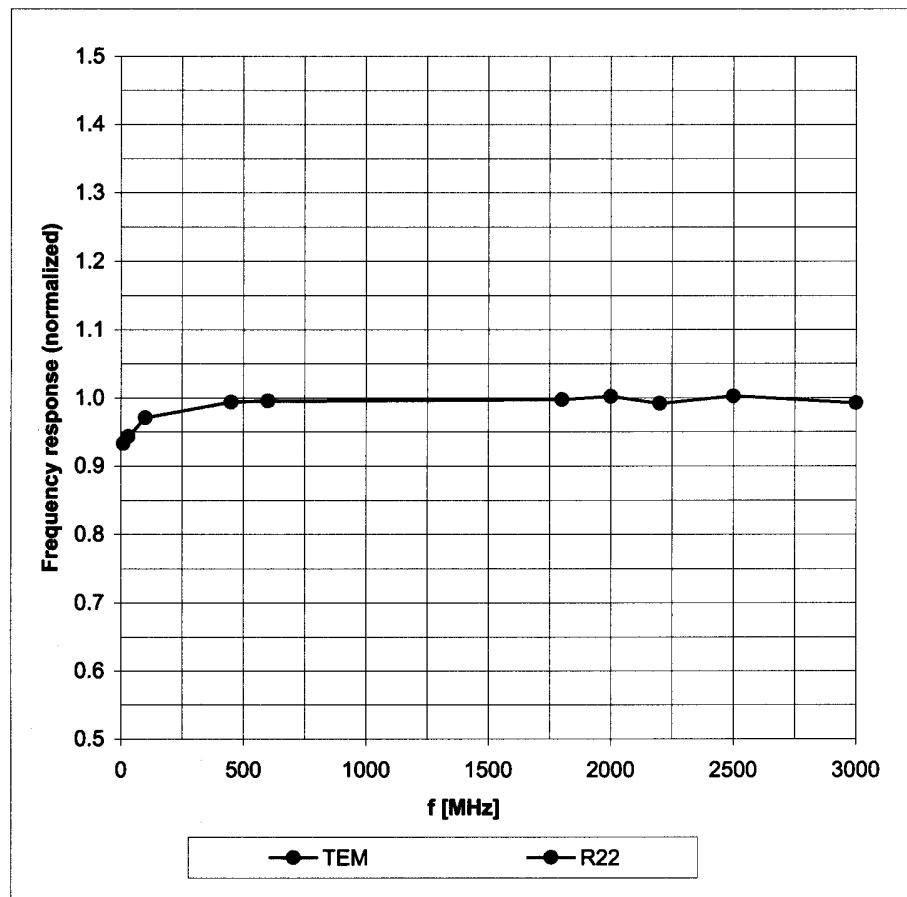


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

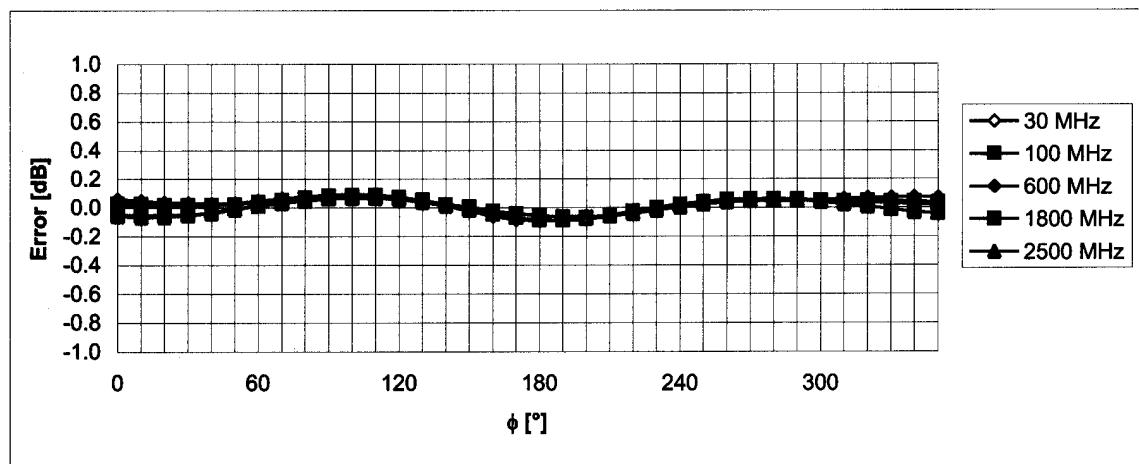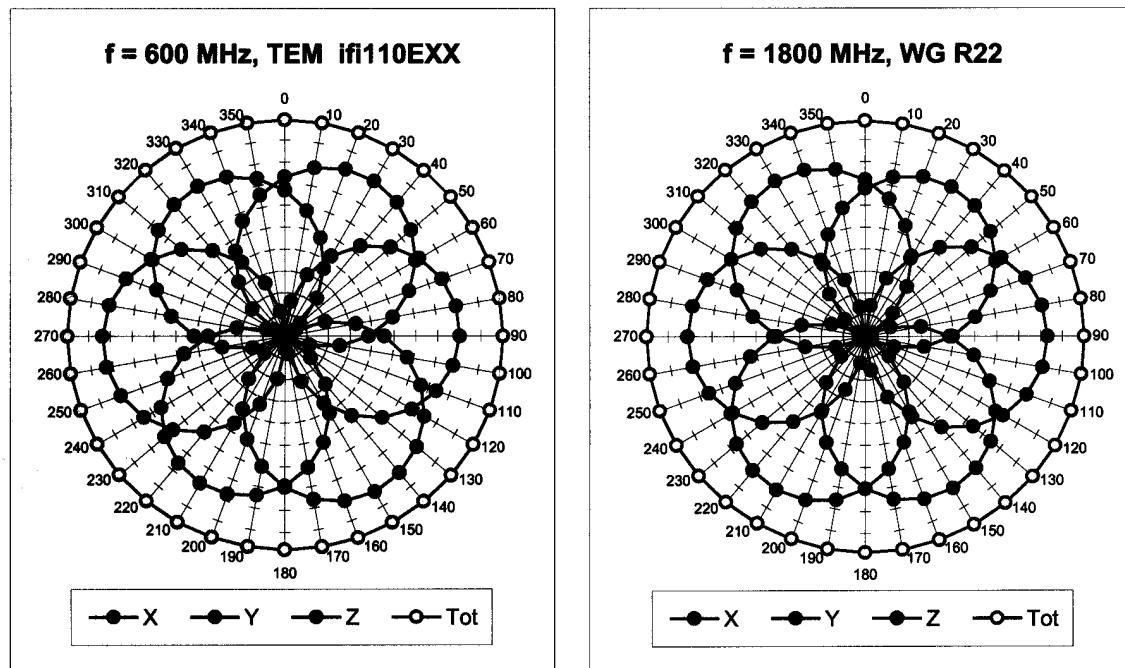


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

**Dynamic Range  $f(\text{SAR}_{\text{head}})$**   
(Waveguide R22,  $f = 1800$  MHz)

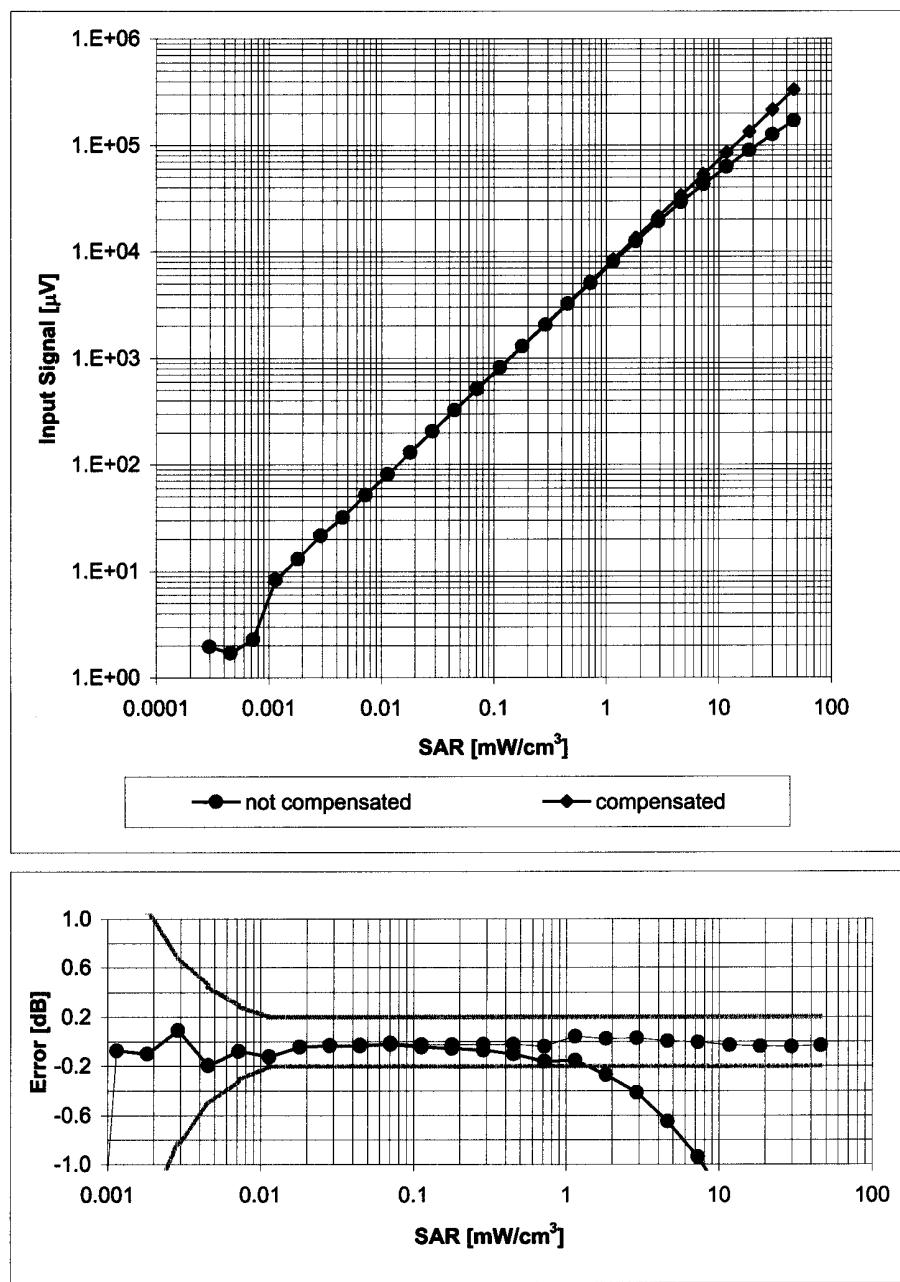

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

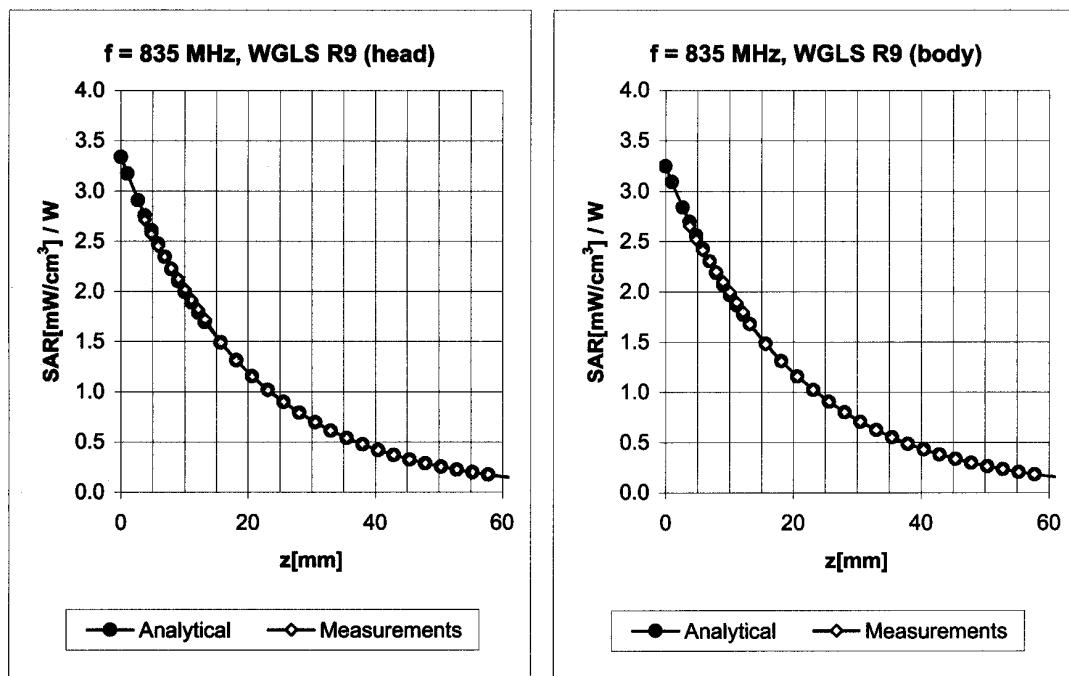


f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
450	± 50 / ± 100	Head	43.5 ± 5%	0.87 ± 5%	0.34	1.75	7.66	± 13.3% (k=2)
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.32	3.52	6.54	± 11.0% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.28	1.77	8.27	± 13.3% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.36	3.31	6.39	± 11.0% (k=2)

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

## Deviation from Isotropy in HSL

Error ( $\phi, \theta$ ),  $f = 900$  MHz

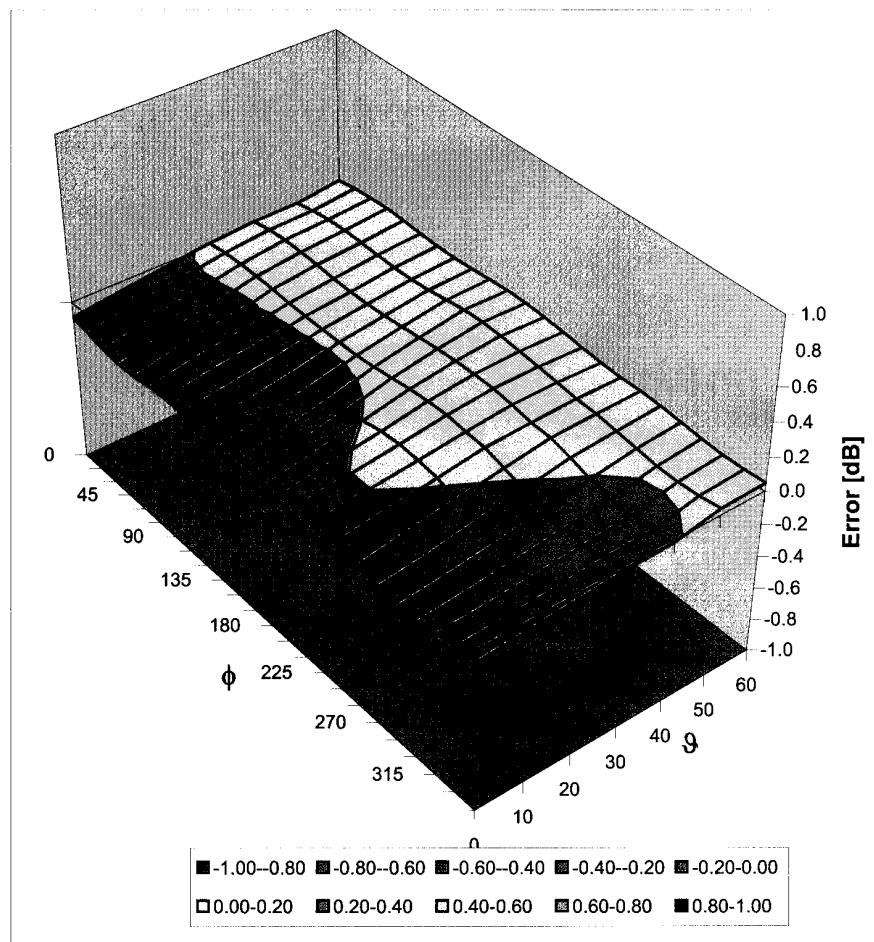

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )