

---

# FCC Test Report

---

Report No.: AGC05067230401FE10

**FCC ID** : MMAGXT3000

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION** : Two way radio

**BRAND NAME** : MIDLAND

**MODEL NAME** : GXT3000

**APPLICANT** : Midland Radio Corporation

**DATE OF ISSUE** : Apr. 20, 2023

**STANDARD(S)** : FCC Part 95 Rules

**REPORT VERSION** : V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>



**REPORT REVISE RECORD**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 20, 2023	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
<b>2. PRODUCT INFORMATION .....</b>	<b>6</b>
2.1 PRODUCT TECHNICAL DESCRIPTION .....	6
2.2 TEST FREQUENCY LIST .....	7
2.3 RELATED SUBMITTAL(S) / GRANT (S) .....	7
2.4 TEST METHODOLOGY .....	8
2.5 CALCULATION OF EMISSION INDICATORS .....	8
2.6 SPECIAL ACCESSORIES .....	8
2.7 EQUIPMENT MODIFICATIONS .....	8
2.8 ANTENNA REQUIREMENT .....	9
<b>3. TEST ENVIRONMENT .....</b>	<b>10</b>
3.1 ADDRESS OF THE TEST LABORATORY .....	10
3.2 TEST FACILITY .....	10
3.3 ENVIRONMENTAL CONDITIONS .....	11
3.4 MEASUREMENT UNCERTAINTY .....	11
3.5 LIST OF EQUIPMENTS USED .....	12
<b>4. SYSTEM TEST CONFIGURATION .....</b>	<b>13</b>
4.1 EUT CONFIGURATION .....	13
4.2 EUT EXERCISE .....	13
4.3 CONFIGURATION OF TESTED SYSTEM .....	13
4.4 EQUIPMENT USED IN TESTED SYSTEM .....	13
4.5 SUMMARY OF TEST RESULTS .....	14
<b>5. DESCRIPTION OF TEST MODES .....</b>	<b>15</b>
<b>6. FREQUENCY STABILITY .....</b>	<b>16</b>
6.1 PROVISIONS APPLICABLE .....	16
6.2 MEASUREMENT PROCEDURE .....	16
6.3 MEASUREMENT SETUP .....	16
6.4 MEASUREMENT RESULTS .....	17
<b>7. EMISSION BANDWIDTH .....</b>	<b>18</b>
7.1 PROVISIONS APPLICABLE .....	18
7.2 MEASUREMENT PROCEDURE .....	18
7.3 MEASUREMENT SETUP .....	18
7.4 MEASUREMENT RESULTS .....	19
<b>8. SPURIOUS RADIATED EMISSION .....</b>	<b>20</b>
<b>8.1 PROVISIONS APPLICABLE .....</b>	<b>20</b>

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

8.2 MEASUREMENT PROCEDURE.....	20
8.3 MEASUREMENT SETUP.....	21
8.4 MEASUREMENT RESULTS.....	23
8.5 EMISSION MASK PLOT.....	27
<b>9.MODULATION CHARACTERISTICS .....</b>	<b>29</b>
9.1 PROVISIONS APPLICABLE.....	29
9.2 MEASUREMENT METHOD .....	29
9.3 MEASUREMENT SETUP.....	29
9.4 MEASUREMENT RESULTS.....	30
<b>10. MAXIMUM TRANSMITTER POWER .....</b>	<b>34</b>
10.1 PROVISIONS APPLICABLE.....	34
10.2 MEASUREMENT METHOD .....	34
10.3 MEASUREMENT SETUP.....	35
10.4 MEASUREMENT RESULTS .....	37
<b>11. SPURIOUS EMISSION ON ANTENNA PORT.....</b>	<b>38</b>
11.1 PROVISIONS APPLICABLE.....	38
11.2 MEASUREMENT METHOD.....	38
11.3 MEASUREMENT SETUP .....	38
11.4 MEASUREMENT RESULTS.....	38
<b>12. AUDIO LOW PASS FILTER RESPONSE .....</b>	<b>39</b>
12.1 PROVISIONS APPLICABLE.....	39
12.2 MEASUREMENT METHOD .....	39
13.3 MEASUREMENT SETUP.....	39
13.4 MEASURET RESULTS.....	40
<b>APPENDIX I: PHOTOGRAPHS OF TEST SETUP.....</b>	<b>42</b>
<b>APPENDIX II: PHOTOGRAPHS OF TEST EUT.....</b>	<b>42</b>


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


### 1. GENERAL INFORMATION


Applicant	Midland Radio Corporation
Address	5900 Parretta Drive Kansas City, MO 64120-2134 USA
Manufacturer	Midland Radio Corporation
Address	5900 Parretta Drive Kansas City, MO 64120-2134 USA
Factory	Midland Radio Corporation
Address	5900 Parretta Drive Kansas City, MO 64120-2134 USA
Product Designation	Two way radio
Brand Name	MIDLAND
Test Model	GXT3000
Deviation from Standard	No any deviation from the test method.
Date of receipt of test item	Apr. 11, 2023
Date of Test	Apr. 11, 2023~Apr. 20, 2023
Test Result	Pass

**WE HEREBY CERTIFY THAT:**

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 95. The test results of this report relate only to the tested sample identified in this report.

Prepared By   
 \_\_\_\_\_  
 Bibo Zhang (Project Engineer) Apr. 20, 2023

Reviewed By   
 \_\_\_\_\_  
 Calvin Liu (Reviewer) Apr. 20, 2023

Approved By   
 \_\_\_\_\_  
 Max Zhang Authorized Officer Apr. 20, 2023

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 2. PRODUCT INFORMATION

### 2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	GXT3000_X4
Software Version	V241
Power Supply	DC 3.7V 1800mAh
Adapter Information	Input: AC 100-240V 50/60Hz, 0.6A Output: DC 5.0V 3A
Communication Type	Voice / Tone only
Operation Frequency Range	462.5500MHz-462.7250MHz (GMRS 462 MHz main channels) 462.5625MHz-462.7125MHz (GMRS 462 MHz interstitial channels) 467.5625MHz-467.7125MHz (GMRS 467 MHz interstitial channels)
Modulation Type	FM
Channel Separation	12.5 KHz/25 KHz
Emission Bandwidth	15.67 KHz(2.5W-25KHz), 10.52 KHz(0.5W-12.5KHz)
Emission Designator	11K0F3E/16K0F3E
Number of Channels:	22 Channels
Rated Output Power	2.5W/0.5W(It was fixed by the manufacturer, any individual can't arbitrarily change it.)
Maximum Transmitter Power	33.84dBm (2.5W-25KHz)                      26.60dBm (0.5W-12.5KHz)
Antenna Designation	Inseparable Antenna
Antenna Gain	1.5dBi
Frequency Tolerance	1.086ppm

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 2.2 TEST FREQUENCY LIST

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range Over which EUT operates	Number of Frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

Channel. No	CH. Freq	Rated Power	CH. No	CH. Freq	Rated Power
1	462.5625	2.5W	15	462.5500	2.5W
2	462.5875		16	462.5750	
3	462.6125		17	462.6000	
4	<b>462.6375</b>		18	462.6250	
5	462.6625		19	<b>462.6500</b>	
6	462.6875		20	462.6750	
7	462.7125		21	462.7000	
8	467.5625		22	462.7250	
9	467.5875	0.5W	-	-	-
10	467.6125		-	-	
11	<b>467.6375</b>		-	-	
12	467.6625		-	-	
13	467.6875		-	-	
14	467.7125		-	-	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### 2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **MMAGXT3000**, filing to comply with Part 2, Part 95 of the Federal Communication Commission rules.

### 2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 95	Personal Radio Services
2	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
3	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
4	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
5	KDB 888861 D01	888861 D01 Part 95 GMRS FRS v01

### 2.5 CALCULATION OF EMISSION INDICATORS

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

#### For FM Mode (Channel Spacing: 12.5kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$$

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

#### For FM Mode (Channel Spacing: 25kHz)

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz} = 16K0$$

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

### 2.6 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

### 2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).



## 2.8 ANTENNA REQUIREMENT

### Excerpt from §95.1787 of the FCC Rules/Regulations:

The antenna of each GMRS transmitter type must meet the following requirements.

- (1) The antenna must be a non-removable integral part of the GMRS transmitter type.
- (2) The non-detachable antenna is only for handheld portable GMRS equipment.

- The antenna of this device is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion: The unit complies with the requirement of §95.1787.

### 3. TEST ENVIRONMENT

#### 3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L5488**

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

##### **A2LA-Lab Cert. No.: 5054.02**

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

##### **FCC-Registration No.: 975832**

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

##### **IC-Registration No.: 24842**

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

### 3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS
Temperature range (°C)	15 - 35	-30 - 50
Relative humidity range	20 % - 75 %	20 % - 75 %
Pressure range (kPa)	86 - 106	86 - 106
Power supply	DC 3.7V	LV 3.15V/ HV 4.2V

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

### 3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

Test Items	Measurement Uncertainty
Frequency stability	$\pm 0.5\%$
Transmitter power conducted	$\pm 0.8\text{dB}$
Transmitter power Radiated	$\pm 1.3\text{dB}$
Conducted spurious emission 9kHz-40 GHz	$\pm 2.7\text{dB}$
Conducted Emission	$\pm 3.2\text{ dB}$
Radiated Emission below 1GHz	$\pm 3.9\text{ dB}$
Radiated Emission above 1GHz	$\pm 4.8\text{ dB}$
Occupied Channel Bandwidth	$\pm 2\%$
FM deviation	$\pm 2\%$
Audio level	$\pm 0.98\text{dB}$
Low Pass Filter Response	$\pm 0.65\text{dB}$
Modulation Limiting	0.42 %
Transient Frequency Behavior	6.8 %

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

### 3.5 LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9020A	MY53300860	Jun. 08, 2022	Jun. 07, 2023
EXA Signal Analyzer	Aglient	N9020A	MY52090123	Aug. 04, 2022	Aug. 03, 2023
Horn antenna	SCHWARZBECK	BBHA 9170	768	Oct. 31, 2021	Oct. 30, 2023
preamplifier	ChengYi	EMC184045SE	980508	Oct. 29, 2021	Oct. 28, 2023
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 05, 2022	Jun. 04, 2023
HORN ANTENNA	EM	EM-AH-10180	/	Feb. 22, 2023	Feb. 21, 2024
SIGNAL GENERATOR	AGILENT	E4421B	MY43351603	Feb. 17, 2023	Feb. 16, 2024
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 05, 2022	Jun. 04, 2023
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 05, 2023	Jan. 04, 2025
ANTENNA	SCHWARZBECK	VULB9168	D69250	Apr. 28, 2021	Apr. 27, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Modulation Domain Analyzer	HP	53310A	3121A02467	Jun. 08, 2022	Jun. 07, 2023
Small environmental tester	ESPEC	SH-242	--	Aug. 03, 2022	Aug. 02, 2024
RF Communication Test Set	HP	8920B	US35010161	Aug. 03, 2022	Aug. 02, 2023
Attenuator	Weinachel Corp	58-30-33	ML030	Oct. 24, 2021	Oct. 23, 2022
Attenuator	Weinachel Corp	58-30-33	ML030	Oct. 22, 2022	Oct. 21, 2023
RF Cable	R&S	1#	--	Each time	N/A
RF Cable	R&S	2#	--	Each time	N/A
Fliter-UHF	Microwave	N25155M2	498705	May 07, 2022	May 06, 2023
Fliter-VHF	Microwave	N26460M1	498703	May 07, 2022	May 06, 2023

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 4. SYSTEM TEST CONFIGURATION

### 4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 4.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

### 4.3 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

### 4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

- Test Accessories Come From The Laboratory  
 Test Accessories Come From The Manufacturer

Item	Equipment	Model No.	Identifier	Note
1	Two way radio	GXT3000	FCC ID: MMAGXT3000	EUT
2	Battery	BATT18R	DC 3.7V 1800mAh	Accessories
3	Adapter	GW-20PDA201U	Input: AC 100-240V 50/60Hz, 0.6A Output: DC 5V 3A	Accessories
4	Charger	18CVP13B	DC 5V 3A	Accessories
5	Car Charger	GR-088 PD20W	DC 5.0V 3A	Accessories
6	USB Cable	-	1.8m Unshielded	Accessories
7	Back clamp	-	-	Accessories
8	Lanyard	-	-	Accessories

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

#### 4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1	FCC 47 CFR PART 95	Antenna Equipment	Pass
2	§ 95.1767& 2.1046(a)	Maximum Transmitter Power	Pass
3	§95.1755& 2.1047(a) (b)	Modulation Limit	Pass
4	§95.1755& 2.1047(a)	Audio Frequency Response	Pass
4	§95.1755(e)	Audio Low Pass Filter Response	Pass
5	§95.1779& 2.1049	Emission Bandwidth	Pass
6	§95.1779& 2.1049	Emission Mask	Pass
7	§95.1765& 2.1055(a) (1)	Frequency Stability	Pass
9	§95.1779& 2.1051	Spurious Emission on Antenna Port	N/A
10	§95.1779& 2.1053	Spurious Ratiated Emission	Pass
<b>Note:</b> 1) N/A: In this whole report not application. 2) The EUT is Inseparable Antenna.			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 5. DESCRIPTION OF TEST MODES

The EUT (**Two-way radio**) has been tested under normal operating condition. (GMRS TX) are chosen for testing at each channel separation.

NO.	TEST MODE DESCRIPTION	CHANNEL SEPARATION
1	GMRS TX CHANNEL 4	25 kHz
2	GMRS TX CHANNEL 11	12.5 kHz
3	GMRS TX CHANNEL 19	25 kHz

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. The battery is full-charged during the test.
3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
4. Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).



## 6. FREQUENCY STABILITY

### 6.1 PROVISIONS APPLICABLE

Standard Applicable [Part 95.1765] The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

GMR5: The carrier frequency of each GMR5 transmitter transmitting an emission with an occupied bandwidth of 12.5 kHz or less must remain within 2.5 ppm

The carrier frequency of each GMR5 transmitter transmitting an emission with an occupied bandwidth greater than 12.5 kHz must remain within 5 ppm

### 6.2 MEASUREMENT PROCEDURE


#### 6.2.1 Frequency stability versus environmental temperature

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

#### 6.2.2 Frequency stability versus input voltage

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C. Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 3.7V.
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

### 6.3 MEASUREMENT SETUP

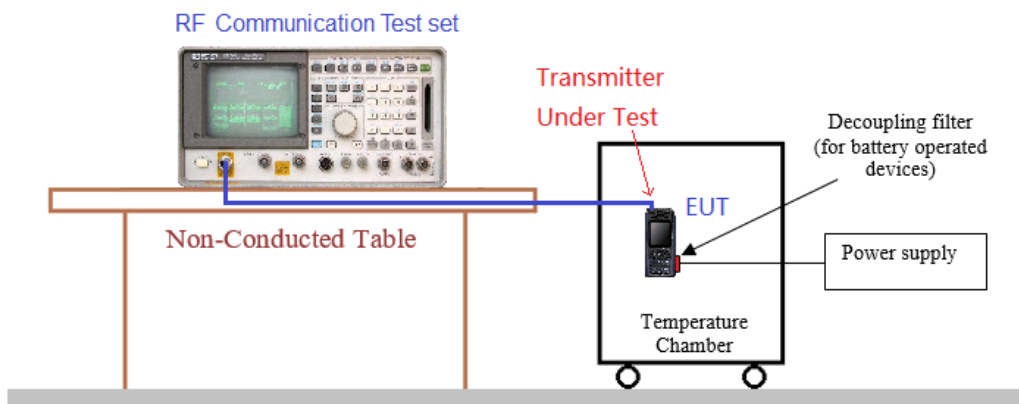

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



**6.4 MEASUREMENT RESULTS**

25 kHz Channel Separation, FM modulation, Assigned Frequency					
Test conditions		Frequency error (ppm)		Limit (ppm)	Result
Voltage (V)	Temp (°C)	Test Frequency (MHz)			
		462.6375	462.6500		
3.70	-30	0.348	0.653	5	Pass
	-20	0.892	1.049		
	-10	0.614	0.537		
	0	0.961	0.915		
	10	0.671	0.842		
	20	0.746	0.817		
	30	0.535	1.055		
	40	0.555	0.902		
	50	0.770	1.013		
4.20	20	0.878	0.926		
3.15	20	0.896	0.726		

12.5 kHz Channel Separation, FM modulation, Assigned Frequency					
Test conditions		Frequency error (ppm)		Limit (ppm)	Result
Voltage (V)	Temp (°C)	Test Frequency (MHz)			
		467.6375			
3.70	-30	0.560		2.5	Pass
	-20	0.603			
	-10	1.086			
	0	0.739			
	10	0.697			
	20	1.011			
	30	0.835			
	40	0.713			
	50	0.986			
4.20	20	0.718			
3.15	20	0.621			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 7. EMISSION BANDWIDTH

### 7.1 PROVISIONS APPLICABLE

FCC Part 95.1773: GMRS: Main channels. The authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz main channels, or any of the 467 MHz main channels.

Interstitial channels. The authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz interstitial channels, and is 12.5 kHz for GMRS transmitters operating on any of the 467 MHz interstitial channels.

Occupied Bandwidth: The EUT was connected to the audio signal generator and the spectrum analyzer via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyzer.

### 7.2 MEASUREMENT PROCEDURE

1.The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.

Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).

2.Spectrum set as follow:


Centre frequency = fundamental frequency, span=50kHz for 12.5kHz channel spacing, RBW=300Hz, VBW=1KHz, Sweep = auto,

Detector function = peak, Trace = max hold

3.Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.

4.Measure and record the results in the test report.

### 7.3 MEASUREMENT SETUP

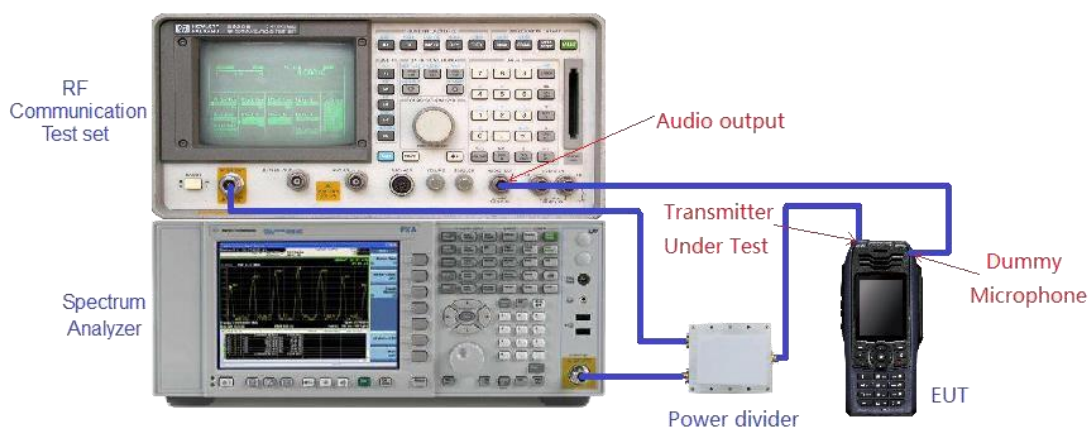


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### 7.4 MEASUREMENT RESULTS

Emission Bandwidth Measurement Result				
Operating Frequency	25 kHz Channel Separation			
	Occupied Bandwidth	Emission Bandwidth	Limits	Result
462.6375 MHz	15.008 kHz	15.67 kHz	20.0 kHz	Pass
462.6500 MHz	15.018 kHz	15.66 kHz	20.0 kHz	Pass

Emission Bandwidth Measurement Result				
Operating Frequency	12.5 kHz Channel Separation			
	Occupied Bandwidth	Emission Bandwidth	Limits	Result
467.6375 MHz	9.955 kHz	10.52 kHz	12.5 kHz	Pass

Test plot as follows:

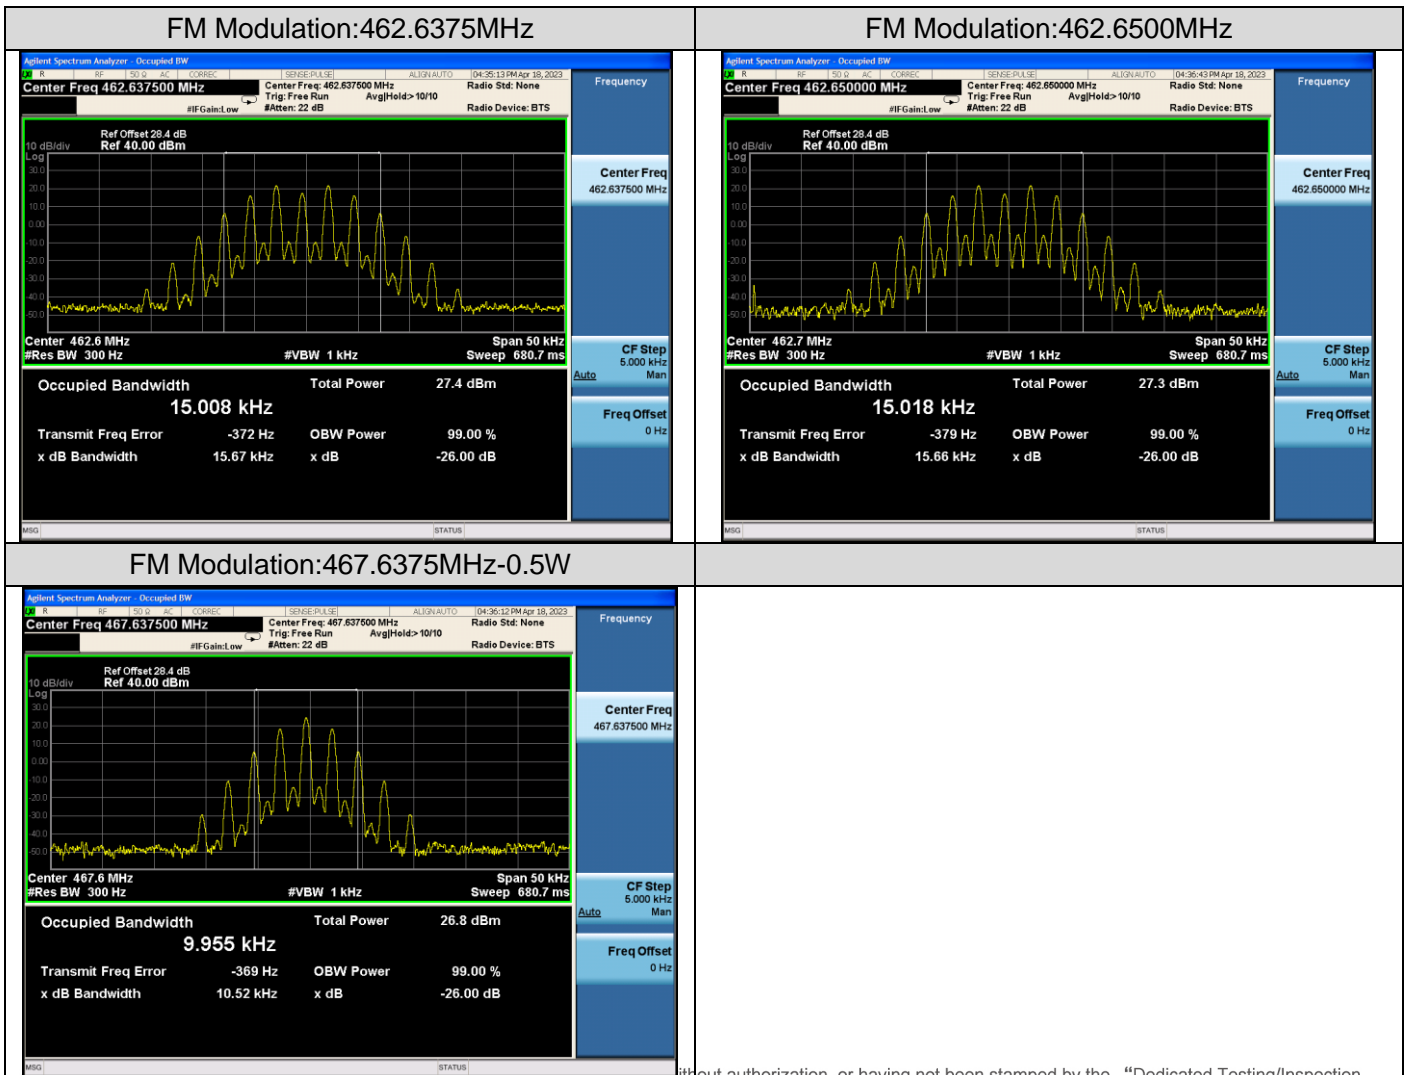

without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 8. SPURIOUS RADIATED EMISSION

### 8.1 PROVISIONS APPLICABLE

Standard Applicable [FCC Part 95.1779] According to FCC section 95.1779, the unwanted emission should be attenuated below TP by at least  $43+10 \log$  (Transmit Power) dB

### 8.2 MEASUREMENT PROCEDURE

Each GMRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section.

- a) Emission masks. Emission masks applicable to transmitting equipment in the GMRS are defined by the requirements in the following table. The numbers in the attenuation requirements column refer to rule paragraph numbers under paragraph (b) of this section.

Emission types filter	Attenuation requirements
A1D, A3E, F1D, G1D, F2D, F3E, G3E with audio filter	(1), (2), (7)
A1D, A3E, F1D, G1D, F3E, G3E without audio filter	(3), (4), (7)
H1D, J1D, R1D, H3E, J3E, R2E	(5), (6), (7)

- 1) Filtering noted for GMRS transmitters refers to the requirement in §95.1775(e).
- 2) Unwanted emission power may be measured as either mean power or peak envelope power, provided that the transmitter output power is measured the same way.
- b) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) by at least:
  - 1) 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
  - 2) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
  - 3)  $83 \log (fd \div 5)$  dB on any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz up to and including 10 kHz.
  - 4)  $116 \log (fd \div 6.1)$  dB or  $50 + 10 \log (P)$  dB, whichever is the lesser attenuation, on any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz), of more than 10 kHz up to and including 250% of the authorized bandwidth.
  - 5) 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 150% of the authorized bandwidth.
  - 6) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 150% up to and including 250% of the authorized bandwidth.
  - 7)  $43 + 10 \log (P)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

**DETAILED OVERVIEW OF THE TEST METHOD IS AS FOLLOWS:**



- 1) EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
- 6) The measurement results are obtained as described below:  $Power(EIRP)=PMea- PAg - Pcl - Ga$  The measurement results are amend as described below: $Power(EIRP)=PMea- Pcl - Ga$
- 7) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 8) ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP-2.15dBi$ .
- 9) Test the EUT in the lowest channel, the middle channel the Highest channel

**8.3 MEASUREMENT SETUP**



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).



### Radiated Emissions 30MHz to 1GHz Test setup

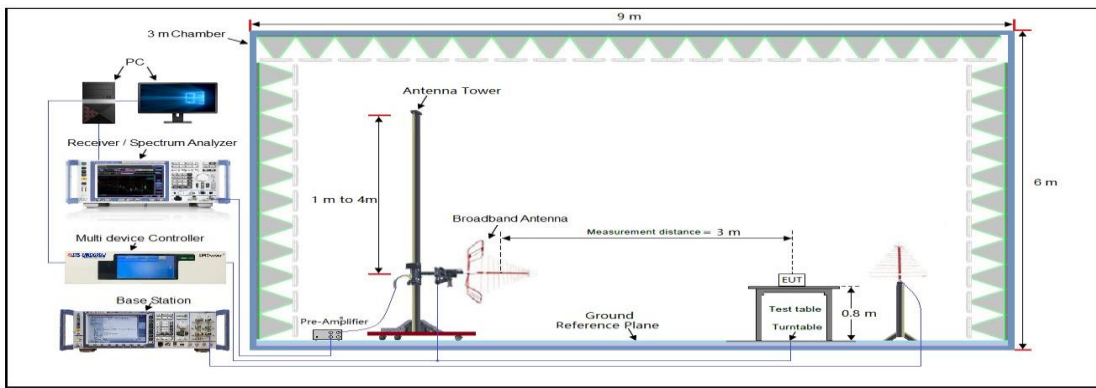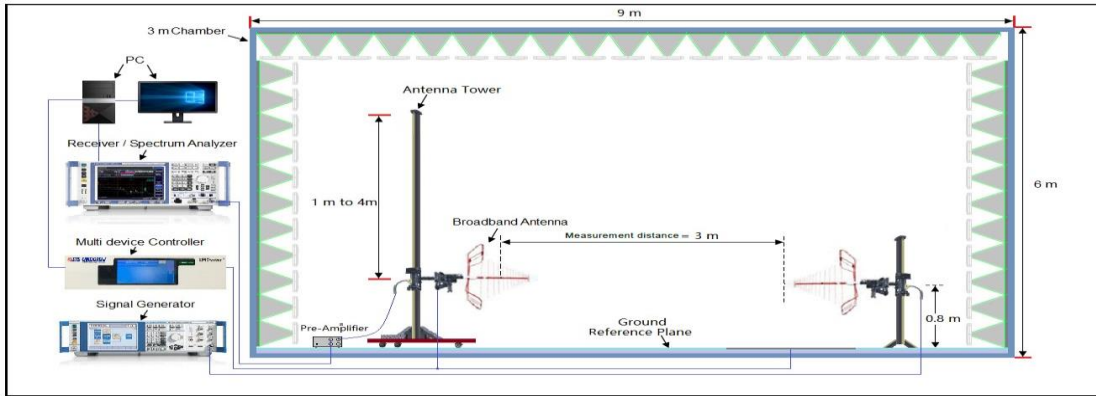

### Radiated Emissions Above 1GHz Test setup

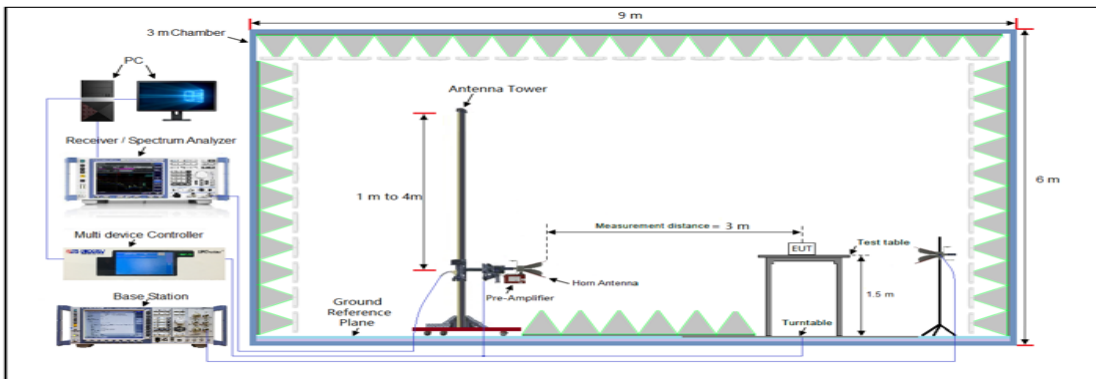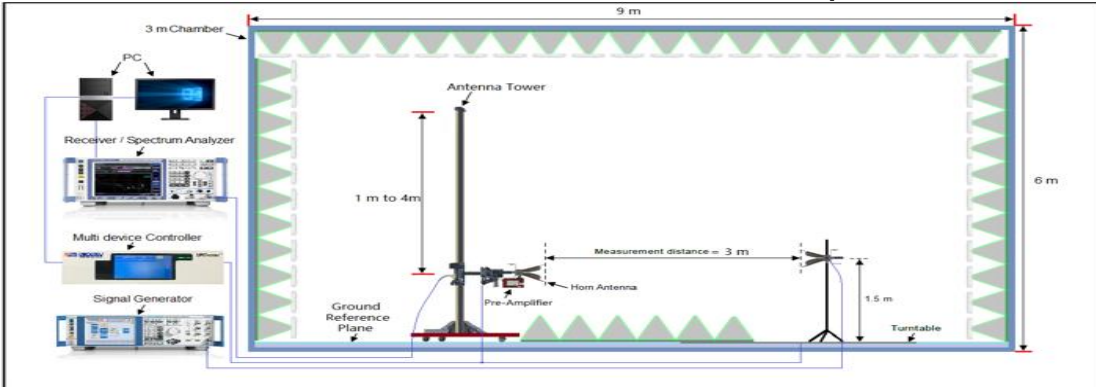

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).


#### 8.4 MEASUREMENT RESULTS

Preliminary calculation	Final Result
At least $43+10 \log (P) =43+10\log (2.5) =46.98$ (dB)	Limit=P- Preliminary calculation= $33.98-46.98=-13$ dBm
At least $43+10 \log (P) =43+10\log (0.5) =39.99$ (dB)	Limit=P- Preliminary calculation= $26.99-39.99=-13$ dBm

1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
2. Factor=Antenna Factor+ Cable loss -Pre-amplifier. (Above 1 GHz)
3. Margin=Limit- Level


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Test Mode:	TX-CH4-25KHz	Polarity:	Horizontal
------------	--------------	-----------	------------

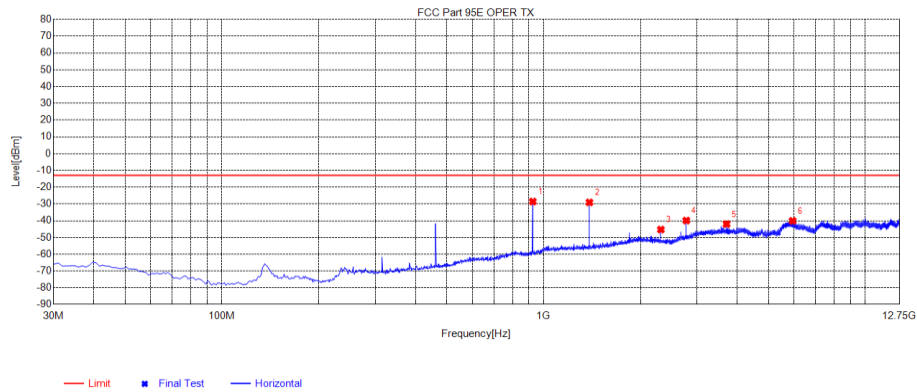

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	925.31	-72.10	-28.61	-13.00	15.61	43.49	79	Horizontal
2	1387.7888	-25.66	-29.11	-13.00	16.11	-3.45	173	Horizontal
3	2313.7814	-44.60	-45.31	-13.00	32.31	-0.71	1	Horizontal
4	2775.6026	-41.09	-39.92	-13.00	26.92	1.17	360	Horizontal
5	3701.5952	-46.45	-42.04	-13.00	29.04	4.41	109	Horizontal
6	5939.0189	-50.68	-40.11	-13.00	27.11	10.57	293	Horizontal

Test Mode:	TX-CH4-25KHz	Polarity:	Vertical
------------	--------------	-----------	----------

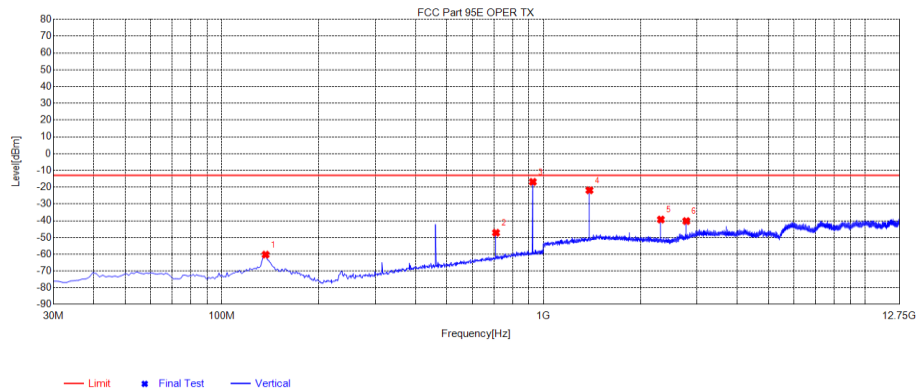


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	136.7	-94.44	-60.27	-13.00	47.27	34.17	283	Vertical
2	710.94	-87.90	-47.22	-13.00	34.22	40.68	351	Vertical
3	925.31	-60.43	-16.86	-13.00	3.86	43.57	166	Vertical
4	1387.7888	-23.28	-21.87	-13.00	8.87	1.41	313	Vertical
5	2313.7814	-38.78	-39.31	-13.00	26.31	-0.53	194	Vertical
6	2775.6026	-41.51	-40.23	-13.00	27.23	1.28	108	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




Test Mode:	TX-CH19-25KHz	Polarity:	Horizontal
------------	---------------	-----------	------------

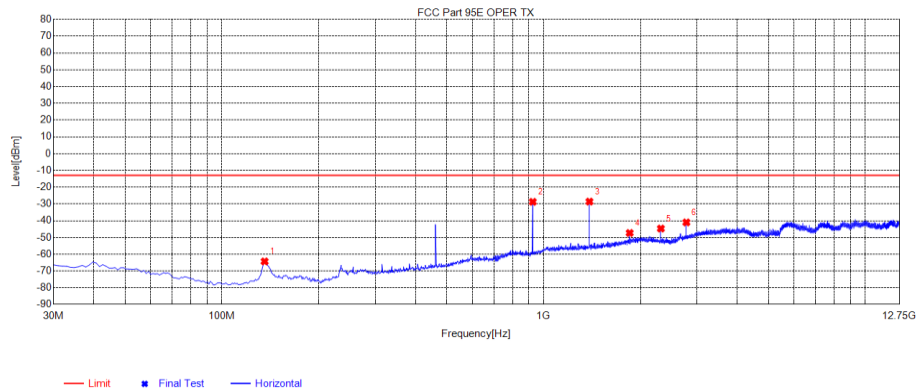

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	135.73	-92.87	-64.31	-13.00	51.31	28.56	204	Horizontal
2	925.31	-72.26	-28.77	-13.00	15.77	43.49	82	Horizontal
3	1387.7888	-25.18	-28.63	-13.00	15.63	-3.45	166	Horizontal
4	1850.7851	-46.74	-47.33	-13.00	34.33	-0.59	204	Horizontal
5	2313.7814	-43.99	-44.70	-13.00	31.70	-0.71	9	Horizontal
6	2776.7777	-42.21	-41.03	-13.00	28.03	1.18	1	Horizontal


Test Mode:	TX-CH19-25KHz	Polarity:	Vertical
------------	---------------	-----------	----------

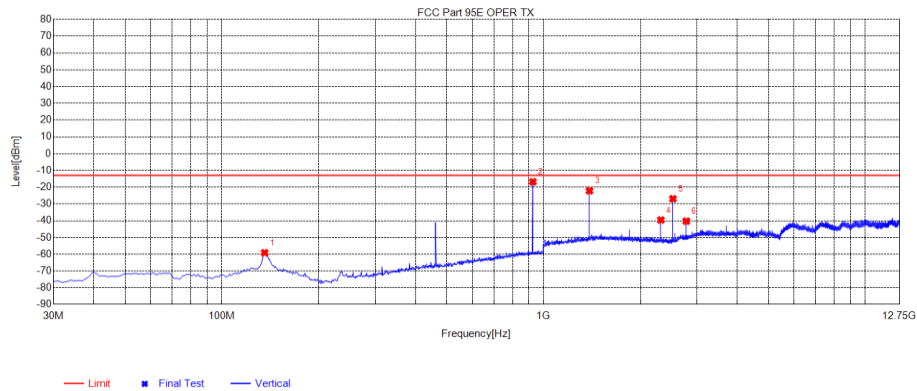

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	135.73	-93.23	-59.13	-13.00	46.13	34.10	165	Vertical
2	925.31	-60.37	-16.80	-13.00	3.80	43.57	165	Vertical
3	1387.7888	-23.57	-22.16	-13.00	9.16	1.41	297	Vertical
4	2313.7814	-39.07	-39.60	-13.00	26.60	-0.53	175	Vertical
5	2521.7772	-26.01	-26.91	-13.00	13.91	-0.90	334	Vertical
6	2775.6026	-41.56	-40.28	-13.00	27.28	1.28	110	Vertical


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Mode:	TX-CH11-12.5KHz	Polarity:	Horizontal
------------	-----------------	-----------	------------

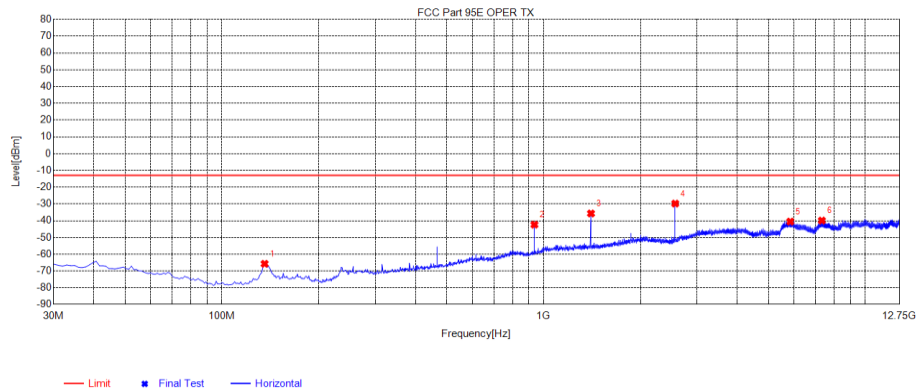

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	135.73	-94.28	-65.72	-13.00	52.72	28.56	67	Horizontal
2	935.98	-86.10	-42.38	-13.00	29.38	43.72	290	Horizontal
3	1403.0653	-32.29	-35.70	-13.00	22.70	-3.41	163	Horizontal
4	2564.0814	-28.98	-29.81	-13.00	16.81	-0.83	360	Horizontal
5	5841.4841	-50.74	-40.54	-13.00	27.54	10.20	232	Horizontal
6	7323.3073	-52.88	-39.92	-13.00	26.92	12.96	77	Horizontal

Test Mode:	TX-CH11-12.5KHz	Polarity:	Vertical
------------	-----------------	-----------	----------

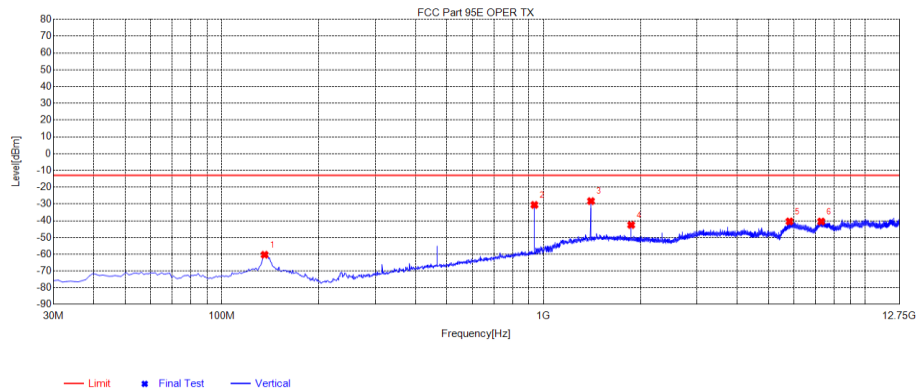

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	135.73	-94.42	-60.32	-13.00	47.32	34.10	126	Vertical
2	935.98	-74.29	-30.61	-13.00	17.61	43.68	174	Vertical
3	1403.0653	-29.85	-28.33	-13.00	15.33	1.52	174	Vertical
4	1870.7621	-43.42	-42.56	-13.00	29.56	0.86	154	Vertical
5	5808.5809	-49.51	-40.44	-13.00	27.44	9.07	220	Vertical
6	7288.0538	-53.62	-40.48	-13.00	27.48	13.14	42	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


### 8.5 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:

-Connect the equipment as illustrated.


-Spectrum set as follow:

1. Centre frequency = fundamental frequency, Span=150kHz for 12.5kHz and 25kHz channel spacing, RBW=300Hz, VBW=1000Hz for 12.5kHz, RBW=300Hz, VBW=1000Hz for 25kHz, Sweep = auto, Detector function = peak, Trace = max hold
2. Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
3. Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation (Rated system deviation is 2.5 kHz for 12.5kHz channel spacing). The input level shall be established at the frequency of maximum response of the audio modulating circuit.
4. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer.
5. Measure and record the results in the test report.

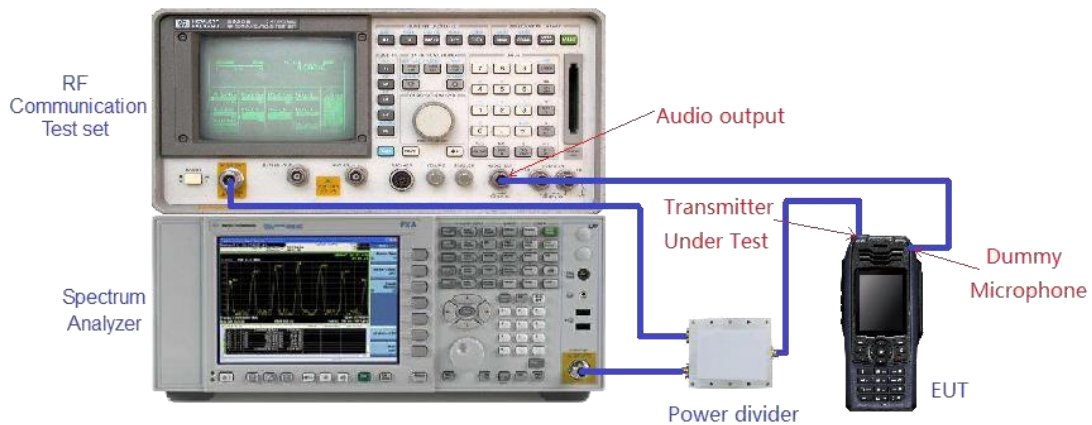

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test plot as follows:

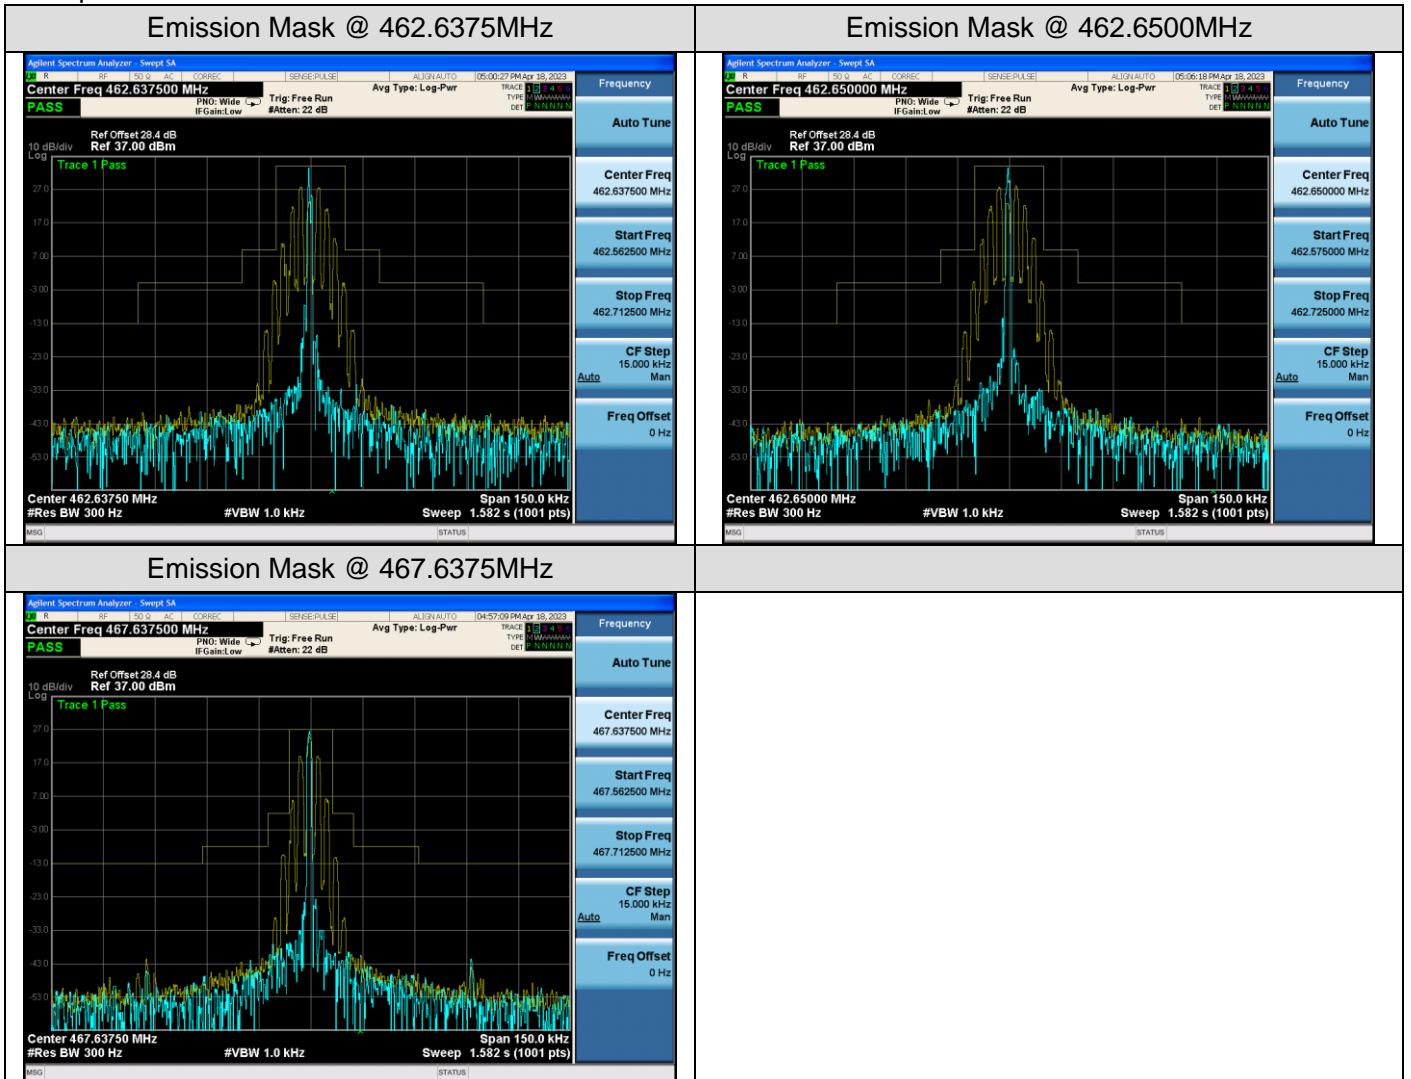

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 9. MODULATION CHARACTERISTICS

### 9.1 PROVISIONS APPLICABLE

According to FCC§2.1047 and §95.1775, for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

Each GMRS transmitter type must be designed to satisfy the modulation requirements in this section. Operation of GMRS stations must also be in compliance with these requirements.

(a) Main channels. The peak frequency deviation for emissions to be transmitted on the main channels must not exceed  $\pm 5$  kHz.

(b) 462 MHz interstitial channels. The peak frequency deviation for emissions to be transmitted on the 462 MHz interstitial channels must not exceed  $\pm 5$  kHz.

(c) 467 MHz interstitial channels. The peak frequency deviation for emissions to be transmitted on the 467 MHz interstitial channels must not exceed  $\pm 2.5$  kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

### 9.2 MEASUREMENT METHOD


#### 9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1kHz using this level as a reference (0dB) and vary the input level from  $-20$  to  $+20$ dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

#### 9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 kHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 kHz and record the frequency deviation.
- (4). Audio Frequency Response =  $20\log_{10}$  (Deviation of test frequency/Deviation of 1 kHz reference).

### 9.3 MEASUREMENT SETUP

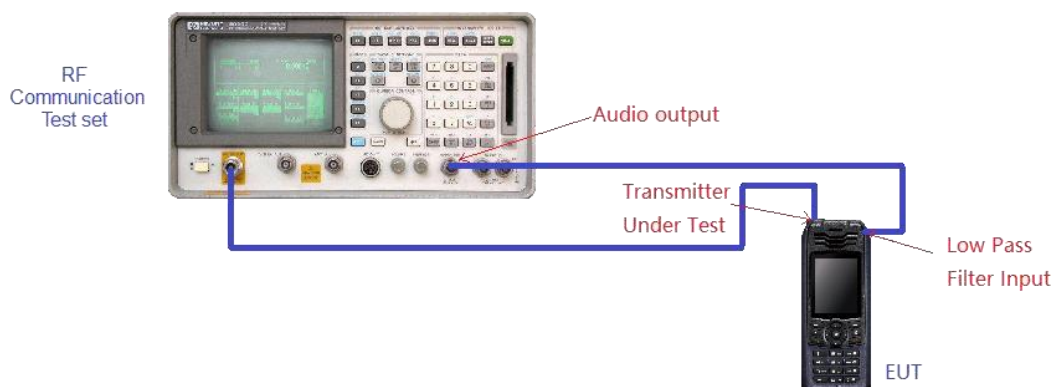


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### 9.4 MEASUREMENT RESULTS

#### (A). MODULATION LIMIT:

25kHz, FM modulation, Assigned Frequency:462.6500MHz				
Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (kHz)	Peak Freq. Deviation At 1000 Hz (kHz)	Peak Freq. Deviation At 1500 Hz (kHz)	Peak Freq. Deviation At 3000 Hz (kHz)
-20	0.45	0.66	0.83	1.15
-15	0.52	0.79	1.05	1.38
-10	0.67	1.05	1.21	1.55
-5	0.81	1.12	1.49	1.63
0	0.93	1.15	1.51	1.71
+5	1.06	1.34	1.53	1.74
+10	1.12	1.38	1.63	2.02
+15	1.15	1.42	1.71	2.11
+20	1.11	1.39	1.69	2.09

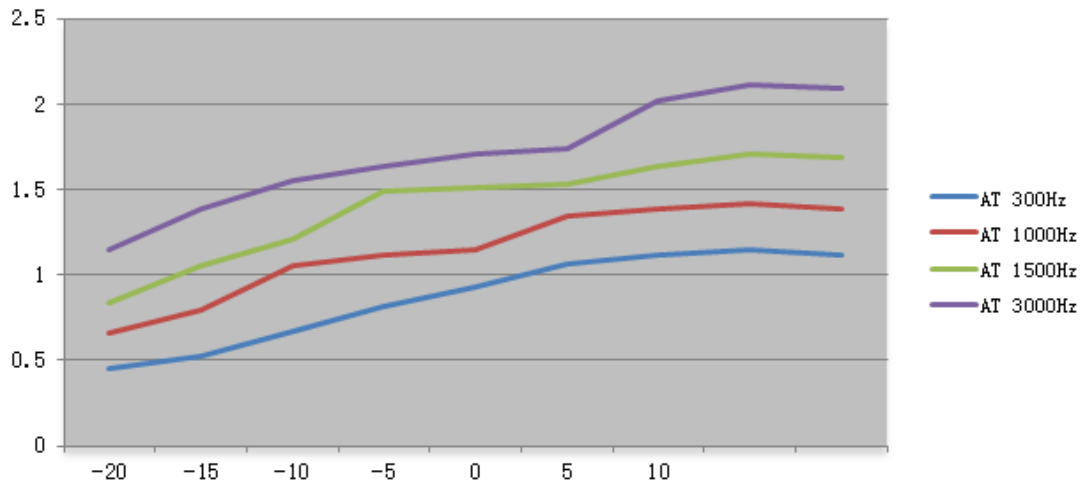


Note: All the modes had been tested, but only the worst data recorded in the report

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



12.5kHz, FM modulation, Assigned Frequency:467.6375 MHz				
Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (kHz)	Peak Freq. Deviation At 1000 Hz (kHz)	Peak Freq. Deviation At 1500 Hz (kHz)	Peak Freq. Deviation At 3000 Hz (kHz)
-20	0.11	0.35	0.52	0.71
-15	0.19	0.42	0.66	0.82
-10	0.25	0.51	0.71	0.99
-5	0.32	0.63	0.82	1.02
0	0.44	0.66	0.85	1.16
+5	0.46	0.75	1.03	1.25
+10	0.49	0.79	1.11	1.34
+15	0.51	0.82	1.25	1.58
+20	0.55	0.74	1.24	1.49

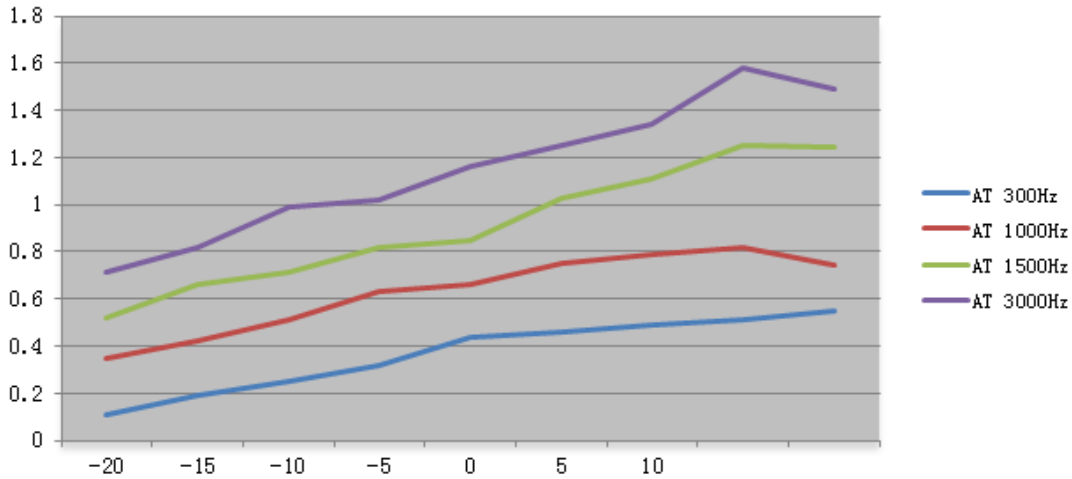


Note: All the modes had been tested, but only the worst data recorded in the report

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

**(B). AUDIO FREQUENCY RESPONSE:**

25kHz, Analog modulation, Assigned Frequency:462.6500MHz-2.5W		
Frequency (Hz)	Deviation (kHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.15	-14.09
400	0.27	-8.99
500	0.36	-6.49
600	0.42	-5.15
700	0.47	-4.17
800	0.54	-2.97
900	0.66	-1.23
1000	<b>0.76</b>	0.00
1200	0.82	0.66
1400	0.99	2.30
1600	1.12	3.37
1800	1.25	4.32
2000	1.34	4.93
2400	1.59	6.41
2500	1.66	6.79
2800	1.78	7.39
3000	1.82	7.59

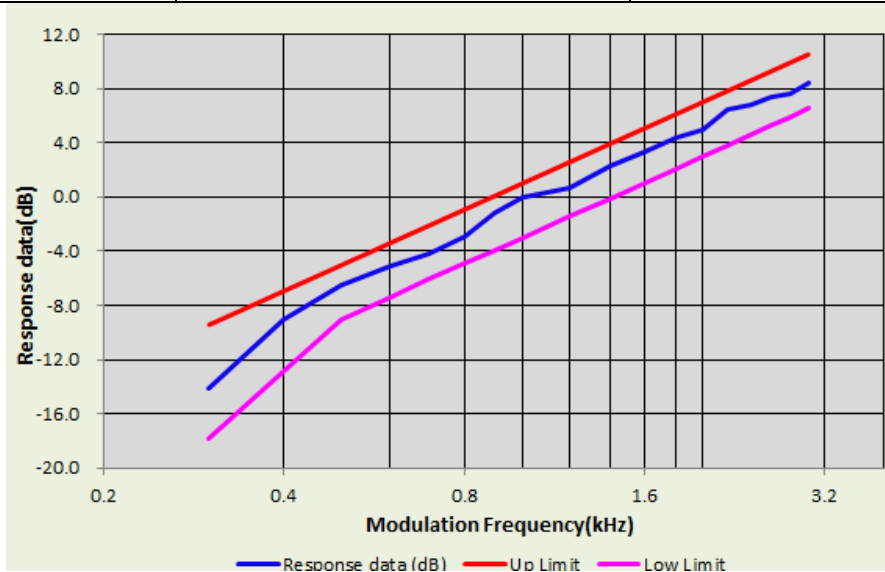


Note: All the modes had been tested, but only the worst data recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



1.25kHz, Analog modulation, Assigned Frequency:467.6375MHz		
Frequency (Hz)	Deviation (kHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.18	-13.17
400	0.28	-9.33
500	0.36	-7.15
600	0.41	-6.02
700	0.55	-3.47
800	0.63	-2.29
900	0.65	-2.02
1000	<b>0.82</b>	0.00
1200	0.86	0.41
1400	0.99	1.64
1600	1.11	2.63
1800	1.35	4.33
2000	1.41	4.71
2400	1.55	5.53
2500	1.78	6.73
2800	1.88	7.21
3000	1.97	7.61

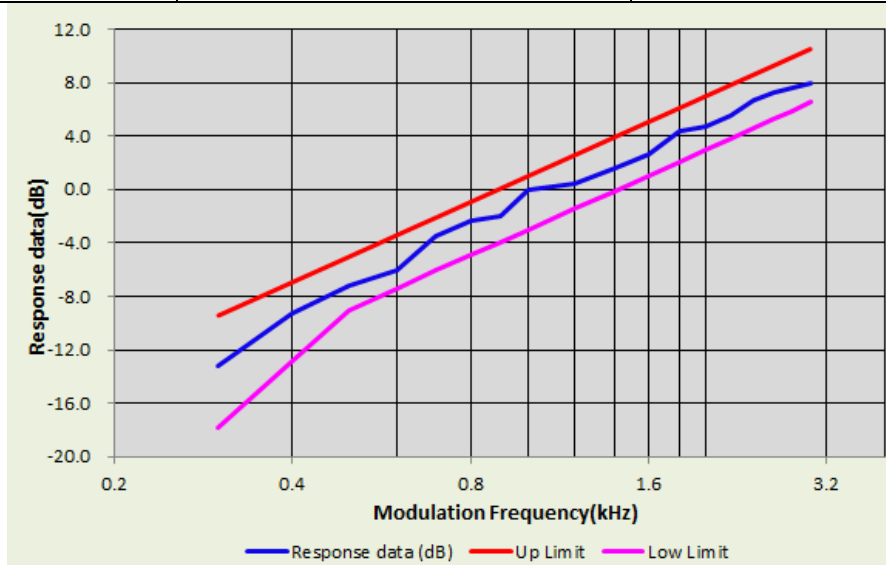

Note: All the modes had been tested, but only the worst data recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 10. MAXIMUM TRANSMITTER POWER

### 10.1 PROVISIONS APPLICABLE

FCC Part 95.1767 For GMRS, the maximum permissible transmitter output power effective radiated power (e.r.p.) as follows.

This section contains transmitting power limits for GMRS stations. The maximum transmitting power depends on which channels are being used and the type of station.

462/467 MHz main channels. The limits in this paragraph apply to stations transmitting on any of the 462 MHz main channels or any of the 467 MHz main channels. Each GMRS transmitter type must be capable of operating within the allowable power range. GMRS licensees are responsible for ensuring that their GMRS stations operate in compliance with these limits.

The transmitter output power of mobile, repeater and base stations must not exceed 50 Watts.

The transmitter output power of fixed stations must not exceed 15 Watts.

462 MHz interstitial channels. The effective radiated power (ERP) of mobile, hand-held portable and base stations transmitting on the 462 MHz interstitial channels must not exceed 5 Watts.

(467 MHz interstitial channels. The effective radiated power (ERP) of hand-held portable units transmitting on the 467 MHz interstitial channels must not exceed 0.5 Watt. Each GMRS transmitter type capable of transmitting on these channels must be designed such that the ERP does not exceed 0.5 Watt.

### 10.2 MEASUREMENT METHOD

- 10) EUT was placed on a 0.8 or 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 11) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 12) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 13) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P<sub>Mea</sub>) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 14) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
- 15) The measurement results are obtained as described below:  $Power(EIRP)=PMea- PAg - Pcl - Ga$  The measurement results are amend as described below: $Power(EIRP)=PMea- Pcl - Ga$
- 16) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 17) ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP-2.15dBi$ .
- 18) Test the EUT in the lowest channel, the middle channel the Highest channel

### 10.3 MEASUREMENT SETUP



Conducted Output Power:

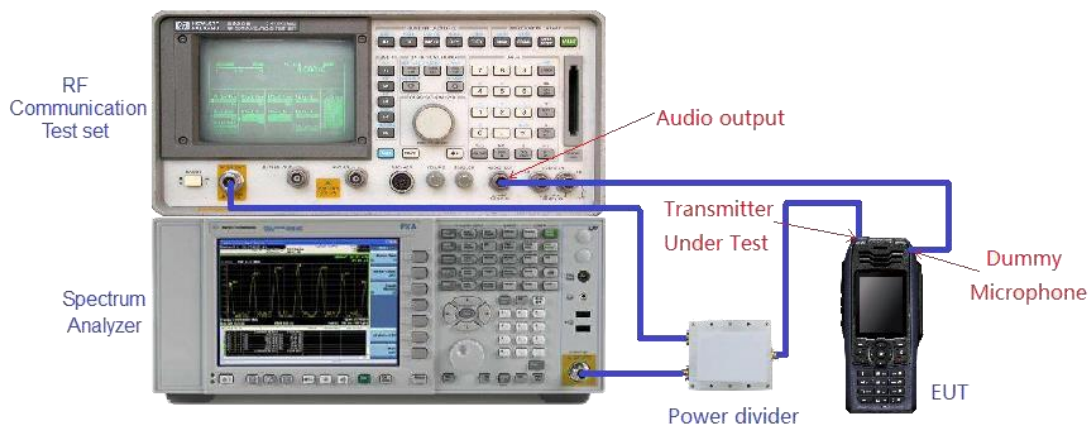



Effective Radiated Power:

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### Radiated Below 1GHz

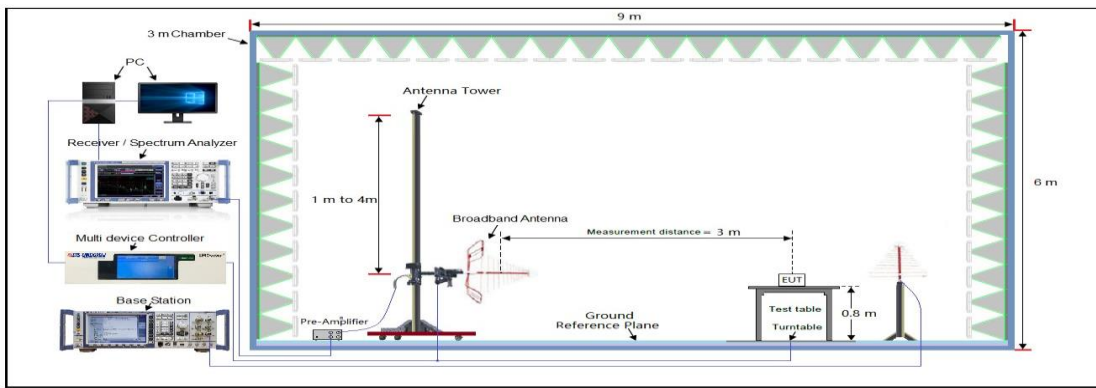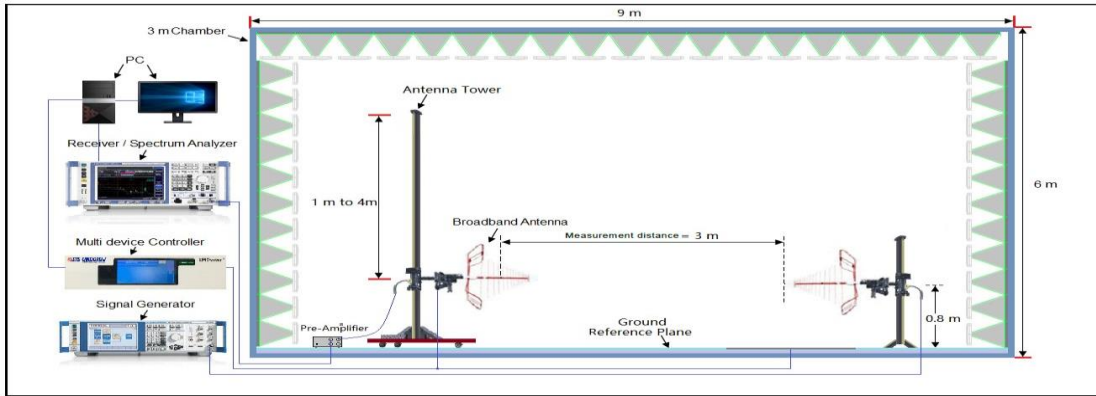

### Radiated Above 1 GHz

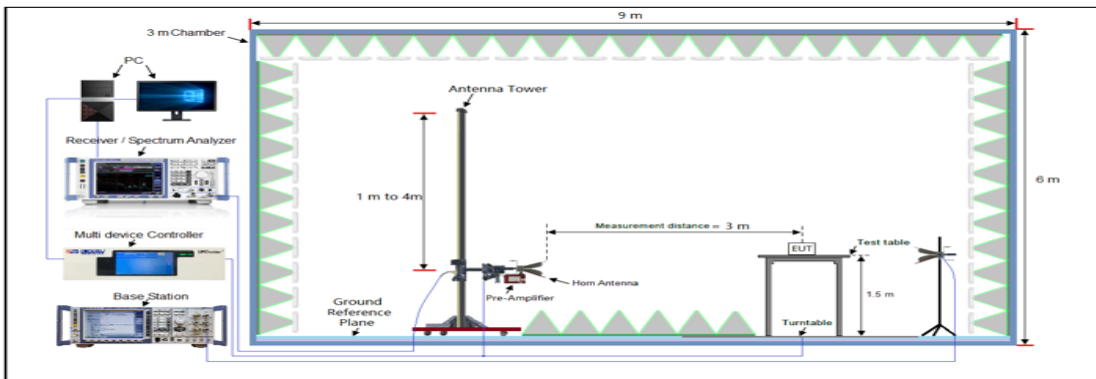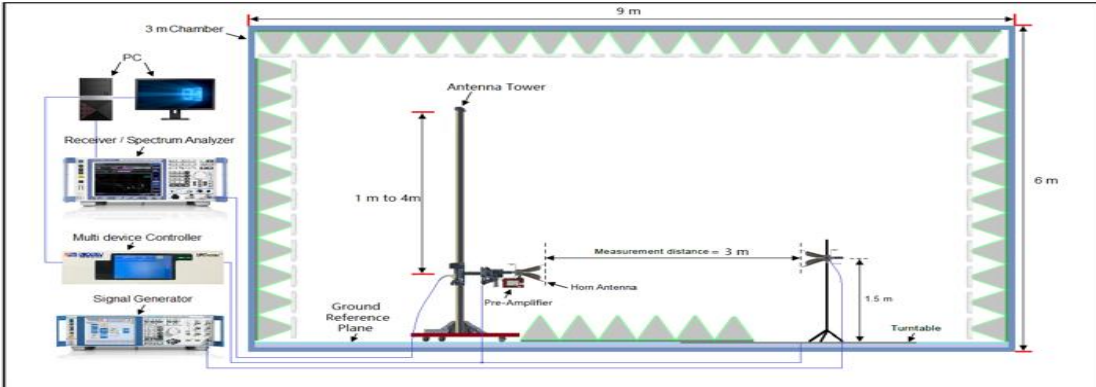

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 10.4 MEASUREMENT RESULTS

### ERP RESULT:

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(W)	(W)	(W)
<b>Channel Separation: 25KHz</b>									
462.6375	102.82	V	27.62	0.38	6.6	33.84	2.42	5	2.58
462.6375	102.67	H	27.47	0.38	6.6	33.69	2.34	5	2.66
462.6500	102.69	V	27.49	0.38	6.6	33.71	2.35	50	47.65
462.6500	102.54	H	27.34	0.38	6.6	33.56	2.27	50	47.73
<b>Channel Separation: 12.5KHz</b>									
467.6375	95.58	V	20.38	0.38	6.6	26.60	0.46	0.5	0.04
467.6375	95.47	H	20.27	0.38	6.6	26.49	0.45	0.5	0.05

**NOTE:1.** Calculation Formula: Emission Level(dBm) = S.G. (dBm)- Cable Loss(dB)+ Ant.Gain(dBi)  
The Ant. Gain including the correct factor 2.15  
Margin (dB) = Limit(dBm)- Emission Level(dBm)

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



## 11. SPURIOUS EMISSION ON ANTENNA PORT

### 11.1 PROVISIONS APPLICABLE

Please refer to FCC 47 CFR 2.1051, 2.1057, 22.359 & 90.210 for specification details.  
Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Attenuation Limit (dBc)
§ 95.1779	At least 43 + 10 log (P) dB

$43 + 10 \log (P_{\text{watts}})$

Calculation: Limit (dBm) = EL - 43 - 10 log<sub>10</sub> (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,


In this application, the EL is P (dBm).

Limit (dBm) = P (dBm) - 43 - 10 log (Pwatts) = -13 dBm

### 11.2 MEASUREMENT METHOD

1. The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation.
2. The resolution bandwidth of the spectrum analyzer was set to 100 kHz. Sufficient scans were taken to show any out of band emission up to 10th . Harmonic for the lower and the highest frequency range.
3. Set RBW 100 kHz, VBW 300 kHz in the frequency band 30MHz to 1GHz, while set RBW=1MHz. VBW=3MHz from the 1GHz to 10th Harmonic.
4. The audio input was set the unmodulated carrier, the resulting picture is print out for each channel separation.

### 11.3 MEASUREMENT SETUP

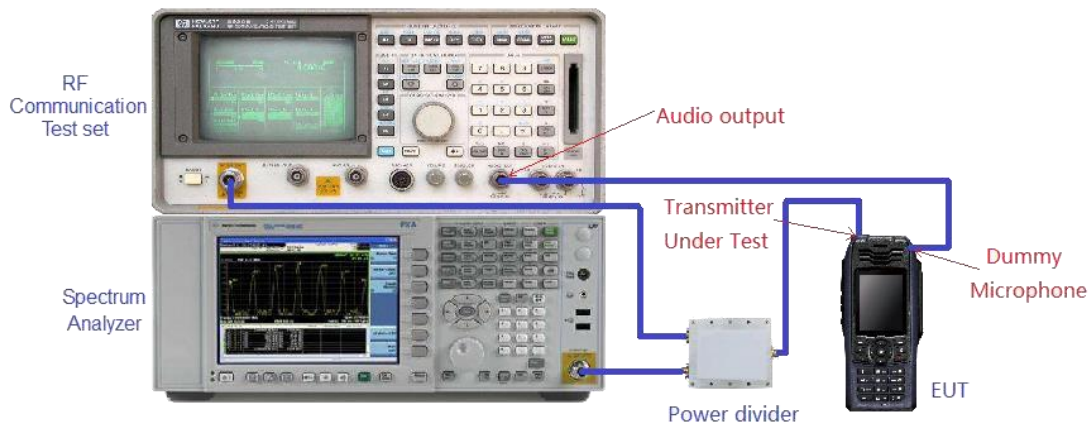

### 11.4 MEASUREMENT RESULTS

Note: Not applicable

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 12. AUDIO LOW PASS FILTER RESPONSE

### 12.1 PROVISIONS APPLICABLE

§95.1775 GMRS modulation requirements

Audio filter. Each GMRS transmitter type must include audio frequency low pass filtering, unless it complies with the applicable paragraphs of §95.1779 (without filtering).


The filter must be between the modulation limiter and the modulated stage of the transmitter.

At any frequency (f in kHz) between 3 and 20 kHz, the filter must have an attenuation of at least 60 log (f/3) dB more than the attenuation at 1 kHz. Above 20 kHz, it must have an attenuation of at least 50 dB more than the attenuation at 1 kHz

### 12.2 MEASUREMENT METHOD

- (1) The DUT transmitter output port was connected to Modulation Analyzer.
- (2) Path loss for the measurement included.
- (3) Press 23.1SPCL on modulation analyzer to enable the external LO from SIgen.
- (4) Set the Sigen frequency to  $F_c + 1.5\text{MHz}$ , RF output level to 0dBm without modulation.
- (5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the maximum deviation.
- (6) Up the amplitude by 20dB.
- (7) On DSA, get the reference point to 0dB.
- (8) Vary the frequency on audio analyzer from 3 kHz to 30 kHz, record the audio tone from DSA.


### 12.3 MEASUREMENT SETUP

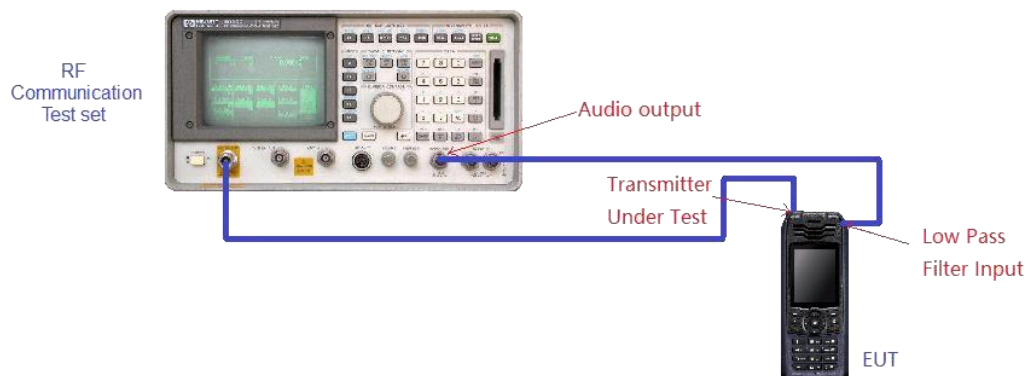

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

### 12.4 MEASUREMENT RESULTS

25kHz, FM modulation, Assigned Frequency:462.6500MHz		
Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1	0	/
3	-4.12	0.00
4	-9.12	-5.00
5	-15.32	-8.87
6	-20.04	-12.04
7	-23.84	-14.72
8	-26.29	-17.04
9	-30.20	-19.08
10	-32.88	-20.92
15	-38.63	-28.00
20	-36.26	-28.00
30	-34.11	-28.00
50	-33.15	-28.00
70	-32.05	-28.00

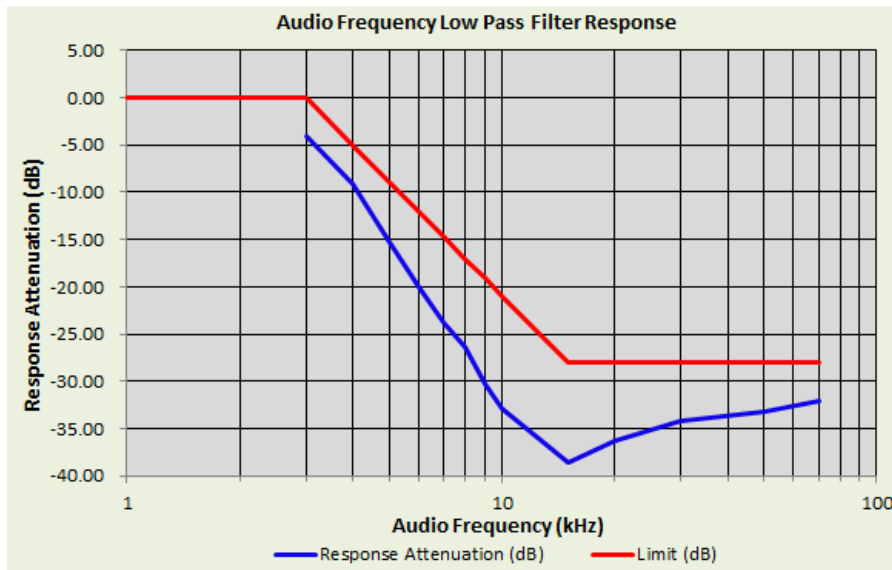


Note: All the test frequencies was tested, but only the worst data be recorded in this part.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



12.5kHz, FM modulation, Assigned Frequency:463.6375MHz		
Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1	0	/
3	-2.45	0.00
4	-8.22	-5.00
5	-12.56	-8.87
6	-17.16	-12.04
7	-20.94	-14.72
8	-24.20	-17.04
9	-26.64	-19.08
10	-29.88	-20.92
15	-36.41	-28.00
20	-37.29	-28.00
30	-35.21	-28.00
50	-34.25	-28.00
70	-31.14	-28.00

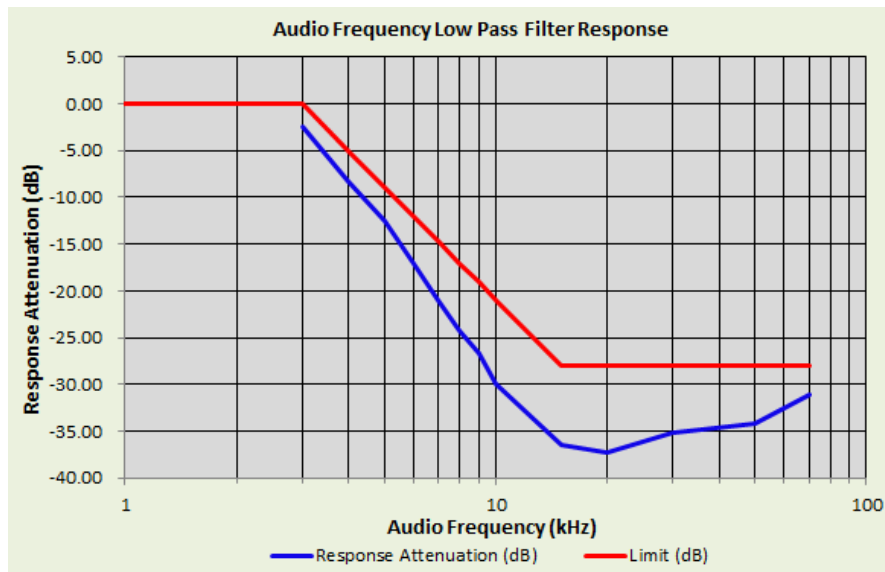

Note: All the test frequencies was tested, but only the worst data be recorded in this part.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

**APPENDIX I: PHOTOGRAPHS OF TEST SETUP**

Refer to the Report No.: AGC05067230401AP01

**APPENDIX II: PHOTOGRAPHS OF TEST EUT**

Refer to the Report No.: AGC05067230401AP02

**-----END OF REPORT-----**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>



## Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the “Company”) solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the “Clients”).
2. Any report issued by Company as a result of this application for testing services (the “Report”) shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).