

APPENDIX A – SAR TEST PLOTS

Test Laboratory: HCT CO., LTD
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.5 °C
Test Date: Mar.13, 2008

DUT: GXT775; Type: Face; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.563 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 45.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(7.25, 7.25, 7.25); Calibrated: 2007-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: 835/900 Phantom ; Type: SAM

GMRS 450 Face 1/Area Scan (91x131x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.84 mW/g

GMRS 450 Face 1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 48.9 V/m; Power Drift = -1.09 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.61 mW/g; SAR(10 g) = 1.15 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.69 mW/g

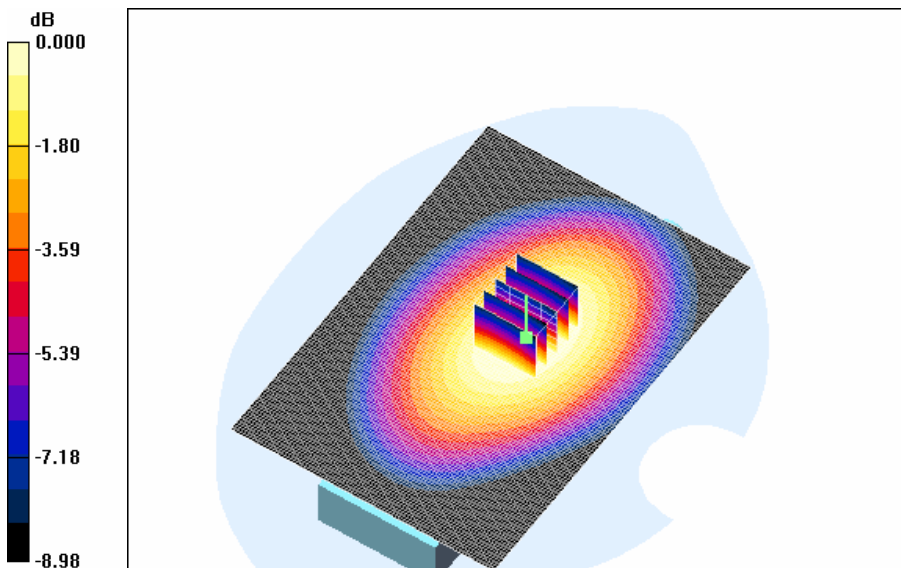

Test Laboratory: HCT CO., LTD
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.5 °C
Test Date: Mar.13, 2008

DUT: GXT775; Type: Face; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.55 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.55 \text{ MHz}$; $\sigma = 0.87 \text{ mho/m}$; $\epsilon_r = 45.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(7.25, 7.25, 7.25); Calibrated: 2007-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: 835/900 Phantom ; Type: SAM

GMRS 450 Face 15/Area Scan (91x131x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.75 mW/g

GMRS 450 Face 15/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 48.5 V/m; Power Drift = -1.08 dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 1.55 mW/g; SAR(10 g) = 1.11 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.64 mW/g

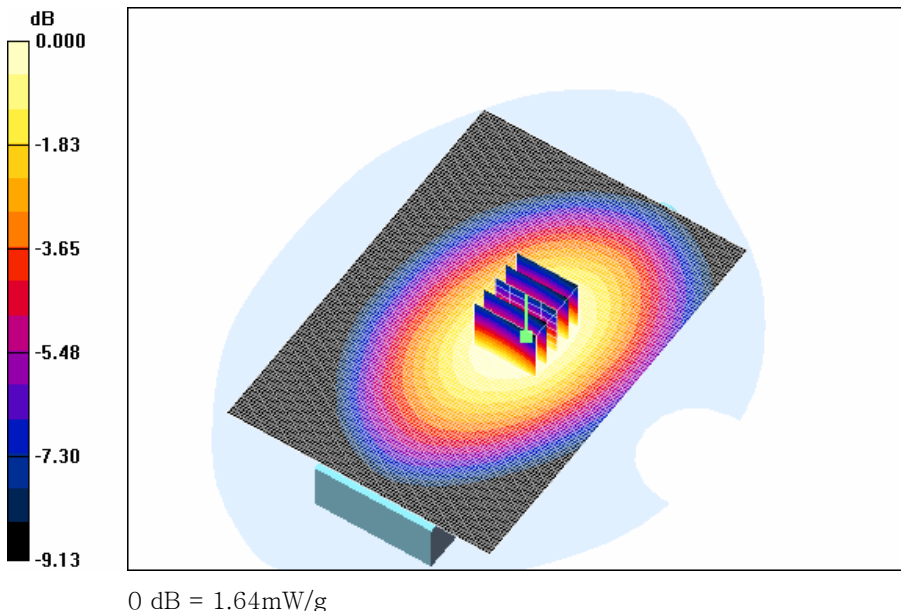

Test Laboratory: HCT CO., LTD
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.5 °C
Test Date: Mar.13, 2008

DUT: GXT775; Type: Face; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.725 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.725$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 45.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(7.25, 7.25, 7.25); Calibrated: 2007-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: 835/900 Phantom ; Type: SAM

GMRS 450 Face 22/Area Scan (91x131x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.72 mW/g

GMRS 450 Face 22/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 46.6 V/m; Power Drift = -0.975 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.52 mW/g; SAR(10 g) = 1.09 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.59 mW/g

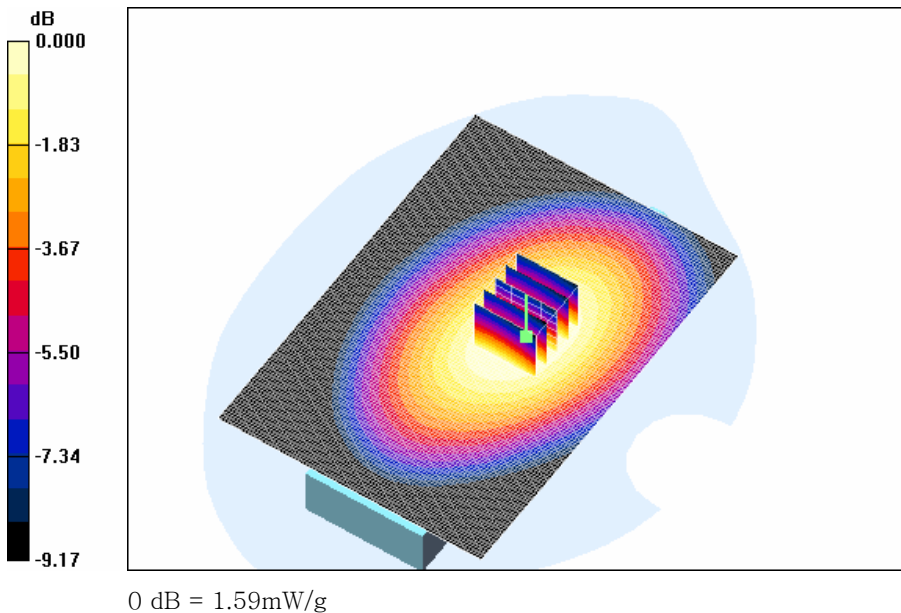

Test Laboratory: HCT CO., LTD
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.5 °C
Test Date: Mar.13, 2008

DUT: GXT775; Type: Face; Serial: #1

Communication System: 450MHz (FCC); Frequency: 467.563 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 467.563$ MHz; $\sigma = 0.878$ mho/m; $\epsilon_r = 45.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(7.25, 7.25, 7.25); Calibrated: 2007-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: 835/900 Phantom ; Type: SAM

GMRS 450 Face 8/Area Scan (91x131x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.331 mW/g

GMRS 450 Face 8/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.4 V/m; Power Drift = -0.864 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.297 mW/g; SAR(10 g) = 0.212 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.311 mW/g

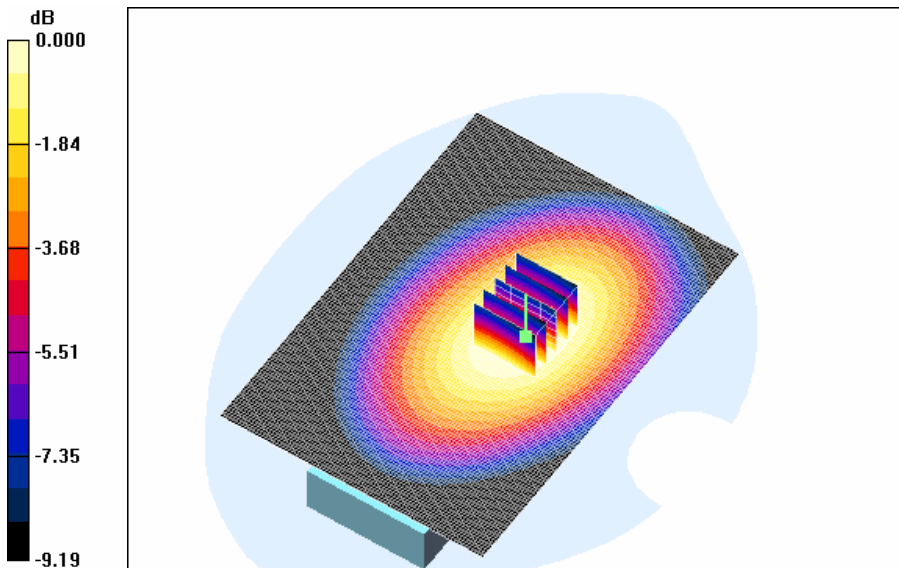

0 dB = 0.311mW/g

Test Laboratory: HCT CO., LTD
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.5 °C
Test Date: Mar.13, 2008

DUT: GXT775; Type: Face; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.563 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 45.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(7.25, 7.25, 7.25); Calibrated: 2007-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: 835/900 Phantom ; Type: SAM

GMRS 450 Face 1/Area Scan (91x131x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.80 mW/g

GMRS 450 Face 1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 48.0 V/m; Power Drift = -1.06 dB

Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 1.59 mW/g; SAR(10 g) = 1.14 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.67 mW/g

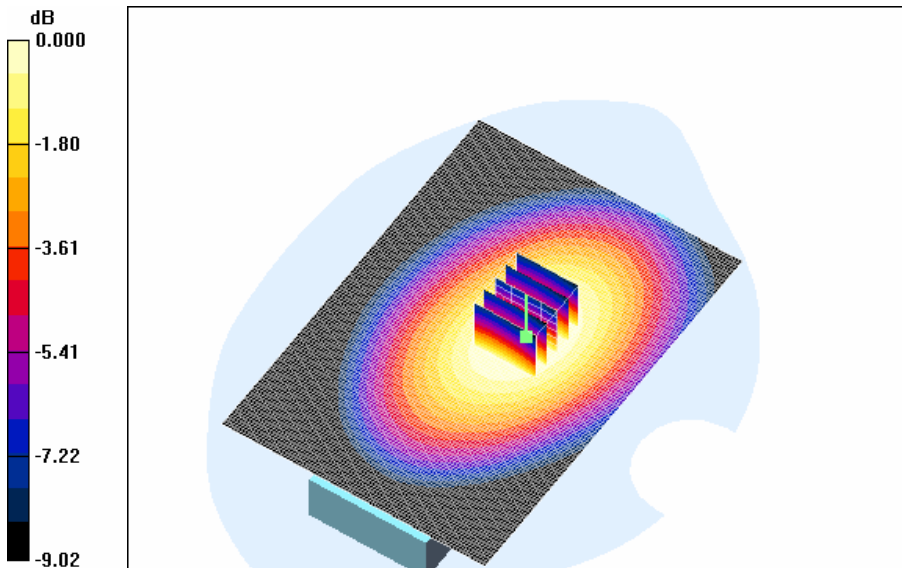

0 dB = 1.67mW/g

Test Laboratory: HCT CO., LTD
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.5 °C
Test Date: Mar.13, 2008

DUT: GXT775; Type: Face; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.563 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 45.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(7.25, 7.25, 7.25); Calibrated: 2007-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: 835/900 Phantom ; Type: SAM

GMRS 450 Face 1/Area Scan (91x131x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.74 mW/g

GMRS 450 Face 1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 47.0 V/m; Power Drift = -0.863 dB

Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 1.54 mW/g; SAR(10 g) = 1.11 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.61 mW/g

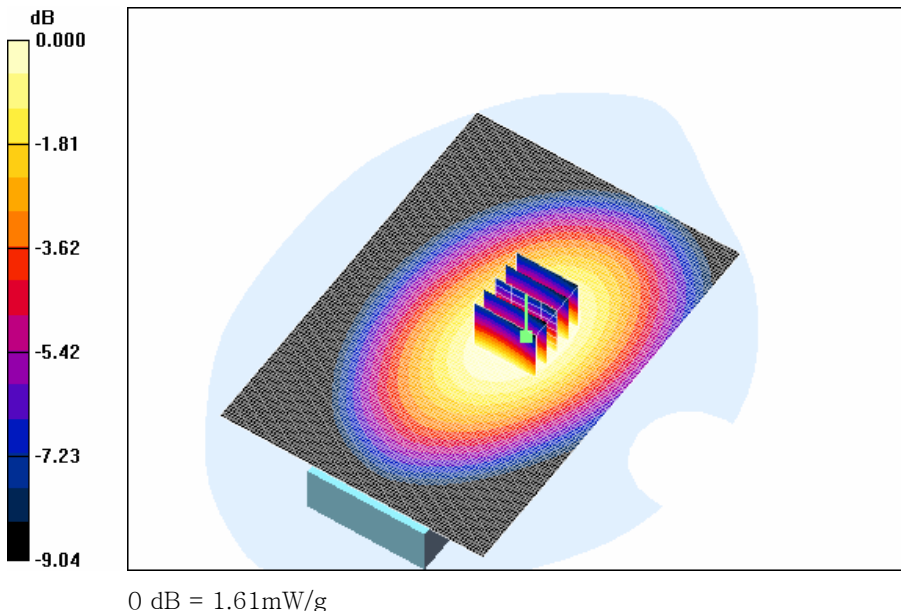

Test Laboratory: HCT CO., LTD
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.5 °C
Test Date: Mar.13, 2008

DUT: GXT775; Type: Face; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.563 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 45.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(7.25, 7.25, 7.25); Calibrated: 2007-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: 835/900 Phantom ; Type: SAM

GMRS 450 Face 1/Area Scan (91x131x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.996 mW/g

GMRS 450 Face 1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 33.4 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.903 mW/g; SAR(10 g) = 0.647 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.943 mW/g

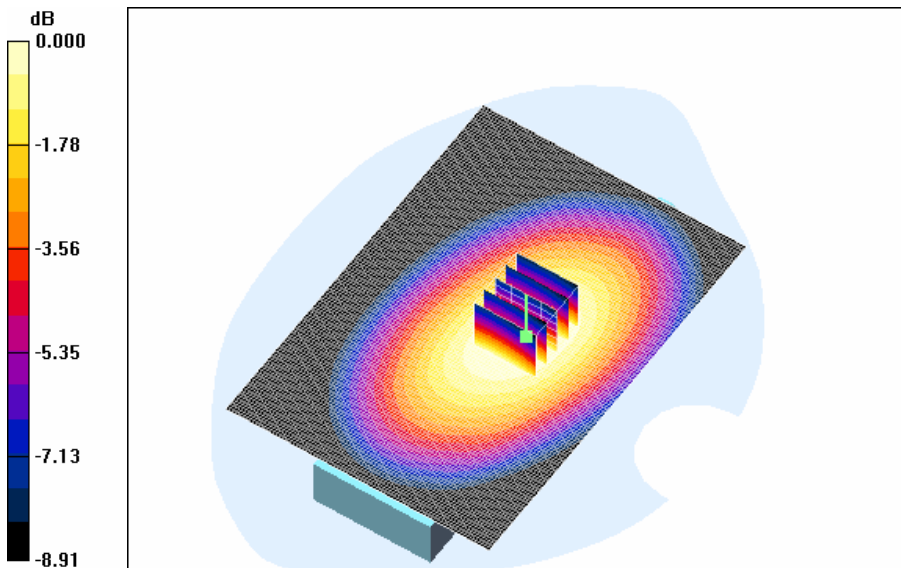

0 dB = 0.943mW/g

Test Laboratory: HCT CO., LTD
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.5 °C
Test Date: Mar.13, 2008

DUT: GXT775; Type: Body; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.563 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(7.76, 7.76, 7.76); Calibrated: 2007-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: 835/900 Phantom ; Type: SAM

GMRS 450 Body 1/Area Scan (91x131x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.45 mW/g

GMRS 450 Body 1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 37.3 V/m; Power Drift = -1.05 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.839 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.29 mW/g

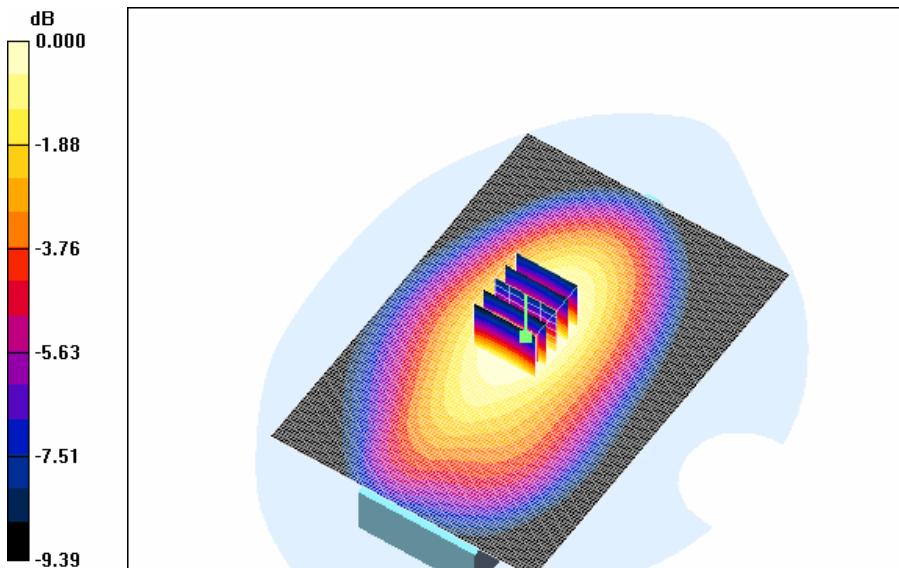

0 dB = 1.29mW/g

Test Laboratory: HCT CO., LTD
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.5 °C
Test Date: Mar.13, 2008

DUT: GXT775; Type: Body; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.55 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.55$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(7.76, 7.76, 7.76); Calibrated: 2007-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: 835/900 Phantom ; Type: SAM

GMRS 450 Body 15/Area Scan (91x131x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.61 mW/g

GMRS 450 Body 15/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 39.5 V/m; Power Drift = -0.883 dB

Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 1.38 mW/g; SAR(10 g) = 0.959 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.45 mW/g

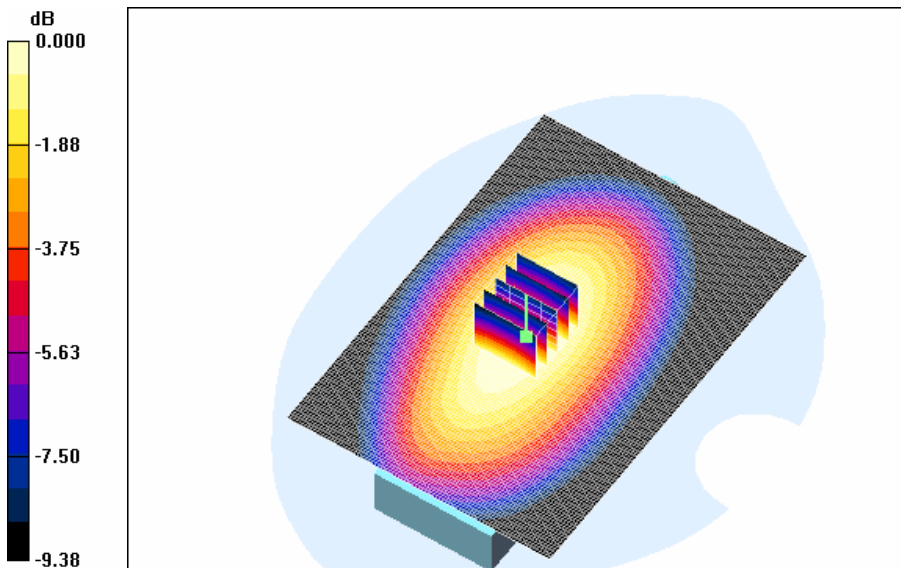

0 dB = 1.45mW/g

Test Laboratory: HCT CO., LTD
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.5 °C
Test Date: Mar.13, 2008

DUT: GXT775; Type: Body; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.725 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.725$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(7.76, 7.76, 7.76); Calibrated: 2007-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: 835/900 Phantom ; Type: SAM

GMRS 450 Body 22/Area Scan (91x131x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.33 mW/g

GMRS 450 Body 22/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 36.2 V/m; Power Drift = -0.828 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.781 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.20 mW/g

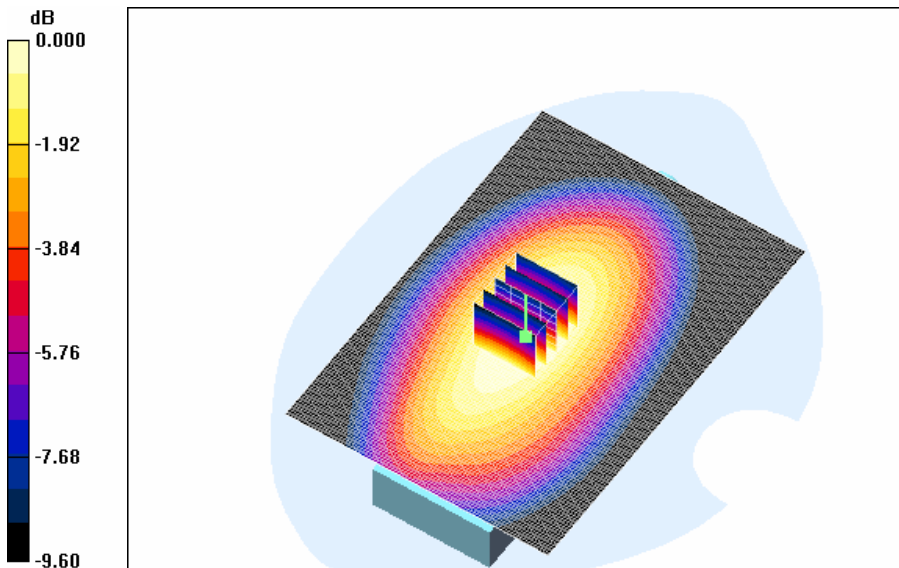

0 dB = 1.20mW/g

Test Laboratory: HCT CO., LTD
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.5 °C
Test Date: Mar.13, 2008

DUT: GXT775; Type: Body; Serial: #1

Communication System: 450MHz (FCC); Frequency: 467.563 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 467.563$ MHz; $\sigma = 0.976$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(7.76, 7.76, 7.76); Calibrated: 2007-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: DAE not calibrated
- Phantom: 835/900 Phantom ; Type: SAM

GMRS 450 Body 8/Area Scan (91x131x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.281 mW/g

GMRS 450 Body 8/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 16.1 V/m; Power Drift = -0.657 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.256 mW/g; SAR(10 g) = 0.177 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.271 mW/g

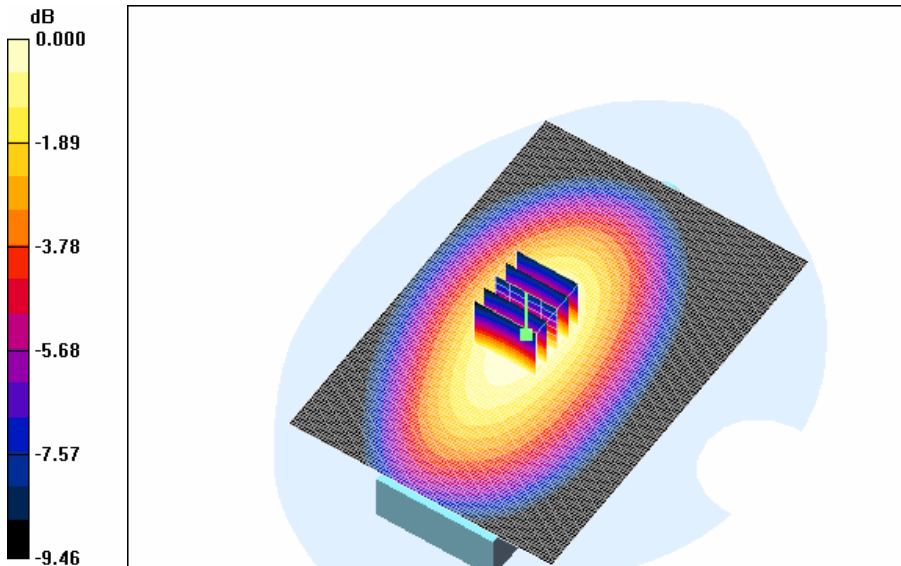

0 dB = 0.271mW/g

Test Laboratory: HCT CO., LTD
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.5 °C
Test Date: Mar.13, 2008

DUT: GXT775; Type: Body; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.55 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.55 \text{ MHz}$; $\sigma = 0.973 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(7.76, 7.76, 7.76); Calibrated: 2007-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: DAE not calibrated
- Phantom: 835/900 Phantom ; Type: SAM

GMRS 450 Body 15/Area Scan (91x131x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.15 mW/g

GMRS 450 Body 15/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 33.6 V/m; Power Drift = -0.791 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.695 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.06 mW/g

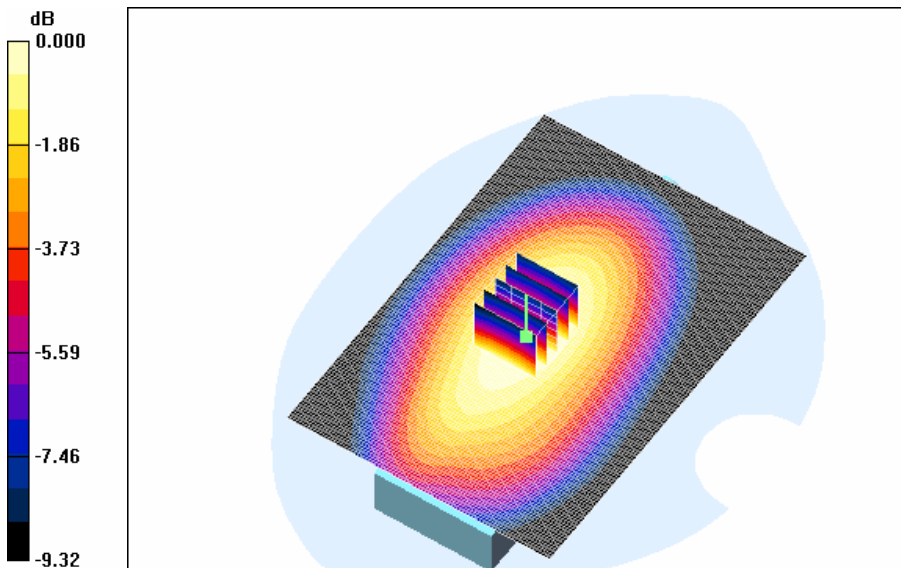

0 dB = 1.06mW/g

Test Laboratory: HCT CO., LTD
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.5 °C
Test Date: Mar.13, 2008

DUT: GXT775; Type: Body; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.55 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.55 \text{ MHz}$; $\sigma = 0.973 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(7.76, 7.76, 7.76); Calibrated: 2007-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: 835/900 Phantom ; Type: SAM

GMRS 450 Body 15/Area Scan (91x131x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.30 mW/g

GMRS 450 Body 15/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 35.6 V/m; Power Drift = -0.829 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.778 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.19 mW/g

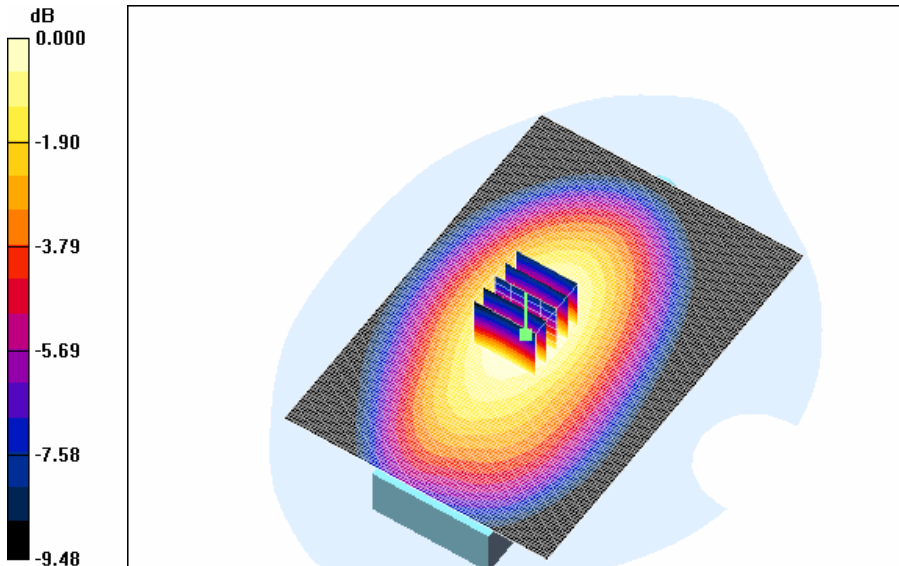

0 dB = 1.19mW/g

Test Laboratory: HCT CO., LTD
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.5 °C
Test Date: Mar.13, 2008

DUT: GXT775; Type: Body; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.55 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.55 \text{ MHz}$; $\sigma = 0.973 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 176

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(7.76, 7.76, 7.76); Calibrated: 2007-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-09-13
- Phantom: 835/900 Phantom ; Type: SAM

GMRS 450 Body 15/Area Scan (91x131x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.507 mW/g

GMRS 450 Body 15/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 27.09 V/m; Power Drift = -0.438 dB

Peak SAR (extrapolated) = 0.659 W/kg

SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.343 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.489 mW/g

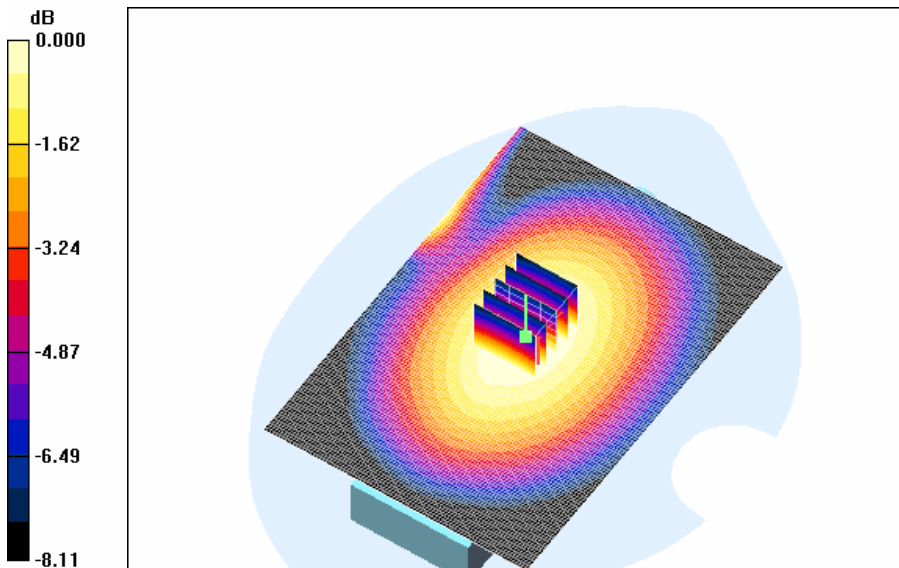

0 dB = 0.489mW/g