

APPENDIX A – SAR TEST PLOTS

Test Laboratory: HCT

Channel : 1

Liquid Temperature : 22.1 °C

Date Tested : July 13, 2006

DUT: LXT314; Type: Bar; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.869$ mho/m; $\epsilon_r = 45.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.82, 6.82, 6.82); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

450 HEAD 1/Area Scan (61x111x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.853 mW/g

450 HEAD 1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 38.2 V/m; Power Drift = -2.02 dB

Peak SAR (extrapolated) = 0.721 W/kg

SAR(1 g) = 0.573 mW/g; SAR(10 g) = 0.438 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.602 mW/g

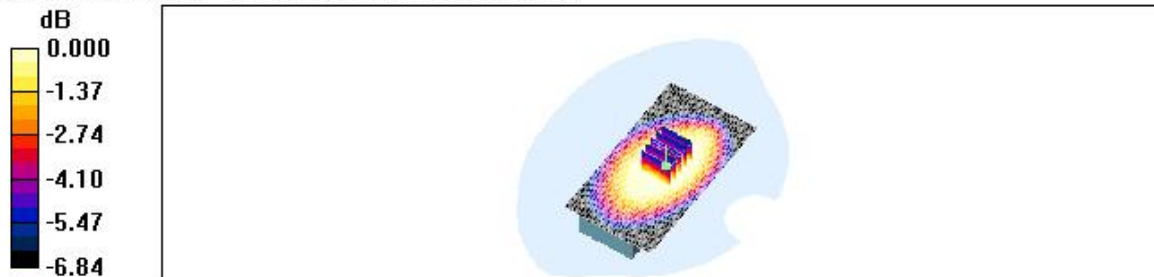

0 dB = 0.602mW/g

Test Laboratory: HCT

Channel : 15
Liquid Temperature : 22.1 °C
Date Tested : July 13, 2006

DUT: LXT314; Type: Bar; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.55 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.55$ MHz; $\sigma = 0.869$ mho/m; $\epsilon_r = 45.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:


- Probe: ET3DV6 - SN1609; ConvF(6.82, 6.82, 6.82); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

450 HEAD 15/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.480 mW/g

450 HEAD 15/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.5 V/m; Power Drift = -1.39 dB
Peak SAR (extrapolated) = 0.686 W/kg
SAR(1 g) = 0.535 mW/g; SAR(10 g) = 0.403 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.562 mW/g

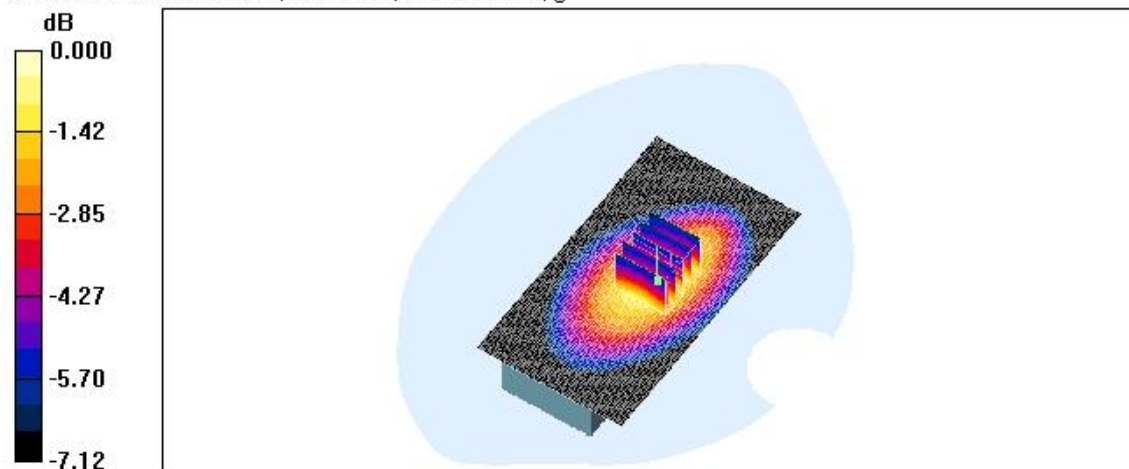

0 dB = 0.562mW/g

Test Laboratory: HCT

Channel : 22
Liquid Temperature : 22.1 °C
Date Tested : July 13, 2006

DUT: LXT314; Type: Bar; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.725 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.725$ MHz; $\sigma = 0.869$ mho/m; $\epsilon_r = 45.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.82, 6.82, 6.82); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

450 HEAD 22/Area Scan (61x111x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.598 mW/g

450 HEAD 22/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 33.3 V/m; Power Drift = -1.17 dB

Peak SAR (extrapolated) = 0.612 W/kg

SAR(1 g) = 0.484 mW/g; SAR(10 g) = 0.367 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.510 mW/g

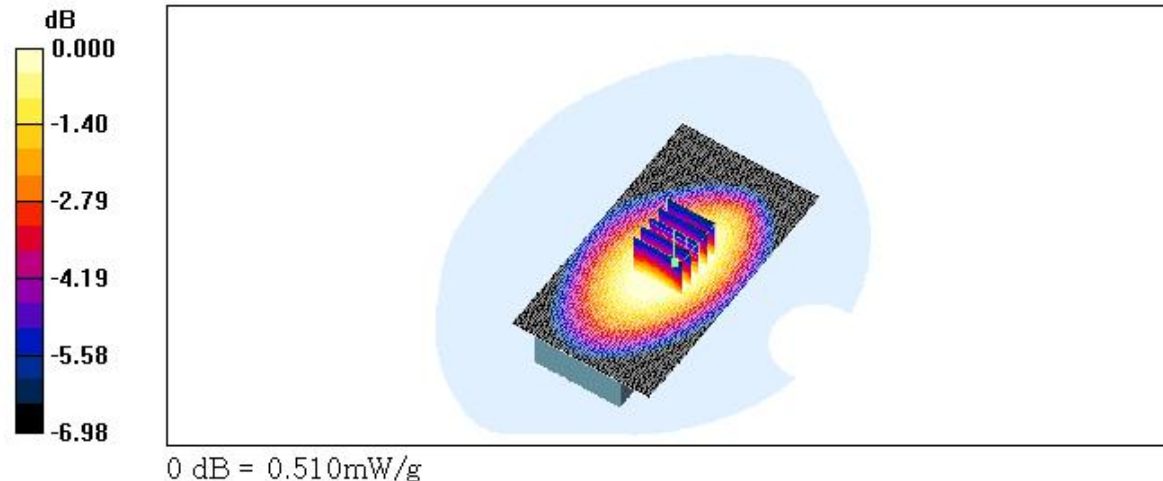

Test Laboratory: HCT

Channel : 8(FRS)
Liquid Temperature : 22.1 °C
Date Tested : July 13, 2006

DUT: LXT314; Type: Bar; Serial: #1

Communication System: 450MHz (FCC); Frequency: 467.563 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 467.563$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 45.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:


- Probe: ET3DV6 - SN1609; ConvF(6.82, 6.82, 6.82); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

450 HEAD 8/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.188 mW/g

450 HEAD 8/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.4 V/m; Power Drift = -0.100 dB
Peak SAR (extrapolated) = 0.199 W/kg
SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.133 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.174 mW/g

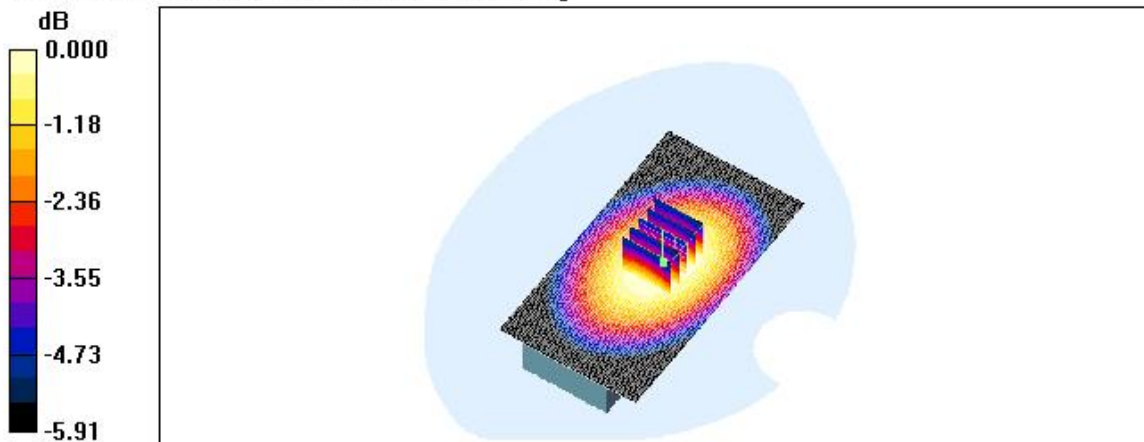

0 dB = 0.174mW/g

Test Laboratory: HCT

Channel : 1

Liquid Temperature : 22.1 °C

Date Tested : July 13, 2006

DUT: LXT314; Type: Bar; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.869$ mho/m; $\epsilon_r = 45.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.82, 6.82, 6.82); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

450 HEAD 1/Area Scan (61x111x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.645 mW/g

450 HEAD 1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 28.1 V/m; Power Drift = -1.69 dB

Peak SAR (extrapolated) = 0.723 W/kg

SAR(1 g) = 0.561 mW/g; SAR(10 g) = 0.421 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.591 mW/g

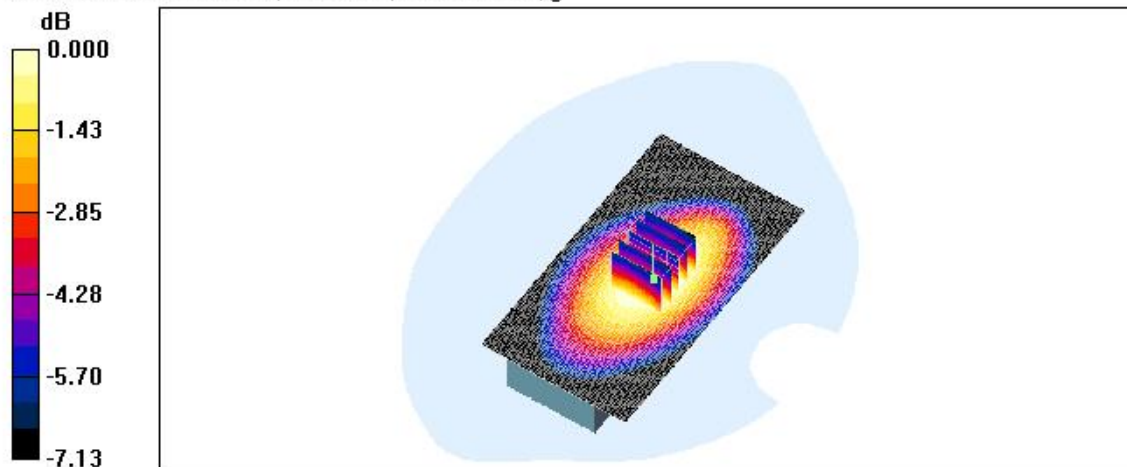

0 dB = 0.591mW/g

Test Laboratory: HCT

Channel : 1
Liquid Temperature : 22.1 °C
Date Tested : July 13, 2006

DUT: LXT314; Type: Bar; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.563 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.869$ mho/m; $\epsilon_r = 45.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:


- Probe: ET3DV6 - SN1609; ConvF(6.82, 6.82, 6.82); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

450 HEAD 1/Area Scan (61x111x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.593 mW/g

450 HEAD 1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm
Reference Value = 27.3 V/m; Power Drift = -1.47 dB
Peak SAR (extrapolated) = 0.615 W/kg
SAR(1 g) = 0.480 mW/g; SAR(10 g) = 0.361 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.505 mW/g

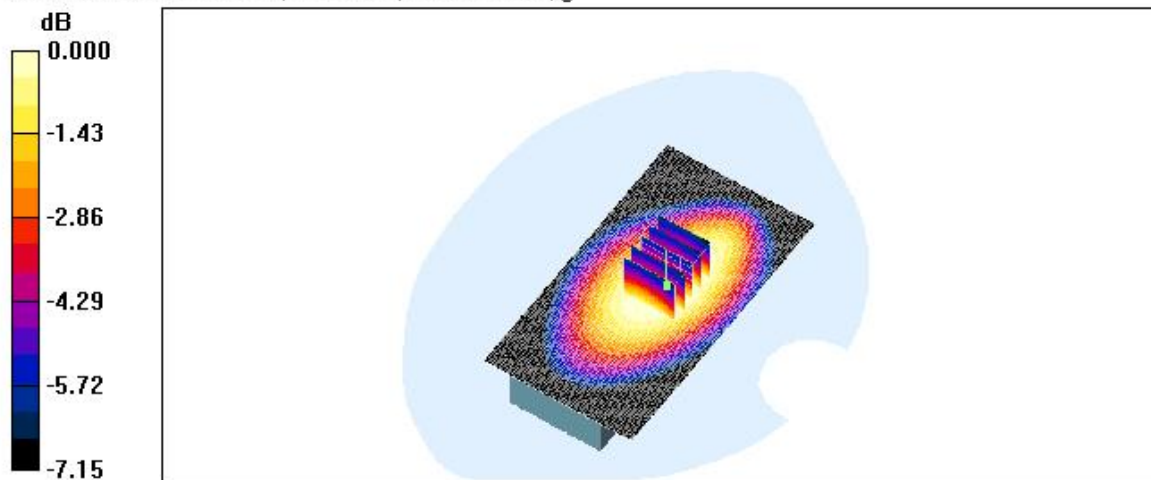

0 dB = 0.505mW/g

Test Laboratory: HCT

Channel : 1

Liquid Temperature : 22.1 °C

Date Tested : July 13, 2006

DUT: LXT314; Type: Bar; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.869$ mho/m; $\epsilon_r = 45.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.82, 6.82, 6.82); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

450 HEAD 1/Area Scan (61x111x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.345 mW/g

450 HEAD 1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 22.6 V/m; Power Drift = -0.129 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.211 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.277 mW/g

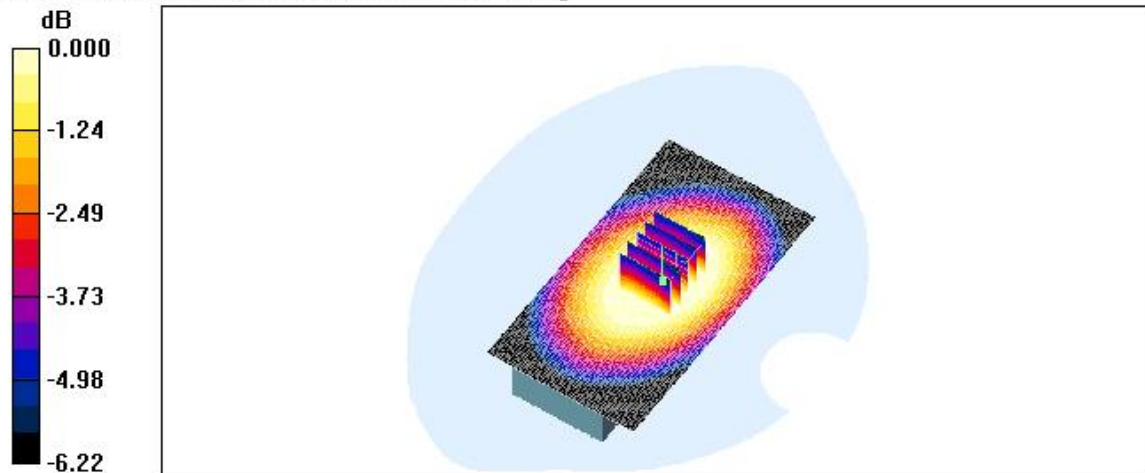

0 dB = 0.277mW/g

Test Laboratory: HCT

Channel : 1

Liquid Temperature : 22.1 °C

Date Tested : July 13, 2006

DUT: LXT314; Type: Bar; Serial: #1

Communication System: 450MHz (FCC); Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.869$ mho/m; $\epsilon_r = 45.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.82, 6.82, 6.82); Calibrated: 2006-03-23

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

450 HEAD 1/Z Scan (1x1x31): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.564 mW/g

