



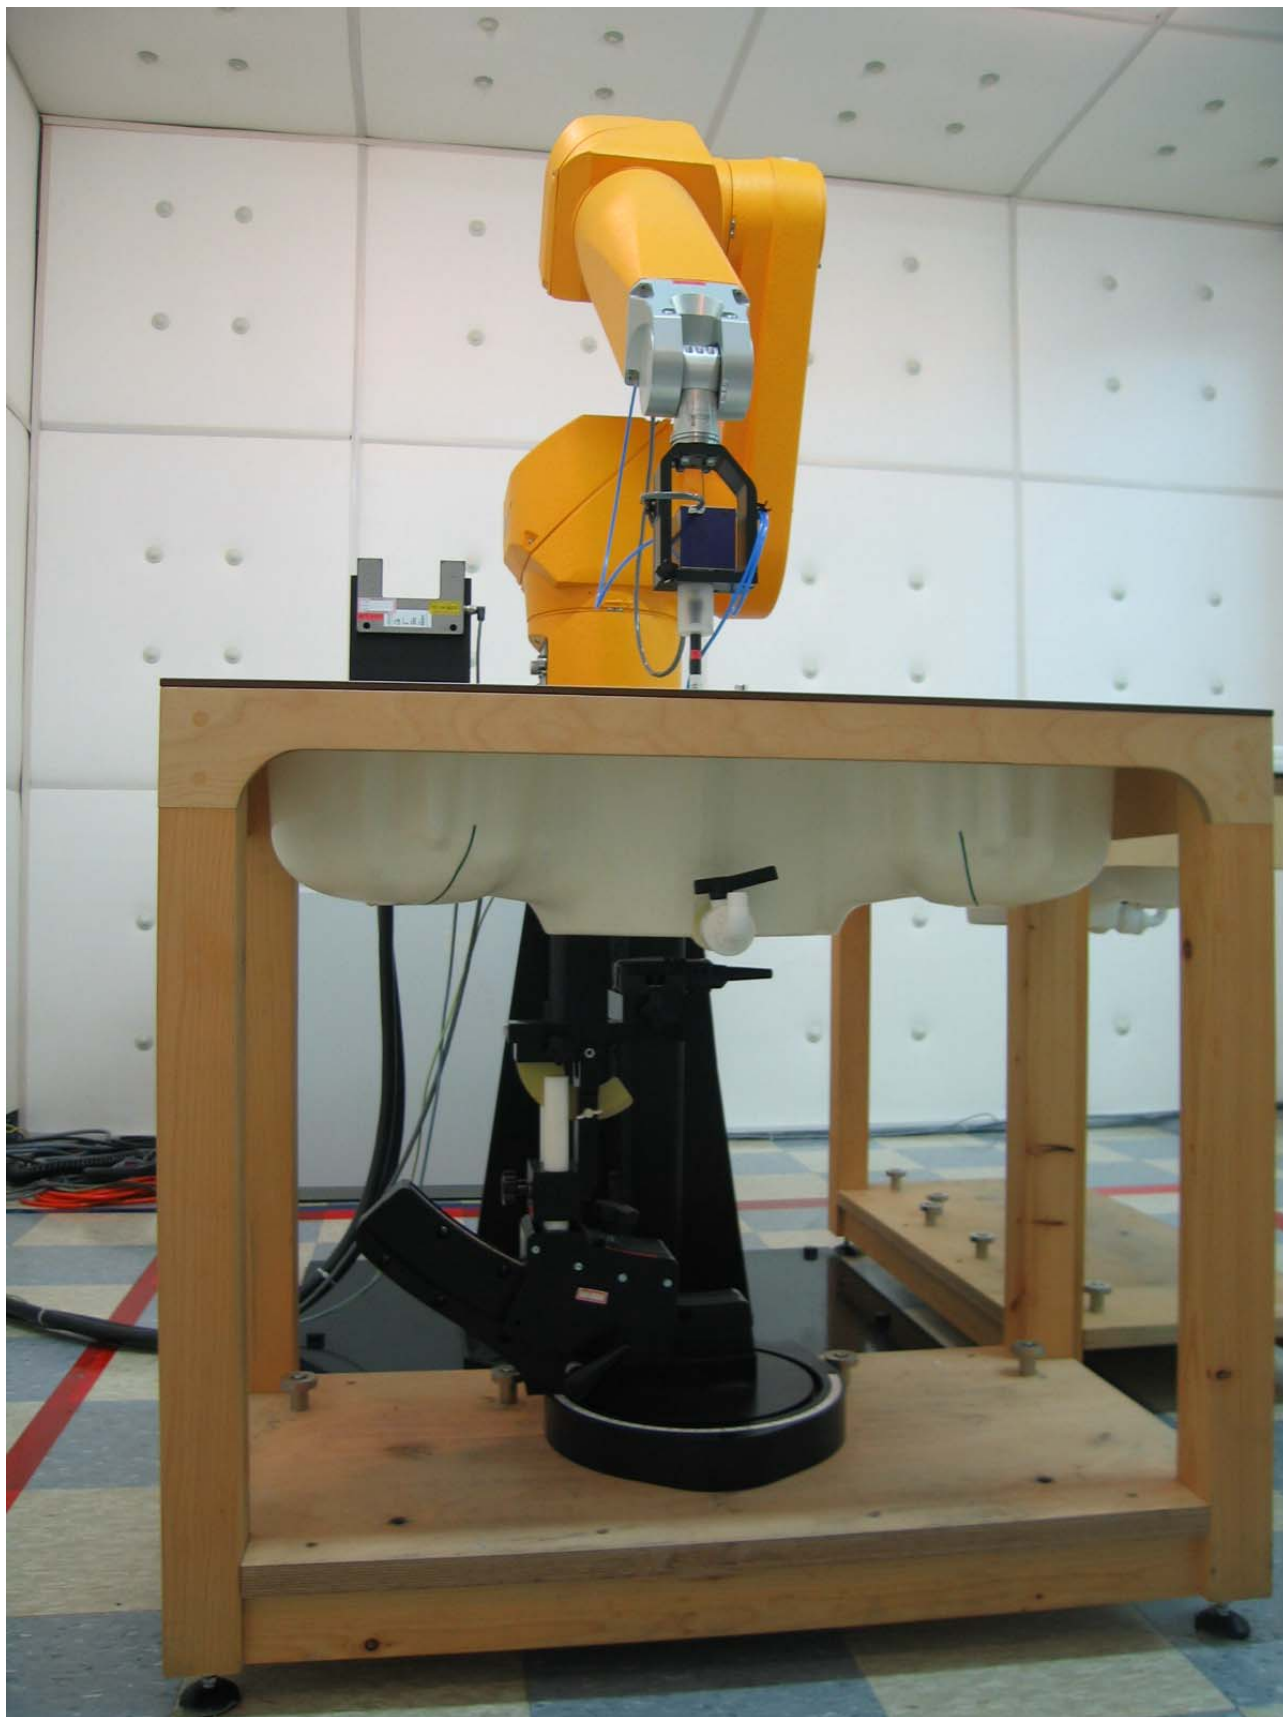


APPENDIX B – EUT TEST SETUP PHOTOGRAPHS

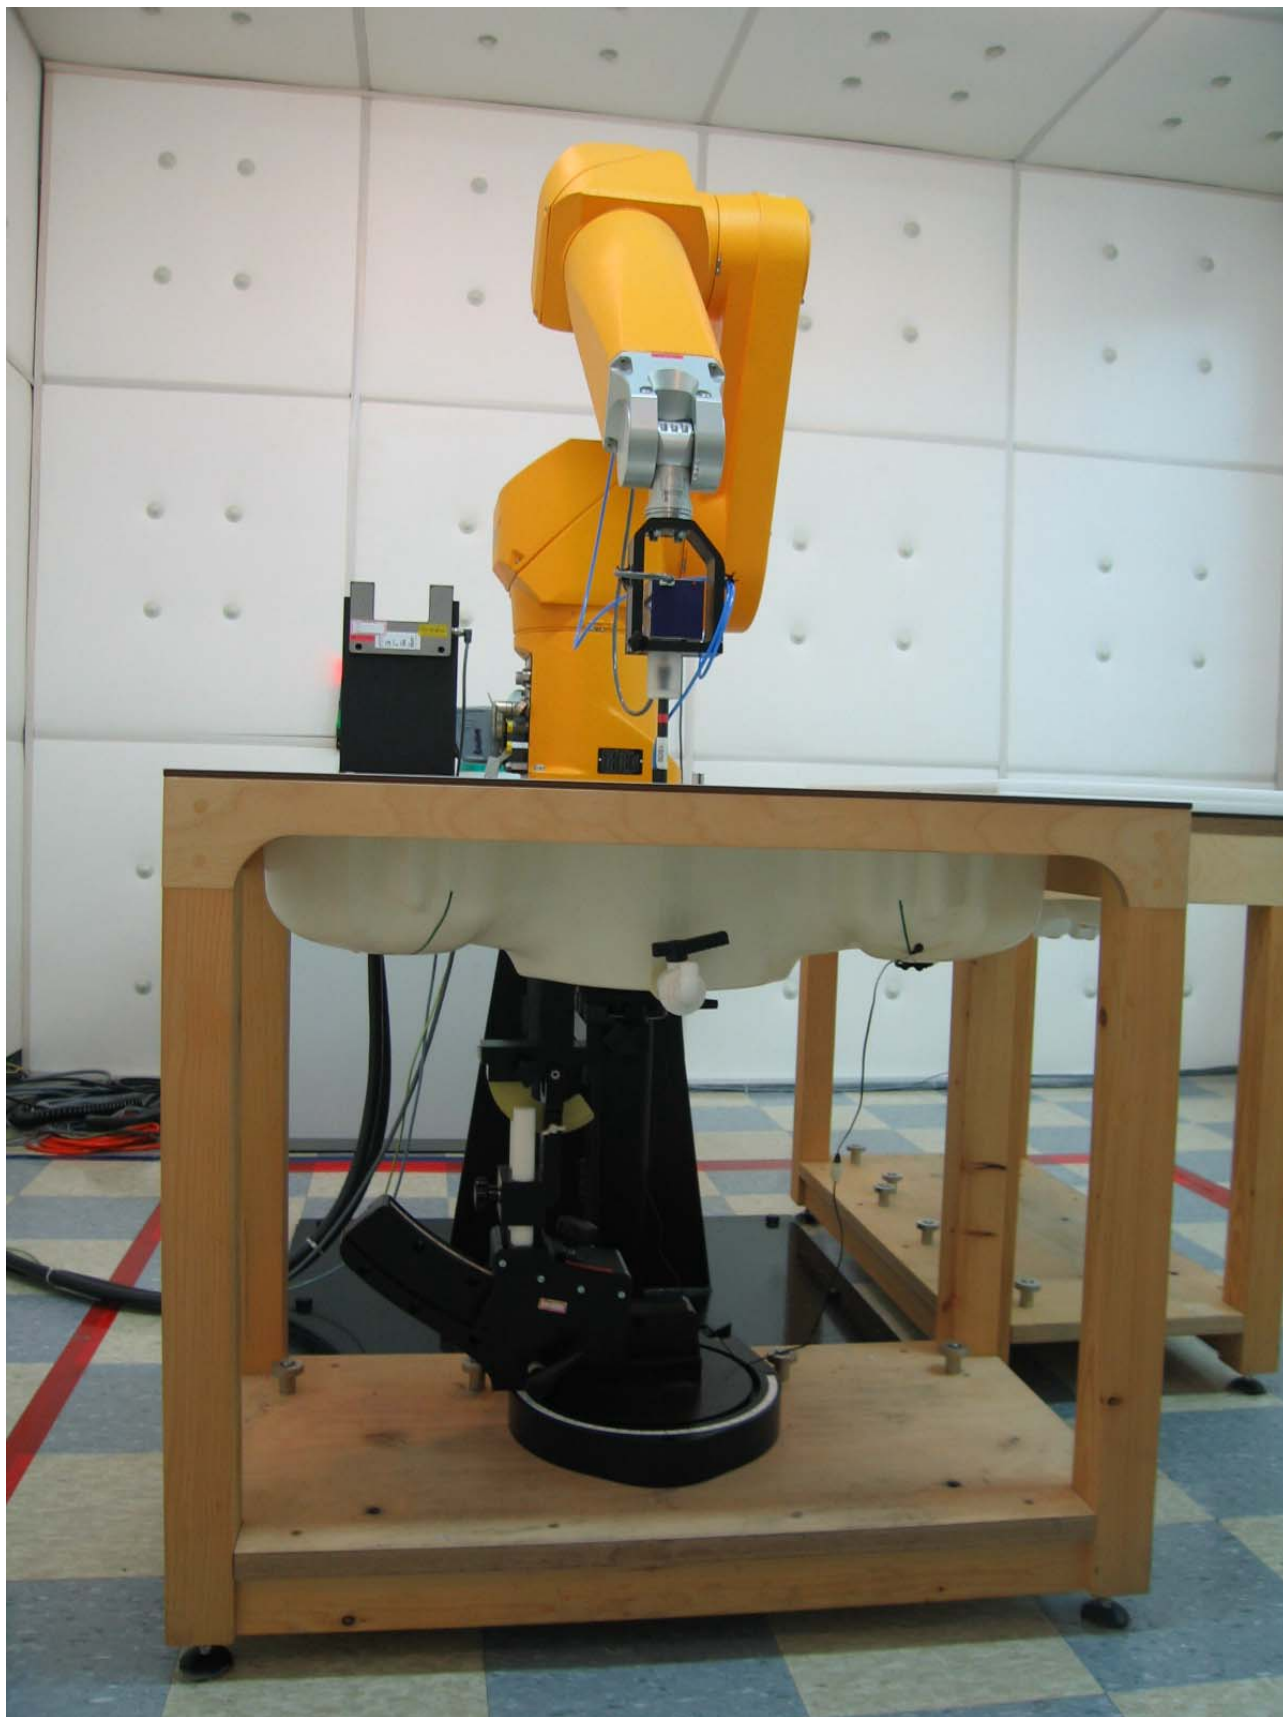


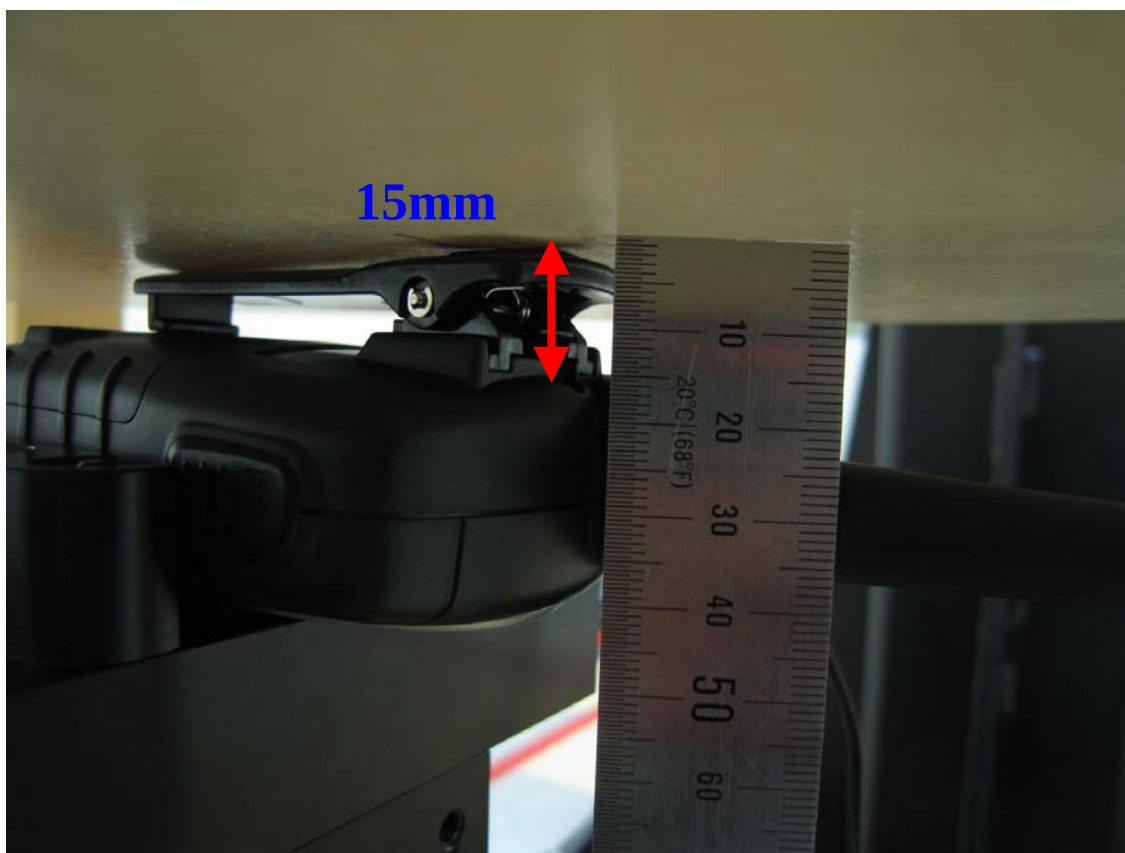

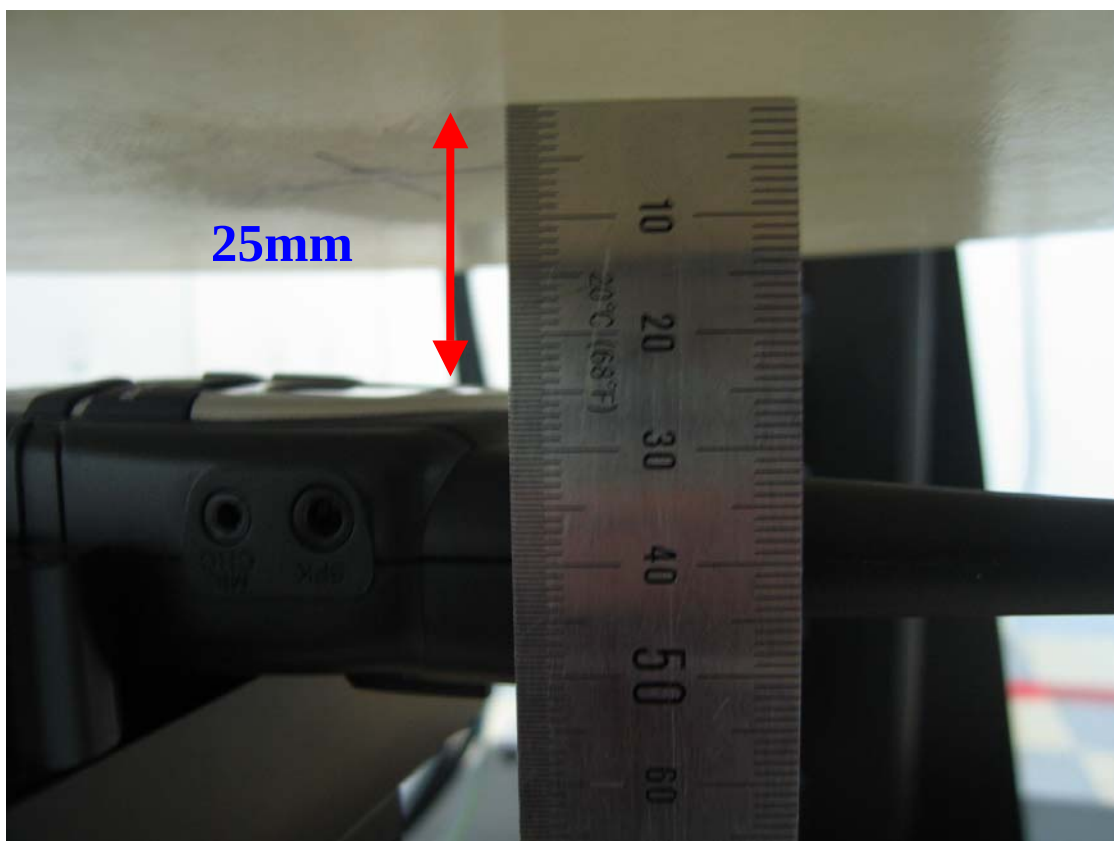

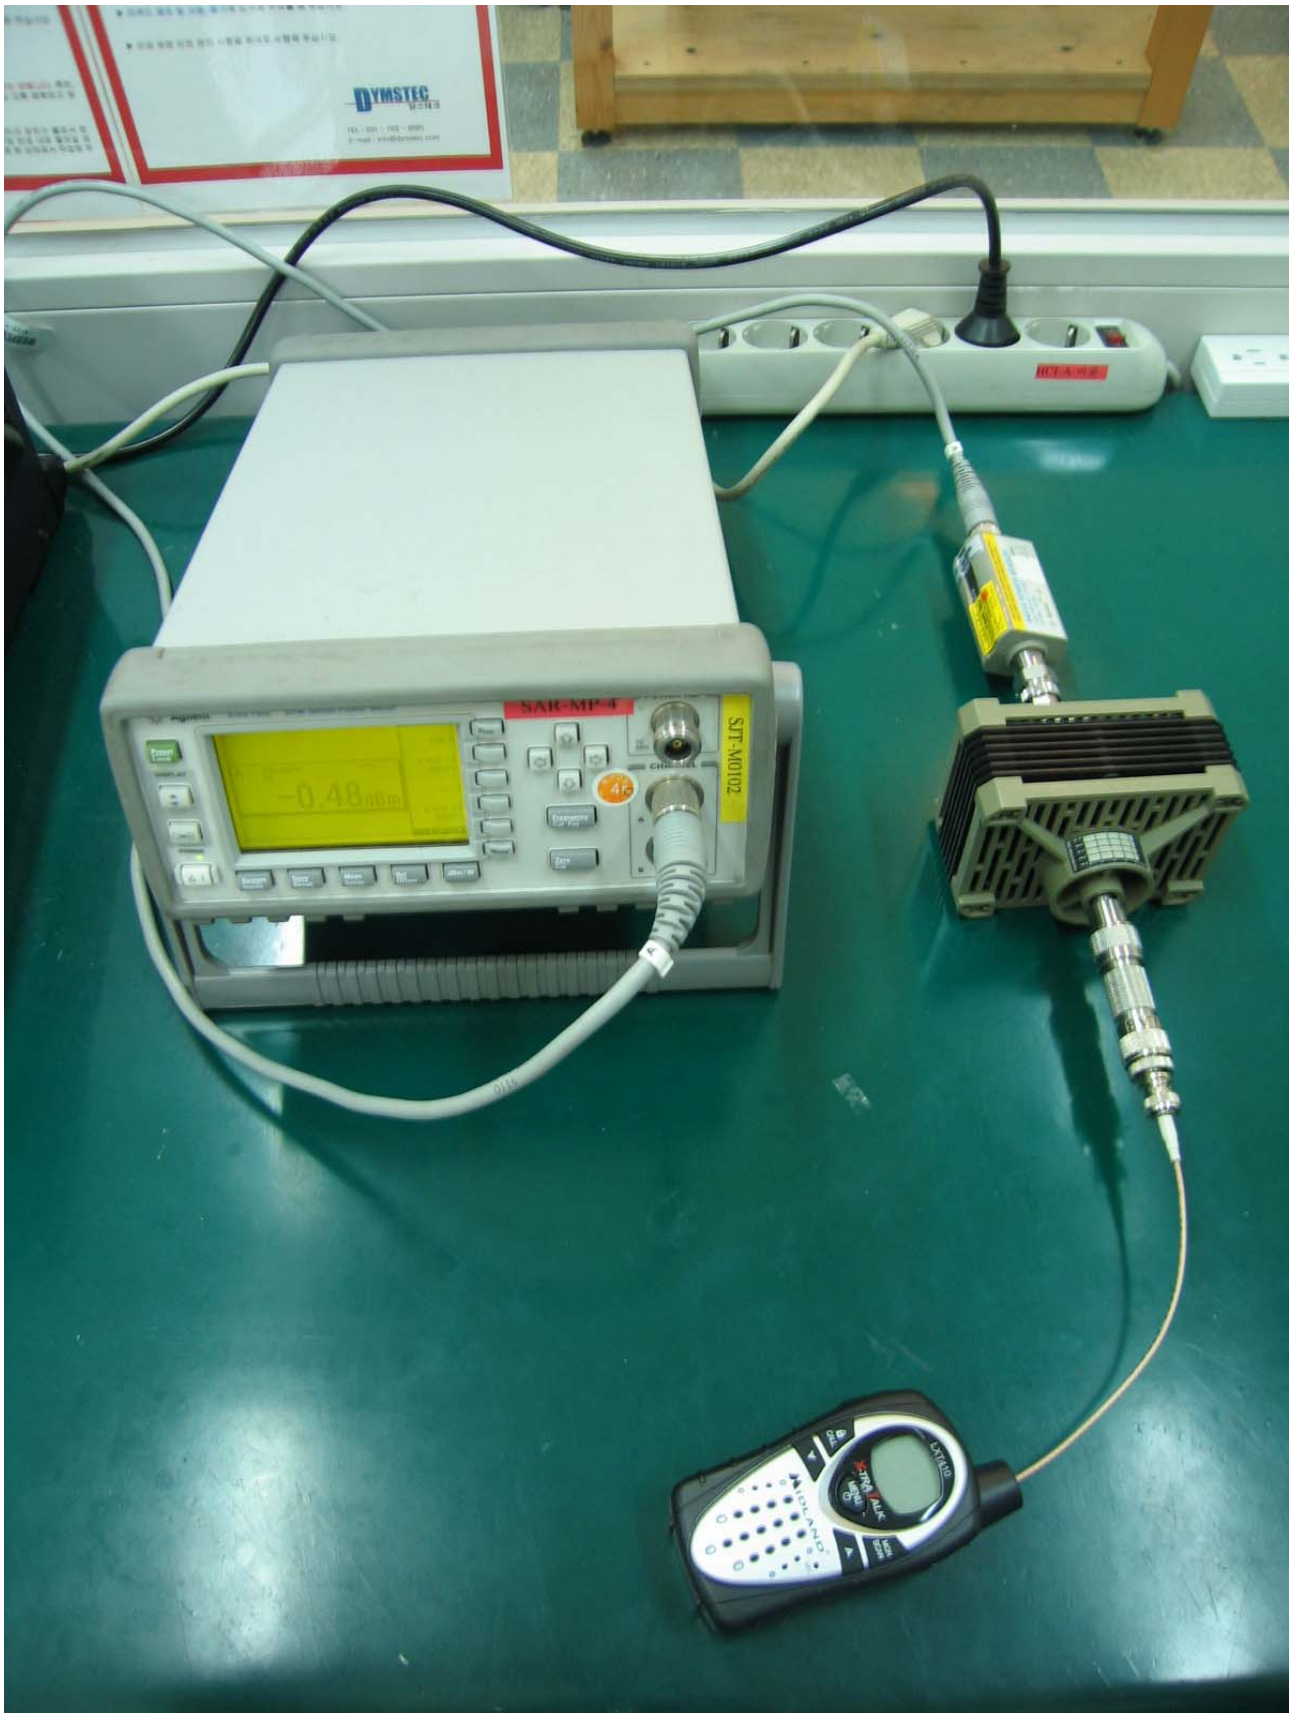


[Tissue Liquid Depth : 15cm]

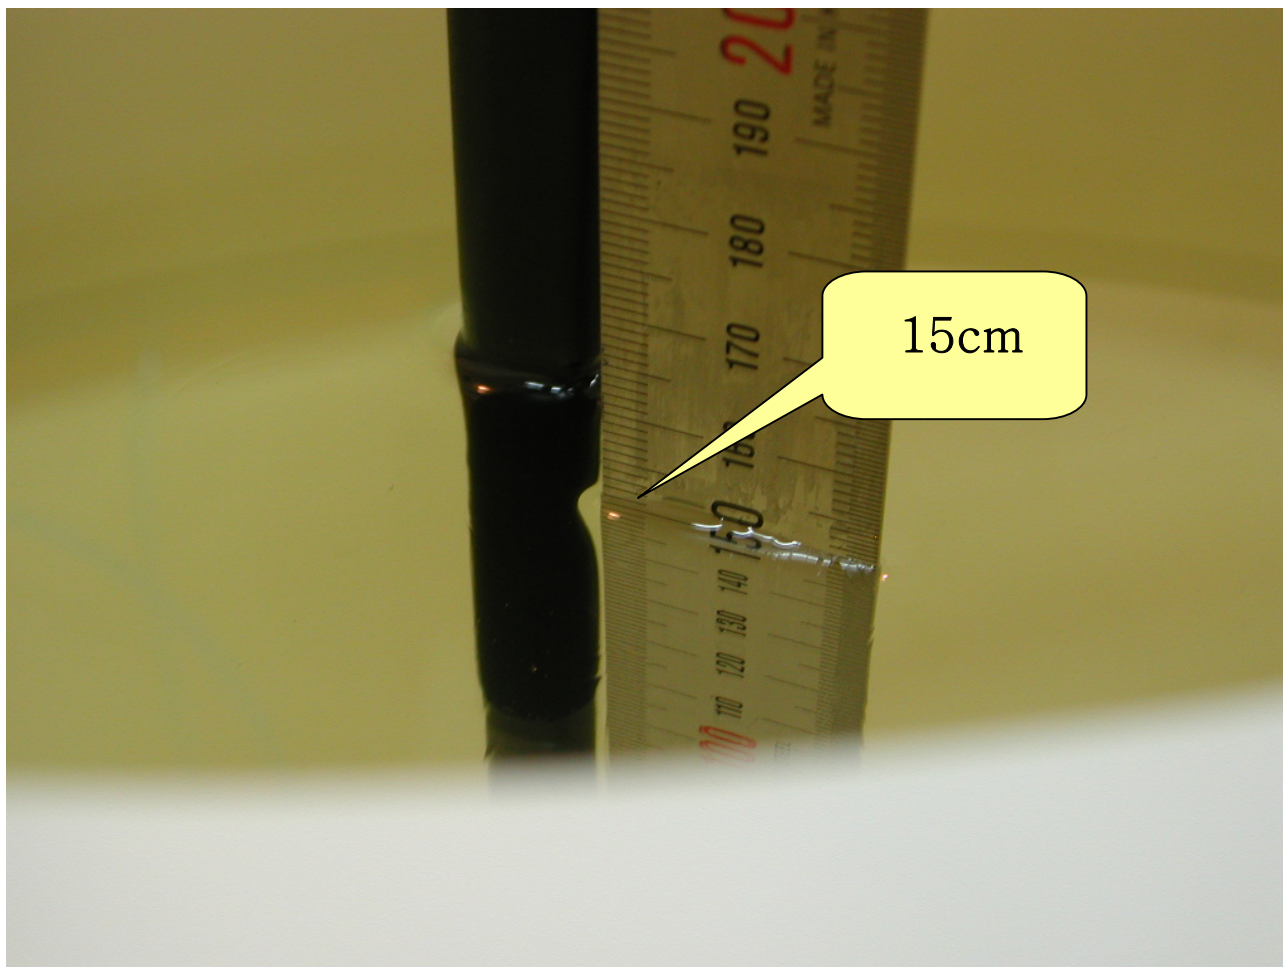


Battery Type: Rocket (Alkaline)

GMRS	
Time	Power Out
0	1.560
2	1.420
4	1.338
6	1.286
8	1.235
10	1.169
12	1.113
14	1.056
16	0.987
18	0.962
20	0.935
22	0.915
24	0.900
26	0.897
28	0.886
30	0.871
32	0.864
34	0.856
36	0.846
38	0.839
40	0.835

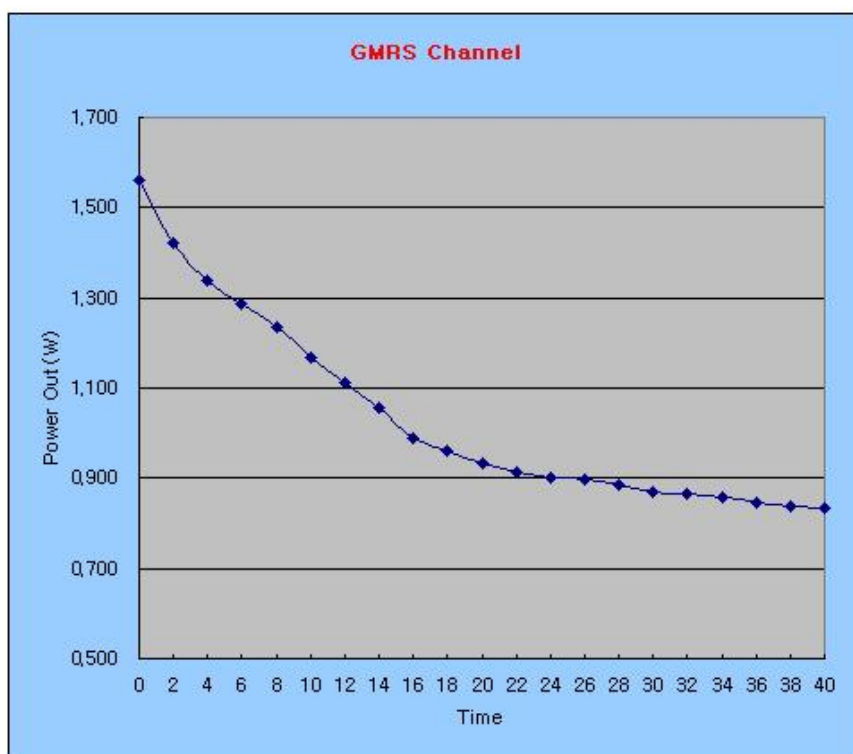

FRS	
Time	Power Out
0	0.702
2	0.628
4	0.568
6	0.501
8	0.466
10	0.431
12	0.416
14	0.406
16	0.397
18	0.385
20	0.376
22	0.364
24	0.354
26	0.347
28	0.337
30	0.332
32	0.328
34	0.319
36	0.317
38	0.311
40	0.309

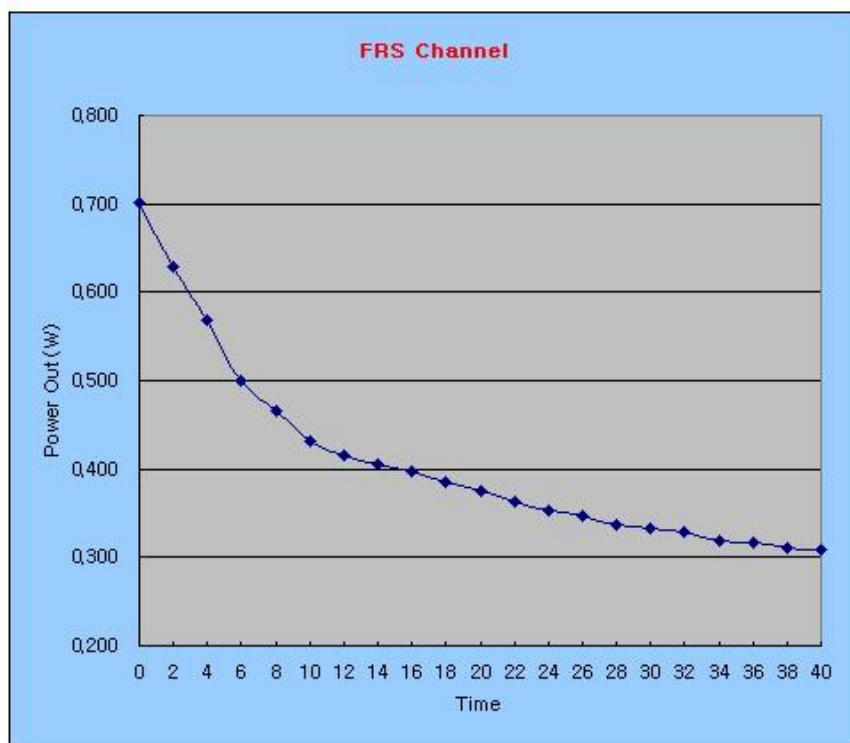

Date: February 26, 2005

Federal Communications Commission
Authorization and Evaluation Division
7435 Oakland Mills Road
Columbia, MD21046

Subject: LXT410 Model Battery Type


To whom it may concern

Here we would like to confirm that the 'AA' type batteries only should be used
For this subject model LXT410. (FCC ID: MMALXT410)

Sincerely Yours,
Global Link Corporation Limited.

Signed by

President

 *Feb '24 '2005*