

Test Laboratory: KES Co., Ltd.

Sytem verification_450_HSL

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1084

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450$ MHz; $\sigma = 0.833$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: EX3DV4 - SN3879; ConvF(10.09, 10.09, 10.09); Calibrated: 2013-11-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1344; Calibrated: 2013-11-21
- Phantom: ELI v5.0_2013_01_23; Type: QDOVA002AA; Serial: TP:1190
- Measurement SW: DASYS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section_HSL_450/Area Scan (31x201x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.12 mW/g


Flat-Section_HSL_450/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 37.8 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.781 mW/g

Maximum value of SAR (measured) = 1.19 mW/g

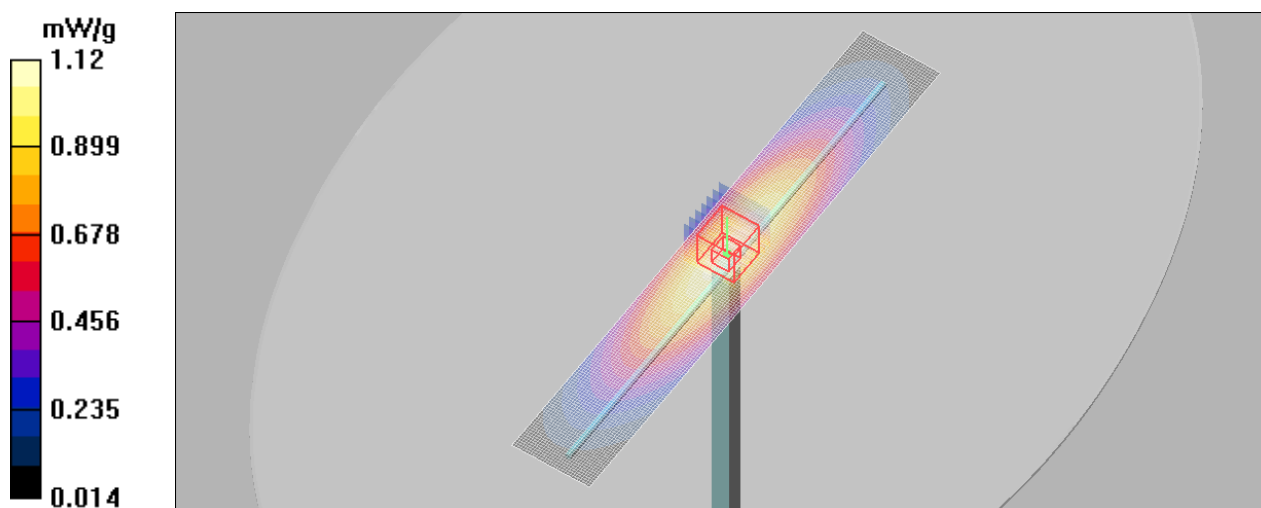

Test Laboratory: KES Co., Ltd.

Sytem verification_450_MSL

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1084

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 56.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: EX3DV4 - SN3879; ConvF(10.8, 10.8, 10.8); Calibrated: 2013-11-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1344; Calibrated: 2013-11-21
- Phantom: ELI v5.0_2013_01_23; Type: QDOVA002AA; Serial: TP:1190
- Measurement SW: DASYS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat-Section_MSL_450/Area Scan (31x201x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.972 mW/g


Flat-Section_MSL_450/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.3 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.715 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

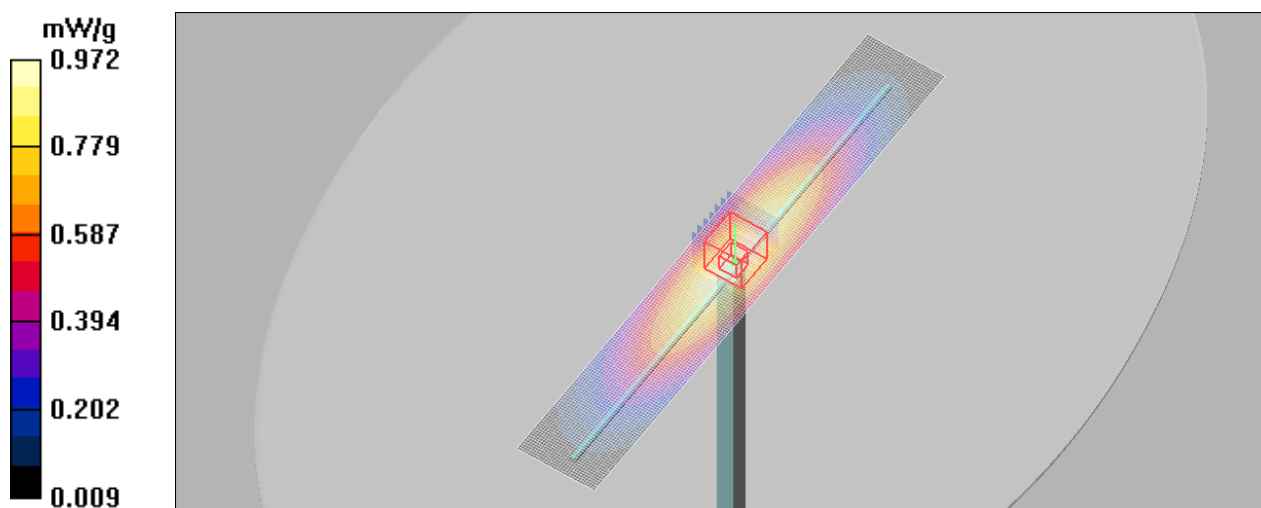

Test Laboratory: KES Co., Ltd.

Face_GMRS_Analog_25mm_Gap_462.6375

DUT: LXT600P; Type: Bar; Serial: N/A

Communication System: CW; Frequency: 462.637 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 462.637$ MHz; $\sigma = 0.851$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: EX3DV4 - SN3879; ConvF(10.09, 10.09, 10.09); Calibrated: 2013-11-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1344; Calibrated: 2013-11-21
- Phantom: ELI v5.0_2013_01_23; Type: QDOVA002AA; Serial: TP:1190
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Face_GMRS_Analog_25mm_Gap_462.6375/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.687 mW/g

Face_GMRS_Analog_25mm_Gap_462.6375/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 30.0 V/m; Power Drift = -0.117 dB

Peak SAR (extrapolated) = 0.758 W/kg

SAR(1 g) = 0.630 mW/g; SAR(10 g) = 0.482 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.670 mW/g

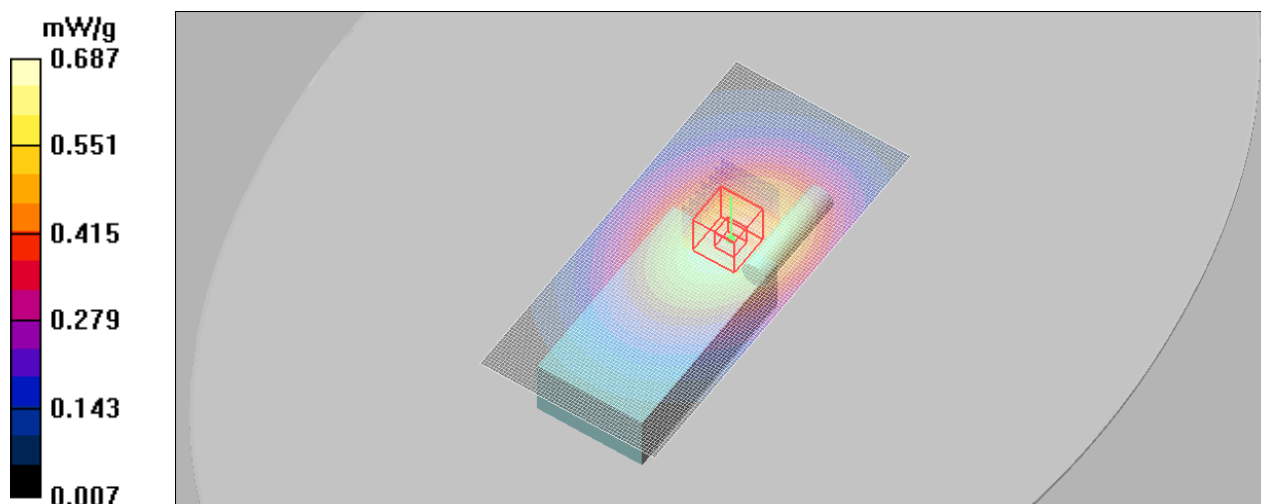

Test Laboratory: KES Co., Ltd.

Face_FRS_Analog_25mm Gap_467.6375

DUT: LXT600P; Type: Bar; Serial: N/A

Communication System: CW; Frequency: 467.637 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 467.637$ MHz; $\sigma = 0.854$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: EX3DV4 - SN3879; ConvF(10.09, 10.09, 10.09); Calibrated: 2013-11-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1344; Calibrated: 2013-11-21
- Phantom: ELI v5.0_2013_01_23; Type: QDOVA002AA; Serial: TP:1190
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Face_FRS_Analog_25mm Gap_467.6375/Area Scan (61x131x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.544 mW/g

Face_FRS_Analog_25mm Gap_467.6375/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 25.8 V/m; Power Drift = -0.149 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.519 mW/g; SAR(10 g) = 0.392 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.545 mW/g

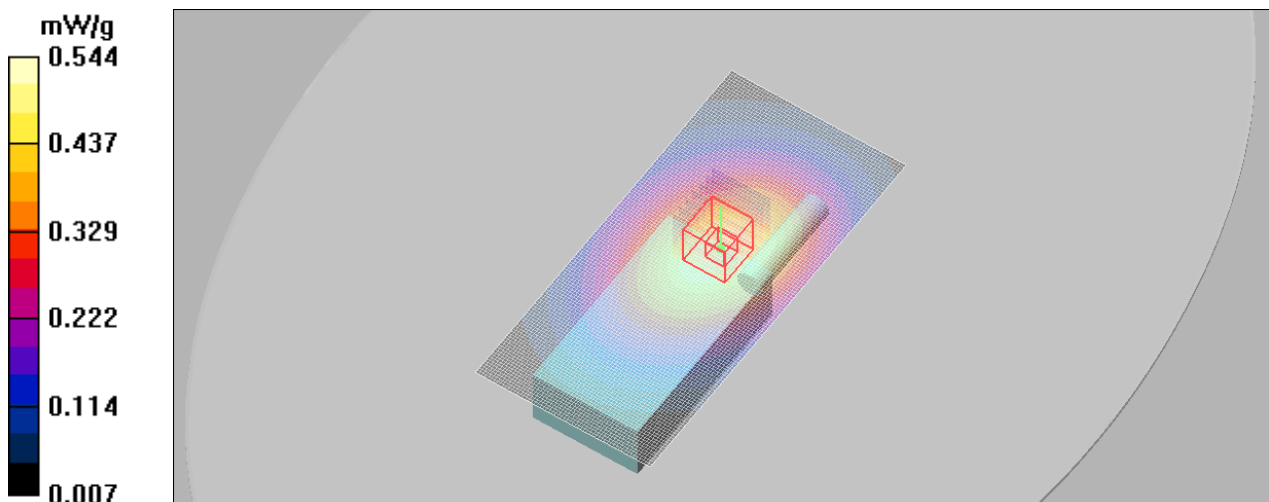

Test Laboratory: KES Co., Ltd.

Body_GMRS_Analog_Touch_462.6375

DUT: LXT600P; Type: Bar; Serial: N/A

Communication System: CW; Frequency: 462.637 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 462.637$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 56.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: EX3DV4 - SN3879; ConvF(10.8, 10.8, 10.8); Calibrated: 2013-11-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1344; Calibrated: 2013-11-21
- Phantom: ELI v5.0_2013_01_23; Type: QDOVA002AA; Serial: TP:1190
- Measurement SW: DASYS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body_GMRS_Analog_Touch_462.6375/Area Scan (61x131x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.27 mW/g

Body_GMRS_Analog_Touch_462.6375/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 38.4 V/m; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.863 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.23 mW/g

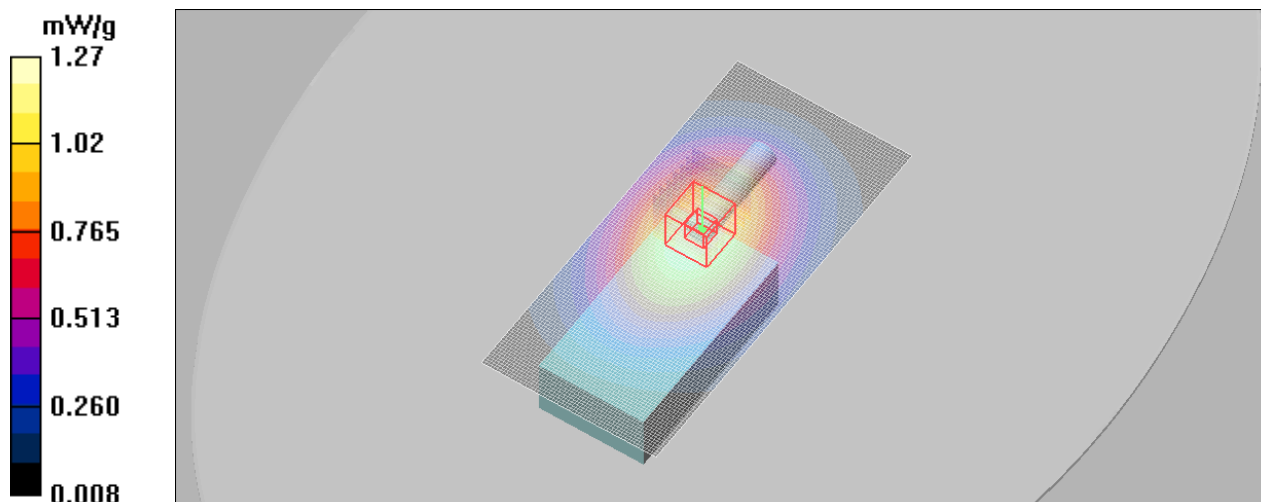

Test Laboratory: KES Co., Ltd.

Body_FRS_Analog_Touch_467.6375

DUT: LXT600P; Type: Bar; Serial: N/A

Communication System: CW; Frequency: 467.637 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 467.637$ MHz; $\sigma = 0.913$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: EX3DV4 - SN3879; ConvF(10.8, 10.8, 10.8); Calibrated: 2013-11-29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1344; Calibrated: 2013-11-21
- Phantom: ELI v5.0_2013_01_23; Type: QDOVA002AA; Serial: TP:1190
- Measurement SW: DASYS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body_FRS_Analog_Touch_467.6375/Area Scan (61x131x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.959 mW/g

Body_FRS_Analog_Touch_467.6375/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 33.5 V/m; Power Drift = -0.187 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.871 mW/g; SAR(10 g) = 0.647 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.918 mW/g

