



IC RSS-119, ISSUE 10, APRIL 2010  
**TEST AND MEASUREMENT REPORT**  
For  
**Midland Radio Corporation**

5900 Parretta Drive, Kansas City, MO 64120, USA

**FCC ID: MMASD250V2**  
**IC: 3690A-SD250V2**  
**Model: SD250V2**

<b>Report Type:</b> Original Report	<b>Product type:</b> VHF Data Radio
<b>Test Engineer:</b> <u>Jerry Huang</u> 	
<b>Report Number:</b> <u>R1010181-90</u>	
<b>Report Date:</b> <u>2010-11-01</u>	
<b>Reviewed By:</b> <u>RF Lead</u>  Victor Zhang	
<b>Prepared By:</b> <u>(84)</u> Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94085, U.S.A. Tel: (408) 732-9162 Fax: (408) 732 9164 www.baclcorp.com	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, NIST, or any agency of the Federal Government.

\* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "\*" (Rev.2)

## TABLE OF CONTENTS

<b>1.</b>	<b>General Information.....</b>	<b>5</b>
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2	MECHANICAL DESCRIPTION.....	5
1.3	OBJECTIVE .....	6
1.4	RELATED SUBMITTAL(S)/GRANT(S).....	6
1.5	TEST METHODOLOGY .....	6
1.6	MEASUREMENT UNCERTAINTY.....	6
1.7	TEST FACILITY .....	6
<b>2</b>	<b>System Test Configuration.....</b>	<b>7</b>
2.1	JUSTIFICATION .....	7
2.2	EUT EXERCISE SOFTWARE .....	7
2.3	EQUIPMENT MODIFICATIONS .....	7
2.4	LOCAL SUPPORT EQUIPMENT.....	7
2.5	INTERNAL CONFIGURATION .....	7
2.6	LOCAL SUPPORT EQUIPMENT POWER SUPPLY AND LINE FILTERS .....	7
2.7	INTERFACE PORTS AND CABLING.....	7
2.8	TEST SETUP BLOCK DIAGRAM.....	8
<b>3</b>	<b>Summary of Test Results.....</b>	<b>9</b>
<b>4</b>	<b>FCC §2.1091 &amp; IC RSS-102 - RF Exposure .....</b>	<b>10</b>
4.1	APPLICABLE STANDARDS .....	10
<b>5</b>	<b>FCC §2.1046, §90.205 &amp; IC RSS-119 §5.4 – Conducted Output Power .....</b>	<b>13</b>
5.1	APPLICABLE STANDARD .....	13
5.2	TEST PROCEDURE .....	13
5.3	TEST SETUP BLOCK DIAGRAM.....	13
5.4	TEST ENVIRONMENTAL CONDITIONS.....	13
5.5	TEST EQUIPMENT LIST AND DETAILS.....	13
5.6	TEST RESULT .....	14
<b>6</b>	<b>FCC §2.1047, §90.207 &amp; IC RSS-119 §5.2 – Modulation Characteristic .....</b>	<b>15</b>
6.1	APPLICABLE STANDARD .....	15
6.2	TEST PROCEDURE .....	15
6.3	TEST ENVIRONMENTAL CONDITIONS.....	15
6.4	TEST EQUIPMENT LIST AND DETAILS.....	15
6.5	TEST RESULT .....	15
<b>7</b>	<b>FCC §2.1049, §90.210 &amp; IC RSS-119 §5.5– Occupied Bandwidth &amp; Emission Mask .....</b>	<b>20</b>
7.1	APPLICABLE STANDARD .....	20
7.2	TEST PROCEDURE .....	21
7.3	TEST ENVIRONMENTAL CONDITIONS.....	21
7.4	TEST EQUIPMENT LIST AND DETAILS.....	21
7.5	TEST RESULT .....	22
<b>8</b>	<b>FCC §2.1051, §90.210 &amp; IC RSS-119 §5.8 - Spurious Emissions at Antenna Terminals .....</b>	<b>38</b>
8.1	APPLICABLE STANDARD .....	38
8.2	TEST PROCEDURE .....	38
8.3	TEST ENVIRONMENTAL CONDITIONS.....	38
8.4	TEST EQUIPMENT LIST AND DETAILS.....	38
8.5	TEST SETUP BLOCK DIAGRAM.....	39
8.6	TEST RESULTS .....	39
<b>9</b>	<b>FCC §2.1055 (d), §90.213 &amp; IC RSS-119 §5.3- Frequency Stability.....</b>	<b>42</b>

9.1	APPLICABLE STANDARD .....	42
9.2	TEST PROCEDURE .....	42
9.3	TEST ENVIRONMENTAL CONDITIONS .....	42
9.4	TEST EQUIPMENT LIST AND DETAILS .....	42
9.5	TEST RESULT .....	43
<b>10</b>	<b>FCC §2.1053, §90.210 &amp; IC RSS-119 §5.8 – Field Strength of Spurious Radiation.....</b>	<b>44</b>
10.1	APPLICABLE STANDARD .....	44
10.2	TEST PROCEDURE .....	44
10.3	TEST ENVIRONMENTAL CONDITIONS .....	44
10.4	TEST EQUIPMENT LIST AND DETAILS .....	45
10.5	TEST SETUP BLOCK DIAGRAM .....	45
10.6	TEST RESULT .....	46
<b>11</b>	<b>FCC §90.214 &amp; IC RSS-119 §5.9 - Transient Frequency Behavior .....</b>	<b>47</b>
11.1	APPLICABLE STANDARD .....	47
11.2	TEST PROCEDURE .....	48
11.3	TEST ENVIRONMENTAL CONDITIONS .....	48
11.4	TEST EQUIPMENT LIST AND DETAILS .....	48
11.5	TEST RESULTS .....	48
11.6	TEST SETUP BLOCK DIAGRAM .....	48
<b>12</b>	<b>IC RSS-119 §5.11 Receiver Spurious Radiated Emissions .....</b>	<b>51</b>
12.1	APPLICABLE STANDARD .....	51
12.2	TEST BLOCK DIAGRAM .....	51
12.3	TEST EQUIPMENT LISTS AND DETAILS .....	52
12.4	TEST ENVIRONMENTAL CONDITIONS .....	52
12.5	TEST PROCEDURE .....	52
12.6	CORRECTED AMPLITUDE & MARGIN CALCULATION .....	52
12.7	SUMMARY OF TEST RESULTS .....	53
12.8	RADIATED SPURIOUS EMISSIONS PLOT & DATA .....	54
<b>13</b>	<b>EXHIBIT A - FCC ID &amp; IC Labeling Requirements .....</b>	<b>56</b>
13.1	FCC ID LABEL REQUIREMENTS .....	56
13.2	IC LABELING REQUIREMENTS .....	56
13.3	FCC AND IC LABEL CONTENT .....	56
13.4	FCC ID AND IC LABEL LOCATION ON EUT .....	57
<b>14</b>	<b>EXHIBIT B - Test Setup Photographs .....</b>	<b>58</b>
14.1	BELOW 1 GHz RADIATED EMISSION – FRONT VIEW .....	58
14.2	BELOW 1 GHz RADIATED EMISSION – REAR VIEW .....	58
14.3	ABOVE 1 GHz RADIATED EMISSION – FRONT VIEW .....	59
14.4	ABOVE 1 GHz RADIATED EMISSION – REAR VIEW .....	59
14.5	BENCH TEST - FRONT VIEW .....	60
14.6	TEMPERATURE CHAMBER TESTING VIEW .....	60
14.7	RECEIVING SPURIOUS EMISSION - FRONT VIEW .....	61
14.8	RECEIVING SPURIOUS EMISSION - REAR VIEW .....	61
<b>15</b>	<b>EXHIBIT C - EUT Photographs .....</b>	<b>62</b>
15.1	EUT - TOP VIEW .....	62
15.2	EUT – FRONT VIEW .....	62
15.3	EUT - BOTTOM VIEW .....	63
15.4	EUT - PORT VIEW .....	63
15.5	EUT - COVER OFF TOP VIEW .....	64
15.6	EUT- DIGITAL PCB BOARD TOP VIEW .....	64
15.7	EUT- DIGITAL PCB BOARD VIEW .....	65
15.8	EUT- DIGITAL PCB BOARD BOTTOM VIEW .....	65
15.9	EUT- RF PCB BOARD (SHIELDED) TOP VIEW .....	66
15.10	EUT- RF PCB BOARD (UNSHIELDED) TOP VIEW .....	66
15.11	EUT- RF PCB BOARD (UNSHIELDED) VIEW .....	67
15.12	EUT- RF PCB BOARD (UNSHIELDED) BOTTOM VIEW .....	67

**DOCUMENT REVISION HISTORY**

<b>Revision Number</b>	<b>Report Number</b>	<b>Description of Revision</b>	<b>Date of Revision</b>
0	R1010181-90	Original Report	2010-11-01

## 1. General Information

### 1.1 Product Description for Equipment under Test (EUT)

The report has been prepared on behalf of *Midland Radio Corporation* and their product *FCC ID: MMASD250V2, IC: 3690A-SD250V2*, model: *SD250V2* or the EUT as referred to in the rest of this report. The EUT is a network free, point to point RF data module that offers great flexibility in varied applications where wireless data or voice communication is needed. It can be used as a transparent radio, with no internal modem fitted, to allow users to facilitate the use of their own modem and protocol. The correct signal levels need to be used with the use of separate control lines.

The EUT can also be fitted with below a few different modems

- Bell 202/V23 modem (1200 baud rate)
- FFSK modem (4800 baud rate)
- GMSK modem (9600 baud rate)

The internal modem allows communication with a PC using RS 232 for the data and control lines. EUT has standard radio features available which are associated with a private radio. This includes CTCSS and DCS, software controlled squelch, time out timer options and busy channel lockout as listed below (not all available with option modem fitted). There is a microphone input and speaker output to allow speech to be transmitted and received.

The EUT is a UHF Radio Transceiver that operates under FCC Part 90 and IC RSS-119.

Specifications	
Frequency Band	146-174 MHz
Modulation Type	F1D, F2D, F3E
RF Output Power	1.0 -6.0 Watts
Channel Spacing	25 kHz/12.5 kHz
Number of Channels	16
Power Supply	12 VDC Nominal (9 – 18 volt supply input)
Frequency Deviation	Peak $\pm 5$ kHz (25 kHz Channel Spacing) Peak $\pm 2.5$ kHz (12.5 kHz Channel Spacing)

### 1.2 Mechanical Description

The EUT measures approximately 117mm (L) x 62 mm (W) x 30 mm (H) and weighs 253 g.

*The test data gathered are from production sample, serial number: R1010181-1 provided by the BACL.*

### 1.3 Objective

This Type approval report is prepared on behalf of *Midland Radio Corporation* in accordance with Part 90 of the Federal Communication Commissions rules and Industry Canada RSS-119 Issue 10, April 2010.

### 1.4 Related Submittal(s)/Grant(s)

None

### 1.5 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the TIA-603-C and ANSI 63.4-2003.

All emissions measurement was performed by Bay Area Compliance Laboratories Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### 1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the values ranging from  $\pm 2.0$  dB for Conducted Emissions tests and  $\pm 4.0$  dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

Detailed instrumentation measurement uncertainties can be found in BACL Corp. report QAP-018.

### 1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test sites at BACL have been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission, Industry Canada, and Voluntary Control Council for Interference has the reports on file and is listed under FCC registration number: 90464, IC registration number: 3062A, and VCCI Registration Number: C-2463 and R-2698. The test site has been approved by the FCC, IC, and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>.

## 2 System Test Configuration

### 2.1 Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The EUT was tested in the normal (native) operating mode to represent *worst-case* results during the final qualification test.

### 2.2 EUT Exercise Software

Software was provided by the Client.

### 2.3 Equipment Modifications

No modifications were made to the EUT.

### 2.4 Local Support Equipment

Manufacturer	Description	Model No.	Serial No.
Dell	Laptop	Inspiron 300m	-
Midland Radio	SD250 TEST JIG	ACC-2160	050201961

### 2.5 Internal Configuration

Manufacturer	Description	Model No.	Serial No.
Midland Radio	RF Board	SD250 VHF RF B'D Ver 1.0	-
Midland Radio	Digital Board	SD250 Digital B'D Ver 1.0.0A	-

### 2.6 Local Support Equipment Power Supply and Line Filters


Manufacturer	Description	Model	Serial Number
BK PRECISION	DC power supply	1612A	D185052265

### 2.7 Interface Ports and Cabling


Cable Description	Length (m)	From	To
Serial cable	> 1.0	ACC-2160 (SD250 Test JIG)	EUT Serial Port
Serial cable	> 1.0	PC Serial Port	EUT Serial Port

## 2.8 Test Setup Block Diagram

### Radiated Test

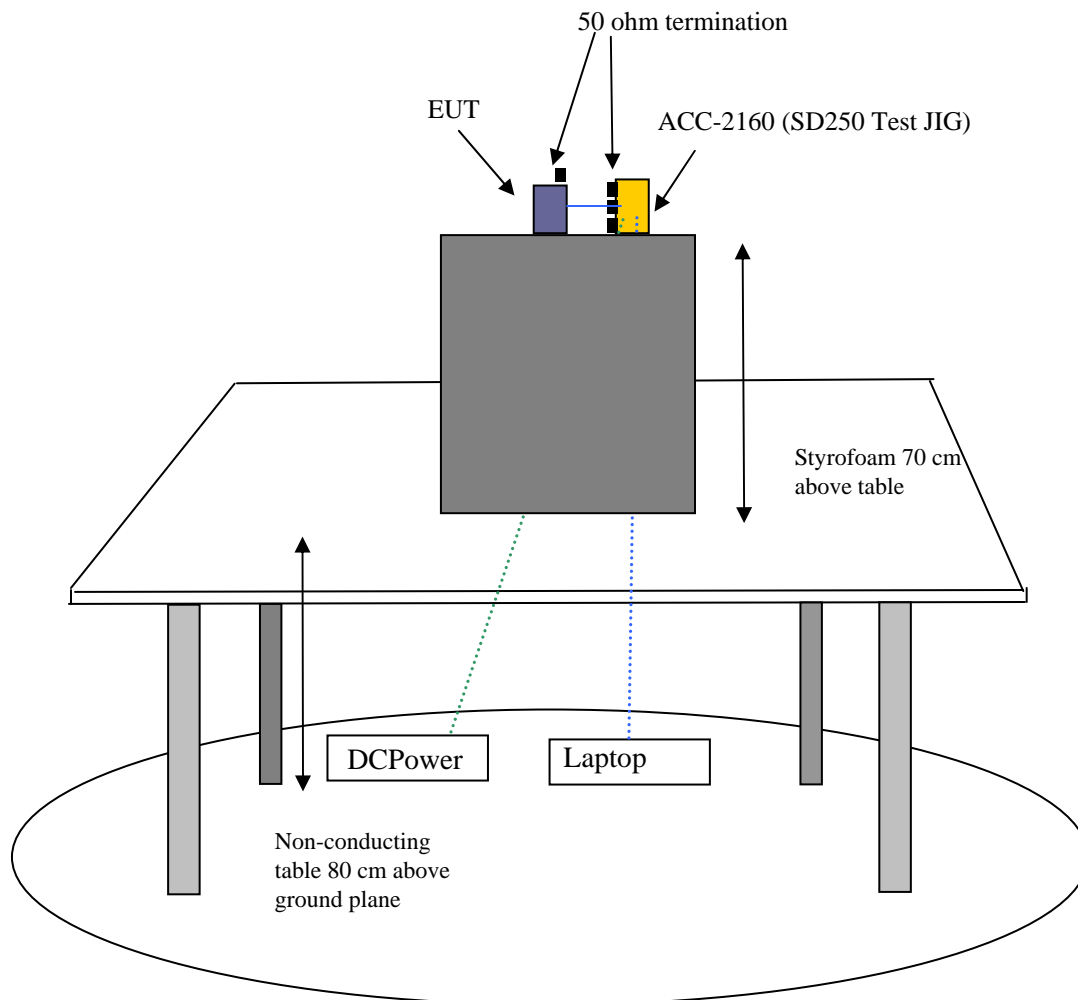

### Conducted Test

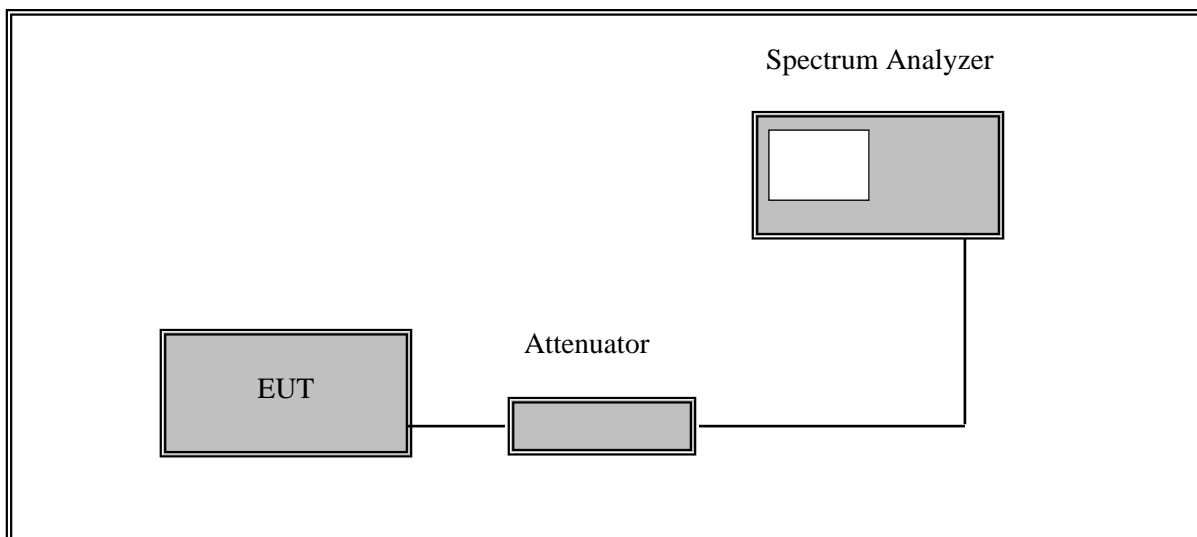



### 3 Summary of Test Results

FCC and IC Rules	Description of Test	Result
FCC§1.1310, §2.1091 IC RSS-102	RF Exposure	Compliant
FCC §2.1046, §90.205 IC RSS-119 §5.4	RF Output Power	Compliant
FCC §2.1047, §90.207 IC RSS-119 §5.2	Modulation Characteristics, Audio Frequency Response and Audio Filter Response	Compliant
FCC §2.1049, §90.210 IC RSS-119 §5.5	Occupied Bandwidth and Emission Mask	Compliant
FCC §2.1051, §90.210 IC RSS-119 §5.8	Spurious Emissions at Antenna Terminals	Compliant
FCC §2.1055, § 90.213 IC RSS-119 §5.3	Frequency Stability	Compliant
FCC §2.1053, §90.210 IC RSS-119 §5.8	Field strength of Spurious Radiation	Compliant
FCC § 90.214 IC RSS-119 §5.9	Transient Frequency Behavior	Compliant
IC RSS-119 §5.11	Receiver Spurious Emission	Compliant

## 4 FCC §2.1091 & IC RSS-102 - RF Exposure

### 4.1 Applicable Standards

#### FCC §2.1091

(a) Requirements of this section are a consequence of Commission responsibilities under the National Environmental Policy Act to evaluate the environmental significance of its actions. See subpart I of part 1 of this chapter, in particular §1.1307(b).

According to §1.1310 and §2.1091 RF exposure is calculated.

#### Limits for Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,00	/	/	1	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	30
1.34-30	842/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/150	30
1500-100,000	/	/	1	30

f = frequency in MHz

\* = Plane-wave equivalent power density

Note 1 to Table 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

Note 2 to Table 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

According to IC RSS-102 Issue 2 section 4.4, RF Field Strength Limits for Controlled Use Devices (Controlled Environment).

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m <sup>2</sup> )	Time Averaging (min)
0.003 - 1	600	2.19	-	6
1 - 10	600 / f	4.9 / f	-	6
10 - 30	60	4.9 / f	-	6
30 – 300	60	0.163	10*	6
300 – 1 500	3.54 f <sup>0.5</sup>	0.0094f <sup>0.5</sup>	f/30	6
1 500 – 15 000	137	0.364	50	6
15 000 – 150 000	137	0.364	50	616000 / f <sup>1.2</sup>
150 000- 300 000	0.354f <sup>0.5</sup>	9.4 x10 <sup>-4</sup> f <sup>0.5</sup>	3.33 x 10 <sup>-4</sup> f	616000 / f <sup>1.2</sup>

**Note:** f is frequency in MHz

\* = Power density limit is applicable at frequencies greater than 100 MHz

#### Antenna:

The manufacturer does not specify an antenna. A typical vehicle antenna has a gain of 6 dBi was used with this device. This device has provisions for operation in a vehicle, or a fixed location.

#### Operating Configuration and exposure conditions:

Device category: Mobile per Part 2.1091

Environment: Controlled Exposure

Typical use qualifies for a maximum duty cycle factor of 50%. The manufacturer also markets this device only for occupation use.

- Vehicle Operation: A typical vehicle installation consists of an antenna system with a coaxial cable of the type RG 58 which has a loss of 1 dB for a length of 15 feet.

#### MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal (dBm):	<u>37.73</u>
Maximum peak output power at antenna input terminal (mW):	<u>5929.3</u>
Prediction distance (cm):	<u>80</u>
Prediction frequency (MHz):	<u>160.075</u>
Maximum Antenna Gain, typical (dBi):	<u>6.0</u>
Maximum Antenna Gain (numeric):	<u>3.98</u>
Cable Loss (dB):	<u>1.0</u>
Power density of prediction frequency at 80 cm (W/m <sup>2</sup> ):	<u>1.17</u>
Power density of prediction frequency at 80 cm (mW/cm <sup>2</sup> ):	<u>0.117</u>
MPE limit for uncontrolled exposure at prediction frequency (W/m <sup>2</sup> ):	<u>10</u>
MPE limit for uncontrolled exposure at prediction frequency (mW/cm <sup>2</sup> ):	<u>1.0</u>

Note: The conducted power output is 5.929 watt, the coax loss was taken as 1 dB, and Antenna gain was taken as 6 dBi, 50% talk time in 6 minutes

### **Conclusion**

The device complies with the MPE requirements by providing a safe separation distance of 80 cm between the antenna, including any radiating structure, and any persons when normally operated.

### **Proposed RF exposure safety information to include in User's Manual:**

#### **“FCC RF Exposure Requirements”:**


##### **CAUTION:**

The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This device is approved with emissions having a source-based timeaveraging duty factor not exceeding 50%.

##### **Vehicle – Antenna Installation:**

- Antennas used for this transmitter must not exceed an antenna gain of 6 dBi
- For rear deck trunk and roof top installations, the antenna must be located at least 80 cm away from rear-seat passengers and bystanders in order to comply with the FCC RF exposure requirements.

The following label will be mounted in conspicuous view on the radio.

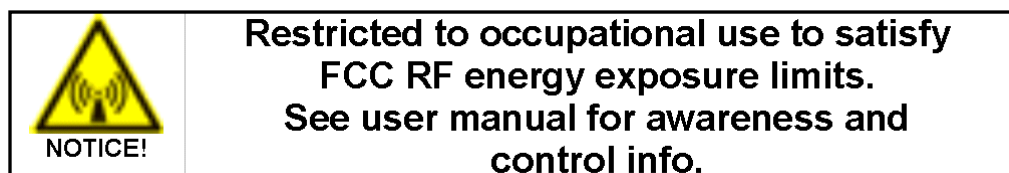

## 5 FCC §2.1046, §90.205 & IC RSS-119 §5.4 – Conducted Output Power

### 5.1 Applicable Standard

According to FCC §2.1046, and §90.205, maximum ERP is dependent upon the station's antenna HAAT and required service area.

According to IC RSS-119 §5.4, the output power should be within  $\pm 1.0$  dB of the manufacture's rated power. And the power limited is specified in SRSP-500 Issue 5 2004, technical requirements for land mobile and fixed radio service operating in the bands 138-144MHz and 148-174MHz.


### 5.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

RBW	Video BW
100 kHz	300 kHz

### 5.3 Test Setup Block Diagram

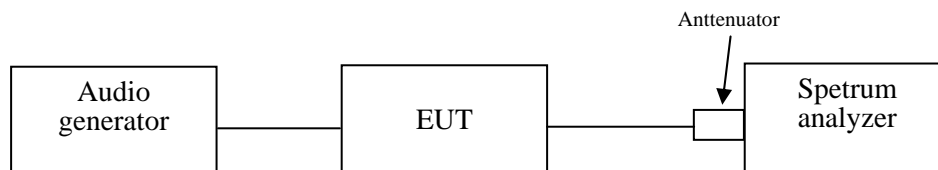

### 5.4 Test Environmental Conditions

Temperature:	25 °C
Relative Humidity:	43 %
ATM Pressure:	101.6 kPa

*The testing was performed by Jerry Huang on 2010-10-20 in RF site.*

### 5.5 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
HP	Test Set, RF Communications	8920A	3438A05338	2010-05-18
Agilent	Spectrum Analyzer	E4446A	US44300386	2010-08-18

**\* Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

## 5.6 Test Result

Test Mode: Transmitting

High Power

Frequency Spacing (kHz)	Frequency (MHz)	Output Power (dBm)	Output Power (Watt)
25 kHz	146.075	37.23	5.28
25 kHz	160.075	37.72	5.92
25 kHz	173.975	37.54	5.68
12.5 kHz	146.075	37.26	5.32
12.5 kHz	160.075	37.73	5.93
12.5 kHz	173.975	37.47	5.58

Low Power

Frequency Spacing (kHz)	Frequency (MHz)	Output Power (dBm)	Output Power (Watt)
25 kHz	146.075	30.33	1.08
25 kHz	160.075	30.66	1.16
25 kHz	173.975	30.98	1.25
12.5 kHz	146.075	30.68	1.17
12.5 kHz	160.075	31.1	1.29
12.5 kHz	173.975	31.04	1.27

## 6 FCC §2.1047, §90.207 & IC RSS-119 §5.2 – Modulation Characteristic

### 6.1 Applicable Standard

FCC §2.1047 & §90.207:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

IC RSS-119 §5.2

Equipment that operates in frequency bands other than 746-770 MHz and 794-800 MHz may employ any type of modulation. The type of modulation used shall be reported.

### 6.2 Test Procedure

Test Method: TIA/EIA-603-C 2.2.3

### 6.3 Test Environmental Conditions

<b>Temperature:</b>	22~26 °C
<b>Relative Humidity:</b>	41~42 %
<b>ATM Pressure:</b>	101.6~102.5 kPa

*The testing was performed by Jerry Huang on 2010-10-21 ~ 2010-10-25 in RF Site.*



### 6.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4446A	US44300386	2010-08-18
Agilent	Function Arbitrary Waveform Generator	33220A	MY43004878	2010-07-29
HP	RF Communication test set	8920A	3438A05338	2010-05-18



**Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### 6.5 Test Result

Please refer to the hereinafter plots.

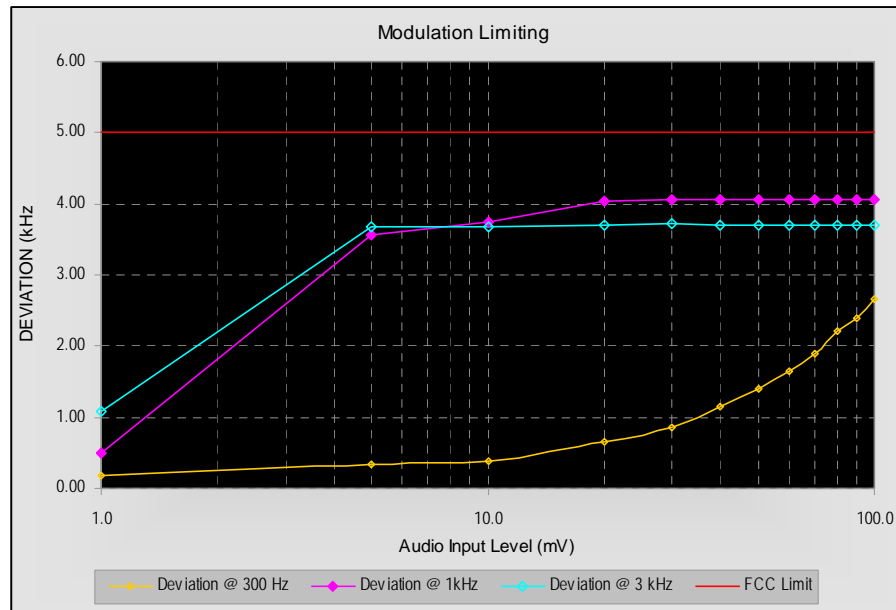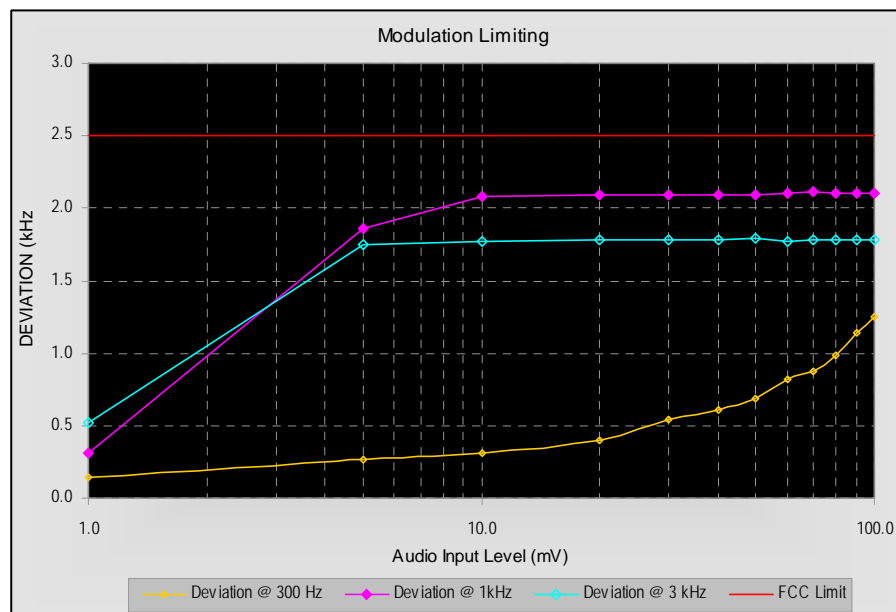**Modulation Limit for SD-250V2****High Power****Channel Spacing 25 kHz****Channel Spacing 12.5 kHz**

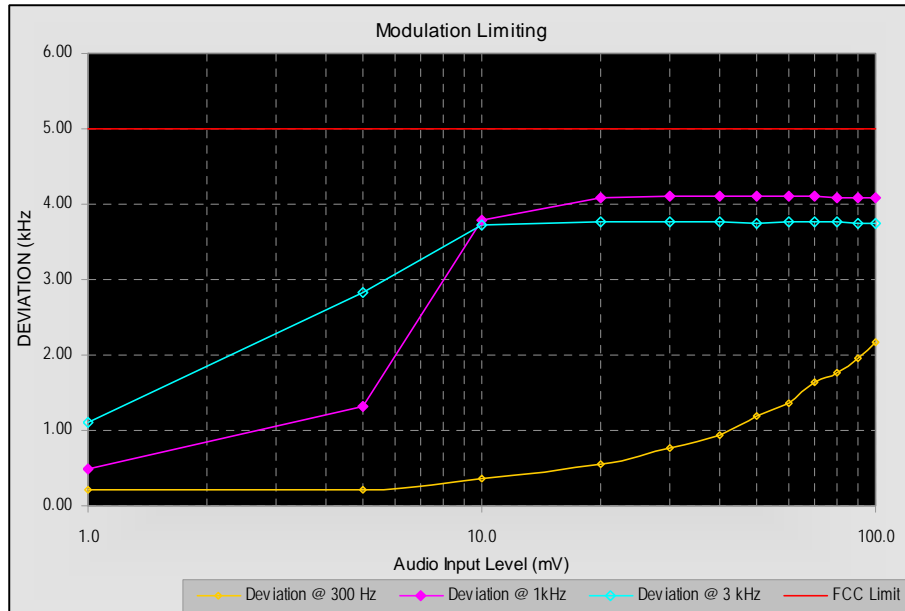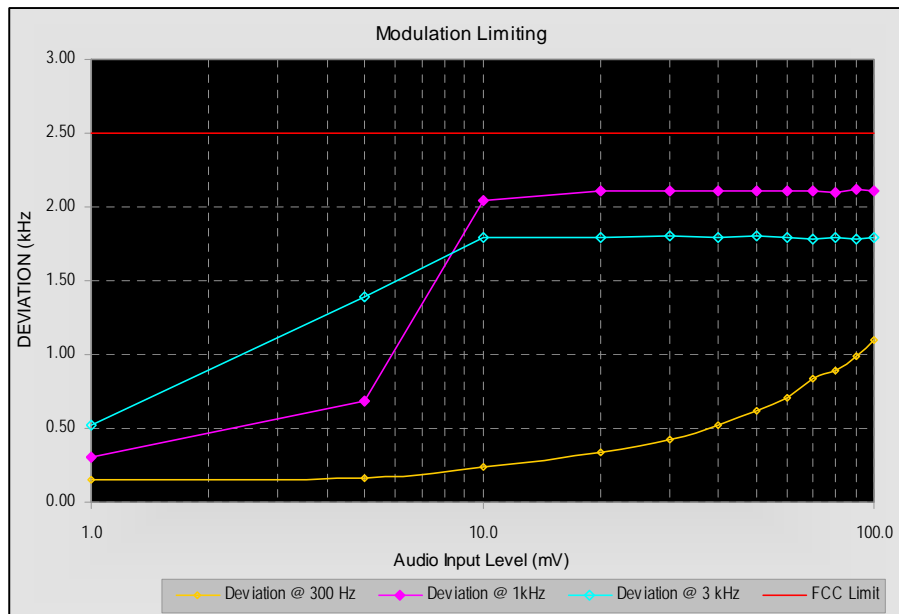


**Low Power****Channel Spacing 25 kHz****Channel Spacing 12.5 kHz**


Audio Frequency Response

Middle Channel, High power setup

Channel Spacing 25 kHz

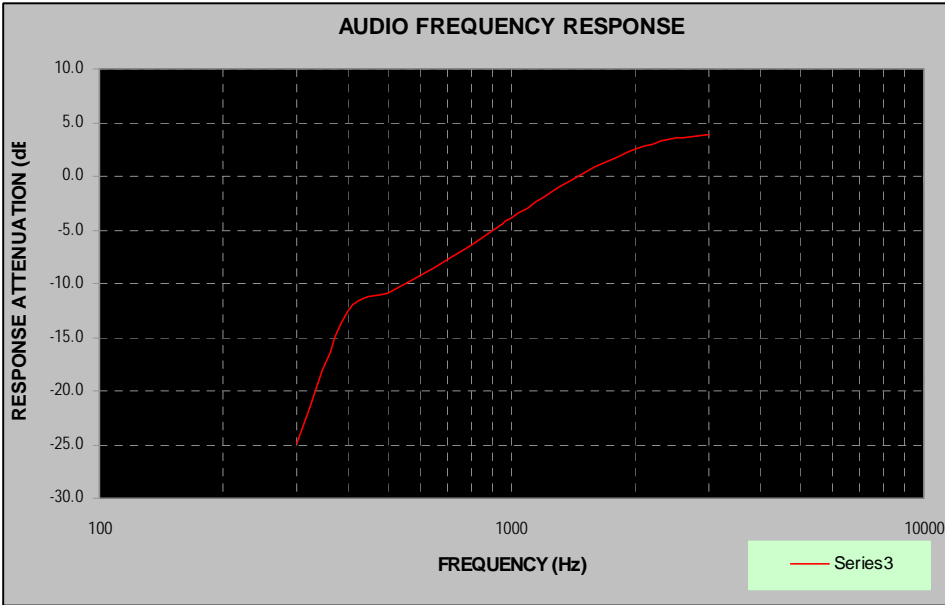


Channel Spacing 12.5 kHz

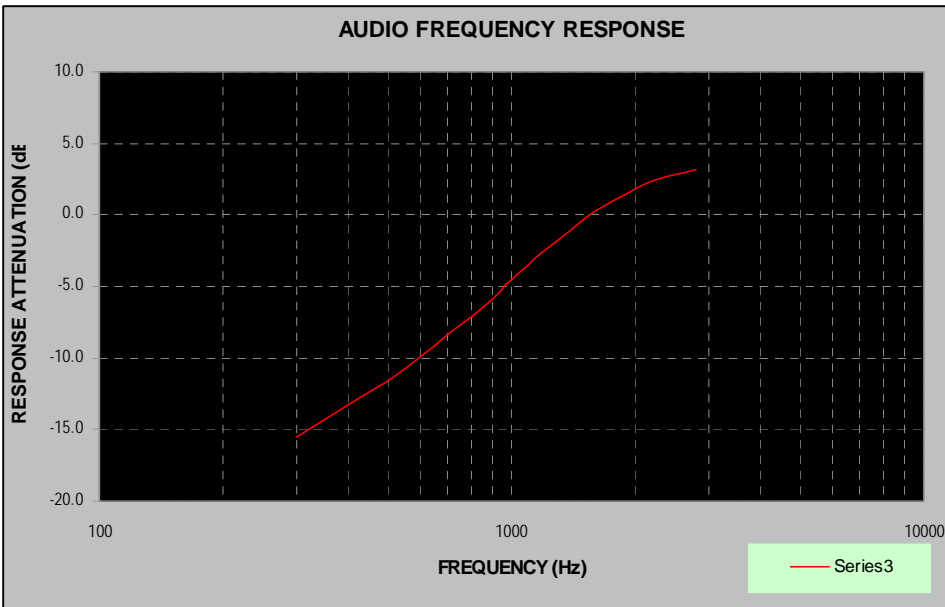


**Audio Filter Response**

Channel Spacing 25 kHz

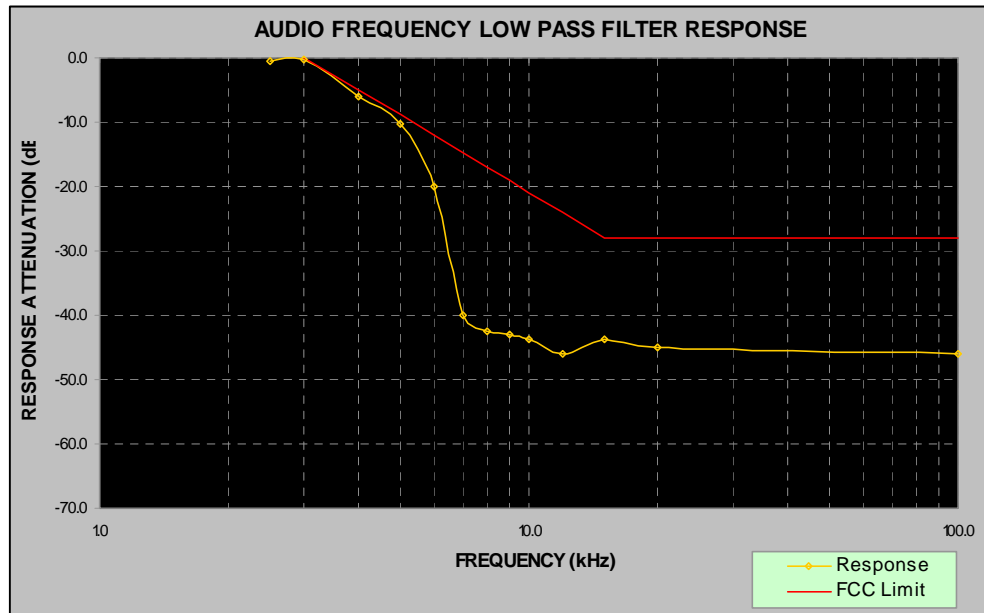

Channel Spacing 12.5 kHz

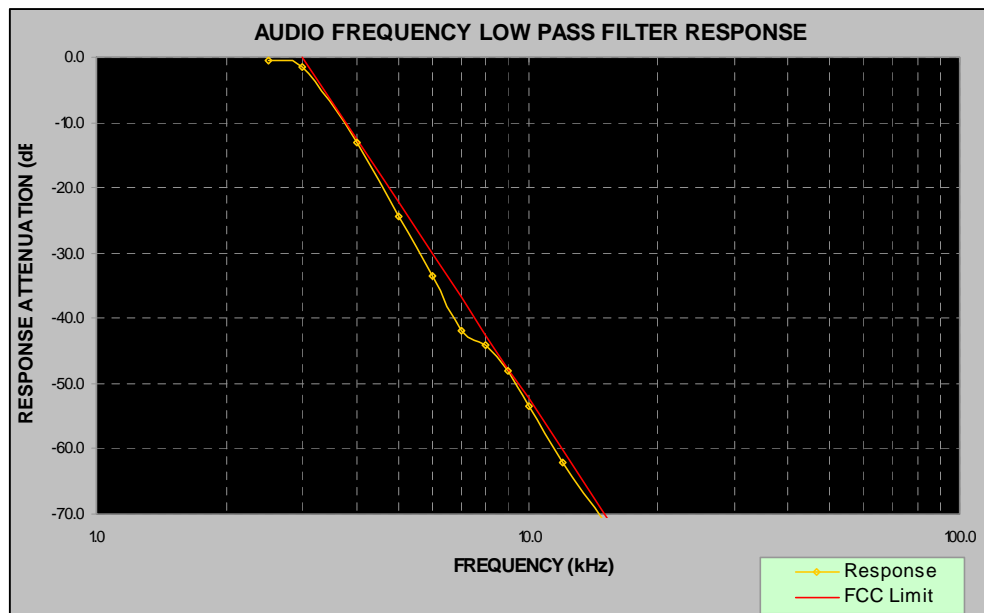

## **7 FCC §2.1049, §90.210 & IC RSS-119 §5.5– Occupied Bandwidth & Emission Mask**

---

### **7.1 Applicable Standard**

FCC §90.209

Operations using equipment using a 25 kHz bandwidth will be authorized a 20 kHz bandwidth. Operations using equipment designed to operate with a 12.5 kHz channel bandwidth will be authorized an 11.25 kHz bandwidth.

FCC §2.1049, §90.210

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- 1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- 2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- 3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + \log(P)$  dB.

The resolution bandwidth was 100Hz or greater for measuring up to 250kHz from the edge of the authorized frequency segment, and 30kHz or greater for measuring more than 250kHz from the authorized frequency segment.

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth  $f_0$  to 5.625kHz removed from  $f_0$ , 0dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.626kHz but no more than 12.5kHz, at least  $7.27(f_d - 2.88\text{kHz})$  dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5kHz at least:

$50 + 10\log P = 50 + 10\log(P)$  or 70 dB, whichever is the lesser attenuation.

IC RSS-119 §5.5

- 1) Within the frequency ranges 138-470 MHz, transmitters which have channel bandwidths of more than 12.5 kHz can only be authorized if the minimum spectrum efficiency of one voice channel per 12.5 kHz of channel bandwidth (e.g. two voice channels per 25 kHz) is achieved.

2) When an actual or physical 25 kHz channel of a transmitter carries two voice channels, the equipment's spectrum efficiency is equivalent to one voice channel per 12.5 kHz. However, the physical channel is still 25 kHz and therefore the requirements concerning authorized bandwidth, spectrum mask, frequency stability, etc. are those for transmitter using a 25 kHz channel and not those for the equivalent 12.5 kHz.

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- 1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- 2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- 3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + \log (P)$  dB.

The resolution bandwidth was 100Hz or greater for measuring up to 250kHz from the edge of the authorized frequency segment, and 30kHz or greater for measuring more than 250kHz from the authorized frequency segment.

## 7.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the frequency band  $\pm 50$  KHz from the carrier frequency.

## 7.3 Test Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	43 %
<b>ATM Pressure:</b>	101.6 kPa

*The testing was performed by Jerry Huang on 2010-10-20 in RF site.*

## 7.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4446A	US44300386	2010-08-18
HP	RF Communication test set	8920A	3438A05338	2010-05-18


\* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

## 7.5 Test Result


### Occupied Bandwidth

High Power Audio (25 kHz)


Low Channel – 146.075 MHz

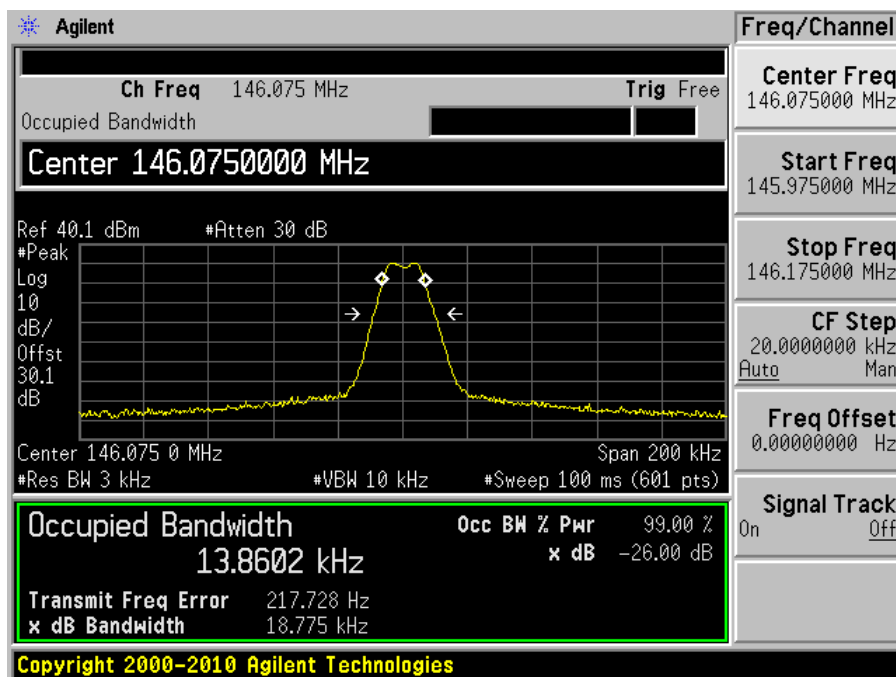

Middle Channel – 160.75 MHz

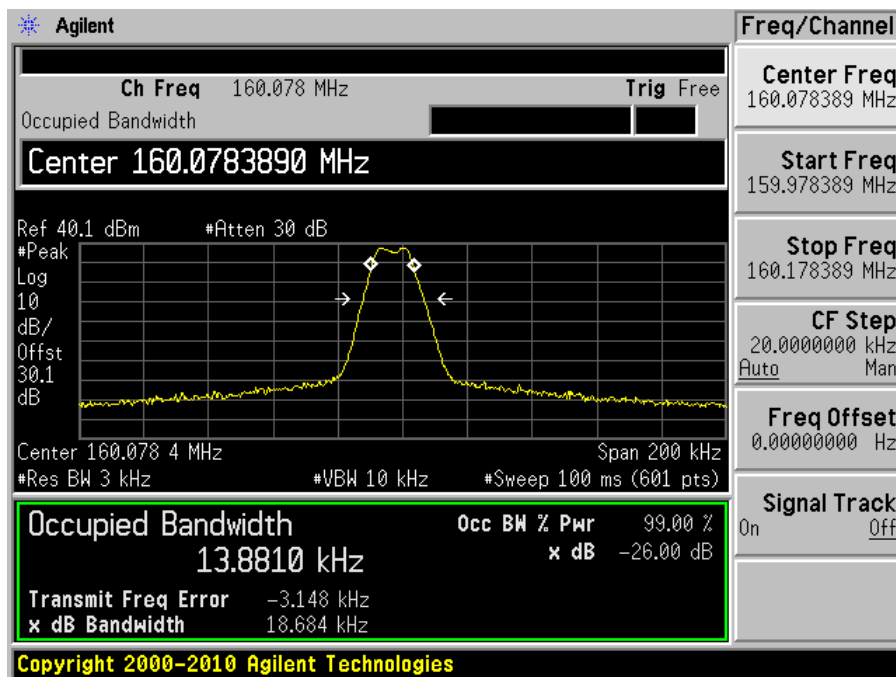


## High Channel – 173.975 MHz

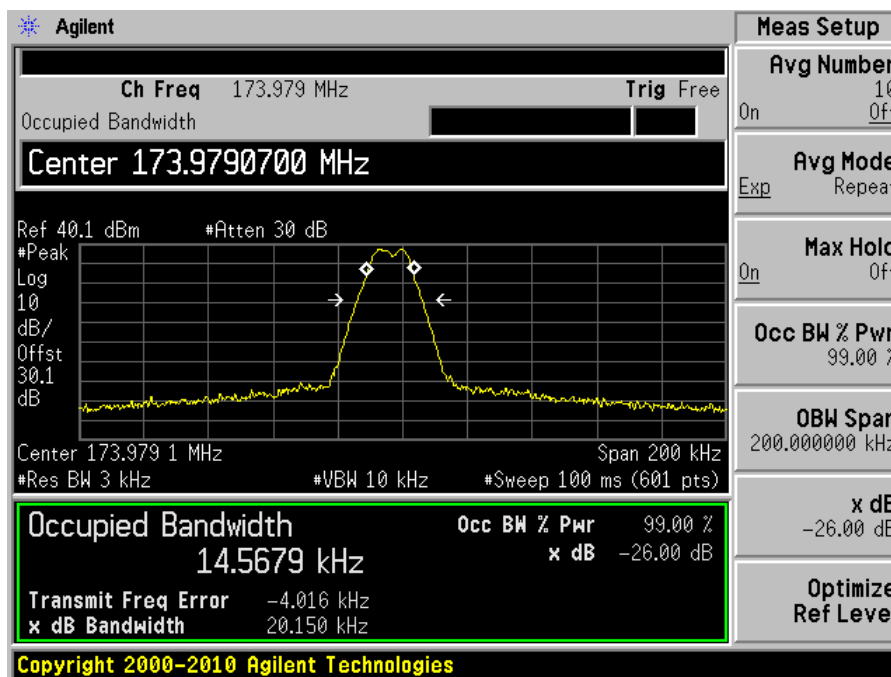


## High Power Data (25 kHz)


## Low Channel – 146.075 MHz

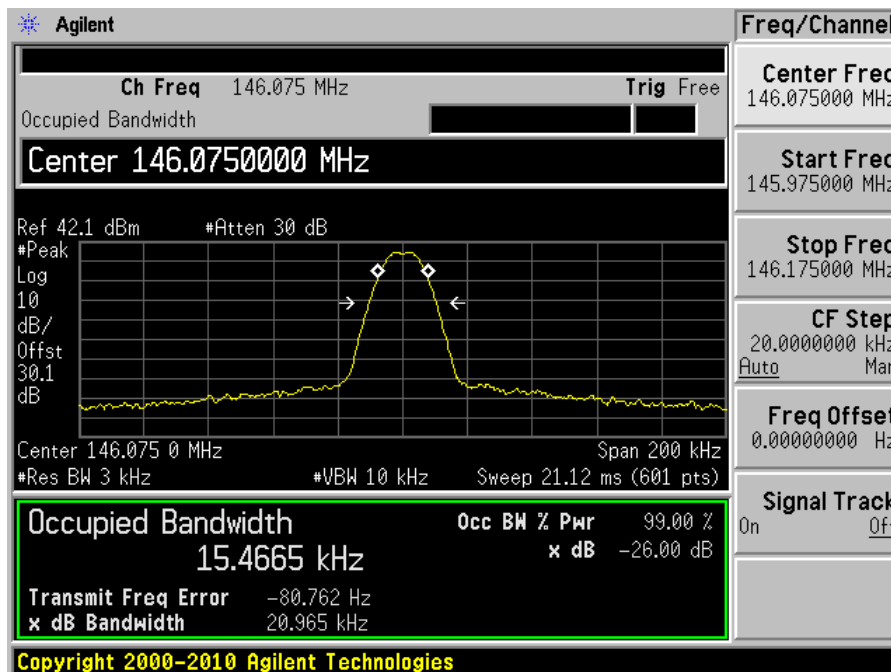

## Middle Channel – 160.75 MHz

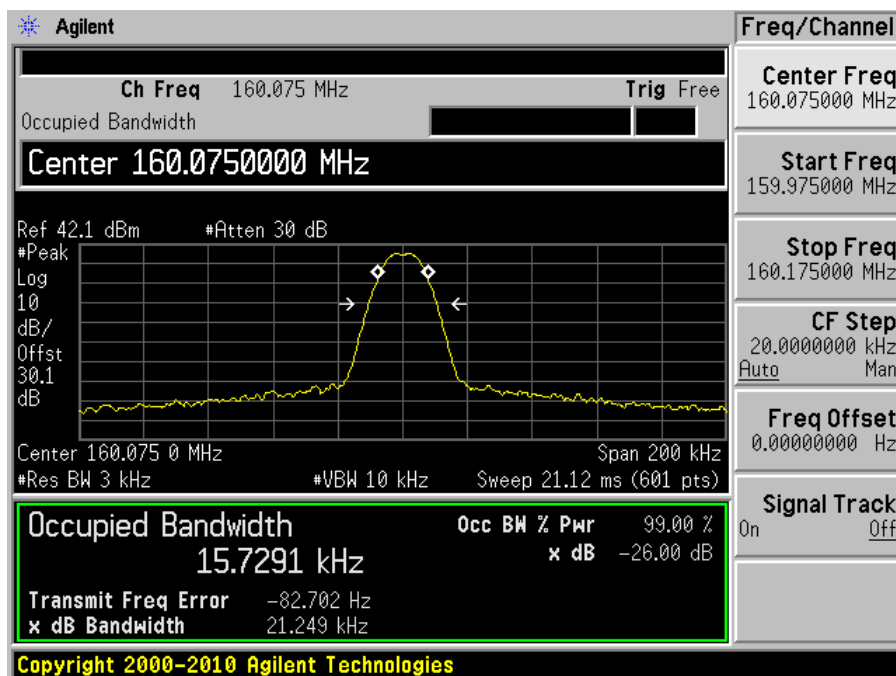


## High Channel – 173.975 MHz

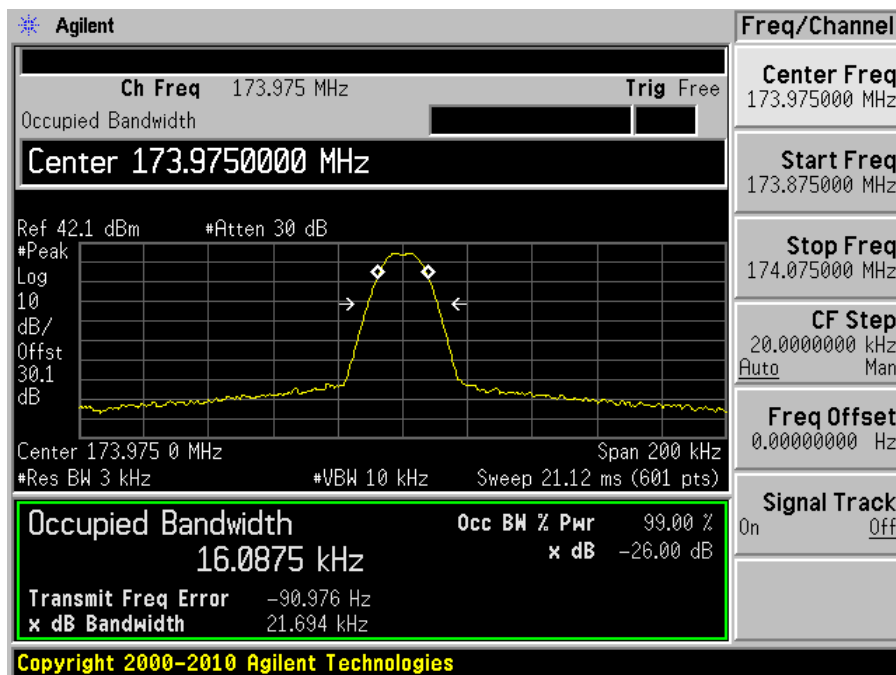




## High Power Audio (12.5 kHz)


## Low Channel – 146.075 MHz

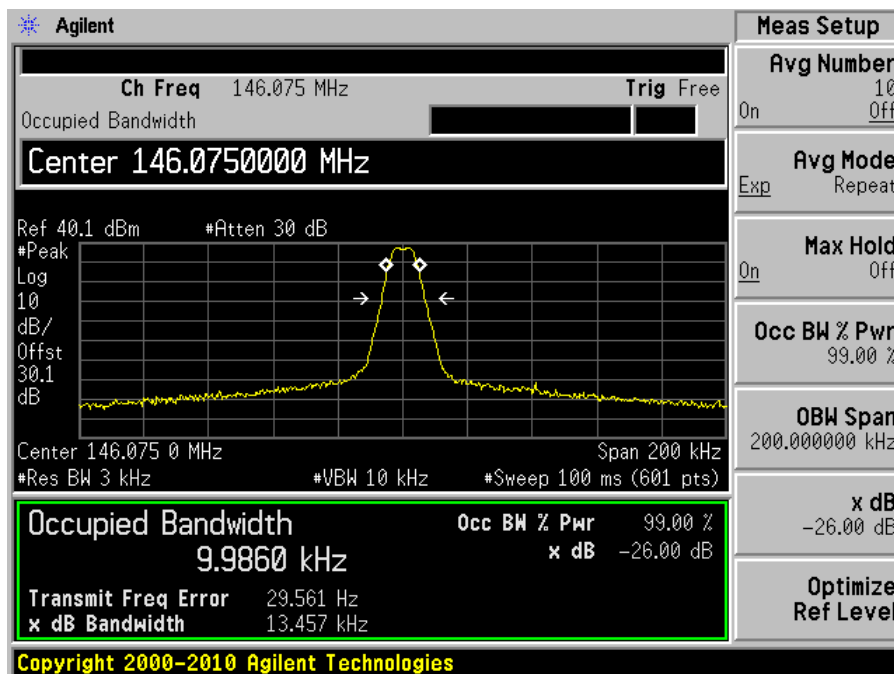

## Middle Channel – 160.75 MHz

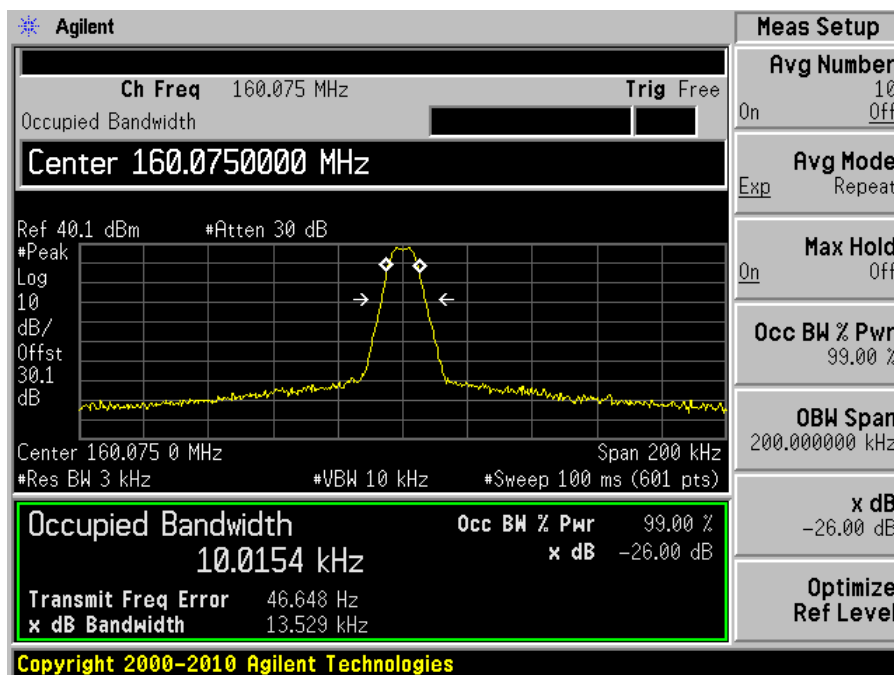


## High Channel – 173.975 MHz

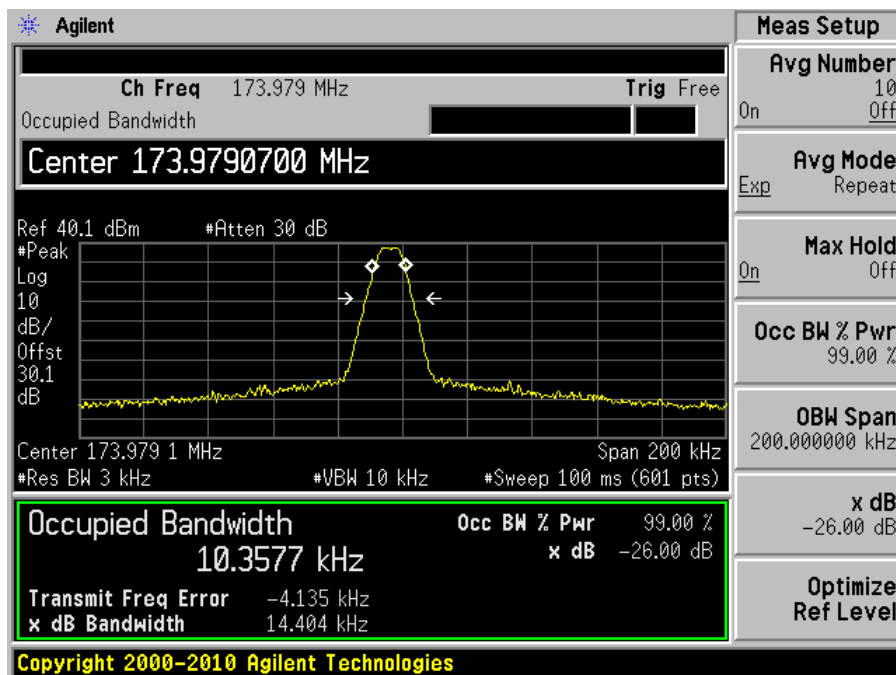


## High Power Data (12.5 kHz)


## Low Channel – 146.075 MHz

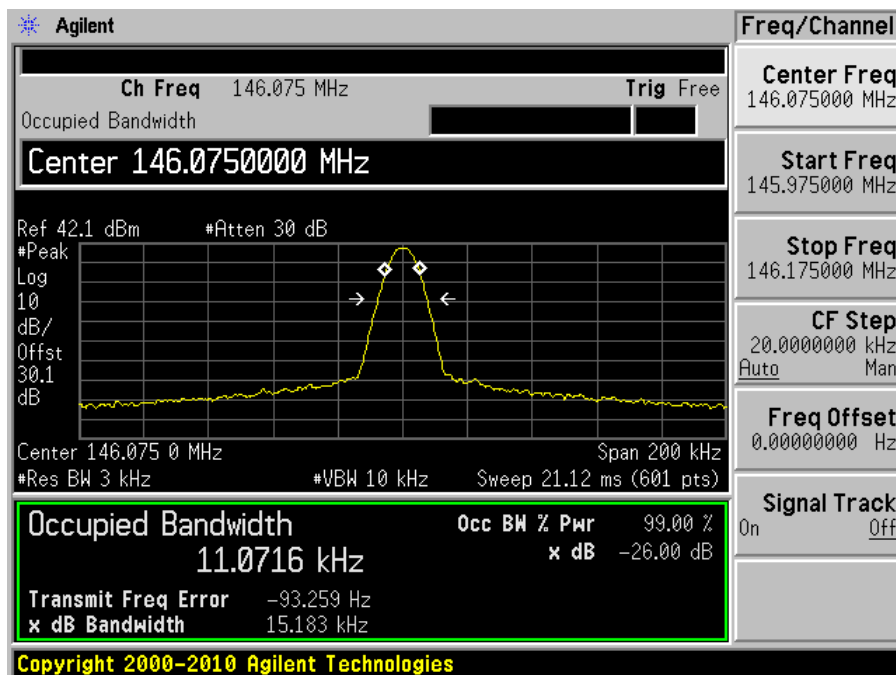

## Middle Channel – 160.75 MHz

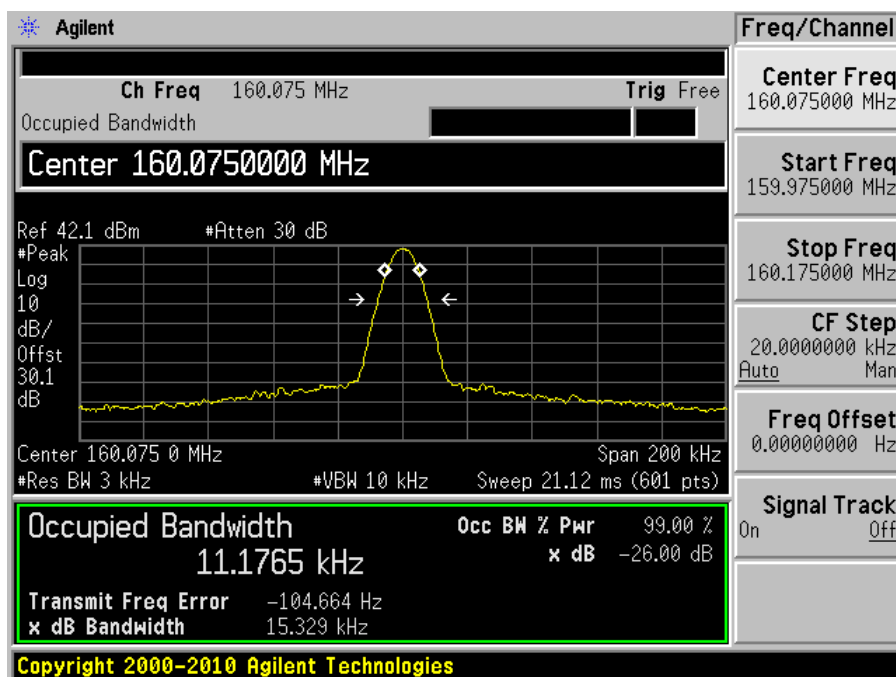


## High Channel – 173.975 MHz

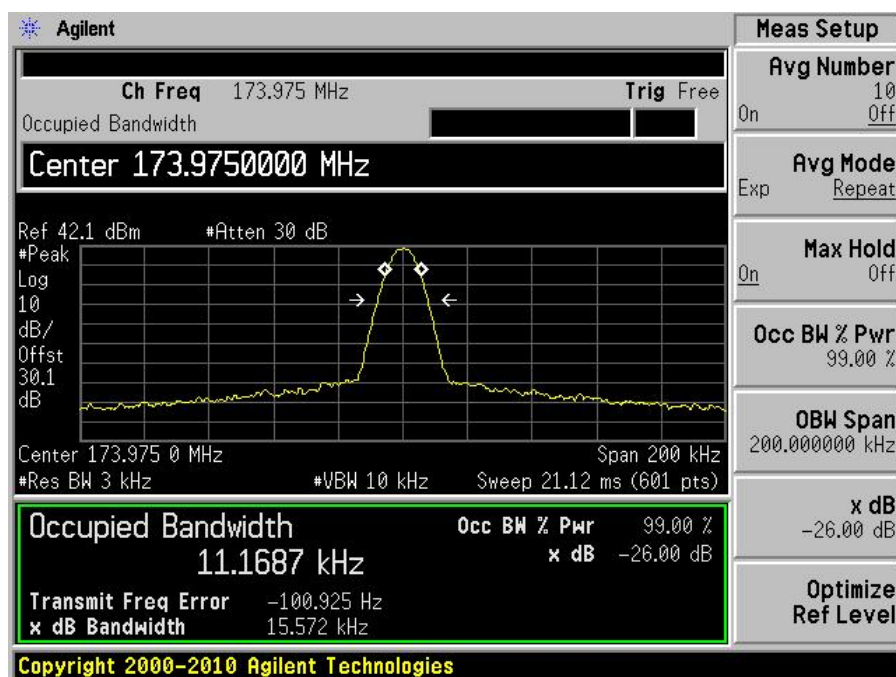


## Low Power Audio (25 kHz)


## Low Channel – 146.075 MHz

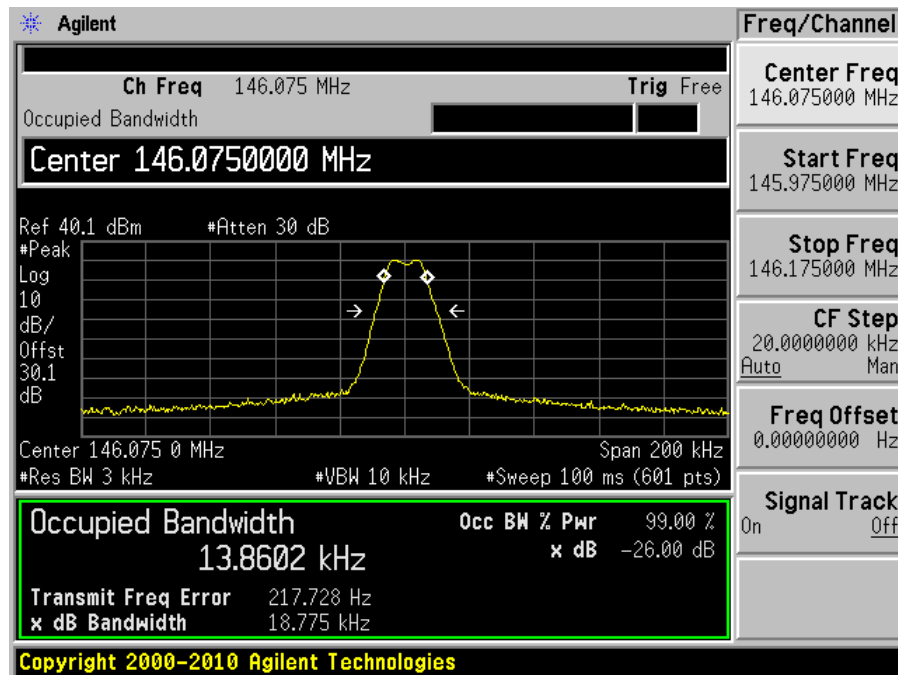

## Middle Channel – 160.75 MHz

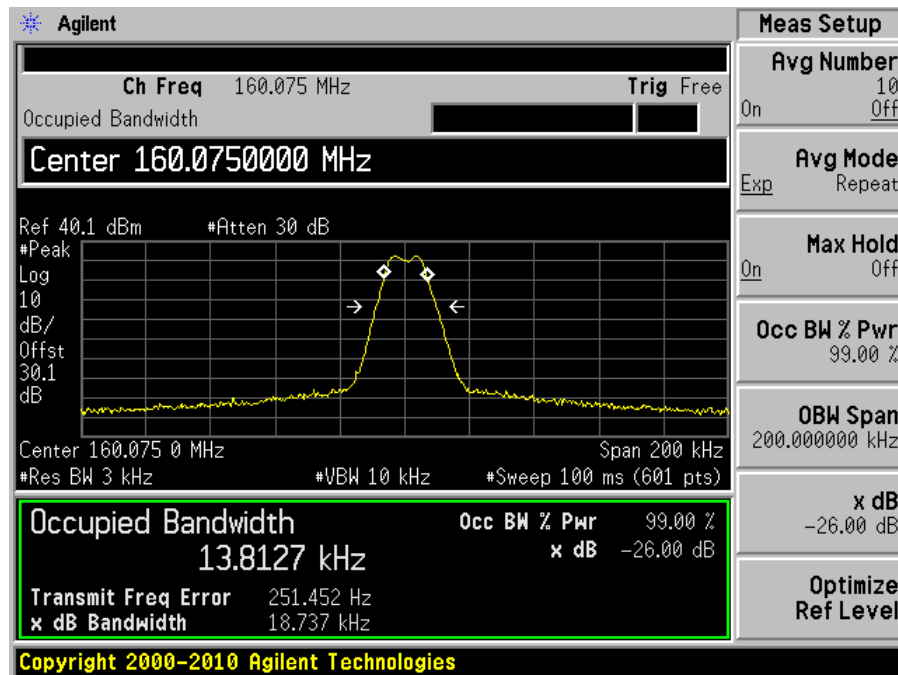


## High Channel – 173.975 MHz

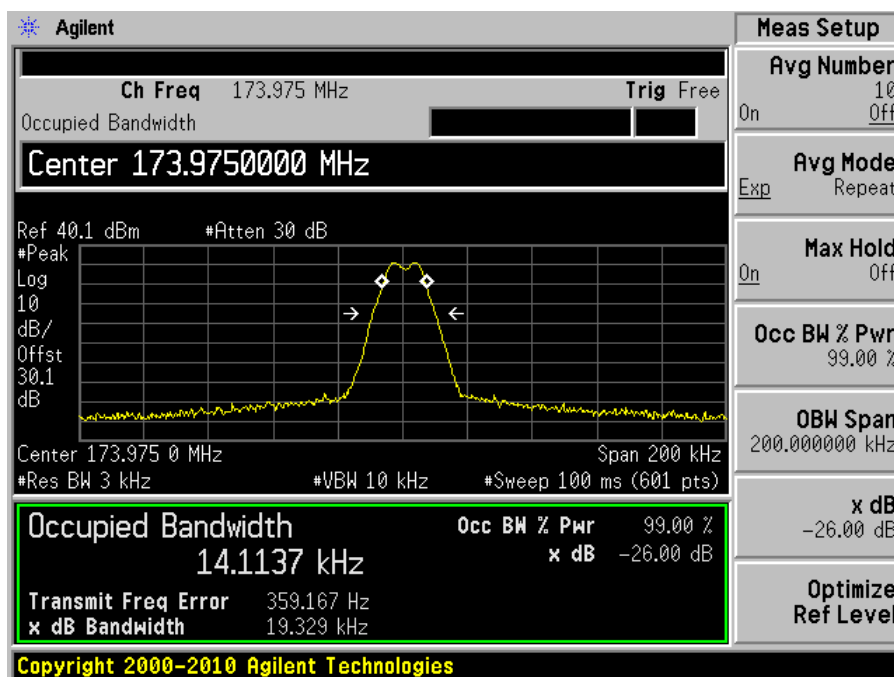


## Low Power Data (25 kHz)


## Low Channel – 146.075 MHz

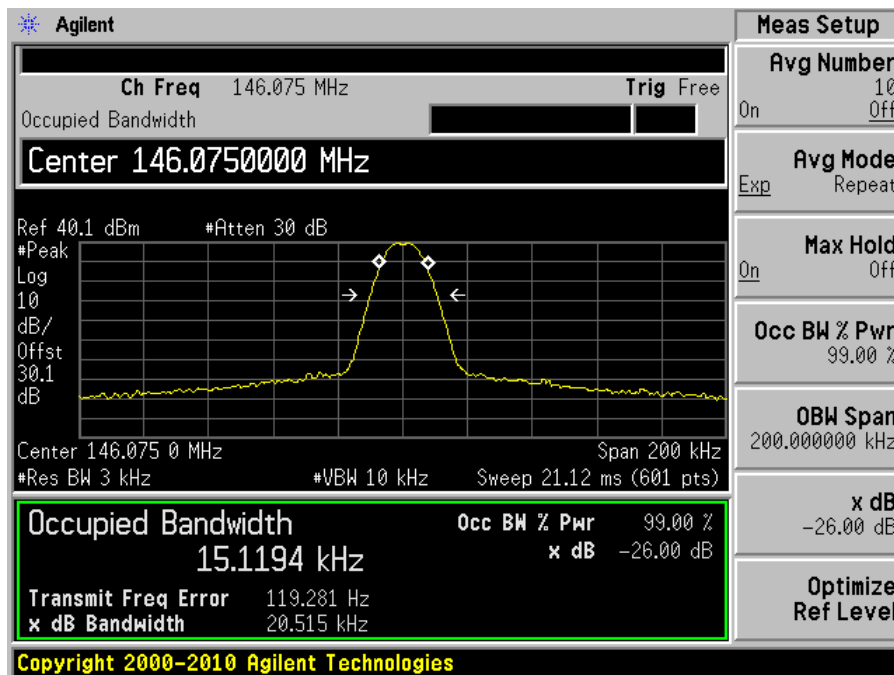

## Middle Channel – 160.75 MHz

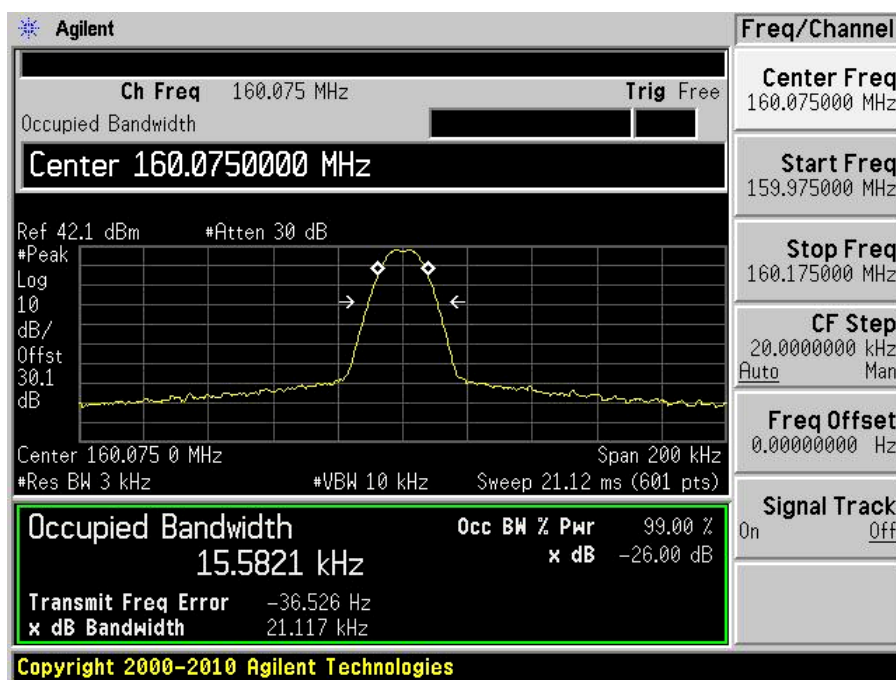


## High Channel – 173.975 MHz

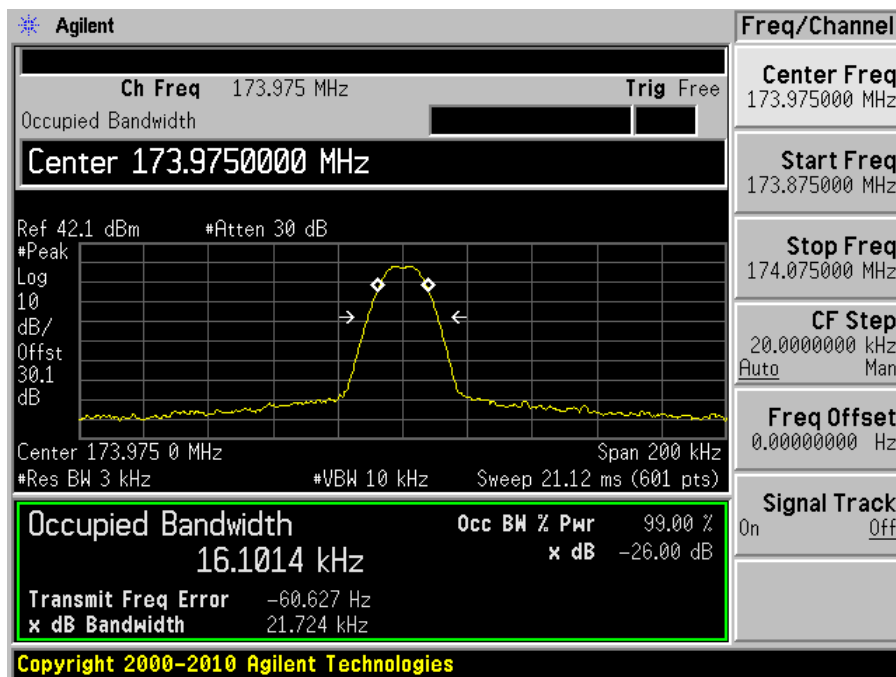


## Low Power Audio (12.5 kHz)


## Low Channel – 146.075 MHz

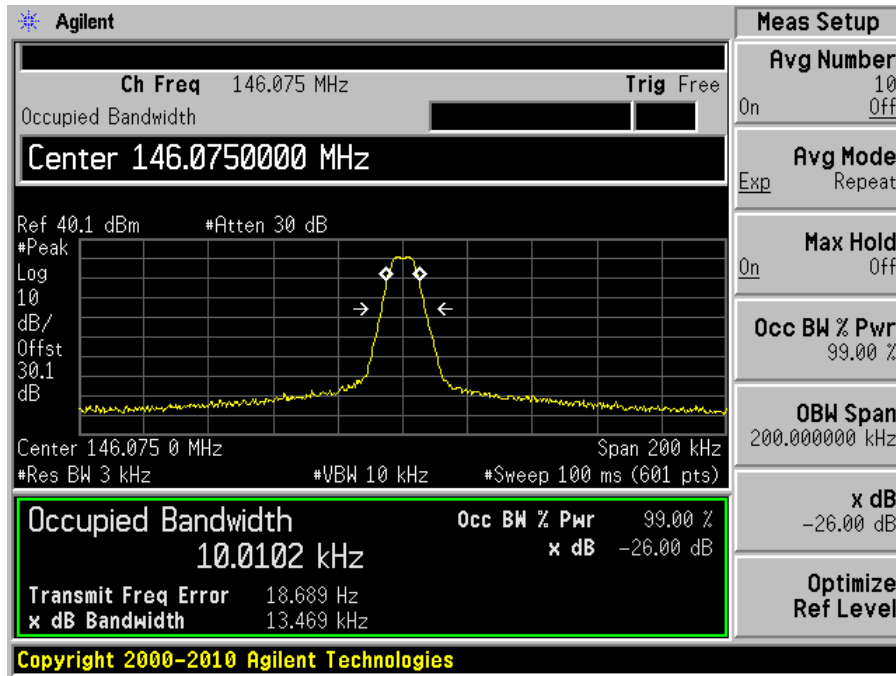

## Middle Channel – 160.075 MHz

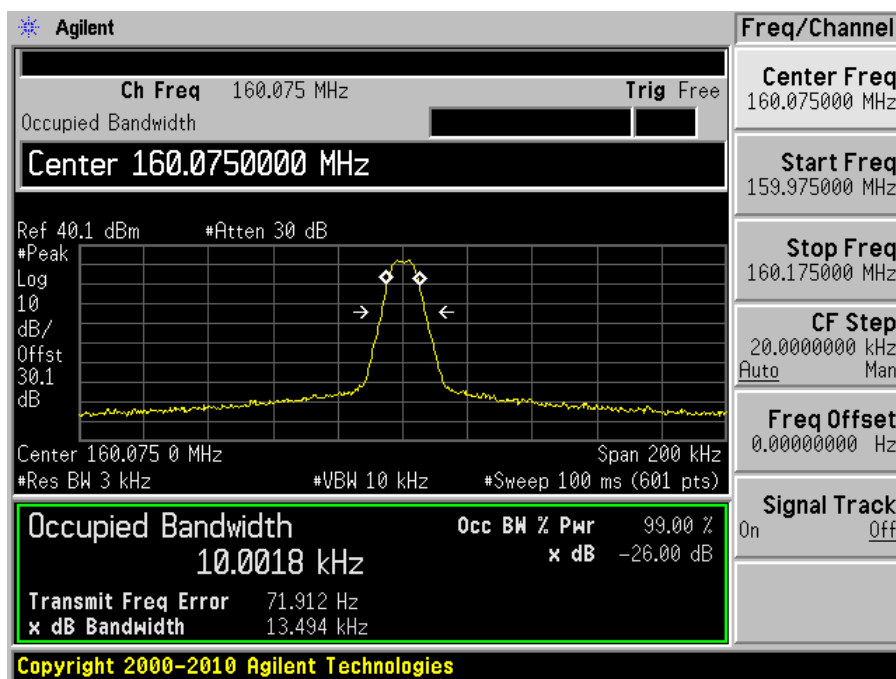


## High Channel – 173.975 MHz

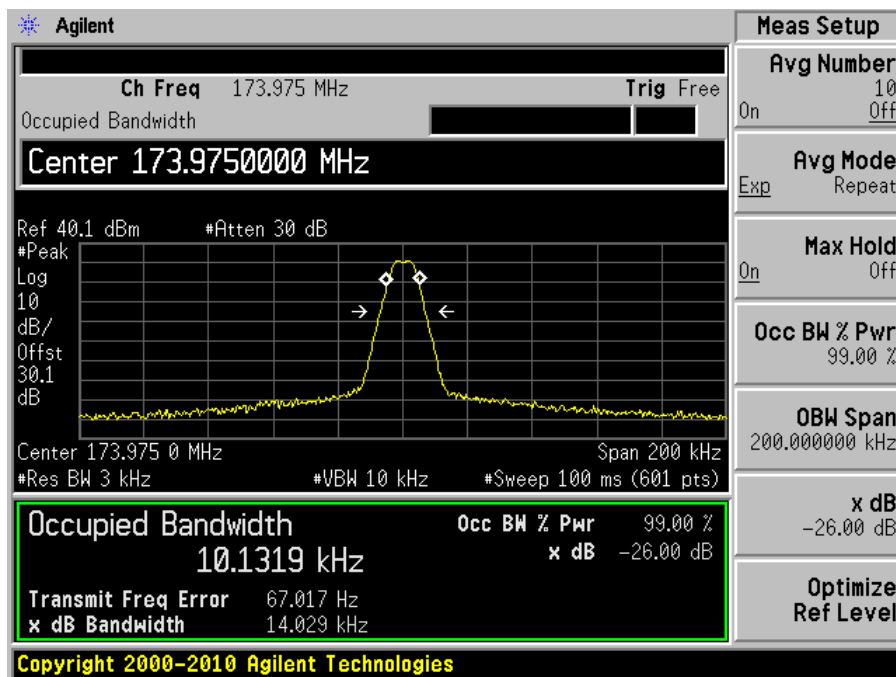


## Low Power Data (12.5 kHz)

## Low Channel – 146.075 MHz

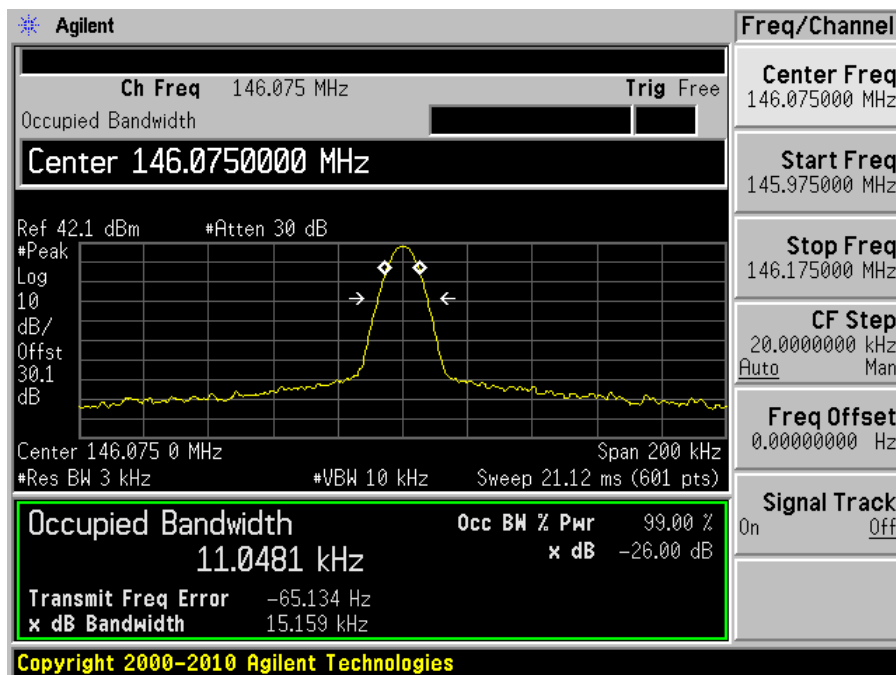




## Middle Channel – 160.075 MHz

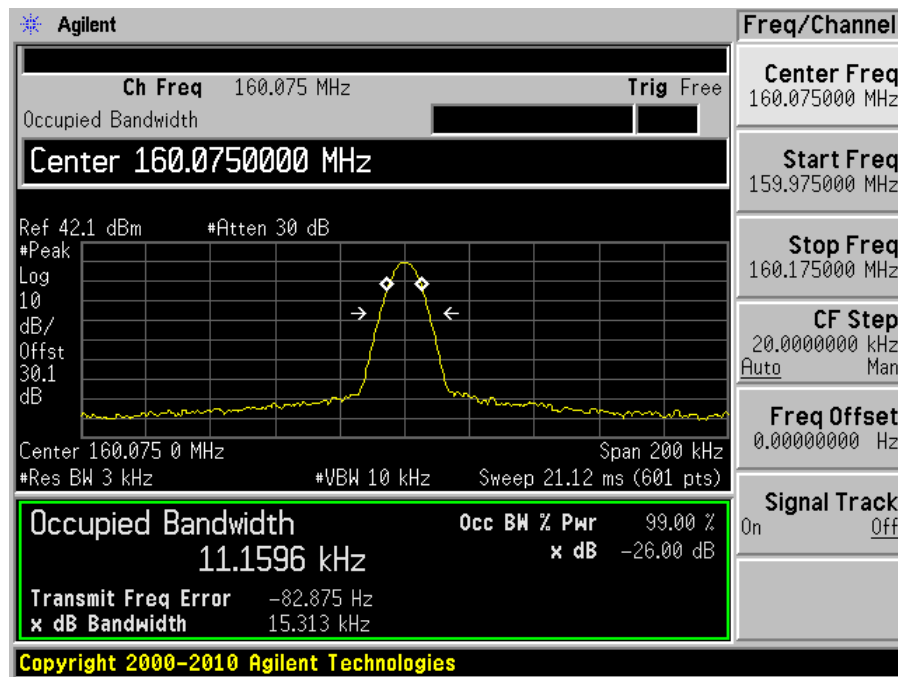


## High Channel – 173.975 MHz

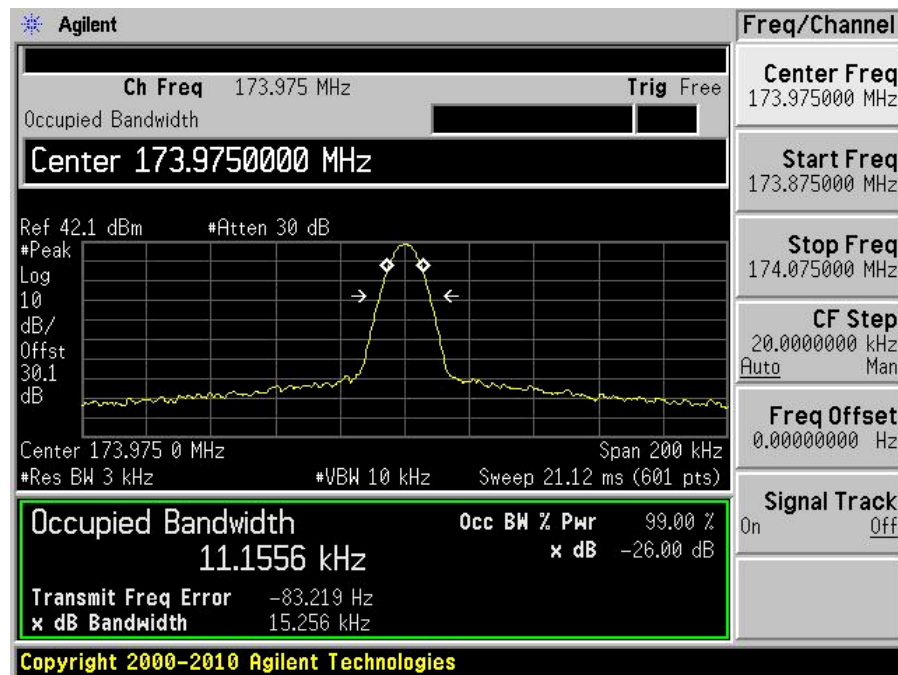


**Emission Mask**


High Power: Audio; 25 kHz Channel Spacing

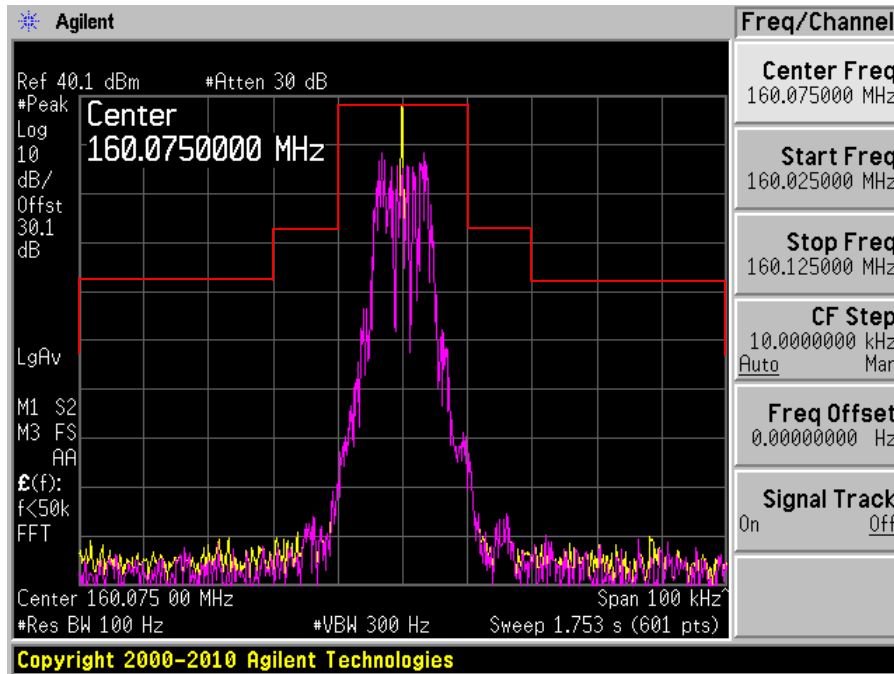


High Power: Audio; 12.5 kHz Channel Spacing

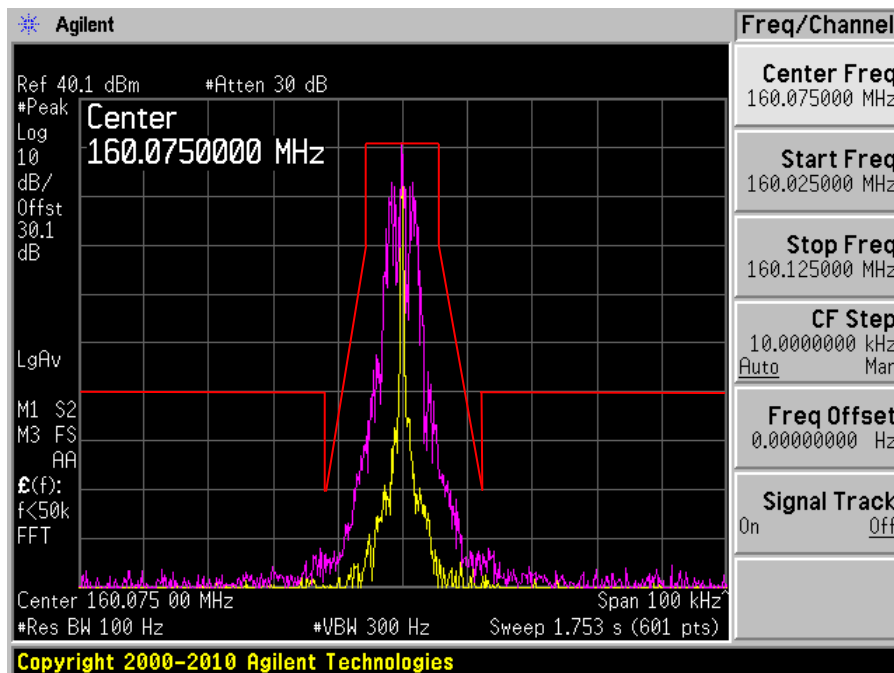


## High Power: Data; 25 kHz Channel Spacing

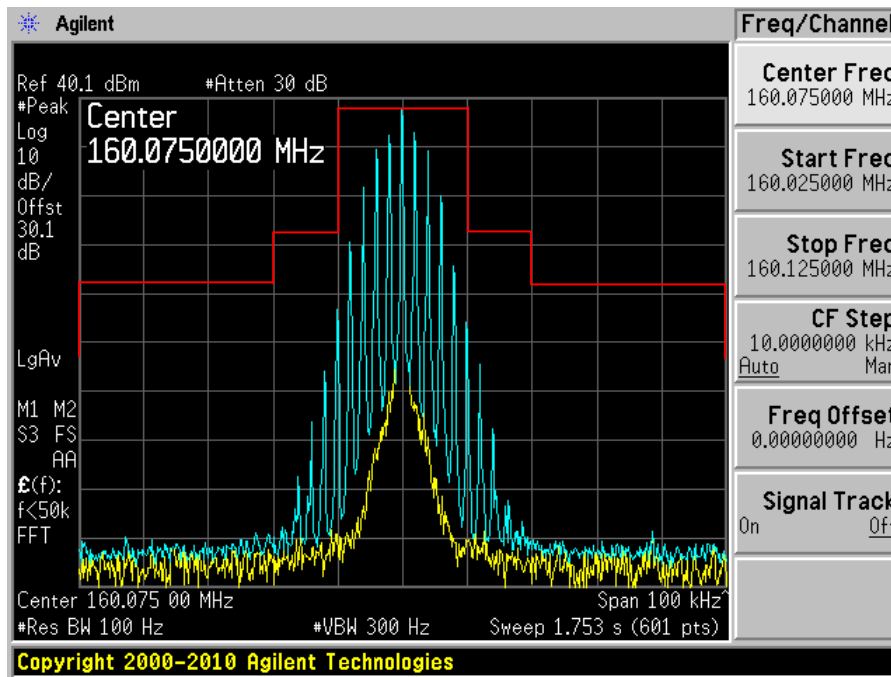


## High Power: Data; 12.5 kHz Channel Spacing

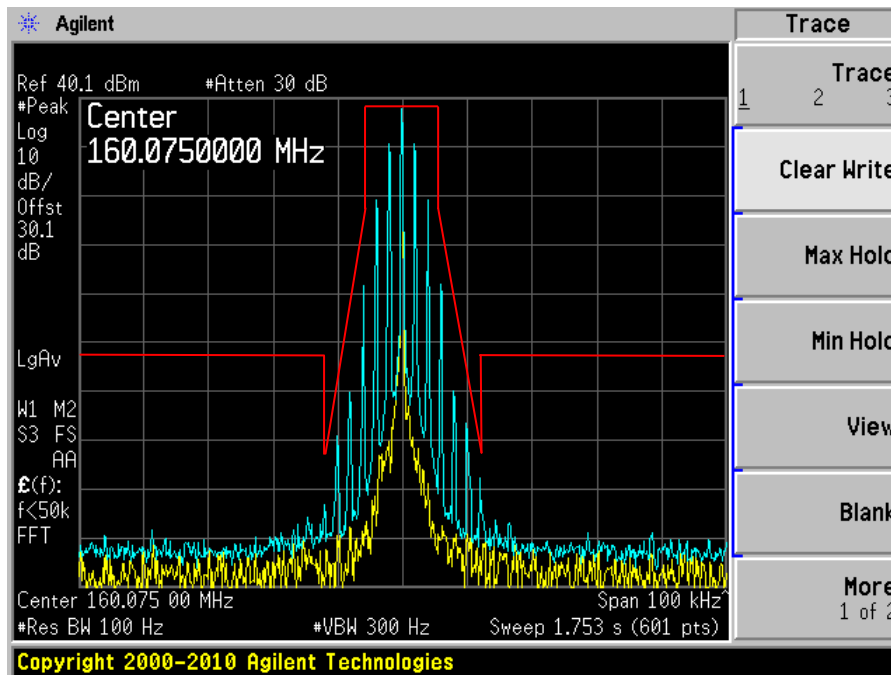


## Low Power: Audio; 25 kHz Channel Spacing

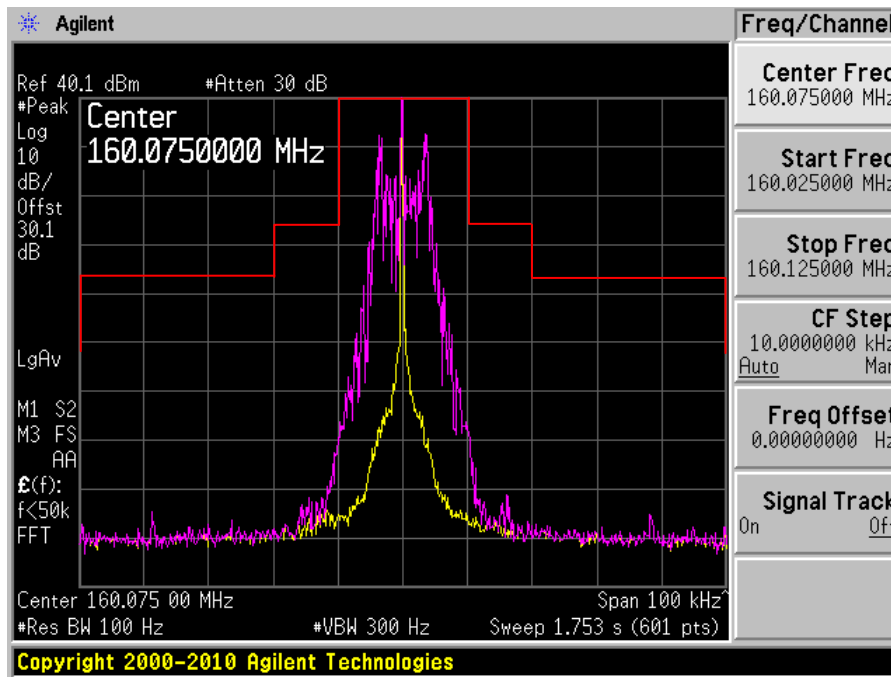


## Low Power: Audio; 12.5 kHz Channel Spacing

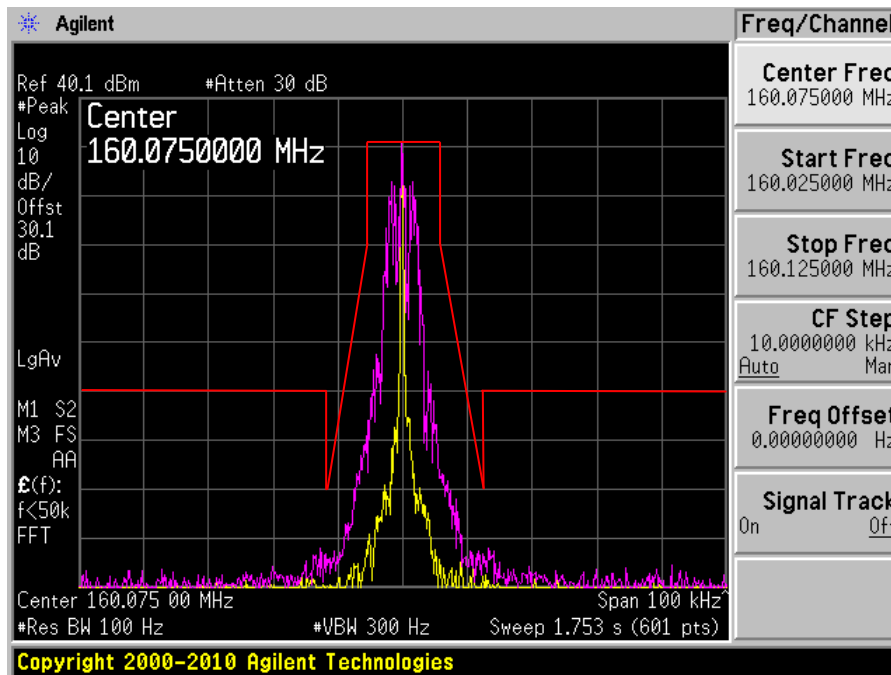

## Low Power: Data; 25 kHz Channel Spacing

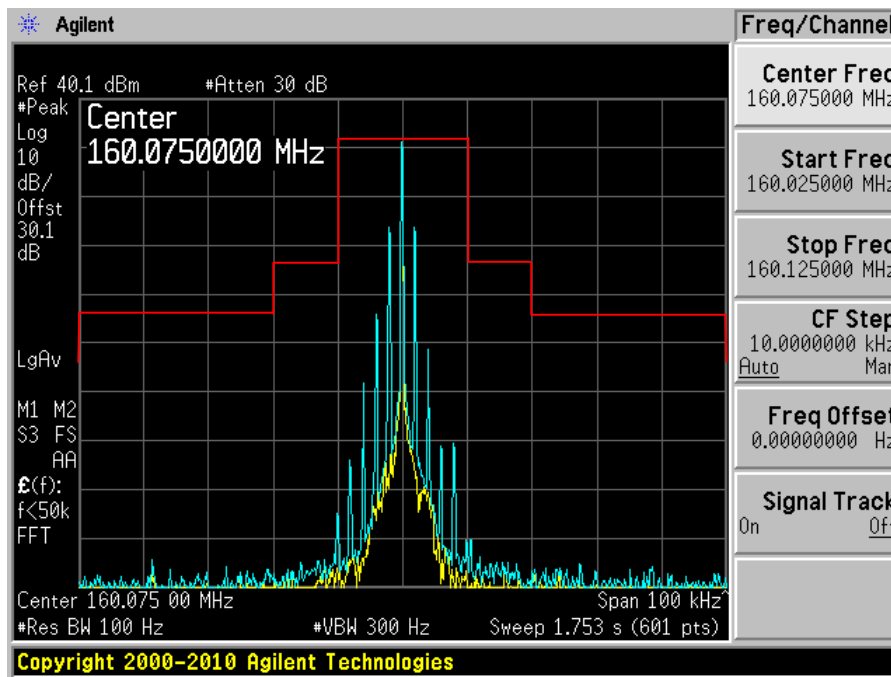

## Low Power: Data; 12.5 kHz Channel Spacing

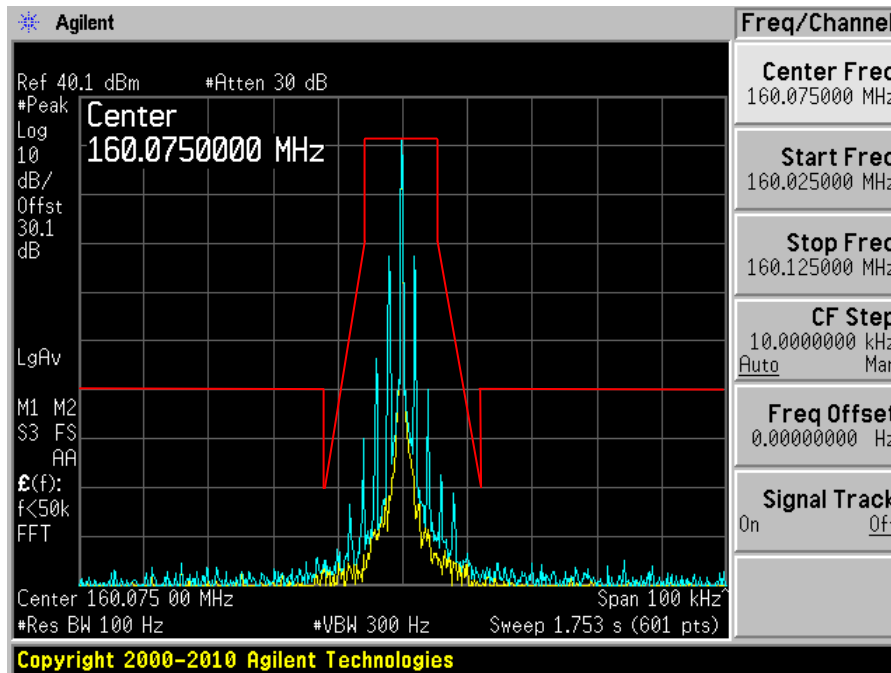

## 8 FCC §2.1051, §90.210 & IC RSS-119 §5.8 - Spurious Emissions at Antenna Terminals

### 8.1 Applicable Standard

FCC §90.210 (12.5 kHz bandwidth only)

On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5kHz at least:

$50+10\log P$  or 70 dB

FCC §2.1051 and §90.210 (25 kHz bandwidth and 20 kHz bandwidth)

On any frequency removed from the center of the assigned channel by more than 250 percent at least:

$43+10\log (P)$

IC RSS-119 §5.8

### 8.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

### 8.3 Test Environmental Conditions

Temperature:	25 °C
Relative Humidity:	43 %
ATM Pressure:	101.6 kPa


*The testing was performed by Jerry Huang on 2010-10-20 in RF Site*

### 8.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09

**Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.


## 8.5 Test Setup Block Diagram

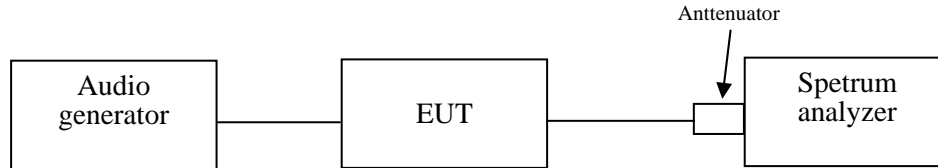


## 8.6 Test Results

*Please refer to the hereinafter plots.*

Worst case: Middle channel High Power (12.5 kHz)

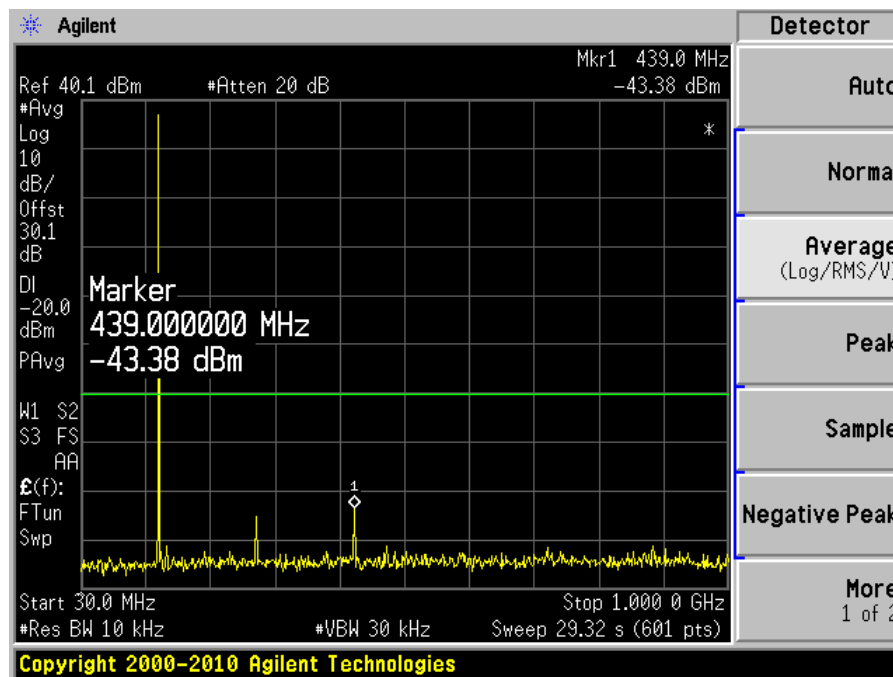


30 MHz to 1 GHz

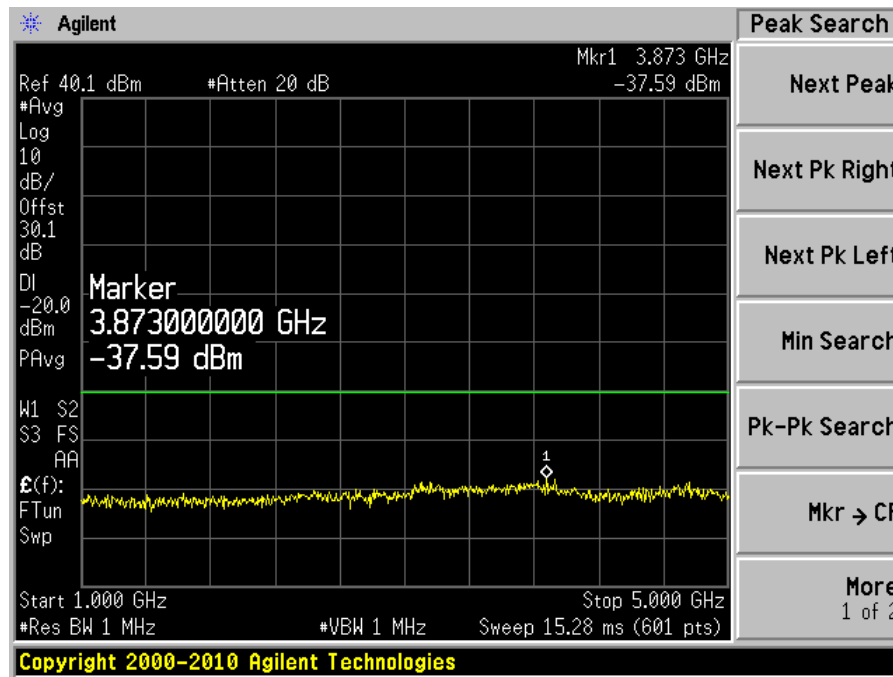


1 GHz to 5 GHz

Worst case: Middle channel High Power (25 kHz)

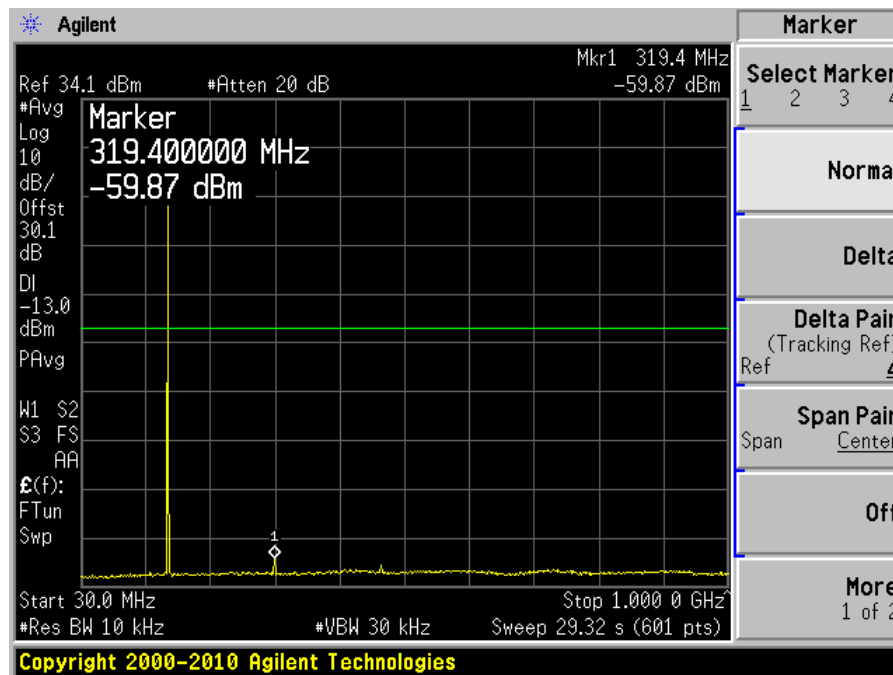

30 MHz to 1 GHz



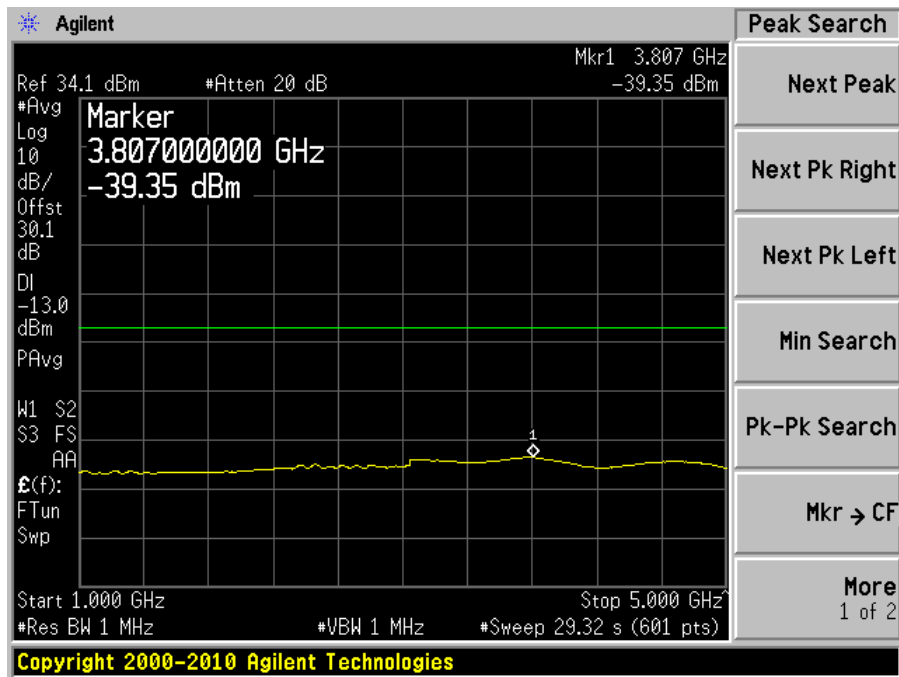

1 GHz to 5 GHz

## 9 FCC §2.1055 (d), §90.213 & IC RSS-119 §5.3- Frequency Stability

### 9.1 Applicable Standard

FCC §2.1055 (d), §90.213

In the 150–174 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth or designed to operate on a frequency specifically designated for itinerant use or designed for low-power operation of two watts or less, must have a frequency stability of 5.0 ppm.

IC RSS-119 §5.3

For mobile station, the limit is 5.0 PPM (For bandwidth are 11.25 kHz and 20 kHz).

### 9.2 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to the Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to 110% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

### 9.3 Test Environmental Conditions

<b>Temperature:</b>	26 °C
<b>Relative Humidity:</b>	43 %
<b>ATM Pressure:</b>	101.7 kPa

*The testing was performed by Jerry Huang on 2010-10-21 in RF site.*

### 9.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4446A	US44300386	2010-08-18
ESPEC	Oven, Temperature	ESL-4CA	18010	N/A

\* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

## 9.5 Test Result

### High Power Band 12.5 kHz

Test Condition		Reference Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (PPM)	Limit (PPM)
Voltage (Vdc)	Temperature (°C )				
Frequency vs. Temperature					
12	50	160.075	160.074851	-0.930813681	± 5
12	40	160.075	160.074874	-0.787131032	± 5
12	30	160.075	160.074907	-0.580977667	±5
12	20	160.075	160.074923	-0.48102452	± 5
12	10	160.075	160.074908	-0.574730595	± 5
12	0	160.075	160.074901	-0.618460097	± 5
12	-10	160.075	160.074901	-0.618460097	± 5
12	-20	160.075	160.074901	-0.618460097	± 5
Frequency vs. Voltage					
13.8	20	160.075	160.074923	-0.48102452	± 5
9	20	160.075	160.074916	-0.524754021	± 5

### High Power Band 25 kHz

Test Condition		Reference Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (PPM)	Limit (PPM)
Voltage (Vdc)	Temperature (°C )				
Frequency vs. Temperature					
12	50	160.075	160.074817	-1.143214118	± 5
12	40	160.075	160.074872	-0.799625176	± 5
12	30	160.075	160.074863	-0.855848821	±5
12	20	160.075	160.074885	-0.718413244	± 5
12	10	160.075	160.074878	-0.762142745	± 5
12	0	160.075	160.074855	-0.905825394	± 5
12	-10	160.075	160.074863	-0.855848821	± 5
12	-20	160.075	160.074862	-0.862095892	± 5
Frequency vs. Voltage					
13.8	20	160.075	160.074893	-0.66843667	± 5
9	20	160.075	160.074885	-0.718413244	± 5

## 10 FCC §2.1053, §90.210 & IC RSS-119 §5.8 – Field Strength of Spurious Radiation

### 10.1 Applicable Standard

FCC §2.1053 (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of §2.1049, as appropriate. And §90.210(b),(d): Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (m) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere in this part, the table in this section specifies the emission masks for equipment operating in the frequency bands governed under this part.

IC RSS-119 §5.8

### 10.2 Test Procedure

The transmitter was placed on a Styrofoam with wooden turntable, and it was normal transmitting with 50ohm termination which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg (\text{TXpwr in Watts}/0.001)$  – the absolute level

### 10.3 Test Environmental Conditions

<b>Temperature:</b>	26 °C
<b>Relative Humidity:</b>	43 %
<b>ATM Pressure:</b>	101.7 kPa


*The testing was performed by Jerry Huang on 2010-10-21 in chamber 3.*

## 10.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2010-03-24
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09
Sunol Science Corp	System Controller	SC99V	122303-1	N/R
Sunol Science Corp	Combination Antenna	JB3	A0020106-2	2010-08-06
Hewlett Packard	Pre amplifier	8447D	2944A06639	2010-06-18
A.R.A Inc	Horn antenna	DRG-1181A	1132	2009-10-27
Mini-Circuits	Pre Amplifier	ZVA-183-S	570400946	2010-05-10

**Statement of Traceability:** BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

## 10.5 Test Setup Block Diagram

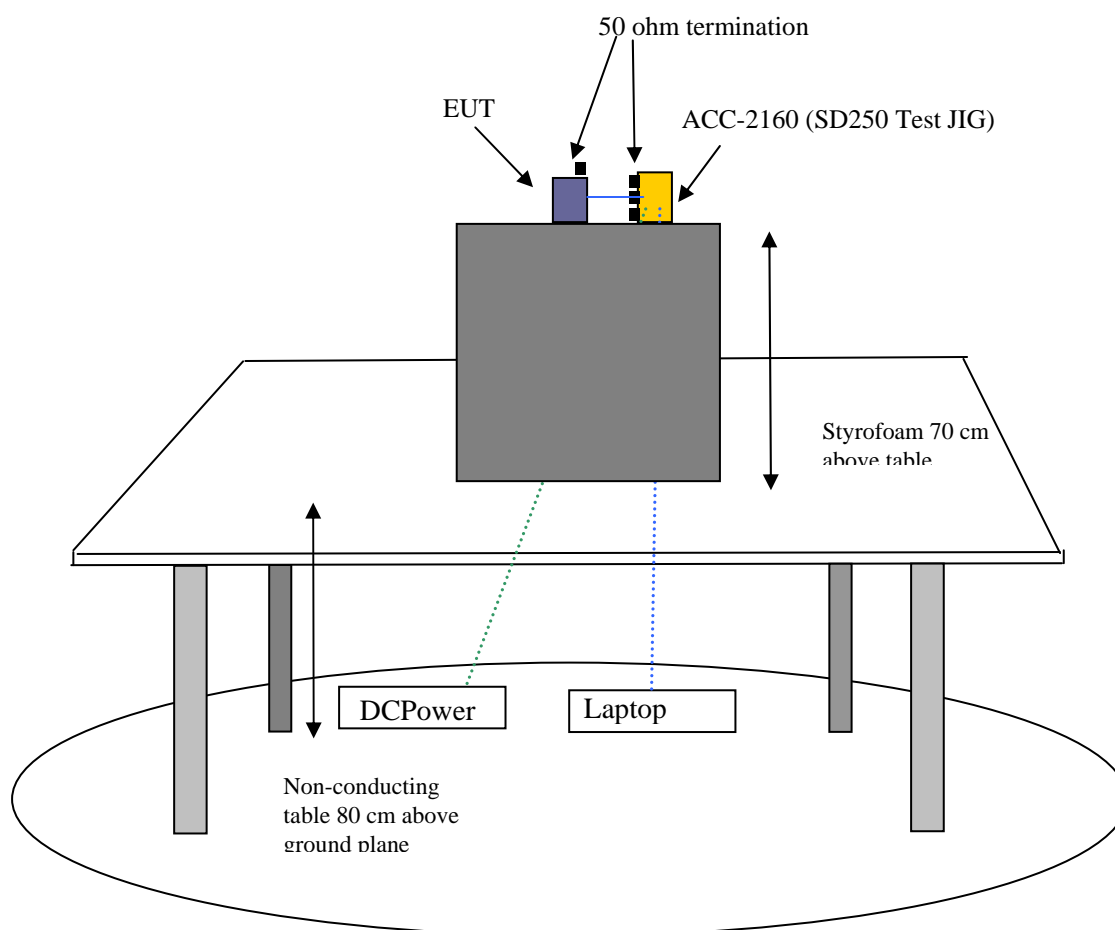

## 10.6 Test Result

Test Mode: Transmission Using substitution method

Indicated		Turntable Azimuth degrees	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Freq. (MHz)	Amp. (dBuV)		Height (cm)	Polar (H/V)	Freq. (MHz)	Level (dBm)	Antenna Cord. (dBi)	Cable Loss (dB)	Absolute Level (dBm)		
320.15	34.91	207	167	H	320.15	-68.79	0	0.66	-69.45	-13	-56.45
320.15	31.76	61	124	V	320.15	-72.21	0	0.66	-72.87	-13	-59.87
640.3	42.25	46	137	H	640.3	-55.67	0	0.66	-56.33	-13	-43.33
640.3	34.63	173	145	V	640.3	-63.29	0	0.66	-63.95	-13	-50.95

## 11 FCC §90.214 & IC RSS-119 §5.9 - Transient Frequency Behavior

### 11.1 Applicable Standard

FCC §90.214: Transmitters designed to operate in the 150–174 MHz and 421–512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals <sup>1,2</sup>	Maximum frequency difference <sup>3</sup>	All equipment
		138 to 174 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels		
t <sub>1</sub> <sup>4</sup>	±25.0 kHz	5.0 ms
t <sub>2</sub>	±12.5 kHz	20.0 ms
t <sub>3</sub> <sup>4</sup>	±25.0 kHz	5.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels		
t <sub>1</sub> <sup>4</sup>	±12.5 kHz	5.0 ms
t <sub>2</sub>	±6.25 kHz	20.0 ms
t <sub>3</sub> <sup>4</sup>	±12.5 kHz	5.0 ms

When a transmitter is turned on, the radio frequency may take some time to stabilize. During this initial period, the frequency error or frequency difference (i.e. between the instantaneous and the steady state frequencies) must not exceed the limits specified in Table 16.

Table 16 - Transient Frequency Behaviour

Channel Spacing (kHz)	Time Intervals <sup>1, 2</sup>	Maximum Frequency Difference (kHz)	Transient Duration Limit (ms)	
			138-174 MHz	406.1-512 MHz
25	$t_1$	±25	5	10
	$t_2$	±12.5	20	25
	$t_3$	±25	5	10
12.5	$t_1$	±12.5	5	10
	$t_2$	±6.25	20	25
	$t_3$	±12.5	5	10
6.25	$t_1$	±6.25	5	10
	$t_2$	±3.125	20	25
	$t_3$	±6.25	5	10

<sup>1</sup>  $t_{on}$ : the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

$t_1$ : the time period immediately following  $t_{on}$ .

$t_2$ : the time period immediately following  $t_1$ .

$t_3$ : the time period from the instant when the transmitter is turned off until  $t_{off}$ .

$t_{off}$ : the instant when the 1 kHz test signal starts to rise.

<sup>2</sup> If the transmitter carrier output power rating is 6 W or less, the frequency difference during the time periods  $t_1$  and  $t_3$  may exceed the maximum frequency difference for these time periods. The corresponding plot of frequency versus time during  $t_1$  and  $t_3$  shall be recorded in the test report.

## 11.2 Test Procedure

TIA/EIA-603-C 2.2.19

## 11.3 Test Environmental Conditions

<b>Temperature:</b>	22 °C
<b>Relative Humidity:</b>	47 %
<b>ATM Pressure:</b>	102.5 kPa

*The testing was performed by Jerry Huang on 2010-10-25 in RF site.*

## 11.4 Test Equipment List and Details


Manufacturer	Description	Model	Serial Number	Calibration Date
HP	Modulation Analyzer	8901A	2026A00847	2010-08-17
Tektronix	Digital Phosphor Oscilloscope	TDS7104	B020557	2010-06-11
HP	Generator, Signal	83650B	3614A00276	2010-06-21
BK Precision	Power Supply, DC	1621A	D185052265	N/R
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09
HP	Test Set, RF Communications	8920A	3438A05338	2010-05-18

**Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST



## 11.5 Test Results

Please refer to the following plots.

## 11.6 Test Setup Block Diagram

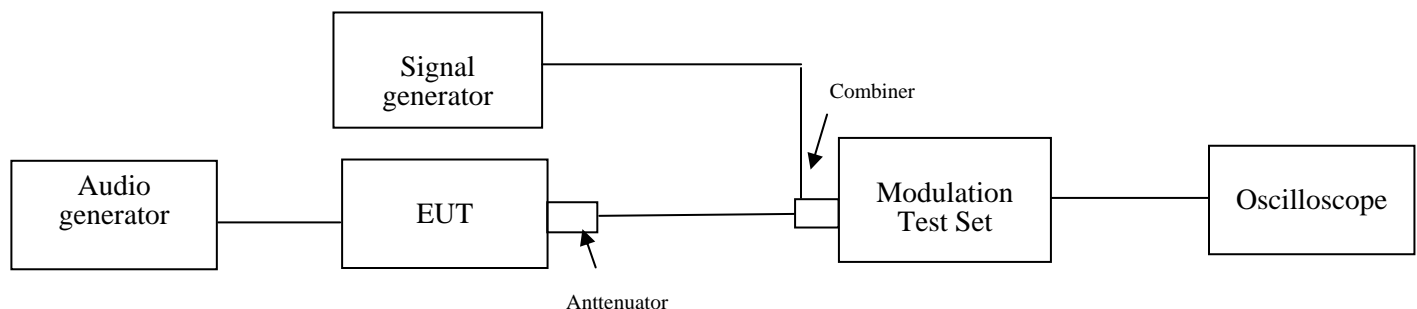


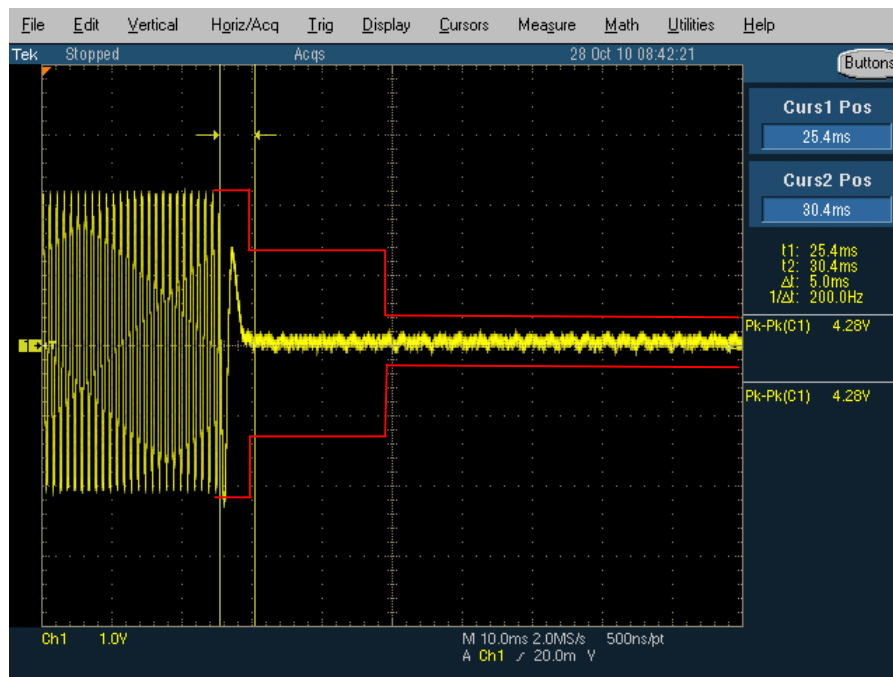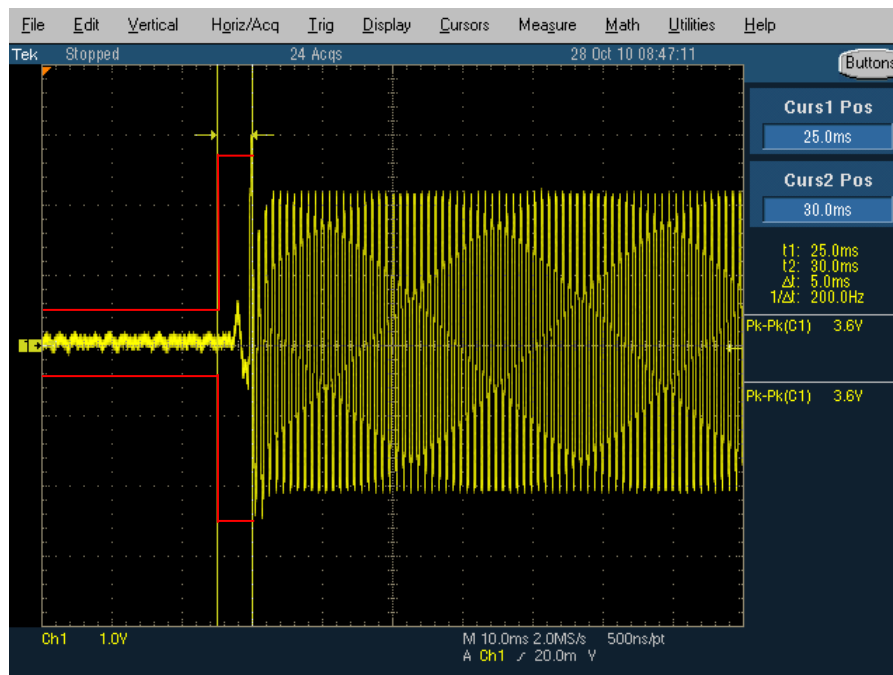


**25 kHz Channel Spacing****Powering Up****Powering Down**

## 12.5 kHz Channel Spacing

### Powering Up

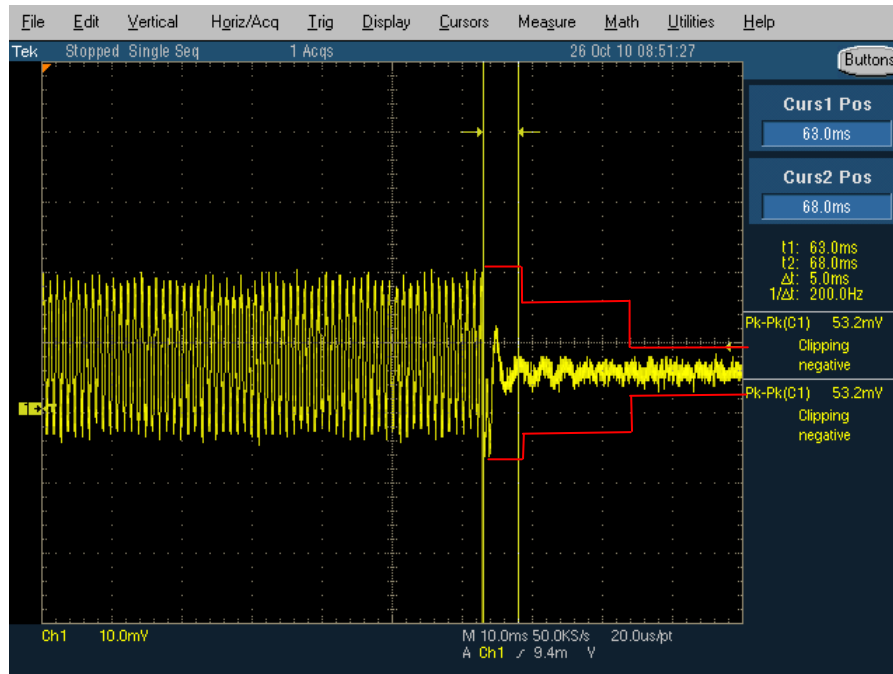

### Powering Down

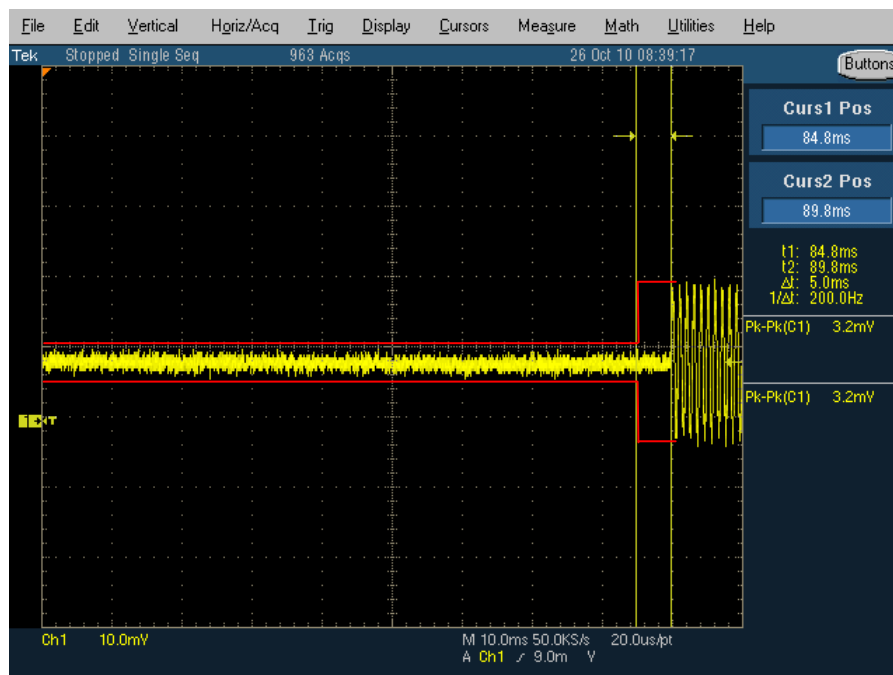

## 12 IC RSS-119 §5.11 Receiver Spurious Radiated Emissions

### 12.1 Applicable Standard

IC RSS-119 §5.11 and RSS-Gen §6


The following receiver spurious emission limits shall be complied with:

(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1.

Table 1 - Spurious Emission Limits for Receivers

Frequency (MHz)	Field Strength Microvolts/m at 3 meters
	Receivers
30-88	100
88-216	150
216-960	200
Above 960	500

### 12.2 Test Block Diagram

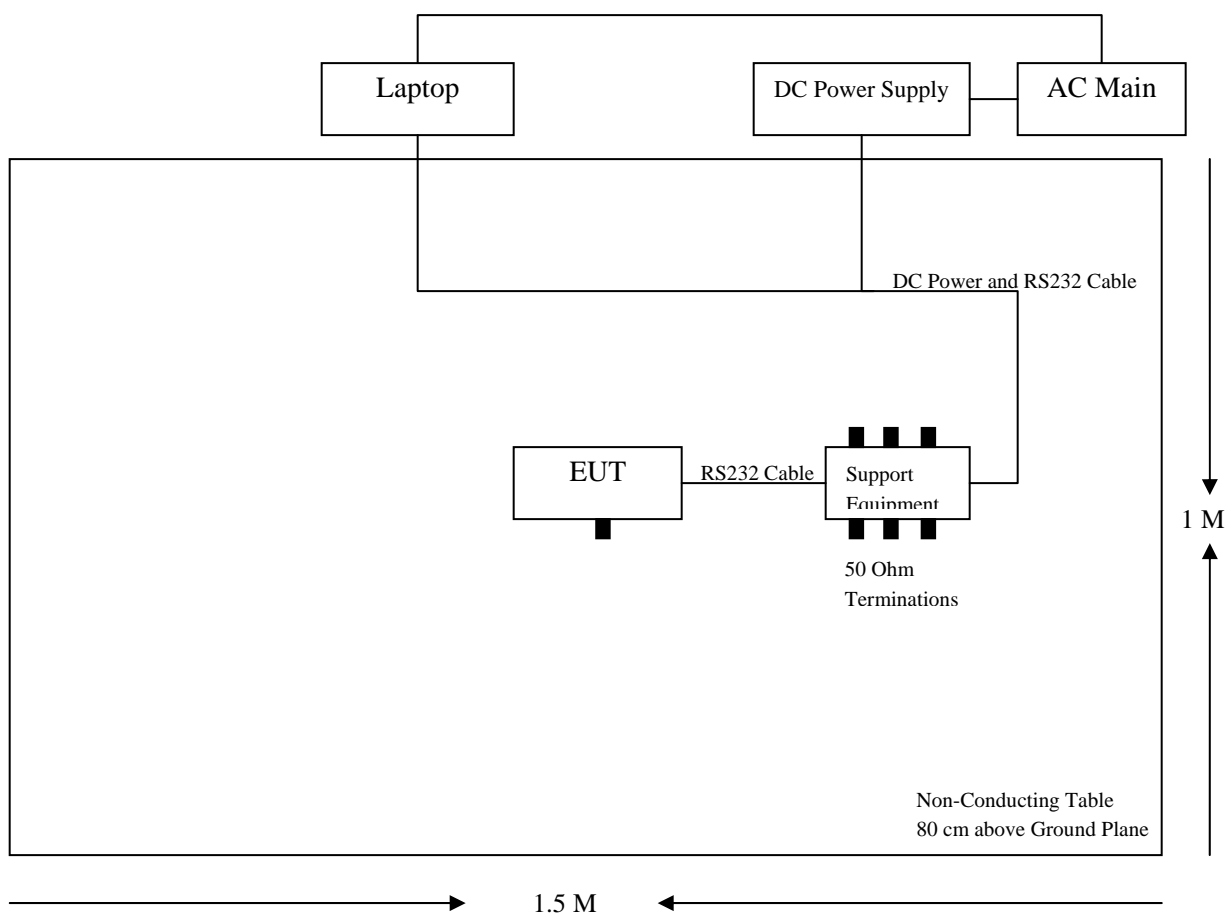

### 12.3 Test Equipment Lists and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100338	2010-06-24
Agilent	Spectrum Analyzer	E4446A	US44300386	2010-08-18
Sunol Science Corp	System Controller	SC104V	011003-1	N/R
Sunol Science Corp	Combination Antenna	JB3	A0020106-3	2010-06-16
Hewlett Packard	Pre amplifier	8447D	2944A0374	2010-06-30
A.R.A Inc	Horn antenna	DRG-1181A	1132	2009-10-27
Mini-Circuits	Pre Amplifier	ZVA-183-S	570400946	2010-05-10

**Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### 12.4 Test Environmental Conditions

<b>Temperature:</b>	24~30 °C
<b>Relative Humidity:</b>	30~42 %
<b>ATM Pressure:</b>	100.9~101.6 kPa

*The testing was performed by Jack Liu on 2010-10-21 in Chamber #3*

### 12.5 Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations.

### 12.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emissions are 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

## 12.7 Summary of Test Results

According to the test data, the EUT complied RSS-Gen, with the worst margins from the limit listed below:

Measure at 3 Meters (30 MHz – 1 GHz)


Model: Receiving			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Test Range
-8.86	133.191	Vertical	30 MHz-1 GHz

Measure at 3 Meters (Above 1 GHz)

Mode: Receiving			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Test Range
-5.14	5934.498	Vertical	1 GHz – 6 GHz

## 12.8 Radiated Spurious Emissions Plot & Data


Measured at 3 Meter Distance (30 MHz – 1 GHz)

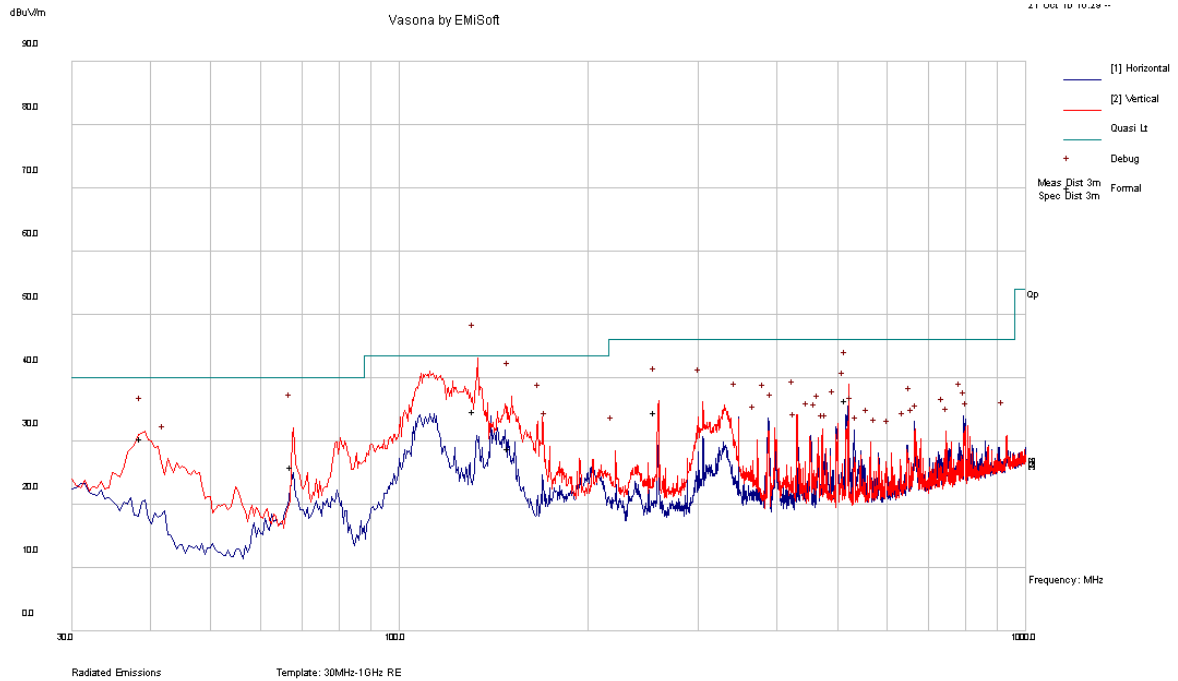

### Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
39.190	30.52	161	V	250	40.0	-9.48
68.016	25.93	178	V	254	40.0	-14.07
133.191	34.82	97	V	58	43.5	-8.68
151.011	28.8	172	V	162	43.5	-14.70
259.312	34.49	97	V	185	46.0	-11.51
521.438	36.50	97	V	102	46.0	-9.50

Measured at 3 Meter Distance (1 GHz – 6 GHz)

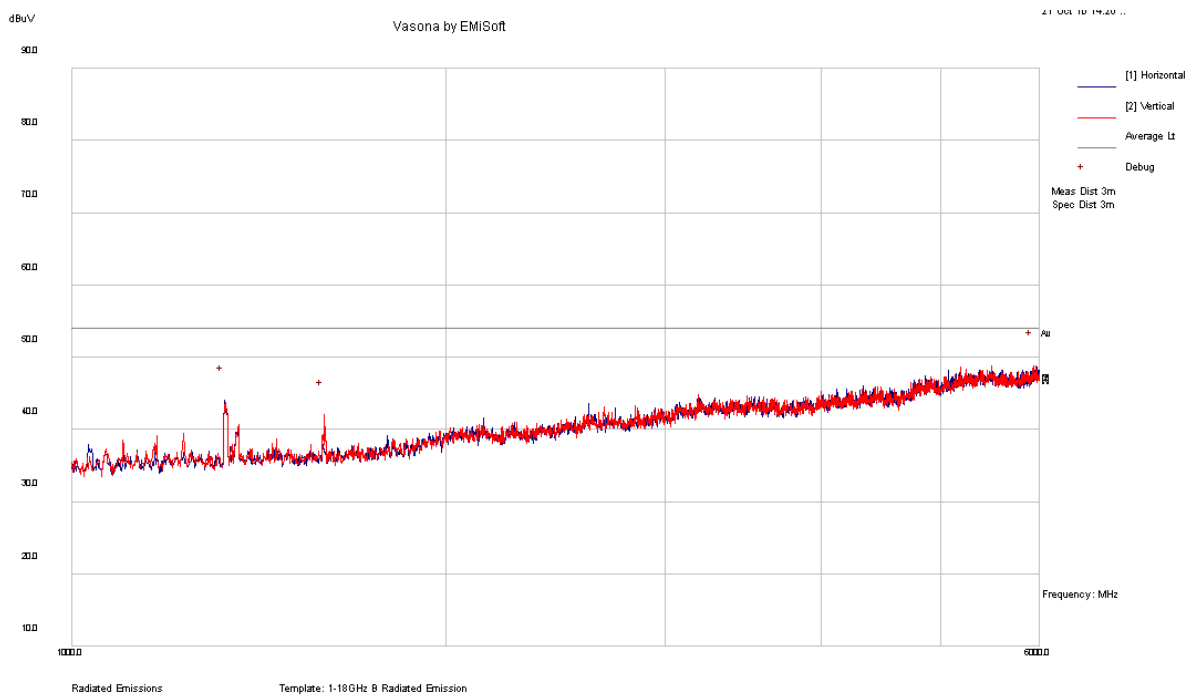

Average Measurements

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
1327.511	43.96	100	H	0	54	-10.04
1595.758	41.99	100	V	0	54	-12.01
5934.498	48.86	200	V	0	54	-5.14