

Date: 2004-02-14

TEST REPORT

Page 1 of 21

No.: HM112312

FCC PART 15 SUBPART C CERTIFICATION REPORT

FOR LOW POWER TRANSMITTER

TEST REPORT No.: HM112312

Equipment Under Test [EUT]:

Model Number:

Applicant:

FCC ID:

So Close Crib Monitor

08036

Dorel Juvenile Group

MNJ08036T

Date: 2004-02-14

TEST REPORT

Page 2 of 21

No.: HM112312

CONTENT:

| | | |
|-------------------|---|-----------------|
| Cover | Page 1 of 21 | |
| Content | Page 2-3 of 21 | |
| Conclusion | Page 4 of 21 | |
| <u>1.0</u> | <u>General Details</u> | |
| 1.1 | Test Laboratory | Page 5 of 21 |
| 1.2 | Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer | Page 5 of 21 |
| 1.3 | Equipment Under Test [EUT] Description of EUT operation | Page 6 of 21 |
| 1.4 | Date of Order | Page 6 of 21 |
| 1.5 | Submitted Sample | Page 6 of 21 |
| 1.6 | Test Duration | Page 6 of 21 |
| 1.7 | Country of Origin | Page 6 of 21 |
| 1.8 | Additional Information of EUT | Page 7 of 21 |
| <u>2.0</u> | <u>Technical Details</u> | |
| 2.1 | Investigations Requested | Page 8 of 21 |
| 2.2 | Test Standards and Results Summary | Page 8 of 21 |
| <u>3.0</u> | <u>Test Results</u> | |
| 3.1 | Emission | Page 9-18 of 21 |

Date: 2004-02-14

TEST REPORT

Page 3 of 21

No.: HM112312

Appendix A

List of Measurement Equipment

Page 19 of 21

Appendix B

Photographs

Page 20-21 of 21

Date: 2004-02-14

TEST REPORT

Page 4 of 21

No.: HM112312

CONCLUSION

The submitted product was deemed to have COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Verified by
Ivan Toa

K C Lee
for Chief Executive

Date: 2004-02-14

TEST REPORT

Page 5 of 21

No.: HM112312

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd.
EMC Laboratory
10 Dai Wang Street, Taipo Industrial Estate
New Territories, Hong Kong

1.2 Applicant Details Applicant

Dorel Juvenile Group
45 Dan Road Canton, MA 02021 USA

HKSTC Code Number for Applicant

EXE001

Manufacturer

Excel Engineering (HK) Co., Ltd.
Unit 1101, 11th fl. Lippo Sun Plaza,
28 Canton Road, Tsim Sha Tsi, Kowloon, Hong Kong.

Date: 2004-02-14

TEST REPORT

Page 6 of 21

No.: HM112312

1.3 Equipment Under Test [EUT]

Description of Sample

Product: So Close Crib Monitor
Manufacturer: Excel Engineering (HK) Co., Ltd.
Brand Name: Safety 1st
Model Number: 08036
Input Voltage: 120Va.c.

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Dorel Juvenile Group, So Close Crib Monitor. The transmitter is a 2 button transmitter. The EUT continues to transmit while button is being pressed. It is voice transmission, Modulation by Mic. and tape is frequency modulation.

1.4 Date of Order

2003-12-08

1.5 Submitted Sample(s):

2 Sample per model

1.6 Test Duration

2004-01-16

1.7 Country of Origin

China

Date: 2004-02-14

TEST REPORT

Page 7 of 21

No.: HM112312

1.8 Additional Information of EUT

| | Submitted | Not Available |
|------------------------------------|-------------------------------------|--------------------------|
| User Manual | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Part List | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Circuit Diagram | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Printed Circuit Board [PCB] Layout | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Block diagram | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC ID Label | <input checked="" type="checkbox"/> | <input type="checkbox"/> |

Date: 2004-02-14

TEST REPORT

Page 8 of 21

No.: HM112312

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:2000 for FCC Certification.

2.2 Test Standards and Results Summary Tables

| EMISSION Results Summary | | | | | | |
|--|------------------|-----------------|------------------|-------------------------------------|--------------------------|--------------------------|
| Test Condition | Test Requirement | Test Method | Class / Severity | Test Result | | |
| | | | | Pass | Failed | N/A |
| Field Strength of Fundamental Emissions & Spurious Emissions | FCC 47CFR 15.249 | ANSI C63.4:2000 | N/A | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Radiated Emissions, 30MHz to 1GHz | FCC 47CFR 15.109 | ANSI C63.4:2000 | Class B | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Conducted Emissions on AC, 0.15MHz to 30MHz | FCC 47CFR 15.207 | ANSI C63.4:2000 | Class B | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Note: N/A - Not Applicable

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


| | |
|--------------------|--------------------------|
| Test Requirement: | FCC 47CFR 15.109 Class A |
| Test Method: | ANSI C63.4:2000 |
| Test Date: | 2004-01-16 |
| Mode of Operation: | On mode |

Test Method:

The sample was placed 0.8m above the ground plane on the OATS *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: OATS [Open Area Test Site] located at HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 90657.

Test Setup:

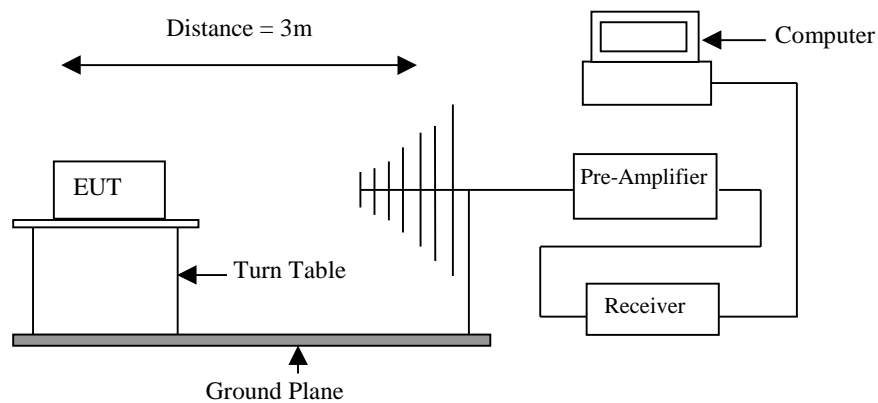

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.249]:

| Frequency Range of Fundamental [MHz] | Field Strength of Fundamental Emission [Millivolts/meter] | Field Strength of Fundamental Emission [microvolts/meter] |
|--------------------------------------|---|---|
| 902-928 | 50 | 500 |
| 2400-2483.5 | 50 | 500 |
| 5725-5875 | 50 | 500 |
| 24000-22500 | 250 | 2500 |

Results: Channel 1

| Field Strength of Fundamental Emissions Peak Value | | | | | | |
|---|------------------------------------|-----------------------------------|--------------------------------|-----------------------------|------------------------|---------------------|
| Frequency MHz | Measured Level @3m dB μ V/m | Correction Factor dB μ V/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit @3m μ V/m | E-Field Polarity |
| 906.00 | 58.3 | 30.0 | 88.3 | 26,001.6 | 50,000.0 | Vertical |

| Field Strength of Spurious Emissions Peak Value | | | | | | |
|--|------------------------------------|-----------------------------------|--------------------------------|-----------------------------|------------------------|---------------------|
| Frequency MHz | Measured Level @3m dB μ V/m | Correction Factor dB μ V/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit @3m μ V/m | E-Field Polarity |
| 1812.00 | < 1.0 | 24.9 | < 25.9 | < 19.7 | 5,000.0 | Vertical |
| + 2718.00 | < 1.0 | 29.8 | < 30.8 | < 34.7 | 5,000.0 | Vertical |
| + 3624.00 | < 1.0 | 32.2 | < 33.2 | < 45.7 | 5,000.0 | Vertical |
| + 4530.00 | < 1.0 | 38.8 | < 39.8 | < 97.7 | 5,000.0 | Vertical |
| + 5436.00 | < 1.0 | 17.4 | < 18.4 | < 8.3 | 5,000.0 | Vertical |
| 6342.00 | < 1.0 | 17.2 | < 18.2 | < 8.1 | 5,000.0 | Vertical |
| 7248.00 | < 1.0 | 18.8 | < 19.8 | < 9.8 | 5,000.0 | Vertical |
| + 8154.00 | < 1.0 | 19.7 | < 20.7 | < 10.8 | 5,000.0 | Vertical |
| + 9060.00 | < 1.0 | 20.6 | < 21.6 | < 12.0 | 5,000.0 | Vertical |

Date: 2004-02-14

TEST REPORT

Page 11 of 21

No.: HM112312

Results: Channel 2

| Field Strength of Fundamental Emissions | | | | | | |
|---|---------------------------------------|--------------------------------------|-----------------------------------|--------------------------------|---------------------------|---------------------|
| Peak Value | | | | | | |
| Frequency MHz | Measured Level @3m dB μ V/m | Correction Factor dB μ V/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit @3m μ V/m | E-Field Polarity |
| 906.69 | 58.4 | 30.0 | 88.4 | 26,302.7 | 50,000.0 | Vertical |

| Field Strength of Spurious Emissions | | | | | | |
|--------------------------------------|---------------------------------------|--------------------------------------|-----------------------------------|--------------------------------|------------------------|---------------------|
| Peak Value | | | | | | |
| Frequency MHz | Measured Level @3m dB μ V/m | Correction Factor dB μ V/m | Field Strength dB μ V/m | Field Strength μ V/m | Limit @3m μ V/m | E-Field Polarity |
| 1813.38 | < 1.0 | 24.9 | < 25.9 | < 19.7 | 5,000.0 | Vertical |
| + 2720.07 | < 1.0 | 29.8 | < 30.8 | < 34.7 | 5,000.0 | Vertical |
| + 3626.76 | < 1.0 | 32.2 | < 33.2 | < 45.7 | 5,000.0 | Vertical |
| + 4533.45 | < 1.0 | 38.8 | < 39.8 | < 97.7 | 5,000.0 | Vertical |
| + 5440.14 | < 1.0 | 17.4 | < 18.4 | < 8.3 | 5,000.0 | Vertical |
| 6346.83 | < 1.0 | 17.2 | < 18.2 | < 8.1 | 5,000.0 | Vertical |
| + 7253.52 | < 1.0 | 18.8 | < 19.8 | < 9.8 | 5,000.0 | Vertical |
| + 8160.21 | < 1.0 | 19.7 | < 20.7 | < 10.8 | 5,000.0 | Vertical |
| + 9066.90 | < 1.0 | 20.6 | < 21.6 | < 12.0 | 5,000.0 | Vertical |

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz \pm 5.7dB

Date: 2004-02-14

TEST REPORT


Page 12 of 21

No.: HM112312

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.249]:

| |
|--|
| Frequency Range of Fundamental [MHz] |
| 902-928 |

Upper Frequency of Fundamental

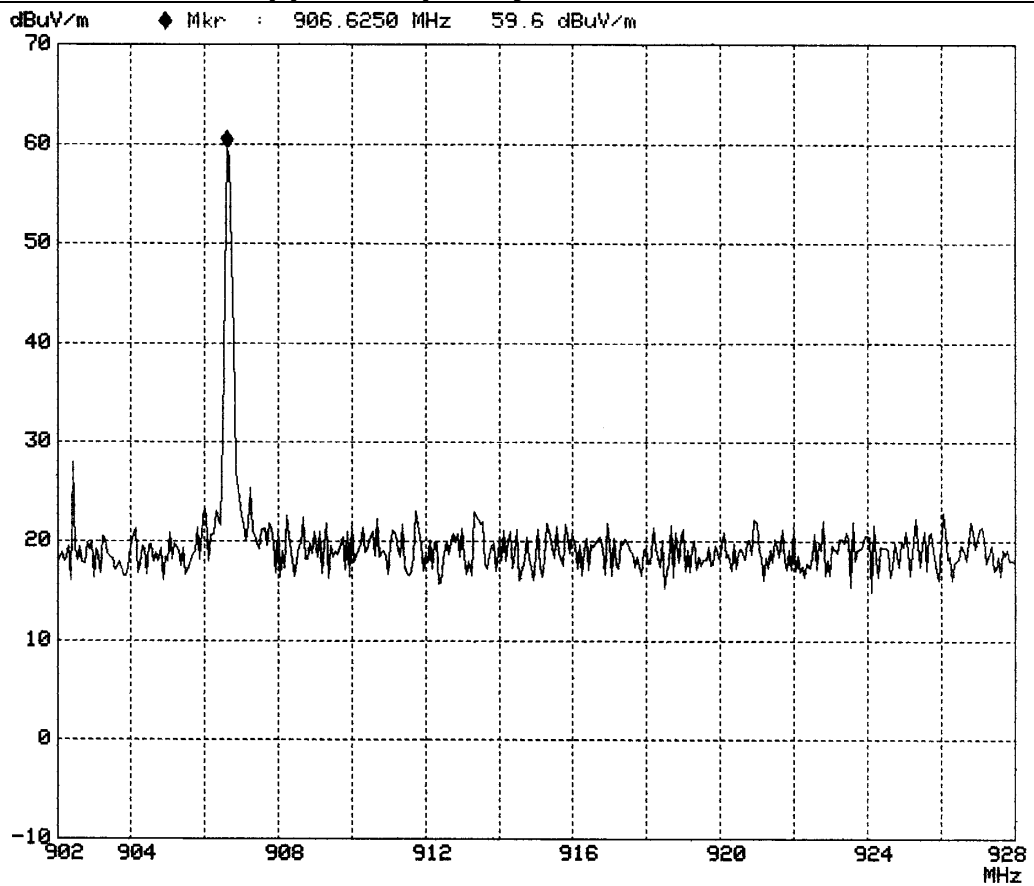

Date: 2004-02-14

TEST REPORT


Page 13 of 21

No.: HM112312

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.249]:

| |
|--|
| Frequency Range of Fundamental [MHz] |
| 902-928 |

Upper Frequency of Fundamental

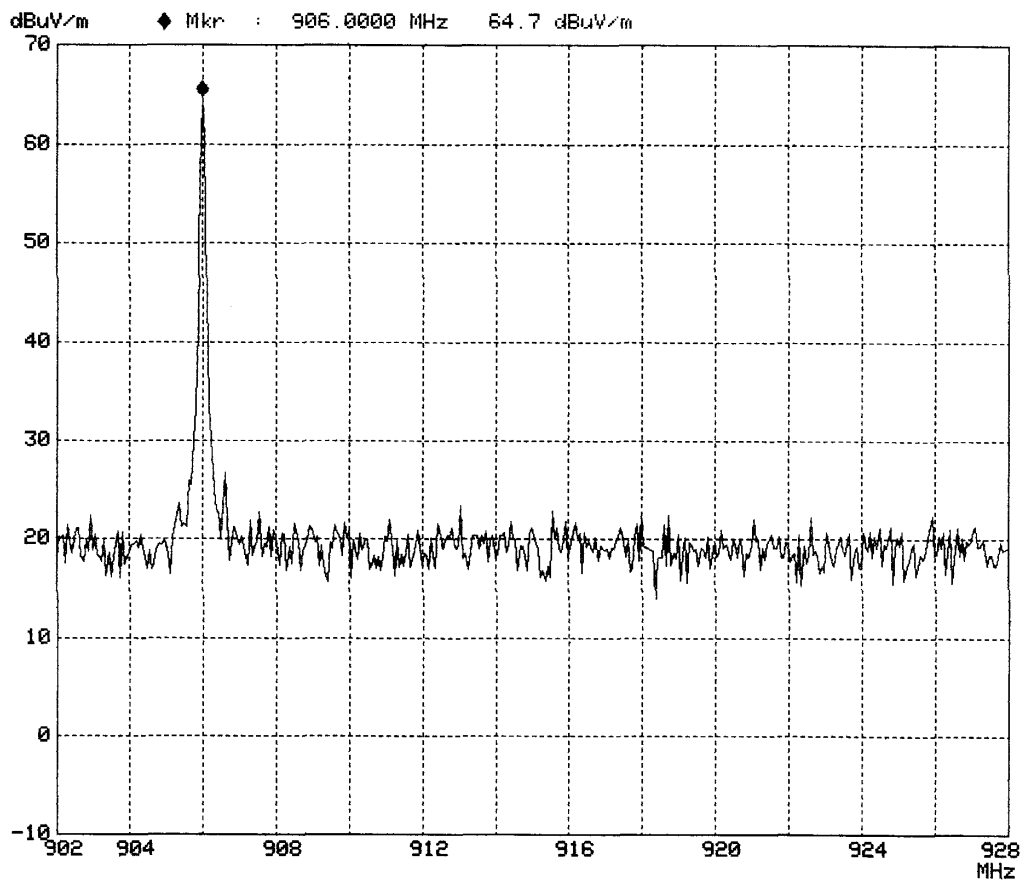

Date: 2004-02-14

TEST REPORT

Page 14 of 21

No.: HM112312

Limits for Radiated Emissions [FCC 47 CFR 15.109 Class B]:

| Frequency Range [MHz] | Quasi-Peak Limits [$\mu\text{V}/\text{m}$] |
|--------------------------|---|
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above960 | 500 |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results:

| Radiated Emissions Quasi-Peak | | | | | |
|---|---------------------|---|---|--|--|
| Emission Frequency MHz | E-Field Polarity | Level @3m dB $\mu\text{V}/\text{m}$ | Limit @3m dB $\mu\text{V}/\text{m}$ | Level @3m @3m $\mu\text{V}/\text{m}$ | Limit @3m $\mu\text{V}/\text{m}$ |
| NO EMISSION DETECTED WITH 20dB OF THE FCC LIMITS | | | | | |

Calculated measurement uncertainty : 30MHz to 1GHz $\pm 5.7\text{dB}$

Date: 2004-02-14

TEST REPORT

Page 15 of 21

No.: HM112312


3.1.2 Conducted Emissions (0.15MHz to 30MHz)

| | |
|--------------------|------------------|
| Test Requirement: | FCC 47CFR 15.207 |
| Test Method: | ANSI C63.4:2000 |
| Test Date: | 2004-01-16 |
| Mode of Operation: | On mode |

Test Method:

The test was performed in accordance with ANSI C63.4:2000, with the following: an initial measurement was performed in peak and average detection mode on the live line. Any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Test Setup:

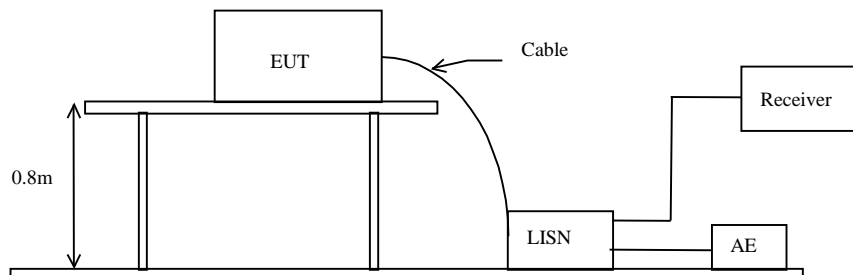


Limits for Conducted Emissions (FCC 47 CFR 15.107):

| Frequency Range [MHz] | Quasi-Peak Limits [dB μ V] | Average [dB μ V] |
|--------------------------|-----------------------------------|-------------------------|
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5.0 | 56 | 46 |
| 5.0-30.0 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram labelled as (QP and AV).

Results: Channel 1

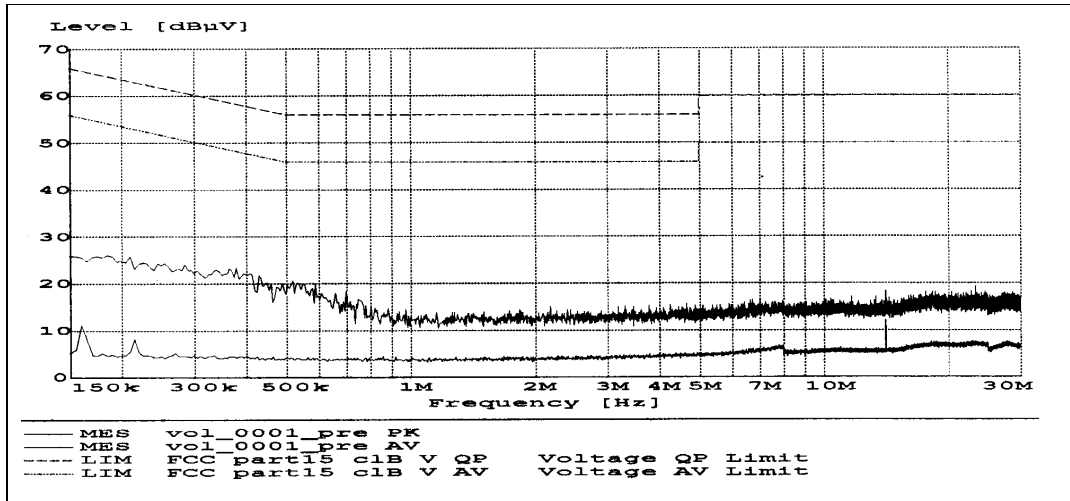

Date: 2004-02-14

TEST REPORT

Page 17 of 21

No.: HM112312

Results: Channel 1

| Conductor Live or Neutral | Frequency MHz | Quasi-peak | | Average | |
|------------------------------|------------------|---------------------|---------------------|---------------------|---------------------|
| | | Level dB μ V | Limit dB μ V | Level dB μ V | Limit dB μ V |
| Live | 0.415 | 20.7 | 58.0 | -*- | -*- |
| Live | 0.545 | 20.0 | 56.0 | -*- | -*- |
| Live | 0.625 | 20.2 | 56.0 | -*- | -*- |
| Live | 0.740 | 16.7 | 56.0 | -*- | -*- |
| Live | 14.155 | -*- | -*- | 22.8 | 50.0 |

Remarks:

Calculated measurement uncertainty : ± 3.9 dB

-*- Emission greater than 30dB below limit line.


Limits for Conducted Emissions (FCC 47 CFR 15.107):

| Frequency Range [MHz] | Quasi-Peak Limits [dBμV] | Average [dBμV] |
|-----------------------|--------------------------|----------------|
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5.0 | 56 | 46 |
| 5.0-30.0 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram labelled as (QP and AV).

Results: Channel 2

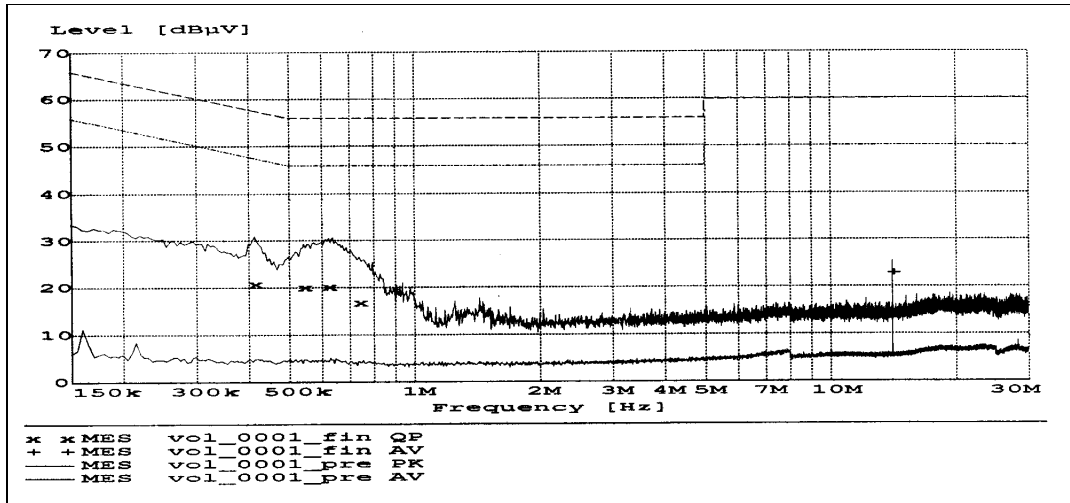

Results:

| Conductor Live or Neutral | Frequency MHz | Quasi-peak | | Average | |
|---|------------------|---------------|---------------|---------------|---------------|
| | | Level dBμV | Limit dBμV | Level dBμV | Limit dBμV |
| NO EMISSION DETECTED WITHIN 20dB OF THE FCC LIMITS | | | | | |

Remarks:

Calculated measurement uncertainty: ±3.9dB

-* - Emission greater than 30dB below limit line.

Date: 2004-02-14

TEST REPORT

Page 19 of 21

No.: HM112312

Appendix A**Test Equipment Audit****Radiated Emission**

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL |
|---------|--|---|--------------------------------|--|----------|
| EM007 | SPECTRUM ANALYZER | HEWLETT PACKARD | HP85660B | 3144A21192 | 14/03/03 |
| EM008 | SPECTRUM ANALYZER DISPLAY | HEWLETT PACKARD | HP85662A | 3144A20514 | 14/03/03 |
| EM009 | QUASI PEAK ADAPTOR | HEWLETT PACKARD | HP85650A | 3303A01702 | 14/03/03 |
| EM010 | RF PRESELECTOR | HEWLETT PACKARD | HP85685A | 3221A01410 | 14/03/03 |
| EM011 | ATTENUATOR/SWITCH | HEWLETT PACKARD | HP11713A | 2508A10595 | 14/03/03 |
| EM012 | PRE-AMPLIFIER | HEWLETT PACKARD | HP8449B | 3008A00262 | 14/03/03 |
| EM013 | CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE | HEWLETT PACKARD HEWLETT PACKARD HEWLETT PACKARD | HP9000 HP A1097C HP9133L | 6226A60314 3151J39517 2623A02468 | CM |
| EM020 | HORN ANTENNA | EMCO | 3115 | 4032 | 19/07/00 |
| EM022 | LOOP ANTENNA | EMCO | 6502 | 1189-2424 | 04/08/00 |
| EM072 | SIGNAL GENERATOR | HEWLETT PACKARD | 8640B | 1948A11892 | N/A |
| EM083 | HKSTC OPEN AREA TEST SITE | HKSTC | N/A | N/A | 08/11/02 |
| EM131 | PORTABLE SPECTRUM ANALYSER | HEWLETT PACKARD | 8595EM | 3710A00155 | 18/12/01 |
| EM145 | EMI TEST RECEIVER | R & S | ESCS 30 | 830245/021 | 02/08/03 |
| EM194 | BICONILOG ANTENNA | EMCO | 3142B | 1795 | 14/05/02 |
| EM195 | ANTENNA POSITIONING MAST | EMCO | 2075 | 2368 | N/A |
| EM196 | MULTI-DEVICE CONTROLLER | EMCO | 2090 | 1662 | N/A |

Conducted Emission

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL |
|---------|-------------------------------------|----------------------------------|------------|---------------------|----------|
| EM078 | VARIAC | SHANGHAI VOLTAGE | TDGC-3/0.5 | N/A | CM |
| EM081 | SMALL SCREENED ROOM | MIKO INST HK | N/A | N/A | 18/10/02 |
| EM119 | LISN | R & S | ESH3-Z5 | 0831.5518.5 2 | 01/10/02 |
| EM127 | ISOLATION TRANSFORMER 220 TO 300 | WING SUN | N/A | N/A | CM |
| EM142 | PULSES LIMITER | R & S | ESH3Z2 | 357.8810.52 | 03/07/02 |
| EM181 | EMI TEST RECEIVER | R & S | ESIB7 | 100072 | 28/11/01 |
| EM154 | SHIELDING ROOM | SIEMENA MATSUSHITA COMPONENTS | N/A | 803-740-057- 99A | 18/10/02 |
| EM197 | LISN | EMCO | 4825/2 | 1193 | 08/04/03 |

Remarks:

CM Corrective Maintenance
N/A Not Applicable or Not Available
TBD To Be Determined

Appendix B

Photographs of EUT

Front View of the product




Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View

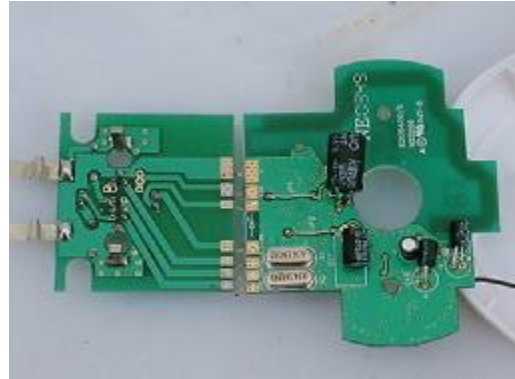

Photographs of EUT

Measurement of Radiated Emission Test Set Up



Measurement of Conducted Emission Test Set Up

