



Global Product Certification
EMC-EMF Safety Approvals

Melbourne

176 Harrick Road
Keilor Park, Vic 3042
Tel: +61 3 9365 1000

Sydney

Unit 3/87 Station Road
Seven Hills, NSW 2147
Tel: +61 2 9624 2777

Email: emc-general@emctech.com.au

Web: www.emctech.com.au

RADIO REPORT FOR CERTIFICATION

REPORT NUMBER: M180429-5

**TEST STANDARD: FCC PART 15 SUBPART C
SECTION 15.249**

ISED RSS-210, SECTION B.10

**CLIENT: LASERFORCE
INTERNATIONAL PTY LTD**

DEVICE: LASERFORCE BATTLESUIT

MODEL: LF900

DATE OF ISSUE: 3 APRIL 2019

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



Accreditation No.5292

Accredited for compliance with ISO/IEC 17025 – Testing. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, medical testing, calibration and inspection reports.

This document shall not be reproduced except in full.



Equipment Under Test: Laserforce Battlesuit

CONTENTS

1	Test Summary	6
2	Test Facility	6
2.1	General	6
2.2	NATA Accreditation	6
3	Test Equipment Calibration	7
4	Measurement Uncertainty	7
5	Device Details.....	8
5.1	EUT (Transmitter) Details.....	8
5.2	EUT (Host) Details.....	8
5.3	Test Configuration	8
5.4	Modifications.....	8
6	Results.....	9
6.1	§15.203/ RSS-Gen 6.8 Antenna Requirement	9
6.2	§15.207/ RSS-Gen 8.8 Conducted Emission Limits.....	9
6.3	§15.209/ RSS-Gen 8.9 Radiated emission limits; general requirements	9
6.4	§15.249(a)/ RSS-210 B.10(a) Field strength of fundamental.....	9
6.4.1	Test Procedure	9
6.4.2	Limits.....	9
6.4.3	Duty cycle correction factor	10
6.4.4	Results	10
6.5	§15.249 (a) & (d)/ RSS-210 B.10 (a) & (b) Harmonics and Out-of-Band/ Spurious Emissions.....	12
6.5.1	Test procedure.....	12
6.5.2	Evaluation of field strength	13
6.5.3	Limits.....	13
6.5.4	Results: Frequency Band: 9 kHz - 30 MHz	13
6.5.5	Results: Frequency Band: 30 - 1000 MHz.....	15
6.5.6	Results: Frequency Band: 1000 – 18000 MHz.....	18
6.5.7	Results: Frequency Band: 18000 - 25000 MHz.....	21
6.5.8	§15.249 Band Edge Emission Measurements	23
6.6	§2.1093/ RSS-102 Radiofrequency radiation exposure evaluation	25
6.7	§15.215/ RSS-Gen 6.7 Occupied Bandwidth – 99% power	25
6.7.1	Test procedure.....	25
6.7.2	Limits.....	25
6.7.3	Results	25

GRAPHS

Graph 6-1: Fundamental Field Strength – Peak measurement, EUT z-axis, Measurement antenna – Horizontal polarisation, Low channel – 2402 MHz	11
Graph 6-2: Fundamental Field Strength – Peak measurement, EUT z-axis, Measurement antenna – Horizontal polarisation, Middle channel – 2440 MHz	11
Graph 6-3: Fundamental Field Strength – Peak measurement, EUT z-axis, Measurement antenna – Horizontal polarisation, High channel – 2480 MHz	12
Graph 6-4: Spurious Emissions, 9 kHz – 30 MHz, Low channel – 2402 MHz	13
Graph 6-5: Spurious Emissions, 9 kHz – 30 MHz, Middle Channel – 2440 MHz	14
Graph 6-6: Spurious Emissions, 9 kHz – 30 MHz, High Channel – 2480 MHz.....	14
Graph 6-7: Spurious Emissions, 30 – 1000 MHz, Low channel, 2402 MHz	15
Graph 6-8: Spurious Emissions, 30 - 1000 MHz, Middle channel 2440 MHz	16
Graph 6-9: Spurious Emissions, 30 – 1000 MHz, High channel 2480 MHz.....	17
Graph 6-10: Spurious Emissions, 1000 - 18000 MHz, Low channel 2402 MHz	18
Graph 6-11: Spurious Emissions, 1000 - 18000 MHz, Middle channel 2440 MHz	19
Graph 6-12: Spurious Emissions, 1000 - 18000 MHz, High channel 2480 MHz	20
Graph 6-13: Spurious Emissions, 18000 - 25000 MHz, Low channel 2402 MHz	21
Graph 6-14: Spurious Emissions, 18000 - 25000 MHz, Middle Channel 2440 MHz	21
Graph 6-15: Spurious Emissions, 18000 - 25000 MHz, High channel 2480 MHz	22
Graph 6-16: Higher band-edge 2483.5 MHz, Peak, High channel 2480 MHz	23
Graph 6-17: Lower band edge 2400 MHz, Peak, Low channel 2402 MHz	24
Graph 6-18: Occupied bandwidth – Low channel 2402 MHz	25
Graph 6-19: Occupied bandwidth – Middle channel 2440 MHz	26
Graph 6-20: Occupied bandwidth – High channel 2480 MHz	26

TABLES

Table 6-1: Spurious Emissions, 30 - 1000 MHz, Low channel, 2402 MHz	15
Table 6-2: Spurious Emissions, 30 - 1000 MHz, Middle channel 2440 MHz	16
Table 6-3: Spurious Emissions, 30 - 1000 MHz, High channel 2480 MHz	17
Table 6-4: Spurious Emissions, 1000 - 18000 MHz, Low channel 2402 MHz	18
Table 6-5: Spurious Emissions, 1000 - 18000 MHz, Middle channel 2440 MHz	19
Table 6-6: Spurious Emissions, 1000 - 18000 MHz, High channel 2480 MHz	20
Table 6-7: Higher band-edge 2483.5 MHz, High channel 2480 MHz	23
Table 6-8: Lower band-edge 2400 MHz, Low channel 2402 MHz	24

CERTIFICATE OF COMPLIANCE

Device: Laserforce Battlesuit
Model Number: LF900
Serial Number: 25121
Manufacturer: Laserforce International Pty Ltd

FCC ID: MOQ-LF900
IC: 9262A- LF900

Tested for: Laserforce International Pty Ltd
Address: 55 Ipswich Road, Brisbane QLD 4102 Australia
Phone Number: +61 7 3891 6337
Contact: Paul McGougan
Email: paul@laserforcetag.com


Standard: FCC Part 15, Subpart C, Section 15.249 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz and 24.0-24.25 GHz

ISED RSS-210, Section B.10 Bands 902-928 MHz, 2400-2483.5 MHz and 5725-5875 MHz

Result: The test sample complied with applicable requirements of the above standards.

Test Date(s): 15 Aug, 3-5, 13 Sep & 1 Oct 2018

Issue Date: 3 April 2019

Test Engineer(s): 
Wilson Xiao

Attestation: *I hereby certify that the device(s) described herein were tested as described in this report and that the data included is that which was obtained during such testing.*

Authorised Signatory: 
Shabbir Ahmed, PhD
Senior EMC and RF Engineer
EMC Technologies Pty Ltd

Issued by: EMC Technologies Pty. Ltd.,
176 Harrick Road, Keilor Park, VIC, 3042, Australia.

Phone: +61 3 9365 1000

E-mail: emc-general@emctech.com.au

Web: www.emctech.com.au



This document shall not be reproduced except in full.

RADIO REPORT FOR CERTIFICATION

1 TEST SUMMARY

Section	Description	FCC	ISED	Result(s)
6.1	Antenna Requirement	§15.203	§RSS-Gen 6.8	Complied
6.2	Conducted emission limits	§15.207	§RSS-Gen 8.8	Not Applicable
6.3	Radiated emission limits; general requirements	§15.209	§RSS-Gen 8.9	Complied
6.4	Field strength of fundamental	§15.249 (a)	§RSS-210 B.10(a)	Complied
6.5	Harmonics and Out-of-Band/ Spurious Emissions	§15.249 (a) & (d)	§RSS-210 B.10(a) & (b)	Complied
6.6	Radiofrequency radiation exposure evaluation	§2.1093	§RSS-102	Complied
6.7	Occupied Bandwidth – 99% power	§15.215	§RSS-Gen 6.7	Complied

2 TEST FACILITY

2.1 General

EMC Technologies Pty Ltd is accredited by the FCC as a test laboratory able to perform compliance testing for the public. EMC Technologies Pty Ltd has also been accredited as a Conformity Assessment Body (CAB) by Australian Communications and Media Authority (ACMA) under the APECTEL MRA and is designated to perform compliance testing on equipment subject to Declaration of Conformity (DoC) and Certification under Parts 15 and 18 of the FCC Commission's rules – **Registration Number 494713 & Designation number AU0001.**

EMC Technologies Pty Ltd is also an ISED Canada recognized testing laboratory – **Industry Canada Company Number - IC 3569B and CAB identifier number: AU0001.**

2.2 NATA Accreditation

NATA is the Australian National laboratory accreditation body and has accredited EMC Technologies to operate to the IEC/ISO17025 requirements. A major requirement for accreditation is the assessment of the company and its personnel as being technically competent in testing to the standards. This requires fully documented test procedures, continued calibration of all equipment to the National Standard at the National Measurements Institute (NMI) and an internal quality system similar to ISO 9002. NATA has mutual recognition agreements with the National Voluntary Laboratory Accreditation Program (NVLAP) and the American Association for Laboratory Accreditation (A²LA).

All testing in this report has been conducted in accordance with EMC Technologies' scope of NATA accreditation to ISO 17025 for both testing and calibration and ISO 17020 for Inspection – **Accreditation Number 5292.**

The current full scope of accreditation can be found on the NATA website: www.nata.com.au

3 TEST EQUIPMENT CALIBRATION

Measurement instrumentation and transducers were calibrated in accordance with the applicable standards by an independent NATA registered laboratory such as Agilent Technologies (Australia) Pty Ltd or the National Measurement Institute (NMI) or in-house. All equipment calibration is traceable to Australian national standards at the National Measurements Institute.

Equipment Type	Make/Model/Serial Number	Last Cal. dd/mm/yyyy	Due Date dd/mm/yyyy	Cal. Interval
Chamber	Frankonia SAC-3-2 (R-144)	17/07/2017	17/07/2020	1 Year* ¹
EMI Receiver	R&S ESW26 Sn: 101306 (R-143)	14/05/2018	14/05/2019	1 Year* ²
Antennas	EMCO 6502 Active Loop 9 kHz – 30 MHz Sn. 9311-2801 (A-231)	15/08/2018	15/08/2021	3 Year* ²
	SUNOL JB1 Sn. A061917 (A-425)	21/07/2017	21/07/2019	2 Year* ²
	EMCO 3115 Double Ridge Horn Sn: 8908-3282 (A-004)	15/07/2016	15/07/2019	3 Year* ¹
Cables* ⁴	Huber & Suhner Sucoflex 104A Sn: 503055 (C-457)	02/01/2018	02/01/2019	1 Year* ¹
	Huber & Suhner Sucoflex 104A Sn: 507099 (C-479)	10/01/2018	10/01/2019	1 Year* ¹
	Huber & Suhner Sucoflex 104A Sn: 503061 (C-463)	03/01/2018	03/01/2019	1 Year* ¹

Note *1. Internal NATA calibration.

Note *2. External NATA / A2LA calibration.

Note *3. Calibration date was valid during the time of testing.

Note *4. Cables are verified before measurements are taken.

4 MEASUREMENT UNCERTAINTY

EMC Technologies has evaluated the equipment and the methods used to perform the emissions testing. The estimated measurement uncertainties for emissions tests shown within this report are as follows:

Conducted Emissions: 9 kHz to 30 MHz ± 3.2 dB

Radiated Emissions:

9 kHz to 30 MHz	± 4.1 dB
30 MHz to 300 MHz	± 5.1 dB
300 MHz to 1000 MHz	± 4.7 dB
1 GHz to 18 GHz	± 4.6 dB

Peak Output Power: ± 1.5 dB

The above expanded uncertainties are based on standard uncertainties multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

5 DEVICE DETAILS

(Information supplied by the Client)

The Laserforce Battlesuit is part of the laser-tag system. The Battlesuit is a player worn vest (with phaser gun) that communicates wirelessly with a base station unit.

5.1 EUT (Transmitter) Details

Radio:	2.4 GHz transmitter (nRF52832)
Operating Frequency Range:	2402 -2480 MHz
Modulation:	GFSK
Manufacturer:	Nordic Semiconductor
Antenna:	Integral PCB trace antenna
Antenna gain:	Unknown
Highest frequency related to the transmitter circuit	2480 MHz

5.2 EUT (Host) Details

Test Sample:	Laserforce Battlesuit
Model Number:	LF900
Serial Number:	25121
Manufacturer:	Laserforce International Pty Ltd.
Supply Rating:	12.8 V DC, 3.2 Ah LiFePO4 battery

5.3 Test Configuration

Testing was performed with the EUT set to transmit continuously (with modulation applied).

5.4 Modifications

No modification was required to achieve compliance.

6 RESULTS

6.1 §15.203/ RSS-Gen 6.8 Antenna Requirement

The Laserforce Battlesuit 2.4 GHz transmitter incorporates an integral PCB trace antenna that cannot be replaced by another type.

Antenna Type: PCB trace

Antenna gain: Unknown

Connector: Not Applicable

6.2 §15.207/ RSS-Gen 8.8 Conducted Emission Limits

Conducted emissions testing of the Laserforce Battlesuit is not applicable as the EUT is powered by internal DC battery.

6.3 §15.209/ RSS-Gen 8.9 Radiated emission limits; general requirements

Provisions of §15.209/ RSS-Gen 8.9 radiated emissions limits have been met, refer to section 6.5

6.4 §15.249(a)/ RSS-210 B.10(a) Field strength of fundamental

6.4.1 Test Procedure

The field strength of the fundamental transmitted frequency was measured inside a semi-anechoic chamber compliant with ANSI C63.4: 2014.

The EUT was positioned on a test turn-table and rotated through 360° to determine the highest emissions. The measurement antenna was also varied between 1 and 4 metres height. A calibrated horn antenna was used for measurement. Different orientations of the EUT (x, y and z-axis) and measurement antenna polarisations (vertical and horizontal) were investigated to produce the highest emission EIRP.

All measurements were made at a distance of 3 metres. The fundamental emissions were measured using a peak detector.

6.4.2 Limits


According to §15.249(a)/ RSS-210 B.10(a), the field strength of emissions from intentional radiators operated within the frequency band of interest shall comply with the following:

Fundamental frequency	Field strength of fundamental
2400-2483.5 MHz	50 mV/m or 94 dBuV/m

Note: Field strength limits are based on average limits for frequencies above 1000 MHz. However, the peak field strength of emissions shall not exceed the maximum permitted average limits by more than 20 dB under any condition of modulation.

6.4.3 Duty cycle correction factor

The Laserforce Battlesuits communicate with a Laserforce Base Station. The Laserforce Battlesuit transmits in pulses. The maximum duty cycle of the Laserforce Battlesuit under normal operation was measured to calculate the duty cycle correction factor. The measurement method outlined in section 7.5 of ANSI C63.10 was used.

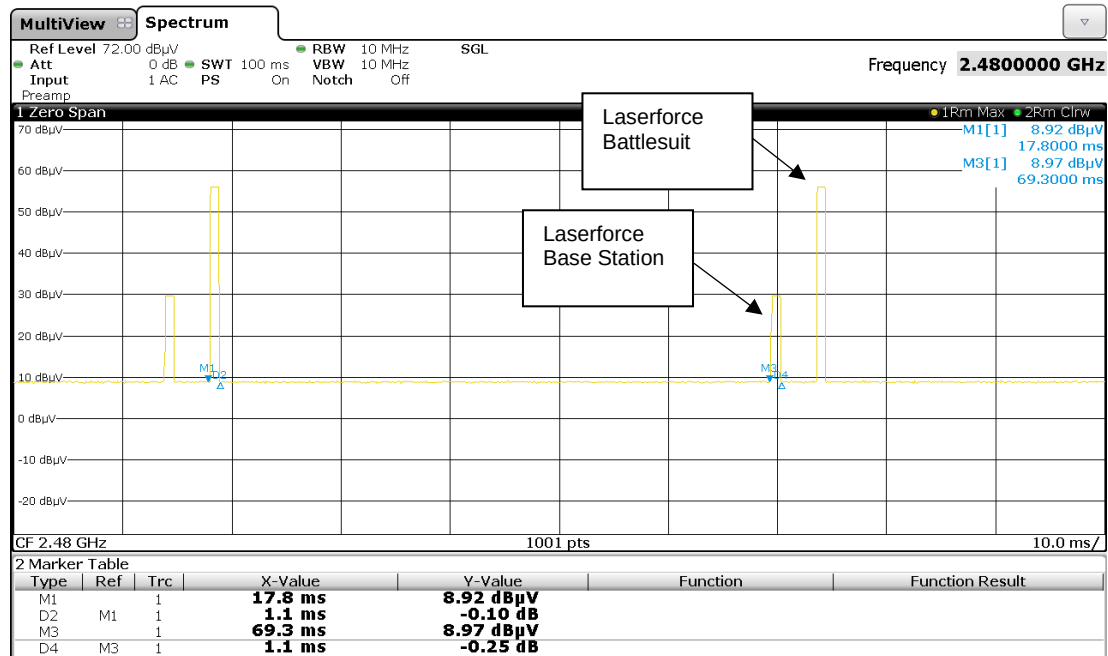

Duty cycle of the Laserforce Battlesuit = $(1.1 \text{ ms} \times 2) / 100 \text{ ms} = 0.022$

Therefore, Duty cycle correction factor, $\delta = 20 \log_{10} (0.022) = -33.15 \text{ dB}$

6.4.4 Results

The maximum field strength was measured with the EUT oriented on its z-axis with a horizontally polarised measurement antenna.

Channel	Freq. MHz	E (peak) dBμV/m	Limit (peak) dBμV/m	Δ Limit dB*	E (avg) [#] dBμV/m	Limit (avg) dBμV/m	Δ Limit dB*	Result
Low	2402	97.65	114	-16.35	64.50	94	-29.50	Complied
Middle	2440	98.07	114	-15.93	64.92	94	-29.08	Complied
High	2480	96.37	114	-17.63	63.22	94	-30.78	Complied


$$^{\#}E(\text{avg}) = E(\text{peak}) + \delta$$

Where:


E(avg) = Average electric field (dBμV/m)

E(peak) = Peak electric field (dBμV/m)

δ = duty cycle correction factor (dB) = -33.15 dB

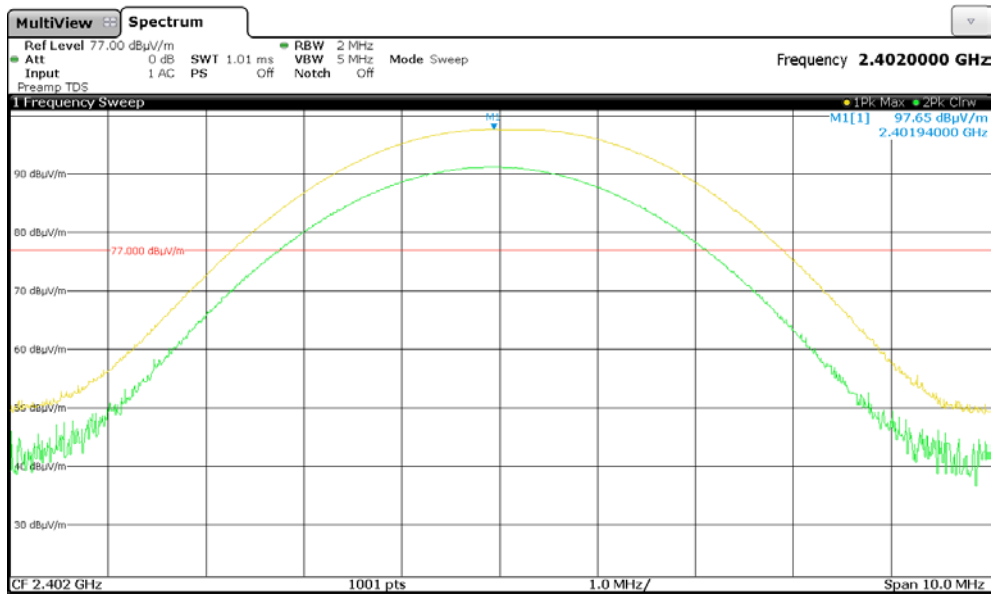

Graph 6-1: Fundamental Field Strength – Peak measurement, EUT z-axis, Measurement antenna – Horizontal polarisation, Low channel – 2402 MHz

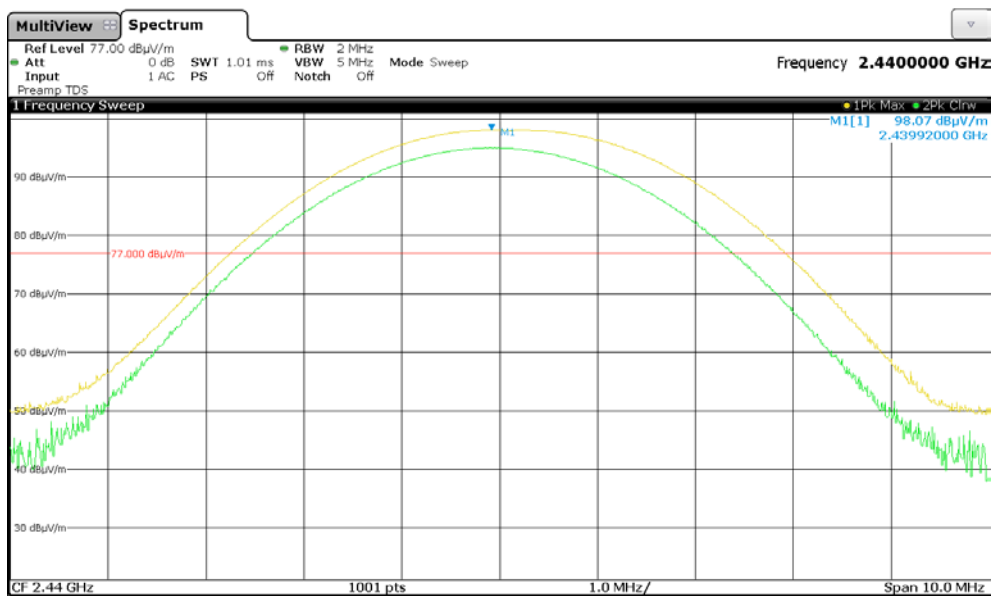


Graph 6-2: Fundamental Field Strength – Peak measurement, EUT z-axis, Measurement antenna – Horizontal polarisation, Middle channel – 2440 MHz



Accreditation No.5292

This document shall not be reproduced except in full.

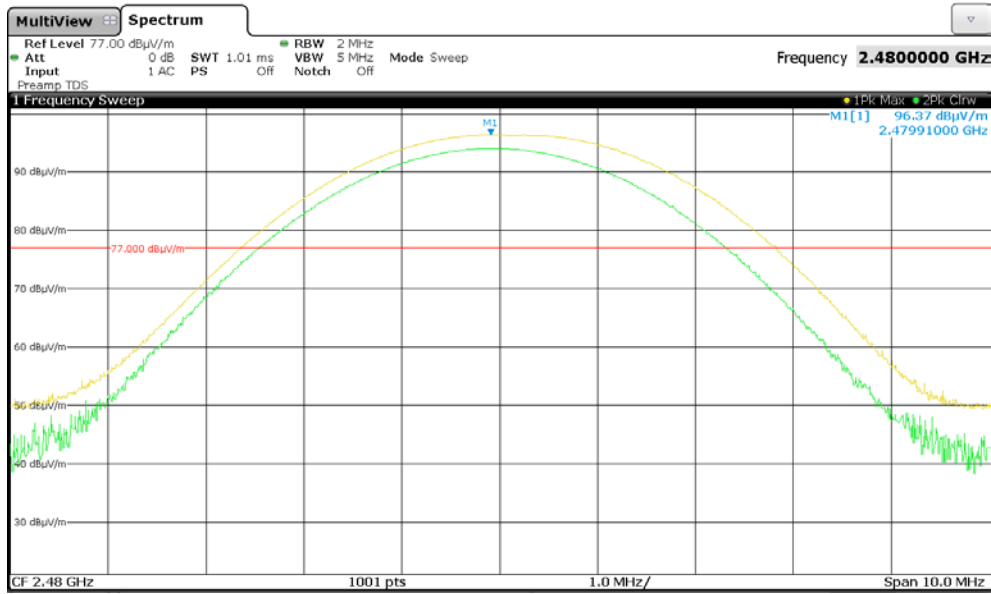

Graph 6-3: Fundamental Field Strength – Peak measurement, EUT z-axis, Measurement antenna – Horizontal polarisation, High channel – 2480 MHz

6.5 §15.249 (a) & (d)/ RSS-210 B.10 (a) & (b) Harmonics and Out-of-Band/ Spurious Emissions

6.5.1 Test procedure

Radiated out-of-band/spurious emissions measurements were performed in a semi-anechoic chamber compliant with ANSI C63.4: 2014.

The test frequency range was sub-divided into smaller bands with the defined resolution bandwidths to permit reliable display and identification of emissions.

Frequency range [MHz]	Measurement Bandwidth [kHz]	Measurement Distance [m]	Antenna
0.009 to 0.150	0.2	3	0.6 metre loop antenna
0.150 to 30	9	3	
30 to 1000	120	3	
1000 to 18 000	1000	3	Biconilog hybrid
18 000 to 40 000	1000	1	Standard gain or broadband horn

EUT was set at 0.8 m for measurements below 1000 MHz and set at 1.5 m at measurements above 1000 MHz.

The sample was slowly rotated with the spectrum analyser set to Max-Hold. This was performed for at least two antenna heights. When an emission was located, it was positively identified and its maximum level found by rotating the automated turntable and by varying the antenna height. For below 1000 MHz the emissions were measured with a Quasi-Peak detector, and for above 1000 MHz the emissions were measured with Peak and Average detectors.

EUT was investigated on all three axes (x, y, and z). Measurements on the worst axis presented below.

The measurement data for each frequency range was corrected for cable losses, antenna factors and preamplifier gain. This process was performed for both horizontal and vertical polarisations of the measurement antenna.

6.5.2 Evaluation of field strength

Field strengths were calculated automatically by the software using pre-stored calibration data. The method of calculation is shown below:

$$E = V + AF - G + L$$

Where: E = Radiated Field Strength in dB μ V/m.

V = EMI Receiver Voltage in dB μ V/m.

AF = Antenna Factor in dB (stored as a data array).

G = Preamplifier Gain in dB (stored as a data array).


L = Cable loss in dB (stored as a data array of Insertion Loss versus frequency).

6.5.3 Limits


The limit applied is in accordance to limits defined in §15.249(a)/ RSS-210 B.10(a) for the harmonics and §15.249(d)/ RSS-210 B.10(b) for the out-of-band/ spurious emissions.

6.5.4 Results: Frequency Band: 9 kHz - 30 MHz


All emissions measured in the frequency band 9 kHz to 30 MHz complied with the requirements of §15.249/ RSS-210 B.10. The emissions were more than 10 dB below the limit.

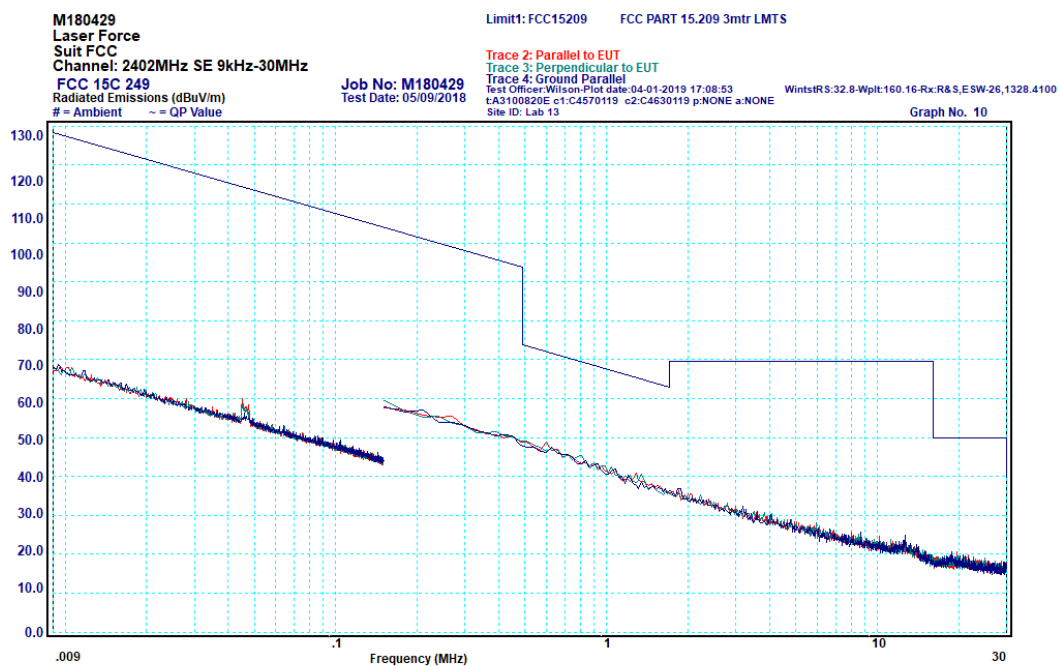

Graph 6-4: Spurious Emissions, 9 kHz – 30 MHz, Low channel – 2402 MHz

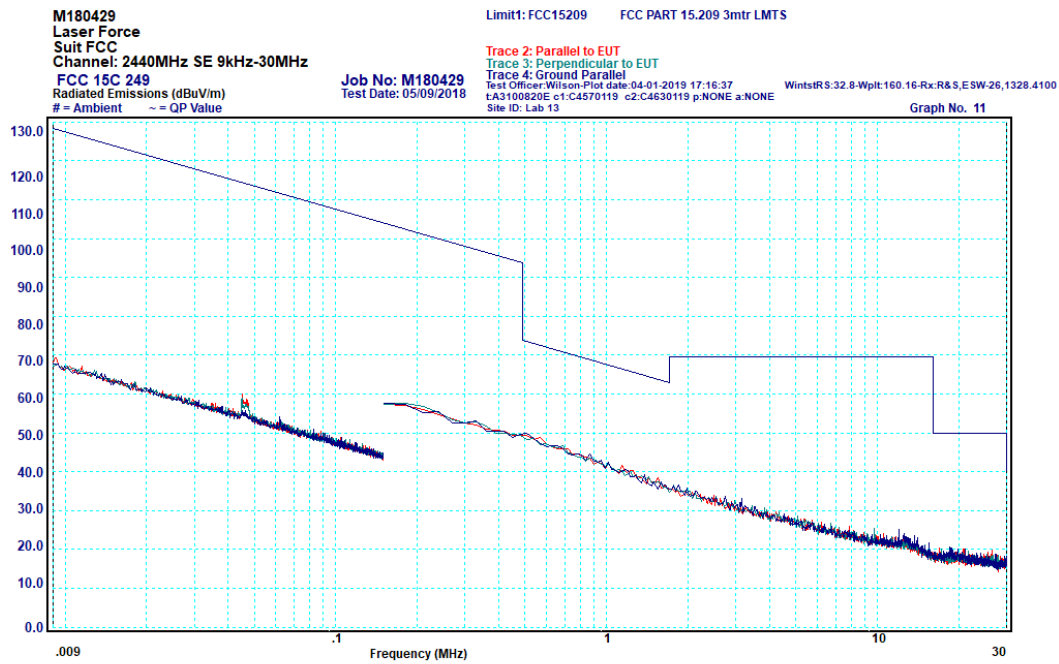


Graph 6-5: Spurious Emissions, 9 kHz – 30 MHz, Middle Channel – 2440 MHz

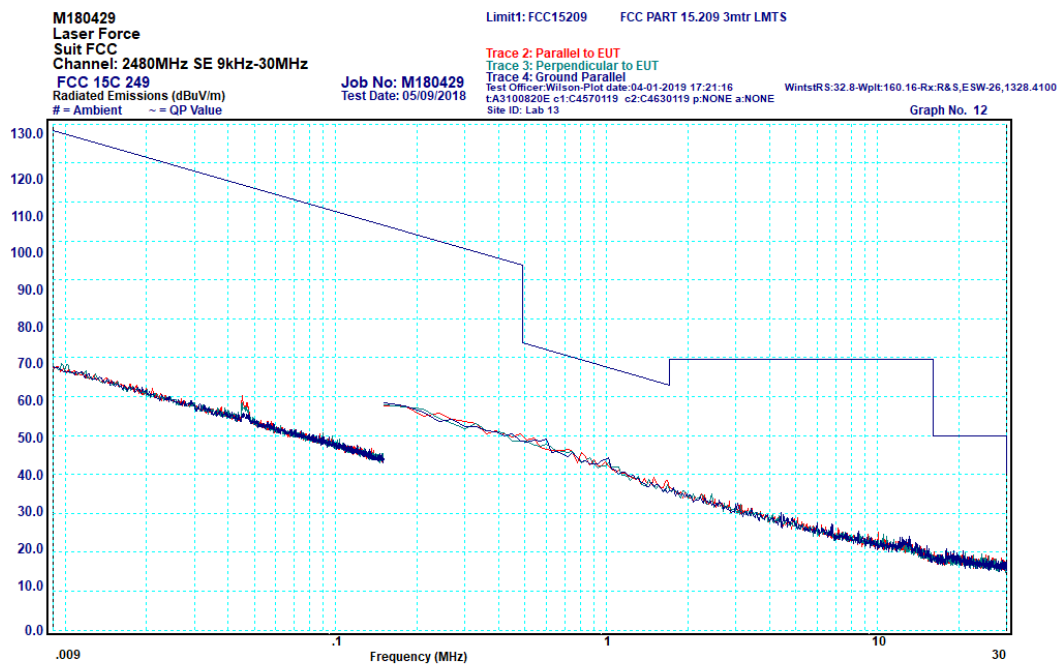

Graph 6-6: Spurious Emissions, 9 kHz – 30 MHz, High Channel – 2480 MHz

6.5.5 Results: Frequency Band: 30 - 1000 MHz

All spurious emissions measured in the frequency band 30 MHz to 1000 MHz complied with the requirements of §15.249/ RSS-210 B.10.

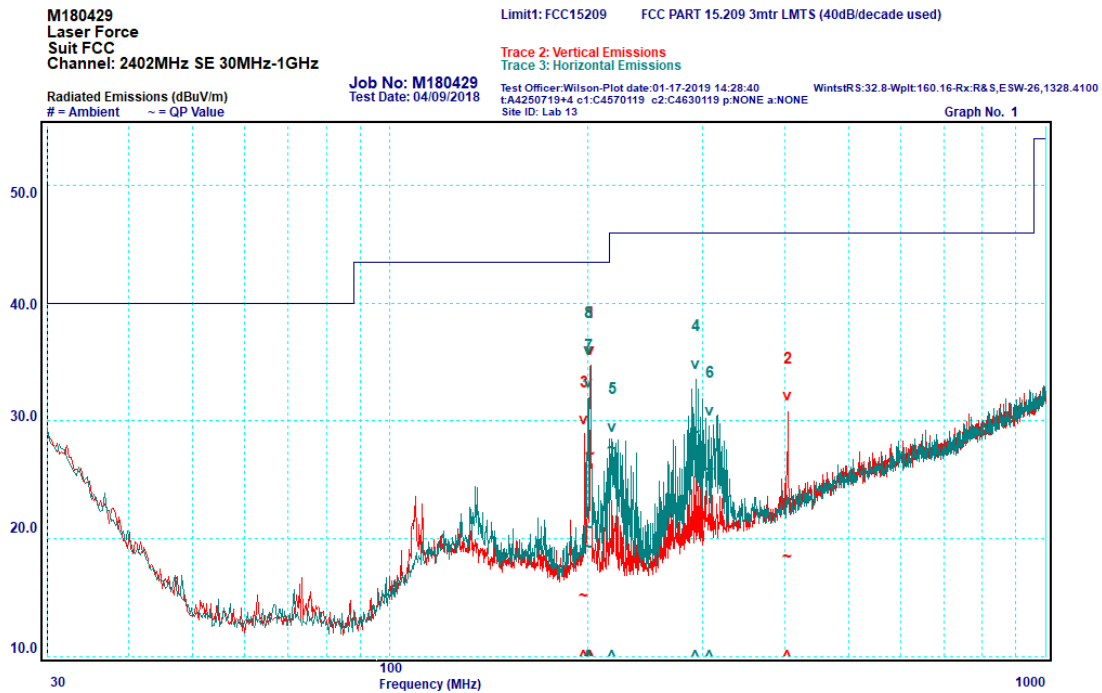

Graph 6-7: Spurious Emissions, 30 – 1000 MHz, Low channel, 2402 MHz


Table 6-1: Spurious Emissions, 30 - 1000 MHz, Low channel, 2402 MHz

Peak	Polarisation	Frequency (MHz)	Quasi-Peak (dBµV/m)	Limit (dBµV/m)	Delta Limit (dB)
1	Vertical	202.50	27.2	43.5	-16.3
2	Vertical	404.16	18.4	46.0	-27.6
3	Vertical	197.96	15.1	43.5	-28.4
4	Horizontal	292.51	29.0	46.0	-17.0
5	Horizontal	218.50	27.7	46.0	-18.3
6	Horizontal	307.11	25.8	46.0	-20.2
7	Horizontal	200.76	20.9	43.5	-22.6
8	Horizontal	200.87	19.2	43.5	-24.3



Accreditation No.5292

This document shall not be reproduced except in full.

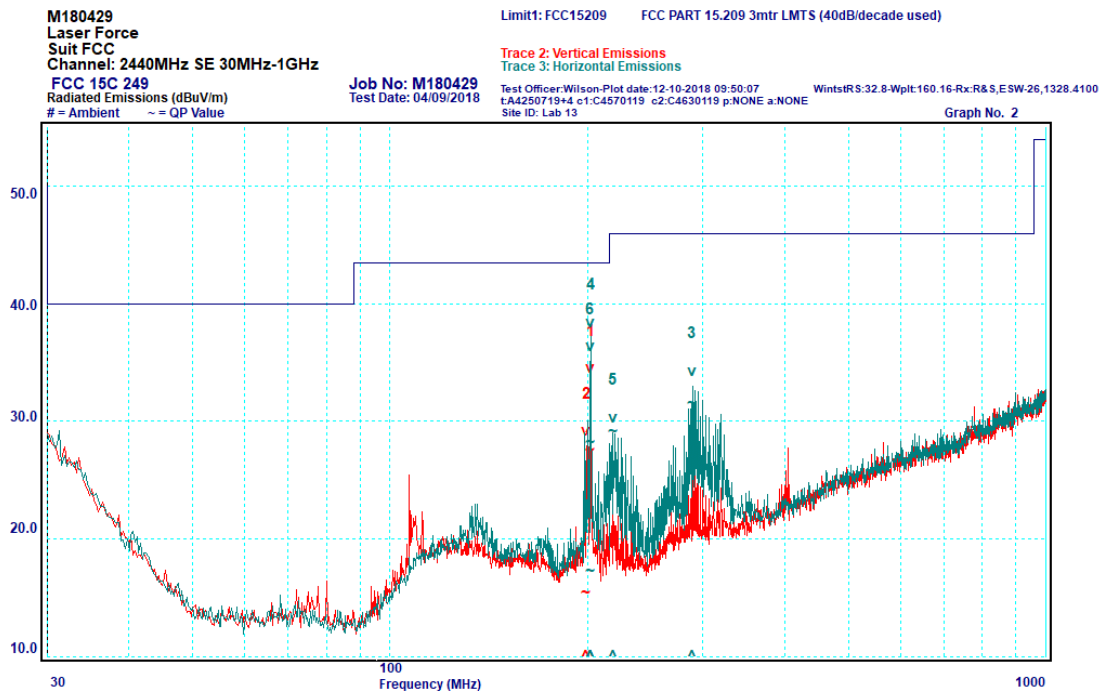

Graph 6-8: Spurious Emissions, 30 - 1000 MHz, Middle channel 2440 MHz


Table 6-2: Spurious Emissions, 30 - 1000 MHz, Middle channel 2440 MHz

Peak	Polarisation	Frequency (MHz)	Quasi-Peak (dB μ V/m)	Limit (dB μ V/m)	Delta Limit (dB)
1	Vertical	202.50	27.6	43.5	-15.9
2	Vertical	199.15	15.4	43.5	-28.1
3	Horizontal	288.71	31.5	46.0	-14.5
4	Horizontal	202.43	28.2	43.5	-15.3
5	Horizontal	218.59	29.1	46.0	-16.9
6	Horizontal	201.79	17.3	43.5	-26.2



Accreditation No.5292

This document shall not be reproduced except in full.

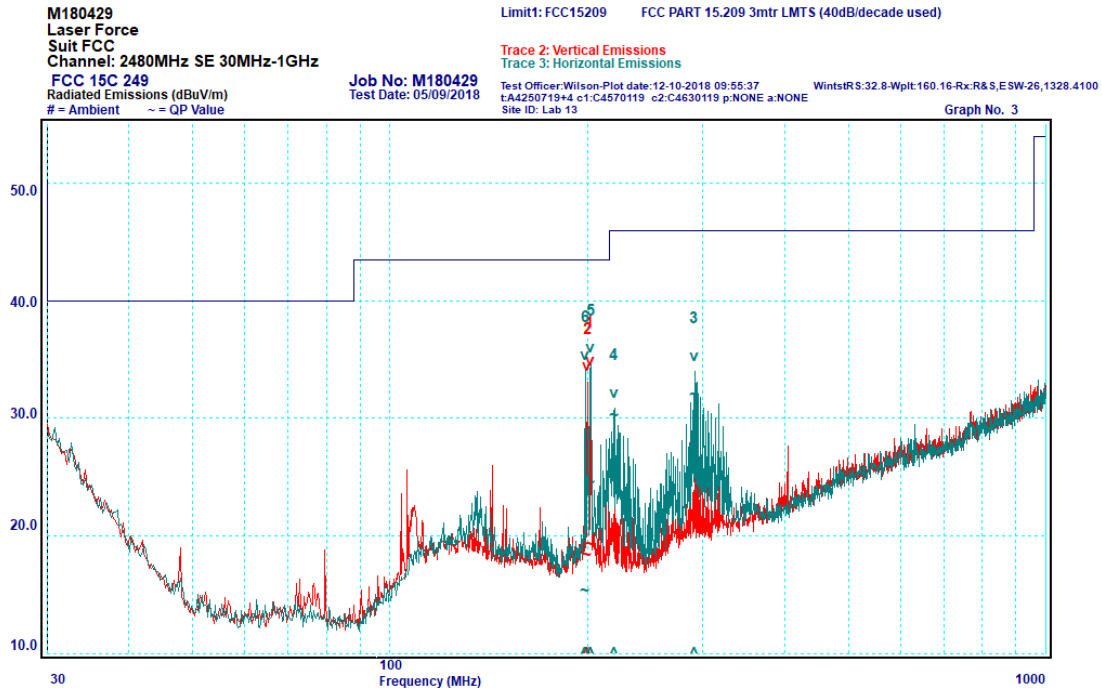

Graph 6-9: Spurious Emissions, 30 – 1000 MHz, High channel 2480 MHz

Table 6-3: Spurious Emissions, 30 - 1000 MHz, High channel 2480 MHz

Peak	Polarisation	Frequency (MHz)	Quasi-Peak (dBµV/m)	Limit (dBµV/m)	Delta Limit (dB)
1	Vertical	202.05	19.3	43.5	-24.2
2	Vertical	199.92	18.3	43.5	-25.2
3	Horizontal	290.71	32.0	46.0	-14.0
4	Horizontal	219.48	30.2	46.0	-15.8
5	Horizontal	202.46	24.5	43.5	-19.0
6	Horizontal	198.48	15.3	43.5	-28.2




Accreditation No.5292

This document shall not be reproduced except in full.

6.5.6 Results: Frequency Band: 1000 – 18000 MHz

All spurious emissions measured in the frequency band 1000 MHz to 18000 MHz complied with the requirements of §15.249/ RSS-210 B.10.

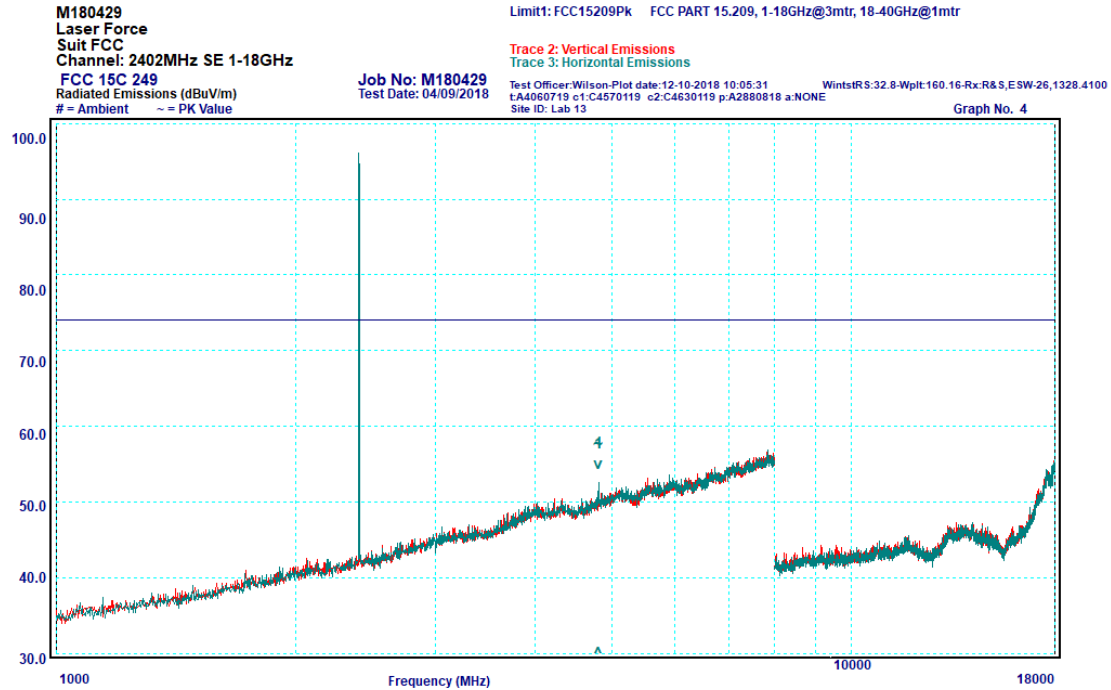

Graph 6-10: Spurious Emissions, 1000 - 18000 MHz, Low channel 2402 MHz

Table 6-4: Spurious Emissions, 1000 - 18000 MHz, Low channel 2402 MHz

Peak	Pol.	Freq. (MHz)	Peak (dBuV/m)	Peak Limit (dBuV/m)	Delta Pk Limit (dB)	Average (dBuV/m)	Average Limit (dBuV/m)	Delta Avg Limit (dB)
1	Horizontal	4804.54	57.6	74.0	-16.4	24.45 [#]	54	-29.55

Note: The Peak at 2.402 GHz in the above plot is the fundamental transmission and is not subject to the spurious limits of the standard.


#All emissions were measured using a Peak and an Average detector except for emissions related to the fundamental transmission (e.g. harmonics) which used the duty cycle correction factor to evaluate the average value as given below,

$$E(\text{avg}) = E(\text{peak}) + \delta$$

Where: E(avg) = Average electric field (dBuV/m)

E(peak) = Peak electric field (dBuV/m)

δ = duty cycle correction factor (dB) = -33.15 dB

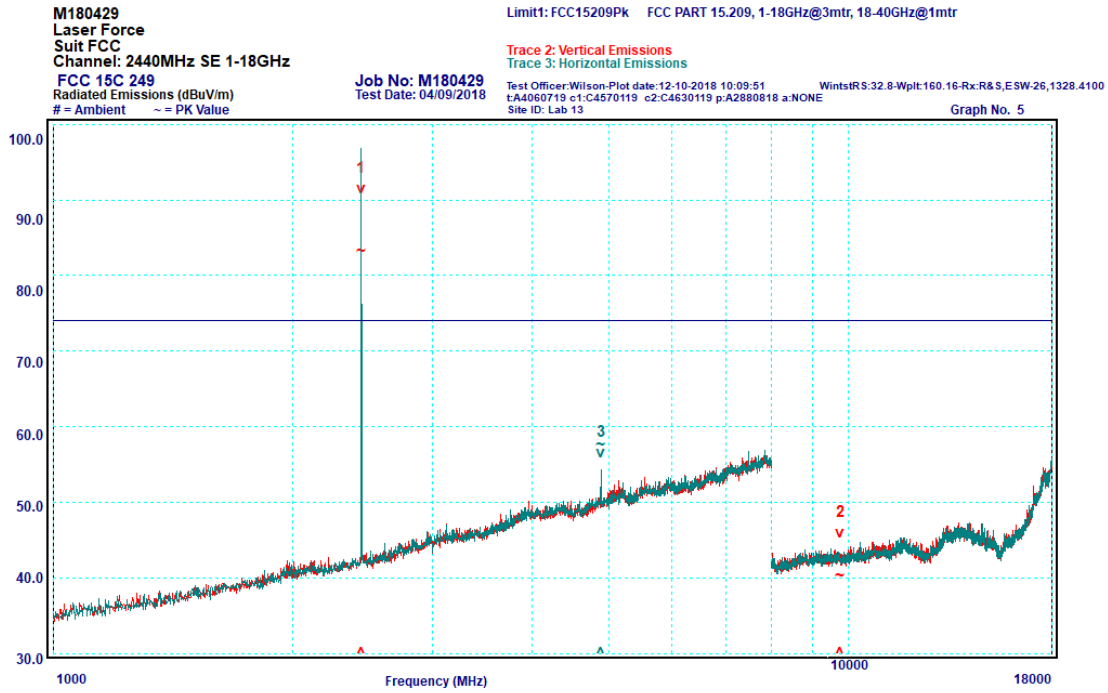

Graph 6-11: Spurious Emissions, 1000 - 18000 MHz, Middle channel 2440 MHz

Table 6-5: Spurious Emissions, 1000 - 18000 MHz, Middle channel 2440 MHz

Peak	Pol.	Freq. (MHz)	Peak (dBuV/m)	Peak Limit (dBuV/m)	Delta Pk Limit (dB)	Average (dBuV/m)	Average Limit (dBuV/m)	Delta Avg Limit (dB)
1*	Vertical	2440.23	N/A	N/A	N/A	N/A	N/A	N/A
2	Vertical	9759.72	40.2	74.0	-33.8	7.05 [#]	54	-46.95
3	Horizontal	4880.00	57.6	74.0	-16.4	24.45 [#]	54	-29.55

*Peak 1 is the fundamental transmission and is not subject to the spurious emission limits of the standard


#All emissions were measured using a Peak and an Average detector except for emissions related to the fundamental transmission (e.g. harmonics) which used the duty cycle correction factor to evaluate the average value as given below,

$$E(\text{avg}) = E(\text{peak}) + \delta$$

Where: E(avg) = Average electric field (dBuV/m)

E(peak) = Peak electric field (dBuV/m)

δ = duty cycle correction factor (dB) = -33.15 dB

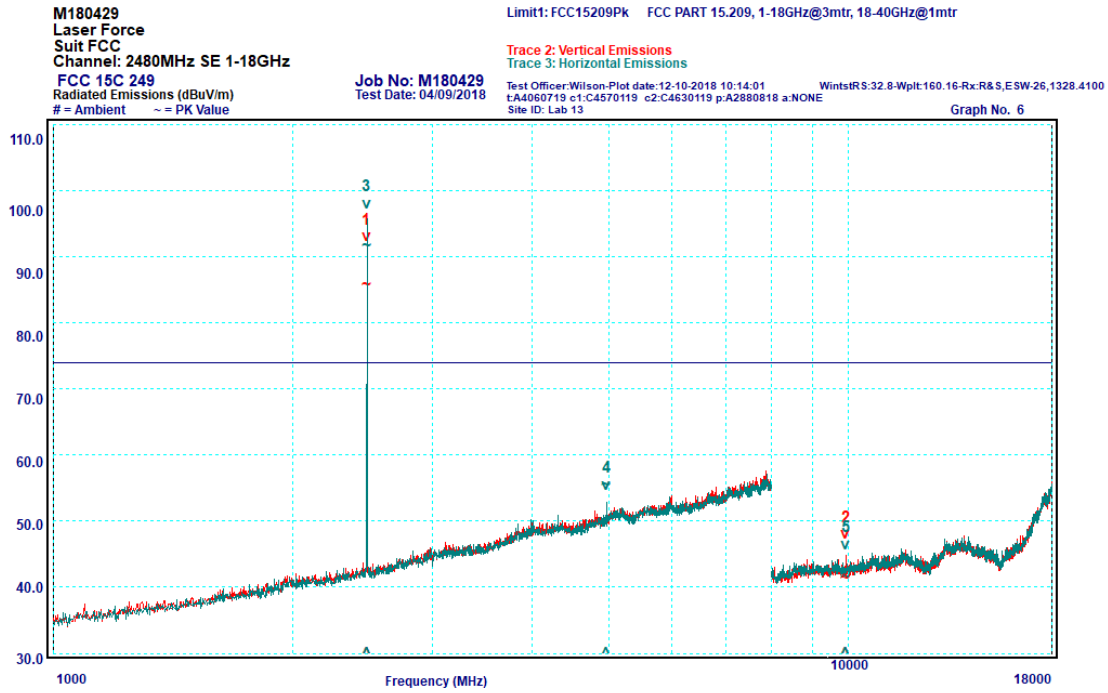

Graph 6-12: Spurious Emissions, 1000 - 18000 MHz, High channel 2480 MHz

Table 6-6: Spurious Emissions, 1000 - 18000 MHz, High channel 2480 MHz

Peak	Pol.	Freq. (MHz)	Peak (dBuV/m)	Peak Limit (dBuV/m)	Delta Pk Limit (dB)	Average (dBuV/m)	Average Limit (dBuV/m)	Delta Avg Limit (dB)
1*	Vertical	2479.94	N/A	N/A	N/A	N/A	N/A	N/A
2	Vertical	9919.71	41.4	74.0	-32.6	8.25 [#]	54	-45.75
3*	Horizontal	2479.93	N/A	N/A	N/A	N/A	N/A	N/A
4	Horizontal	4960.00	55.4	74.0	-18.6	22.25 [#]	54	-31.75
5	Horizontal	9919.73	41.5	74.0	-32.5	8.35 [#]	54	-45.65

*Peak 1 and Peak 3 are the fundamental transmission and are not subject to the spurious limits of the standard

#All emissions were measured using a Peak and an Average detector except for emissions related to the fundamental transmission (e.g. harmonics) which used the duty cycle correction factor to evaluate the average value as given below,

$$E(\text{avg}) = E(\text{peak}) + \delta$$


Where: E(avg) = Average electric field (dBuV/m)

E(peak) = Peak electric field (dBuV/m)


δ = duty cycle correction factor (dB) = -33.15 dB

6.5.7 Results: Frequency Band: 18000 - 25000 MHz


All spurious emissions measured in the frequency band 18000 MHz to 25000 MHz complied with the requirements of §15.249/ RSS-210 B.10. The emissions were more than 10 dB below the limit.

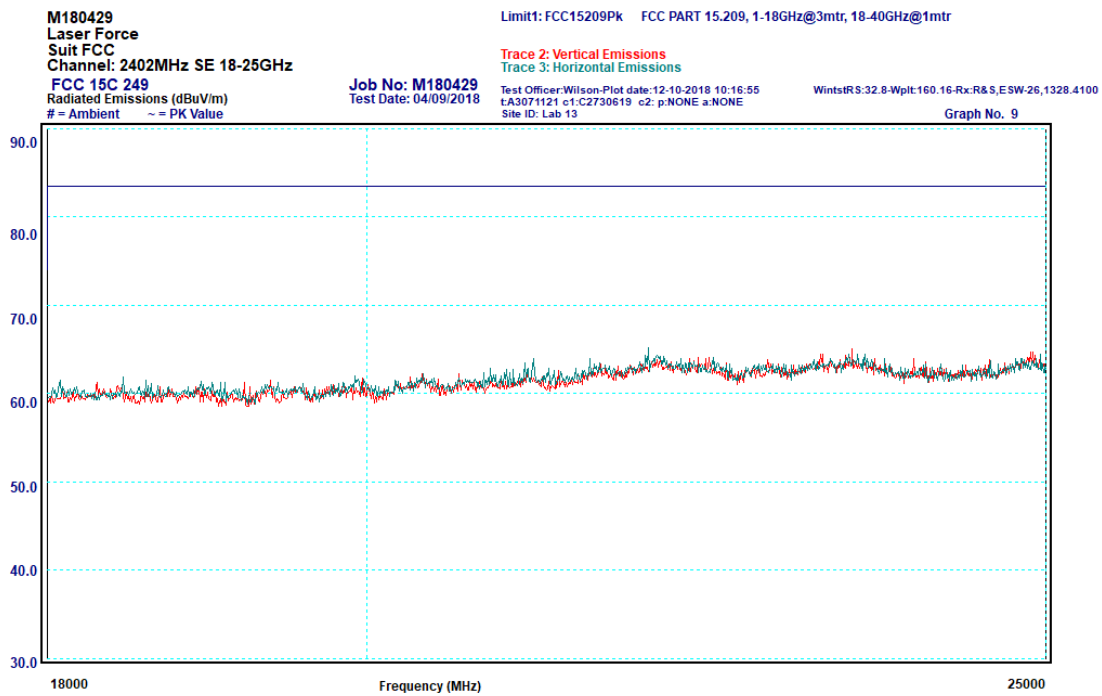

Graph 6-13: Spurious Emissions, 18000 - 25000 MHz, Low channel 2402 MHz

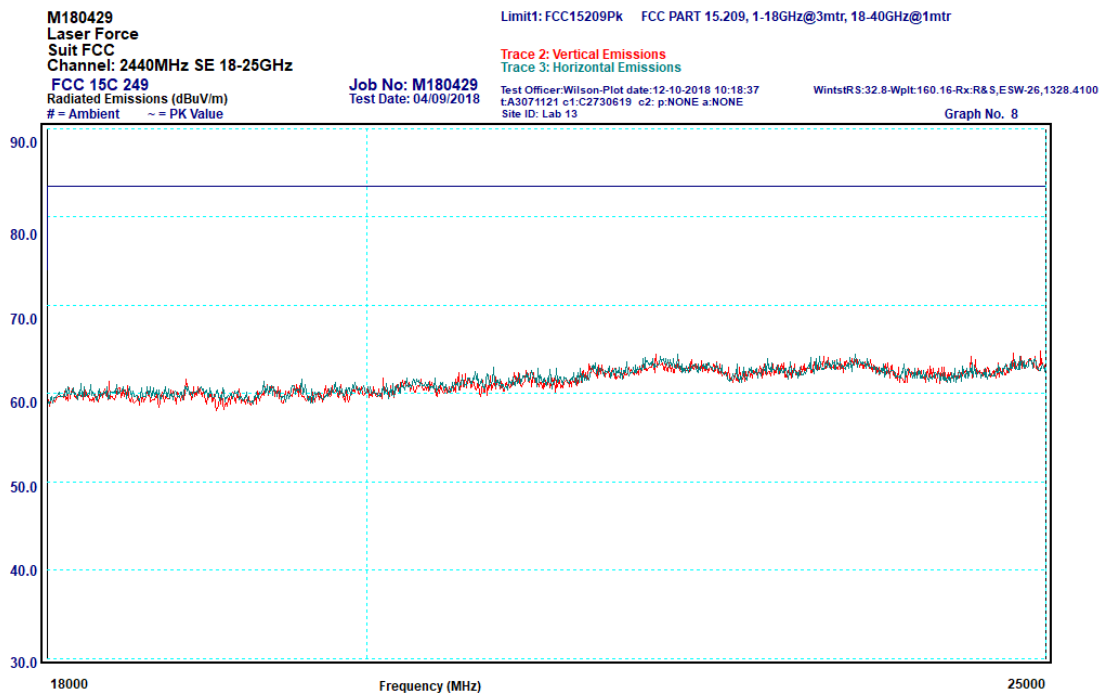

Graph 6-14: Spurious Emissions, 18000 - 25000 MHz, Middle Channel 2440 MHz

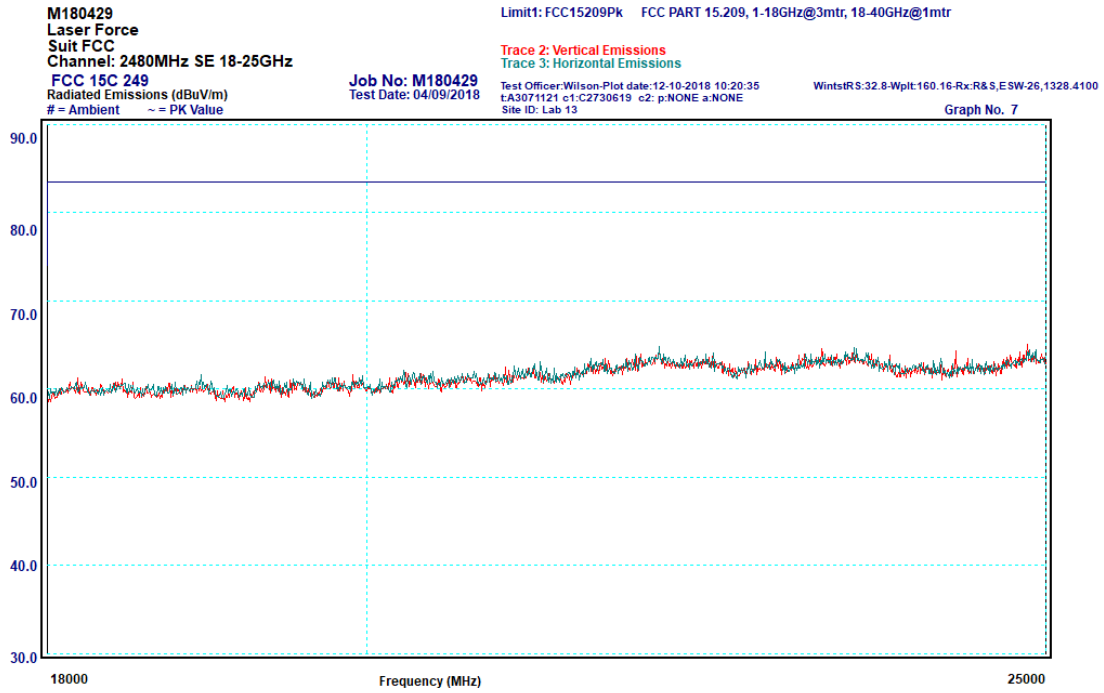

Graph 6-15: Spurious Emissions, 18000 - 25000 MHz, High channel 2480 MHz




Accreditation No.5292

This document shall not be reproduced except in full.

6.5.8 §15.249 Band Edge Emission Measurements

Band-edge measurements were done using radiated methods in accordance to ANSI C63.10 clause 6.10. All emissions measured near the lower and higher band-edge complied with the requirement of §15.249/ RSS-210 B.10. The orientation of the EUT and the measurement antenna height and polarisation that produced the highest EIRP was used.

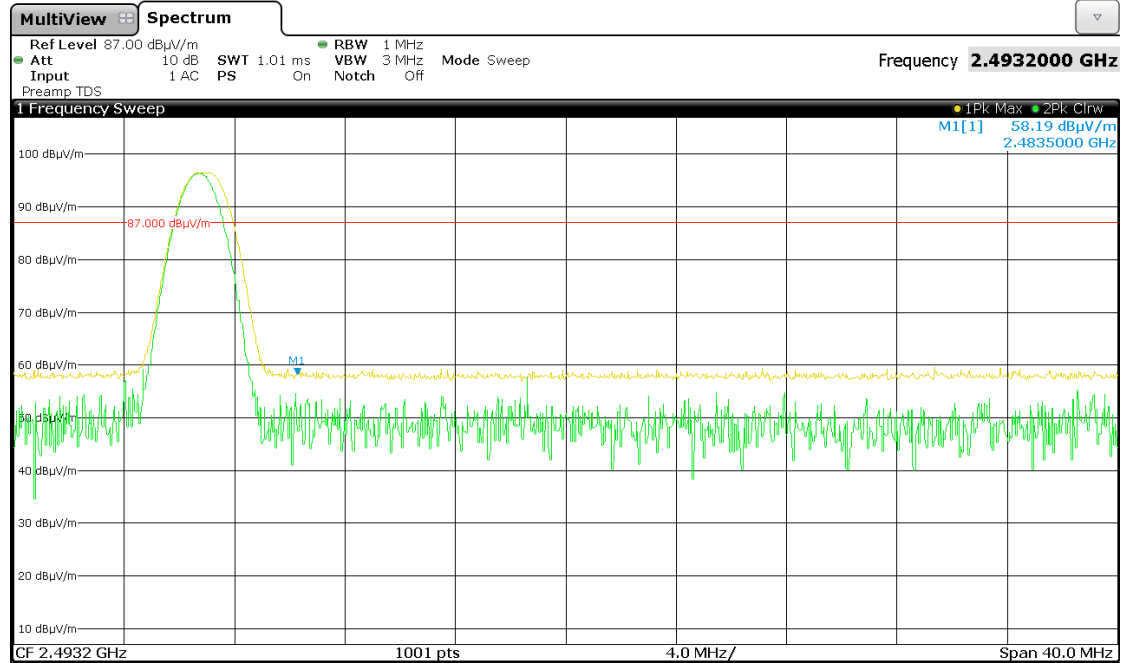

Graph 6-16: Higher band-edge 2483.5 MHz, Peak, High channel 2480 MHz

Table 6-7: Higher band-edge 2483.5 MHz, High channel 2480 MHz


Peak	Pol.	Freq. (MHz)	Peak (dBμV/m)	Peak Limit (dBμV/m)	Delta Pk Limit (dB)	Average [#] (dBμV/m)	Average Limit (dBμV/m)	Delta Avg Limit (dB)
M1	Horizontal	2483.50	58.19	74.0	-15.81	25.04	54	-28.96

$$\#E(\text{avg}) = E(\text{peak}) + \delta$$

Where: E(avg) = Average electric field (dBμV/m)

E(peak) = Peak electric field (dBμV/m)

δ = duty cycle correction factor (dB) = -33.15 dB

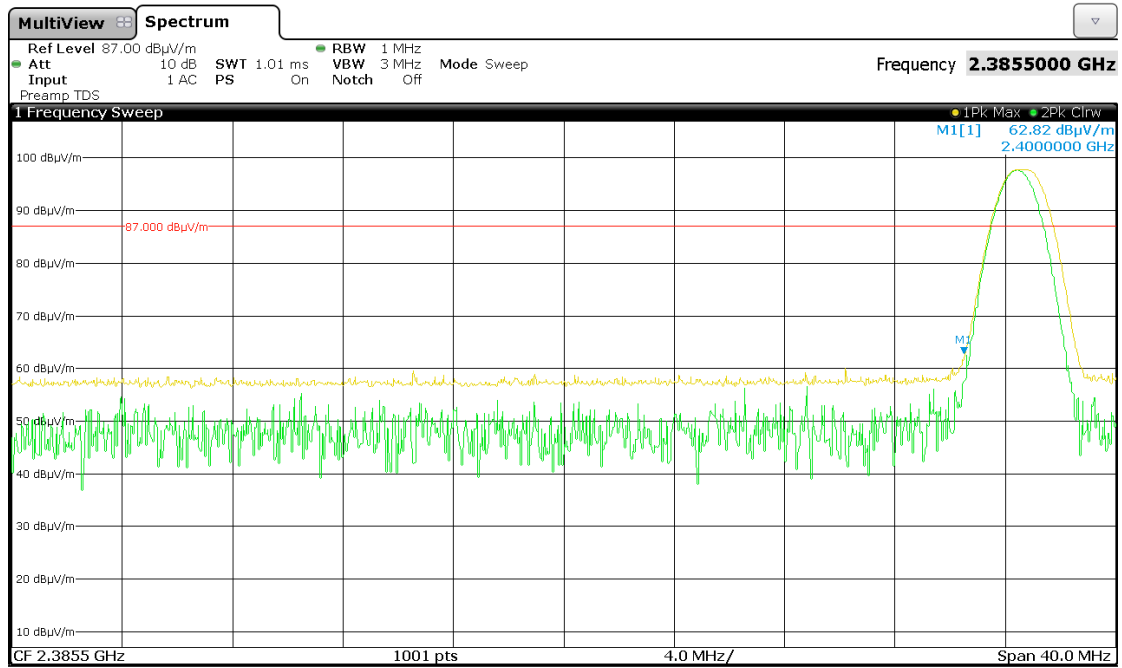

Graph 6-17: Lower band edge 2400 MHz, Peak, Low channel 2402 MHz

Table 6-8: Lower band-edge 2400 MHz, Low channel 2402 MHz

Peak	Pol.	Freq. (MHz)	Peak (dBμV/m)	Peak Limit (dBμV/m)	Delta Pk Limit (dB)	Average [#] (dBμV/m)	Average Limit (dBμV/m)	Delta Avg Limit (dB)
M1	Horizontal	2400	62.82	74.0	-11.18	29.67	54	-24.33

$$\#E(\text{avg}) = E(\text{peak}) + \delta$$

Where: $E(\text{avg})$ = Average electric field (dBμV/m)

$E(\text{peak})$ = Peak electric field (dBμV/m)

δ = duty cycle correction factor (dB) = -33.15 dB



Accreditation No.5292

This document shall not be reproduced except in full.

6.6 §2.1093/ RSS-102 Radiofrequency radiation exposure evaluation

The EUT complied with the applicable SAR limits. Refer to EMC Technologies report M180429-8A / M180429-12A.

6.7 §15.215/ RSS-Gen 6.7 Occupied Bandwidth – 99% power

6.7.1 Test procedure

The bandwidth containing 99% power of the transmitted signal was measured using the procedure from ANSI C63.10 section 6.9.

6.7.2 Limits


The 99% power should be contained within the frequency band 2400 – 2483.5 MHz.

6.7.3 Results


Channel	99% Bandwidth [MHz]	Low Frequency [MHz]	High Frequency [MHz]	Result
Low	0.51	2401.836	2402.343	Complied
Middle	0.51	2439.838	2440.343	N/A
High	0.51	2479.838	2480.347	Complied



Graph 6-18: Occupied bandwidth – Low channel 2402 MHz

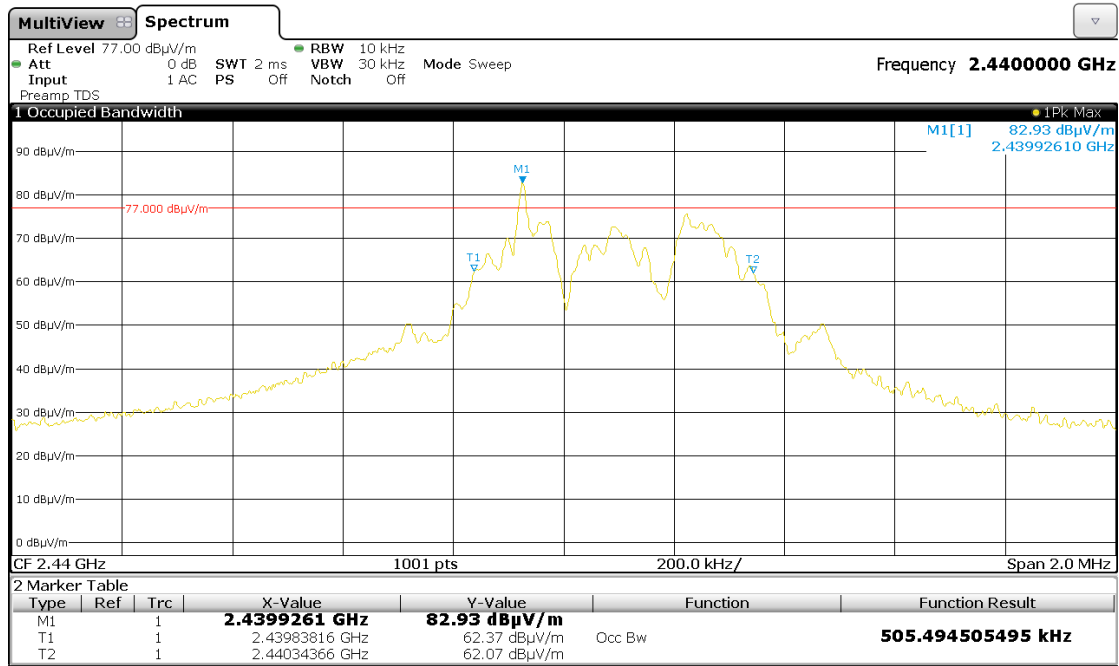

Graph 6-19: Occupied bandwidth – Middle channel 2440 MHz

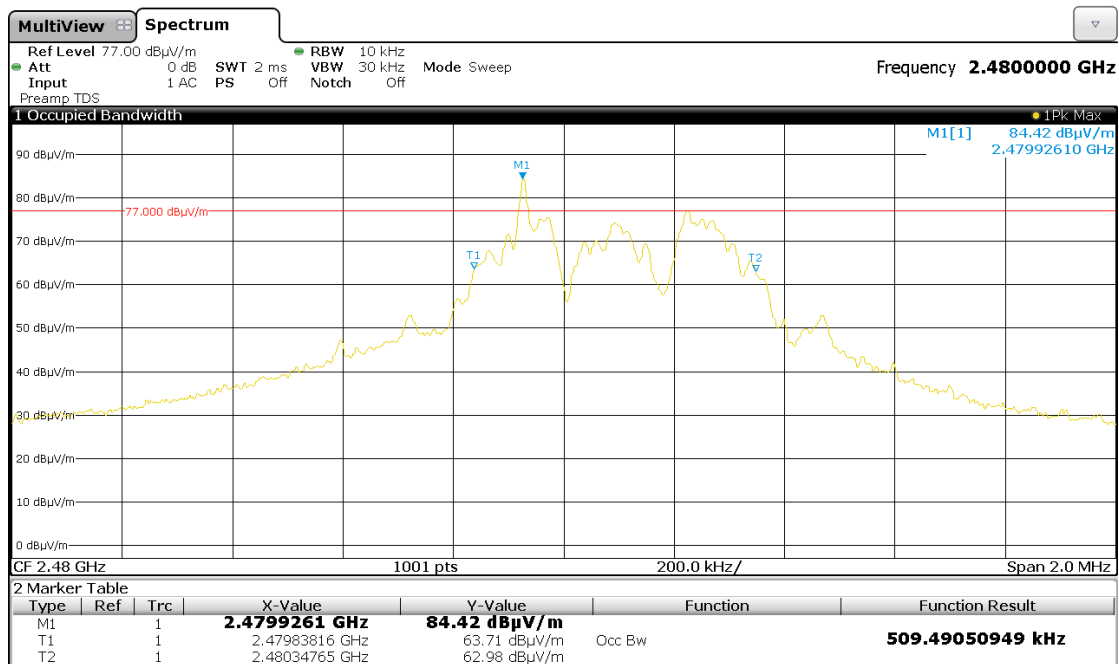

Graph 6-20: Occupied bandwidth – High channel 2480 MHz



Accreditation No.5292

This document shall not be reproduced except in full.