

APPENDIX 2: Data of EMI test


Automatically deactivate

UL Japan, Inc.
 Head Office EMC Lab. No.3 Semi Anechoic Chamber

COMPANY : Tokai Rika Co., Ltd.
 EQUIPMENT : RKE Transmitter
 MODEL : F01TG
 S/N : 2
 POWER : DC 3.0V(CR1616)
 Mode : Normal use mode
 EUT Axis : -

REPORT NO : 28LE0022-HO-01
 REGULATION : FCC15.231(a)(1)
 TEST DISTANCE : -
 DATE : 12/23/2007
 TEMPERATURE : 24 deg.C.
 HUMIDITY : 42%
 ENGINEER : Makoto Kosaka

Time of Transmitting [sec]	Limit [sec]	Result
0.59	5.00	Pass

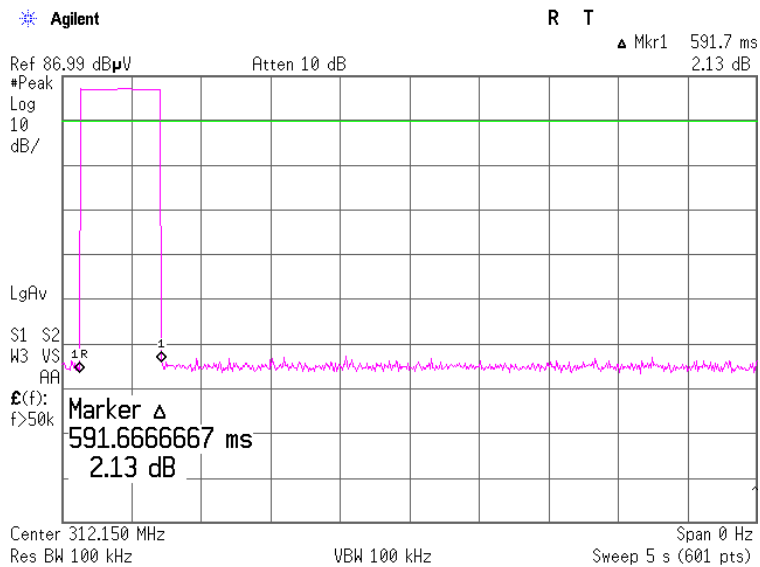

UL Japan, Inc.
Head Office EMC Lab.
 4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
 Telephone : +81 596 24 8116
 Facsimile : +81 596 24 8124

Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)

UL Japan, Inc.
Head Office EMC Lab. No.3 & 4 Semi Anechoic Chamber

COMPANY : Tokai Rika Co., Ltd.
EQUIPMENT : RKE Transmitter
MODEL : F01TG
S/N : 2
POWER : DC 3.0V(CR1616)
Mode : Transmitting mode
EUT Axis : Hor.: X-axis, Ver.: Y-axis

REPORT NO : 28LE0022-HO-01
REGULATION : FCC Part15 Subpart C 15.231(b) / 15.205 / 15.209
TEST DISTANCE : 3m
DATE : 12/23/2007 02/02/2008
TEMPERATURE : 24deg. C. 21deg.C.
HUMIDITY : 42% 34%
ENGINEER : Makoto Kosaka

QP DETECT

No.	FREQ [MHz]	T/R READING		ANT Factor [dB/m]	AMP GAIN [dB]	LOSS [dB]	Duty Factor [dB]	RESULT		Limit [dBuV/m]	MARGIN	
		HOR [dBuV]	VER					HOR [dBuV/m]	VER		HOR [dB]	VER [dB]
1	312.15	66.0	62.6	14.5	32.0	10.0	-	58.5	55.1	75.4	16.9	20.3
2	624.30	32.2	31.3	19.3	32.1	11.8	-	31.2	30.3	55.4	24.2	25.1
3	936.45	26.0	23.7	22.3	30.9	13.3	-	30.7	28.4	55.4	24.7	27.0

PK DETECT (RBW: 1MHz, VBW: 1MHz) (Inside Restricted bands)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	LOSS [dB]	Duty Factor [dB]	RESULT		Limit [dBuV/m]	MARGIN	
		HOR [dBuV]	VER					HOR [dBuV/m]	VER		HOR [dB]	VER [dB]
5	1560.75	49.8	50.5	25.9	32.6	2.3	-	45.4	46.1	73.9	28.5	27.8
8	2497.20	47.6	45.6	27.5	31.5	3.1	-	46.7	44.7	73.9	27.2	29.2
9	2809.35	52.2	47.7	28.0	31.4	3.3	-	52.1	47.6	73.9	21.8	26.3

PK DETECT Result = Reading (RBW: 1MHz, VBW: 1MHz) (Outside Restricted bands)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	LOSS [dB]	Duty Factor [dB]	RESULT		Limit [dBuV/m]	MARGIN	
		HOR [dBuV]	VER					HOR [dBuV/m]	VER		HOR [dB]	VER [dB]
4	1248.60	45.6	46.2	25.3	33.5	2.0	-	39.4	40.0	75.4	36.0	35.4
6	1872.90	47.7	49.3	26.5	31.9	2.5	-	44.8	46.4	75.4	30.6	29.0
7	2185.05	48.5	46.7	27.0	31.6	2.8	-	46.7	44.9	75.4	28.7	30.5
10	3121.50	54.2	55.7	28.2	31.8	3.1	-	53.7	55.2	75.4	21.7	20.2

AV (PK DETECT) Result = Reading (RBW: 1MHz, VBW: 10Hz) (Outside Restricted bands)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	LOSS [dB]	Duty Factor [dB]	RESULT		Limit [dBuV/m]	MARGIN	
		HOR [dBuV]	VER					HOR [dBuV/m]	VER		HOR [dB]	VER [dB]
10	3121.50	51.0	53.0	28.2	31.8	3.1	-	50.5	52.5	55.4	4.9	2.9

REMARKS ANTENNA TYPE:30-300MHz Biconical / 300-1000MHz Logperiodic / 1-3.2GHz Horn

CALCULATION RESULT=Reading + ANT Factor - Amp Gain + LOSS (Cable+ ATTN.)+Duty factor

Duty cycle Factor Measurement :

0.0 dB

*The test above 1GHz was performed with PK DETECT (RBW: 1MHz, VBW: 1MHz) and AV (PK DETECT [RBW: 1MHz, VBW: 10Hz]).

*Duty Factor was calculated with the assumption of the worst condition in 100msec.

* The result is rounded off to the second decimal place, so some differences might be observed.

*The limit was converted from V to dBuV, and it is rounded off to the second decimal place.

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

The carrier level (or, noise levels) was (or were) measured at each position of all three axes X, Y and Z, and the position that has the maximum noise was determined. With the position, the noise levels of all the frequencies was measured.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

-20dB Bandwidth


UL Japan, Inc.
 Head Office EMC Lab. No.3 Semi Anechoic Chamber

COMPANY : Tokai Rika Co., Ltd.
 EQUIPMENT: RKE Transmitter
 MODEL : F01TG
 S/N : 2
 POWER : DC 3.0V(CR1616)
 Mode : Transmitting mode
 Axis : Hor.: X-axis

REPORT NO : 28EE0022-HO-01
 REGULATION : FCC15.231(c)
 TEST DISTANCE : 3m
 DATE : 12/23/2007
 TEMPERATURE : 24 deg.C.
 HUMIDITY : 42%
 ENGINEER : Makoto Kosaka

Bandwidth Limit : Fundamental Frequency 312.15 MHz X 0.25% = 780.38 kHz

-20dB Bandwidth	Bandwidth Limit	Result
[kHz]	[kHz]	
52.00	780.38	Pass

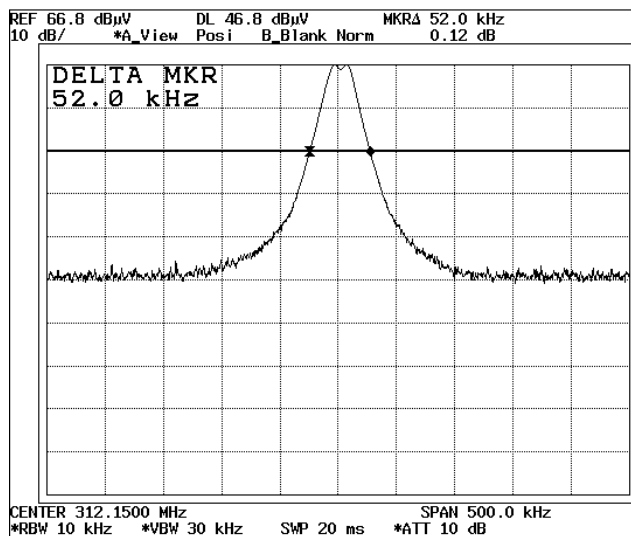

99% Occupied Bandwidth


UL Japan, Inc.
Head Office EMC Lab. No.3 Semi Anechoic Chamber

COMPANY : Tokai Rika Co., Ltd.
EQUIPMENT : RKE Transmitter
MODEL : F01TG
S/N : 2
POWER : DC 3.0V(CR1616)
Mode : Transmitting mode
Axis : Hor.: X-axis

REPORT NO : 28EE0022-HO-01
REGULATION : RSS-210 A1.1.3
TEST DISTANCE : 3m
DATE : 12/23/2007
TEMPERATURE : 24 deg.C.
HUMIDITY : 42%
ENGINEER : Makoto Kosaka

Bandwidth Limit : Fundamental Frequency 312.15 MHz X 0.25% = 780.38 kHz

99% Occupied Bandwidth	Bandwidth Limit	Result
[kHz]	[kHz]	
44.50	780.38	Pass

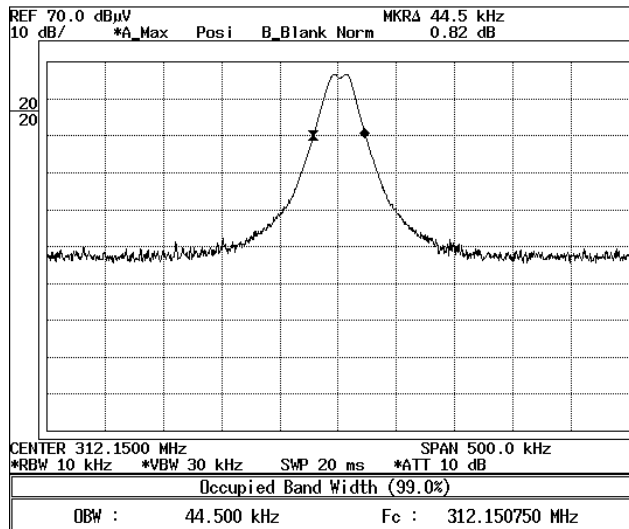


UL Japan, Inc.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

Duty Cycle

UL Japan, Inc.
 Head Office EMC Lab. No.4 Semi Anechoic Chamber

COMPANY : Tokai Rika Co., Ltd.
 EQUIPMENT : RKE Transmitter
 MODEL : F01TG
 S/N : 2
 POWER : DC 3.0V(CR1616)
 Mode : Transmitting mode
 Axis : -

REPORT NO : 28LE0022-HO-01
 REGULATION : FCC 15.231(b) / 15.35(e)
 TEST DISTANCE : -
 DATE : 02/02/2008
 TEMPERATURE : 21 deg.C.
 HUMIDITY : 34%
 ENGINEER : Makoto Kosaka

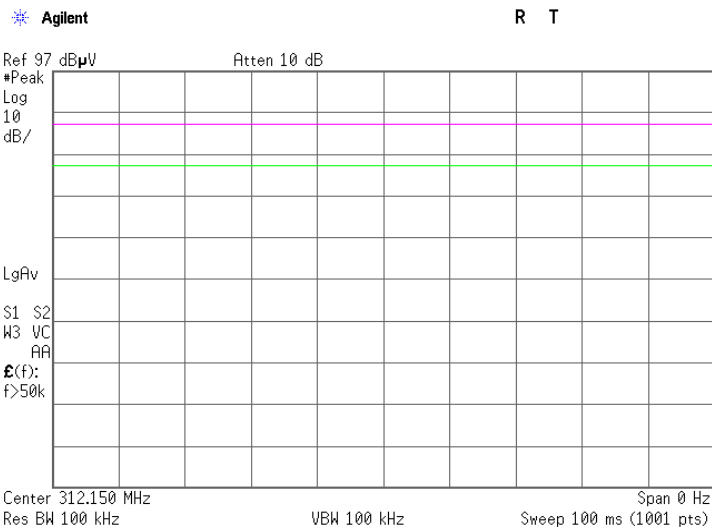

*1)Duty = $20\log_{10}(\text{ON time}/\text{Cycle})$
 Duty = $20\log_{10}(100\text{ms}/100\text{m}) = 0$

APPENDIX 3: Test Instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
MAEC-03	Anechoic Chamber	TDK	Semi Anechoic Chamber 3m	RE	2007/03/05 * 12
MBA-03	Biconical Antenna	Schwarzbeck	BBA9106	RE	2007/01/19 * 12
MLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2007/01/19 * 12
MAT-30	Attenuator(6dB)	TME	UFA-01	RE	2007/03/05 * 12
MCC-51	Coaxial cable	UL Japan	-	RE	2007/07/26 * 12
MPA-13	Pre Amplifier	SONOMA INSTRUMENT	310	RE	2007/03/16 * 12
MHA-20	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	RE	2007/04/14 * 12
MCC-56	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	RE	2007/03/29 * 12
MPA-11	MicroWave System Amplifier	Agilent	83017A	RE	2007/03/02 * 12
MTR-02	Test Receiver	Rohde & Schwarz	ESCS30	RE	2007/02/03 * 12
MSA-09	Spectrum Analyzer	Advantest	R3273	RE	2007/12/21 * 12
MSA-10	Spectrum Analyzer	Agilent	E4448A	RE	2007/07/04 * 12
MOS-13	Thermo-Hygrometer	Custom	CTH-180	RE	2006/01/19 * 24
MLDM-03	Digital laser distance meter	BOSCH	DLE 50	RE	2007/06/21 * 36
MSTW-14	EMI measurement program	TSJ	TEPTO-DV	RE	-
MAEC-04	Anechoic Chamber	TDK	Semi Anechoic Chamber 3m	RE	2007/03/03 * 12
MHA-21	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	RE	2007/08/16 * 12
MCC-57	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	RE	2007/03/30 * 12
MPA-12	MicroWave System Amplifier	Agilent	83017A	RE	2007/03/12 * 12
MOS-23	Thermo-Hygrometer	Custom	CTH-201	RE	2007/12/27 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipments have been controlled by means of an unbroken chains of calibrations.

Test Item:

RE: Radiated emission

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124