



# EMI TEST REPORT

**Test Report No. : 31BE0178-HO-01-C**

**Applicant** : Tokai Rika Co., Ltd.  
**Type of Equipment** : Receiver  
**Model No.** : F51RG  
**Test standard** : FCC Part 15 Subpart B: 2010  
**FCC ID** : MOZF51RG  
**Test Result** : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Date of test:**

October 5, 2010

**Representative test  
engineer:**

Hiroyuki Furutaka  
Engineer of EMC Service

**Approved by:**

Shinya Watanabe  
Leader of EMC Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.  
\*As for the range of Accreditation in NVLAP, you may refer to the WEB address,  
<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF058b (15.09.10)

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information .....</b>	<b>3</b>
<b>SECTION 2: Equipment under test (E.U.T.) .....</b>	<b>3</b>
<b>SECTION 3: Test specification, procedures &amp; results .....</b>	<b>4</b>
<b>SECTION 4: Operation of E.U.T. during testing .....</b>	<b>7</b>
<b>SECTION 5: Radiated Emission .....</b>	<b>8</b>
<b>APPENDIX 1: Photographs of test setup.....</b>	<b>9</b>
Radiated Emission .....	9
Worst Case Position (Horizontal: Z-axis/ Vertical:Z-axis).....	10
<b>APPENDIX 2: Data of EMI test .....</b>	<b>11</b>
Radiated Emission .....	11
<b>APPENDIX 3: Test instruments .....</b>	<b>13</b>

## **SECTION 1: Customer information**

Company Name : Tokai Rika Co., Ltd.  
Address : 260 Toyota 3-chome, Oguchi-cho, Niwa-gun, Aichi-ken 480-0195  
Japan  
Telephone Number : +81-587-95-0093  
Facsimile Number : +81-587-95-5471  
Contact Person : Masahiro Kato

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : Receiver  
Model No. : F51RG  
Serial No. : Refer to Clause 4.2  
Rating : DC12.0V  
Receipt Date of Sample : October 2, 2010  
Country of Mass-production : Japan  
Condition of EUT : Engineering prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab

### **2.2 Product Description**

Model No: F51RG (referred to as the EUT in this report) is the Receiver.

#### **Radio Specification**

Radio Type : Receiver  
Equipment Type : Super Heterodyne  
Frequency of Operation : 312.15MHz  
Intermediate Frequency : 10.7MHz  
Local Oscillalized Frequency : 37.68125MHz x 8  
Other Clock frequency : 9.956MHz  
Method of Frequency Generation : Crystal  
Operating voltage (Inner) : DC5.0V  
Antenna type : Integral Antenna

#### **FCC15.111(b)**

The receiving antenna (of this EUT) is installed inside the EUT and cannot be removed (permanently attached).  
Therefore, Radiated emission test was performed.

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

### **SECTION 3: Test specification, procedures & results**

#### **3.1 Test specification**

Test Specification/Title : FCC Part 15 Subpart B: 2010, final revised on January 22, 2010 and effective March 1, 2010

: FCC 47CFR Part15 Radio Frequency Device  
Subpart B Unintentional Radiators

#### **3.2 Procedures and results**

Item	Test Procedure	Limits	Deviation	Worst margin	Result
Conducted emission	ANSI C63.4: 2003 7. AC powerline conducted emission measurements	Part 15 Subpart B 15.107(a)	N/A	N/A*1)	N/A
		RSS-Gen 7.2.2			
Radiated emission	ANSI C63.4: 2003 8. Radiated emission measurements	Part 15 Subpart B 15.109(a)	N/A	7.8dB, 37.681MHz QP, Vertical	Complied
		RSS-Gen 7.2.3.2			
*Note: UL Japan, Inc’s EMI Work Procedure QPM05. *1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.					

### 3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

#### EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi-anechoic chamber)	Radiated emission (10m*)(+dB)		
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz
No.1	2.7dB	4.8dB	5.0dB
No.2	-	-	-
No.3	-	-	-
No.4	-	-	-

\*10m = Measurement distance

Test room (semi-anechoic chamber)	Radiated emission						
	(3m*)(+dB)				(1m*)(+dB)		(0.5m*)(+dB)
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz	1GHz -10GHz	10GHz -18GHz	18GHz -26.5GHz	26.5GHz -40GHz
No.1	2.9dB	4.8dB	5.0dB	3.9dB	4.3dB	4.5dB	4.3dB
No.2	3.5dB	4.8dB	5.1dB	4.0dB	4.2dB	4.4dB	4.2dB
No.3	3.8dB	4.6dB	4.7dB	4.0dB	4.2dB	4.5dB	4.2dB
No.4	3.5dB	4.4dB	4.9dB	4.0dB	4.2dB	4.6dB	4.2dB

\*3m/1m/0.5m = Measurement distance

#### Radiated emission test (3m)

The data listed in this test report has enough margin, more than the site margin.

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

### 3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. \*NVLAP Lab. code: 200572-0  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test set up, Data of EMI, and Test instruments


Refer to APPENDIX.

## **SECTION 4: Operation of E.U.T. during testing**

### **4.1 Operating modes**

Mode	Remarks
Receiving mode	* RKE Transmitter was operated manually by a test engineer and the test was performed with the EUT receiving 312.15MHz .

### **4.2 Configuration and peripherals**

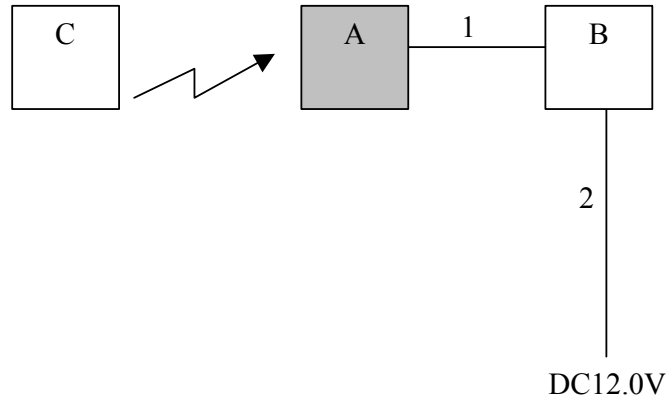

\*Cabling and setup were taken into consideration and test data was taken under worse case conditions.

#### **Description of EUT and Support equipment**

No.	Item	Model number	Serial number	Manufacturer	Remark
A	Receiver	F51RG	001	Tokai Rika Co., Ltd.	EUT
B	Checker	-	-	Tokai Rika Co., Ltd.	-
C	RKE Transmitter	F51TG	2D5-1	Tokai Rika Co., Ltd.	-

#### **List of cables used**

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Signal & DC Cable	1.72	Unshielded	Unshielded	-
2	DC Cable	1.06	Unshielded	Unshielded	-

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

## **SECTION 5: Radiated Emission**

### **5.1 Operating environment**

Test place : No.3 semi anechoic chamber  
Temperature : See data  
Humidity : See data

### **5.2 Test configuration**

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 0.8m above the conducting ground plane. The EUT was set on the edge of the tabletop.  
Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.  
Photographs of the set up are shown in Appendix 1.

### **5.3 Test conditions**

Frequency range : 30MHz-300MHz (Biconical antenna) / 300MHz-1000MHz (Logperiodic antenna)  
1000MHz - 2000MHz (Horn antenna)  
Test distance : 3m  
EUT position : Table top  
EUT operation mode : See Clause 4.1

### **5.4 Test procedure**

The height of the measuring antenna varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.  
The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.  
The radiated emission measurements were made with the following detector function of the test receiver and the Spectrum analyzer.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
IF Bandwidth	QP: BW 120kHz	PK: RBW:1MHz/VBW: 3MHz AV *1): RBW:1MHz/VBW:10Hz

\*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

- The noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

### **5.5 Test result**

Summary of the test results: Pass

Date: October 5, 2010

Test engineer: Hiroyuki Furutaka