


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	17°C	Humidity	38%
Test Engineer	Paul Chen	Configurations	2.4GHz WLAN Function + Bluetooth Function

Horizontal

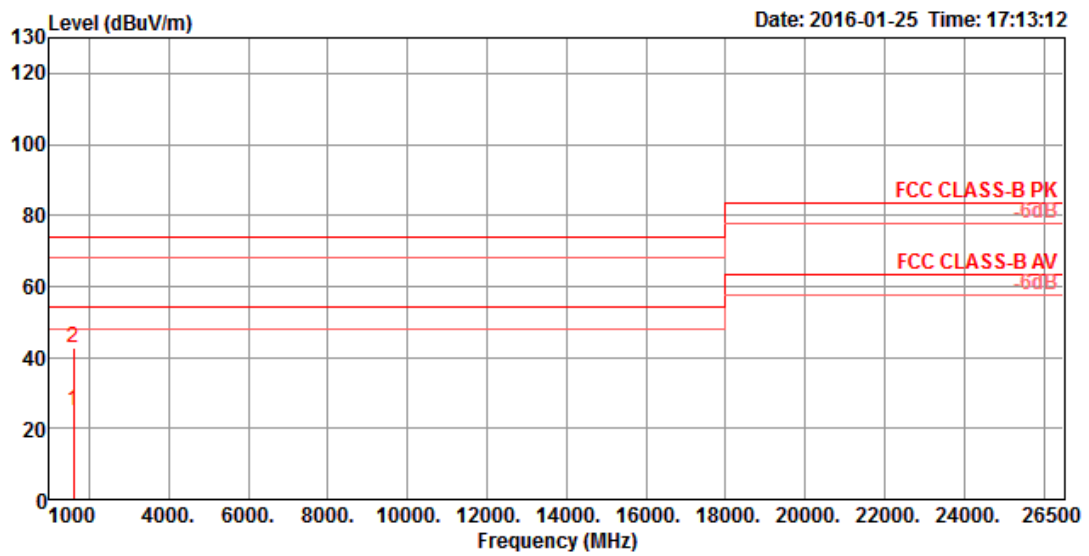

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1596.70	25.02	54.00	-28.98	31.01	3.99	25.58	35.56	114	157 Average	HORIZONTAL
2	1596.70	42.81	74.00	-31.19	48.80	3.99	25.58	35.56	114	157 Peak	HORIZONTAL


Vertical

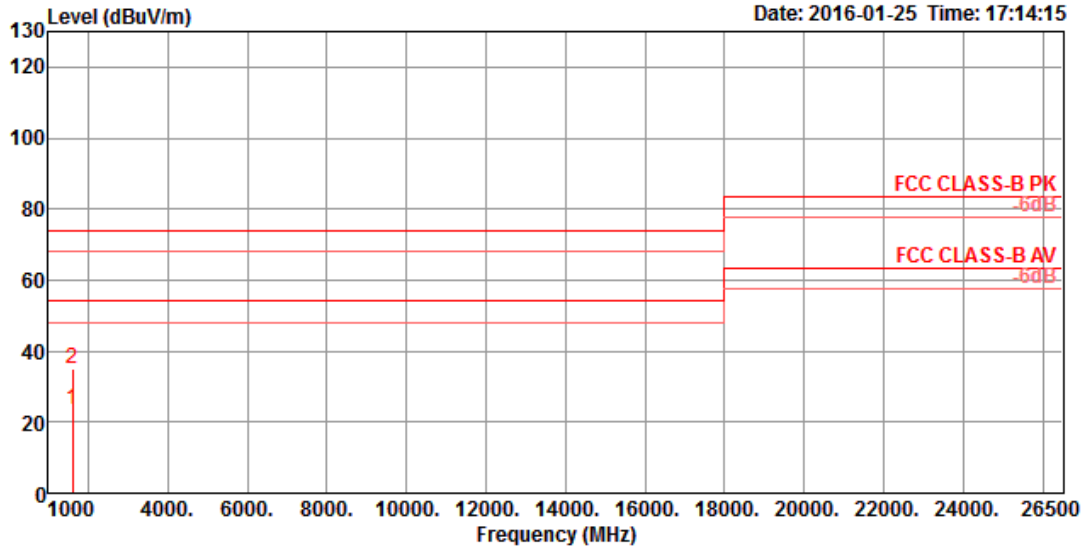

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1596.70	23.74	54.00	-30.26	29.73	3.99	25.58	35.56	101	246	Average	VERTICAL
2	1596.70	35.01	74.00	-38.99	41.00	3.99	25.58	35.56	101	246	Peak	VERTICAL


Temperature	17°C	Humidity	38%
Test Engineer	Paul Chen	Configurations	5GHz WLAN Function + Bluetooth Function

Horizontal

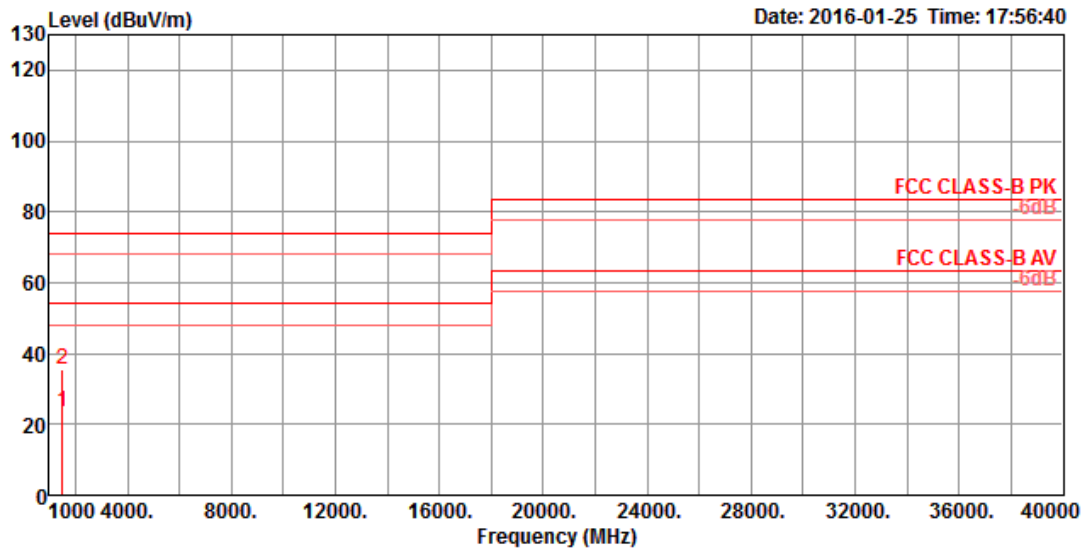

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1510.13	23.34	54.00	-30.66	29.64	3.95	25.42	35.67	158	197 Average	HORIZONTAL
2	1510.13	35.48	74.00	-38.52	41.78	3.95	25.42	35.67	158	197 Peak	HORIZONTAL

Vertical

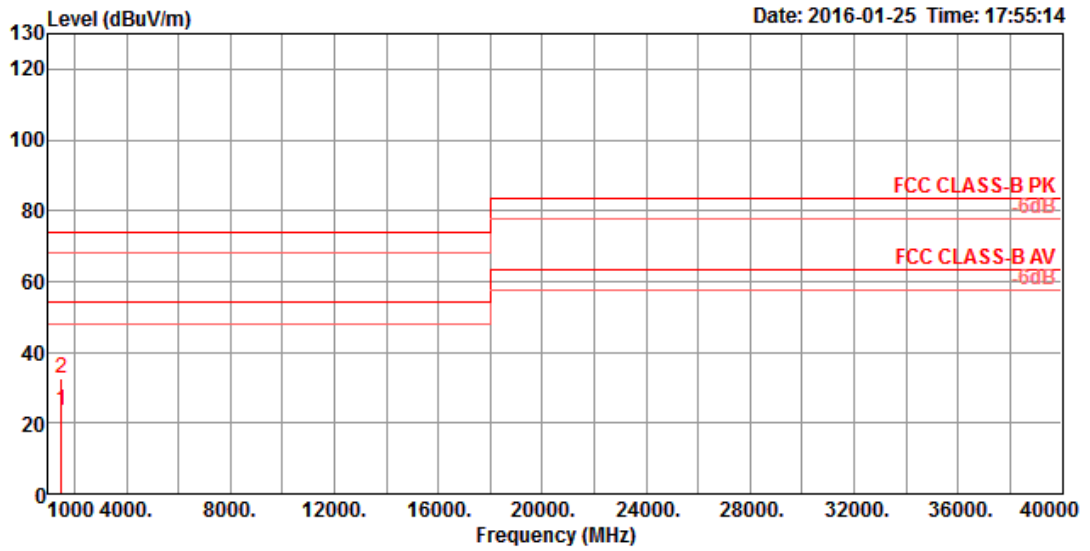

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1510.13	23.43	54.00	-30.57	29.73	3.95	25.42	35.67	186	154	Average	VERTICAL
2	1510.13	32.43	74.00	-41.57	38.73	3.95	25.42	35.67	186	154	Peak	VERTICAL