



EMC TEST REPORT

Report No. : EME-021294
Model No. : WP2000
Issued Date : June 2, 2003

Applicant : AboCom Systems, Inc.
300 1F, No. 21, R&D Rd. II, SBIP, Hsin-Chu,
Taiwan

Test By : Intertek Testing Services Taiwan Ltd.
No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,
Shiang-Shan District, Hsinchu City, Taiwan

This test report consists of 45 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of ITS Laboratory. The test result in this report only applies to the tested sample.

Project Engineer

Jerry Liu

Reviewed By

Elton Chen



Table of Contents

Summary of Tests	3
1. General information	4
1.1 Identification of the EUT	4
1.2 Additional information about the EUT	4
1.3 Antenna description	5
1.4 Peripherals equipment	5
2. Test specifications	6
2.1 Test standard	6
2.2 Operation mode	6
2.3 Test equipment	7
3. Minimum 6dB Bandwidth test	8
3.1 Operating environment	8
3.2 Test setup & procedure	8
3.3 Measured data of Minimum 6dB Bandwidth test results	8
4. Maximum Output Power test	9
4.1 Operating environment	9
4.2 Test setup & procedure	9
4.3 Measured data of Maximum Output Power test results	9
5. Radiated Emission test	10
5.1 Operating environment	10
5.2 Test setup & procedure	10
5.3 Emission limits	11
5.4 Radiated spurious emission test data	12
5.4.1 Measurement results: frequencies equal to or less than 1 GHz	12
5.4.2 Measurement results: frequency above 1GHz	21
6. Power Spectrum Density test	39
6.1 Operating environment	39
6.2 Test setup & procedure	39
6.3 Measured data of Power Spectrum Density test results	39
7. Emission on the band edge §FCC 15.247(C)	40
8. Power Line Conducted Emission test §FCC 15.207	41
8.1 Operating environment	41
8.2 Test setup & procedure	41
8.3 Power Line Conducted Emission test data	43



Summary of Tests

802.11b Wireless PCI Card-Model: WP2000
FCC ID: MQ4WP2K

Test	Reference	Results
Minimum 6dB Bandwidth test	15.247(a)(2)	Complies
Maximum Output Power test	15.247(b)	Complies
Radiated Spurious Emission test	15.205, 15.209	Complies
Power Spectrum Density test	15.247(d)	Complies
Power Line Conducted Emission test	15.207	Complies



1. General information

1.1 Identification of the EUT

Manufacturer	: AboCom System, Inc.
Product	: 802.11b Wireless PCI Card
Model No.	: WP2000
FCC ID.	: MQ4WP2K
Frequency Range	: 2412MHz to 2462MHz
Channel Number	: 11
Frequency of Each Channel	: 2412MHz, 2417MHz, 2422MHz, 2427MHz, 2432MHz, 2437MHz, 2442MHz, 2447MHz, 2452MHz, 2457MHz, 2462MHz
Type of Modulation	: CCK (11Mbps, 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps)
Power Supply	: 5Vdc from PC
Power Cord	: N/A
Sample Received	: Oct. 24, 2002
Test Date(s)	: Oct. 29, 2002 to Nov. 1, 2002

A FCC DoC report has been generated for the client.

1.2 Additional information about the EUT

The 802.11b Wireless PCI Card is a powerful 32bit PCI Card that install quickly and easily into Desktop PC for user's wireless network applications and based on the IEEE 802.11b standard offering a data rate of 11Mbps in a wireless LAN environment. It is a high-speed wireless network card that plugs into user's desktop PC and accesses to the LAN or peer-to-peer networking easily without wires or cables.

For more detail features, please refer to User's manual as file name "Installation guide.pdf"

The EUT has three kinds of antennas, the difference is in outlook and antenna length, and the three combinations are listed as below:

Type of EUT	Definition in this report
Dipole antenna (120 cm length)	WP2000 (antenna A)
Dipole antenna (90 cm length)	WP2000 (antenna B)
Dipole antenna (please refer to External photo as file name "External photo.pdf)	WP2000 (antenna C)



1.3 Antenna description

The description of three kinds of antennas lists as below:

For antenna A & B:

The antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector.

Antenna Gain : 0dBi
Antenna Type : Dipole antenna
Connector Type : SMA Reverse

For antenna C:

The antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector.

Antenna Gain : 2dBi
Antenna Type : Dipole antenna
Connector Type : SMA Reverse

1.4 Peripherals equipment

Peripherals	Manufacturer	Product No.	Serial No.	FCC ID
Notebook	HP	Brio BA410	SG11304267	FCC DoC Approved
Printer	HP	C2642A	TH86K1N2ZB	FCC DoC Approved
Modem	Dynalink	V1456VQE	00V230A00051494	FCC DoC Approved



2. Test specifications

2.1 Test standard

The EUT was performed according to the procedures in FCC Part 15 Subpart C Section §15.205 、 §15.207 、 §15.209 、 §15.247 and ANSI C63.4/1992.

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of this frequency band were all meet limit requirement, thus we evaluate the EUT pass the specified test.

2.2 Operation mode

We conducted the Radiated Spurious Emission test and Band-edge test for three kinds of antennas individually and recorded in this report.

For the other test items, we measured the 120 cm long antenna and recorded in this report.

Plug the EUT into PC PCI socket, turn on the PC then run the test program “wlanegn.exe” which provided by manufacturer.

The EUT was continuously transmit during the test.



2.3 Test equipment

Equipment	Brand	Frequency range	Model No.	Series No.	Last Cal.Date
EMI Test Receiver	Rohde & Schwarz	9kHz~2.75GHz	ESCS 30	825788/014	Feb. 18, 2003
EMI Test Receiver	Rohde & Schwarz	20Hz~26.5GHz	ESMI	825428/005	June 10, 2002
Spectrum Analyzer	Rohde & Schwarz	9kHz~30GHz	FSP 30	100137	July 10, 2002
Spectrum Analyzer	Rohde & Schwarz	20Hz~40GHz	FSEK 30	100186	Oct. 9, 2002
Horn Antenna	EMCO	1GHz~18GHz	3115	9906-5890	Sep. 19, 2002
Horn Antenna	SCHWARZBECK	14GHz~40GHz	BBHA 9170	159	June 20, 2002
Bilog Antenna	SCHWARZBECK	25MHz~1.7GHz	VULB 9160	3111	June 20, 2002
Turn Table	HDGmbH	N/A	DS 420S	420/669/01	N/A
Antenna Tower	HDGmbH	N/A	MA 240	240/573	N/A
Microwave Amplifier	Agilent	2GHz~26.5GHz	8348A	3111A00567	Dec. 20, 2002
4GHz Source RF	HP	9KHz~4GHz	8648D	3847U00403	Sep. 7, 2002

Note:

1. The calibration interval of the above instruments is 12 months.



3. Minimum 6dB Bandwidth test

3.1 Operating environment

Temperature: 23 °C
Relative Humidity: 54 %
Atmospheric Pressure 1023 hPa

3.2 Test setup & procedure

The minimum 6dB bandwidth per FCC §15.247(a)(2) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at 100kHz, the video bandwidth set at 100kHz, and the SPAN>>RBW. The test was performed at 3 channels (lowest, middle and highest channel). The minimum 6-dB modulation bandwidth is in the following Table.

See Minimum 6dB Bandwidth plot as file name “Minimum 6dB Bandwidth plot.pdf”

3.3 Measured data of Minimum 6dB Bandwidth test results

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit
Low	2412	10.18	> 500kHz
Middle	2437	10.14	> 500kHz
High	2462	10.22	> 500kHz



4. Maximum Output Power test

4.1 Operating environment

Temperature: 22 °C
Relative Humidity: 60 %
Atmospheric Pressure 1023 hPa

4.2 Test setup & procedure

The power output per FCC §15.247(b) was measured on the EUT using a 50 ohm SMA cable connected to spectrum analyzer. The RBW of spectrum analyzer was set to 1MHz, VBW ≥ RBW. The channel power function would be enable. Power was read directly and cable loss correction (1dB) was added to the reading to obtain power at the EUT antenna terminals. The test was performed at 3 channels (lowest, middle and highest channel).

See Maximum Output Power plot as file name “Maximum Output Power plot CH1, CH6 and CH11.pdf”

4.3 Measured data of Maximum Output Power test results

Channel	Frequency (MHz)	C.B.L. (dB)	Reading (dBm)	Power Output		Limit (W)
				(dBm)	(mW)	
Lowest	2413.45	1	14.83	15.83	38.282	1
Middle	2438.25	1	14.91	15.91	38.994	1
Highest	2463.35	1	14.64	15.64	36.644	1


5. Radiated Emission test

5.1 Operating environment

Temperature:	23	°C
Relative Humidity:	54	%
Atmospheric Pressure	1023	hPa

5.2 Test setup & procedure

The Diagram below shows the test setup, which is utilized to make these measurements.

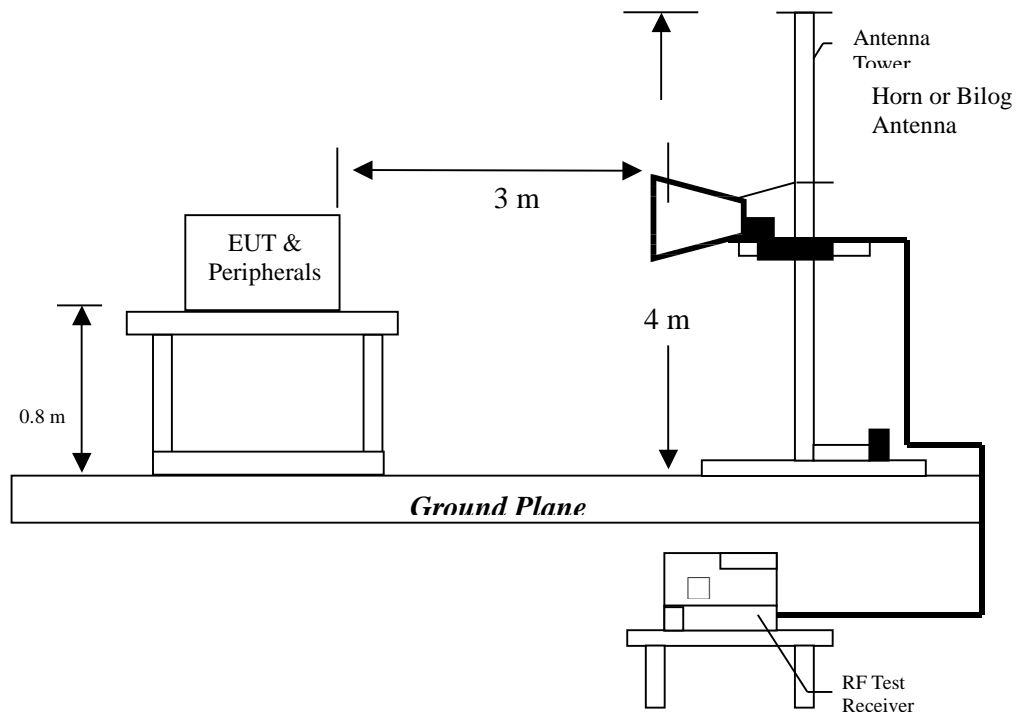

The signal is maximized through rotation and placement in the three orthogonal axes. Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1MHz RBW/VBW) recorded also on the report. The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.



The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

The EUT configuration please refer to the “Spurious set-up photo.pdf”.

5.3 Emission limits

The spurious Emission shall test through the 10th harmonic. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Frequency (MHz)	Limits (dB μ V/m@3m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

Uncertainty was calculated in accordance with NAMAS NIS 81.

Expanded uncertainty (k=2) of radiated emission measurement is ± 4.98 dB.

Expanded uncertainty (k=2) of conducted emission measurement is ± 2.02 dB.



5.4 Radiated spurious emission test data

5.4.1 Measurement results: frequencies equal to or less than 1 GHz

EUT : WP2000 (with antenna A)

Test Condition : TX at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
132.80000	QP	V	9.73	14.47	24.20	43.50	-19.30
165.80000	QP	V	11.91	11.79	23.70	43.50	-19.80
214.30000	QP	V	13.62	9.98	23.60	43.50	-19.90
243.40000	QP	V	14.25	11.35	25.60	46.00	-20.40
299.70000	QP	V	15.85	13.15	29.00	46.00	-17.00
499.50000	QP	V	22.37	10.53	32.90	46.00	-13.10
132.80000	QP	H	9.73	13.47	23.20	43.50	-20.30
165.80000	QP	H	11.91	13.89	25.80	43.50	-17.70
299.70000	QP	H	15.85	11.75	27.60	46.00	-18.40
499.50000	QP	H	22.37	10.03	32.40	46.00	-13.60
600.40000	QP	H	23.52	7.08	30.60	46.00	-15.40
730.30000	QP	H	25.27	8.23	33.50	46.00	-12.50

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna A)
Test Condition : TX at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
132.80000	QP	V	9.73	13.37	23.10	43.50	-20.40
165.80000	QP	V	11.91	10.39	22.30	43.50	-21.20
299.70000	QP	V	15.85	9.35	25.20	46.00	-20.80
499.50000	QP	V	22.37	11.53	33.90	46.00	-12.10
800.20000	QP	V	26.50	6.00	32.50	46.00	-13.50
852.60000	QP	V	27.41	5.49	32.90	46.00	-13.10
132.80000	QP	H	9.73	13.37	23.10	43.50	-20.40
165.80000	QP	H	11.91	15.49	27.40	43.50	-16.10
299.70000	QP	H	15.85	9.25	25.10	46.00	-20.90
499.50000	QP	H	22.37	8.33	30.70	46.00	-15.30
600.40000	QP	H	23.52	7.68	31.20	46.00	-14.80
848.70000	QP	H	27.41	5.69	33.10	46.00	-12.90

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna A)
Test Condition : TX at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
132.80000	QP	V	9.73	15.77	25.50	43.50	-18.00
165.80000	QP	V	11.91	14.59	26.50	43.50	-17.00
243.40000	QP	V	14.25	11.75	26.00	46.00	-20.00
499.50000	QP	V	22.37	9.83	32.20	46.00	-13.80
800.20000	QP	V	26.50	6.40	32.90	46.00	-13.10
854.50000	QP	V	27.41	5.89	33.30	46.00	-12.70
132.80000	QP	H	9.73	12.77	22.50	43.50	-21.00
165.80000	QP	H	11.91	11.99	23.90	43.50	-19.60
299.70000	QP	H	15.85	12.85	28.70	46.00	-17.30
499.50000	QP	H	22.37	8.03	30.40	46.00	-15.60
600.40000	QP	H	23.52	7.18	30.70	46.00	-15.30
848.70000	QP	H	27.41	3.49	30.90	46.00	-15.10

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna B)
Test Condition : TX at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
72.70000	QP	V	10.52	12.48	23.00	40.00	-17.00
132.80000	QP	V	9.73	16.07	25.80	43.50	-17.70
243.40000	QP	V	14.25	11.95	26.20	46.00	-19.80
499.50000	QP	V	22.37	10.43	32.80	46.00	-13.20
800.20000	QP	V	26.50	6.20	32.70	46.00	-13.30
850.60000	QP	V	27.41	6.09	33.50	46.00	-12.50
72.70000	QP	H	10.52	12.78	23.30	40.00	-16.70
132.80000	QP	H	9.73	14.77	24.50	43.50	-19.00
299.70000	QP	H	15.85	12.45	28.30	46.00	-17.70
350.10000	QP	H	18.53	11.57	30.10	46.00	-15.90
600.40000	QP	H	23.52	7.68	31.20	46.00	-14.80
850.60000	QP	H	27.41	4.29	31.70	46.00	-14.30

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna B)

Test Condition : TX at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
72.70000	QP	V	10.52	11.98	22.50	40.00	-17.50
132.80000	QP	V	9.73	16.57	26.30	43.50	-17.20
243.40000	QP	V	14.25	11.75	26.00	46.00	-20.00
299.70000	QP	V	15.85	9.75	25.60	46.00	-20.40
499.50000	QP	V	22.37	9.93	32.30	46.00	-13.70
850.60000	QP	V	27.41	5.19	32.60	46.00	-13.40
72.70000	QP	H	10.52	12.78	23.30	40.00	-16.70
132.80000	QP	H	9.73	14.77	24.50	43.50	-19.00
299.70000	QP	H	15.85	12.45	28.30	46.00	-17.70
350.10000	QP	H	18.53	11.57	30.10	46.00	-15.90
600.40000	QP	H	23.52	7.68	31.20	46.00	-14.80
850.60000	QP	H	27.41	4.29	31.70	46.00	-14.30

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna B)
Test Condition : TX at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
132.80000	QP	V	9.73	15.17	24.90	43.50	-18.60
200.70000	QP	V	12.91	11.59	24.50	43.50	-19.00
243.40000	QP	V	14.25	11.85	26.10	46.00	-19.90
299.70000	QP	V	15.85	8.75	24.60	46.00	-21.40
499.50000	QP	V	22.37	10.13	32.50	46.00	-13.50
848.70000	QP	V	27.41	5.19	32.60	46.00	-13.40
72.70000	QP	H	10.52	11.08	21.60	40.00	-18.40
132.80000	QP	H	9.73	12.27	22.00	43.50	-21.50
299.70000	QP	H	15.85	12.85	28.70	46.00	-17.30
350.10000	QP	H	18.53	11.87	30.40	46.00	-15.60
499.50000	QP	H	22.37	6.73	29.10	46.00	-16.90
600.40000	QP	H	23.52	5.98	29.50	46.00	-16.50

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna C)

Test Condition : TX at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
132.80000	QP	V	9.73	14.97	24.70	43.50	-18.80
214.30000	QP	V	13.62	10.68	24.30	43.50	-19.20
243.40000	QP	V	14.25	12.15	26.40	46.00	-19.60
499.50000	QP	V	22.37	9.83	32.20	46.00	-13.80
800.20000	QP	V	26.50	7.00	33.50	46.00	-12.50
850.60000	QP	V	27.41	5.49	32.90	46.00	-13.10
132.80000	QP	H	9.73	15.57	25.30	43.50	-18.20
243.40000	QP	H	14.25	7.45	21.70	46.00	-24.30
299.70000	QP	H	15.85	8.65	24.50	46.00	-21.50
499.50000	QP	H	22.37	6.43	28.80	46.00	-17.20
600.40000	QP	H	23.52	7.68	31.20	46.00	-14.80
848.70000	QP	H	27.41	2.69	30.10	46.00	-15.90

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna C)

Test Condition : TX at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
132.80000	QP	V	9.73	14.67	24.40	43.50	-19.10
243.40000	QP	V	14.25	12.25	26.50	46.00	-19.50
499.50000	QP	V	22.37	9.03	31.40	46.00	-14.60
800.20000	QP	V	26.50	5.60	32.10	46.00	-13.90
850.60000	QP	V	27.41	6.29	33.70	46.00	-12.30
899.10000	QP	V	27.51	4.99	32.50	46.00	-13.50
132.80000	QP	H	9.73	15.07	24.80	43.50	-18.70
299.70000	QP	H	15.85	9.35	25.20	46.00	-20.80
499.50000	QP	H	22.37	7.03	29.40	46.00	-16.60
600.40000	QP	H	23.52	7.68	31.20	46.00	-14.80
623.60000	QP	H	23.92	4.38	28.30	46.00	-17.70
650.80000	QP	H	23.58	4.43	28.00	46.00	-18.00

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna C)
Test Condition : TX at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
243.40000	QP	V	14.25	12.55	26.80	46.00	-19.20
499.50000	QP	V	22.37	9.43	31.80	46.00	-14.20
548.00000	QP	V	22.90	7.20	30.10	46.00	-15.90
800.20000	QP	V	26.50	6.20	32.70	46.00	-13.30
848.70000	QP	V	27.41	5.39	32.80	46.00	-13.20
901.10000	QP	V	27.51	4.79	32.30	46.00	-13.70
132.80000	QP	H	9.73	14.27	24.00	43.50	-19.50
243.40000	QP	H	14.25	8.55	22.80	46.00	-23.20
299.70000	QP	H	15.85	11.15	27.00	46.00	-19.00
499.50000	QP	H	22.37	6.53	28.90	46.00	-17.10
600.40000	QP	H	23.52	8.48	32.00	46.00	-14.00
625.60000	QP	H	23.94	4.46	28.40	46.00	-17.60

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



5.4.2 Measurement results: frequency above 1GHz

EUT : WP2000 (with antenna A)

Test Condition : TX at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBUV)	Corrected Reading (dBUV)	Limit @ 3 m (dBUV)	Margin (dB)
2038	PK	V	33.74	29.36	-	-	74	-
2038	AV	V	33.74	29.36	-	-	54	-
4076	PK	V	31.88	34.59	-	-	74	-
4076	AV	V	31.88	34.59	-	-	54	-
6114	PK	V	33.42	37.74	-	-	74	-
6114	AV	V	33.42	37.74	-	-	54	-
4824	PK	V	32.496	35.47	-	-	74	-
4824	AV	V	32.496	35.47	-	-	54	-
7236	PK	V	34.32	38.42	-	-	74	-
7236	AV	V	34.32	38.42	-	-	54	-
9648	PK	V	35.808	41.35	50.408	55.95	74	-18.05
9648	AV	V	35.808	41.35	40.578	46.12	54	-7.88
12060	PK	V	35.4	43.38	-	-	74	-
12060	AV	V	35.4	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna A)
Test Condition : TX at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2038	PK	H	33.74	29.36	-	-	74	-
2038	AV	H	33.74	29.36	-	-	54	-
4076	PK	H	31.88	34.59	-	-	74	-
4076	AV	H	31.88	34.59	-	-	54	-
6114	PK	H	33.42	37.74	-	-	74	-
6114	AV	H	33.42	37.74	-	-	54	-
4824	PK	H	32.496	35.47	-	-	74	-
4824	AV	H	32.496	35.47	-	-	54	-
7236	PK	H	34.32	38.42	-	-	74	-
7236	AV	H	34.32	38.42	-	-	54	-
9648	PK	H	35.808	41.35	50.708	56.25	74	-17.75
9648	AV	H	35.808	41.35	40.838	46.38	54	-7.62
12060	PK	H	35.4	43.38	-	-	74	-
12060	AV	H	35.4	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna A)
Test Condition : TX at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2063	PK	V	33.74	29.36	-	-	74	-
2063	AV	V	33.74	29.36	-	-	54	-
4126	PK	V	31.88	34.59	-	-	74	-
4126	AV	V	31.88	34.59	-	-	54	-
6189	PK	V	33.42	37.74	-	-	74	-
6189	AV	V	33.42	37.74	-	-	54	-
4874	PK	V	32.496	35.47	-	-	74	-
4874	AV	V	32.496	35.47	-	-	54	-
7311	PK	V	34.32	38.42	-	-	74	-
7311	AV	V	34.32	38.42	-	-	54	-
9748	PK	V	35.808	41.35	50.138	55.68	74	-18.32
9748	AV	V	35.808	41.35	38.448	43.99	54	-10.01
12185	PK	V	35.4	43.38	-	-	74	-
12185	AV	V	35.4	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna A)
Test Condition : TX at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2063	PK	H	33.74	29.36	-	-	74	-
2063	AV	H	33.74	29.36	-	-	54	-
4126	PK	H	31.88	34.59	-	-	74	-
4126	AV	H	31.88	34.59	-	-	54	-
6189	PK	H	33.42	37.74	-	-	74	-
6189	AV	H	33.42	37.74	-	-	54	-
4874	PK	H	32.496	35.47	-	-	74	-
4874	AV	H	32.496	35.47	-	-	54	-
7311	PK	H	34.32	38.42	-	-	74	-
7311	AV	H	34.32	38.42	-	-	54	-
9748	PK	H	35.808	41.35	50.358	55.9	74	-18.1
9748	AV	H	35.808	41.35	39.218	44.76	54	-9.24
12185	PK	H	35.4	43.38	-	-	74	-
12185	AV	H	35.4	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna A)
Test Condition : TX at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2088	PK	V	33.74	29.36	-	-	74	-
2088	AV	V	33.74	29.36	-	-	54	-
4176	PK	V	31.88	34.59	-	-	74	-
4176	AV	V	31.88	34.59	-	-	54	-
6264	PK	V	33.57	37.74	-	-	74	-
6264	AV	V	33.57	37.74	-	-	54	-
4924	PK	V	32.496	35.47	-	-	74	-
4924	AV	V	32.496	35.47	-	-	54	-
7386	PK	V	34.32	38.42	-	-	74	-
7386	AV	V	34.32	38.42	-	-	54	-
9848	PK	V	35.919	41.55	49.249	54.88	74	-19.12
9848	AV	V	35.919	41.55	36.529	42.16	54	-11.84
12310	PK	V	35.315	43.75	-	-	74	-
12310	AV	V	35.315	43.75	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna A)
Test Condition : TX at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2088	PK	H	33.74	29.36	-	-	74	-
2088	AV	H	33.74	29.36	-	-	54	-
4176	PK	H	31.88	34.59	-	-	74	-
4176	AV	H	31.88	34.59	-	-	54	-
6264	PK	H	33.57	37.74	-	-	74	-
6264	AV	H	33.57	37.74	-	-	54	-
4924	PK	H	32.496	35.47	-	-	74	-
4924	AV	H	32.496	35.47	-	-	54	-
7386	PK	H	34.32	38.42	-	-	74	-
7386	AV	H	34.32	38.42	-	-	54	-
9848	PK	H	35.919	41.55	49.889	55.52	74	-18.48
9848	AV	H	35.919	41.55	37.569	43.2	54	-10.8
12310	PK	H	35.315	43.75	-	-	74	-
12310	AV	H	35.315	43.75	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna B)
Test Condition : TX at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2038	PK	V	33.74	29.36	-	-	74	-
2038	AV	V	33.74	29.36	-	-	54	-
4076	PK	V	31.88	34.59	-	-	74	-
4076	AV	V	31.88	34.59	-	-	54	-
6114	PK	V	33.42	37.74	-	-	74	-
6114	AV	V	33.42	37.74	-	-	54	-
4824	PK	V	32.496	35.47	-	-	74	-
4824	AV	V	32.496	35.47	-	-	54	-
7236	PK	V	34.32	38.42	-	-	74	-
7236	AV	V	34.32	38.42	-	-	54	-
9648	PK	V	35.808	41.35	51.348	56.89	74	-17.11
9648	AV	V	35.808	41.35	43.328	48.87	54	-5.13
12060	PK	V	35.4	43.38	-	-	74	-
12060	AV	V	35.4	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna B)
Test Condition : TX at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2038	PK	H	33.74	29.36	-	-	74	-
2038	AV	H	33.74	29.36	-	-	54	-
4076	PK	H	31.88	34.59	-	-	74	-
4076	AV	H	31.88	34.59	-	-	54	-
6114	PK	H	33.42	37.74	-	-	74	-
6114	AV	H	33.42	37.74	-	-	54	-
4824	PK	H	32.496	35.47	-	-	74	-
4824	AV	H	32.496	35.47	-	-	54	-
7236	PK	H	34.32	38.42	-	-	74	-
7236	AV	H	34.32	38.42	-	-	54	-
9648	PK	H	35.808	41.35	50.018	55.56	74	-18.44
9648	AV	H	35.808	41.35	39.208	44.75	54	-9.25
12060	PK	H	35.4	43.38	-	-	74	-
12060	AV	H	35.4	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna B)
Test Condition : TX at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2063	PK	V	33.74	29.36	-	-	74	-
2063	AV	V	33.74	29.36	-	-	54	-
4126	PK	V	31.88	34.59	-	-	74	-
4126	AV	V	31.88	34.59	-	-	54	-
6189	PK	V	33.42	37.74	-	-	74	-
6189	AV	V	33.42	37.74	-	-	54	-
4874	PK	V	32.496	35.47	-	-	74	-
4874	AV	V	32.496	35.47	-	-	54	-
7311	PK	V	34.32	38.42	-	-	74	-
7311	AV	V	34.32	38.42	-	-	54	-
9748	PK	V	35.808	41.35	50.518	56.06	74	-17.94
9748	AV	V	35.808	41.35	38.368	43.91	54	-10.09
12185	PK	V	35.4	43.38	-	-	74	-
12185	AV	V	35.4	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna B)
Test Condition : TX at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2063	PK	H	33.74	29.36	-	-	74	-
2063	AV	H	33.74	29.36	-	-	54	-
4126	PK	H	31.88	34.59	-	-	74	-
4126	AV	H	31.88	34.59	-	-	54	-
6189	PK	H	33.42	37.74	-	-	74	-
6189	AV	H	33.42	37.74	-	-	54	-
4874	PK	H	32.496	35.47	-	-	74	-
4874	AV	H	32.496	35.47	-	-	54	-
7311	PK	H	34.32	38.42	-	-	74	-
7311	AV	H	34.32	38.42	-	-	54	-
9748	PK	H	35.808	41.35	49.768	55.31	74	-18.69
9748	AV	H	35.808	41.35	38.378	43.92	54	-10.08
12185	PK	H	35.4	43.38	-	-	74	-
12185	AV	H	35.4	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna B)
Test Condition : TX at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2088	PK	V	33.74	29.36	-	-	74	-
2088	AV	V	33.74	29.36	-	-	54	-
4176	PK	V	31.88	34.59	-	-	74	-
4176	AV	V	31.88	34.59	-	-	54	-
6264	PK	V	33.57	37.74	-	-	74	-
6264	AV	V	33.57	37.74	-	-	54	-
4924	PK	V	32.496	35.47	-	-	74	-
4924	AV	V	32.496	35.47	-	-	54	-
7386	PK	V	34.32	38.42	-	-	74	-
7386	AV	V	34.32	38.42	-	-	54	-
9848	PK	V	35.919	41.55	48.869	54.5	74	-19.5
9848	AV	V	35.919	41.55	36.119	41.75	54	-12.25
12310	PK	V	35.315	43.75	-	-	74	-
12310	AV	V	35.315	43.75	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna B)
Test Condition : TX at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2088	PK	H	33.74	29.36	-	-	74	-
2088	AV	H	33.74	29.36	-	-	54	-
4176	PK	H	31.88	34.59	-	-	74	-
4176	AV	H	31.88	34.59	-	-	54	-
6264	PK	H	33.57	37.74	-	-	74	-
6264	AV	H	33.57	37.74	-	-	54	-
4924	PK	H	32.496	35.47	-	-	74	-
4924	AV	H	32.496	35.47	-	-	54	-
7386	PK	H	34.32	38.42	-	-	74	-
7386	AV	H	34.32	38.42	-	-	54	-
9848	PK	H	35.919	41.55	49.369	55	74	-19
9848	AV	H	35.919	41.55	36.719	42.35	54	-11.65
12310	PK	H	35.315	43.75	-	-	74	-
12310	AV	H	35.315	43.75	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna C)
Test Condition : TX at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2038	PK	V	33.74	29.36	-	-	74	-
2038	AV	V	33.74	29.36	-	-	54	-
4076	PK	V	31.88	34.59	-	-	74	-
4076	AV	V	31.88	34.59	-	-	54	-
6114	PK	V	33.42	37.74	-	-	74	-
6114	AV	V	33.42	37.74	-	-	54	-
4824	PK	V	32.496	35.47	-	-	74	-
4824	AV	V	32.496	35.47	-	-	54	-
7236	PK	V	34.32	38.42	-	-	74	-
7236	AV	V	34.32	38.42	-	-	54	-
9648	PK	V	35.808	41.35	50.018	55.56	74	-18.44
9648	AV	V	35.808	41.35	39.118	44.66	54	-9.34
12060	PK	V	35.4	43.38	-	-	74	-
12060	AV	V	35.4	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna C)
Test Condition : TX at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2038	PK	H	33.74	29.36	-	-	74	-
2038	AV	H	33.74	29.36	-	-	54	-
4076	PK	H	31.88	34.59	-	-	74	-
4076	AV	H	31.88	34.59	-	-	54	-
6114	PK	H	33.42	37.74	-	-	74	-
6114	AV	H	33.42	37.74	-	-	54	-
4824	PK	H	32.496	35.47	-	-	74	-
4824	AV	H	32.496	35.47	-	-	54	-
7236	PK	H	34.32	38.42	-	-	74	-
7236	AV	H	34.32	38.42	-	-	54	-
9648	PK	H	35.808	41.35	49.728	55.27	74	-18.73
9648	AV	H	35.808	41.35	38.348	43.89	54	-10.11
12060	PK	H	35.4	43.38	-	-	74	-
12060	AV	H	35.4	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna C)

Test Condition : TX at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2063	PK	V	33.74	29.36	-	-	74	-
2063	AV	V	33.74	29.36	-	-	54	-
4126	PK	V	31.88	34.59	-	-	74	-
4126	AV	V	31.88	34.59	-	-	54	-
6189	PK	V	33.42	37.74	-	-	74	-
6189	AV	V	33.42	37.74	-	-	54	-
4874	PK	V	32.496	35.47	-	-	74	-
4874	AV	V	32.496	35.47	-	-	54	-
7311	PK	V	34.32	38.42	-	-	74	-
7311	AV	V	34.32	38.42	-	-	54	-
9748	PK	V	35.808	41.35	49.548	55.09	74	-18.91
9748	AV	V	35.808	41.35	36.918	42.46	54	-11.54
12185	PK	V	35.4	43.38	-	-	74	-
12185	AV	V	35.4	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna C)
Test Condition : TX at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2063	PK	H	33.74	29.36	-	-	74	-
2063	AV	H	33.74	29.36	-	-	54	-
4126	PK	H	31.88	34.59	-	-	74	-
4126	AV	H	31.88	34.59	-	-	54	-
6189	PK	H	33.42	37.74	-	-	74	-
6189	AV	H	33.42	37.74	-	-	54	-
4874	PK	H	32.496	35.47	-	-	74	-
4874	AV	H	32.496	35.47	-	-	54	-
7311	PK	H	34.32	38.42	-	-	74	-
7311	AV	H	34.32	38.42	-	-	54	-
9748	PK	H	35.808	41.35	50.588	56.13	74	-17.87
9748	AV	H	35.808	41.35	40.508	46.05	54	-7.95
12185	PK	H	35.4	43.38	-	-	74	-
12185	AV	H	35.4	43.38	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna C)
Test Condition : TX at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2088	PK	V	33.74	29.36	-	-	74	-
2088	AV	V	33.74	29.36	-	-	54	-
4176	PK	V	31.88	34.59	-	-	74	-
4176	AV	V	31.88	34.59	-	-	54	-
6264	PK	V	33.57	37.74	-	-	74	-
6264	AV	V	33.57	37.74	-	-	54	-
4924	PK	V	32.496	35.47	-	-	74	-
4924	AV	V	32.496	35.47	-	-	54	-
7386	PK	V	34.32	38.42	-	-	74	-
7386	AV	V	34.32	38.42	-	-	54	-
9848	PK	V	35.919	41.55	49.339	54.97	74	-19.03
9848	AV	V	35.919	41.55	35.999	41.63	54	-12.37
12310	PK	V	35.315	43.75	-	-	74	-
12310	AV	V	35.315	43.75	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



EUT : WP2000 (with antenna C)
Test Condition : TX at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
2088	PK	H	33.74	29.36	-	-	74	-
2088	AV	H	33.74	29.36	-	-	54	-
4176	PK	H	31.88	34.59	-	-	74	-
4176	AV	H	31.88	34.59	-	-	54	-
6264	PK	H	33.57	37.74	-	-	74	-
6264	AV	H	33.57	37.74	-	-	54	-
4924	PK	H	32.496	35.47	-	-	74	-
4924	AV	H	32.496	35.47	-	-	54	-
7386	PK	H	34.32	38.42	-	-	74	-
7386	AV	H	34.32	38.42	-	-	54	-
9848	PK	H	35.919	41.55	49.239	54.87	74	-19.13
9848	AV	H	35.919	41.55	37.369	43	54	-11
12310	PK	H	35.315	43.75	-	-	74	-
12310	AV	H	35.315	43.75	-	-	54	-

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor.



6. Power Spectrum Density test

6.1 Operating environment

Temperature: °C
Relative Humidity: %
Atmospheric Pressure 1023 hPa

6.2 Test setup & procedure

The power spectrum density per FCC § 15.247(d) was measured from the antenna port of the EUT using a 50ohm spectrum analyzer with the resolution bandwidth set at 3kHz, the video bandwidth set at 10kHz, a span of 1.5 MHz, and the sweep time set at 500 seconds. Power Density was read directly and cable loss (1dB) correction was added to the reading to obtain power at the EUT antenna terminals. The test was performed at 3 channels (lowest, middle and highest channel). The Power Spectral Density measured result is in the following table.

See Power Spectrum Density plot as file name “Power Spectrum Density plot.pdf”

6.3 Measured data of Power Spectrum Density test results

Channel	Frequency (MHz)	Measured level (dBm)	Limit (dBm)
Low	2412.84	-11.61	8
Middle	2438.68	-10.82	8
High	2460.81	-11.50	8



7. Emission on the band edge §FCC 15.247(C)

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

See band-edge plot as file name “Band-edge plot.pdf”.




8. Power Line Conducted Emission test §FCC 15.207

8.1 Operating environment

Temperature: 25 °C
Relative Humidity: 56 %
Atmospheric Pressure 1023 hPa

8.2 Test setup & procedure

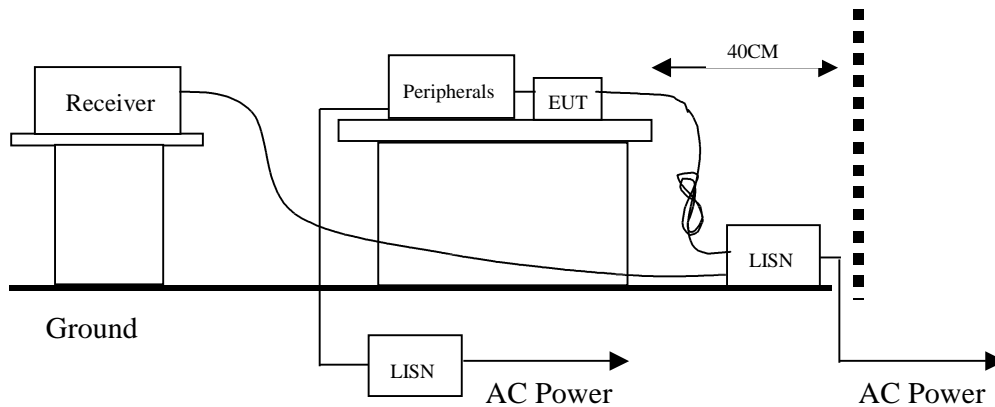

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/1992 on conducted measurement. The AC power conducted emissions was investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz. (15.207 paragraph)

The EUT configuration please refer to the “Conducted set-up photo.pdf”.

See Power Line Conducted Emission plot as file name “Power Line Conducted Emission plot.pdf”.



Emission Limit

Freq. (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56*	56 – 46*
0.50~5.00	56	46
5.00~30.0	60	50

*Decreases with the logarithm of the frequency.



8.3 Power Line Conducted Emission test data

(1) Line

EUT : WP2000
Test Condition : Tx at low channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.20600	40.1	63.37	39.8	53.37	-23.27	-13.57
0.23000	42.8	62.45	42.8	52.45	-19.65	-9.65
0.30200	37.4	60.19	37.3	50.19	-22.79	-12.89
0.71000	33.7	56.00	32.7	46.00	-22.30	-13.30
8.91000	35.1	60.00	34.1	50.00	-24.90	-15.90
15.02200	37.3	60.00	36.3	50.00	-22.70	-13.70

(2) Neutral

EUT : WP2000
Test Condition : Tx at low channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.19800	41.3	63.70	40.7	53.70	-22.40	-13.00
0.23000	44.7	62.45	44.3	52.45	-17.75	-8.15
0.30200	38.0	60.19	37.9	50.19	-22.19	-12.29
0.71000	33.7	56.00	32.5	46.00	-22.30	-13.50
5.95000	37.7	60.00	33.9	50.00	-22.30	-16.10
14.99000	38.3	60.00	36.4	50.00	-21.70	-13.60

Remark:

1. The reading value included cable loss and LISN factor.
2. Uncertainty was calculated in accordance with NAMAS NIS 81.

Expanded uncertainty (k=2) of conducted emission measurement is ± 2.6 dB.



(1) Line

EUT : WP2000
Test Condition : Tx at middle channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.23000	42.9	62.45	42.9	52.45	-19.55	-9.55
0.30200	37.6	60.19	37.6	50.19	-22.59	-12.59
0.71000	33.6	56.00	32.1	46.00	-22.40	-13.90
0.80600	33.5	56.00	31.5	46.00	-22.50	-14.50
6.86200	37.7	60.00	33.4	50.00	-22.30	-16.60
15.33400	37.3	60.00	36.6	50.00	-22.70	-13.40

(2) Neutral

EUT : WP2000
Test Condition : Tx at middle channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.19800	41.3	63.70	40.8	53.70	-22.40	-12.90
0.23000	44.6	62.45	44.2	52.45	-17.85	-8.25
0.30200	38.0	60.19	38.0	50.19	-22.19	-12.19
0.71000	33.4	56.00	31.6	46.00	-22.60	-14.40
0.80600	33.7	56.00	32.0	46.00	-22.30	-14.00
5.95000	37.9	60.00	34.0	50.00	-22.10	-16.00

Remark:

1. The reading value included cable loss and LISN factor.
2. Uncertainty was calculated in accordance with NAMAS NIS 81.
Expanded uncertainty (k=2) of conducted emission measurement is ± 2.6 dB.



(1) Line

EUT : WP2000
Test Condition : Tx at high channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.23000	43.0	62.45	43.0	52.45	-19.45	-9.45
0.30200	37.6	60.19	37.6	50.19	-22.59	-12.59
0.71000	33.6	56.00	32.0	46.00	-22.40	-14.00
0.80600	33.6	56.00	31.5	46.00	-22.40	-14.50
5.95000	39.1	60.00	35.5	50.00	-20.90	-14.50
15.33400	37.6	60.00	36.7	50.00	-22.40	-13.30

(2) Neutral

EUT : WP2000
Test Condition : Tx at high channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.19800	41.3	63.70	40.7	53.70	-22.40	-13.00
0.23000	44.8	62.45	44.3	52.45	-17.65	-8.15
0.30200	38.0	60.19	37.9	50.19	-22.19	-12.29
0.71000	33.9	56.00	32.8	46.00	-22.10	-13.20
0.80600	32.9	56.00	30.7	46.00	-23.10	-15.30
5.95000	37.0	60.00	36.2	50.00	-23.00	-13.80

Remark:

1. The reading value included cable loss and LISN factor.
2. Uncertainty was calculated in accordance with NAMAS NIS 81.
Expanded uncertainty (k=2) of conducted emission measurement is ± 2.6 dB.