

EMC TEST REPORT

Report No. : EME-060172
Model No. : WR-201
Issued Date : Apr. 10, 2006

Applicant : AboCom Systems, Inc.
1F, No. 21, Yanfa 2nd Road, SBIP, Hsinchu City 300,
Taiwan

Test By : Intertek Testing Services Taiwan Ltd.
No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,
Shiang-Shan District, Hsinchu City, Taiwan


This test report consists of 46 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result(s) in this report only applies to the tested sample(s).

Project Engineer



Jerry Liu

Reviewed By



Kevin Chen

Table of Contents

Summary of Tests	3
1. General information	4
1.1 Identification of the EUT.....	4
1.2 Additional information about the EUT	4
1.3 Antenna description	5
1.4 Peripherals equipment	5
2. Test specifications	6
2.1 Test standard	6
2.2 Operation mode	6
2.3 Test equipment.....	7
3. Minimum 6dB Bandwidth test	8
3.1 Operating environment.....	8
3.2 Test setup & procedure	8
3.3 Measured data of Minimum 6dB Bandwidth test results	8
4. Maximum Output Power test	15
4.1 Operating environment.....	15
4.2 Test setup & procedure	15
4.3 Measured data of Maximum Output Power test results	15
5. Radiated Emission test	16
5.1 Operating environment.....	16
5.2 Test setup & procedure	16
5.3 Emission limits	17
5.4 Radiated spurious emission test data.....	18
5.4.1 Measurement results: frequencies equal to or less than 1 GHz.....	18
5.4.2 Measurement results: frequency above 1GHz.....	19
6. Power Spectrum Density test	25
6.1 Operating environment.....	25
6.2 Test setup & procedure	25
6.3 Measured data of Power Spectrum Density test results	25
7. Emission on the band edge.....	32
7.1 Operating environment.....	32
7.2 Test setup & procedure	32
7.3 Test Result	33
7.3.1 Conducted Method	33
7.3.2 Radiated Method	41
8. Power Line Conducted Emission test §FCC 15.207	43
8.1 Operating environment.....	43
8.2 Test setup & procedure	43
8.3 Emission limit.....	44
8.4 Uncertainty of Conducted Emission.....	44
8.5 Power Line Conducted Emission test data	45

Summary of Tests**802.11g Wireless AP Sound Card-Model: WR-201
FCC ID: MQ4WR201**

Test	Reference	Results
Minimum 6dB Bandwidth test	15.247(a)(2)	Complies
Maximum Output Power test	15.247(b)	Complies
Radiated Spurious Emission test	15.205, 15.209	Complies
Power Spectrum Density test	15.247(e)	Complies
Emission on the Band Edge test	15.247(d)	Complies
AC Power Line Conducted Emission test	15.207	Complies

1. General information

1.1 Identification of the EUT

Applicant	: AboCom Systems, Inc.
Product	: 802.11g Wireless AP Sound Card
Model No.	: WR-201
FCC ID.	: MQ4WR201
Frequency Range	: 2412MHz ~ 2462MHz
Channel Number	: 11 channels
Frequency of Each Channel	: 2412MHz, 2417MHz, 2422MHz, 2427MHz, 2432MHz, 2437MHz, 2442MHz, 2447MHz, 2452MHz, 2457MHz, 2462MHz
Type of Modulation	: DSSS, OFDM
Rated Power	: 120Vac, 60Hz with adapter (Model: MWD41-0900700)
Power Cord	: RJ-45 UTP Cat.5 10meter × 1
Sample Received	: Feb. 9, 2006
Test Date(s)	: Apr. 3, 2006 ~ Apr. 4, 2006

A FCC DoC report has been generated for the client.

1.2 Additional information about the EUT

The EUT is a 802.11g Wireless AP Sound Card, and was defined as information technology equipment.

For more detail features, please refer to User's manual as file name "Installation guide.pdf"

1.3 Antenna description

The antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector.

Antenna Gain : 2dBi max

Antenna Type : Dipole antenna

Connector Type : SMA Revers

1.4 Peripherals equipment

Peripherals	Manufacturer	Product No.	Serial No.
NOTEBOOK PC	DELL	PP02X	N/A
NOTEBOOK PC	DELL	PP05L	CN-5G5152-48643-498-6810
EAR PHONE	e-sense	MSB-206	N/A
SPEAKER	N/A	S767	N/A
SPEAKER	N/A	JAPI	N/A

2. Test specifications

2.1 Test standard

The EUT was performed according to the procedures in FCC Part 15 Subpart C Section § 15.205, §15.207, §15.209, §15.247 and ANSI C63.4/2003.

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of this frequency band were all meet limit requirement, thus we evaluate the EUT pass the specified test.

2.2 Operation mode

The EUT was transmitted continuously during the test.

With individual verifying, the maximum output power was found at 1Mbps data rate for 802.11b mode and 6Mbps data rate for 802.11g mode. The final tests were executed under these conditions and recorded in this report individually.

2.3 Test equipment

Equipment	Brand	Frequency range	Model No.	Intertek ID No.	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	9kHz~2.75GHz	ESCS 30	EC303	04/17/2006
EMI Test Receiver	Rohde & Schwarz	20Hz~26.5GHz	ESMI	EC317	08/07/2006
Spectrum Analyzer	Rohde & Schwarz	9kHz~30GHz	FSP 30	EC353	07/24/2006
Spectrum Analyzer	Rohde & Schwarz	20Hz~40GHz	FSEK 30	EC365	11/01/2006
Horn Antenna	SCHWARZBECK	1GHz~18GHz	BBHA 9120 D	EC371	12/22/2007
Horn Antenna	SCHWARZBECK	14GHz~40GHz	BBHA 9170	EC351	07/08/2007
Bilog Antenna	SCHWARZBECK	25MHz~2GHz	VULB 9168	EC347	12/23/2007
Pre-Amplifier	MITEQ	100MHz~26.5GHz	919981	EC373	02/11/2007
Wideband Peak Power Meter/ Sensor	Anritsu	100MHz~18GHz	ML2497A/ MA2491A	EC396	11/10/2006
Controller	HDGmbH	N/A	CM 100	EP346	N/A
Antenna Tower	HDGmbH	N/A	MA 240	EP347	N/A
LISN	Rohde & Schwarz	9KHz~30MHz	ESH3-Z5	EC344	01/13/2007

- Note: 1. The above equipments are within the valid calibration period.
 2. The test antennas (receiving antenna) are calibration per 3 years.

3. Minimum 6dB Bandwidth test

3.1 Operating environment

Temperature: 23
 Relative Humidity: 55 %
 Atmospheric Pressure: 1023 hPa

3.2 Test setup & procedure

The minimum 6dB bandwidth per FCC §15.247(a)(2) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN>>RBW. The test was performed at 3 channels (lowest, middle and highest channel). The minimum 6-dB modulation bandwidth is in the following Table.

3.3 Measured data of Minimum 6dB Bandwidth test results

Test Model: 802.11b (DSSS Modulation) operating mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit
1 (lowest)	2412	9.16	> 500kHz
6 (middle)	2437	9.16	> 500kHz
11 (highest)	2462	9.16	> 500kHz


Test Model: 802.11g (OFDM Modulation) operating mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit
1 (lowest)	2412	15.92	> 500kHz
6 (middle)	2437	16.12	> 500kHz
11 (highest)	2462	15.88	> 500kHz

Please see the plot below.


Test Mode: 802.11b (DSSS Modulation) operating mode

	Max/Ref Lvl	Delta 2 [T1]	RBW	100 kHz	RF Att	10 dB
	20 dBm	3.27 dB	VBW	100 kHz		
	1.5 dBm	9.16000000 MHz	SWT	5 ms	Unit	dBm

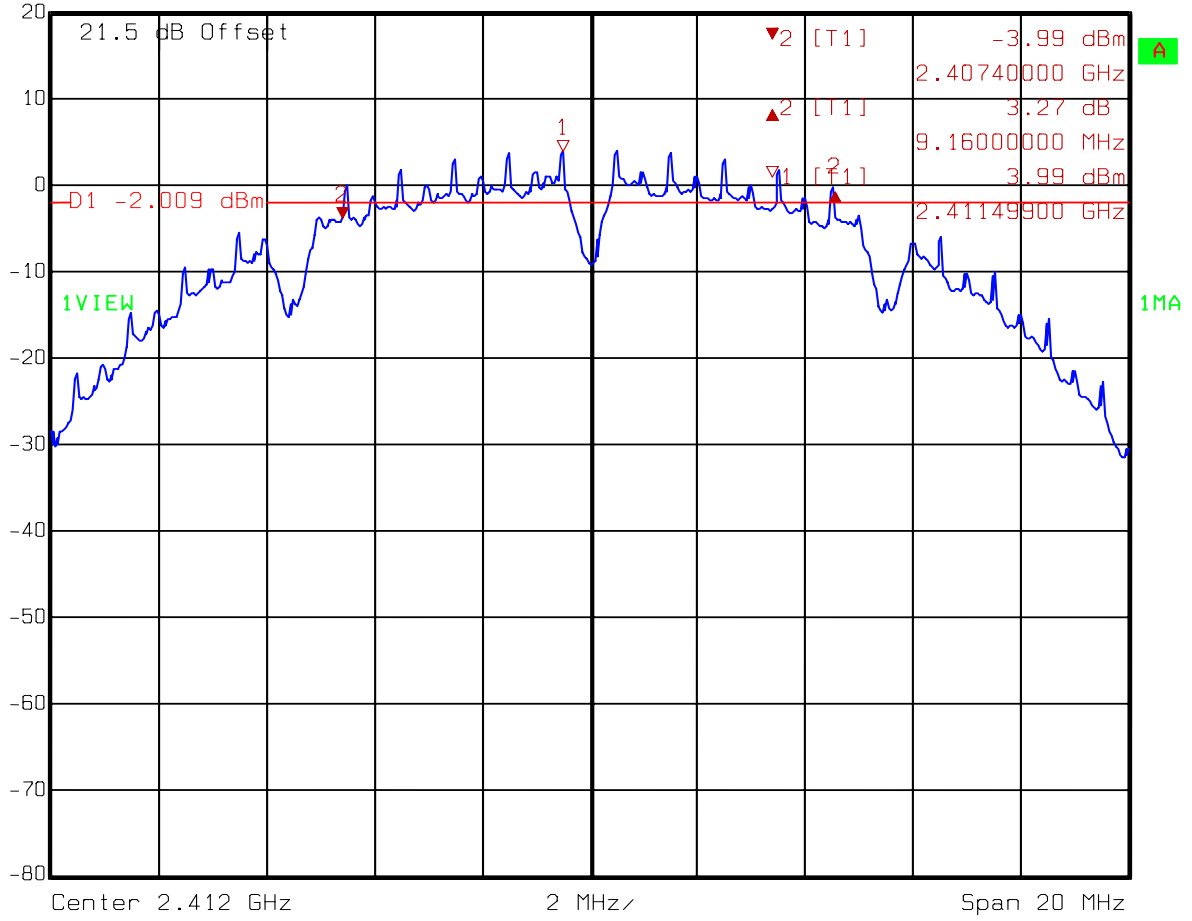


Title: 6dB Bandwidth
 Comment A: Channel 1 at 802.11b mode
 Date: 04.APR.2006 11:45:45

	Max/Ref Lvl Delta 2 [T1]	RBW 100 kHz	RF Att 10 dB
	20 dBm 3.05 dB	VBW 100 kHz	
	1.5 dBm 9.16000000 MHz	SWT 5 ms	Unit dBm

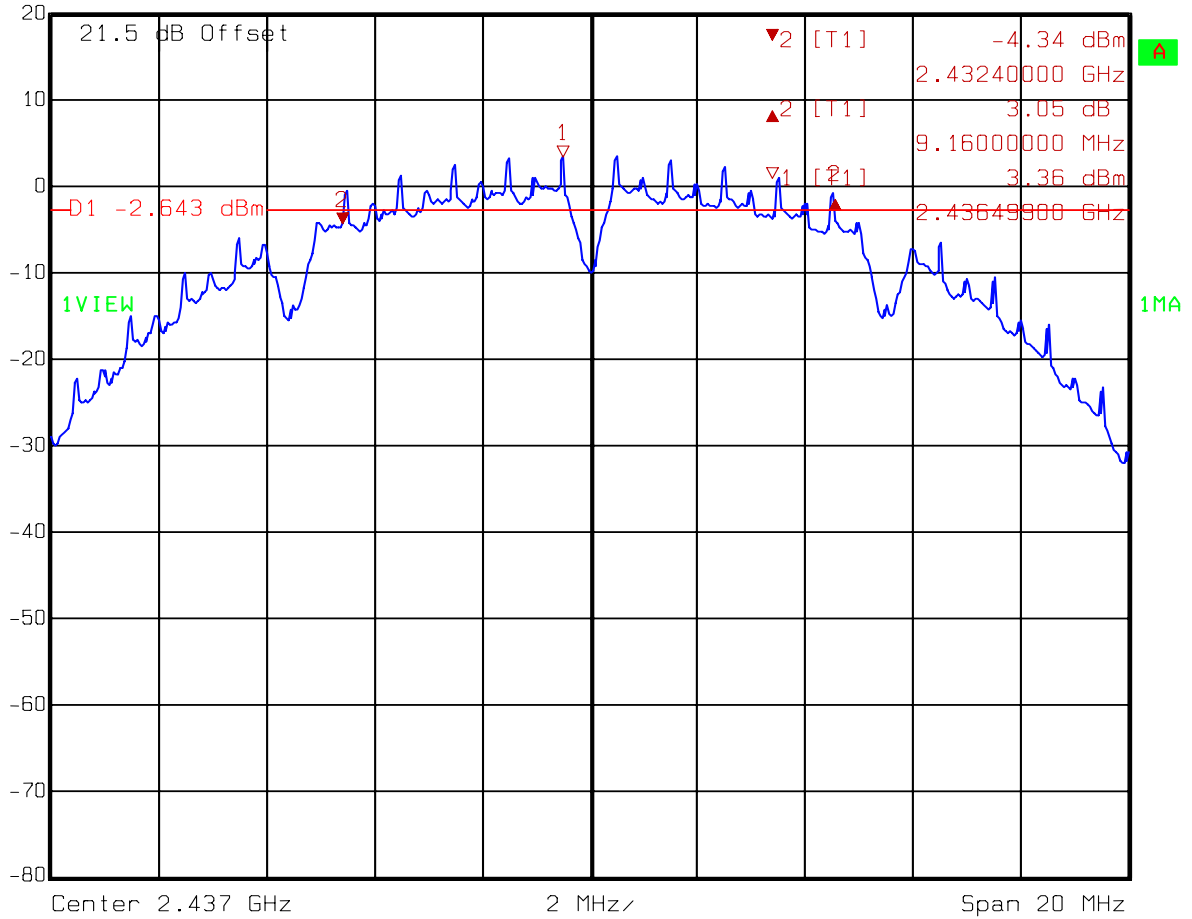

Title: 6dB Bandwidth
 Comment A: Channel 6 at 802.11b mode
 Date: 04.APR.2006 11:48:45


	Max/Ref Lvl Delta 2 [T1]	RBW 100 kHz	RF Att 10 dB
	20 dBm 2.92 dB	VBW 100 kHz	
	1.5 dBm 9.1600000 MHz	SWT 5 ms	Unit dBm

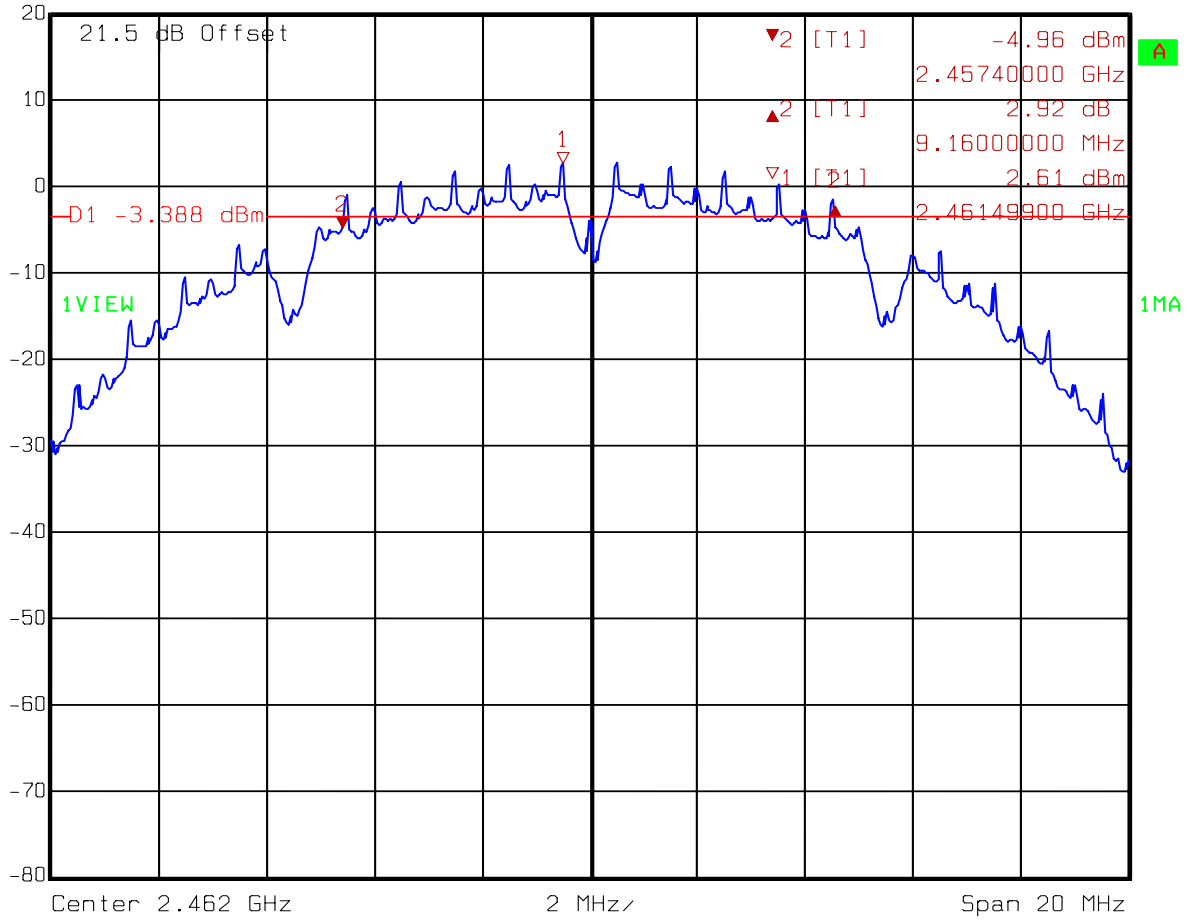

Title: 6dB Bandwidth
 Comment A: Channel 11 at 802.11b mode
 Date: 04.APR.2006 11:42:21


Test Mode: 802.11g (OFDM Modulation) operating mode

	Max/Ref Lvl	Delta 2 [T1]	RBW	100 kHz	RF Att	10 dB
	20 dBm	-0.62 dB	VBW	100 kHz		
	1.5 dBm	15.92000000 MHz	SWT	5 ms	Unit	dBm

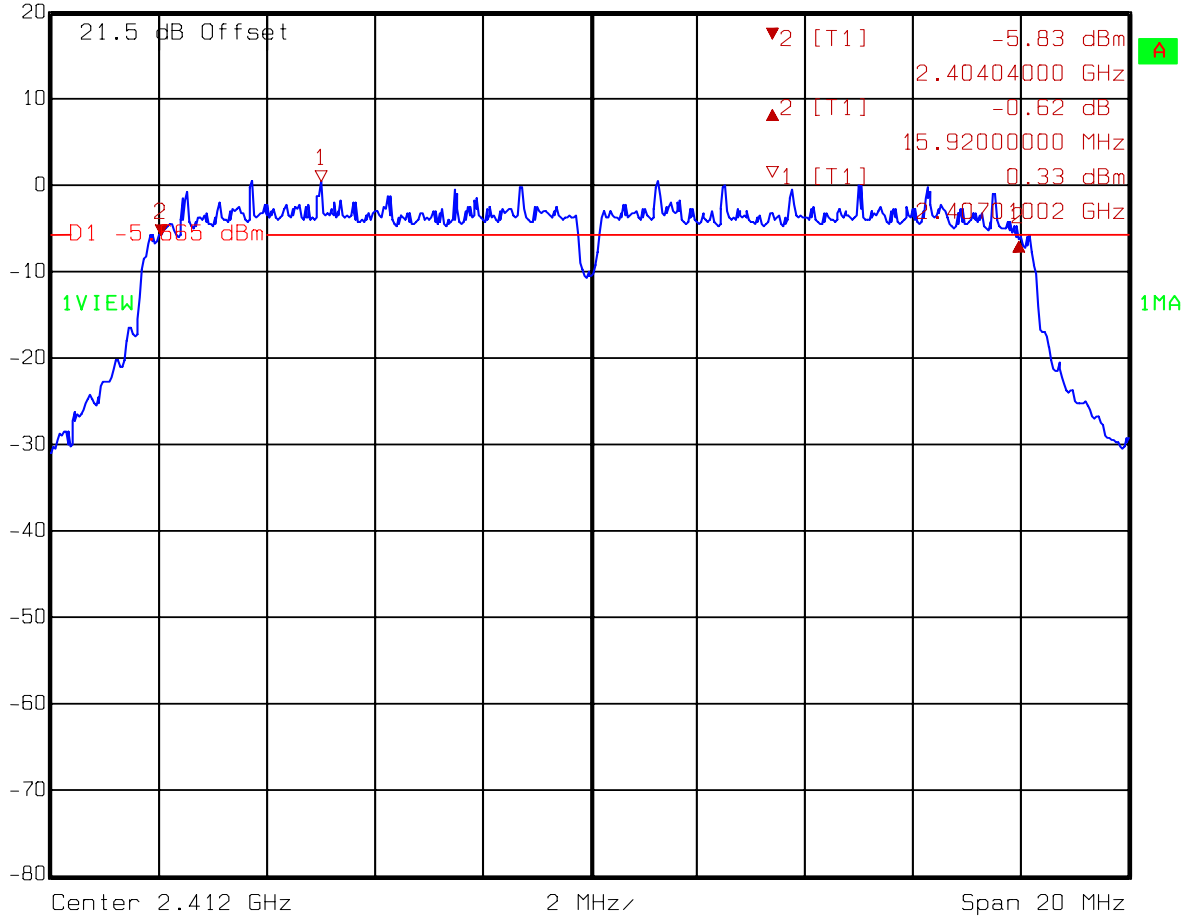


Title: 6dB Bandwidth
 Comment A: Channel 1 at 802.11g mode
 Date: 04.APR.2006 11:32:54

	Max/Ref Lvl Delta 2 [T1]	RBW 100 kHz	RF Att 10 dB
	20 dBm 0.35 dB	VBW 100 kHz	
	1.5 dBm 16.1200000 MHz	SWT 5 ms	Unit dBm

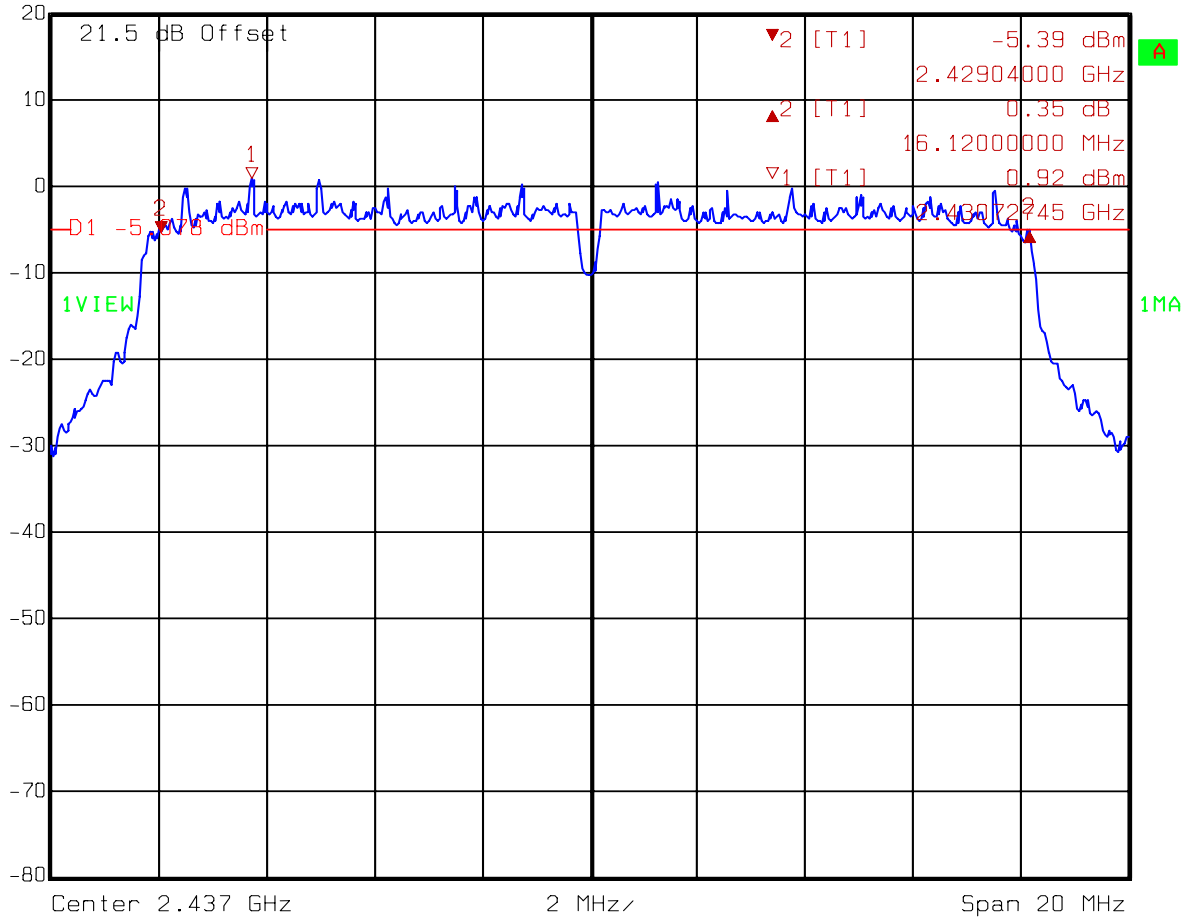

Title: 6dB Bandwidth
 Comment A: Channel 6 at 802.11g mode
 Date: 04.APR.2006 11:37:56

	Max/Ref Lvl Delta 2 [T1]	RBW 100 kHz	RF Att 10 dB
	20 dBm 0.71 dB	VBW 100 kHz	
	1.5 dBm 15.88000000 MHz	SWT 5 ms	Unit dBm

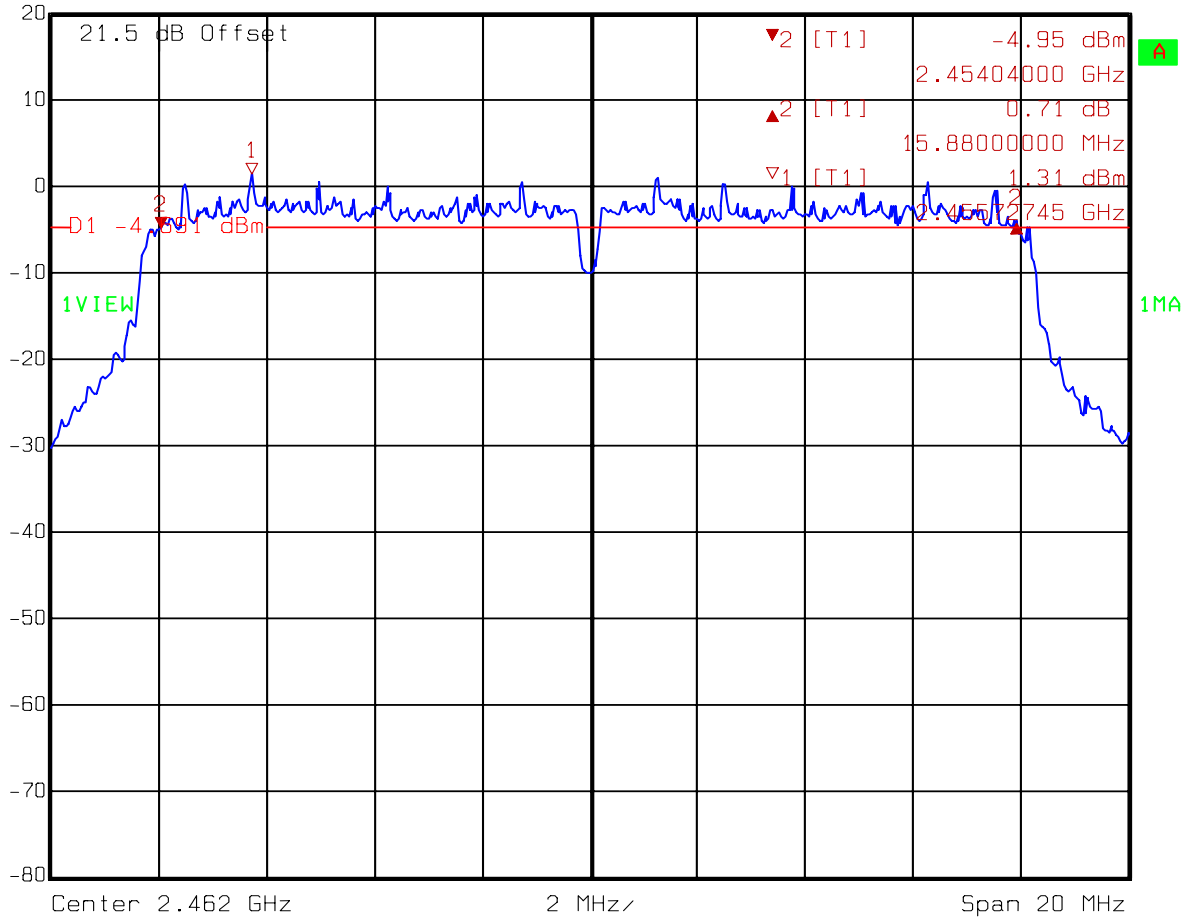

Title: 6dB Bandwidth
 Comment A: Channel 11 at 802.11g mode
 Date: 04.APR.2006 11:39:49

4. Maximum Output Power test

4.1 Operating environment

Temperature: 23
 Relative Humidity: 55 %
 Atmospheric Pressure: 1023 hPa

4.2 Test setup & procedure

The power output per FCC §15.247(b) was measured on the EUT using a 50 ohm SMA cable connected to peak power meter via power sensor. Power was read directly and cable loss correction (1.5 dB) was added to the reading to obtain power at the EUT antenna terminals. The test was performed at 3 channels (lowest, middle and highest channel).

4.3 Measured data of Maximum Output Power test results

Test Mode: 802.11b (DSSS Modulation) operating mode

Channel	Freq. (MHz)	C.L. (dB)	Reading (dBm)	Conducted Peak Output Power		Limit (W)
				(dBm)	(mW)	
1 (lowest)	2412	1.5	13.56	15.06	32.06	1
6 (middle)	2437	1.5	13.03	14.53	28.38	1
11 (highest)	2462	1.5	12.46	13.96	24.89	1

Remark:

Conducted Peak Output Power = Reading + C.L.

Test Mode: 802.11g (OFDM Modulation) operating mode

Channel	Freq. (MHz)	C.L. (dB)	Reading (dBm)	Conducted Peak Output Power		Limit (W)
				(dBm)	(mW)	
1 (lowest)	2412	1.5	19.56	21.06	127.64	1
6 (middle)	2437	1.5	19.92	21.42	138.68	1
11 (highest)	2462	1.5	20.15	21.65	146.22	1

Remark:

Conducted Peak Output Power = Reading + C.L.


5. Radiated Emission test

5.1 Operating environment

Temperature: 23
Relative Humidity: 53 %
Atmospheric Pressure: 1023 hPa

5.2 Test setup & procedure

The Diagram below shows the test setup, which is utilized to make these measurements.

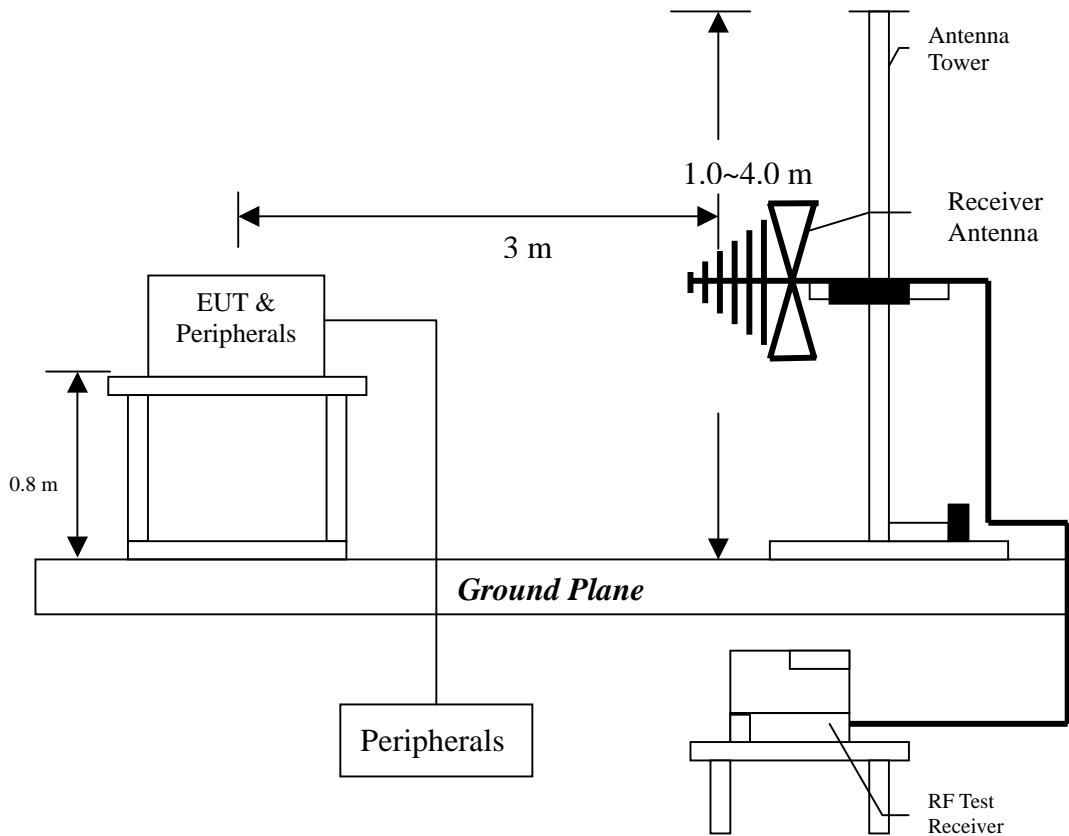

Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1MHz RBW/VBW) recorded also on the report.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent 3 meter reading using inverse scaling with distance.

The EUT configuration please refer to the “Spurious set-up photo.pdf”.

5.3 Emission limits

The spurious Emission shall test through the 10th harmonic. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Frequency (MHz)	Limits (dB μ V/m@3m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

Uncertainty was calculated in accordance with NAMAS NIS 81.
Expanded uncertainty (k=2) of radiated emission measurement is 4.98 dB.

5.4 Radiated spurious emission test data

5.4.1 Measurement results: frequencies equal to or less than 1 GHz

The test was performed on EUT under 802.11b and 802.11g continuously transmitting mode. Channel 1, 6, 11 were verified. The worst case occurred at 802.11b Tx channel 1.

EUT : WR-201
 Worst Case : 802.11b Tx at channel 1

Antenna Polariz. (V/H)	Freq. (MHz)	Receiver Detector	Corr. Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)	Antenna high (cm)	Turn Table angle (degree)
V	55.220	QP	12.90	20.08	32.97	40.00	-7.03	100	114
V	136.700	QP	11.39	18.19	29.58	43.50	-13.92	100	97
V	249.220	QP	12.22	19.03	31.24	46.00	-14.76	100	312
V	450.010	QP	17.68	11.41	29.09	46.00	-16.91	168	310
V	499.480	QP	18.43	14.70	33.12	46.00	-12.88	183	73
V	539.250	QP	19.46	16.99	36.45	46.00	-9.55	197	178
H	112.450	QP	10.54	21.96	32.49	43.50	-11.01	400	257
H	186.170	QP	12.08	20.50	32.58	43.50	-10.92	400	144
H	249.220	QP	12.36	22.38	34.74	46.00	-11.26	400	75
H	329.730	QP	14.40	17.67	32.06	46.00	-13.94	263	285
H	431.580	QP	18.12	14.24	32.36	46.00	-13.64	204	122
H	749.740	QP	22.95	11.38	34.33	46.00	-11.67	135	103

Remark:

1. Corr. Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Corr. Factor

5.4.2 Measurement results: frequency above 1GHz

EUT : WR-201
 Test Condition : 802.11b Tx at channel 1

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)	Ant. high (cm)	Turn Table angle (degree)
4824.00	PK	V	36.07	37.77	49.47	51.17	54	-2.83	105.00	107.00
4824.00	PK	H	36.07	37.77	44.54	46.24	54	-7.76	125.00	237.00

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1GHz to 25GHz. The data value listed above which is higher than the noise floor, the others please refer to noise floor level.

Noise floor level is :

For PK:

- 1GHz-3GHz: 20dBuV
- 3GHz-14GHz: 27dBuV
- 14GHz-26.5GHz: 39dBuV

For AV:

- 1GHz-3GHz: 10dBuV
- 3GHz-14GHz: 16dBuV
- 14GHz-26.5GHz: 28dBuV

EUT : WR-201
 Test Condition : 802.11b Tx at channel 6

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)	Ant. high (cm)	Turn Table angle (degree)
4874.00	PK	V	36.07	37.77	51.52	53.22	54	-0.78	112.00	151.00
4874.00	PK	H	36.07	37.77	43.95	45.65	54	-8.35	114.00	127.00

Remark:

1. “*”: Fundamental Frequency
2. Correction Factor = Antenna Factor + Cable Loss
3. Corrected Level = Reading + Correction Factor – Preamp. Gain
4. The frequency measured ranges from 1GHz to 25GHz. The data value listed above which is higher than the noise floor, the others please refer to noise floor level.

Noise floor level is:

For PK:

- 1GHz-3GHz: 20dBuV
- 3GHz-14GHz: 27dBuV
- 14GHz-26.5GHz: 39dBuV

For AV:

- 1GHz-3GHz: 10dBuV
- 3GHz-14GHz: 16dBuV
- 14GHz-26.5GHz: 28dBuV

EUT : WR-201
 Test Condition : 802.11b Tx at channel 11

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)	Ant. high (cm)	Turn Table angle (degree)
4924.00	PK	V	36.07	37.77	51.16	52.86	54	-1.14	116.00	118.00
4924.00	PK	H	36.07	37.77	42.96	44.66	54	-9.34	112.00	229.00

Remark:

1. “*”: Fundamental Frequency
2. Correction Factor = Antenna Factor + Cable Loss
3. Corrected Level = Reading + Correction Factor – Preamp. Gain
4. The frequency measured ranges from 1GHz to 25GHz. The data value listed above which is higher than the noise floor, the others please refer to noise floor level.

Noise floor level is:

For PK:

- 1GHz-3GHz: 20dBuV
- 3GHz-14GHz: 27dBuV
- 14GHz-26.5GHz: 39dBuV

For AV:

- 1GHz-3GHz: 10dBuV
- 3GHz-14GHz: 16dBuV
- 14GHz-26.5GHz: 28dBuV

EUT : WR-201
 Test Condition : 802.11g Tx at channel 1

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)	Ant. high (cm)	Turn Table angle (degree)
4824.00	PK	V	36.07	37.77	47.88	49.58	54	-4.42	117.00	275.00

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1GHz to 25GHz. The data value listed above which is higher than the noise floor, the others please refer to noise floor level.

Noise floor level is :

For PK:

- 1GHz-3GHz: 20dBuV
- 3GHz-14GHz: 27dBuV
- 14GHz-26.5GHz: 39dBuV

For AV:

- 1GHz-3GHz: 10dBuV
- 3GHz-14GHz: 16dBuV
- 14GHz-26.5GHz: 28dBuV

EUT : WR-201
 Test Condition : 802.11g Tx at channel 6

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)	Ant. high (cm)	Turn Table angle (degree)
4874.00	PK	V	36.07	37.77	44.68	46.38	54	-7.62	114.00	211.00

Remark:

1. “*”: Fundamental Frequency
2. Correction Factor = Antenna Factor + Cable Loss
3. Corrected Level = Reading + Correction Factor – Preamp. Gain
4. The frequency measured ranges from 1GHz to 25GHz. The data value listed above which is higher than the noise floor, the others please refer to noise floor level.

Noise floor level is:

For PK:

- 1GHz-3GHz: 20dBuV
- 3GHz-14GHz: 27dBuV
- 14GHz-26.5GHz: 39dBuV

For AV:

- 1GHz-3GHz: 10dBuV
- 3GHz-14GHz: 16dBuV
- 14GHz-26.5GHz: 28dBuV

EUT : WR-201
 Test Condition : 802.11g Tx at channel 11

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)	Ant. high (cm)	Turn Table angle (degree)
4924.00	PK	V	36.07	37.77	51.04	52.74	54	-1.26	116.00	182.00

Remark:

1. “*”: Fundamental Frequency
2. Correction Factor = Antenna Factor + Cable Loss
3. Corrected Level = Reading + Correction Factor – Preamp. Gain
4. The frequency measured ranges from 1GHz to 25GHz. The data value listed above which is higher than the noise floor, the others please refer to noise floor level.

Noise floor level is:

For PK:

- 1GHz-3GHz: 20dBuV
- 3GHz-14GHz: 27dBuV
- 14GHz-26.5GHz: 39dBuV

For AV:

- 1GHz-3GHz: 10dBuV
- 3GHz-14GHz: 16dBuV
- 14GHz-26.5GHz: 28dBuV

6. Power Spectrum Density test

6.1 Operating environment

Temperature: 18
 Relative Humidity: 65 %
 Atmospheric Pressure 1023 hPa

6.2 Test setup & procedure

The power spectrum density per FCC §15.247(e) was measured from the antenna port of the EUT using a 50ohm spectrum analyzer with the resolution bandwidth set at 3kHz, the video bandwidth set at 10kHz, a span of 300kHz, and the sweep time set at 100 seconds. Power Density was read directly correction was added to the reading to obtain power at the EUT antenna terminals. The test was performed at 3 channels (lowest, middle and highest channel). The Power Spectral Density measured result is in the following table.

6.3 Measured data of Power Spectrum Density test results

Test Mode: 802.11b (DSSS Modulation) operating mode

Channel	Frequency (MHz)	Power spectrum density (dBm)	Limit (dBm)
1 (lowest)	2412	-12.92	8
6 (middle)	2437	-13.02	8
11 (highest)	2462	-13.69	8


Test Mode: 802.11g (OFDM Modulation) operating mode

Channel	Frequency (MHz)	Power spectrum density (dBm)	Limit (dBm)
1 (lowest)	2412	-14.30	8
6 (middle)	2437	-14.75	8
11 (highest)	2462	-13.66	8

Please see the plot below.


Test Mode: 802.11b (DSSS Modulation) operating mode

	Max/Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	10 dB
	13 dBm	-12.92 dBm	VBW	10 kHz		
	1.5 dBm	2.41296603 GHz	SWT	100 s	Unit	dBm

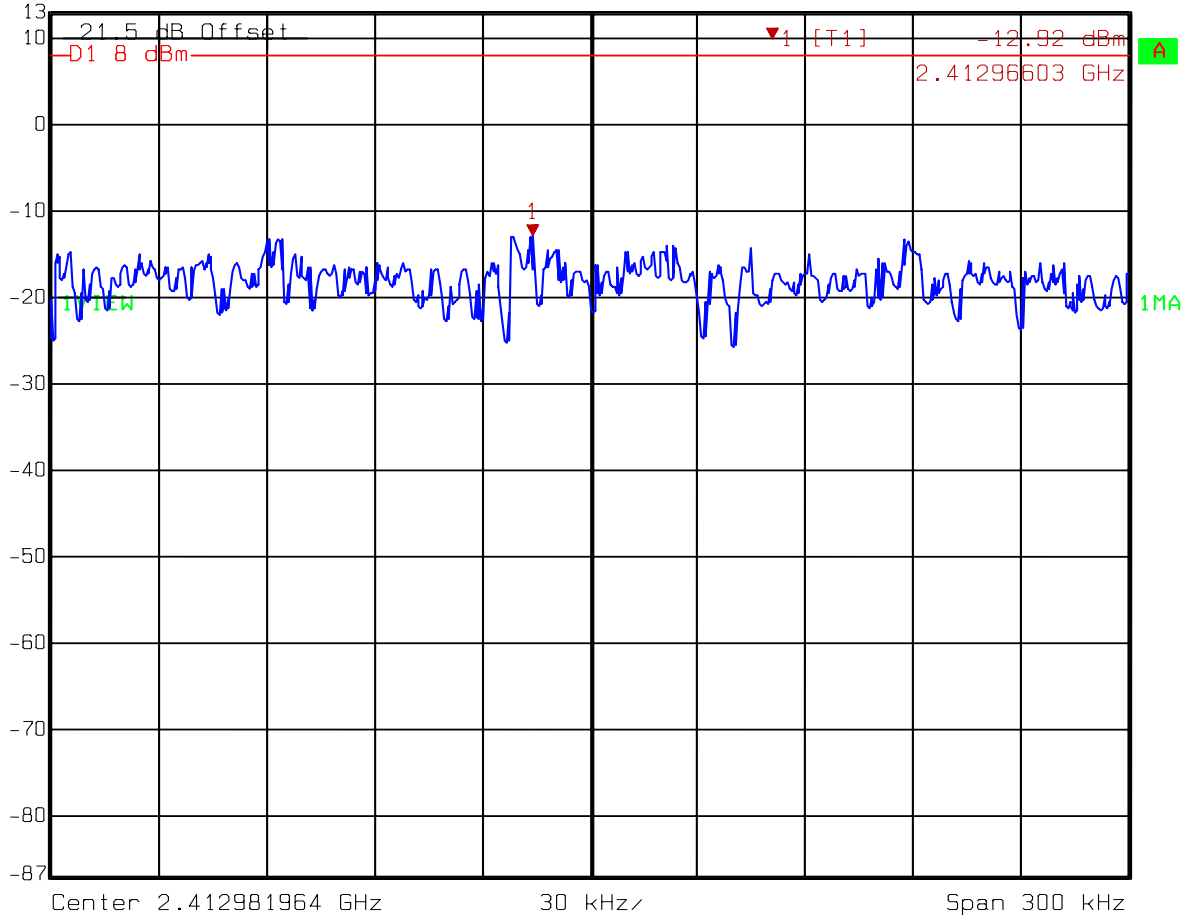


Title: Power Spectrum Density
 Comment A: Channel 1 at 802.11b mode
 Date: 04.APR.2006 11:46:08

	Max/Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	10 dB
	13 dBm	-13.02 dBm	VBW	10 kHz		
	1.5 dBm	2.43797305 GHz	SWT	100 s	Unit	dBm

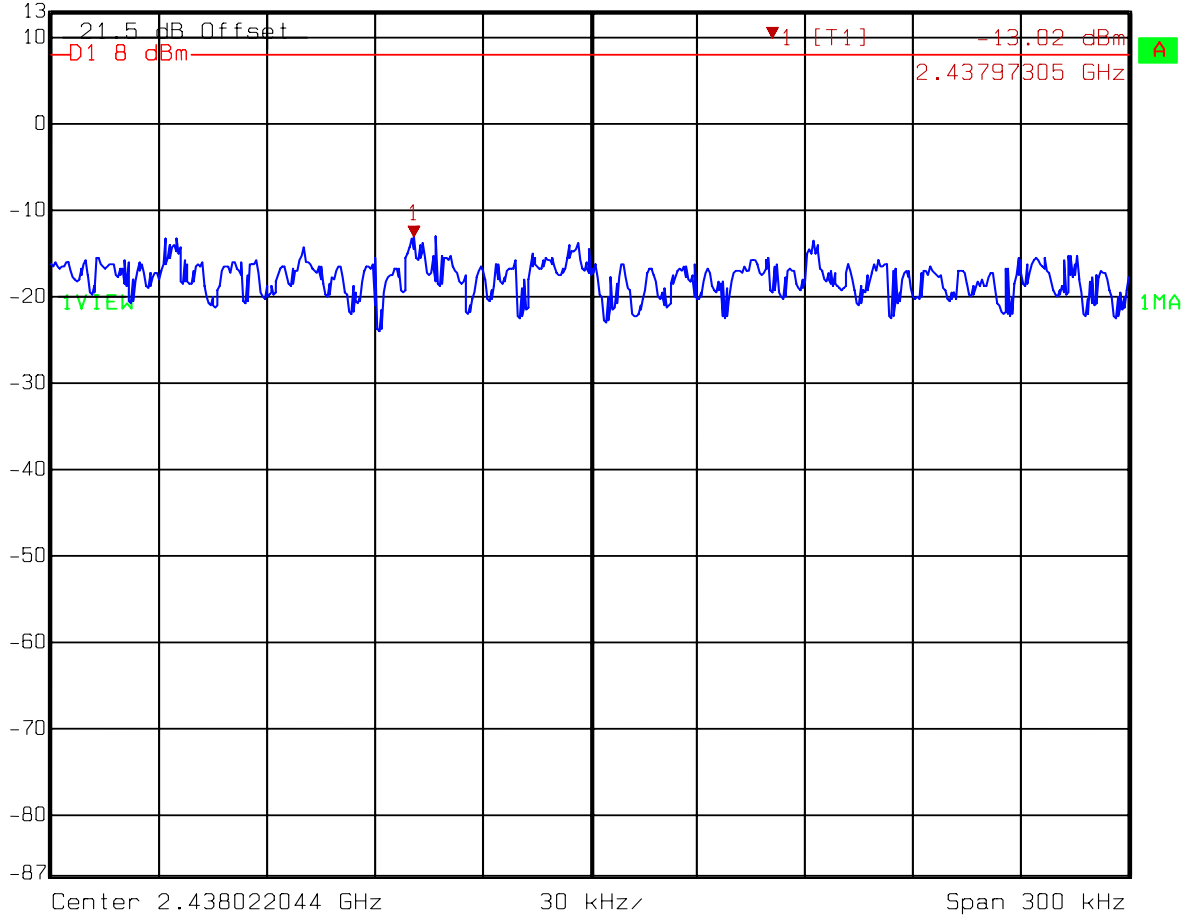

Title: Power Spectrum Density
 Comment A: Channel 6 at 802.11b mode
 Date: 04.APR.2006 12:23:13


	Max/Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	10 dB
	13 dBm	-13.69 dBm	VBW	10 kHz		
	1.5 dBm	2.46140431 GHz	SWT	100 s	Unit	dBm

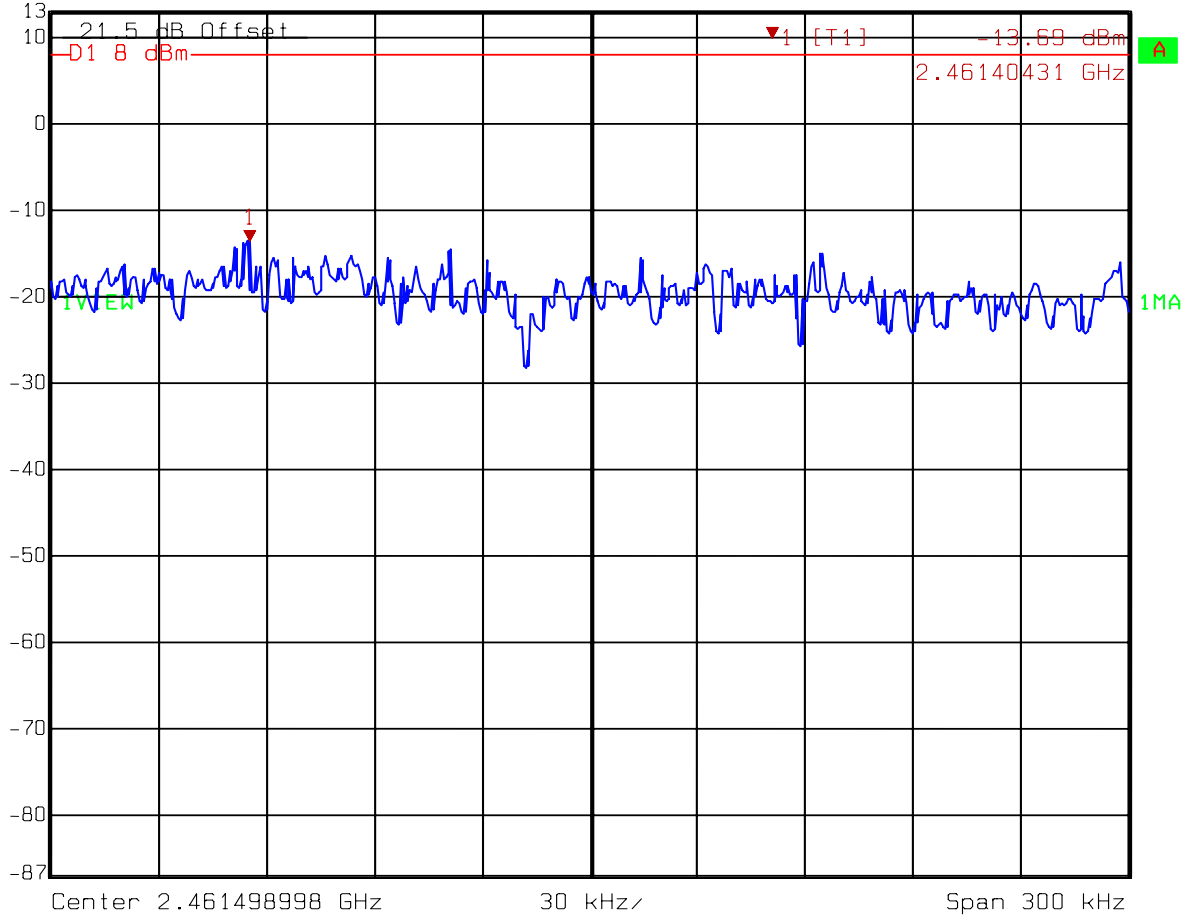


Title: Power Spectrum Density
 Comment A: Channel 11 at 802.11b mode
 Date: 04.APR.2006 11:42:40

Test Mode: 802.11g (OFDM Modulation) operating mode

	Max/Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	10 dB
	13 dBm	-14.30 dBm	VBW	10 kHz		
	1.5 dBm	2.41698186 GHz	SWT	100 s	Unit	dBm

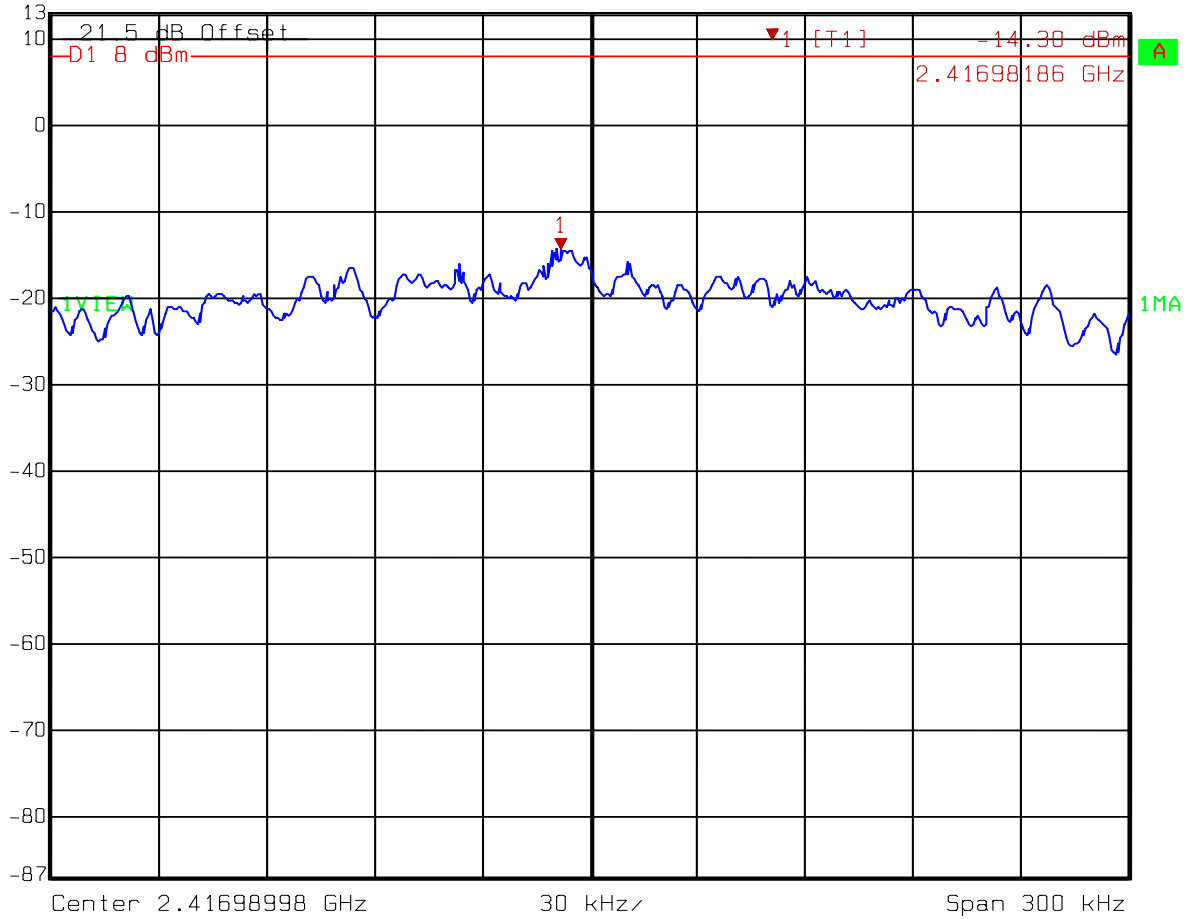


Title: Power Spectrum Density
 Comment A: Channel 1 at 802.11g mode
 Date: 04.APR.2006 11:33:13

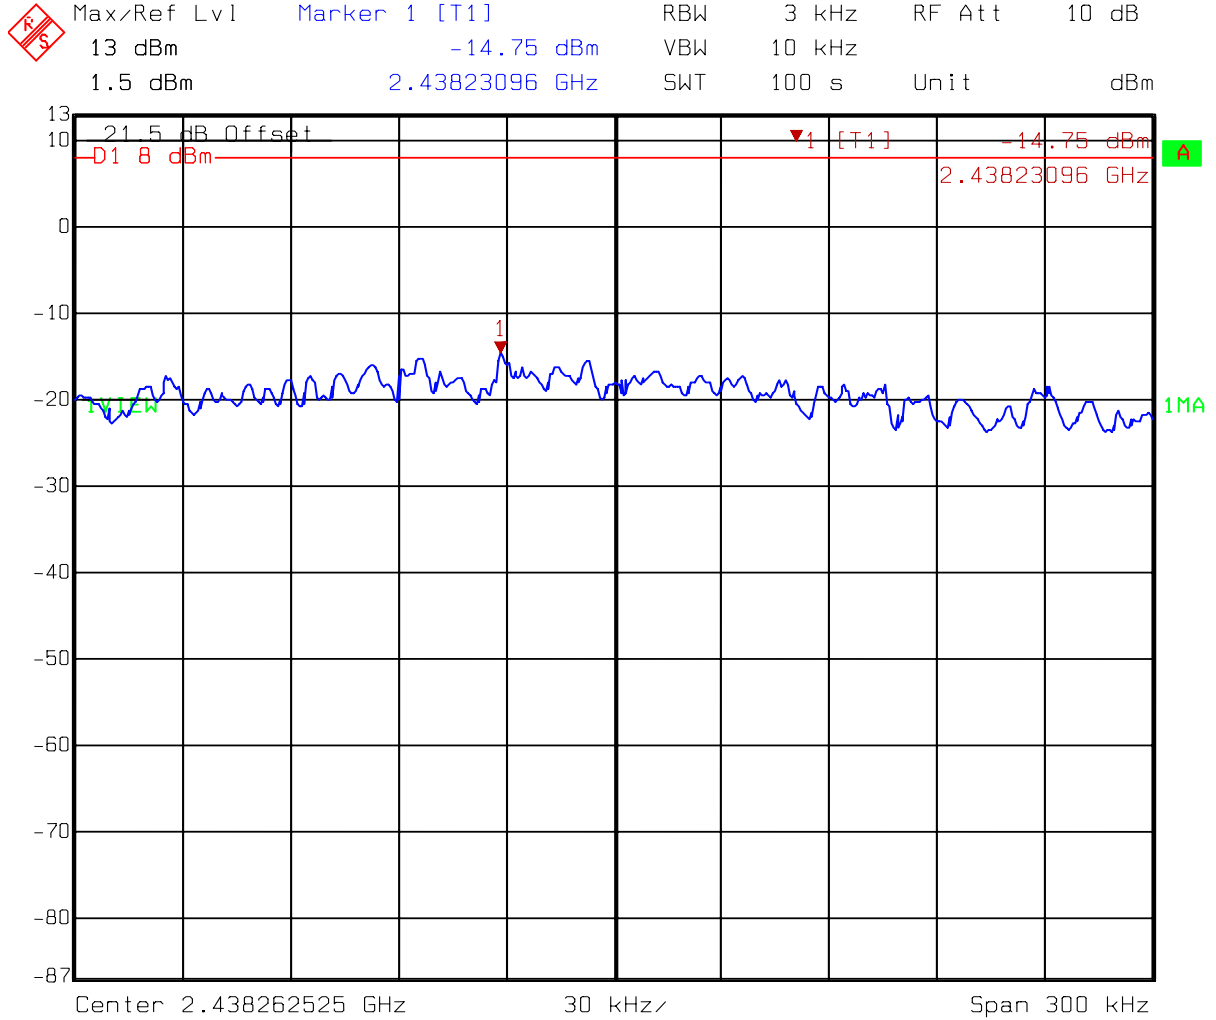

Title: Power Spectrum Density
 Comment A: Channel 6 at 802.11g mode
 Date: 04.APR.2006 11:38:14

	Max/Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	10 dB
	13 dBm	-13.66 dBm	VBW	10 kHz		
	1.5 dBm	2.45571934 GHz	SWT	100 s	Unit	dBm

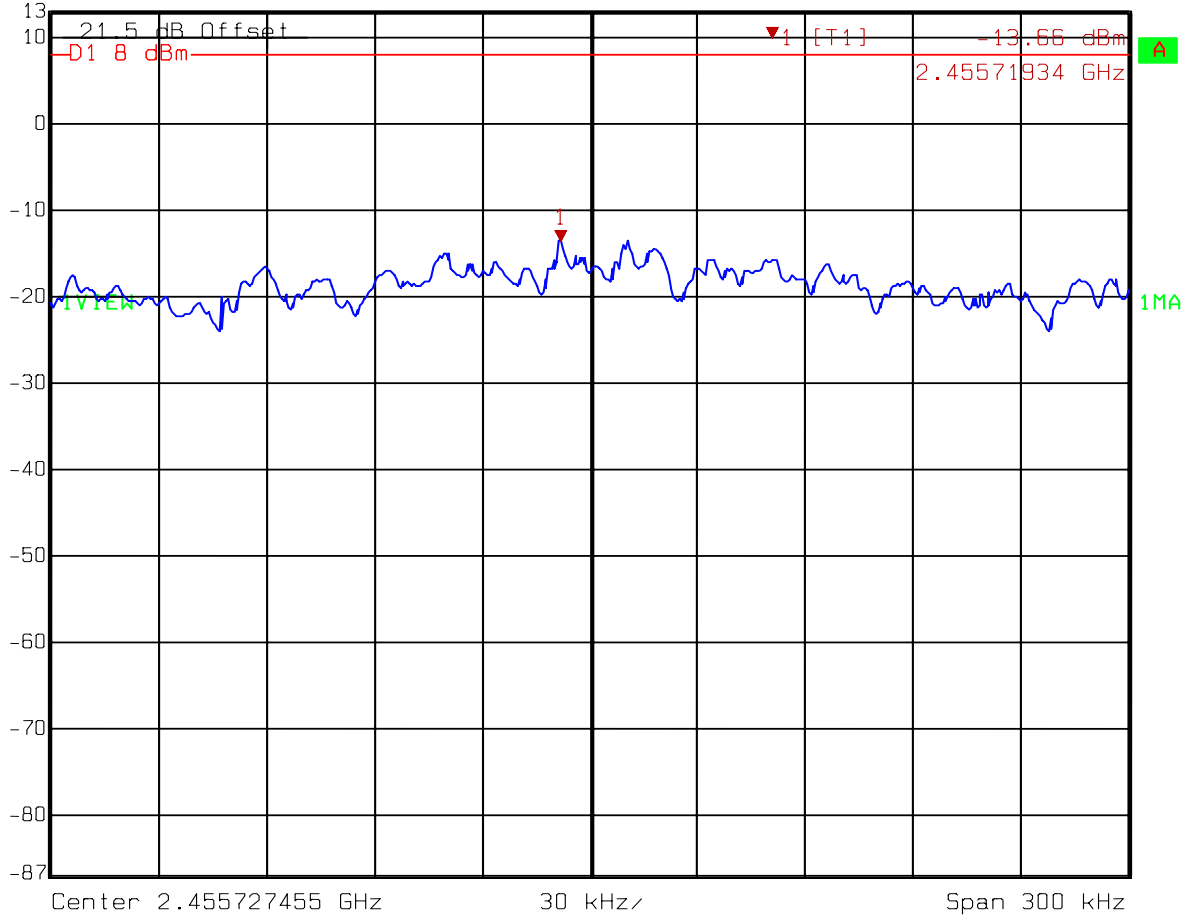

Title: Power Spectrum Density
 Comment A: Channel 11 at 802.11g mode
 Date: 04.APR.2006 11:40:08

7. Emission on the band edge

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.1 Operating environment

Temperature:	23	
Relative Humidity:	55	%
Atmospheric Pressure	1023	hPa

7.2 Test setup & procedure

The output of EUT was connected to spectrum analyzer via a 50ohm cable.


The setting of spectrum analyzer is:

Peak:	RBW = 100kHz ;	VBW = 100kHz
Average:	RBW = 1MHz ;	VBW = 10Hz


7.3 Test Result

7.3.1 Conducted Method


Test Mode: 802.11b(DSSS Modulation) operating mode

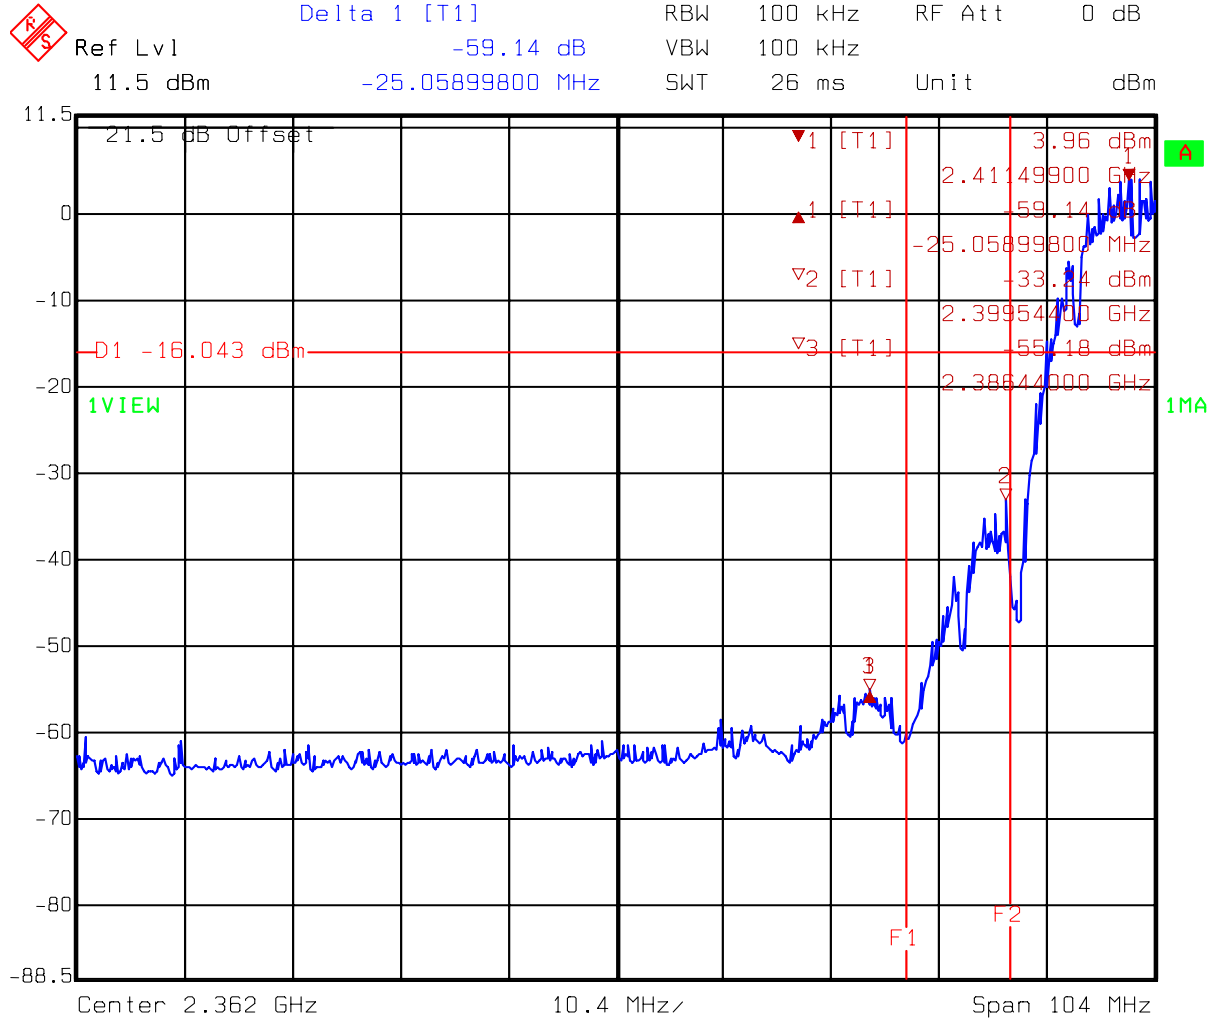


Title: Band Edge
 Comment A: Channel 1 at 802.11b mode
 F1=2390MHz F2=2400MHz (Peak Detect)
 Date: 04.APR.2006 11:46:48

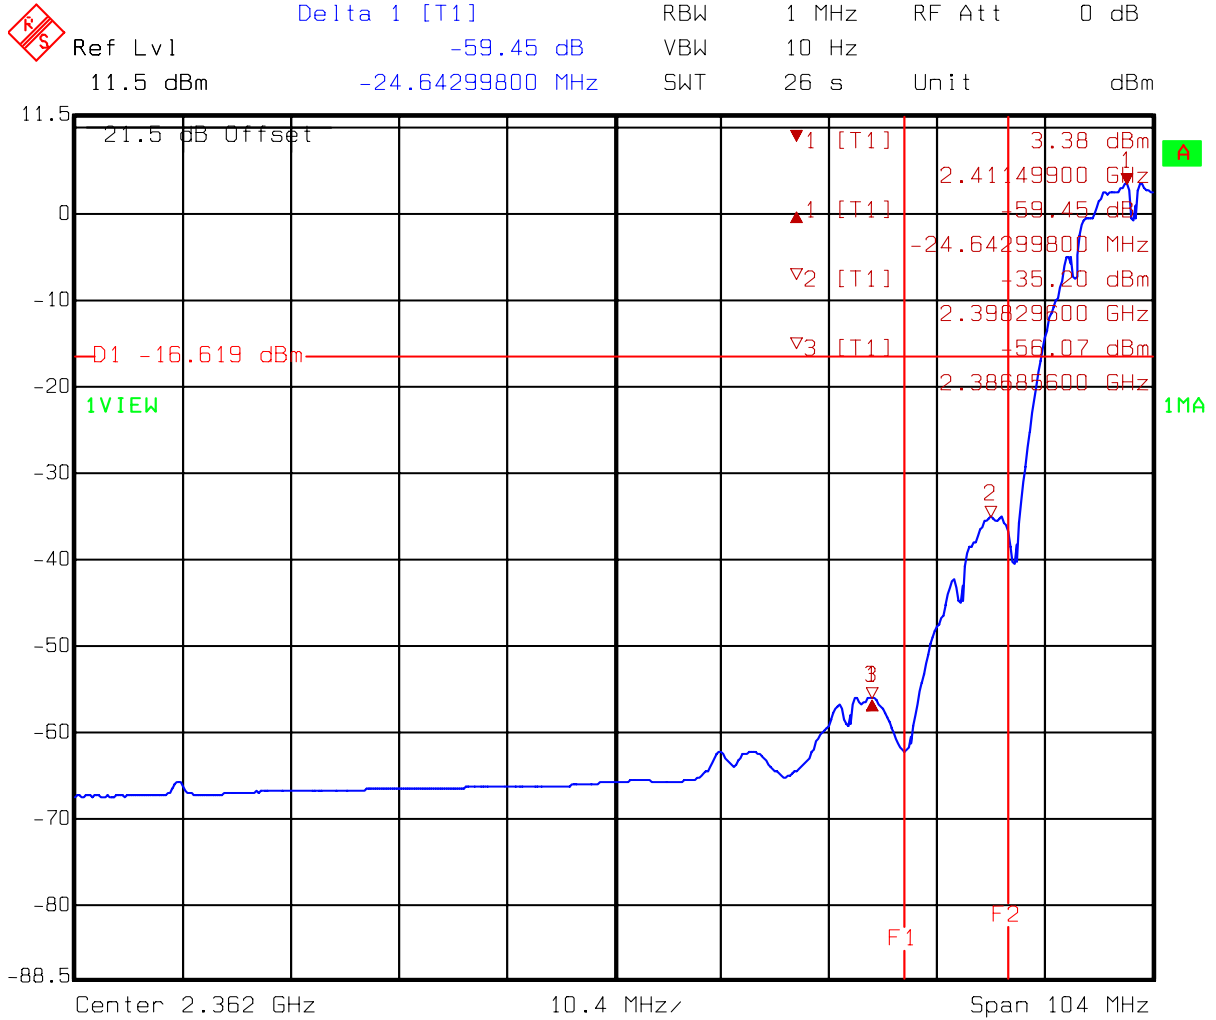

Title: Band Edge
 Comment A: Channel 1 at 802.11b mode
 F1=2390MHz F2=2400MHz (Average Detect)
 Date: 04.APR.2006 11:47:46

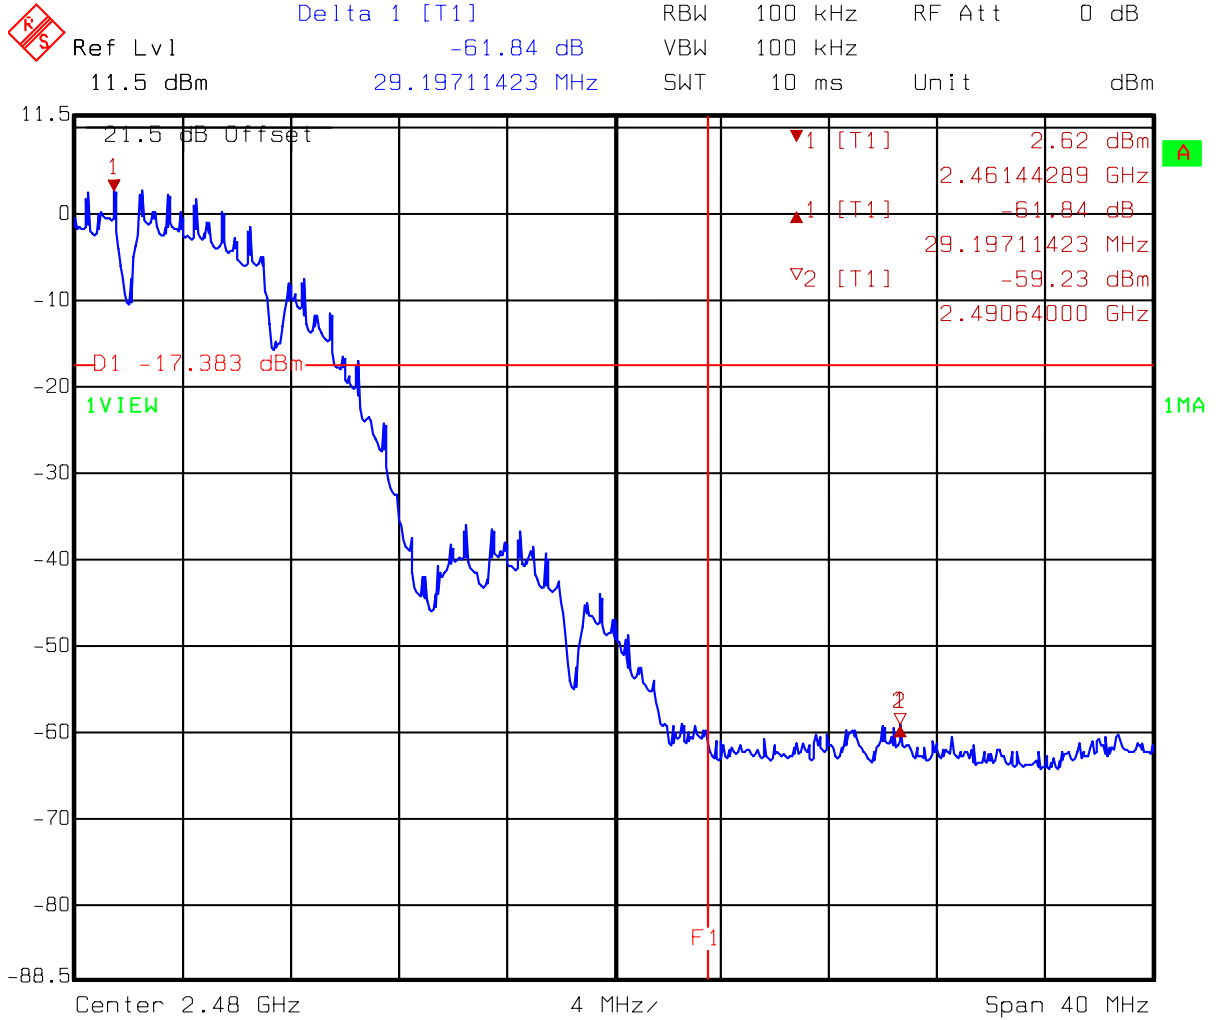


Title: Band Edge
 Comment A: Channel 11 at 802.11b mode
 F1=2483.5MHz (Peak Detect)
 Date: 04.APR.2006 11:43:27

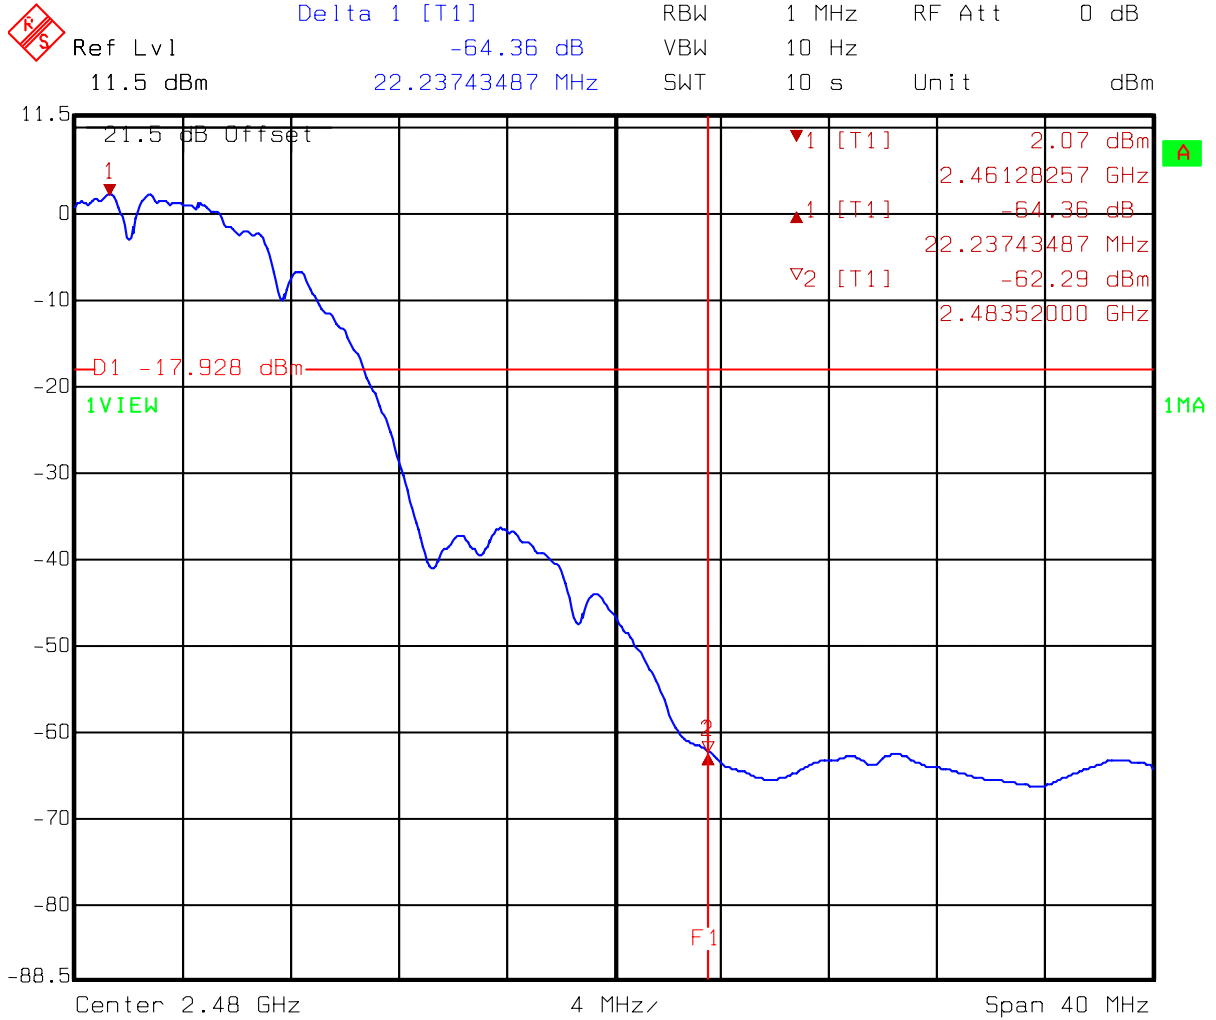


Title: Band Edge
 Comment A: Channel 11 at 802.11b mode
 F1=2483.5MHz (Average Detect)
 Date: 04.APR.2006 11:44:15


Test Mode: 802.11g(OFDM Modulation) operating mode

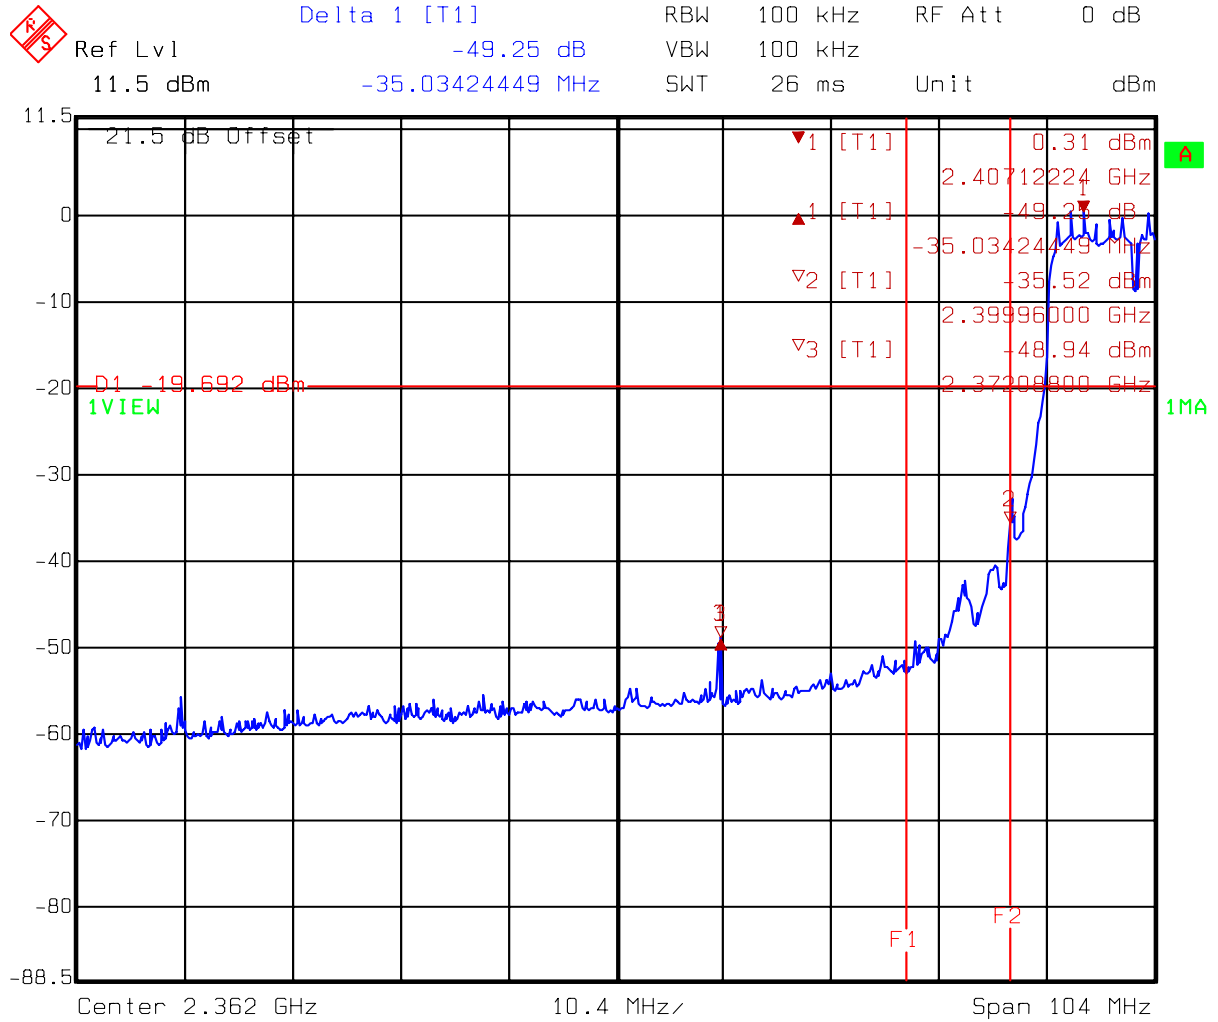


Title: Band Edge
 Comment A: Channel 1 at 802.11g mode
 F1=2390MHz F2=2400MHz (Peak Detect)
 Date: 04.APR.2006 11:34:04

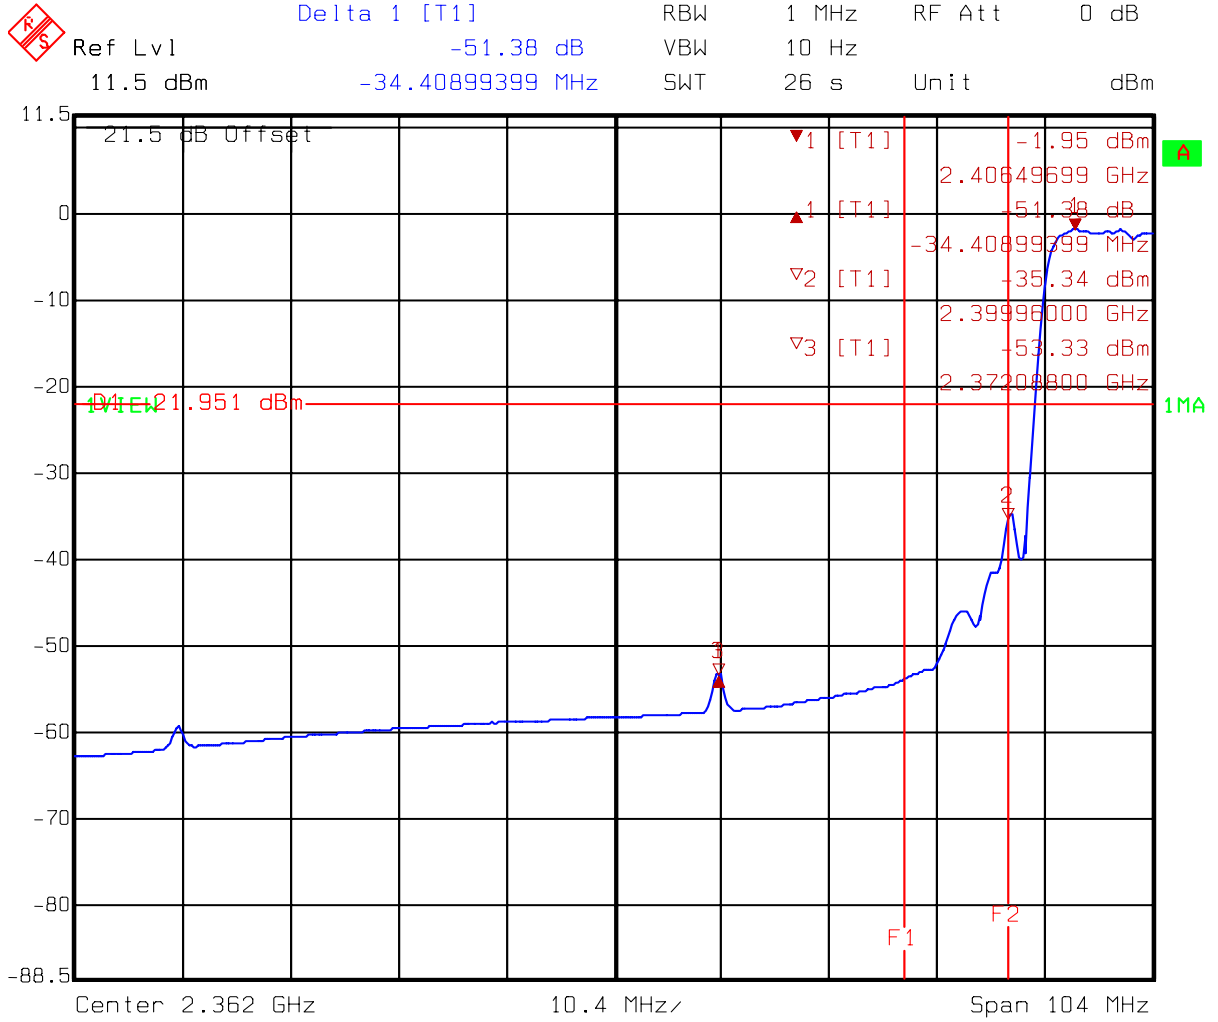

Title: Band Edge
 Comment A: Channel 1 at 802.11g mode
 F1=2390MHz F2=2400MHz (Average Detect)
 Date: 04.APR.2006 11:35:16

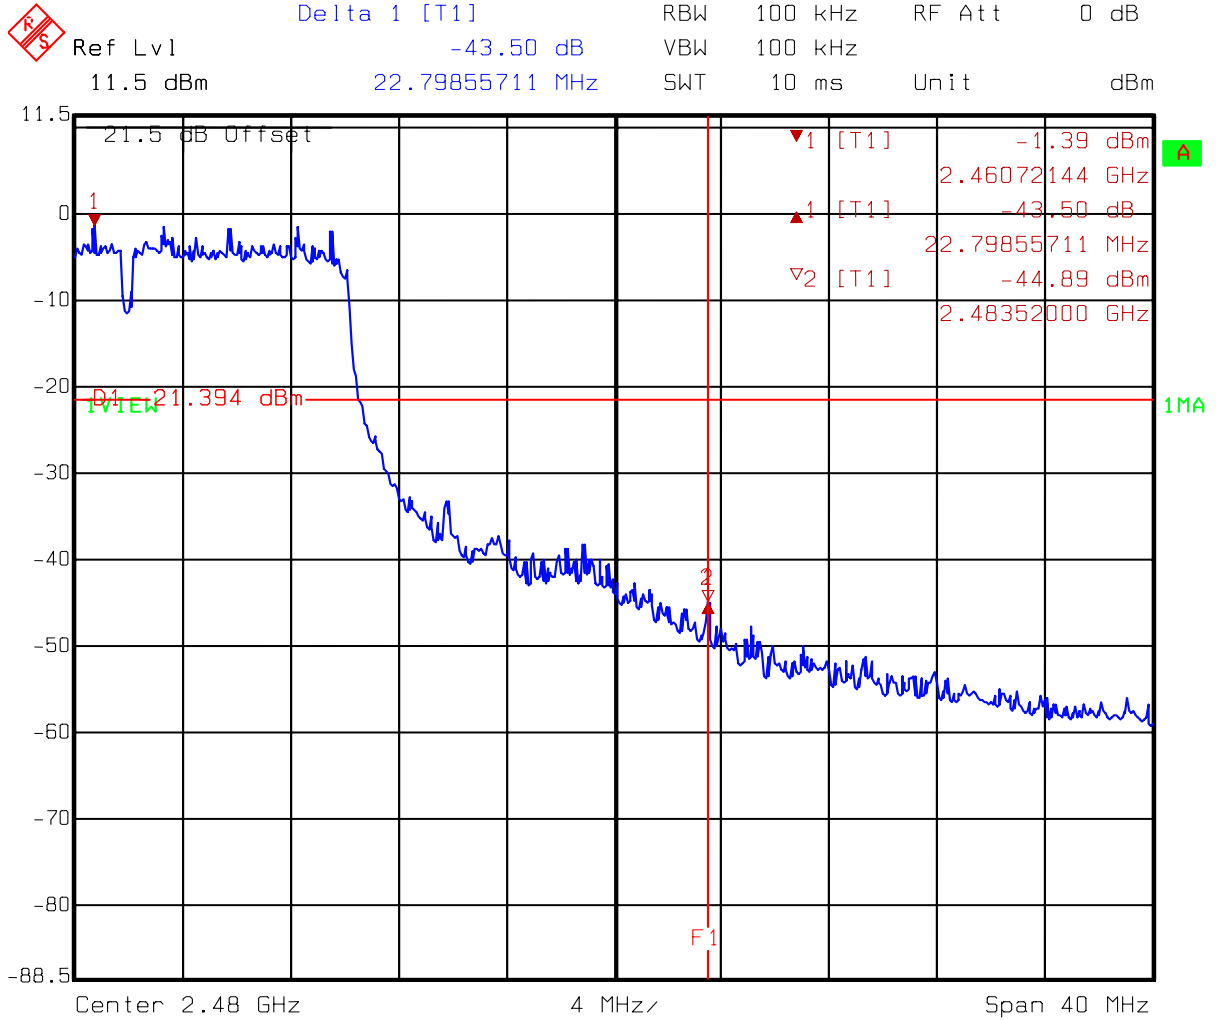

Title: Band Edge
 Comment A: Channel 11 at 802.11g mode
 F1=2483.5MHz (Peak Detect)
 Date: 04.APR.2006 14:07:04

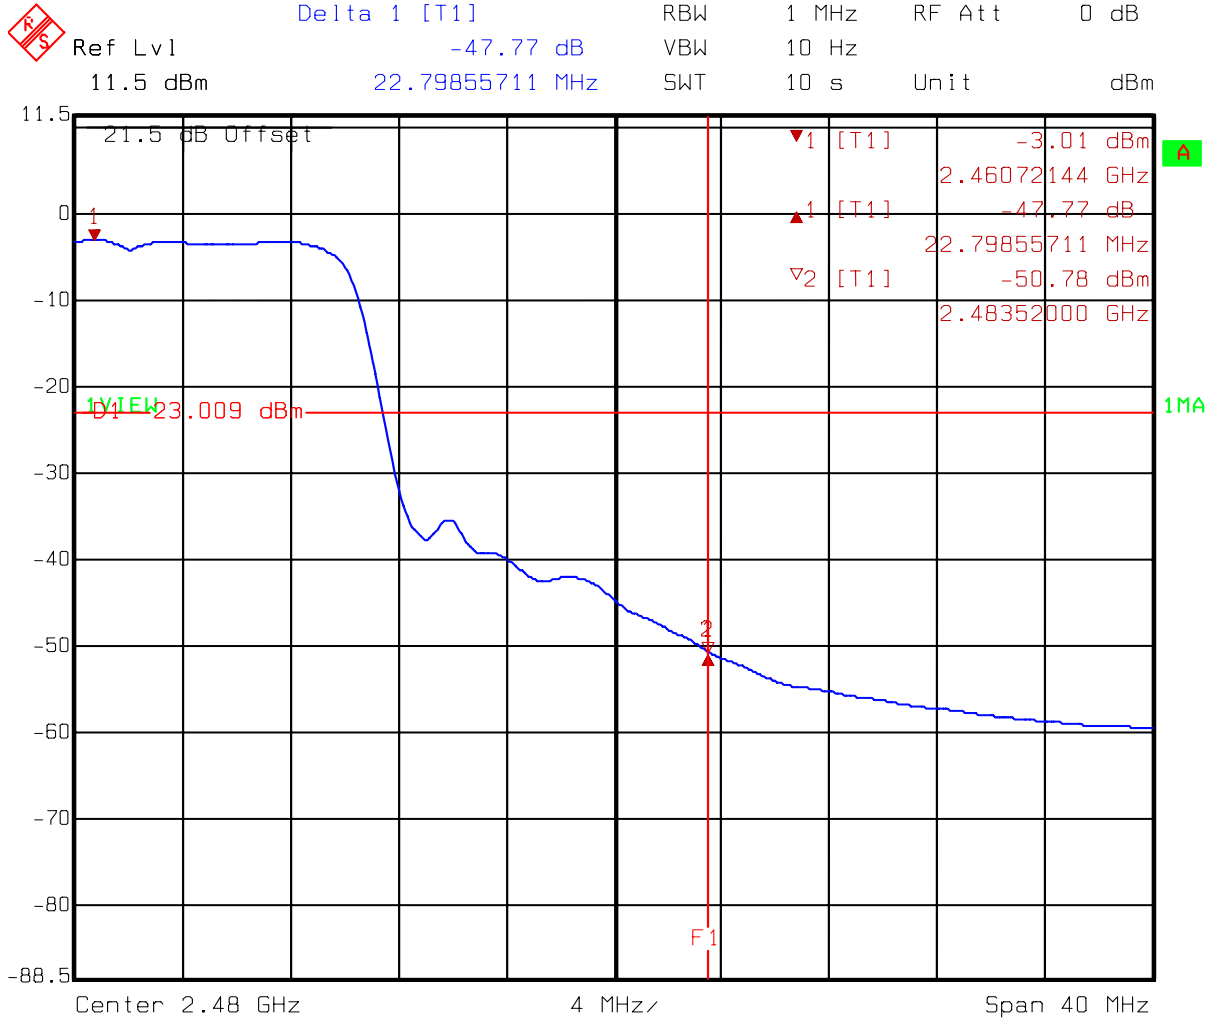

Title: Band Edge
 Comment A: Channel 11 at 802.11g mode
 F1=2483.5MHz (Average Detect)
 Date: 04.APR.2006 14:07:52

7.3.2 Radiated Method

Test Mode: 802.11b(DSSS Modulation) operating mode

Channel	Detector	Radiated Method	Conducted Method	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
		Max. Field Strength of Fundamental @3m (dBuV/m)	Between Carrier Max. Power and Local Max. Emission in Restrict Band (dBc)			
		A	B			
1 (lowest)	PK	109.8	59.14	50.66	74	-23.34
	AV	104.4	59.45	44.95	54	-9.05
11 (highest)	PK	108.68	61.84	46.84	74	-27.16
	AV	103.87	64.36	39.51	54	-14.49

Remark: 1. $C = A - B$

2. $E = C - D$

Test Mode: 802.11g(OFDM Modulation) operating mode

Channel	Detector	Radiated Method	Conducted Method	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
		Max. Field Strength of Fundamental @3m (dBuV/m)	Between Carrier Max. Power and Local Max. Emission in Restrict Band (dBc)			
		A	B			
1 (lowest)	PK	109.48	49.25	60.23	74	-13.77
	AV	99.62	51.38	48.24	54	-5.76
11 (highest)	PK	110.93	43.50	67.43	74	-6.57
	AV	100.95	47.77	53.18	54	-0.82


Remark: 1. $C = A - B$
2. $E = C - D$

8. Power Line Conducted Emission test §FCC 15.207

8.1 Operating environment

Temperature: 23
Relative Humidity: 53 %
Atmospheric Pressure 1023 hPa

8.2 Test setup & procedure

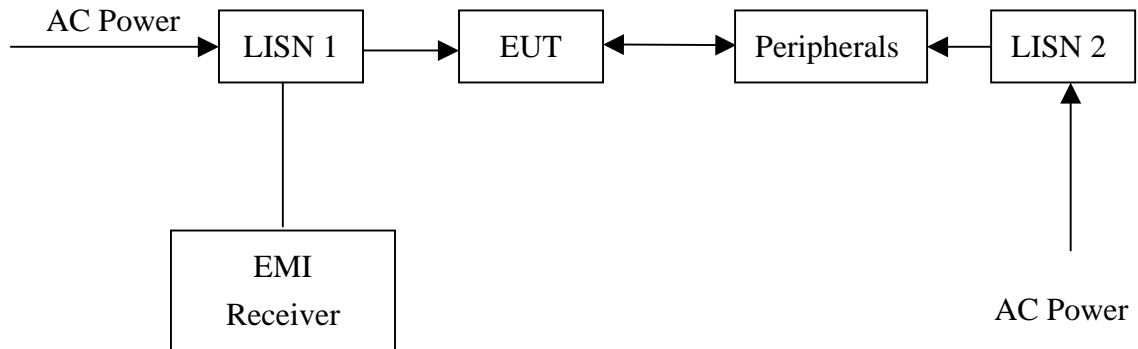

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/2003 on conducted measurement. The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

The EUT configuration please refer to the “Conducted set-up photo.pdf”.

8.3 Emission limit

Freq. (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56*	56 – 46*
0.50~5.00	56	46
5.00~30.0	60	50

*Decreases with the logarithm of the frequency.

8.4 Uncertainty of Conducted Emission

Expanded uncertainty (k=2) of conducted emission measurement is ± 2.6 dB.


8.5 Power Line Conducted Emission test data

Phase: Line
 Model No.: WR-201
 Test Condition: Normal operating mode

Frequency (MHz)	Corr. Factor (dB)	Level Qp (dBuV)	Limit Qp (dBuV)	Level AV (dBuV)	Limit Av (dBuV)	Margin (dB)	
						Qp	Av
0.150	0.10	43.83	66.00	16.96	56.00	-22.17	-39.04
1.015	0.10	21.76	56.00	7.18	46.00	-34.24	-38.82
5.037	0.24	19.80	60.00	11.43	50.00	-40.21	-38.58
7.267	0.31	20.67	60.00	11.30	50.00	-39.33	-38.70
18.306	0.77	25.37	60.00	21.04	50.00	-34.63	-28.96
25.189	1.00	24.26	60.00	18.94	50.00	-35.74	-31.06

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

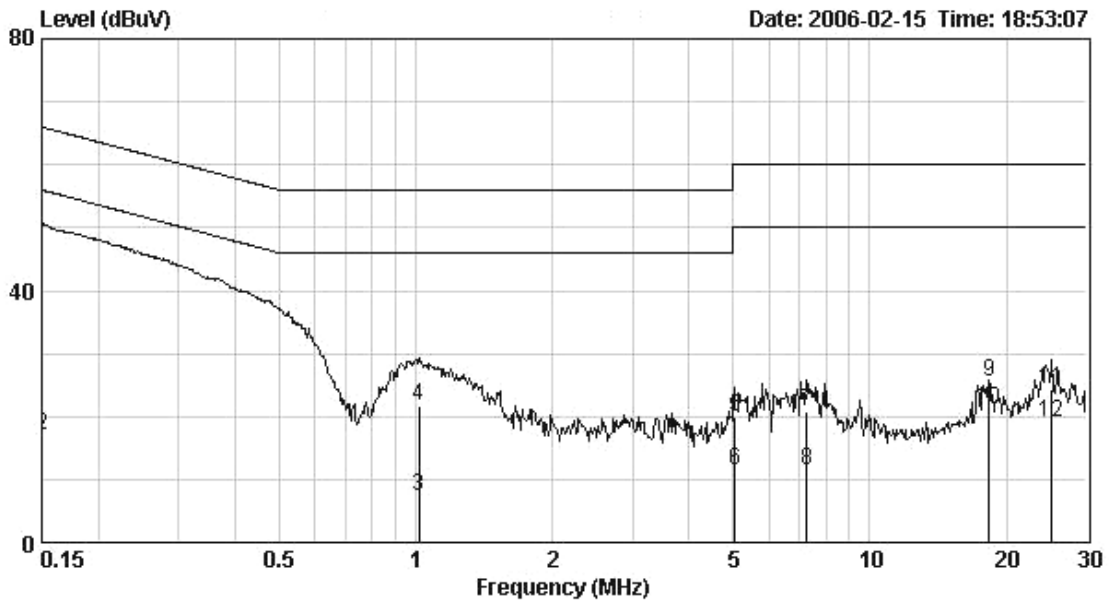

Phase: Neutral
 Model No.: WR-201
 Test Condition: Normal operating mode

Frequency (MHz)	Corr. Factor (dB)	Level Qp (dBuV)	Limit Qp (dBuV)	Level AV (dBuV)	Limit Av (dBuV)	Margin (dB)	
						Qp	Av
0.152	0.10	44.96	65.87	18.20	55.87	-20.91	-37.67
0.488	0.10	39.64	56.21	13.15	46.21	-16.57	-33.06
0.859	0.10	32.09	56.00	10.78	46.00	-23.91	-35.22
6.148	0.20	22.80	60.00	16.18	50.00	-37.20	-33.82
7.152	0.20	24.10	60.00	11.90	50.00	-35.90	-38.10
18.169	0.53	21.95	60.00	15.28	50.00	-38.05	-34.72

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

