

EMC TEST REPORT

Report No. : TS10100036-EME
Model No. : WR5205G
Issued Date : May 09, 2011

Applicant: AboCom System, Inc.
77, Yu-Yih Rd., Chu-Nan Chen, Miao-Lih Hsuan,
Taiwan

Test Method / Standard: CFR 47 FCC Part 15.247 & ANSI C63.4 2003

Test By: Intertek Testing Services Taiwan Ltd.
No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,
Shiang-Shan District, Hsinchu City, Taiwan

It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result(s) in this report only applies to the tested sample(s).

The test report was prepared by: Sign on File
Jill Chen / Assistant

These measurements were taken by: Sign on File
Terry Hsu / Engineer

The test report was reviewed by:

Name Jimmy Yang
Title Engineer

Table of Contents

- 1. Summary of Test Data..... 3
- 2. General Information 4
- 3. Maximum 6 dB Bandwidth 7
- 4. 99 % Occupied Bandwidth 20
- 5. Maximum Output Power..... 33
- 6. Power Spectral Density 35
- 7. RF Antenna conducted Spurious..... 48
- 8. Radiated Spurious Emission 60
- 9. Emission on Band Edge..... 71

- Appendix A: Test Equipment List..... 89

1. Summary of Test Data

Test/Requirement Description	Applicable Rule	Result
Minimum 6 dB Bandwidth	15.247(a)(2)	Pass
Maximum Output Power	15.247(b)	Pass
Power Spectral Density	15.247(e)	Pass
RF Antenna Conducted Spurious	15.247(d)	Pass
Radiated Spurious Emission	15.247(d), 15.205, 15.209	Pass
Emission on the Band Edge	15.247(d)	Pass
AC Power Line Conducted Emission	15.207	Pass

2. General Information

Identification of the EUT

Product:	Wireless 11n Giga Router
Model No.:	WR5205G
FCC ID.:	MQ4WR5205G
Frequency Range:	1. 2412 MHz ~ 2462 MHz for 802.11b, 802.11g, 802.11n HT20 2. 2422 MHz ~ 2452 MHz for 802.11n HT40
Channel Number:	1. 11 channels for 2412 MHz ~ 2462 MHz 2. 7 channels for 2422 MHz ~ 2452 MHz
Rated Power:	DC 12 V from Adapter
Power Cord:	N/A
Data Cable:	RJ-45 UTP Cat.5 10 meter × 1
Sample Received:	Sep. 24, 2010
Test Date(s):	Mar. 08, 2011 ~ May 03, 2011
Note 1:	This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
Note 2:	When determining the test conclusion, the Measurement Uncertainty of test has been considered.

Description of EUT

The EUT is a Wireless 11n Giga Router, and was defined as information technology equipment.

For more detail features, please refer to User's manual as file name "Installation guide.pdf"

Antenna description

(1) Antenna 1

The antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector.

Antenna Gain : 2 dBi
Antenna Type : Dipole antenna
Connector Type : SMA reverse

(2) Antenna 2

The antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector.

Antenna Gain : 5 dBi
Antenna Type : Dipole antenna
Connector Type : SMA reverse

Adapter information

The EUT will be supplied with a power supply from below list:

No.	Brand	Model no.	Specification
Adapter	DVE	DSA-20PFE-05 FUS 120150	I/P: 100-240 Vac, 50-60 Hz, 0.7 A O/P: +12 Vac, 1.5 A

Peripherals equipment

Peripherals	Brand	Model No.	Serial No.	Description of Data Cable
Notebook PC	DELL	Latitude D610	2YWZK1S	N/A

Operation mode

The EUT was supplied with 12 Vdc from adapter (Test voltage: 120Vac, 60Hz) and it was run in TX mode that was controlled by “QA” program.

The EUT was transmitted continuously during the test.

All the antennas were verified, the worst case was antenna gain 5 dBi.

With individual verifying, the maximum output power was found out 1 Mbps data rate for 802.11b mode and 6 Mbps data rate for 802.11g mode, 6.5 Mbps data rate for 802.11n HT 20 mode and 13 Mbps data rate for 802.11n HT 40 mode. The final tests were executed under these conditions recorded in this report individually. Please refer the details below:

Chain 0: 802.11b channel 6	
Data rate (Mbps)	PK(dBm)
1	9.92
2	9.86
5.5	9.68
11	9.59

Chain 0: 802.11n HT20 channel 6	
Data rate (Mbps)	PK(dBm)
6.5	22.01
13	21.96
19.5	21.87
26	21.78
39	21.66
52	21.48
58.5	21.37
65	21.31

Chain 0: 802.11g channel 6	
Data rate (Mbps)	PK(dBm)
6	22.06
9	21.98
12	21.92
18	21.85
24	21.72
36	21.67
48	21.58
54	21.47

Chain 0: 802.11n HT40 channel 6	
Data rate (Mbps)	PK(dBm)
13	21.22
26	21.18
39	21.08
52	21.03
78	20.92
104	20.85
117	20.73
130	20.62

3. Maximum 6 dB Bandwidth


Name of Test	Maximum 6 dB Bandwidth
Base Standard	FCC 15.247 (a)(2)

Test Result: Complies
Measurement Data: See Table & plots below

Method of Measurement:

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

Test Diagram:

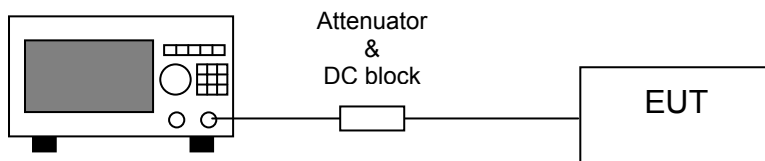

Spectrum Analyzer


Note: The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode, 6.5 Mbps data rate for 802.11n HT20 mode and 13 Mbps data rate for 802.11n HT40 mode. The EUT was tuned to a low, middle and high channel.

Table 1 Maximum 6 dB Bandwidth


Mode	Channel	Frequency (MHz)	Bandwidth (MHz)	Min. Limit (MHz)	Pass/Fail
			DAC0		
802.11b	1	2412	10.29	0.5	Pass
	6	2437	10.29	0.5	Pass
	11	2462	10.29	0.5	Pass

Mode	Channel	Frequency (MHz)	Bandwidth (MHz)		Min. Limit (MHz)	Pass/Fail
			DAC0	DAC1		
802.11g	1	2412	16.53	16.53	0.5	Pass
	6	2437	16.53	16.53	0.5	Pass
	11	2462	16.53	16.68	0.5	Pass
802.11n HT20	1	2412	17.49	17.34	0.5	Pass
	6	2437	17.73	17.49	0.5	Pass
	11	2462	17.34	17.58	0.5	Pass
802.11n HT40	1	2422	36.405	36.57	0.5	Pass
	6	2437	34.485	36.57	0.5	Pass
	11	2452	35.76	35.61	0.5	Pass


Chain 0: 6 dB Bandwidth @ 802.11b mode channel 1

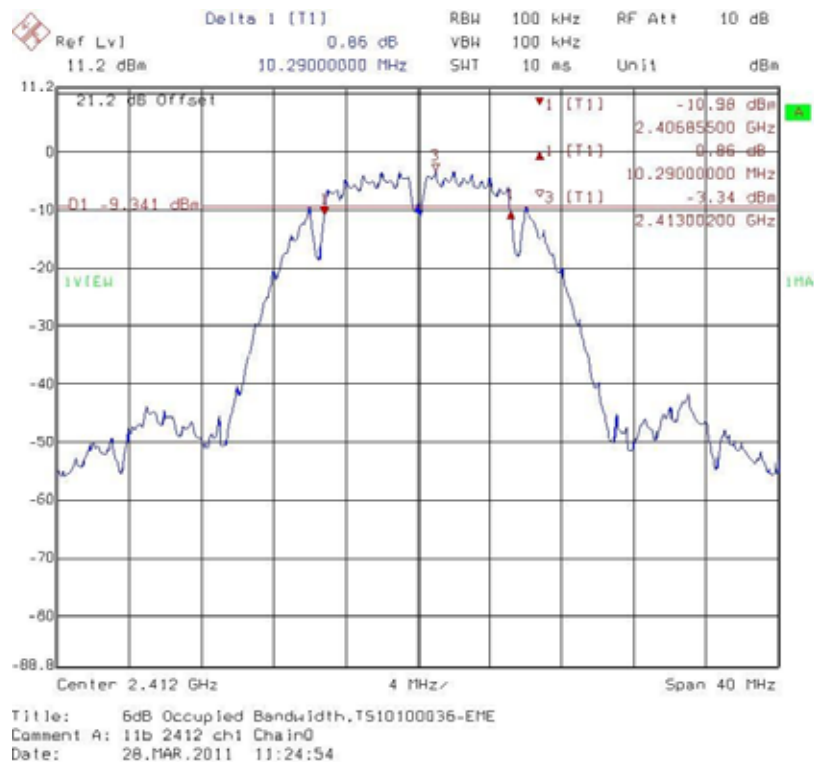


Chain 0: 6 dB Bandwidth @ 802.11b mode channel 6

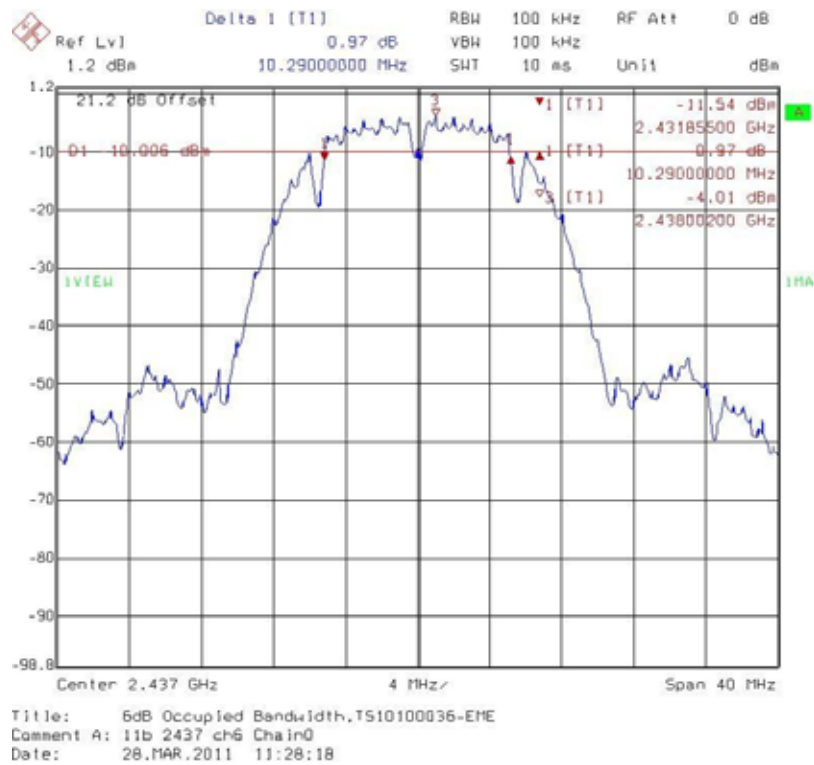


Chain 0: 6 dB Bandwidth @ 802.11b mode channel 11

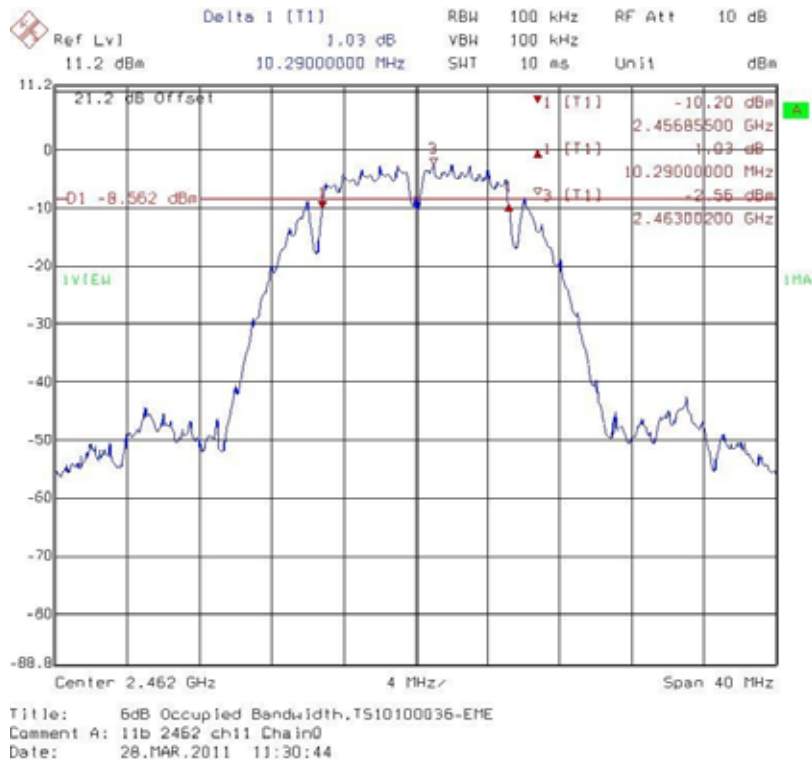


Chain 0: 6 dB Bandwidth @ 802.11g mode channel 1

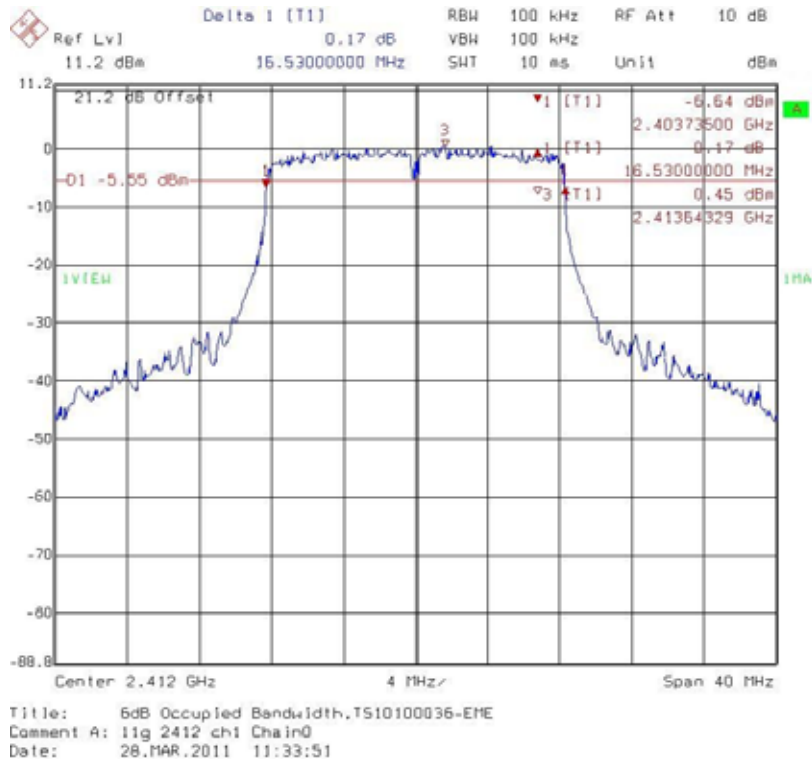


Chain 0: 6 dB Bandwidth @ 802.11g mode channel 6

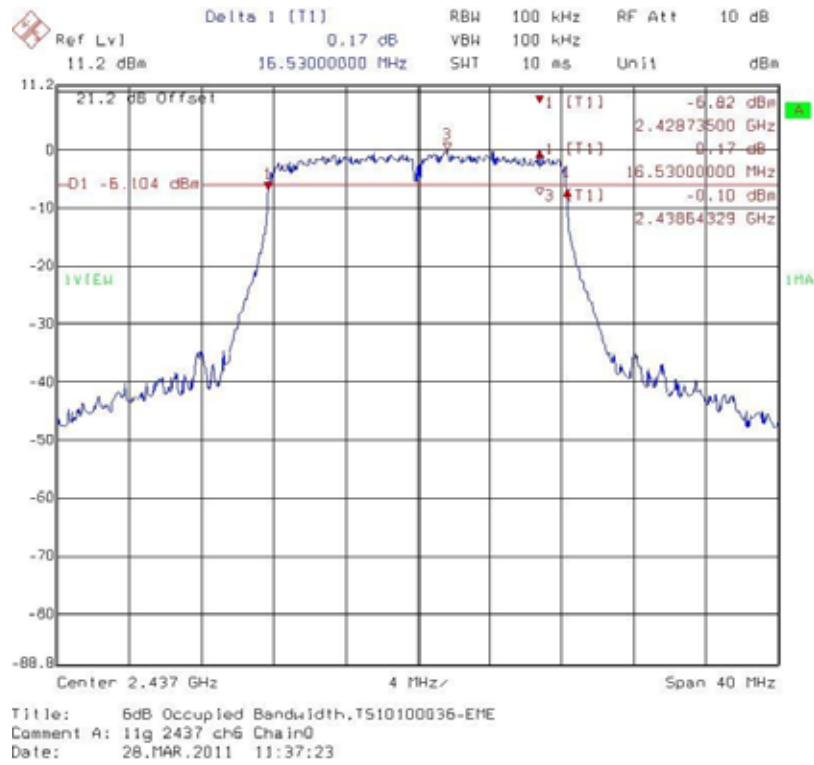


Chain 0: 6 dB Bandwidth @ 802.11g mode channel 11

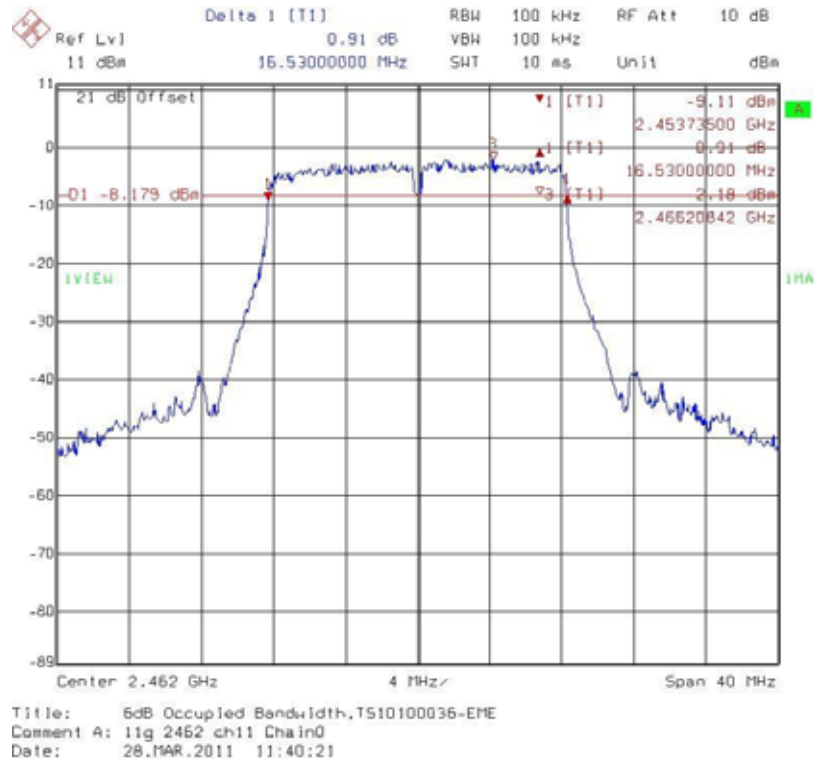


Chain 1: 6 dB Bandwidth @ 802.11g mode channel 1

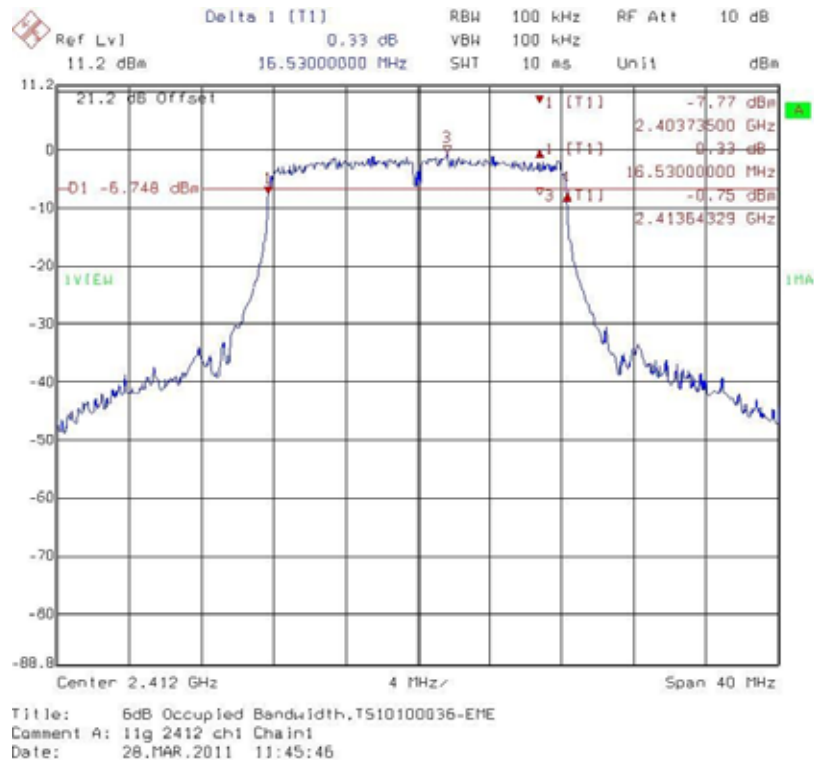


Chain 1: 6 dB Bandwidth @ 802.11g mode channel 6

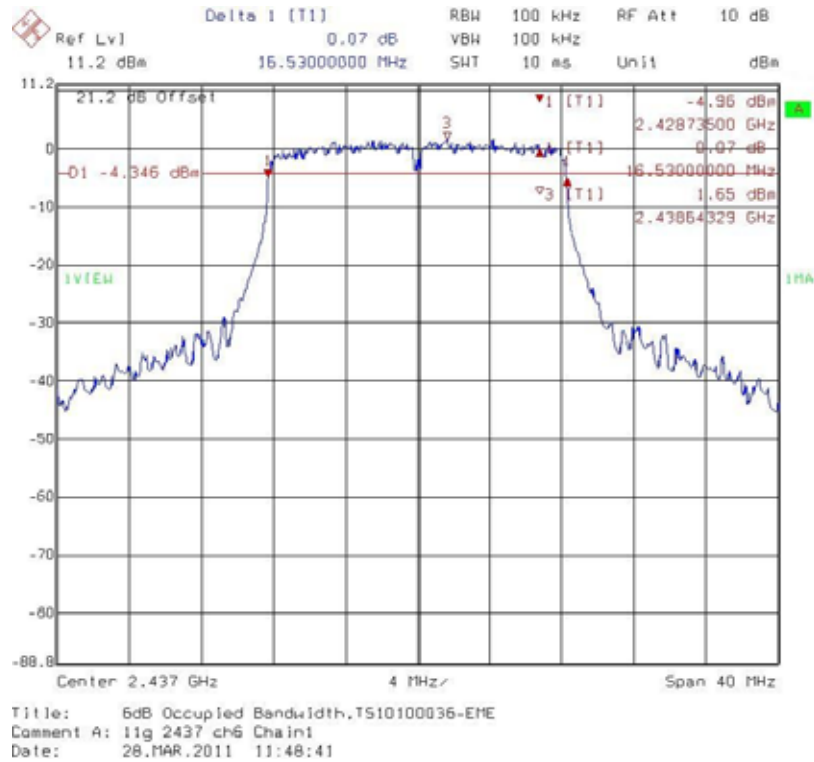


Chain 1: 6 dB Bandwidth @ 802.11g mode channel 11

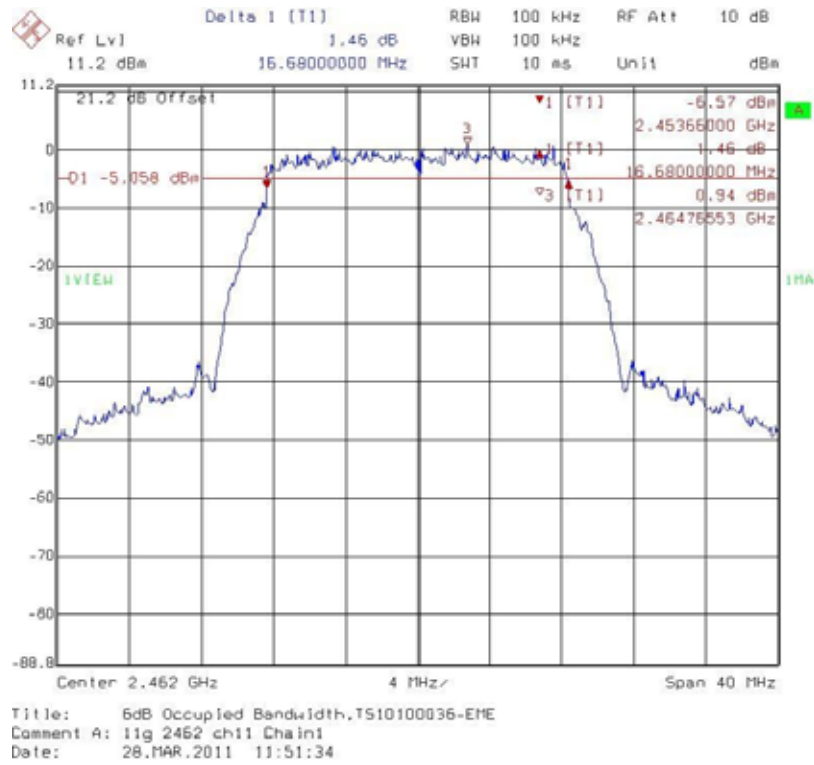


Chain 0: 6 dB Bandwidth @ 802.11n HT20 mode channel 1

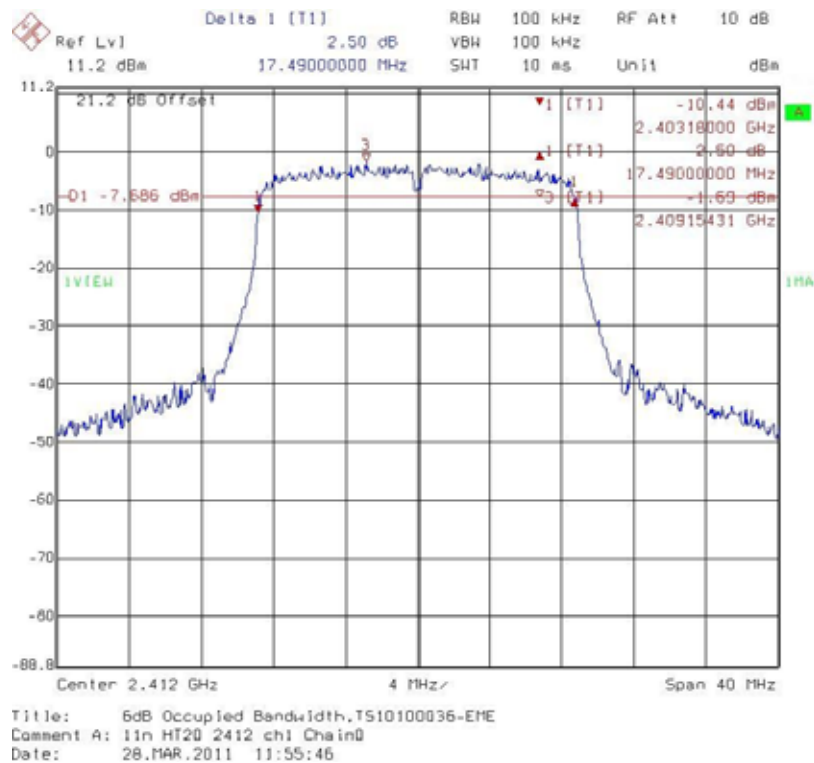


Chain 0: 6 dB Bandwidth @ 802.11n HT20 mode channel 6

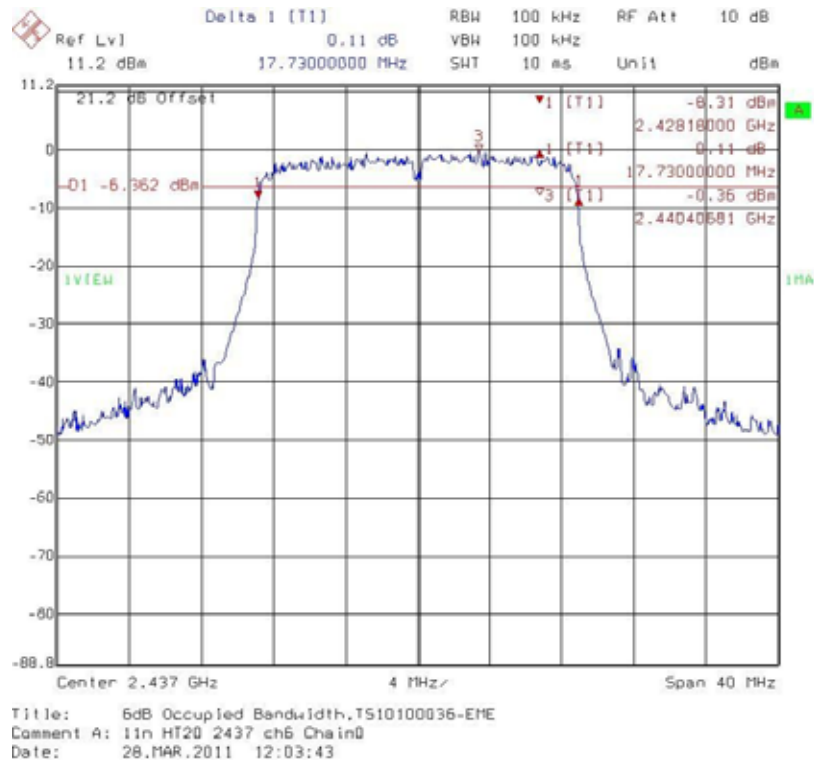


Chain 0: 6 dB Bandwidth @ 802.11n HT20 mode channel 11

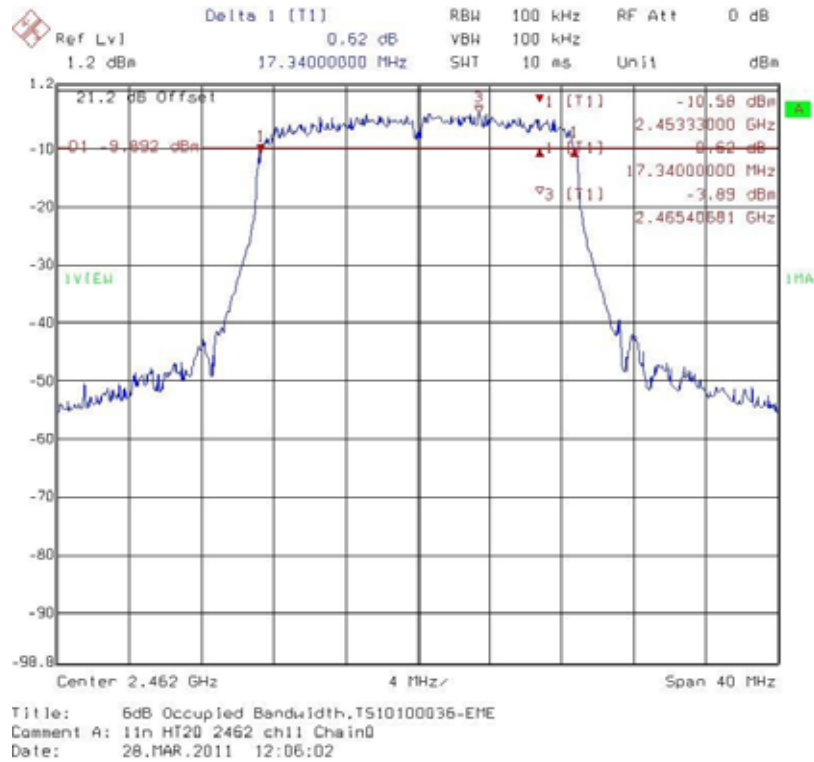


Chain 1: 6 dB Bandwidth @ 802.11n HT20 mode channel 1

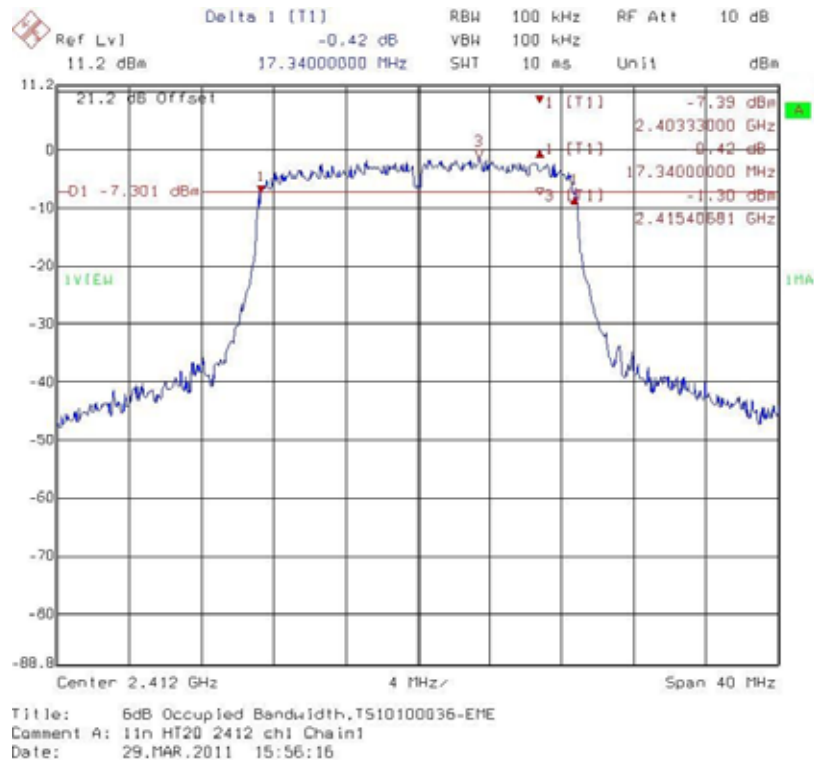


Chain 1: 6 dB Bandwidth @ 802.11n HT20 mode channel 6

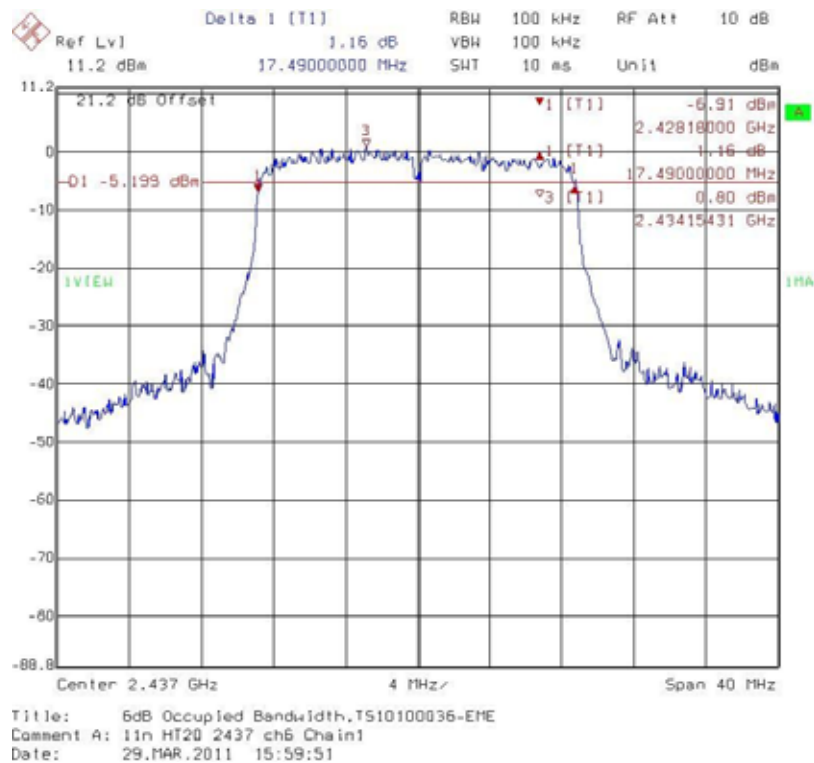


Chain 1: 6 dB Bandwidth @ 802.11n HT20 mode channel 11

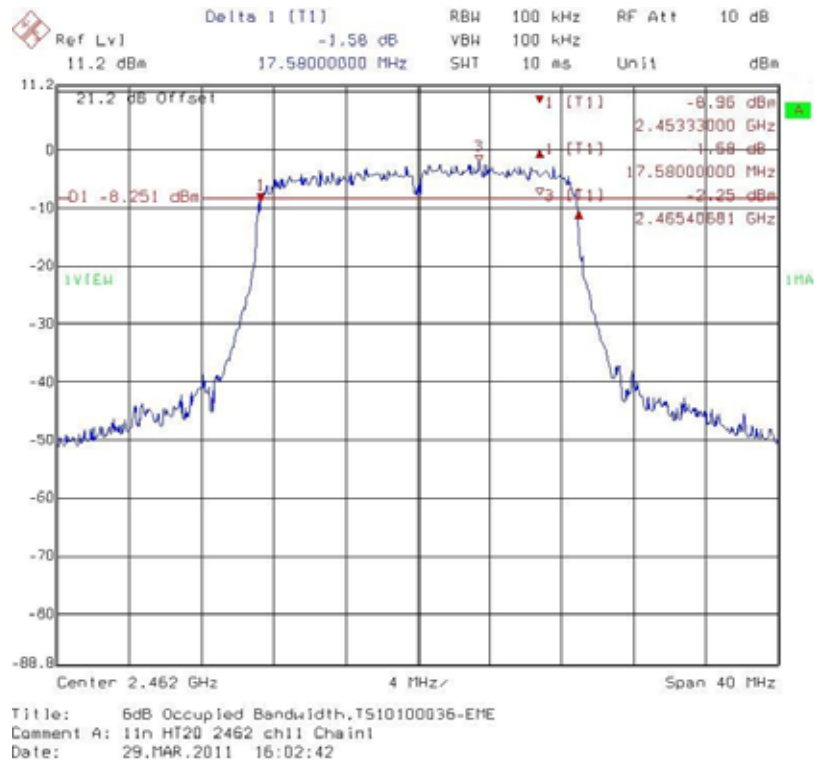


Chain 0: 6 dB Bandwidth @ 802.11n HT40 mode channel 3

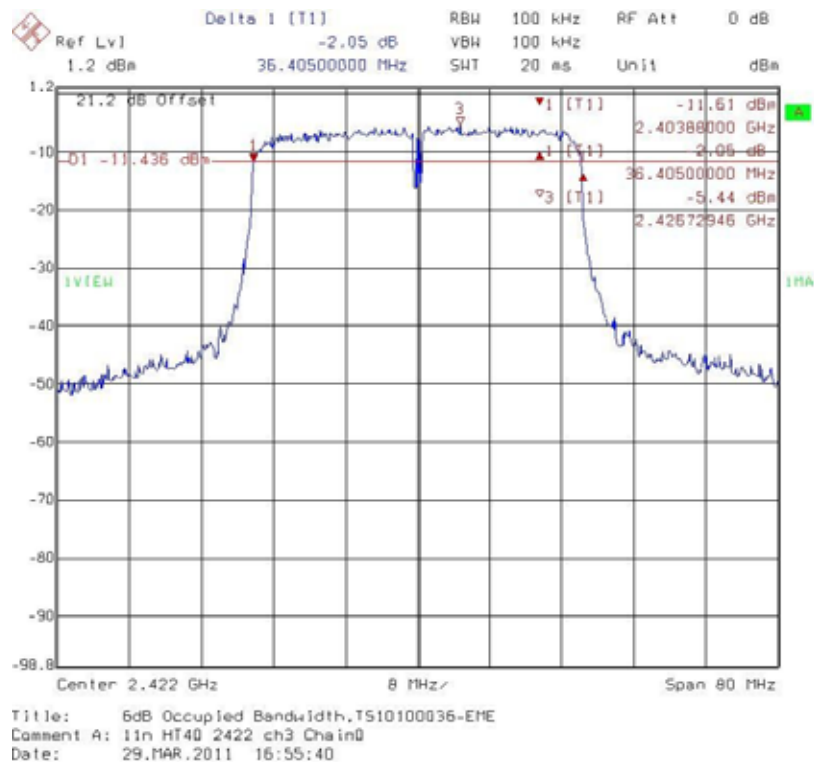


Chain 0: 6 dB Bandwidth @ 802.11n HT40 mode channel 6

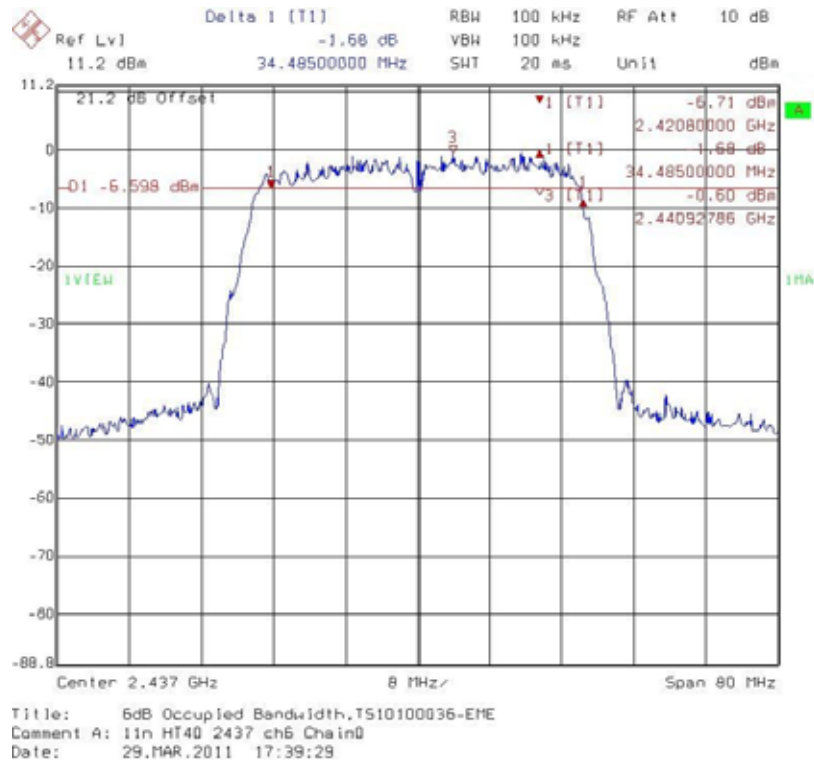


Chain 0: 6 dB Bandwidth @ 802.11n HT40 mode channel 9

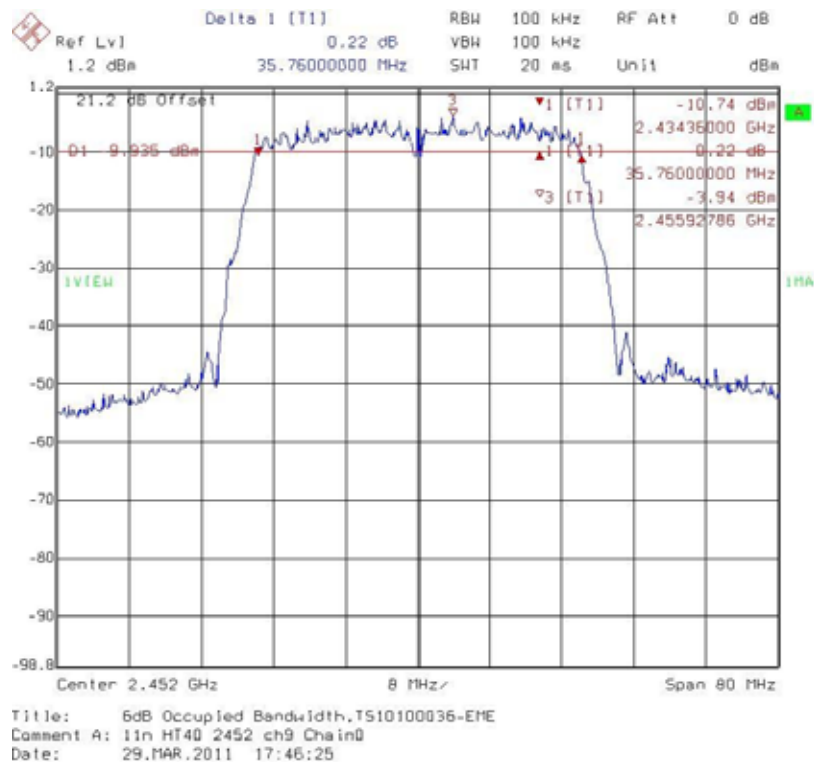


Chain 1: 6 dB Bandwidth @ 802.11n HT40 mode channel 3

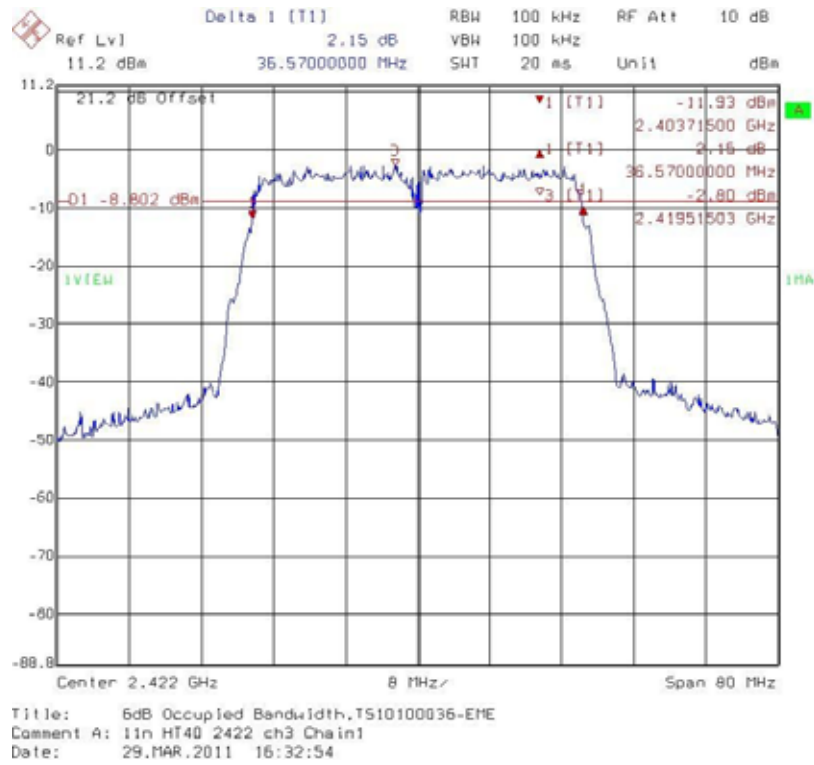

Chain 1: 6 dB Bandwidth @ 802.11n HT40 mode channel 6

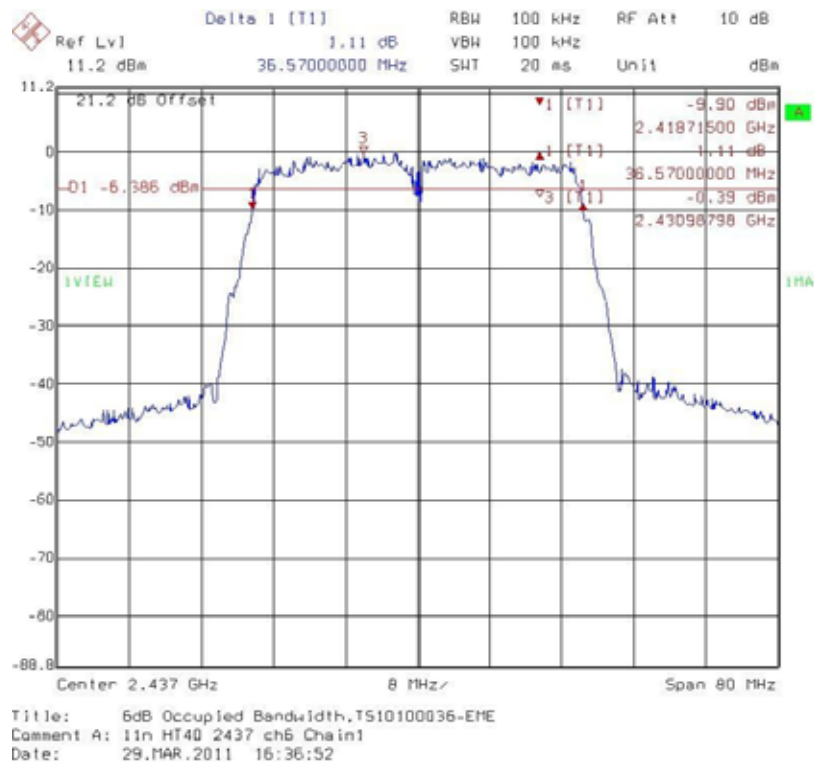

Chain 1: 6 dB Bandwidth @ 802.11n HT40 mode channel 9

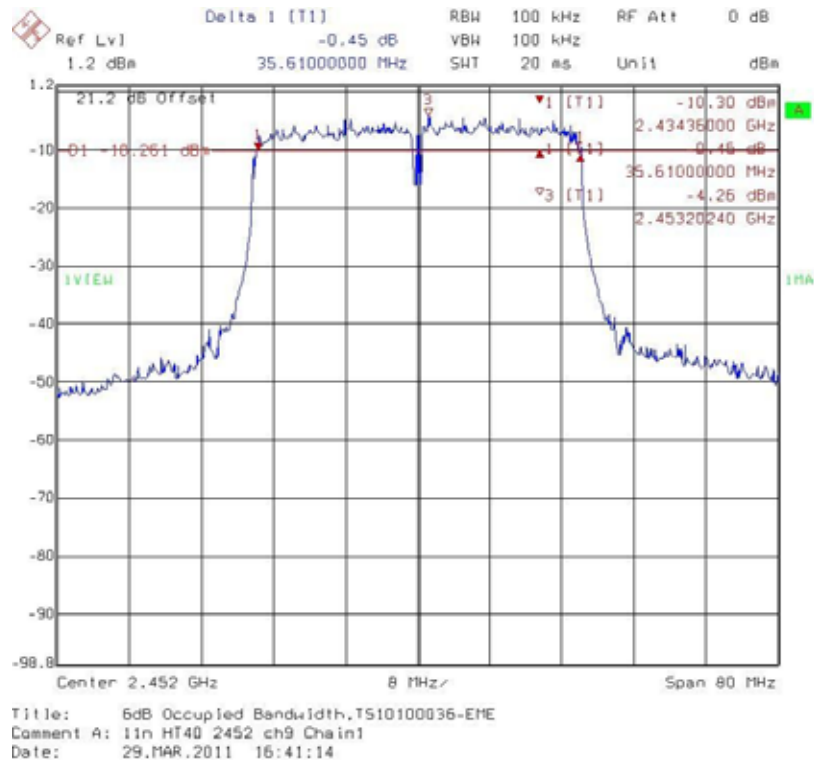

4. 99 % Occupied Bandwidth


Name of Test	99 % Occupied Bandwidth
Base Standard	None; for reporting purposes only

Test Result: Complies
Measurement Data: See Table & plots below

Method of Measurement:
Reference FCC document: KDB558074

A portion of the transmitted signal is coupled to a Spectrum Analyzer with a resolution bandwidth of at least 1 % of the bandwidth of the transmitted signal. The resolution bandwidth is chosen so as not to reduce the peak level of the measured waveform. The appropriate bandwidth mask is applied to the output waveform to verify compliance.

Test Diagram:

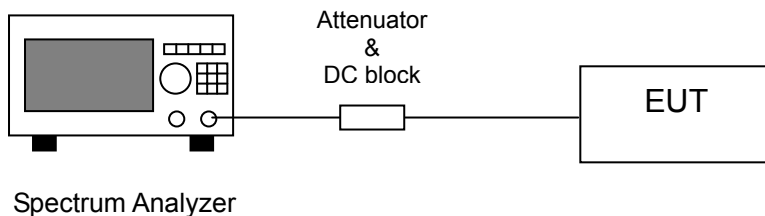


Note: The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode, 6.5 Mbps data rate for 802.11n HT20 mode and 13 Mbps data rate for 802.11n HT40 mode. The EUT was tuned to a low, middle and high channel.

Table 2 99 % Occupied Bandwidth


Mode	Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
802.11b	1	2412	14.33
	6	2437	14.33
	11	2462	14.33

Mode	Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
			DAC0	DAC1
802.11g	1	2412	16.63	16.73
	6	2437	16.83	16.83
	11	2462	16.83	17.94
802.11n HT20	1	2412	17.64	17.54
	6	2437	17.64	17.64
	11	2462	17.54	17.64
802.11n HT40	3	2422	36.07	37.07
	6	2437	36.87	37.07
	9	2452	36.87	36.27


Chain 0: 99 % Occupied Bandwidth @ 802.11b mode channel 1

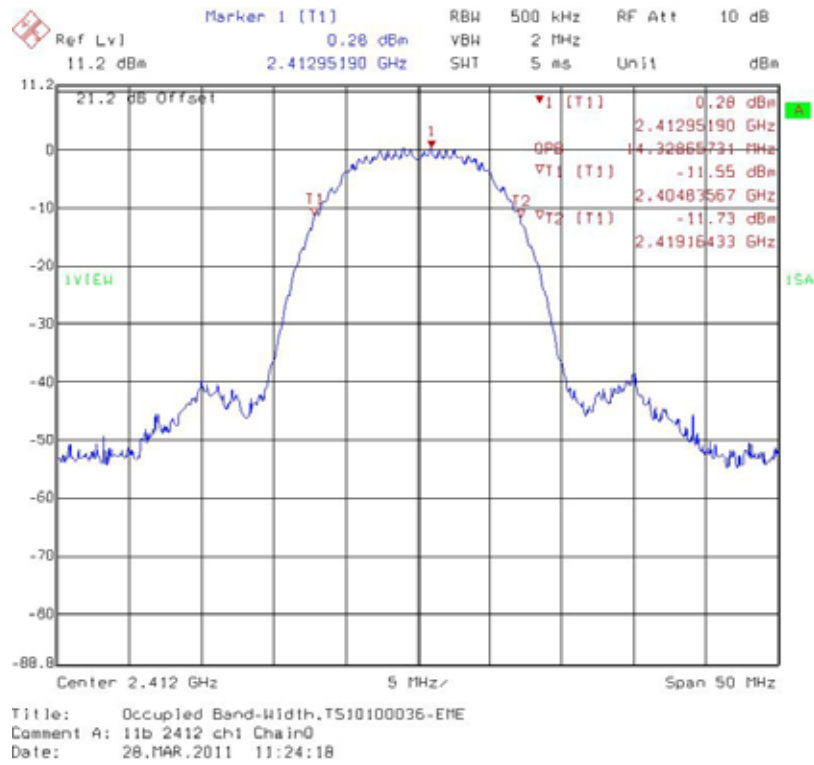


Chain 0: 99 % Occupied Bandwidth @ 802.11b mode channel 6

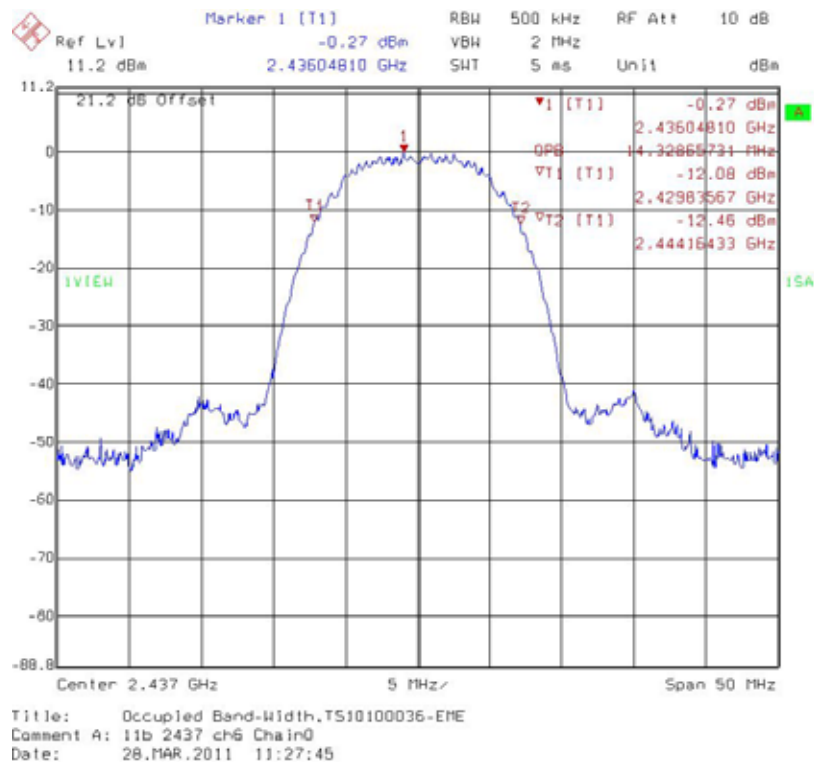


Chain 0: 99 % Occupied Bandwidth @ 802.11b mode channel 11

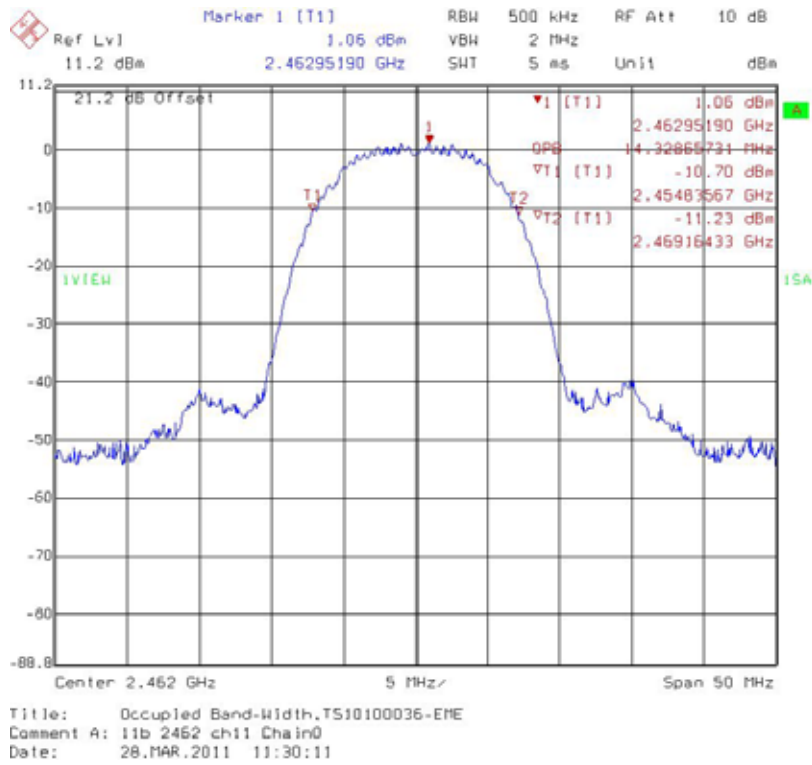


Chain 0: 99 % Occupied Bandwidth @ 802.11g mode channel 1

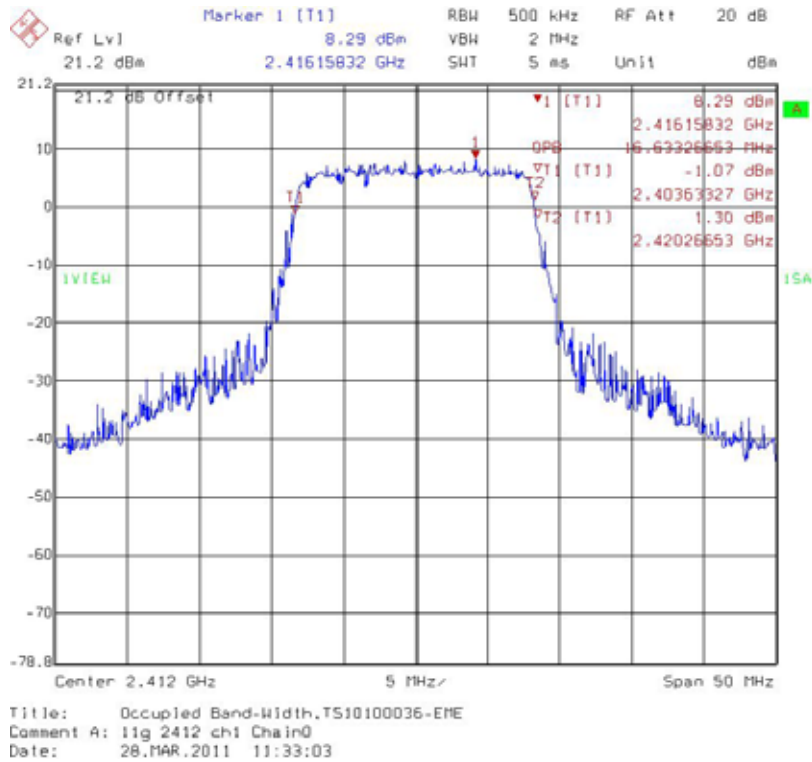


Chain 0: 99 % Occupied Bandwidth @ 802.11g mode channel 6

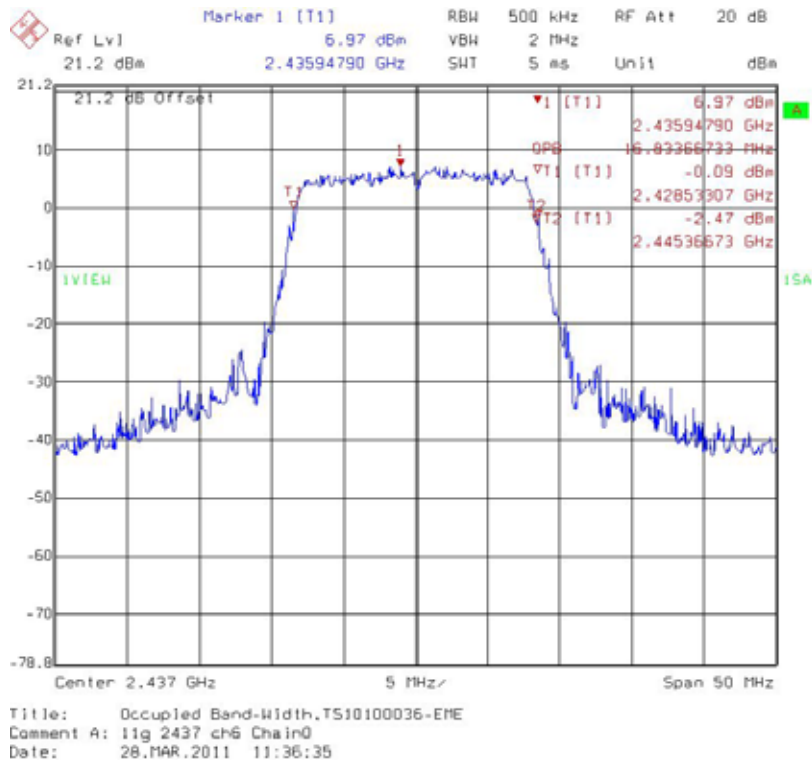


Chain 0: 99 % Occupied Bandwidth @ 802.11g mode channel 11

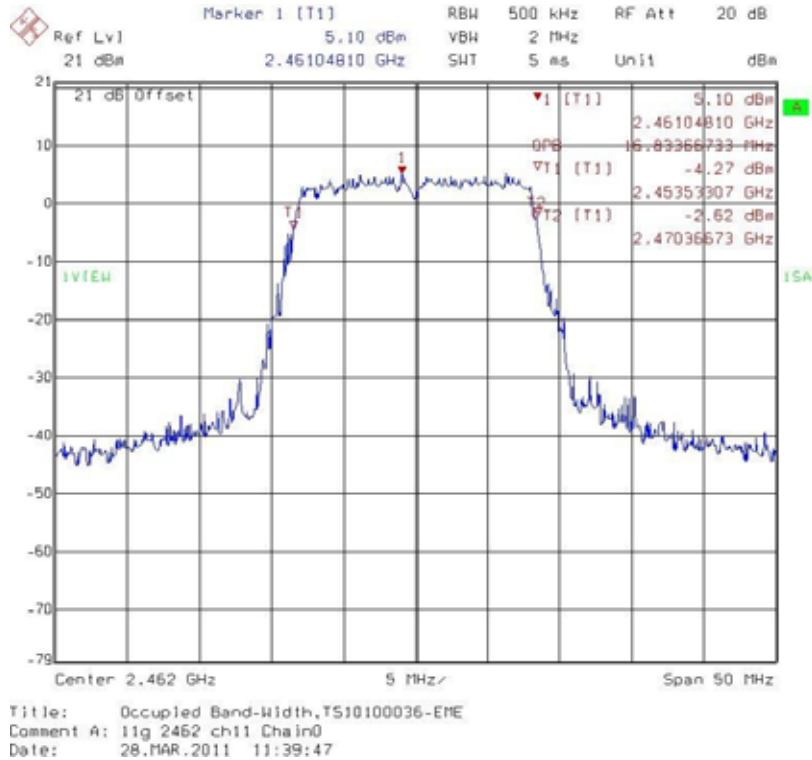


Chain 1: 99 % Occupied Bandwidth @ 802.11g mode channel 1

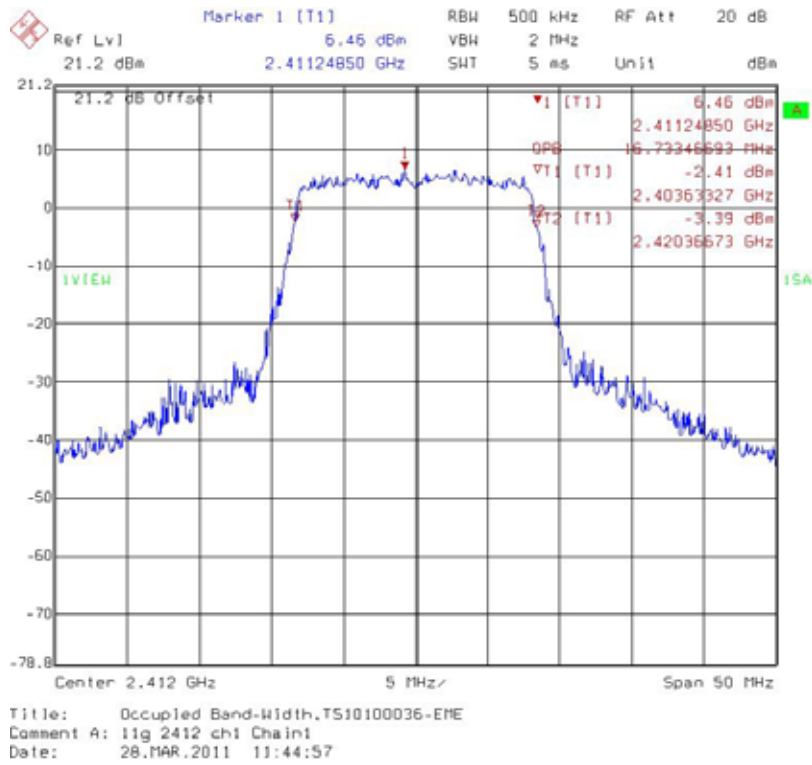


Chain 1: 99 % Occupied Bandwidth @ 802.11g mode channel 6

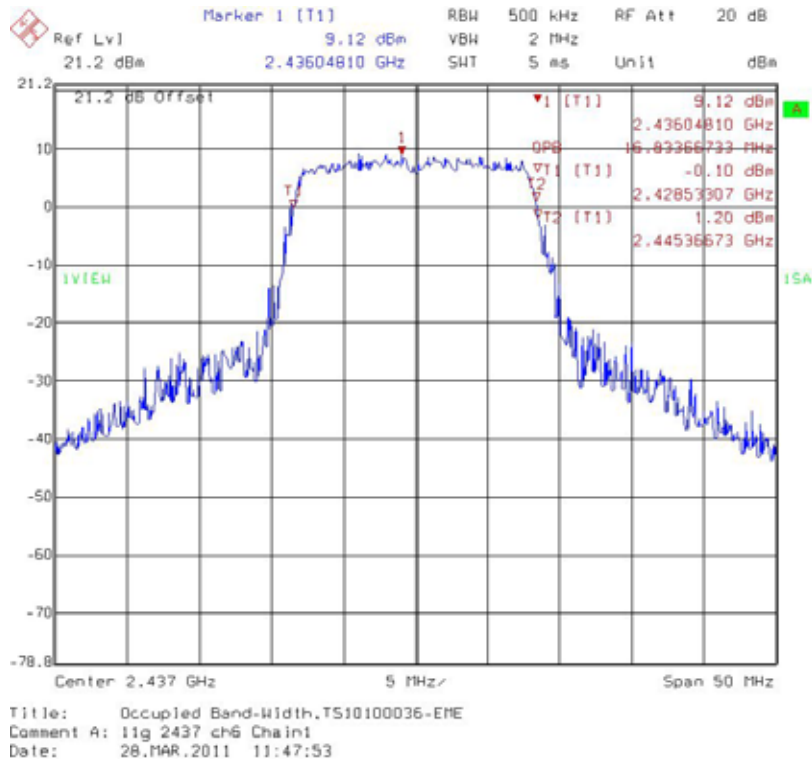


Chain 1: 99 % Occupied Bandwidth @ 802.11g mode channel 11

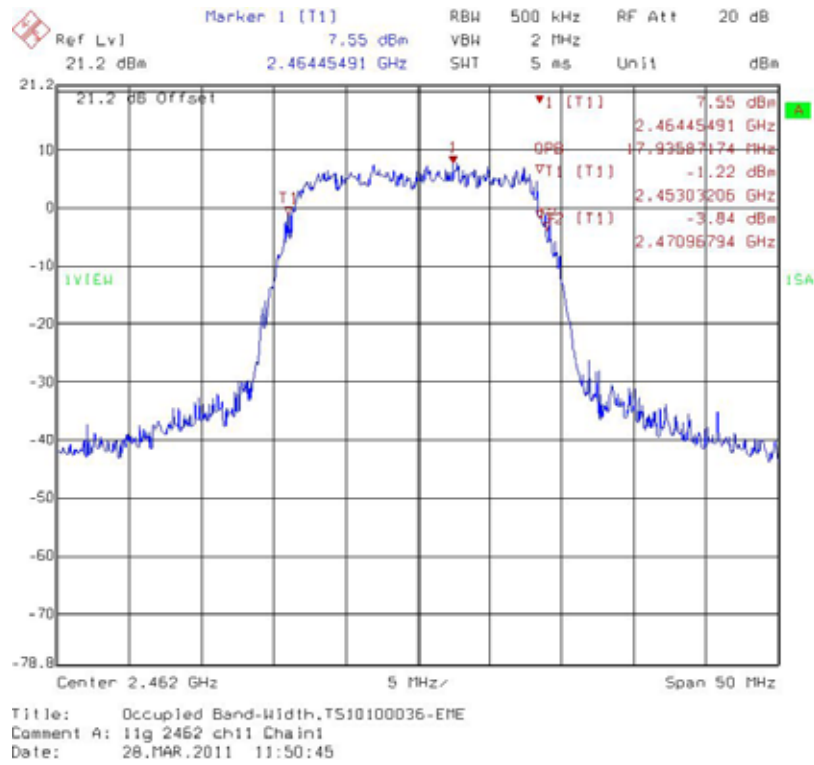


Chain 0: 99 % Occupied Bandwidth @ 802.11n HT20 mode channel 1

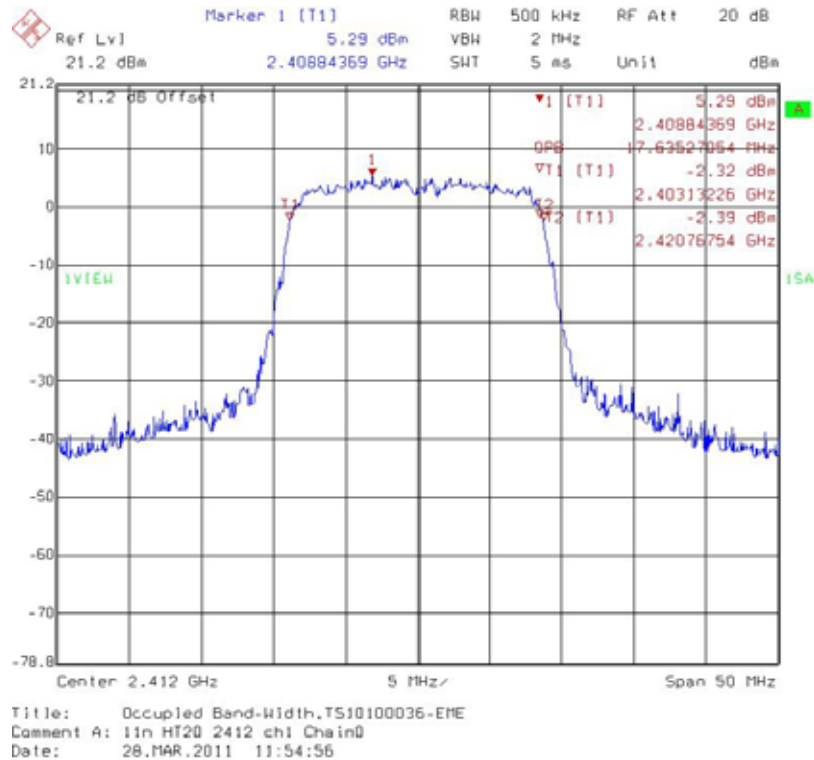


Chain 0: 99 % Occupied Bandwidth @ 802.11n HT20 mode channel 6

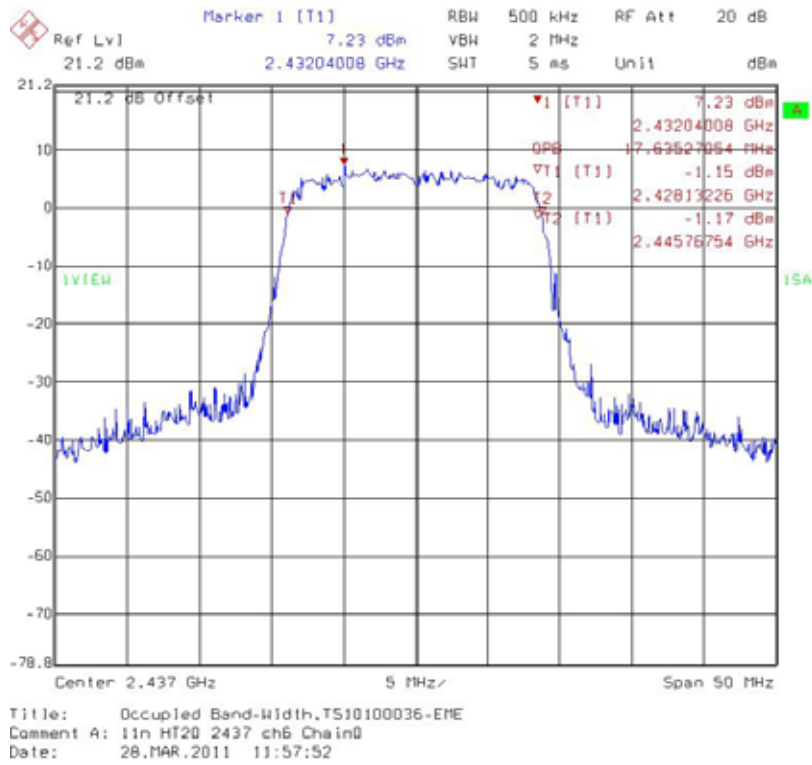


Chain 0: 99 % Occupied Bandwidth @ 802.11n HT20 mode channel 11

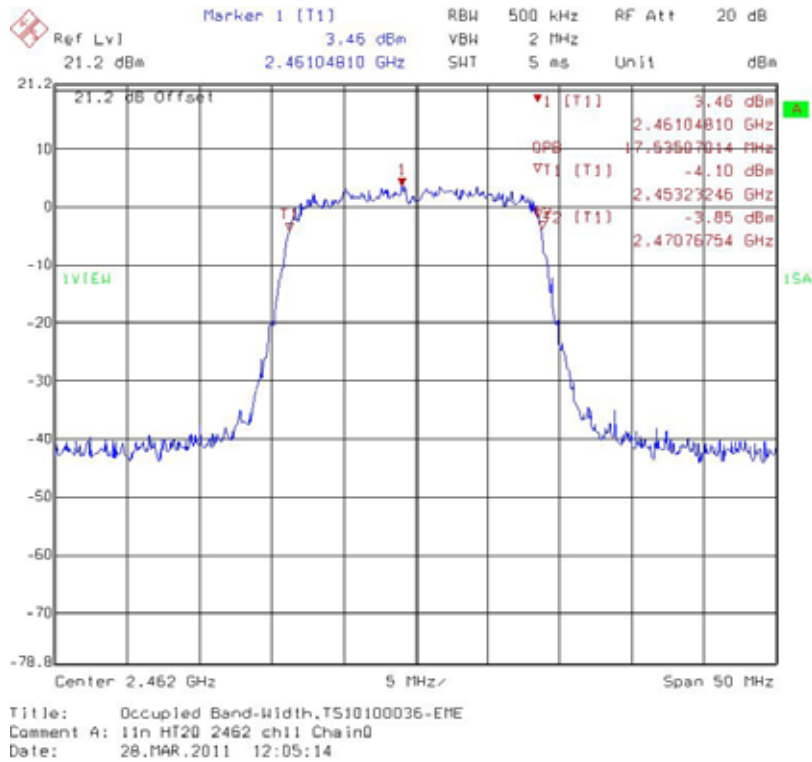


Chain 1: 99 % Occupied Bandwidth @ 802.11n HT20 mode channel 1

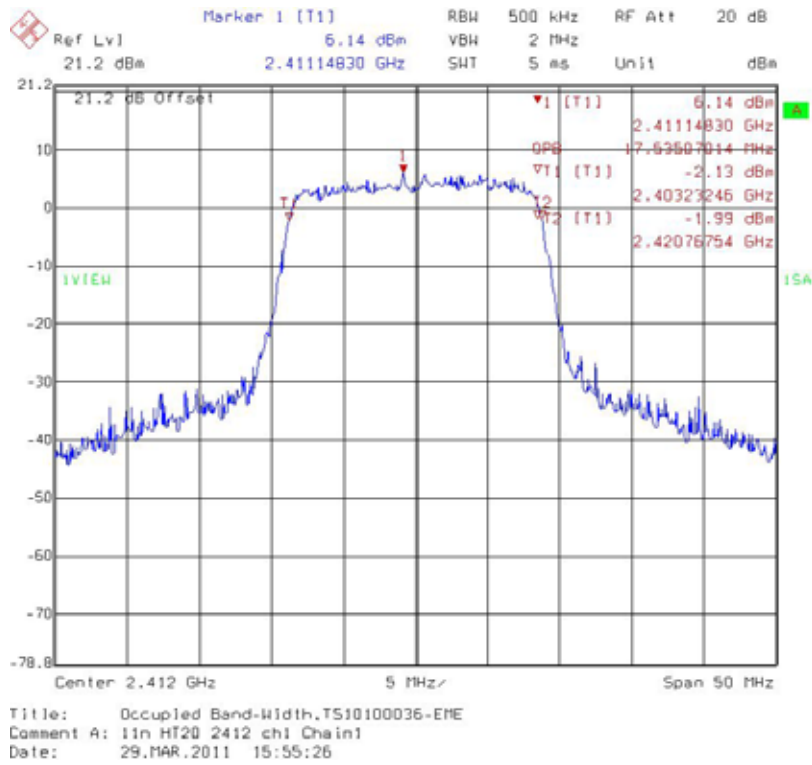


Chain 1: 99 % Occupied Bandwidth @ 802.11n HT20 mode channel 6

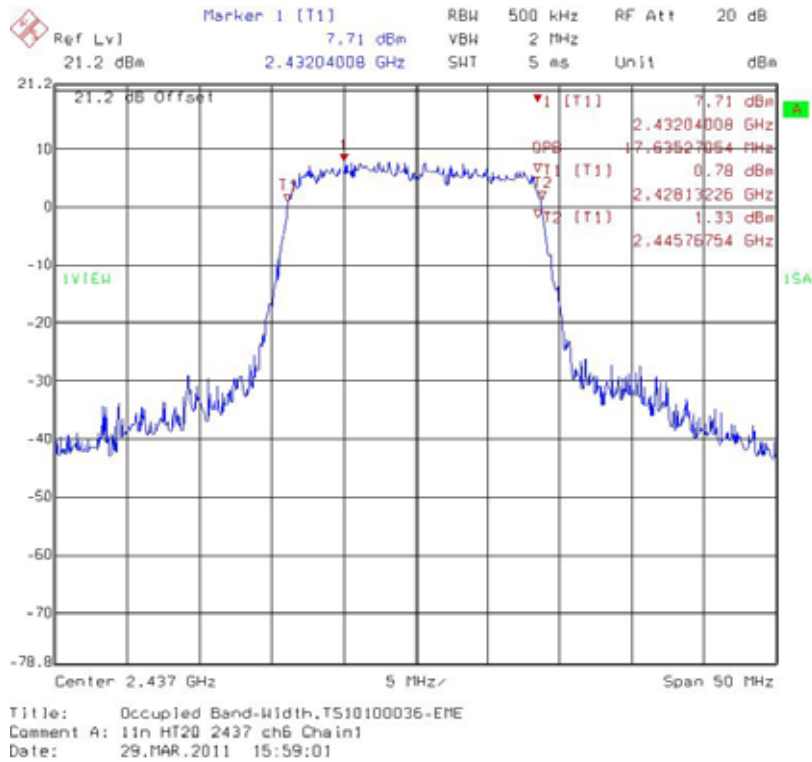


Chain 1: 99 % Occupied Bandwidth @ 802.11n HT20 mode channel 11

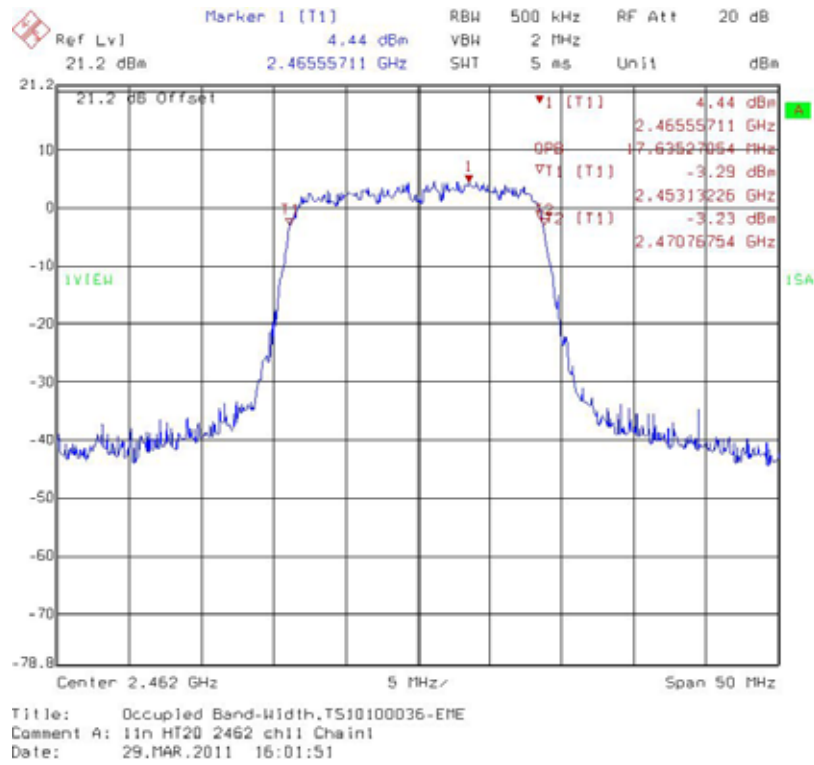


Chain 0 : 99 % Occupied Bandwidth @ 802.11n HT40 mode channel 3

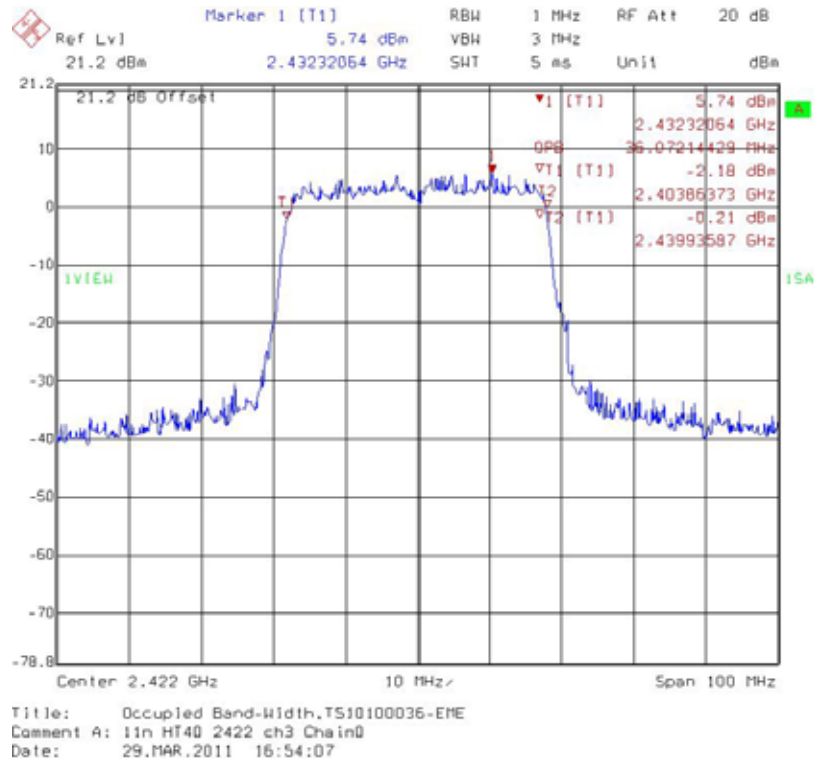


Chain 0: 99 % Occupied Bandwidth @ 802.11n HT40 mode channel 6

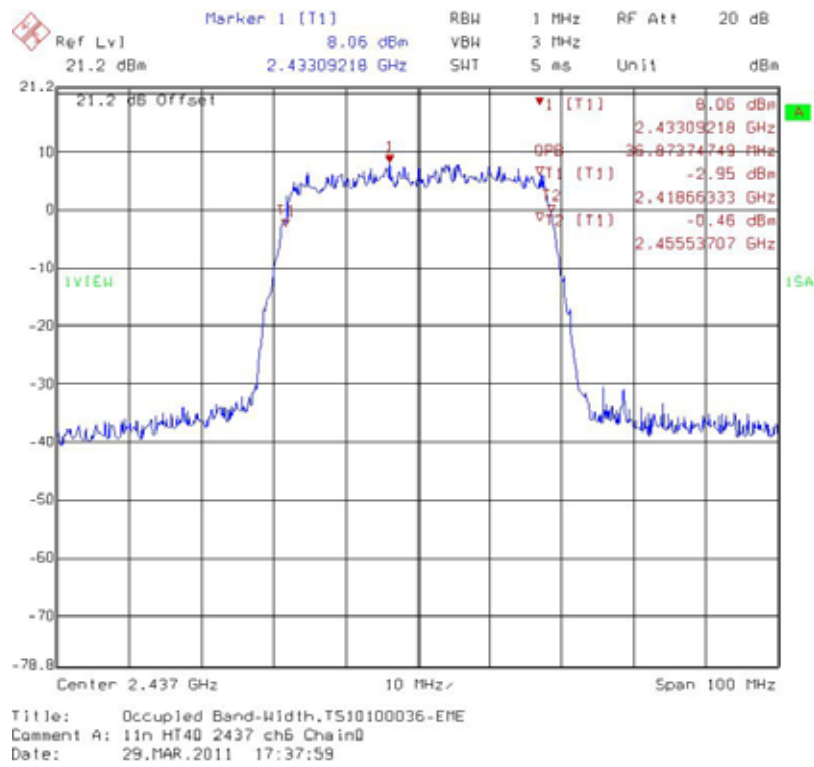


Chain 0: 99 % Occupied Bandwidth @ 802.11n HT40 mode channel 9

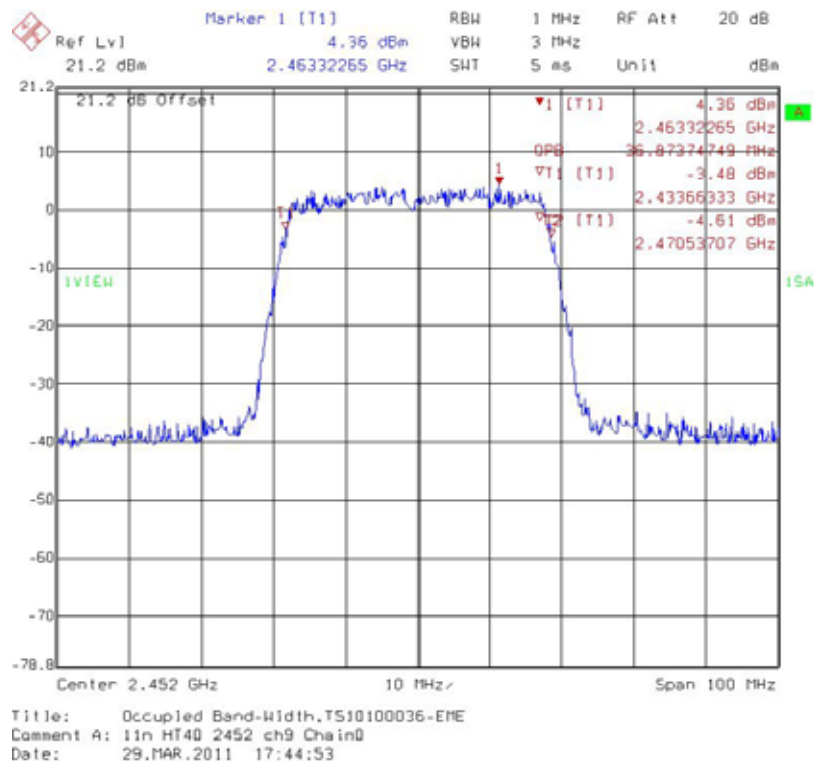


Chain 1: 99 % Occupied Bandwidth @ 802.11n HT40 mode channel 3

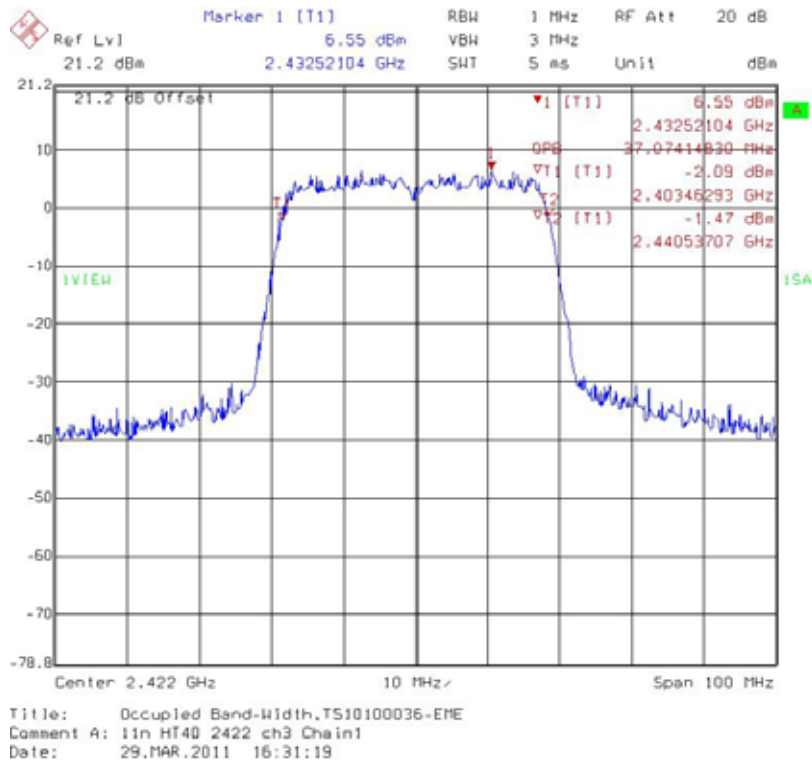

Chain 1: 99 % Occupied Bandwidth @ 802.11n HT40 mode channel 6

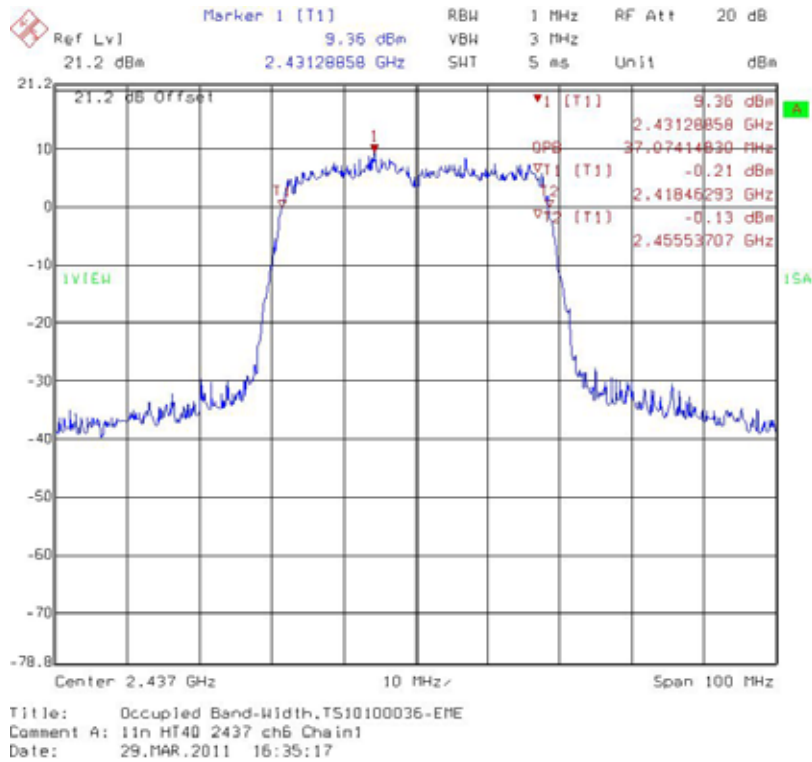

Chain 1: 99 % Occupied Bandwidth @ 802.11n HT40 mode channel 9

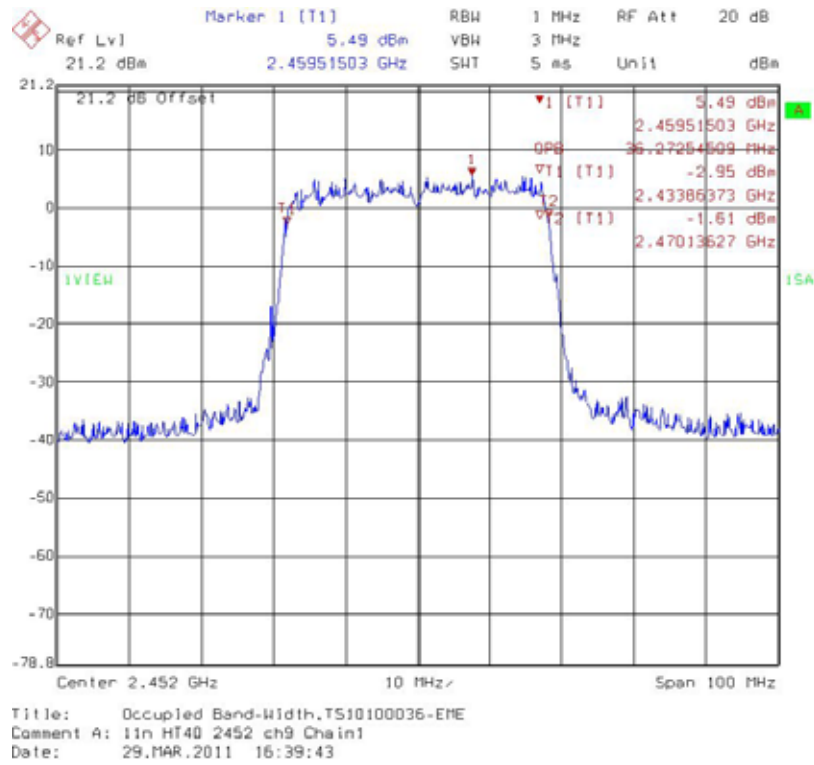

5. Maximum Output Power

Name of Test	Maximum output power
Base Standard	FCC 15.247(b)

Measurement Uncertainty: ±0.392 dB (k=2)

Test Result: Complies


Measurement Data: See Table below

Method of Measurement:

Reference FCC document: KDB558074

The power output was measured on the EUT using a 50 ohm SMA Cable connected to peak power meter via power sensor. Connect 20 dB attenuator and DC block at the input port of the power sensor. Measure conducted transmit power of at each antenna port ,besides another ports were terminated by 50 ohm and sum these power in linear power units,Power output was measured with the maximum rated input level.

Test Diagram:

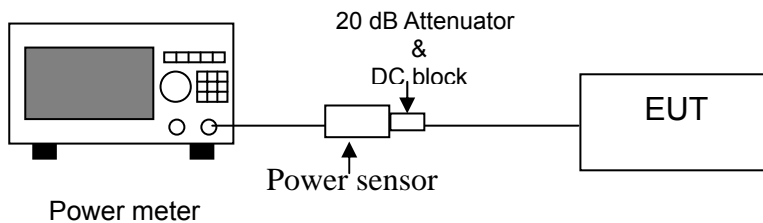

Note 1: §15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note 2: §15.247 (b) (4) (ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Table 3 Maximum output power

Mode	Channel	Frequency (MHz)	Output Power (dBm)		Total Power (mw)		Limit (dBm)	Margin (dB)
			PK		PK			
			DAC0		PK			
802.11b	1	2412	10.91		12.33		30	-19.09
	6	2437	9.92		9.82		30	-20.08
	11	2462	10.4		10.96		30	-19.60
802.11g	1	2412	21.97		157.40		30	-8.03
	6	2437	22.06		160.69		30	-7.94
	11	2462	21.88		154.17		30	-8.12

Mode	Channel	Frequency (MHz)	Output Power (dBm)		Total Power (mw)		Limit (dBm)	Margin (dB)
			PK		PK			
			DAC1		PK			
802.11g	1	2412	21.97		157.40		30	-8.03
	6	2437	23.96		248.89		30	-6.04
	11	2462	22.07		161.06		30	-7.93

Mode	Channel	Frequency (MHz)	Output Power (dBm)		Total Power		Limit (dBm)	Margin (dB)
			PK		PK			
			DAC0	DAC1	(mw)	(dBm)		
802.11n HT20	1	2412	20.03	20.07	202.32	23.06	30	-6.94
	6	2437	22.01	23.07	361.62	25.58	30	-4.42
	11	2462	18.96	20.06	180.10	22.56	30	-7.44
802.11n HT40	3	2422	19.88	20.02	197.74	22.96	30	-7.04
	6	2437	21.22	22.46	308.63	24.89	30	-5.11
	9	2452	19.07	19.47	169.24	22.28	30	-7.72

6. Power Spectral Density

Name of Test	Power Spectral Density
Base Standard	FCC 15.247(e)

Test Result: Complies
Measurement Data: See Table & plots below

Method of Measurement:

Reference FCC document: KDB558074

The power spectrum density was measured from the antenna port of the EUT using a 50 ohm spectrum analyzer. Locate and zoom in on emission peak(s) within the passband. Set RBW = 3 kHz, VBW >RBW, sweep= 500s. The peak level measured must be no greater than + 8 dBm. Power spectrum density was read directly and cable loss (1 dB)/external attenuator (20 dB) correction was added to the reading to obtain power at the EUT antenna terminals.

Test Diagram:

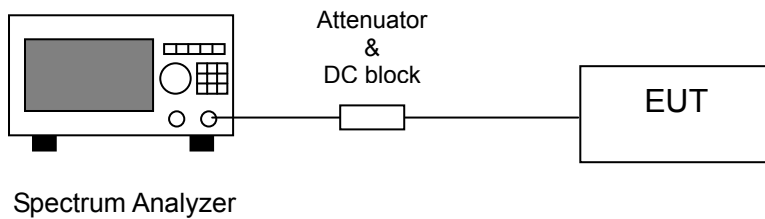



Table 4 Power Spectral Density

Mode	Channel	Frequency (MHz)	PSD(dBm)		PSD (mW)	Limit (dBm)	Margin (dB)
			DAC0				
802.11b	1	2412	-20.76		0.01	8	-28.76
	6	2437	-21.23		0.01	8	-29.23
	11	2462	-19.99		0.01	8	-27.99
802.11g	1	2412	-13.87		0.04	8	-21.87
	6	2437	-14.40		0.04	8	-22.40
	11	2462	-6.82		0.21	8	-14.82


Mode	Channel	Frequency (MHz)	PSD(dBm)		PSD (mW)	Limit (dBm)	Margin (dB)
			DAC1				
802.11g	1	2412	-15.03		0.03	8	-23.03
	6	2437	-12.26		0.06	8	-20.26
	11	2462	-7.23		0.19	8	-15.23

Mode	Channel	Frequency (MHz)	PSD(dBm)		Total PSD		Limit (dBm)	Margin (dB)
			DAC0	DAC1	(mW)	(dBm)		
802.11n HT20	1	2412	-16.28	-15.09	0.05	-12.63	8	-20.63
	6	2437	-14.44	-13.07	0.09	-10.69	8	-18.69
	11	2462	-17.10	-16.04	0.04	-13.52	8	-21.52
802.11n HT40	3	2422	-19.18	-17.63	0.03	-15.33	8	-23.33
	6	2437	-15.36	-15.80	0.06	-12.56	8	-20.56
	9	2452	-18.57	-19.73	0.02	-16.10	8	-24.10


Chain 0: Power Spectral Density @ 802.11b mode channel 1

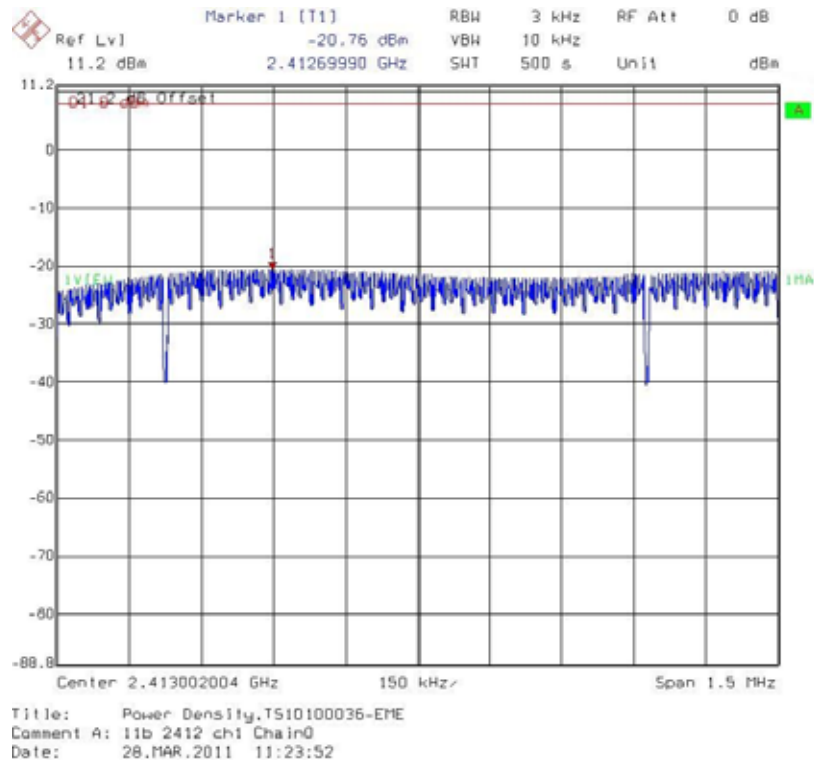


Chain 0: Power Spectral Density @ 802.11b mode channel 6

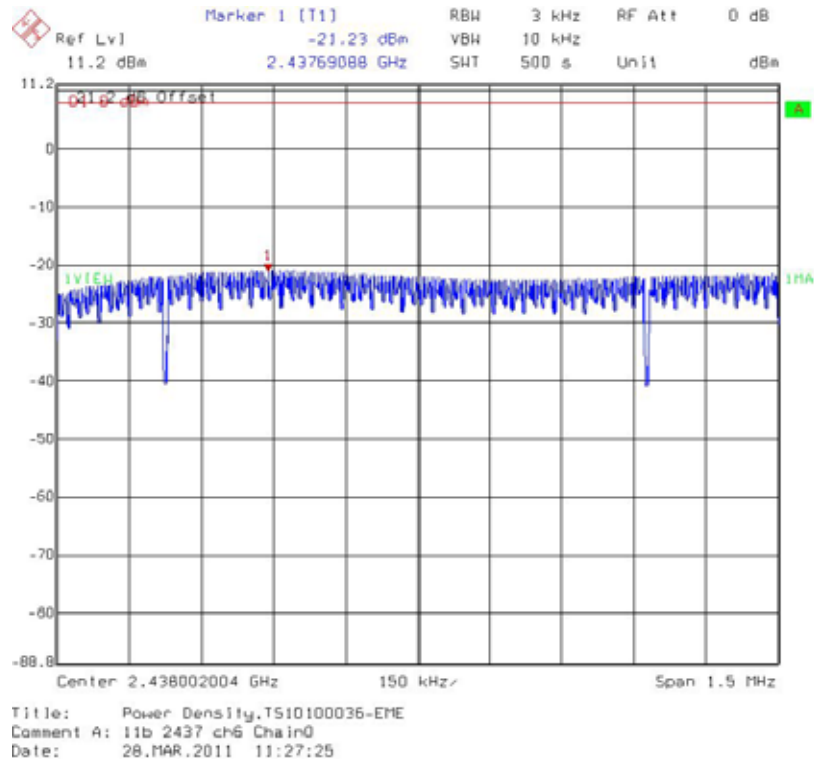


Chain 0: Power Spectral Density @ 802.11b mode channel 11

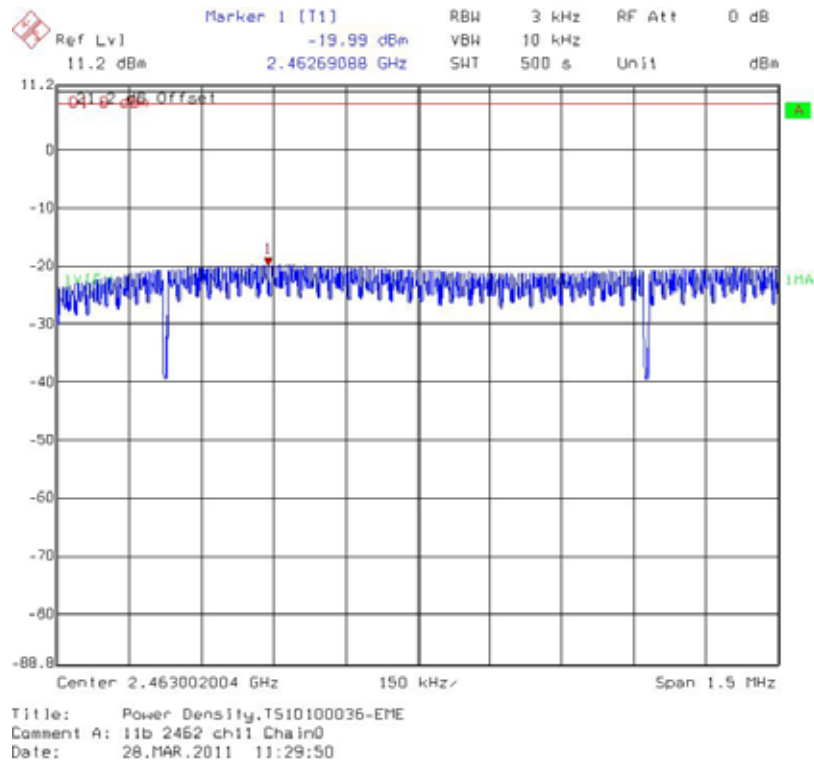


Chain 0: Power Spectral Density @ 802.11g mode channel 1

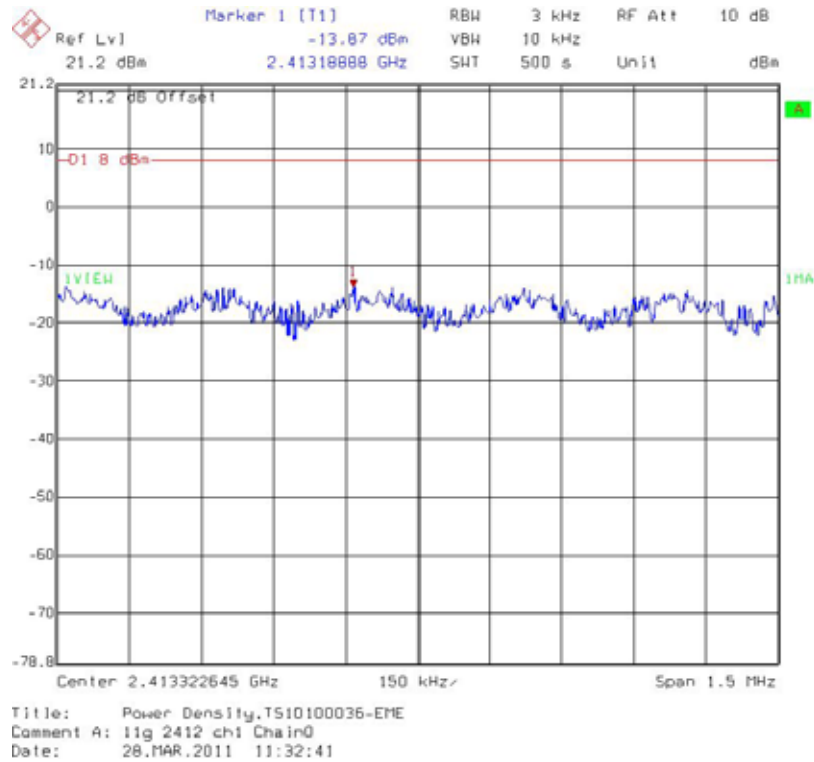


Chain 0: Power Spectral Density @ 802.11g mode channel 6

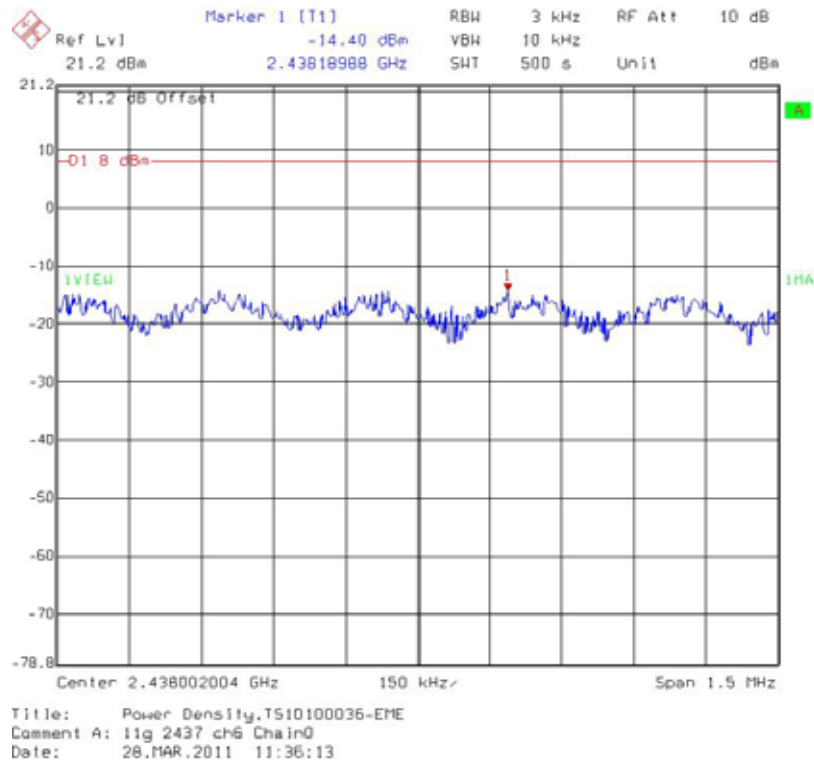


Chain 0: Power Spectral Density @ 802.11g mode channel 11

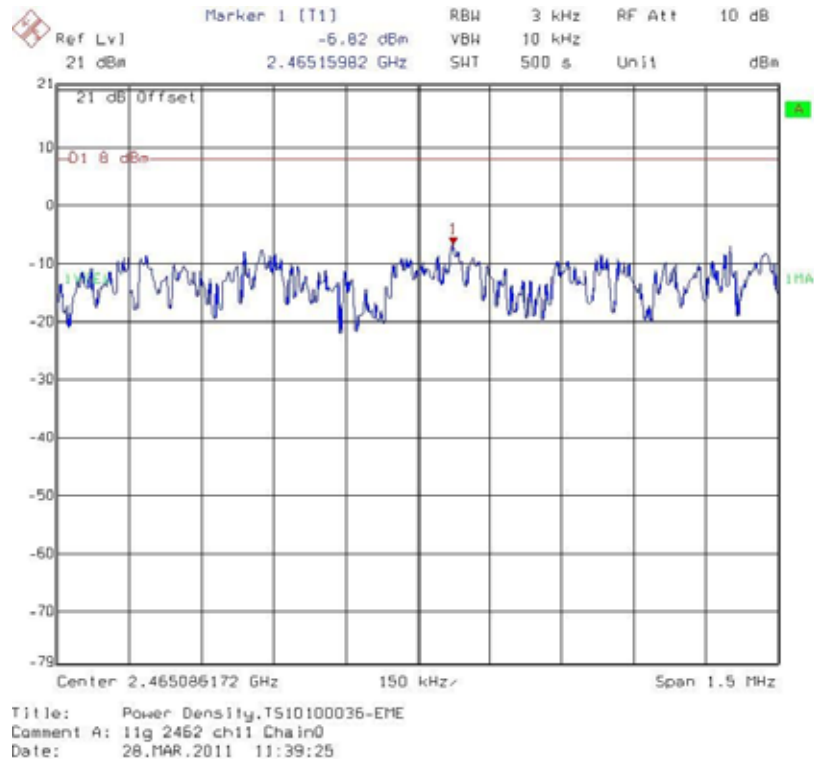


Chain 1: Power Spectral Density @ 802.11g mode channel 1

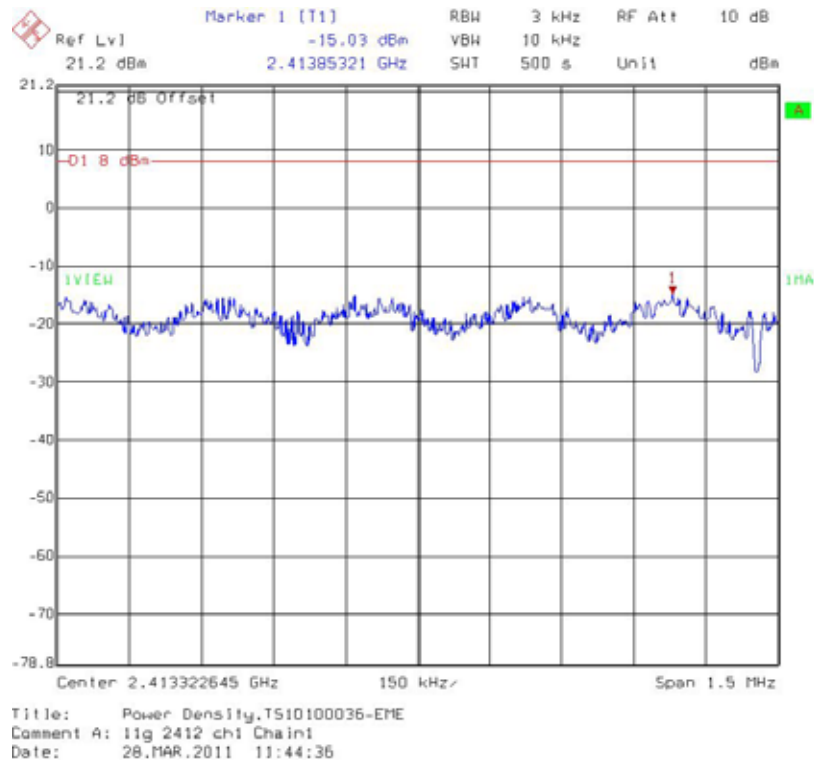


Chain 1: Power Spectral Density @ 802.11g mode channel 6

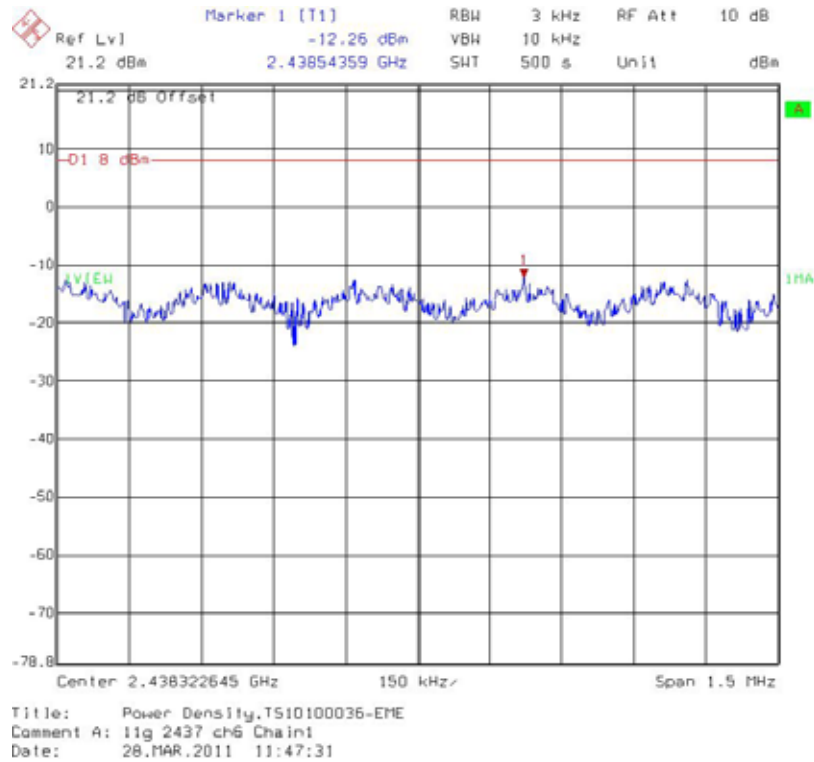


Chain 1: Power Spectral Density @ 802.11g mode channel 11

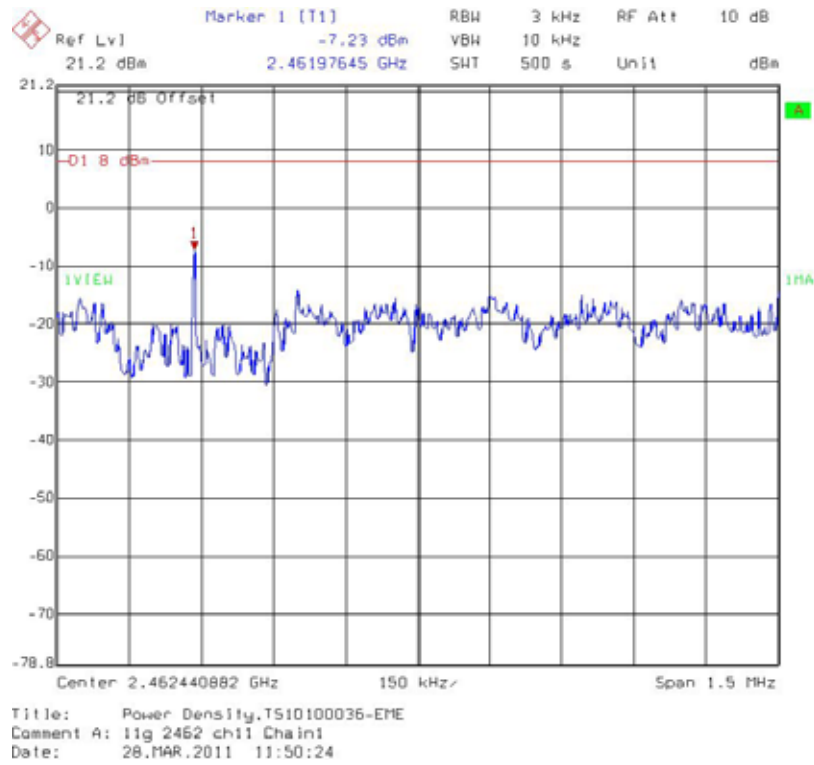


Chain 0: Power Spectral Density @ 802.11n HT20 mode channel 1

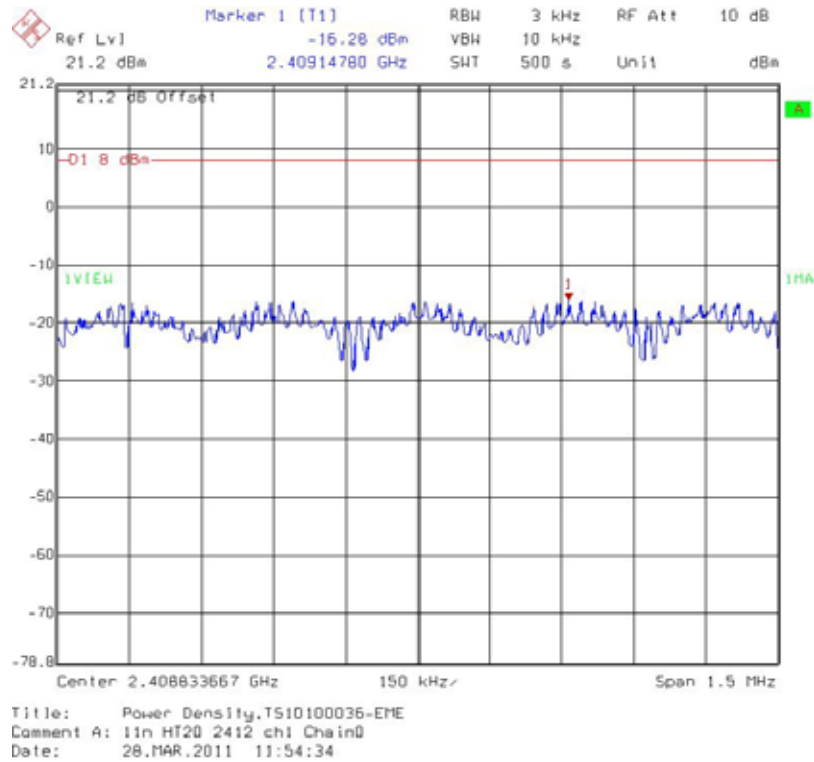


Chain 0: Power Spectral Density @ 802.11n HT20 mode channel 6

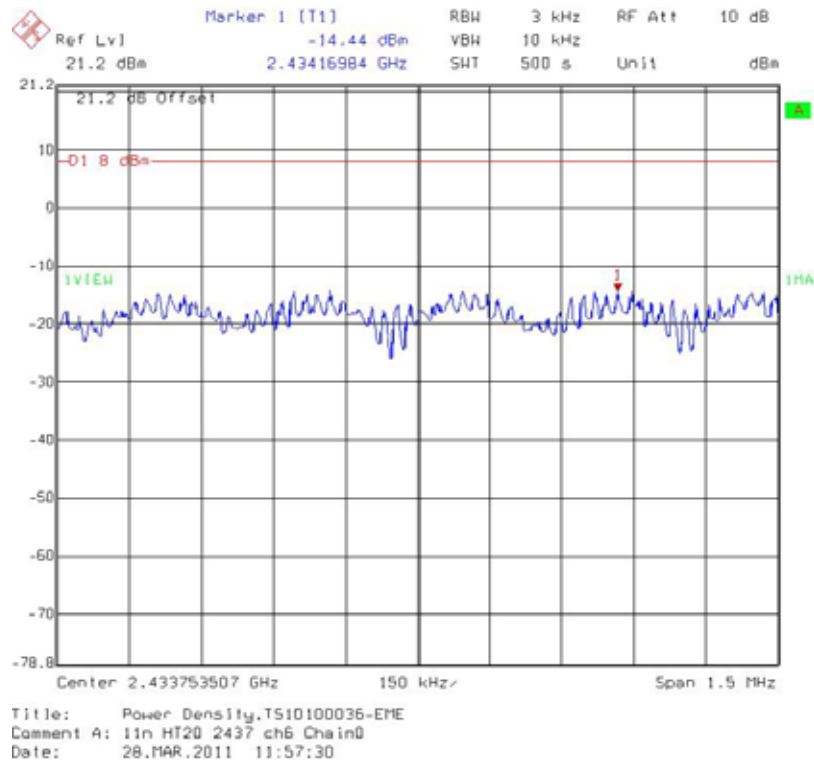


Chain 0: Power Spectral Density @ 802.11n HT20 mode channel 11

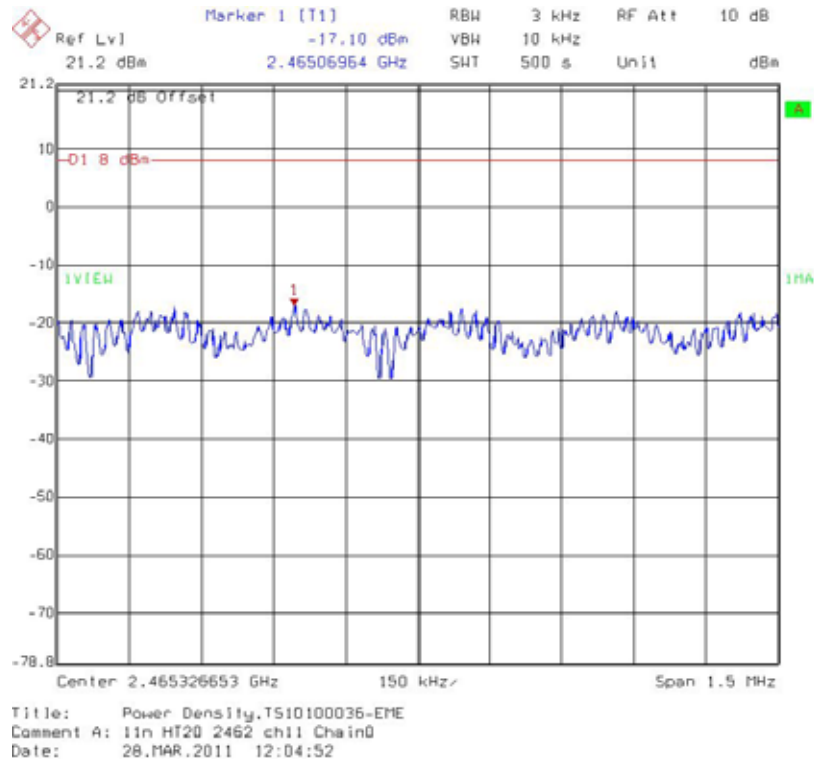


Chain 1: Power Spectral Density @ 802.11n HT20 mode channel 1

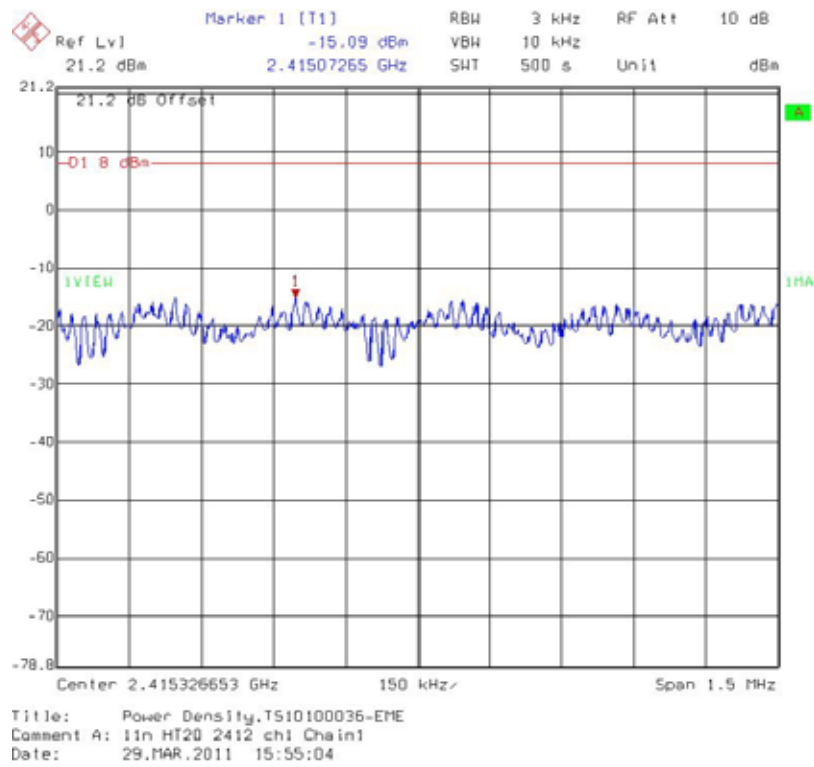


Chain 1: Power Spectral Density @ 802.11n HT20 mode channel 6

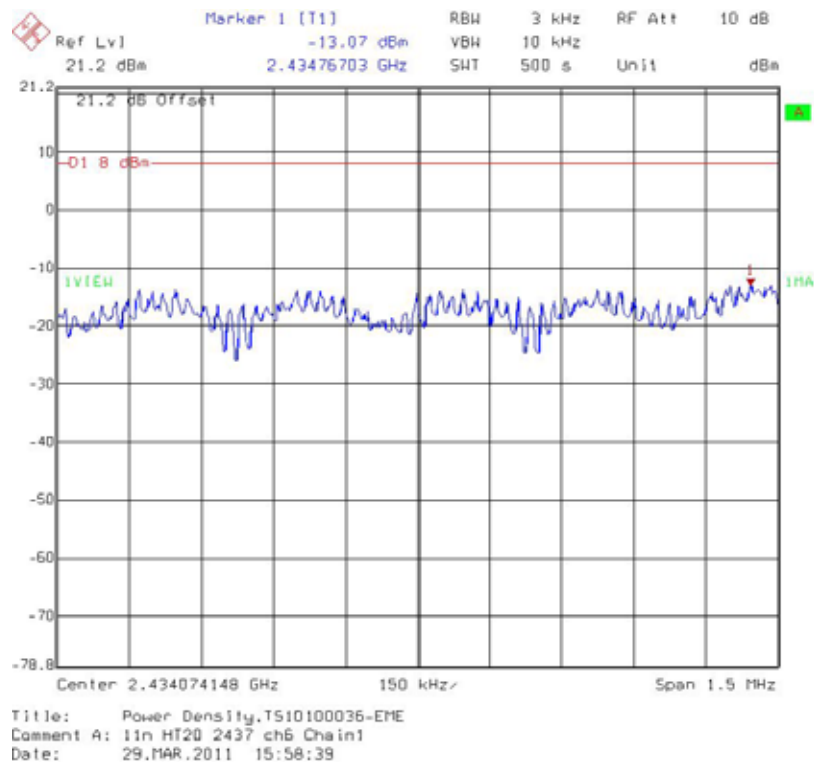


Chain 1: Power Spectral Density @ 802.11n HT20 mode channel 11

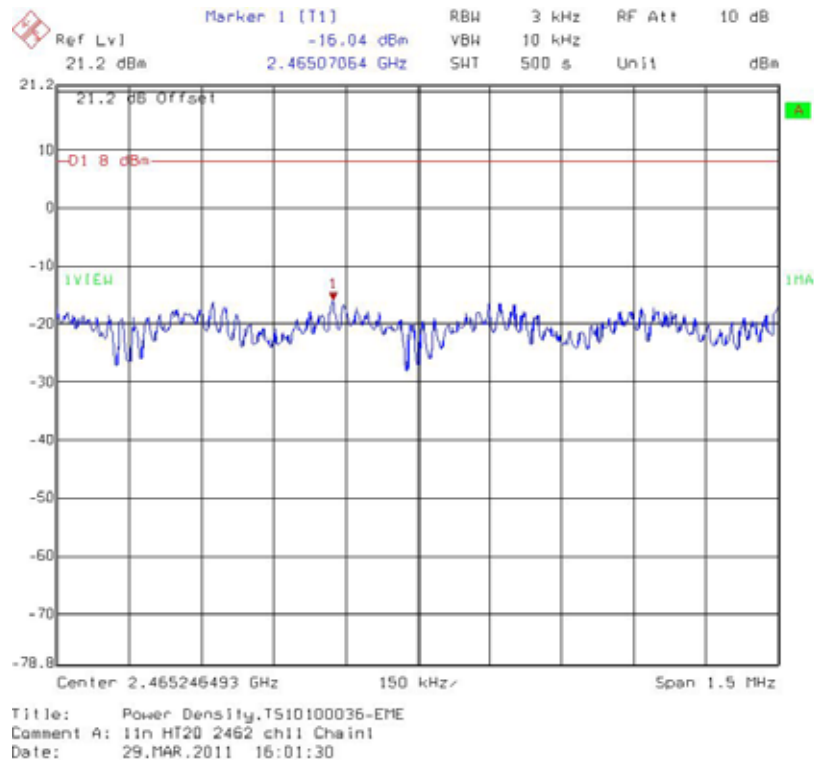

Chain 0: Power Spectral Density @ 802.11n HT40 mode channel 3

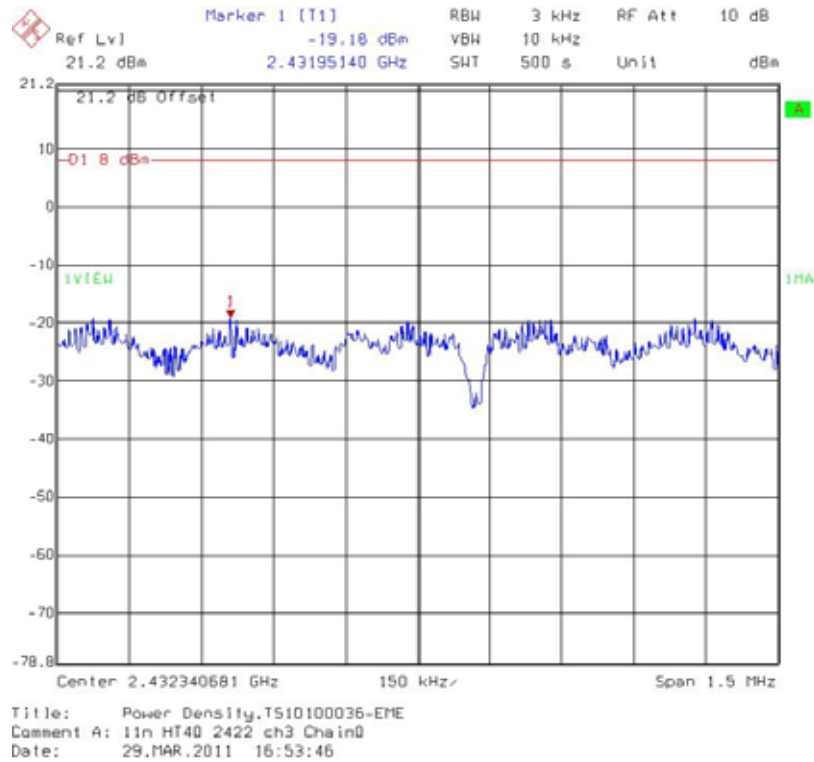

Chain 0: Power Spectral Density @ 802.11n HT40 mode channel 6

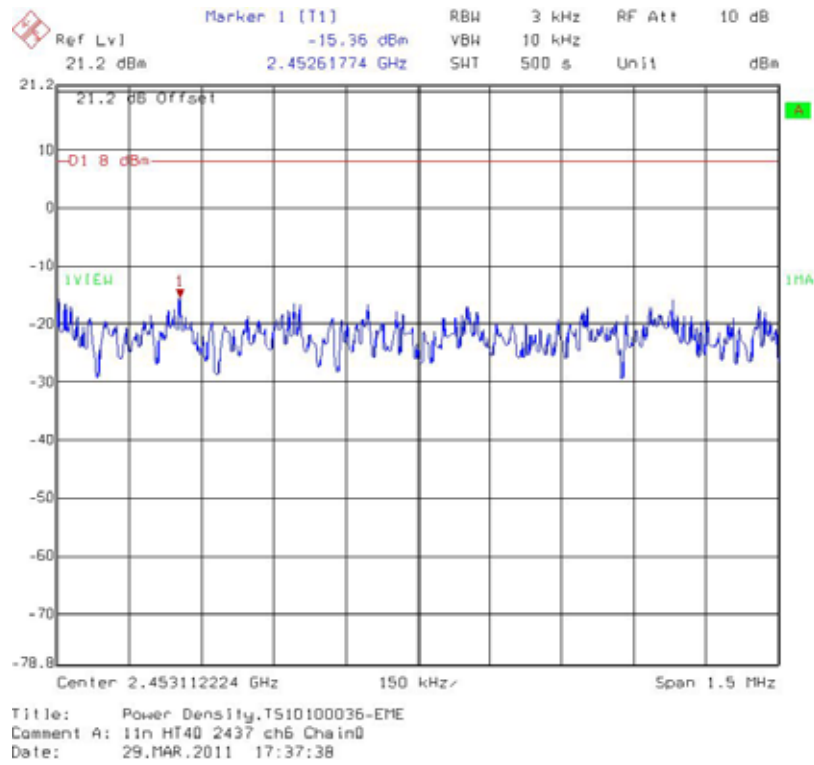

Chain 0: Power Spectral Density @ 802.11n HT40 mode channel 9

