


Appendix D. Co-location Report

1. Results of Radiated Emissions for Co-located

<For Dipole Antenna>


Temperature	20°C	Humidity	63%
Test Engineer	Sean Ku	Configurations	WLAN + GSM1900 CH661

Horizontal

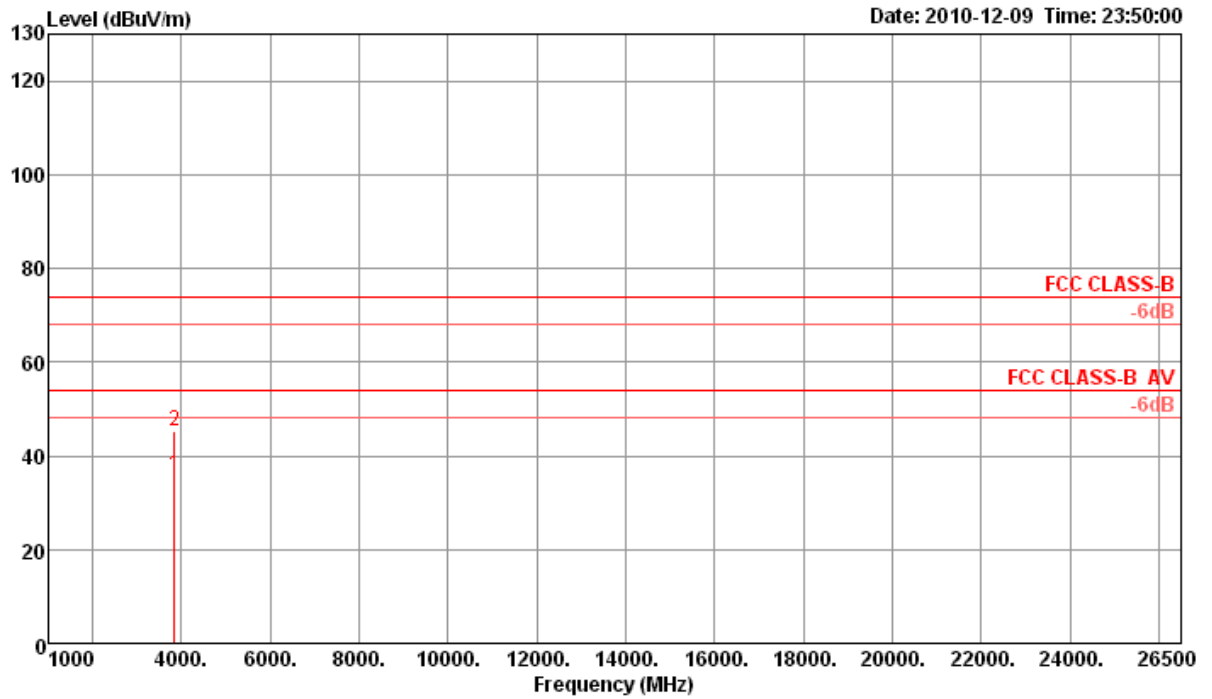

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	cm	deg		
1 a	3842.94	35.81	54.00	-18.19	36.68	2.85	35.02	31.30	100	60	Average	HORIZONTAL
2 p	3846.14	45.18	74.00	-28.82	46.07	2.84	35.03	31.30	100	60	Peak	HORIZONTAL

Vertical

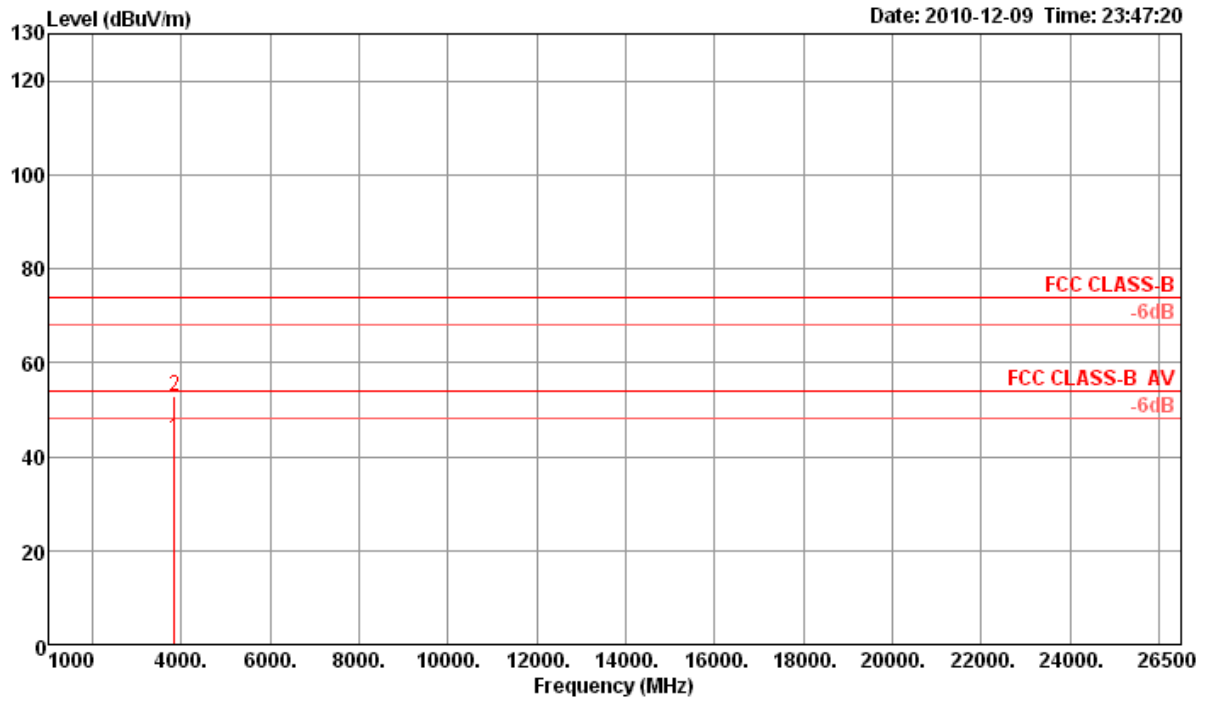


	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	cm	deg		
1 a	3846.34	43.64	54.00	-10.36	44.53	2.84	35.03	31.30	109	178	Average	VERTICAL
2 p	3847.18	53.02	74.00	-20.98	53.91	2.84	35.03	31.30	109	178	Peak	VERTICAL

<For PIFA Antenna>


Temperature	24°C	Humidity	70%
Test Engineer	Sean Ku	Configurations	WLAN + GSM1900 CH661

Horizontal

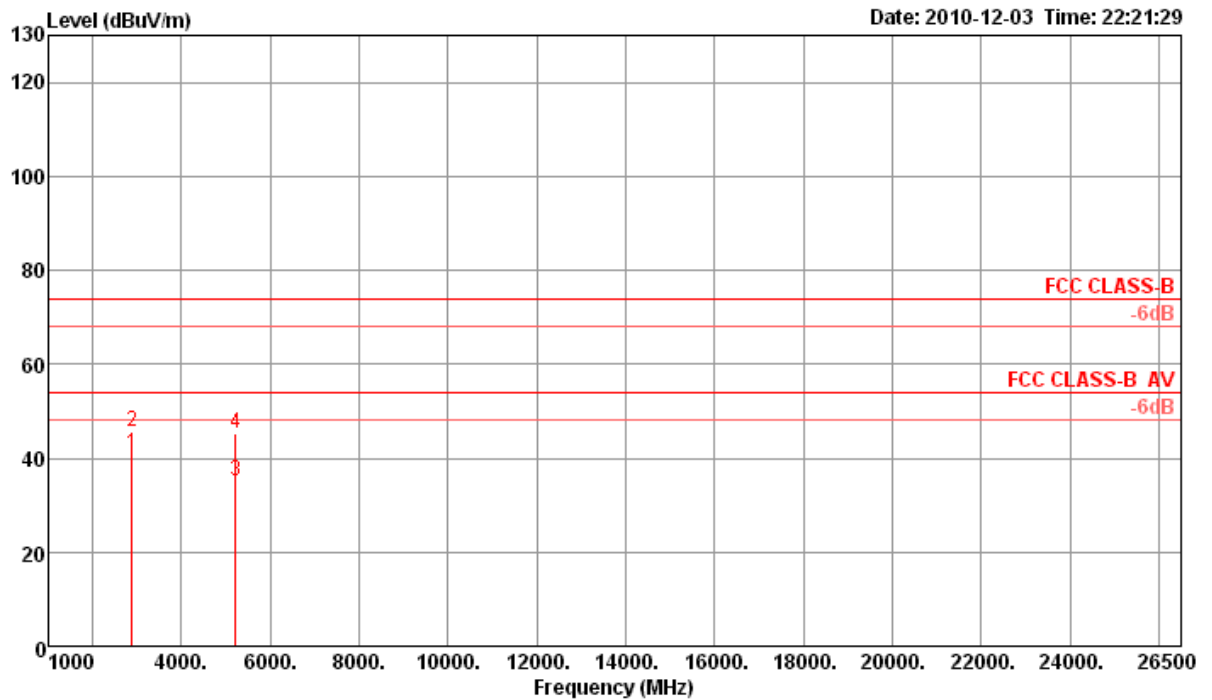

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	cm	deg		
1 a	2883.60	40.89	54.00	-13.11	44.56	2.33	34.85	28.85	100	183	Average	HORIZONTAL
2 p	2883.69	45.51	74.00	-28.49	49.18	2.33	34.85	28.85	100	183	Peak	HORIZONTAL
3	5222.44	35.24	54.00	-18.76	33.87	3.12	34.94	33.19	124	106	Average	HORIZONTAL
4	5222.52	45.22	74.00	-28.78	43.85	3.12	34.94	33.19	124	106	Peak	HORIZONTAL

Vertical

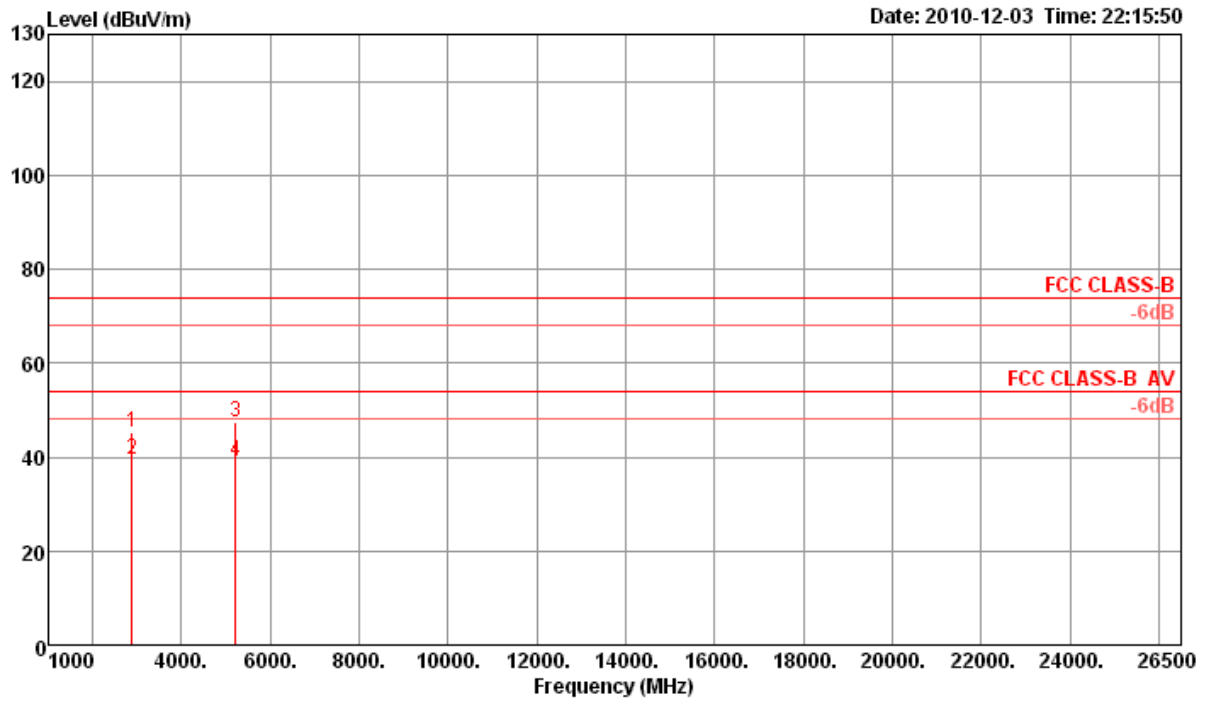

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	A/Pos	T/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	cm	deg		
1	2883.57	45.28	74.00	-28.72	48.95	2.33	34.85	28.85	100	198	Peak	VERTICAL
2	2883.60	39.60	54.00	-14.40	43.27	2.33	34.85	28.85	100	198	Average	VERTICAL
3	5222.41	47.48	74.00	-26.52	46.11	3.12	34.94	33.19	100	124	Peak	VERTICAL
4	5222.43	39.24	54.00	-14.76	37.87	3.12	34.94	33.19	100	124	Average	VERTICAL