

EMC TEST REPORT

Report No. :TS08050084-EME

Model No. :WUG2K7C

Issued Date :May 26, 2008


Applicant **AboCom System,Inc**
77, Yu-Yih Rd., Chu-Nan Chen, Miao-Lih Hsuan, Taiwan

Test Method/ **FCC Part 15 Subpart C Section §15.205、 §15.207、 §**
Standard: **15.209、 §15.247 and ANSI C63.4/2003.**

Test By **Intertek Testing Services Taiwan Ltd.**
No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,
Shiang-Shan District, Hsinchu City, Taiwan


This test report consists of 61 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result(s) in this report only applies to the tested sample(s).

Report Engineer




Sammi Liu

Project Engineer

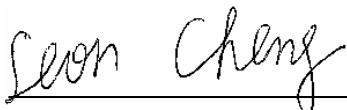

Leon Cheng

Reviewed By



Jimmie Liu

Table of Contents

| | |
|--|----|
| Summary of Tests | 3 |
| 1. General information | 4 |
| 1.1 Identification of the EUT | 4 |
| 1.2 Additional information about the EUT | 5 |
| 1.3 Antenna description | 5 |
| 1.4 Peripherals equipment | 5 |
| 2. Test specifications | 6 |
| 2.1 Test standard | 6 |
| 2.2 Operation mode | 6 |
| 2.3 Test equipment | 7 |
| 3. Minimum 6dB Bandwidth test | 8 |
| 3.1 Operating environment | 8 |
| 3.2 Test setup & procedure | 8 |
| 3.3 Measured data of Minimum 6dB Bandwidth test results | 8 |
| 4. Maximum Output Power test | 15 |
| 4.1 Operating environment | 15 |
| 4.2 Test setup & procedure | 15 |
| 4.3 Measured data of Maximum Output Power test results | 15 |
| 5. RF Antenna Conducted Spurious test | 16 |
| 5.1 Operating environment | 16 |
| 5.2 Test setup & procedure | 16 |
| 5.3 Measured data of the highest RF Antenna Conducted Spurious test result | 16 |
| 6. Radiated Emission test | 35 |
| 6.1 Operating environment | 35 |
| 6.2 Test setup & procedure | 35 |
| 6.3 Emission limits | 36 |
| 6.4 Radiated spurious emission test data | 36 |
| 7. Power Spectrum Density test | 41 |
| 7.1 Operating environment | 41 |
| 7.2 Test setup & procedure | 41 |
| 7.3 Measured data of Power Spectrum Density test results | 41 |
| 8. Emission on the band edge | 48 |
| 8.1 Operating environment | 48 |
| 8.2 Test setup & procedure | 48 |
| 8.3 Test Result | 49 |
| 9. Power Line Conducted Emission test §FCC 15.207 | 58 |
| 9.1 Operating environment | 58 |
| 9.2 Test setup & procedure | 58 |
| 9.3 Emission limit | 59 |
| 9.4 Uncertainty of Conducted Emission | 59 |
| 9.5 Power Line Conducted Emission test data | 60 |



Summary of Tests

WLAN 802.11b/g USB2.0 Mini Module -Model: WUG2K7C **FCC ID: MQ4WUG2K7C**

| Test | Reference | Results |
|---------------------------------------|----------------|---------|
| Minimum 6dB Bandwidth test | 15.247(a)(2) | Pass |
| Maximum Output Power test | 15.247(b) | Pass |
| RF Antenna Conducted Spurious test | 15.247(d) | Pass |
| Radiated Spurious Emission test | 15.205, 15.209 | Pass |
| Power Spectrum Density test | 15.247(e) | Pass |
| Emission on the Band Edge test | 15.247(d) | Pass |
| AC Power Line Conducted Emission test | 15.207 | Pass |

1. General information

1.1 Identification of the EUT

| | |
|---------------------------|--|
| Applicant | : AboCom System,Inc |
| Product | : WLAN 802.11b/g USB2.0 Mini Module |
| Model No. | : WUG2K7C |
| FCC ID. | : MQ4WUG2K7C |
| Frequency Range | : 2412MHz ~ 2462MHz |
| Channel Number | : 11 channels |
| Frequency of Each Channel | : 2412MHz, 2417MHz, 2422MHz, 2427MHz, 2432MHz, 2437MHz, 2442MHz, 2447MHz, 2452MHz, 2457MHz, 2462MHz |
| Type of Modulation | : DSSS, OFDM |
| Rated Power | : DC 5V from Notebook PC |
| Power Cord | : N/A |
| Sample Received | : May 16, 2008 |
| Test Date(s) | : May 19, 2008 ~ May 20, 2008 |
| Note 1: | : This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. |
| Note 2: | : When determining the test conclusion, the Measurement Uncertainty of test has been considered. |

A FCC DoC report has been generated for the client.

1.2 Additional information about the EUT

The EUT is a WLAN 802.11b/g USB2.0 Mini Module, and was defined as information technology equipment.

For more detail features, please refer to User's manual as file name "Installation guide.pdf"

1.3 Antenna description

The antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector.

Antenna Gain : 2dBi max

Antenna Type : Patch antenna

Connector Type : I-PEX

1.4 Peripherals equipment

| Peripherals | Manufacturer | Product No. | Serial No. | FCC ID |
|-------------|--------------|---------------|-----------------|------------------|
| Notebook PC | DELL | Latitude D610 | FXWZK1S | FCC DoC Approved |
| Modem | Dynalink | V1456VQE | 00V230A00051494 | FCC DoC Approved |
| Printer | HP | DeskJet 400 | SG5CQ170C0 | B94C2642X |



2. Test specifications

2.1 Test standard

The EUT was performed according to the procedures in FCC Part 15 Subpart C Section § 15.205、§15.207、§15.209、§15.247、KDB558074 and ANSI C63.4/2003.

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of this frequency band were all meet limit requirement, thus we evaluate the EUT pass the specified test.

2.2 Operation mode

The EUT was supplied with 5Vdc from Notebook PC and it was running in operating mode.

Plug the EUT into Notebook PC via USB interface, then turn on the Notebook PC power and run the test program “QA” under windows OS, which provide by manufacturer.

With individual verifying, the maximum output power was found at 1Mbps data rate for 802.11b mode and 6Mbps data rate for 802.11g mode. The final tests were executed under these conditions and recorded in this report individually.

Test Mode: 802.11b mode

| Ch6 | PK |
|---------|----------|
| 1Mbps | 18.12dBm |
| 2Mbps | 18.08dBm |
| 5.5Mbps | 18.02dBm |
| 11Mbps | 17.97dBm |

Test Mode: 802.11g mode

| Ch6 | PK |
|--------|----------|
| 6Mbps | 22.54dBm |
| 9Mbps | 22.40dBm |
| 12Mbps | 22.38dBm |
| 18Mbps | 22.36dBm |
| 24Mbps | 22.30dBm |
| 36Mbps | 22.25dBm |
| 48Mbps | 22.18dBm |
| 54Mbps | 22.11dBm |

2.3 Test equipment

| Equipment | Brand | Frequency range | Model No. |
|-----------------------------------|-----------------|-----------------|------------------|
| EMI Test Receiver | Rohde & Schwarz | 9kHz~2.75GHz | ESCS 30 |
| Spectrum Analyzer | Rohde & Schwarz | 9kHz~30GHz | FSP 30 |
| Spectrum Analyzer | Rohde & Schwarz | 20Hz~40GHz | FSEK 30 |
| Horn Antenna | SCHWARZBECK | 1GHz~18GHz | BBHA 9120 D |
| Horn Antenna | SCHWARZBECK | 14GHz~40GHz | BBHA 9170 |
| Bilog Antenna | SCHWARZBECK | 25MHz~1.7GHz | VULB 9168 |
| Pre-Amplifier | MITEQ | 100MHz~26.5GHz | 919981 |
| Pre-Amplifier | MITEQ | 26GHz~40GHz | 828825 |
| Wideband Peak Power Meter/ Sensor | Anritsu | 100MHz~18GHz | ML2487A/ MA2491A |
| Controller | HDGmbH | N/A | HD 100 |
| Antenna Tower | HDGmbH | N/A | MA 240 |
| Turn Table | HDGmbH | N/A | DS 420S |
| LISN | Rohde & Schwarz | 9KHz~30MHz | ESH3-Z5 |

Note: The above equipments are within the valid calibration period.

3. Minimum 6dB Bandwidth test

3.1 Operating environment

Temperature: 23
Relative Humidity: 54 %
Atmospheric Pressure: 1023 hPa

3.2 Test setup & procedure

The test procedure was according to FCC measurement guideline KDB558074.
The minimum 6dB bandwidth per FCC §15.247(a)(2) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN>>RBW. The test was performed at 3 channels (lowest, middle and highest channel). The minimum 6-dB modulation bandwidth is in the following Table.

3.3 Measured data of Minimum 6dB Bandwidth test results

Test Mode: 802.11b mode


| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit |
|--------------|-----------------|-----------------|----------|
| 1 (lowest) | 2412 | 12.64 | > 500kHz |
| 6 (middle) | 2437 | 12.72 | > 500kHz |
| 11 (highest) | 2462 | 12.80 | > 500kHz |

Test Mode: 802.11g mode

| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit |
|--------------|-----------------|-----------------|----------|
| 1 (lowest) | 2412 | 16.64 | > 500kHz |
| 6 (middle) | 2437 | 16.72 | > 500kHz |
| 11 (highest) | 2462 | 16.72 | > 500kHz |


Please see the plot below.

Test Mode: 802.11b mode (ch1)

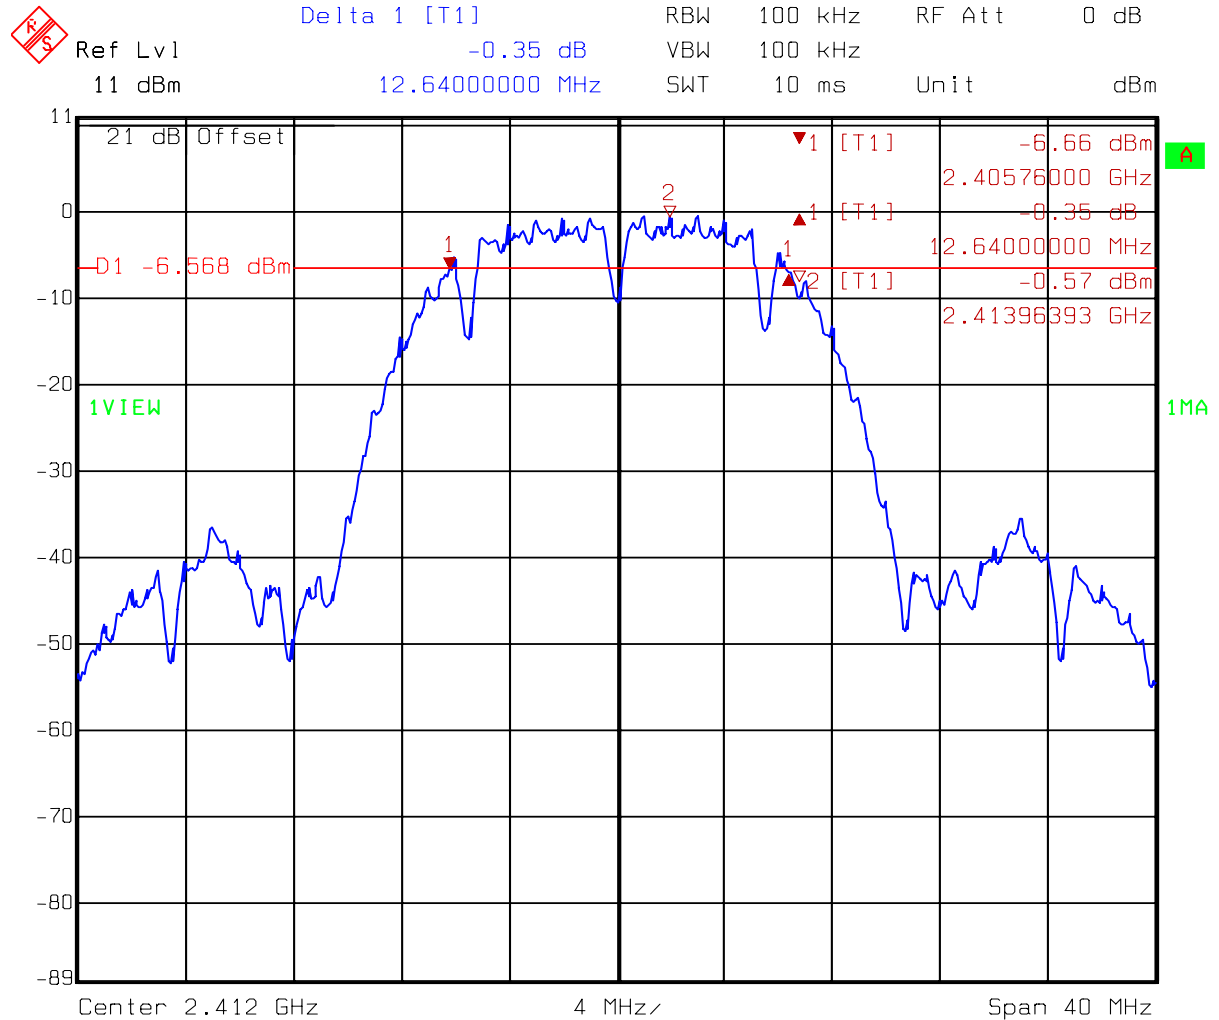


Title: 6dB Band-Width
Comment A: CH 1 at 802.11b mode
Date: 20.MAY 2008 09:12:08

Test Mode: 802.11b mode (ch6)

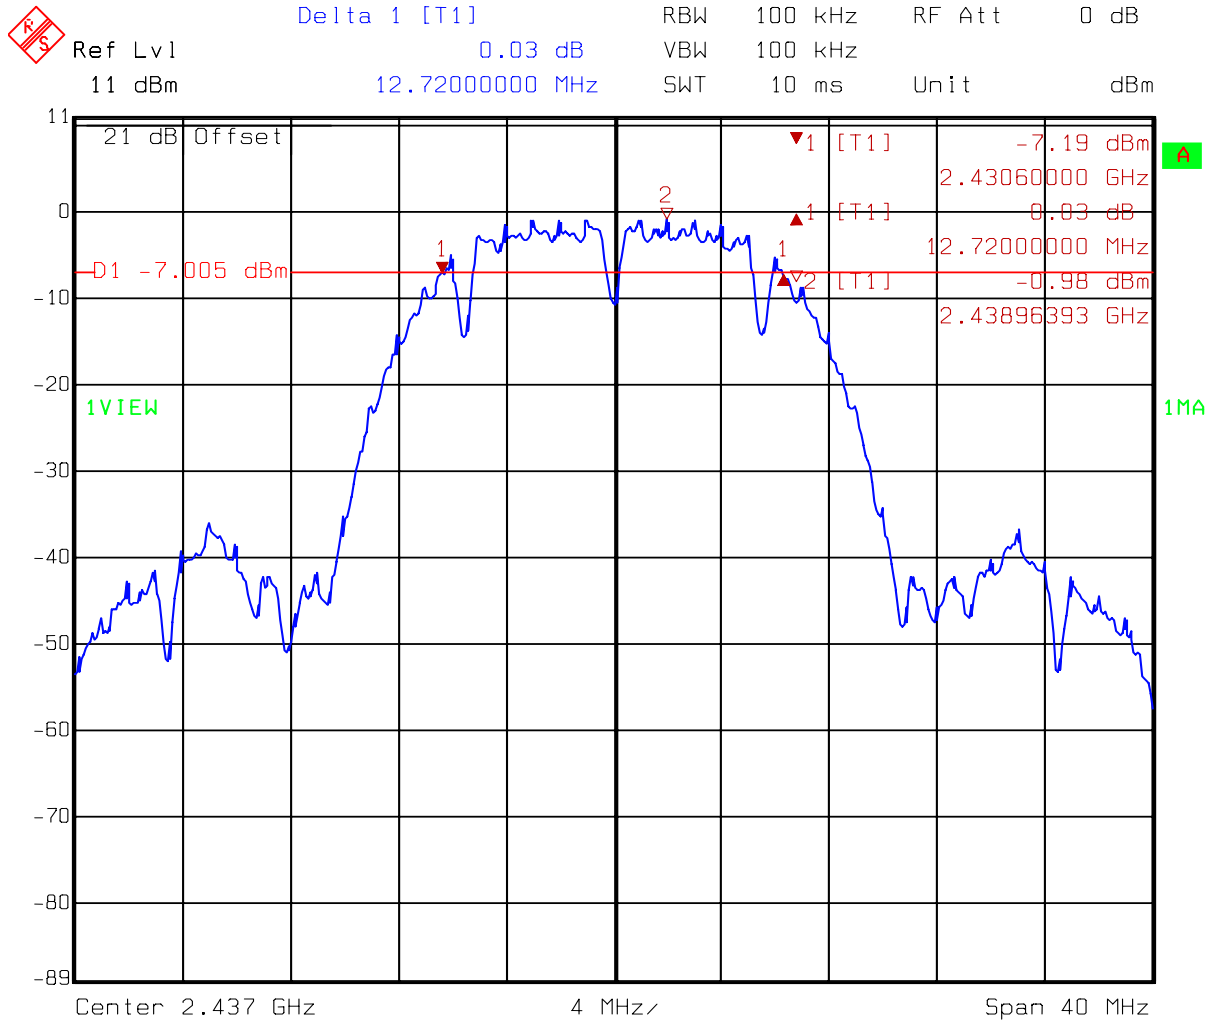


Title: 6dB Band-Width
Comment A: CH 6 at 802.11b mode
Date: 20.MAY 2008 09:17:18

Test Mode: 802.11b mode (ch11)

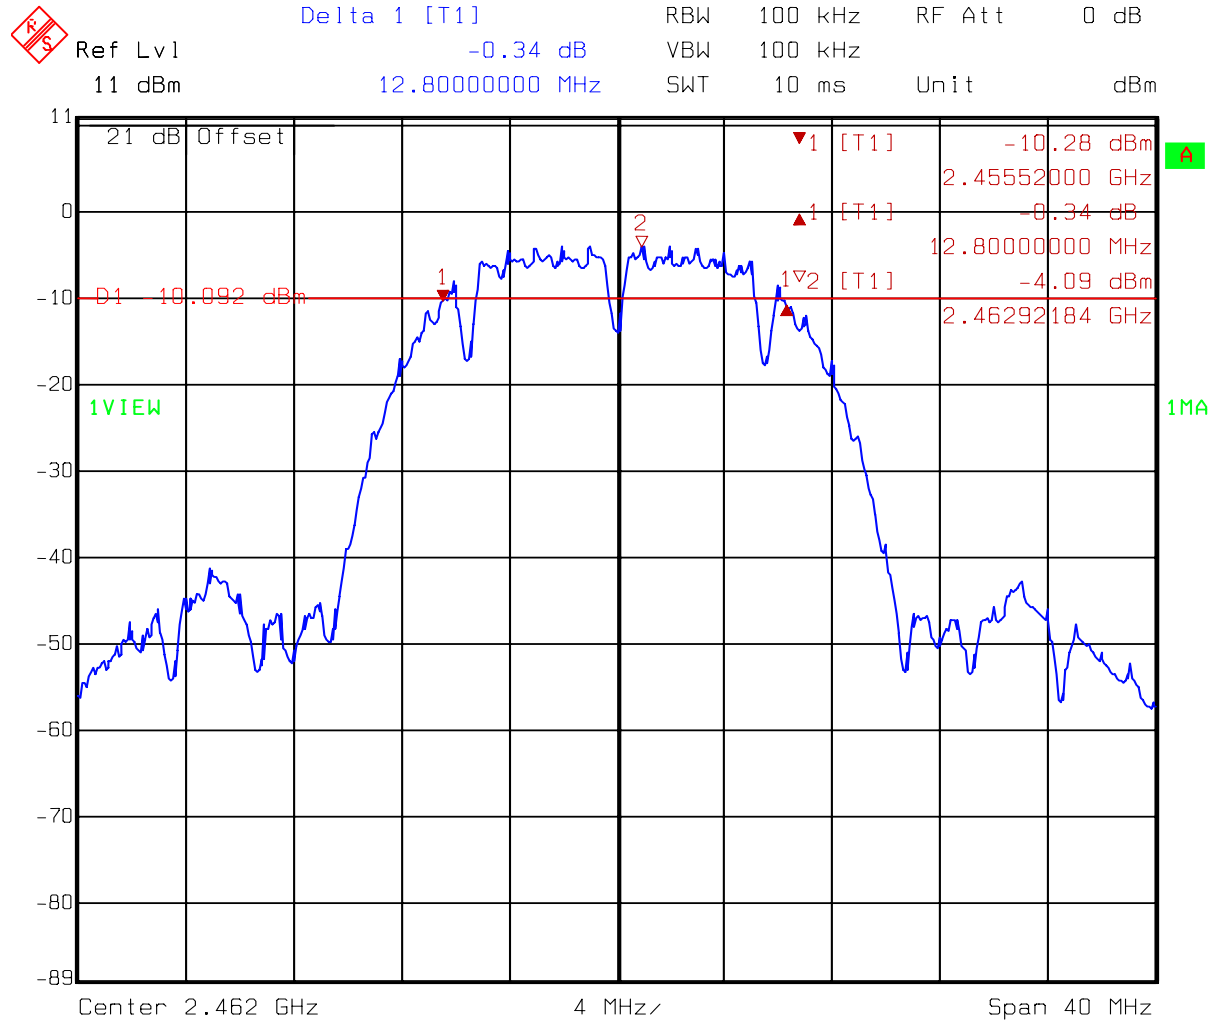


Title: 6dB Band-Width
Comment A: CH 11 at 802.11b mode
Date: 20.MAY 2008 09:20:35

Test Mode: 802.11g mode (ch1)

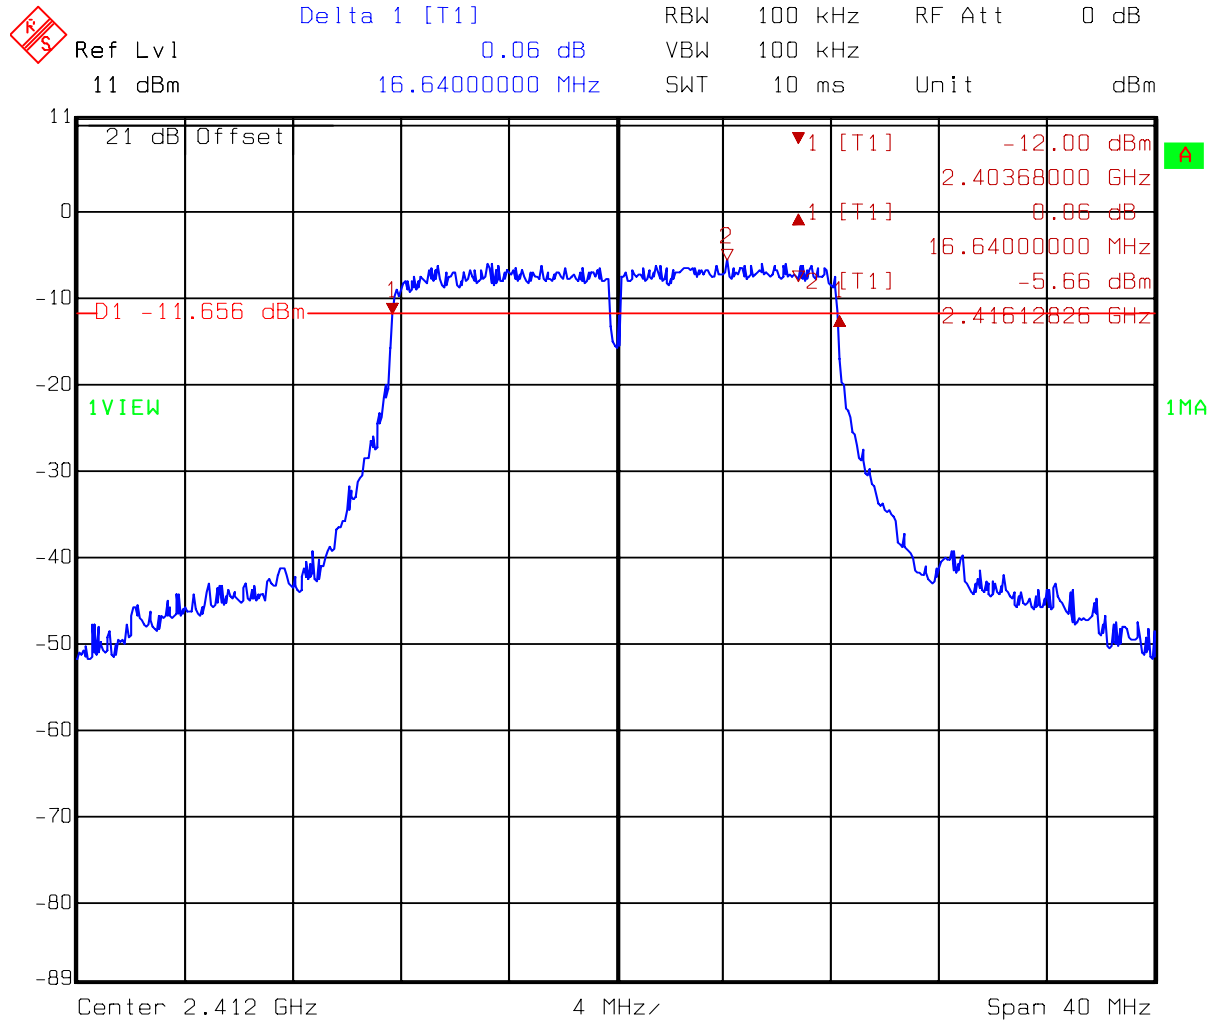


Title: 6dB Band-Width
Comment A: CH 1 at 802.11g mode
Date: 19.MAY 2008 11:07:09

Test Mode: 802.11g mode (ch6)

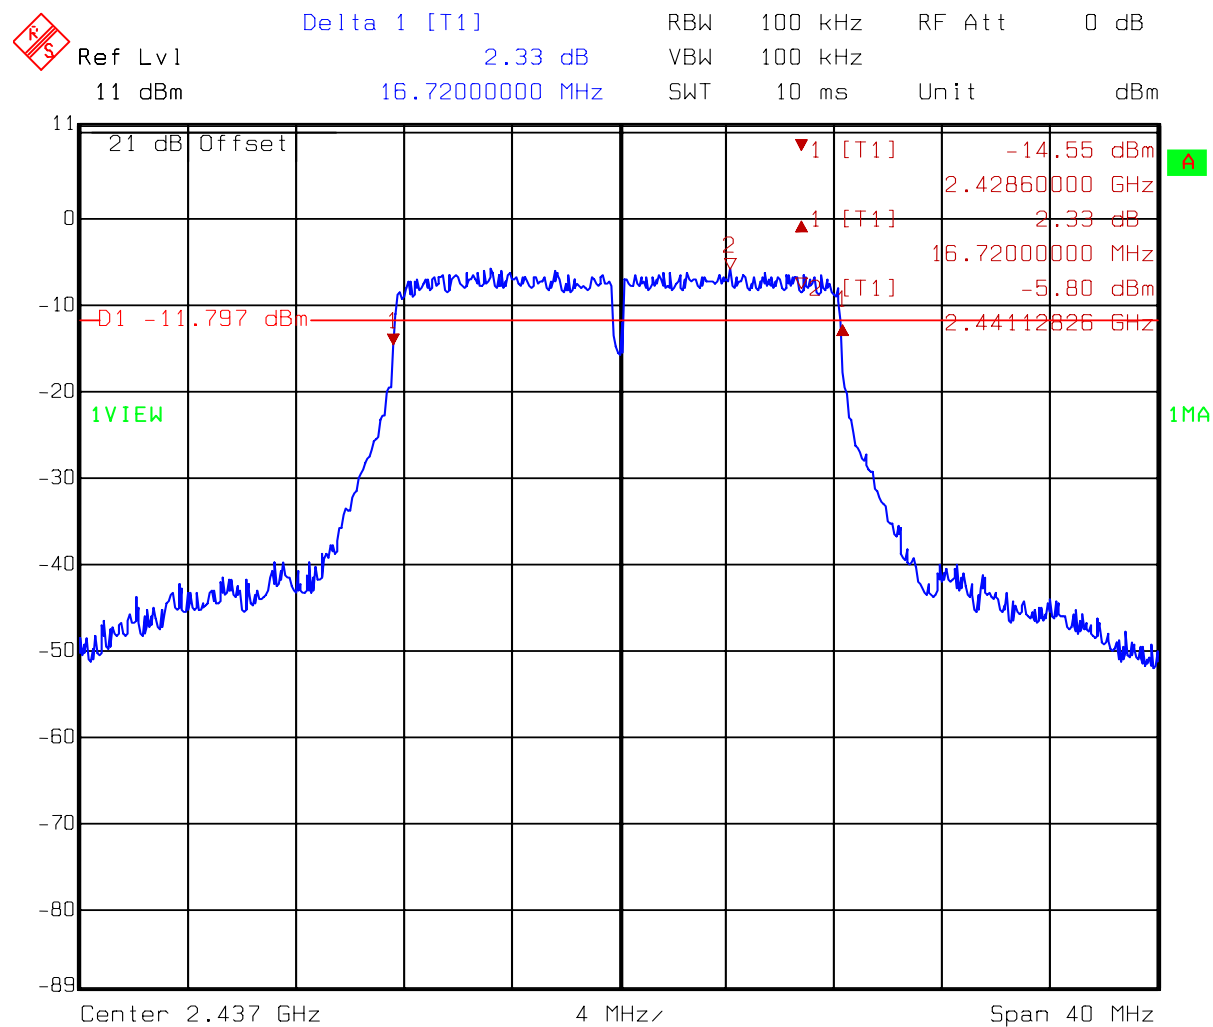

Title: 6dB Band-Width
Comment A: CH 6 at 802.11g mode
Date: 19.MAY 2008 11:10:25

Test Mode: 802.11g mode (ch11)

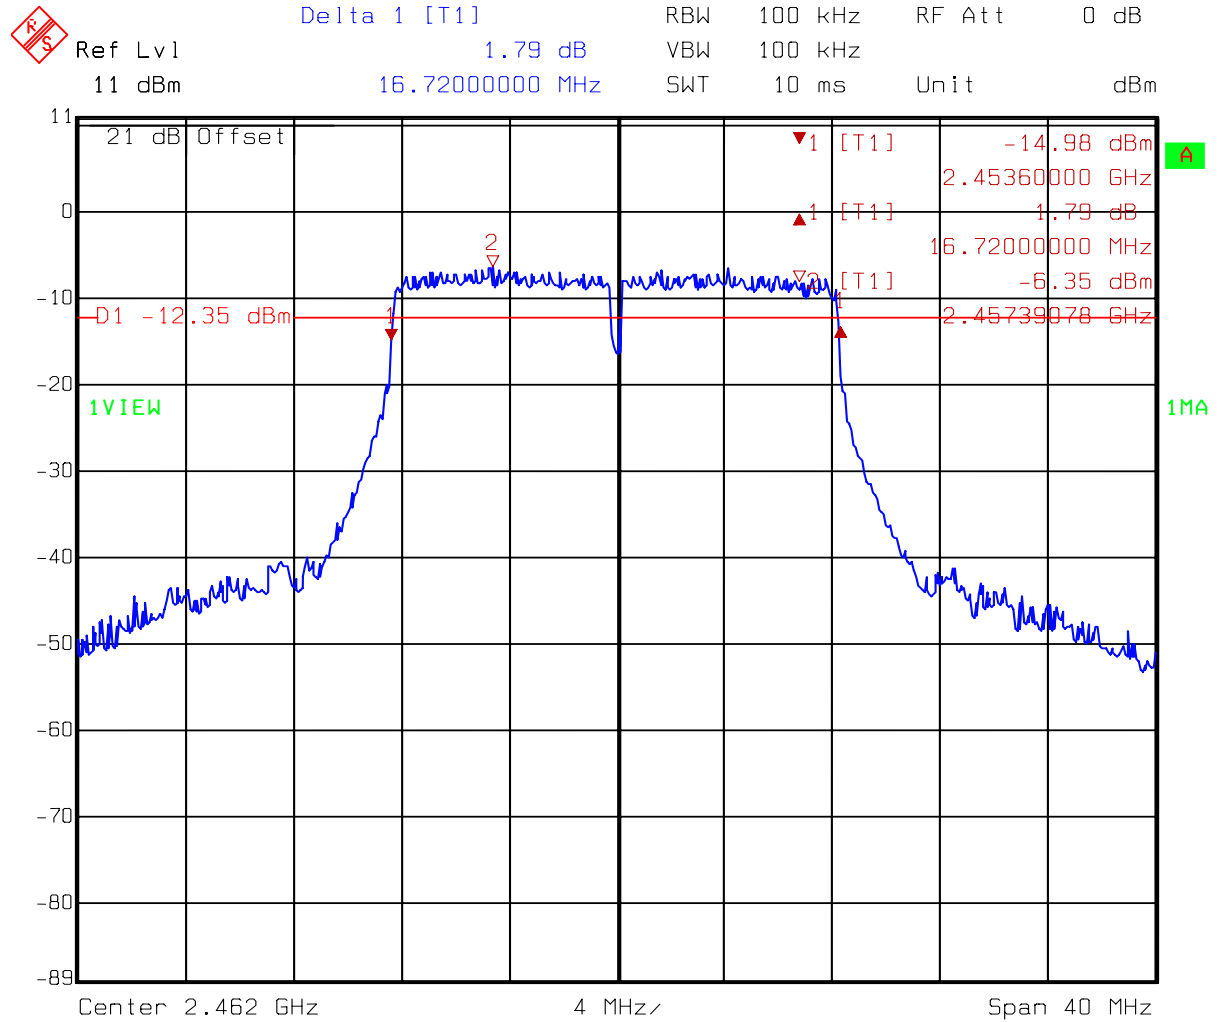

Title: 6dB Band-Width
Comment A: CH 11 at 802.11g mode
Date: 19.MAY 2008 11:13:24

4. Maximum Output Power test

4.1 Operating environment

Temperature: 23
Relative Humidity: 54 %
Atmospheric Pressure: 1023 hPa

4.2 Test setup & procedure

The test procedure was according to FCC measurement guideline KDB558074.

The power output per FCC §15.247(b) was measured on the EUT using a 50 ohm SMA cable connected to peak power meter via power sensor. Power was read directly and cable (3m length) loss correction (1dB) was added to the reading to obtain power at the EUT antenna terminals. The test was performed at 3 channels (lowest, middle and highest channel).

4.3 Measured data of Maximum Output Power test results

Test Mode: 802.11b mode

| Channel | Freq. (MHz) | C.L. (dB) | Reading (dBm) | Conducted Peak Output Power | | Limit (W) |
|--------------|----------------|--------------|------------------|--------------------------------|-------|--------------|
| | | | | (dBm) | (mW) | |
| 1 (lowest) | 2412 | 1 | 17.32 | 18.32 | 67.92 | 1 |
| 6 (middle) | 2437 | 1 | 17.12 | 18.12 | 64.86 | 1 |
| 11 (highest) | 2462 | 1 | 14.94 | 15.94 | 39.26 | 1 |

Test Mode: 802.11g mode

| Channel | Freq. (MHz) | C.L. (dB) | Reading (dBm) | Conducted Peak Output Power | | Limit (W) |
|--------------|----------------|--------------|------------------|--------------------------------|--------|--------------|
| | | | | (dBm) | (mW) | |
| 1 (lowest) | 2412 | 1 | 20.80 | 21.80 | 151.36 | 1 |
| 6 (middle) | 2437 | 1 | 21.45 | 22.45 | 175.79 | 1 |
| 11 (highest) | 2462 | 1 | 21.30 | 22.30 | 169.82 | 1 |

Remark: Conducted Peak Output Power = Reading + C.L.



5. RF Antenna Conducted Spurious test

5.1 Operating environment

Temperature: 25
Relative Humidity: 58 %

5.2 Test setup & procedure

The test procedure was according to FCC measurement guideline KDB558074.


The measurements were performed from 30MHz to 25GHz RF antenna conducted per FCC 15.247 (d) was measured from the EUT antenna port using a 50ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 100 kHz.

Harmonics and spurious noise must be at least 20dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The table below is the results from the highest emission for each channel within the authorized band. This table was used to determine the spurious limits for each channel.

5.3 Measured data of the highest RF Antenna Conducted Spurious test result


The test results please see the plot below.

Test Mode: 802.11b mode (ch1)

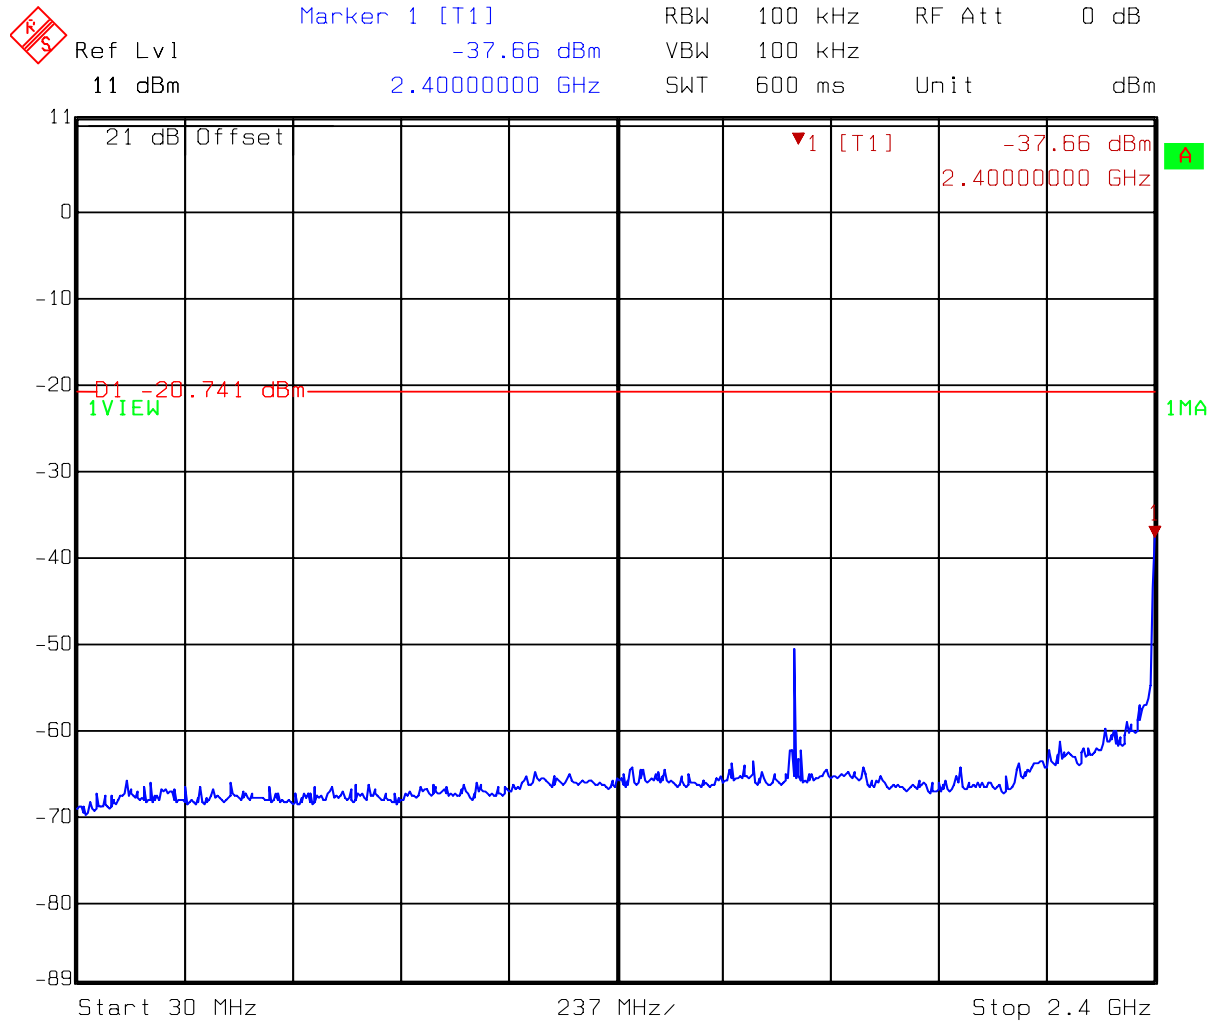

Title: Conductive-Spurious
Comment A: CH 1 at 802.11b mode 30MHz~2400MHz
Date: 20.MAY 2008 09:12:51


Test Mode: 802.11b mode (ch1)

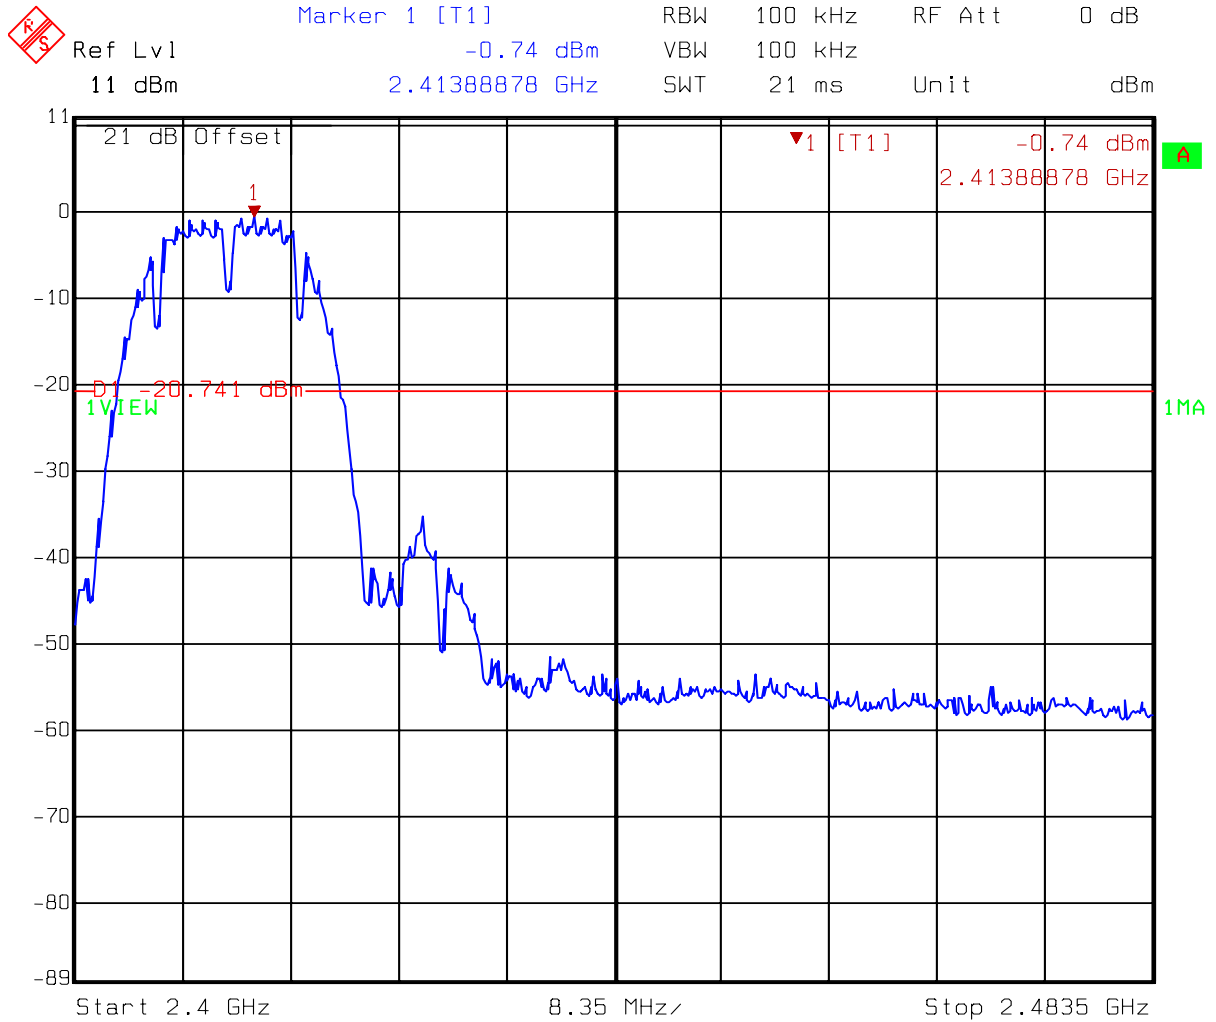

Title: Conductive-Spurious
Comment A: CH 1 at 802.11b mode 2400MHz~2483.5MHz
Date: 20.MAY 2008 09:12:29




Test Mode: 802.11b mode (ch1)

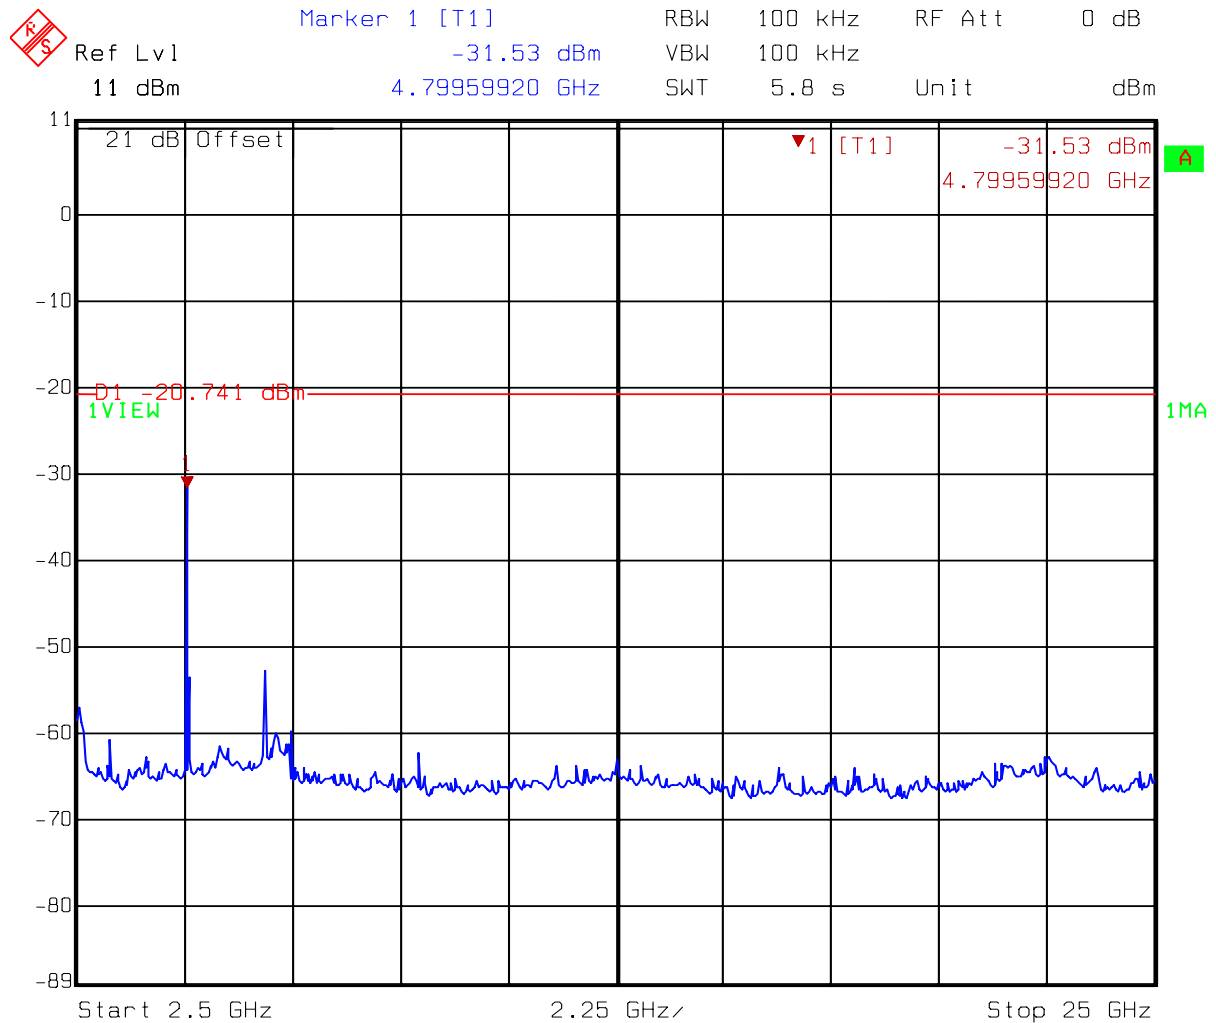

Title: Conductive-Spurious
Comment A: CH 1 at 802.11b mode 2483.5MHz~25GHz
Date: 20.MAY 2008 09:13:18




Test Mode: 802.11b mode (ch6)

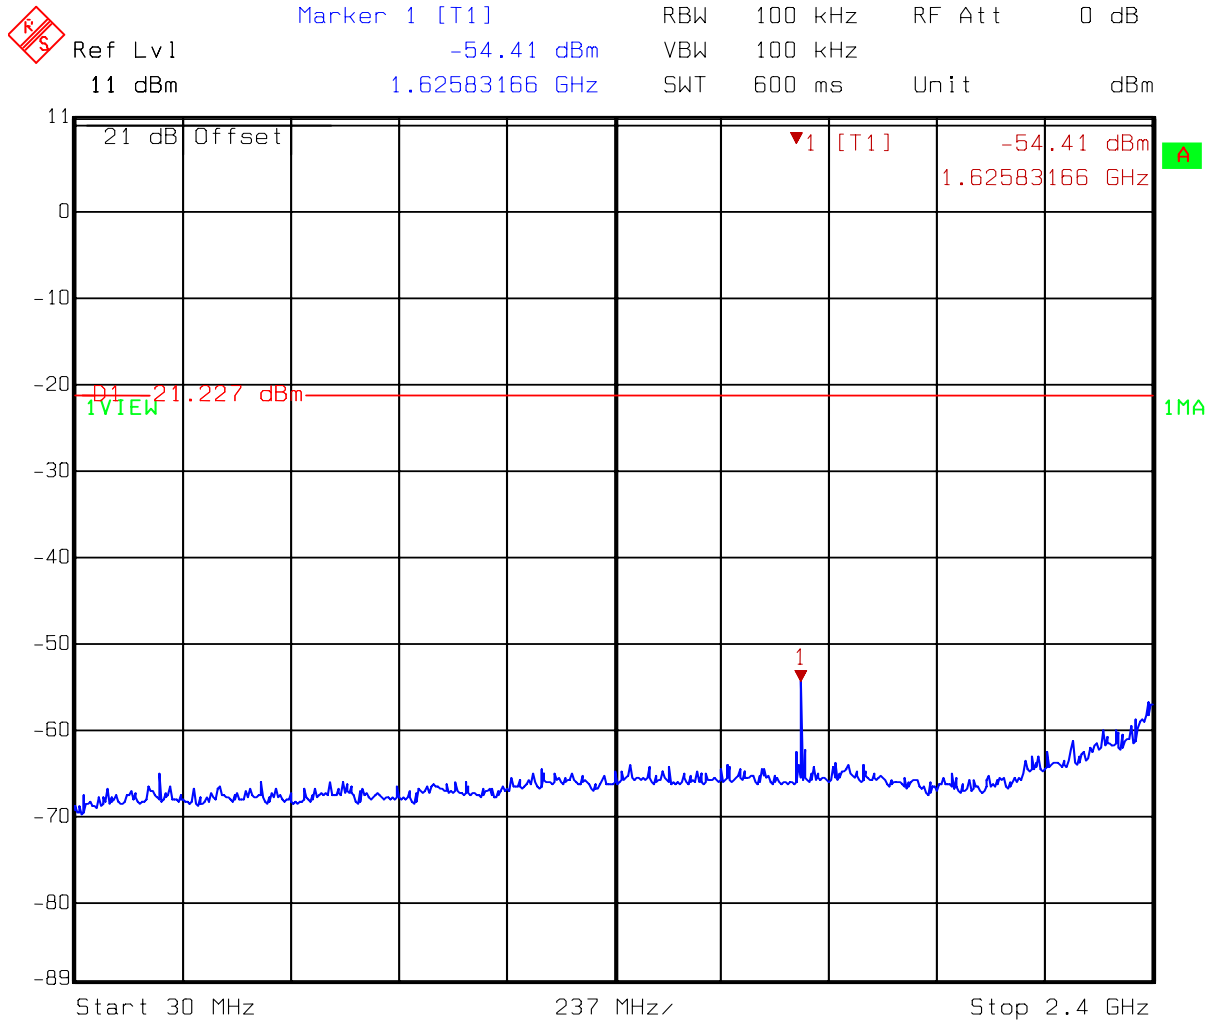

Title: Conductive-Spurious
Comment A: CH 6 at 802.11b mode 30MHz~2400MHz
Date: 20.MAY 2008 09:18:16


Test Mode: 802.11b mode (ch6)

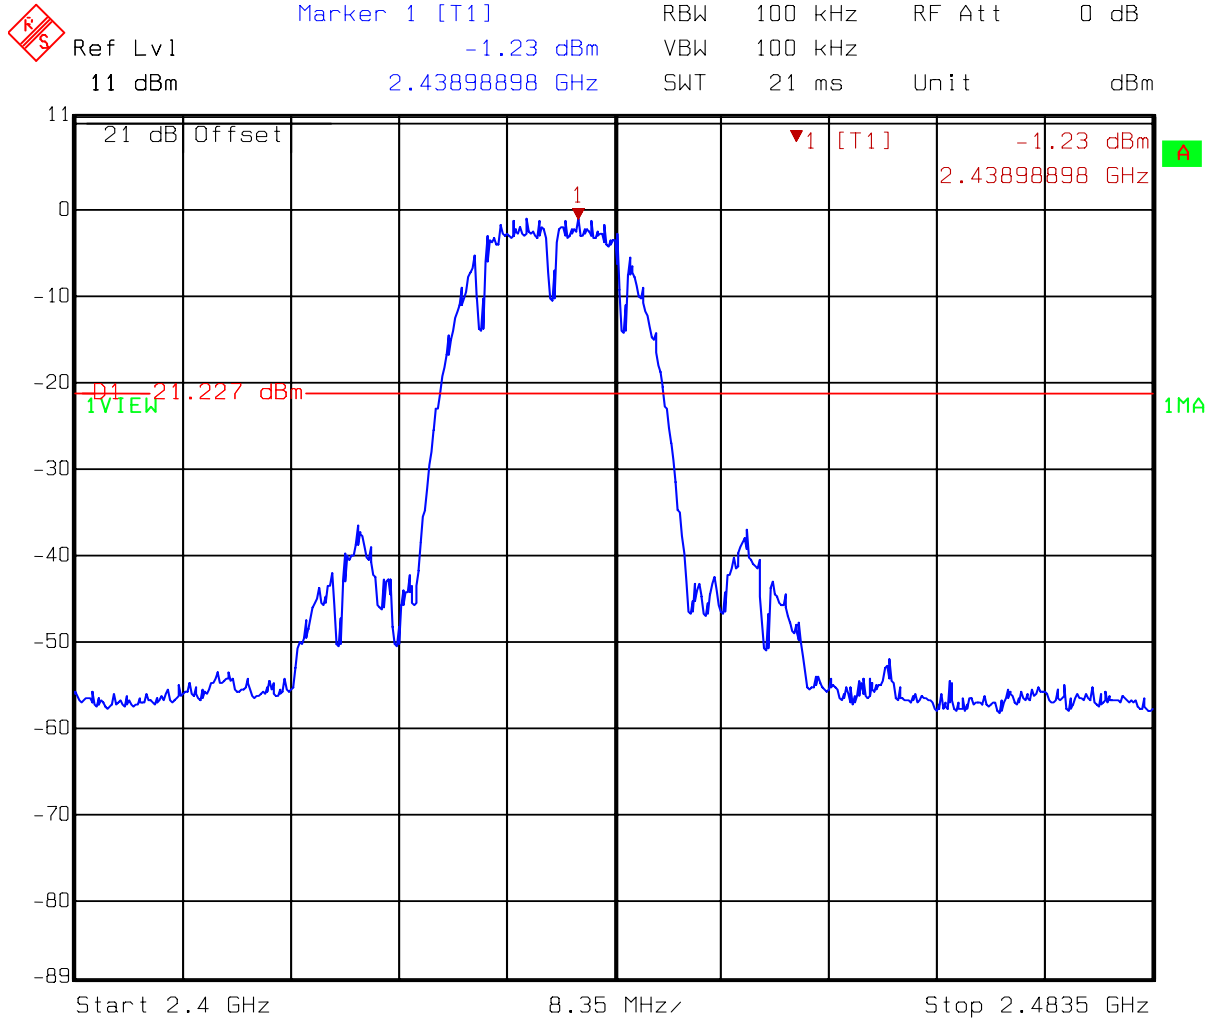

Title: Conductive-Spurious
Comment A: CH 6 at 802.11b mode 2400MHz~2483.5MHz
Date: 20.MAY 2008 09:17:54




Test Mode: 802.11b mode (ch6)

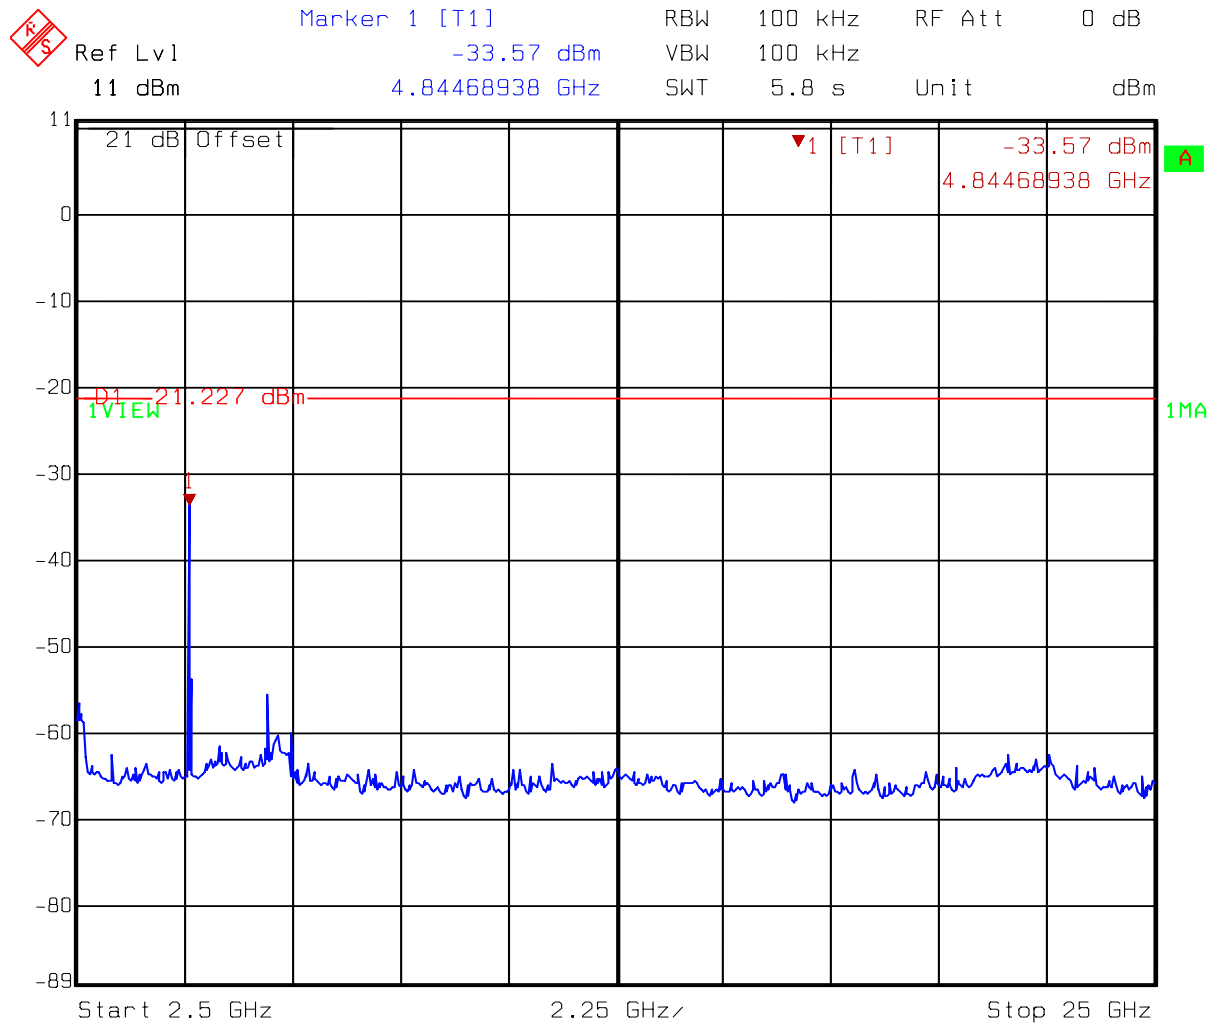

Title: Conductive-Spurious
Comment A: CH 6 at 802.11b mode 2483.5MHz~25GHz
Date: 20.MAY 2008 09:18:43




Test Mode: 802.11b mode (ch11)

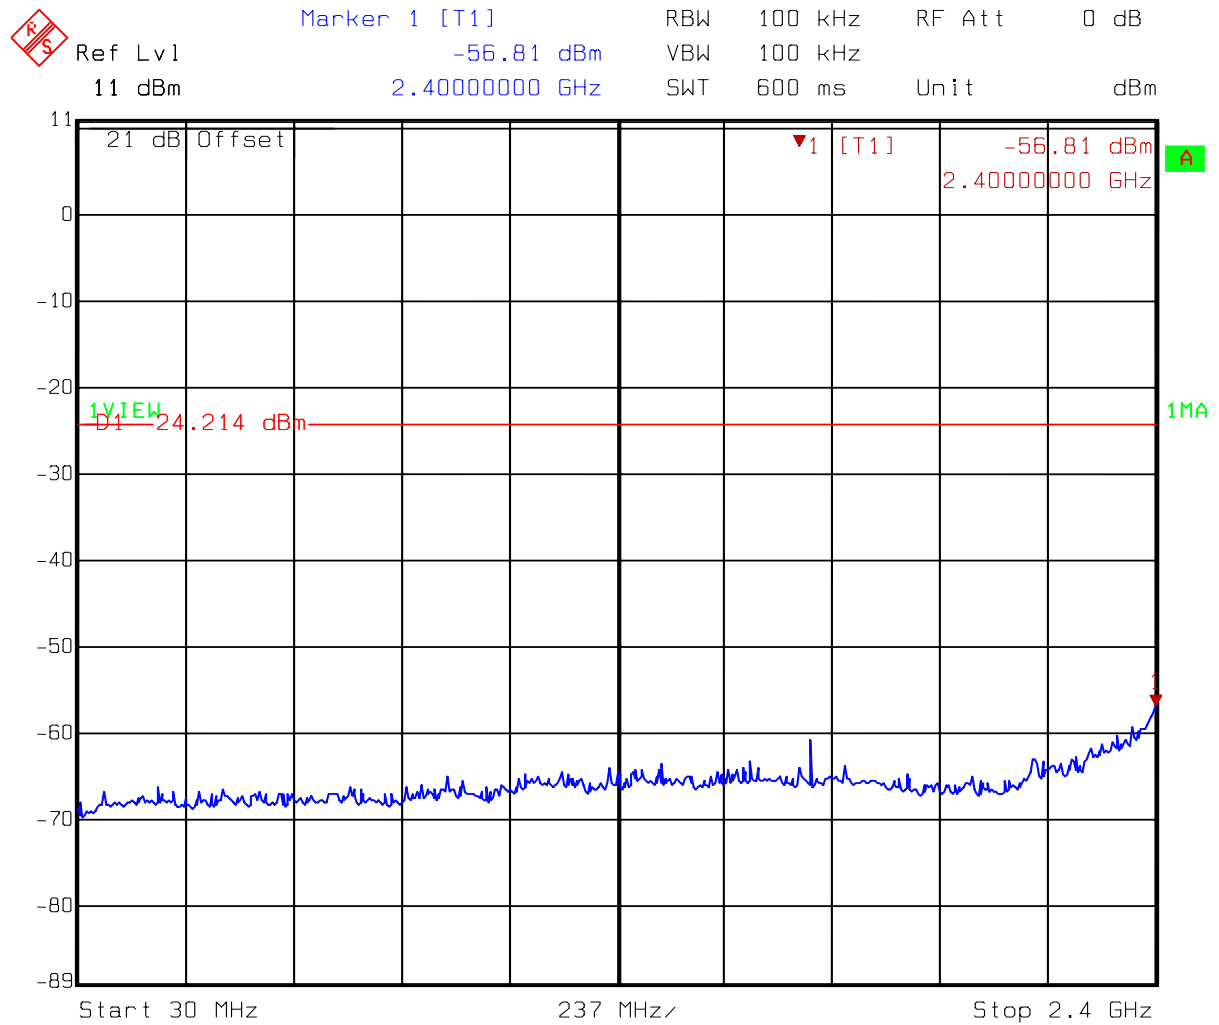

Title: Conductive-Spurious
Comment A: CH 11 at 802.11b mode 30MHz~2400MHz
Date: 20.MAY 2008 09:21:33




Test Mode: 802.11b mode (ch11)

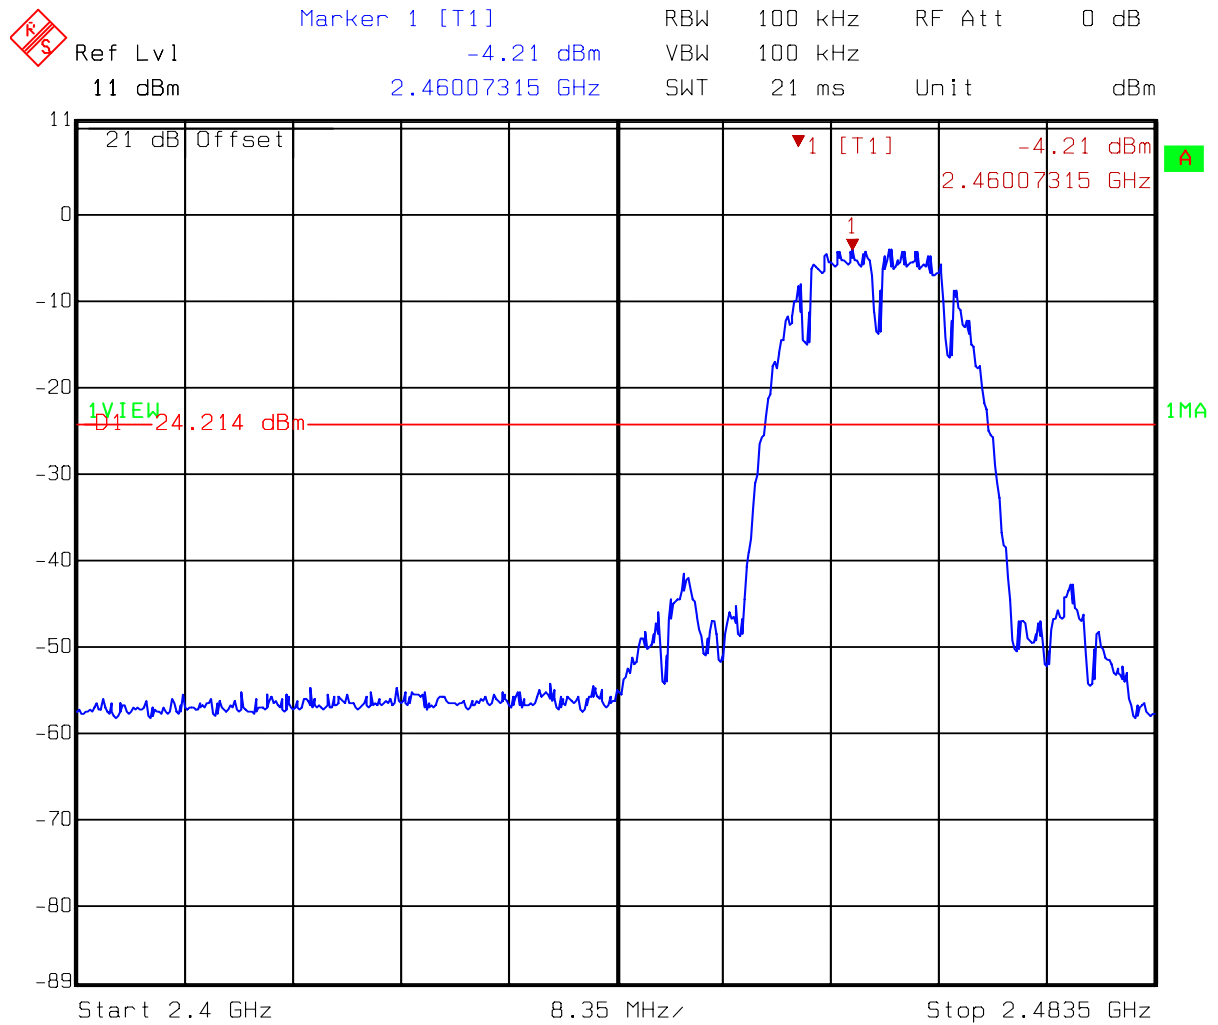

Title: Conductive-Spurious
Comment A: CH 11 at 802.11b mode 2400MHz~2483.5MHz
Date: 20.MAY 2008 09:21:11




Test Mode: 802.11b mode (ch11)

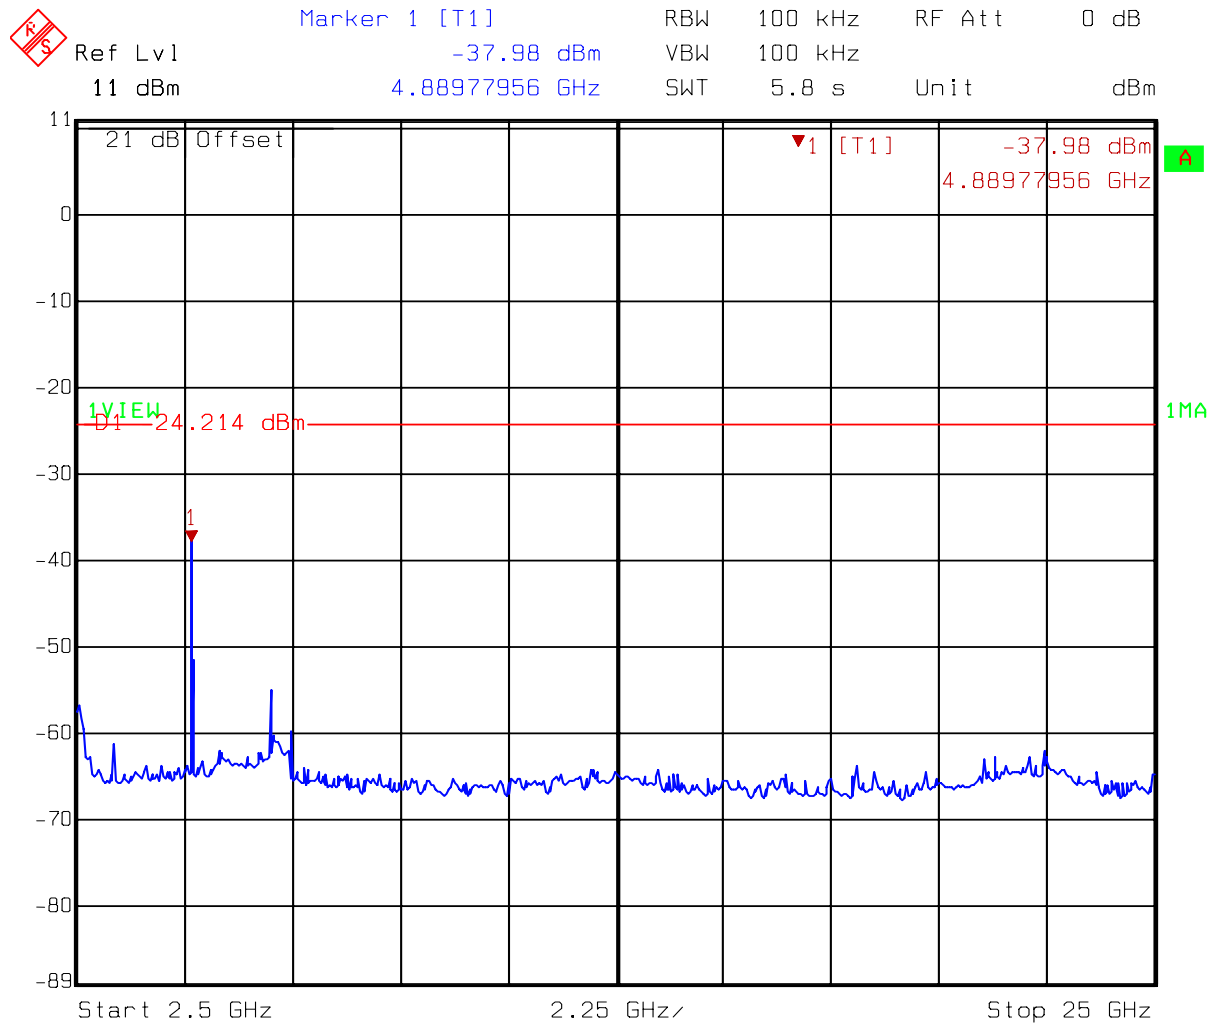


Title: Conductive-Spurious
Comment A: CH 11 at 802.11b mode 2483.5MHz~25GHz
Date: 20.MAY 2008 09:22:00

Test Mode: 802.11g mode (ch1)

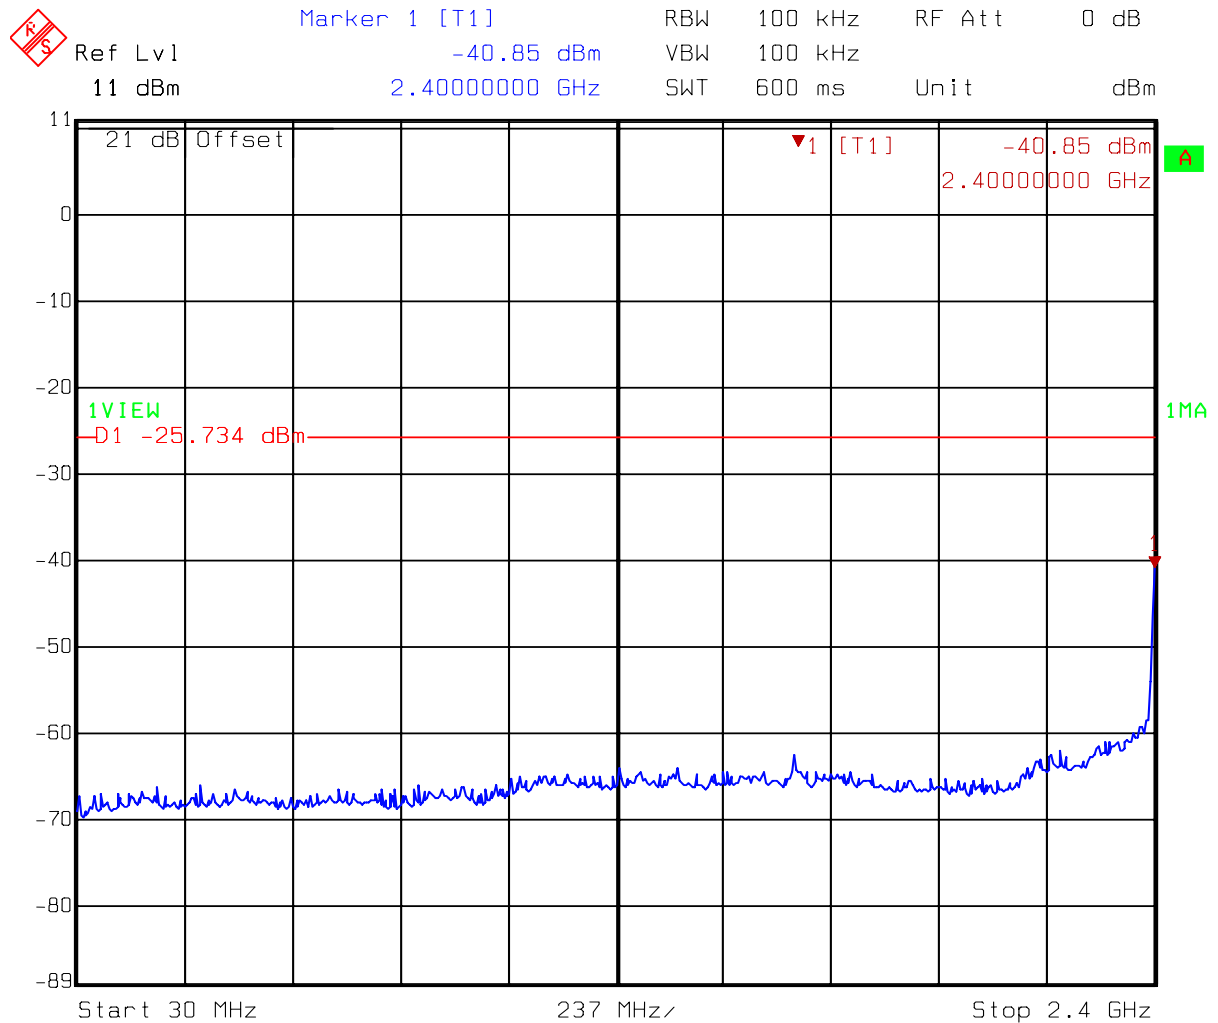

Title: Conductive-Spurious
Comment A: CH 1 at 802.11g mode 30MHz~2400MHz
Date: 19.MAY 2008 11:08:06


Test Mode: 802.11g mode (ch1)

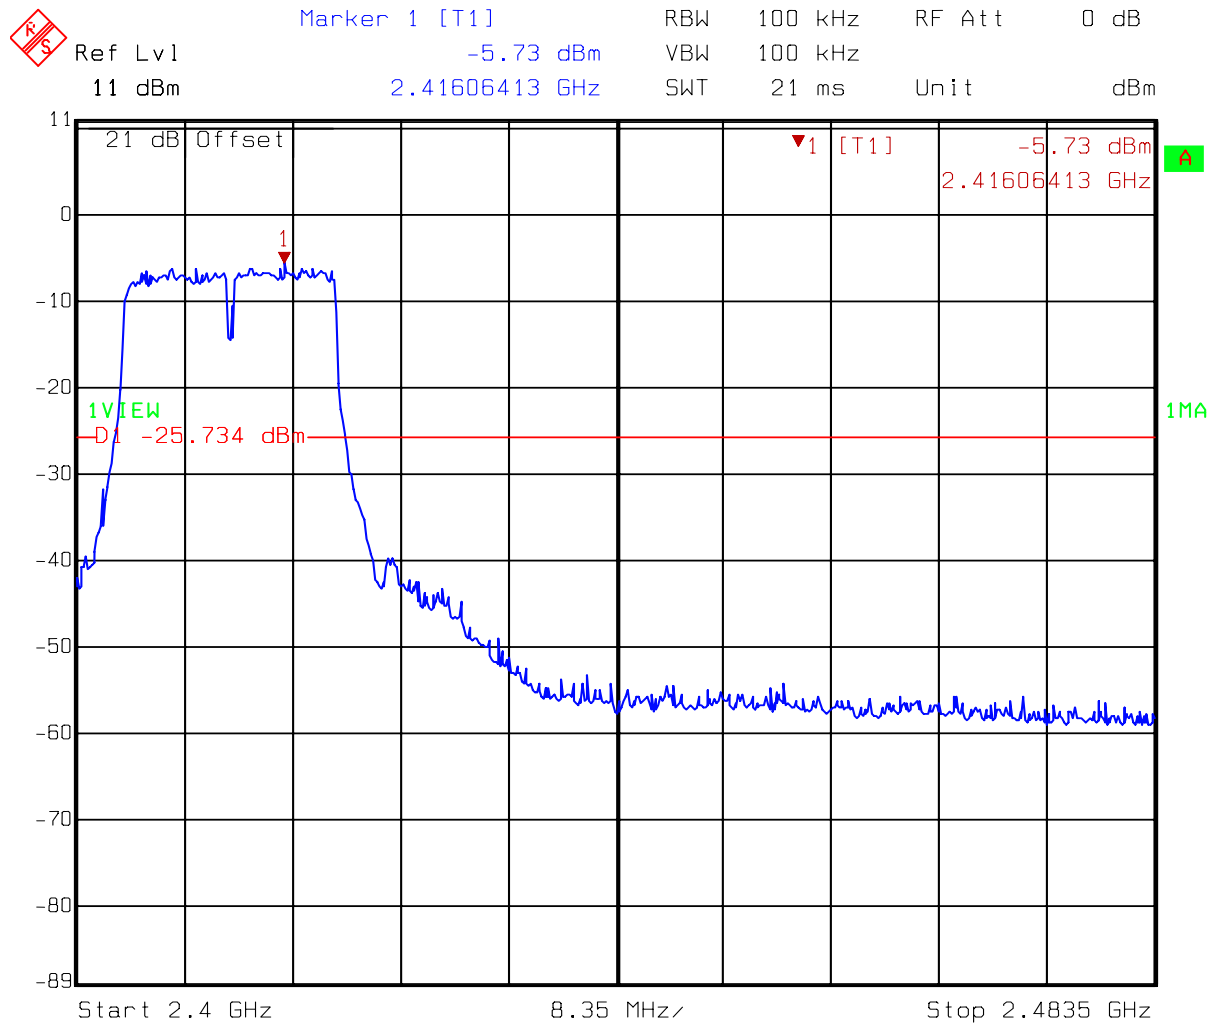

Title: Conductive-Spurious
Comment A: CH 1 at 802.11g mode 2400MHz~2483.5MHz
Date: 19.MAY 2008 11:07:45




Test Mode: 802.11g mode (ch1)

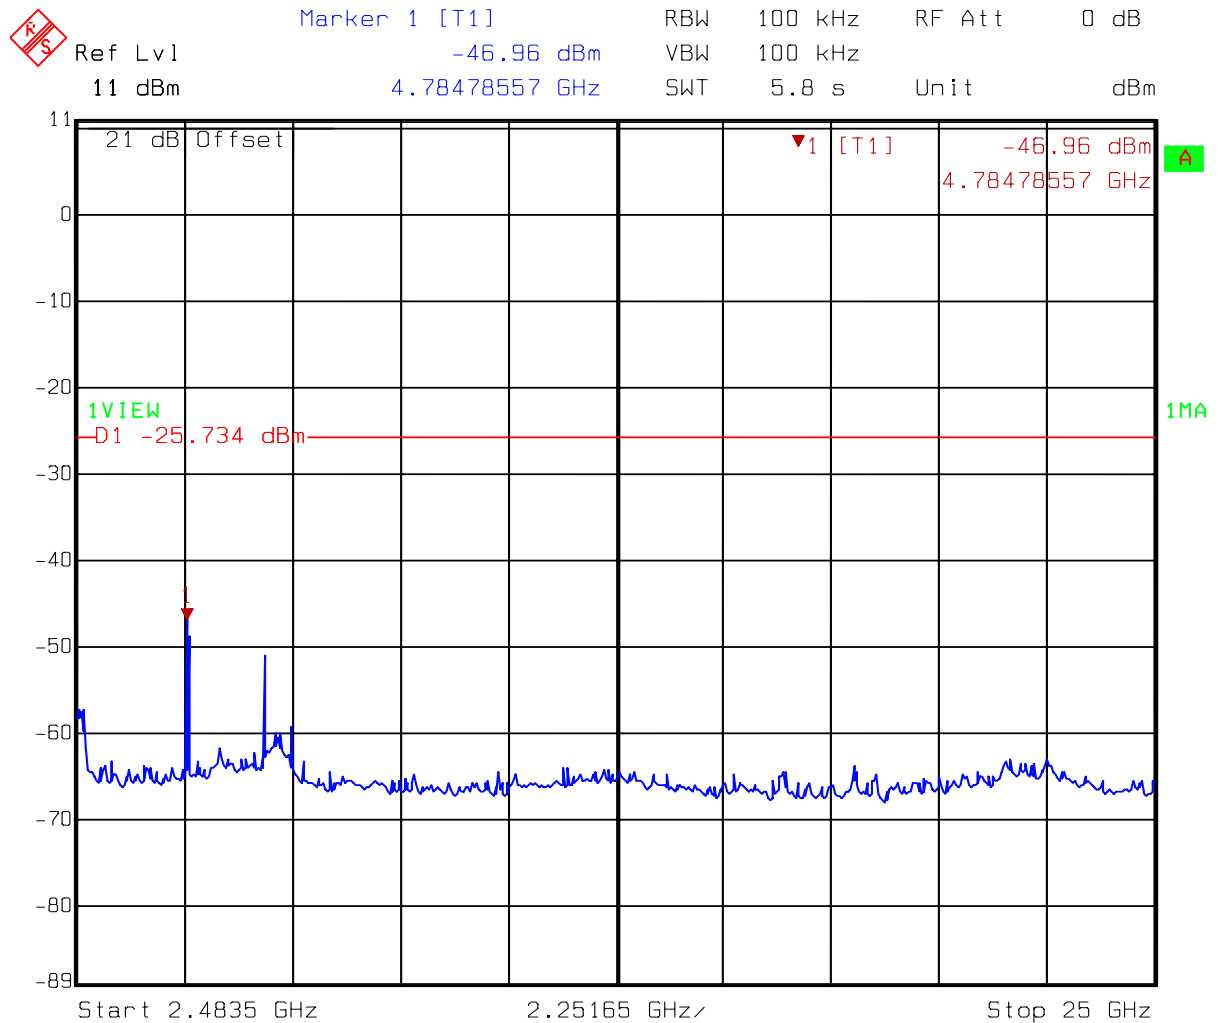

Title: Conductive-Spurious
Comment A: CH 1 at 802.11g mode 2483.5MHz~25000MHz
Date: 19.MAY 2008 11:08:33




Test Mode: 802.11g mode (ch6)

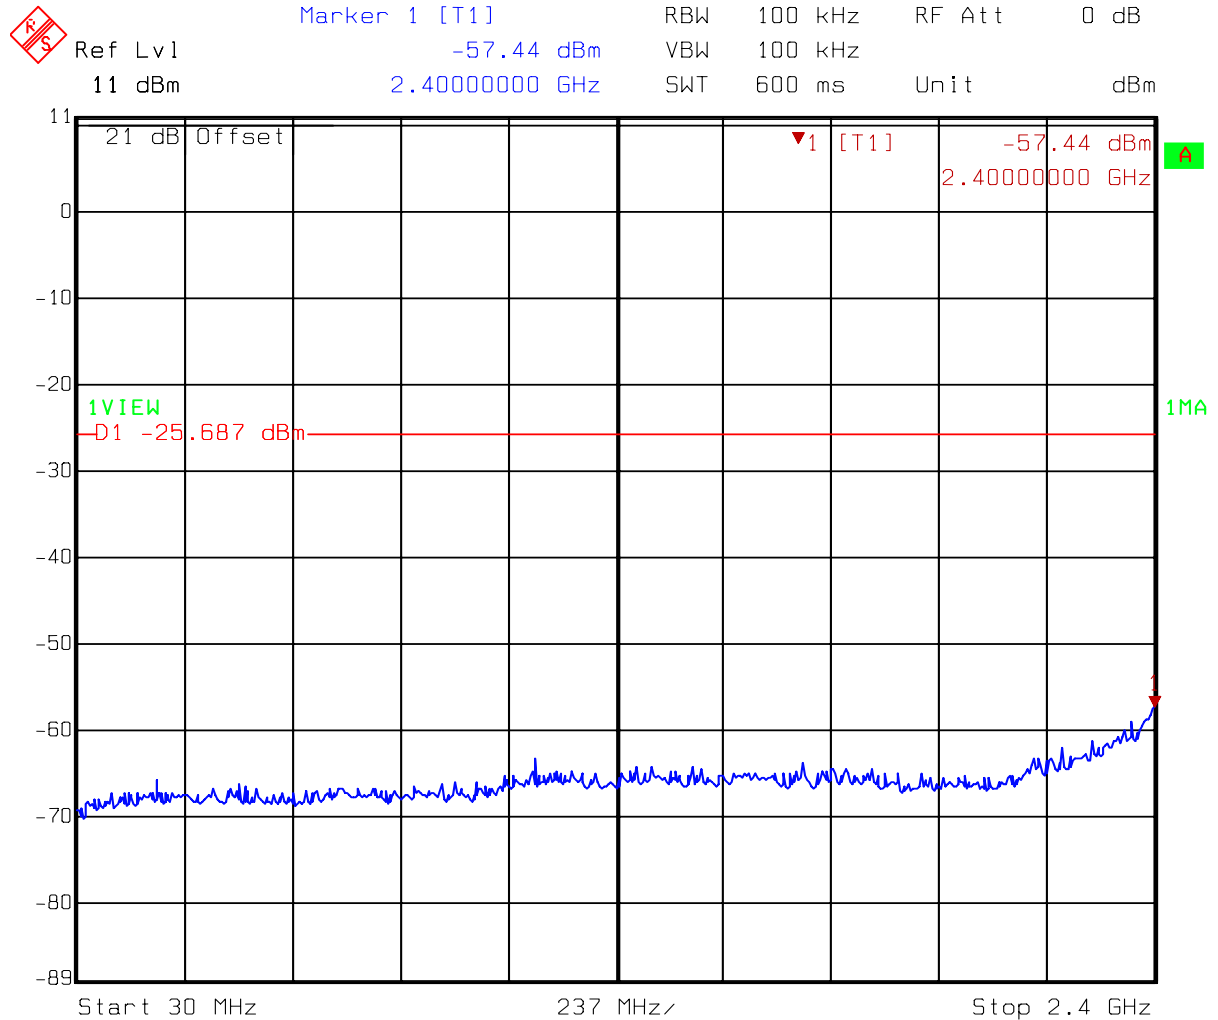

Title: Conductive-Spurious
Comment A: CH 6 at 802.11g mode 30MHz~2400MHz
Date: 19.MAY 2008 11:11:21




Test Mode: 802.11g mode (ch6)

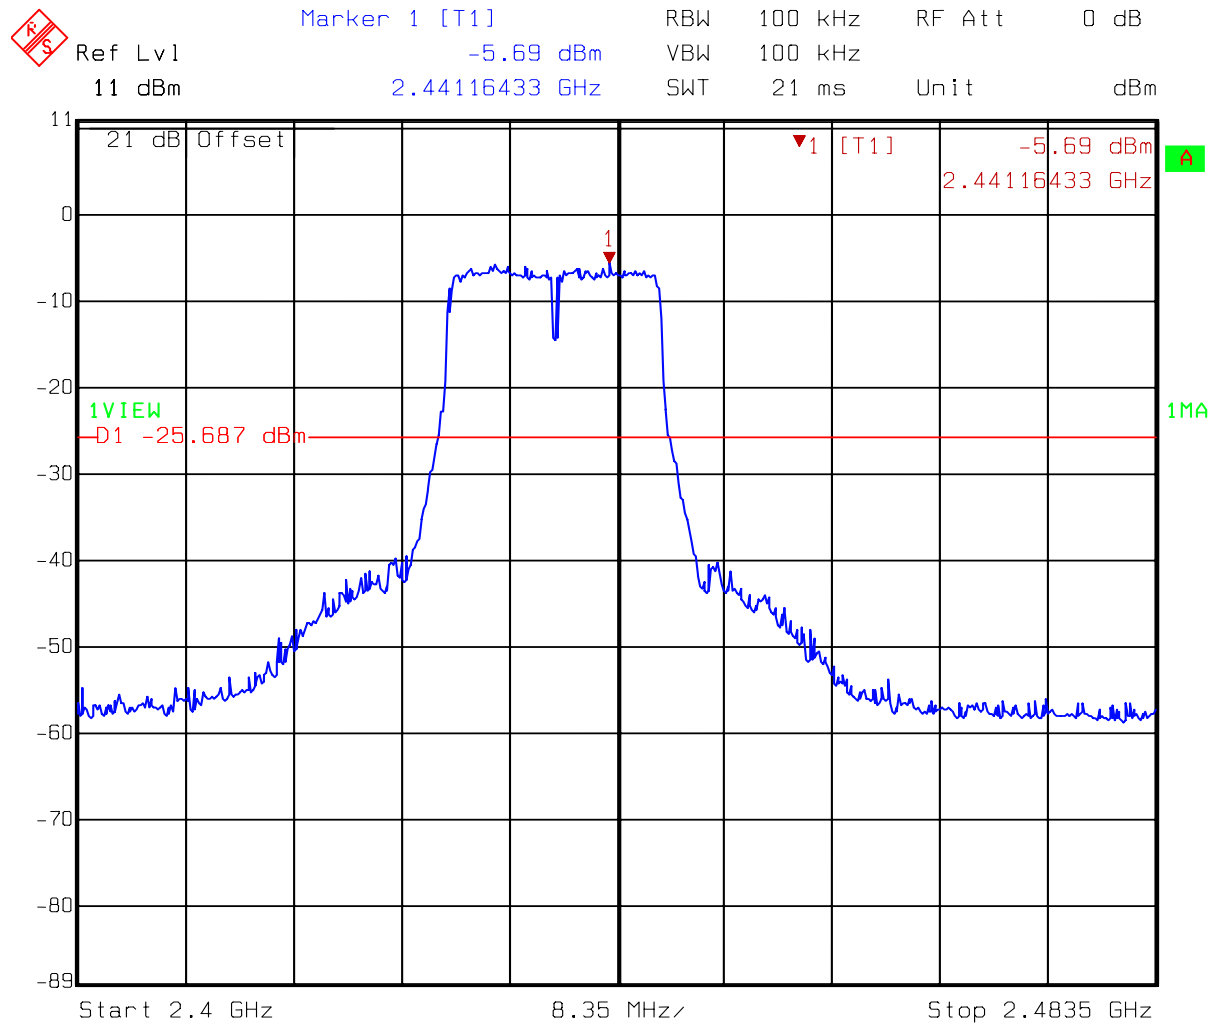

Title: Conductive-Spurious
Comment A: CH 6 at 802.11g mode 2400MHz~2483.5MHz
Date: 19.MAY 2008 11:11:00




Test Mode: 802.11g mode (ch6)

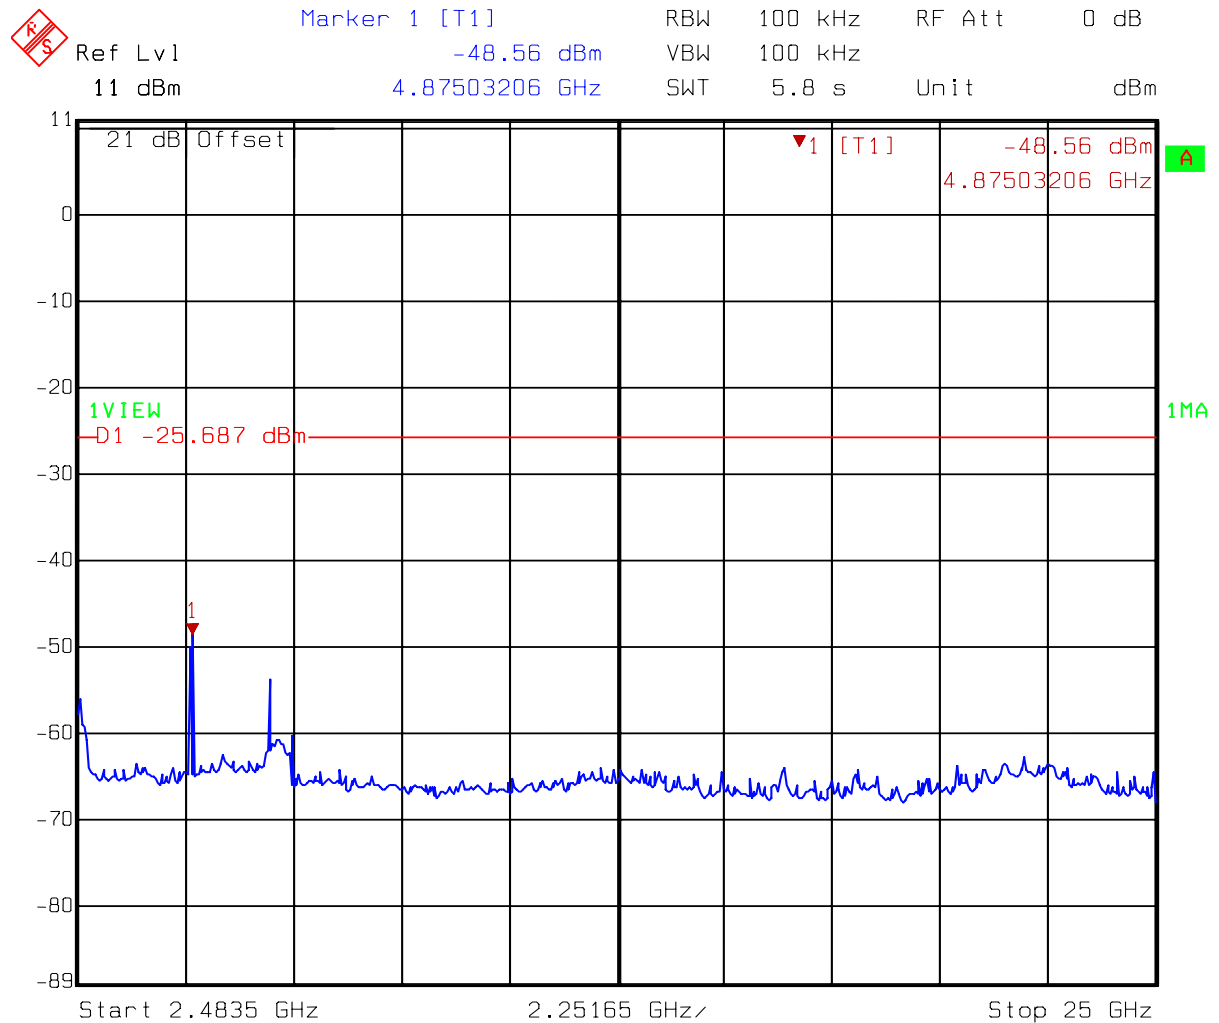

Title: Conductive-Spurious
Comment A: CH 6 at 802.11g mode 2483.5MHz~25000MHz
Date: 19.MAY 2008 11:11:49




Test Mode: 802.11g mode (ch11)

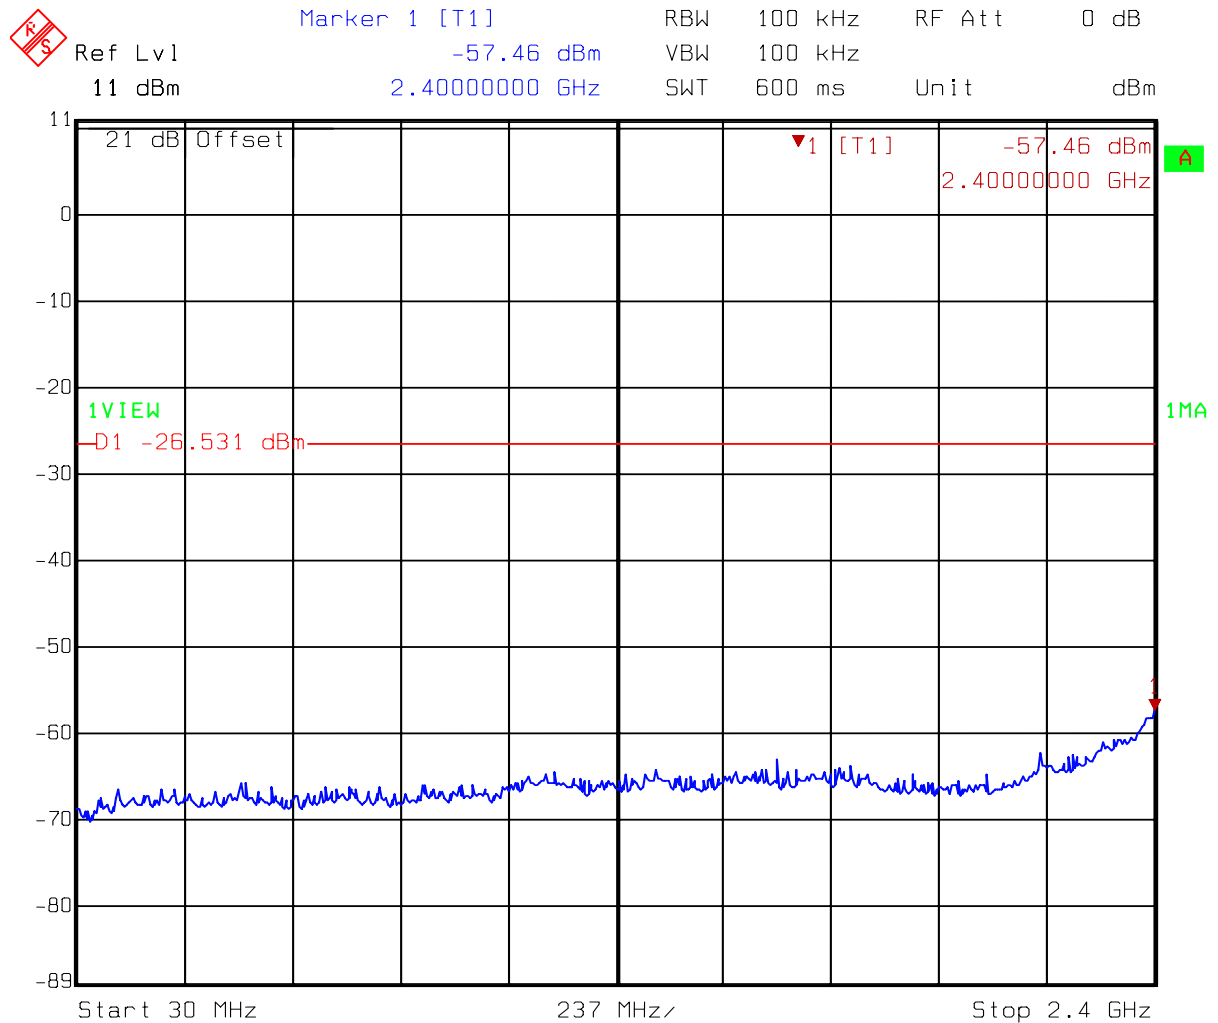

Title: Conductive-Spurious
Comment A: CH 11 at 802.11g mode 30MHz~2400MHz
Date: 19.MAY 2008 11:14:21


Test Mode: 802.11g mode (ch11)

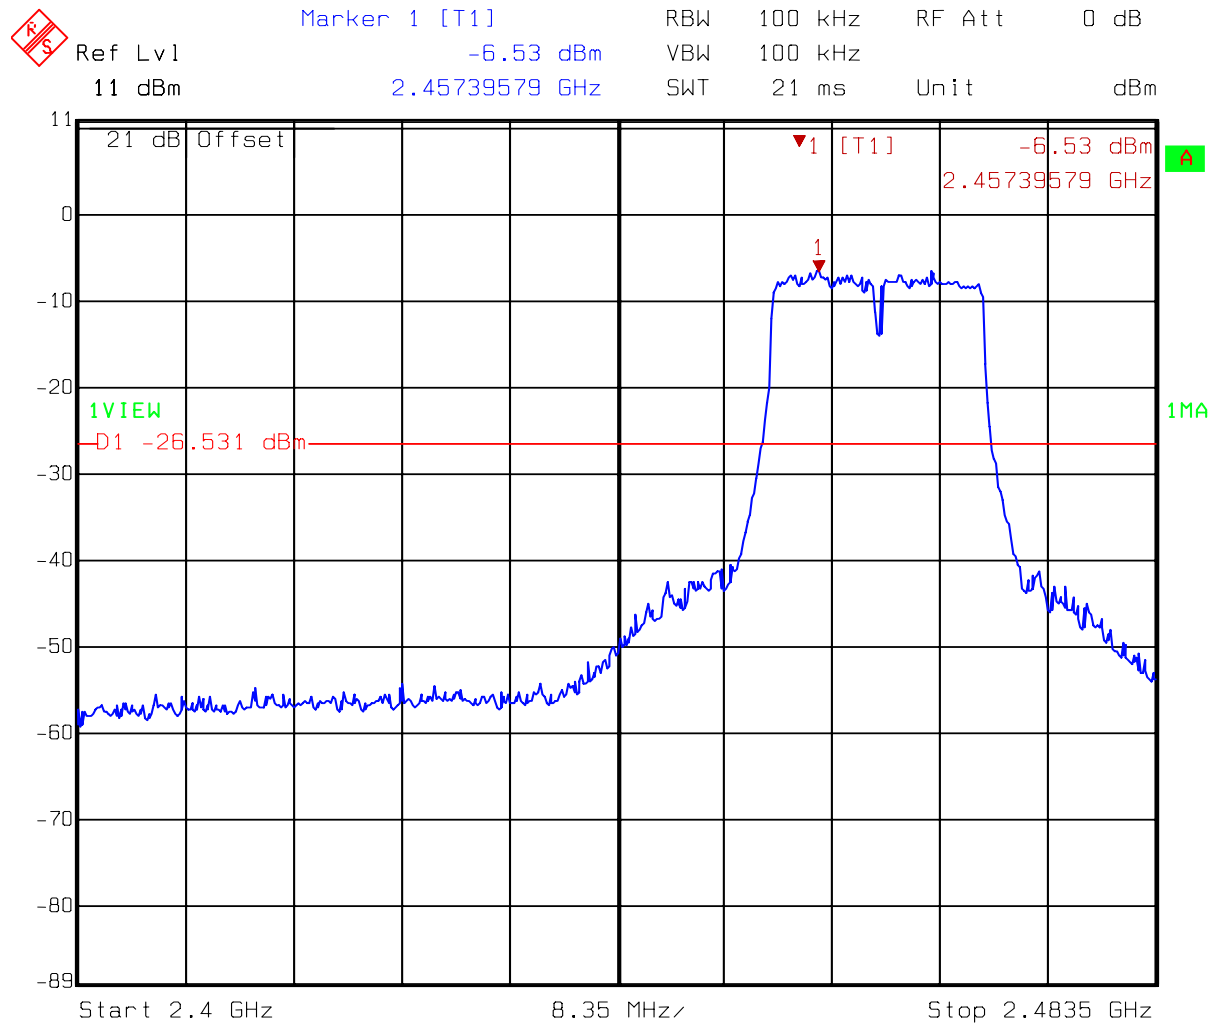

Title: Conductive-Spurious
Comment A: CH 11 at 802.11g mode 2400MHz~2483.5MHz
Date: 19.MAY 2008 11:14:00



Test Mode: 802.11g mode (ch11)

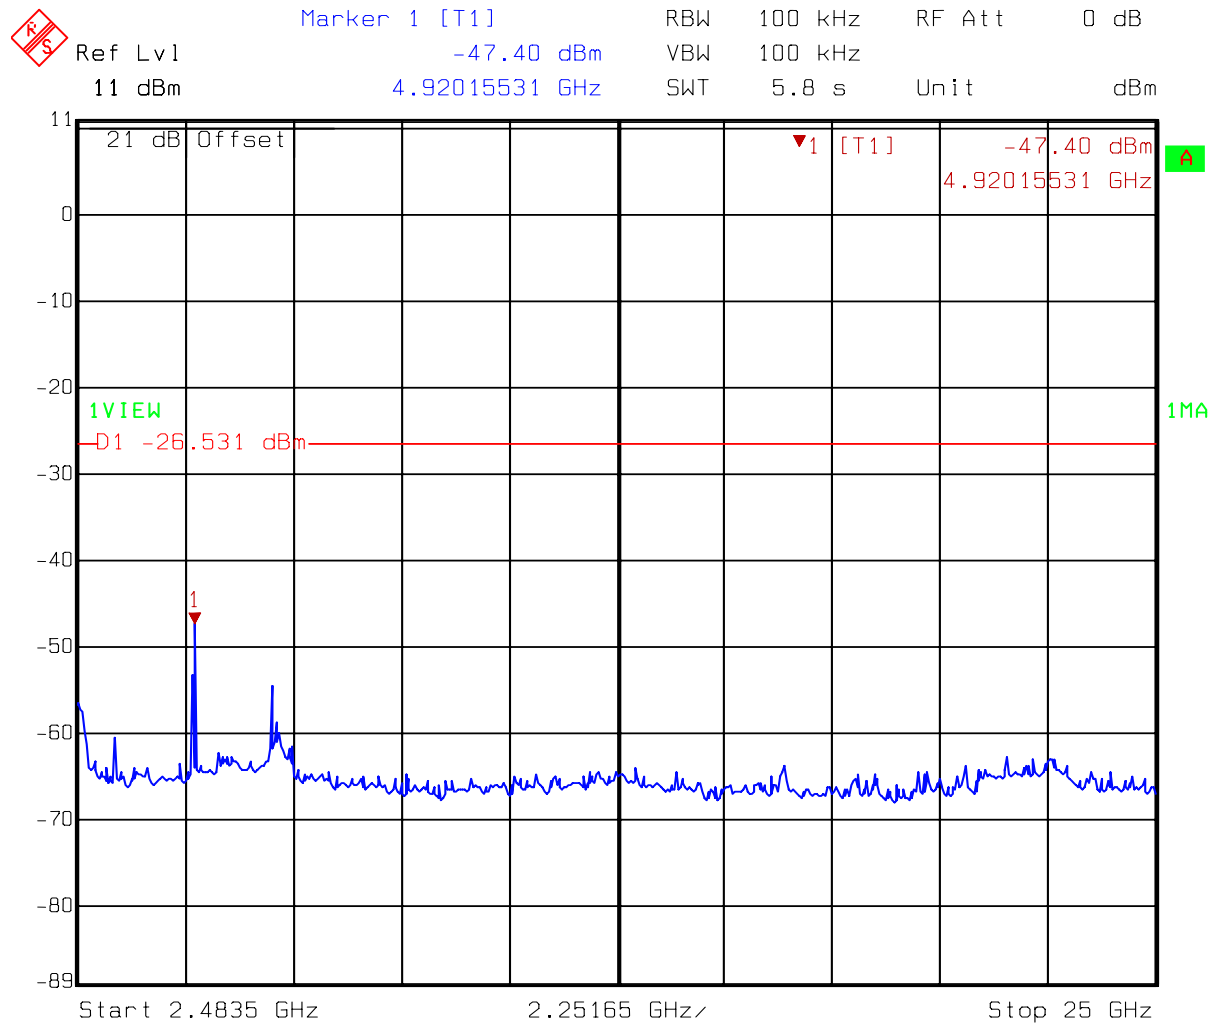

Title: Conductive-Spurious
Comment A: CH 11 at 802.11g mode 2483.5MHz~25000MHz
Date: 19.MAY 2008 11:14:48

6. Radiated Emission test


6.1 Operating environment

Temperature: 25
Relative Humidity: 55 %
Atmospheric Pressure: 1023 hPa

6.2 Test setup & procedure

The test procedure was according to FCC measurement guideline KDB558074 and ANSI C63.4/2003.

The Diagram below shows the test setup, which is utilized to make these measurements.

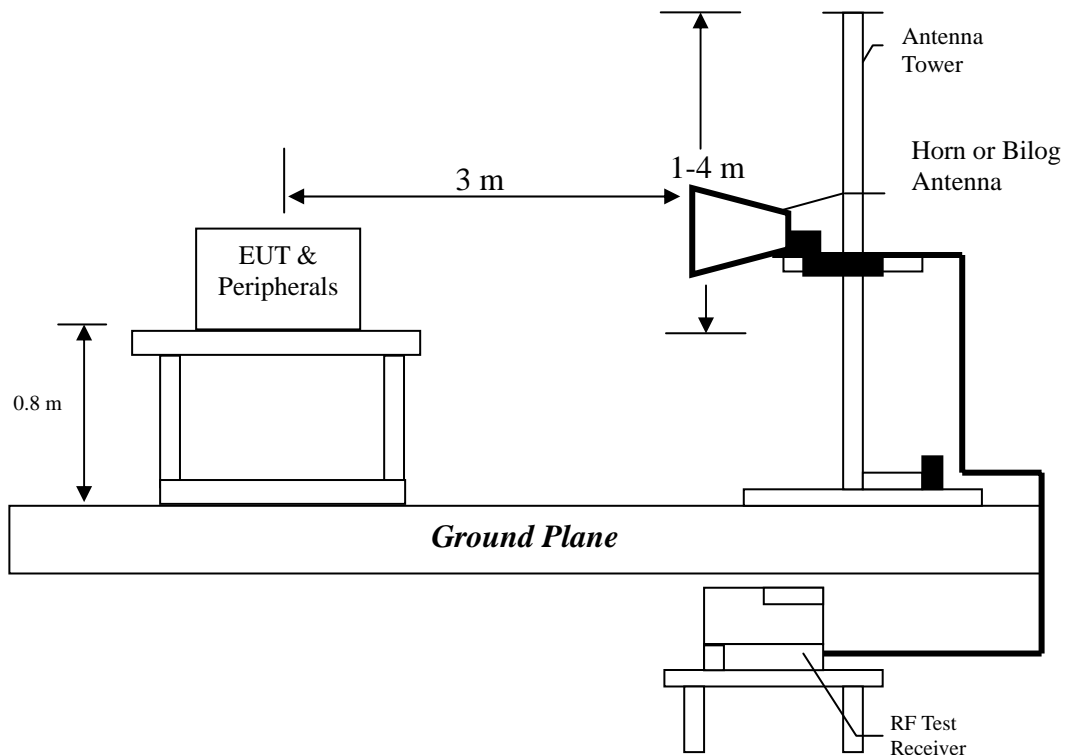

The frequency range from 30MHz to 1000MHz using Bilog Antenna.

The frequency range over 1GHz using Horn Antenna.

Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1MHz RBW/VBW) recorded also on the report.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent 3 meter reading using inverse scaling with distance.

The EUT configuration please refer to the “Spurious set-up photo.pdf”.

6.3 Emission limits

The spurious Emission shall test through the 10th harmonic. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

| Frequency (MHz) | Limits (dB μ V/m@3m) |
|--------------------|-----------------------------|
| 30-88 | 40 |
| 88-216 | 43.5 |
| 216-960 | 46 |
| Above 960 | 54 |

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

Uncertainty was calculated in accordance with NAMAS NIS 81.

Expanded uncertainty (k=2) of radiated emission measurement is ± 4.98 dB.

6.4 Radiated spurious emission test data

The radiated spurious emissions at

| Frequency(MHz) | Margin |
|----------------|--------|
| 204.600(V) | -2.79 |
| 215.270(V) | -1.20 |
| 219.150(V) | -3.38 |
| 480.080(V) | -2.94 |
| 119.240(H) | -2.39 |
| 200.720(H) | -4.90 |
| 359.800(H) | -2.40 |
| 4824.00 (V) | -0.68 |
| 4824.00 (H) | -2.25 |
| 4874.00(V) | -1.55 |
| 4874.00 (H) | -0.30 |
| 4924.00(V) | -1.80 |
| 4924.00(H) | -2.77 |

are less than uncertainty. This is within the stated measurement uncertainty, this may affect compliance determined in other test arrangements.

6.4.1 Measurement results: frequencies equal to or less than 1 GHz

The test was performed on EUT under 802.11b and 802.11g continuously transmitting mode. Channel 1, 6, 11 were verified. The worst case occurred at 802.11b Tx channel 1.

EUT : WUG2K7C
 Worst Case : 802.11b Tx at channel 1

| Antenna Polariz. (V/H) | Freq. (MHz) | Receiver Detector | Corr. Factor (dB/m) | Reading (dBuV) | Corrected Level (dBuV/m) | Limit @ 3 m (dBuV/m) | Margin (dB) |
|------------------------|-------------|-------------------|---------------------|----------------|--------------------------|----------------------|-------------|
| V | 197.810 | QP | 12.00 | 28.37 | 40.37 | 43.50 | -3.13 |
| V | 204.600 | QP | 11.53 | 29.19 | 40.72 | 43.50 | -2.79 |
| V | 215.270 | QP | 11.65 | 30.65 | 42.30 | 43.50 | -1.20 |
| V | 219.150 | QP | 11.65 | 30.97 | 42.62 | 46.00 | -3.38 |
| V | 480.080 | QP | 18.43 | 24.64 | 43.07 | 46.00 | -2.94 |
| V | 719.670 | QP | 22.29 | 13.59 | 35.88 | 46.00 | -10.13 |
| H | 119.240 | QP | 10.54 | 30.58 | 41.12 | 43.50 | -2.39 |
| H | 200.720 | QP | 10.78 | 27.83 | 38.61 | 43.50 | -4.90 |
| H | 359.800 | QP | 15.48 | 28.13 | 43.61 | 46.00 | -2.40 |
| H | 719.670 | QP | 22.44 | 15.25 | 37.69 | 46.00 | -8.31 |
| H | 839.950 | QP | 24.04 | 14.23 | 38.27 | 46.00 | -7.74 |
| H | 959.260 | QP | 25.54 | 14.15 | 39.69 | 46.00 | -6.31 |

Remark:

1. Corr. Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Corr. Factor

6.4.2 Measurement results: frequency above 1GHz

EUT : WUG2K7C
Test Condition : 802.11b Tx at channel 1

| Frequency (MHz) | Spectrum Analyzer Detector | Antenna Polariz. (H/V) | Preamp. Gain (dB) | Correction Factor (dB/m) | Reading (dBuV) | Corrected Level (dBuV/m) | Limit @ 3 m (dBuV/m) | Margin (dB) |
|--------------------|----------------------------------|------------------------------|-------------------------|--------------------------------|-------------------|--------------------------------|----------------------------|----------------|
| 4824.00 | PK | V | 36.07 | 37.77 | 52.62 | 54.32 | 74 | -19.68 |
| 4824.00 | AV | V | 36.07 | 37.77 | 51.62 | 53.32 | 54 | -0.68 |
| 4824.00 | PK | H | 36.07 | 37.77 | 50.05 | 51.75 | 54 | -2.25 |

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1GHz to 25GHz.The data value listed above which is higher than the system noise floor.

EUT : WUG2K7C
Test Condition : 802.11b Tx at channel 6

| Frequency (MHz) | Spectrum Analyzer Detector | Antenna Polariz. (H/V) | Preamp. Gain (dB) | Correction Factor (dB/m) | Reading (dBuV) | Corrected Level (dBuV/m) | Limit @ 3 m (dBuV/m) | Margin (dB) |
|--------------------|----------------------------------|------------------------------|-------------------------|--------------------------------|-------------------|--------------------------------|----------------------------|----------------|
| 4874.00 | PK | V | 36.07 | 37.77 | 50.75 | 52.45 | 54 | -1.55 |
| 4874.00 | PK | H | 36.07 | 37.77 | 53.29 | 54.99 | 74 | -19.01 |
| 4874.00 | AV | H | 36.07 | 37.77 | 52.00 | 53.7 | 54 | -0.30 |

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1GHz to 25GHz.The data value listed above which is higher than the system noise floor.

EUT : WUG2K7C
Test Condition : 802.11b Tx at channel 11

| Frequency (MHz) | Spectrum Analyzer Detector | Antenna Polariz. (H/V) | Preamp. Gain (dB) | Correction Factor (dB/m) | Reading (dBuV) | Corrected Level (dBuV/m) | Limit @ 3 m (dBuV/m) | Margin (dB) |
|--------------------|----------------------------------|------------------------------|-------------------------|--------------------------------|-------------------|--------------------------------|----------------------------|----------------|
| 4924.00 | PK | V | 36.07 | 37.77 | 52.05 | 53.75 | 74 | -20.25 |
| 4924.00 | AV | V | 36.07 | 37.77 | 50.50 | 52.20 | 54 | -1.80 |
| 4924.00 | PK | H | 36.07 | 37.77 | 46.46 | 48.16 | 54 | -5.84 |

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1GHz to 25GHz.The data value listed above which is higher than the system noise floor.

EUT : WUG2K7C
Test Condition : 802.11g Tx at channel 1

| Frequency (MHz) | Spectrum Analyzer Detector | Antenna Polariz. (H/V) | Preamp. Gain (dB) | Correction Factor (dB/m) | Reading (dBuV) | Corrected Level (dBuV/m) | Limit @ 3 m (dBuV/m) | Margin (dB) |
|--------------------|----------------------------------|------------------------------|-------------------------|--------------------------------|-------------------|--------------------------------|----------------------------|----------------|
| 4824.00 | PK | V | 36.07 | 37.77 | 44.47 | 46.17 | 54 | -7.83 |
| 6420.00 | PK | V | 36.65 | 40.87 | 42.65 | 46.87 | 54 | -7.13 |
| 4824.00 | PK | H | 36.07 | 37.77 | 42.52 | 44.22 | 54 | -9.78 |

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1GHz to 25GHz.The data value listed above which is higher than the system noise floor.

EUT : WUG2K7C
Test Condition : 802.11g Tx at channel 6

| Frequency (MHz) | Spectrum Analyzer Detector | Antenna Polariz. (H/V) | Preamp. Gain (dB) | Correction Factor (dB/m) | Reading (dBuV) | Corrected Level (dBuV/m) | Limit @ 3 m (dBuV/m) | Margin (dB) |
|--------------------|----------------------------------|------------------------------|-------------------------|--------------------------------|-------------------|--------------------------------|----------------------------|----------------|
| 4874.00 | PK | V | 36.07 | 37.77 | 43.32 | 45.02 | 54 | -8.98 |
| 4874.00 | PK | H | 36.07 | 37.77 | 46.12 | 47.82 | 54 | -6.18 |

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1GHz to 25GHz.The data value listed above which is higher than the system noise floor.

EUT : WUG2K7C
Test Condition : 802.11g Tx at channel 11

| Frequency (MHz) | Spectrum Analyzer Detector | Antenna Polariz. (H/V) | Preamp. Gain (dB) | Correction Factor (dB/m) | Reading (dBuV) | Corrected Level (dBuV/m) | Limit @ 3 m (dBuV/m) | Margin (dB) |
|--------------------|----------------------------------|------------------------------|-------------------------|--------------------------------|-------------------|--------------------------------|----------------------------|----------------|
| 4924.00 | PK | V | 36.07 | 37.77 | 44.50 | 46.20 | 54 | -7.80 |
| 4924.00 | PK | H | 36.07 | 37.77 | 49.53 | 51.23 | 54 | -2.77 |

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1GHz to 25GHz.The data value listed above which is higher than the system noise floor.

7. Power Spectrum Density test

7.1 Operating environment

Temperature: 23
 Relative Humidity: 54 %
 Atmospheric Pressure 1023 hPa

7.2 Test setup & procedure

The test procedure was according to FCC measurement guideline KDB558074.

The power spectrum density per FCC §15.247(e) was measured from the antenna port of the EUT using a 50ohm spectrum analyzer with the resolution bandwidth set at 3kHz, the video bandwidth set at 10kHz, a span of 1.5MHz, and the sweep time set at 500 seconds. Power Density was read directly correction was added to the reading to obtain power at the EUT antenna terminals. The test was performed at 3 channels (lowest, middle and highest channel). The Power Spectral Density measured result is in the following table.

7.3 Measured data of Power Spectrum Density test results

Test Mode: 802.11b mode


| Channel | Frequency (MHz) | Cable loss (dB) | Power spectrum density (dBm) | Limit (dBm) |
|--------------|-----------------|-----------------|------------------------------|-------------|
| 1 (lowest) | 2412 | 1 | -19.26 | 8 |
| 6 (middle) | 2437 | 1 | -19.07 | 8 |
| 11 (highest) | 2462 | 1 | -21.63 | 8 |

Test Mode: 802.11g mode

| Channel | Frequency (MHz) | Cable loss (dB) | Power spectrum density (dBm) | Limit (dBm) |
|--------------|-----------------|-----------------|------------------------------|-------------|
| 1 (lowest) | 2412 | 1 | -20.57 | 8 |
| 6 (middle) | 2437 | 1 | -21.06 | 8 |
| 11 (highest) | 2462 | 1 | -21.19 | 8 |

Please see the plot below.


Test Mode: 802.11b mode (ch1)

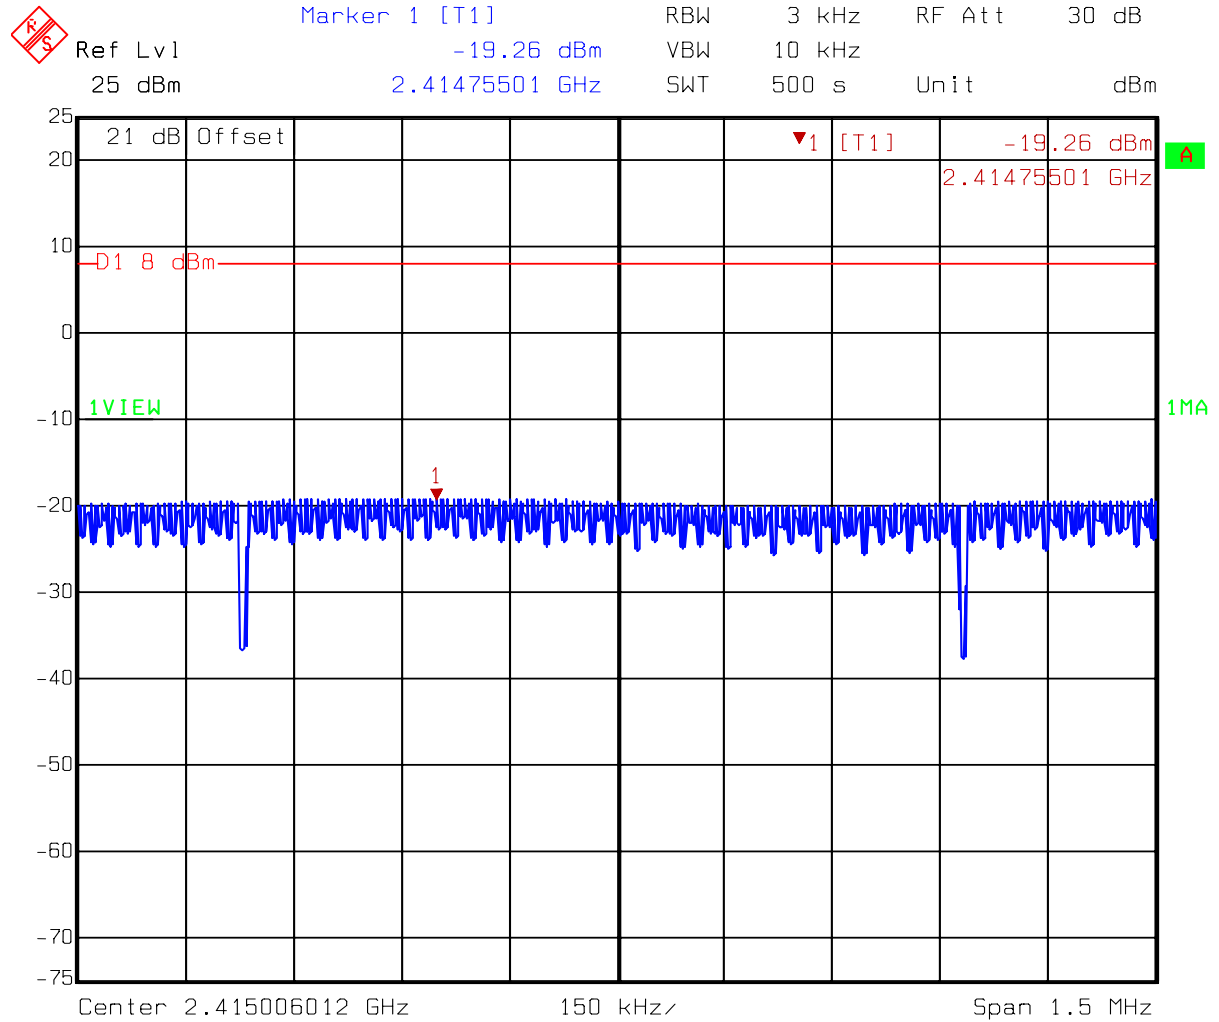

Title: Power density
Comment A: CH 1 at 802.11b mode
Date: 20.MAY 2008 09:15:59




Test Mode: 802.11b mode (ch6)

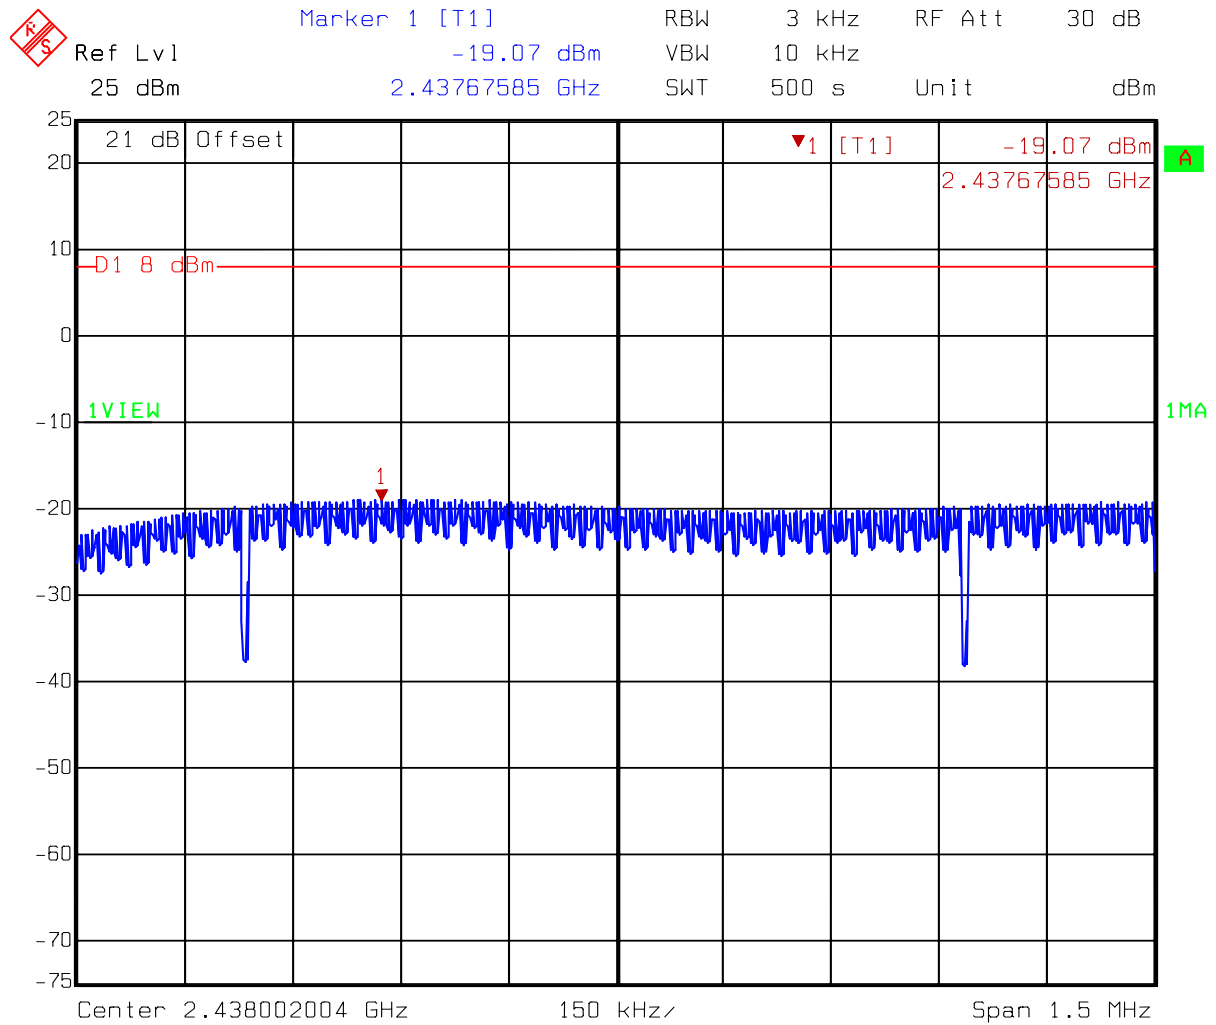

Title: Power density
Comment A: CH 6 at 802.11b mode
Date: 20.MAY 2008 09:17:34




Test Mode: 802.11b mode (ch11)

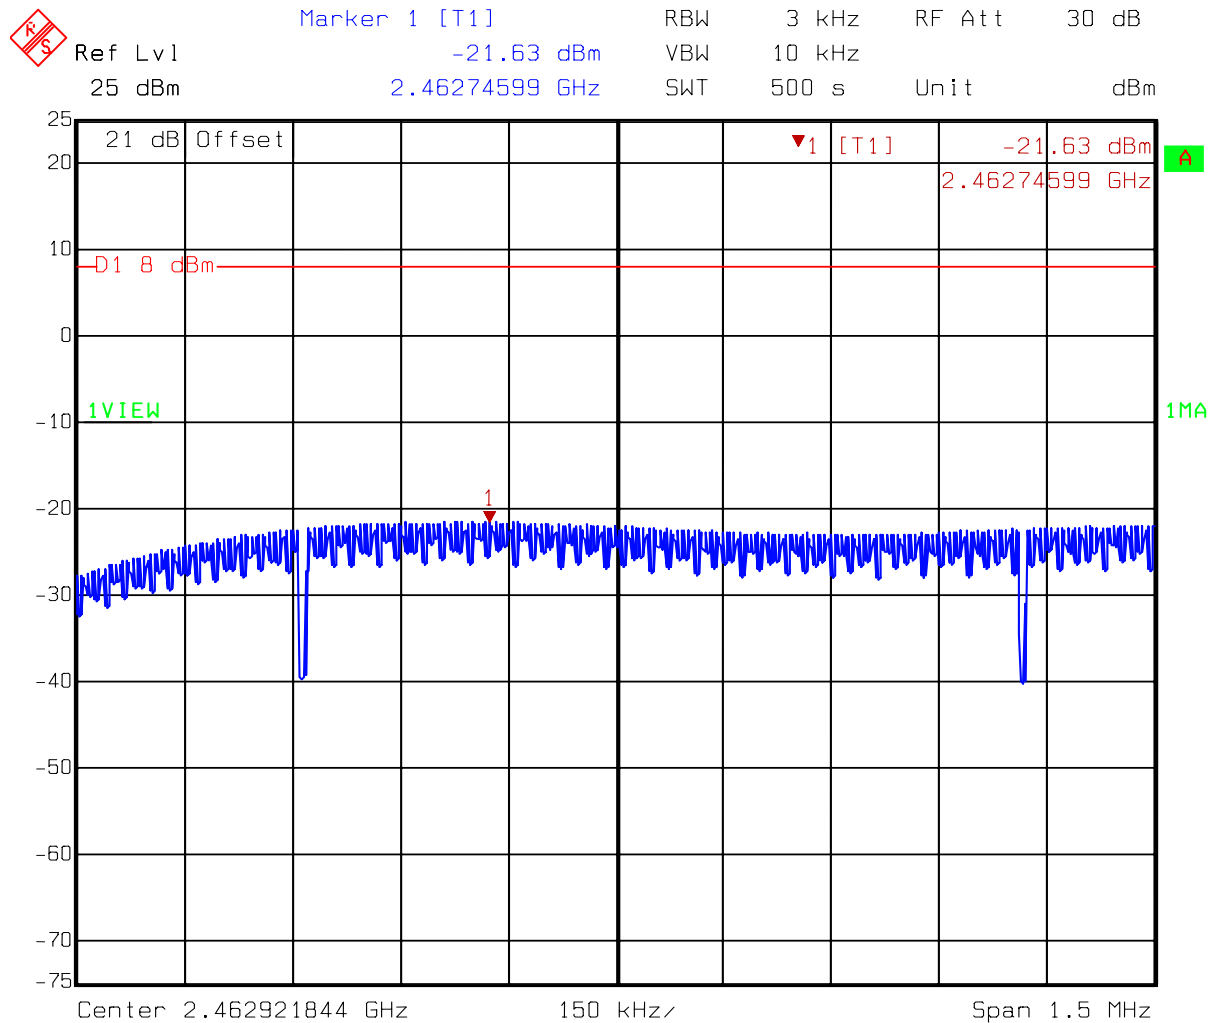


Title: Power density
Comment A: CH 11 at 802.11b mode
Date: 20.MAY 2008 09:20:51

Test Mode: 802.11g mode (ch1)

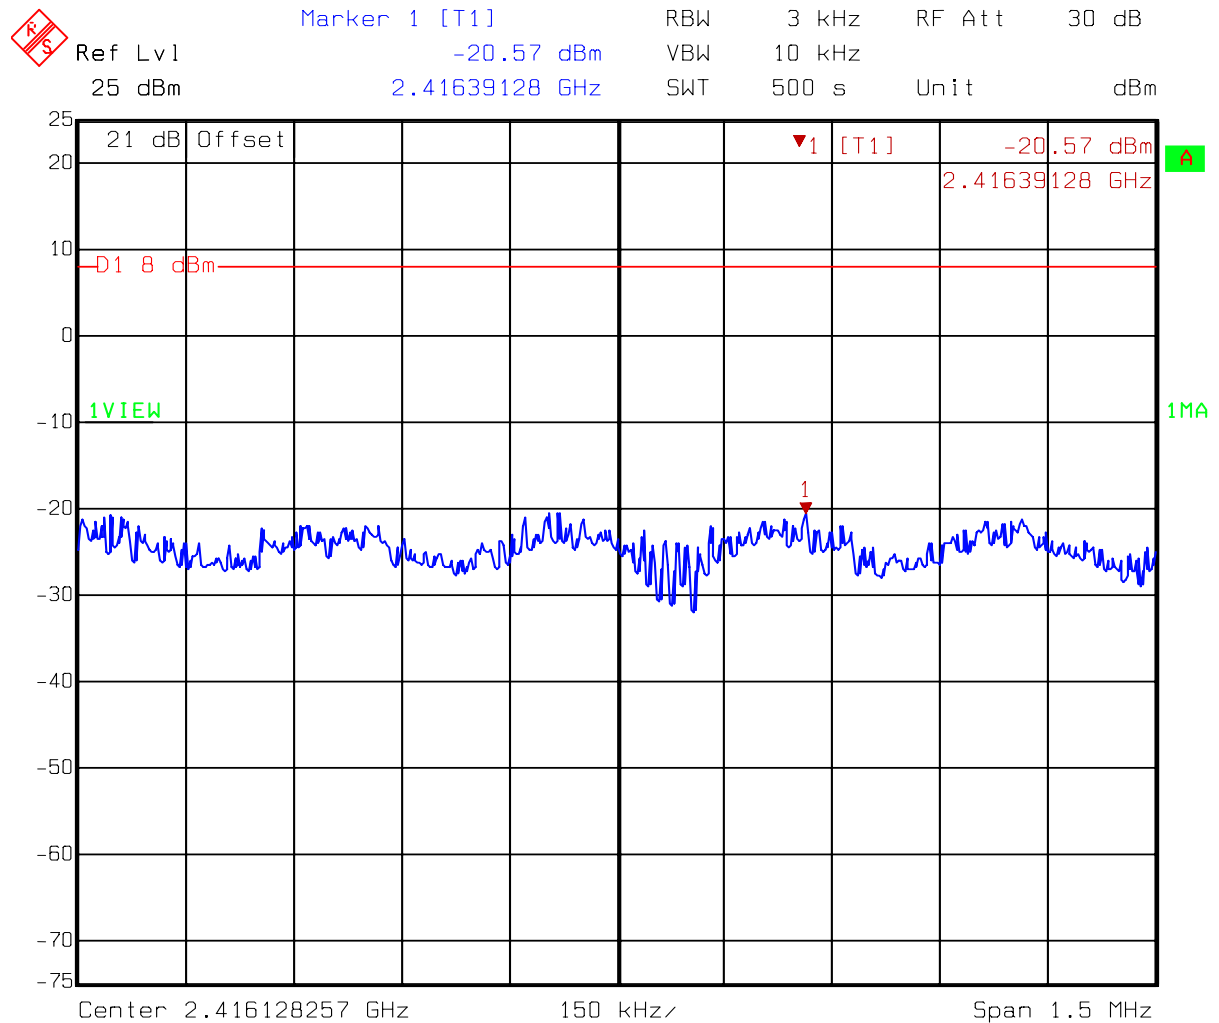


Title: Power density
Comment A: CH 1 at 802.11g mode
Date: 19.MAY 2008 11:07:25

Test Mode: 802.11g mode (ch6)

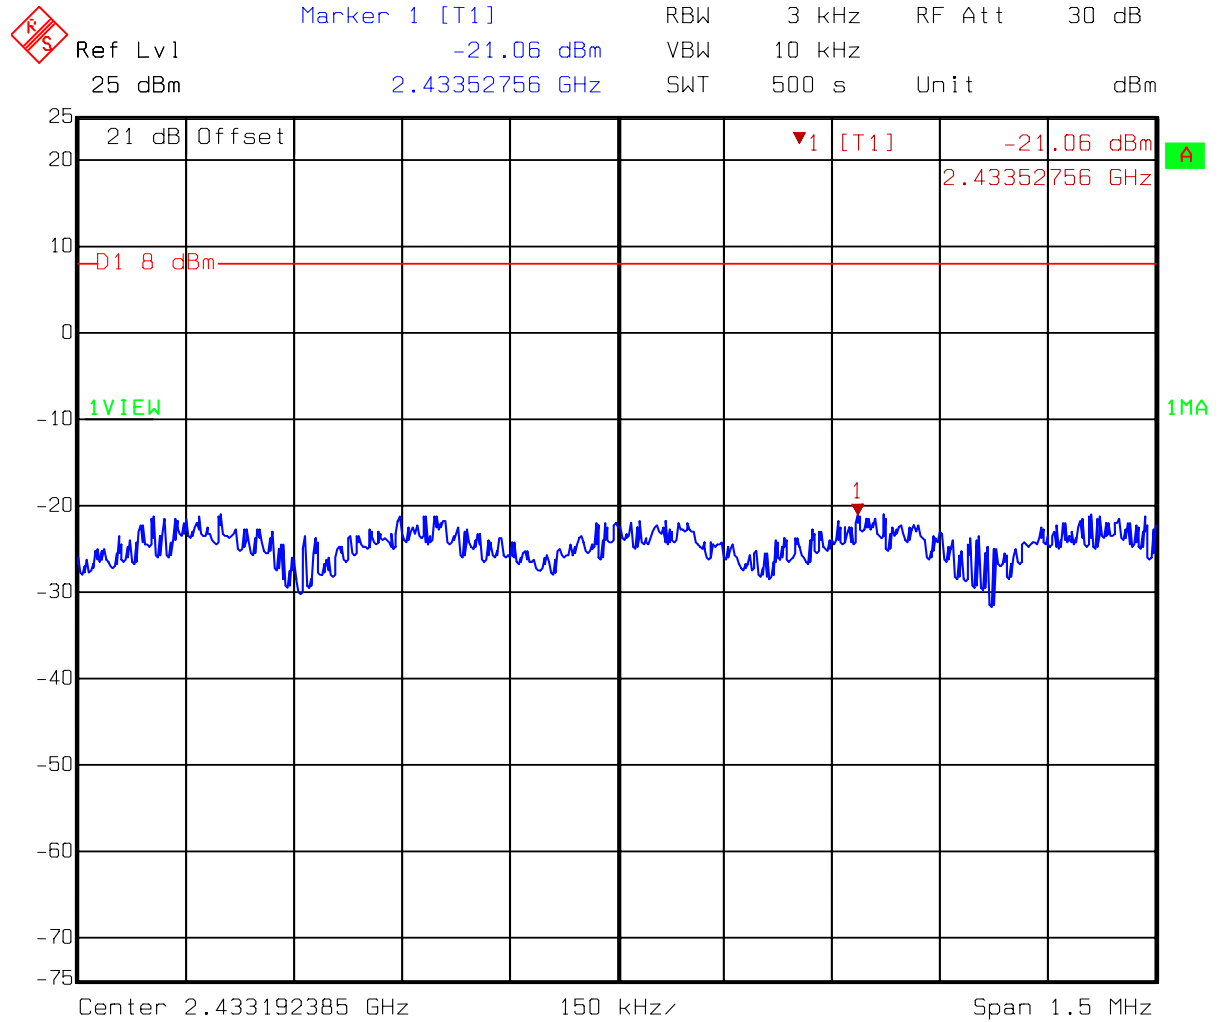

Title: Power density
Comment A: CH 6 at 802.11g mode
Date: 19.MAY 2008 11:10:40

Test Mode: 802.11g mode (ch11)

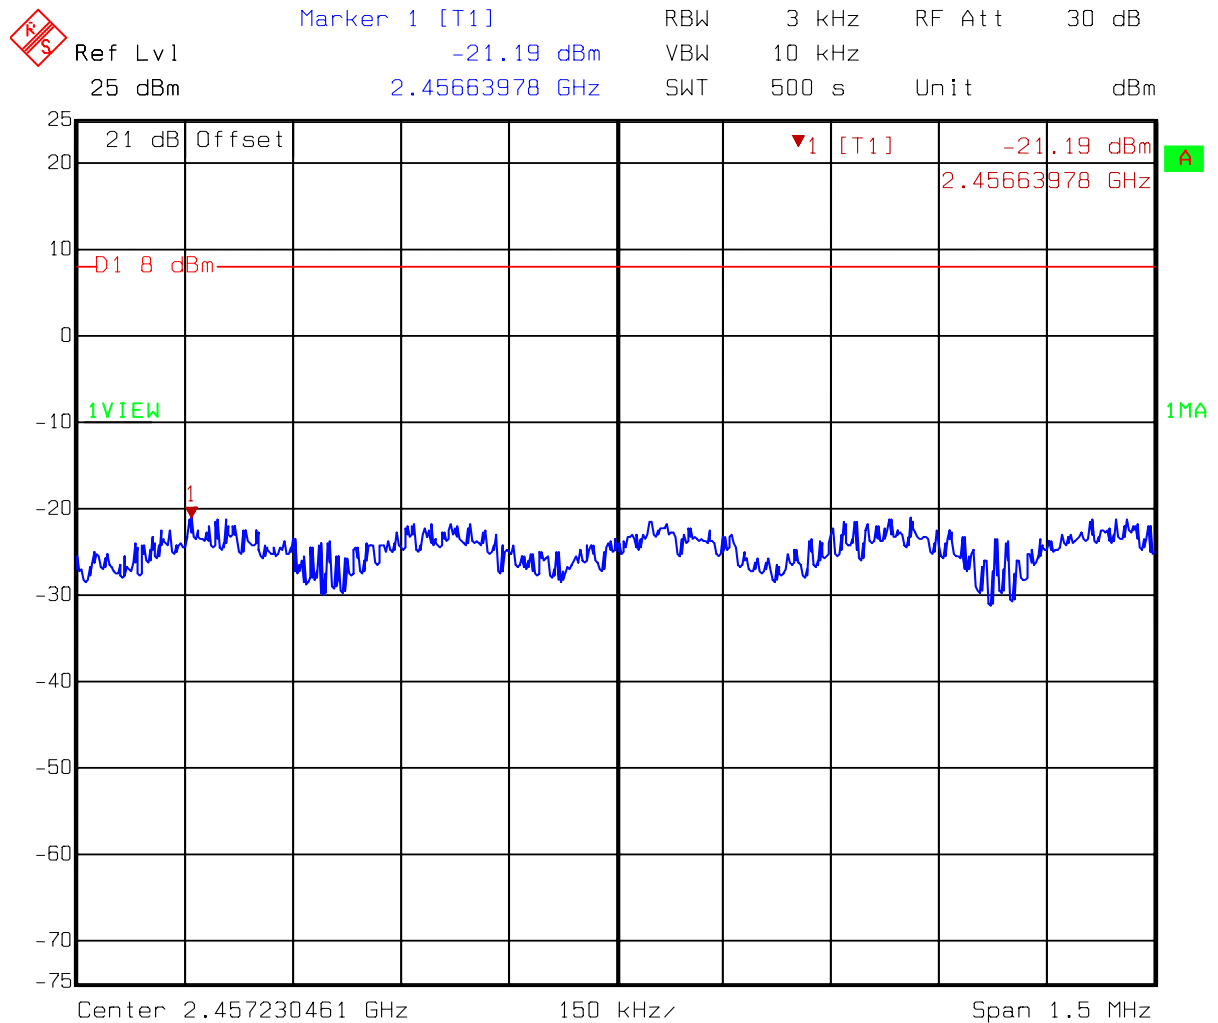

Title: Power density
Comment A: CH 11 at 802.11g mode
Date: 19.MAY 2008 11:13:39



8. Emission on the band edge

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Radiated emissions, which fall in the restricted band, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

8.1 Operating environment

| | | |
|----------------------|------|-----|
| Temperature: | 23 | |
| Relative Humidity: | 54 | % |
| Atmospheric Pressure | 1023 | hPa |

8.2 Test setup & procedure

Please refer to the clause 6.2 of this report.

8.3 Test Result

Test Mode: 802.11b operating mode


| Channel | Measurement Freq.Band (MHz) | Detector | The Max. Field Strength in Restrict Band (dBuV/m) | Limit @ 3 m (dBuV/m) | Margin (dB) |
|--------------|-----------------------------|----------|---|----------------------|-------------|
| 1 (lowest) | 2310-2390 | PK | 61.55 | 74 | -12.45 |
| | | AV | 48.82 | 54 | -5.18 |
| 11 (highest) | 2483.5-2500 | PK | 60.94 | 74 | -13.06 |
| | | AV | 48.77 | 54 | -5.23 |

Test Mode: 802.11g operating mode


| Channel | Measurement Freq.Band (MHz) | Detector | The Max. Field Strength in Restrict Band (dBuV/m) | Limit @ 3 m (dBuV/m) | Margin (dB) |
|--------------|-----------------------------|----------|---|----------------------|-------------|
| 1 (lowest) | 2310-2390 | PK | 60.72 | 74 | -13.28 |
| | | AV | 49.30 | 54 | -4.70 |
| 11 (highest) | 2483.5-2500 | PK | 62.30 | 74 | -11.70 |
| | | AV | 49.40 | 54 | -4.60 |

Please see the plot below.


Test Mode: 802.11b mode ch1 PK

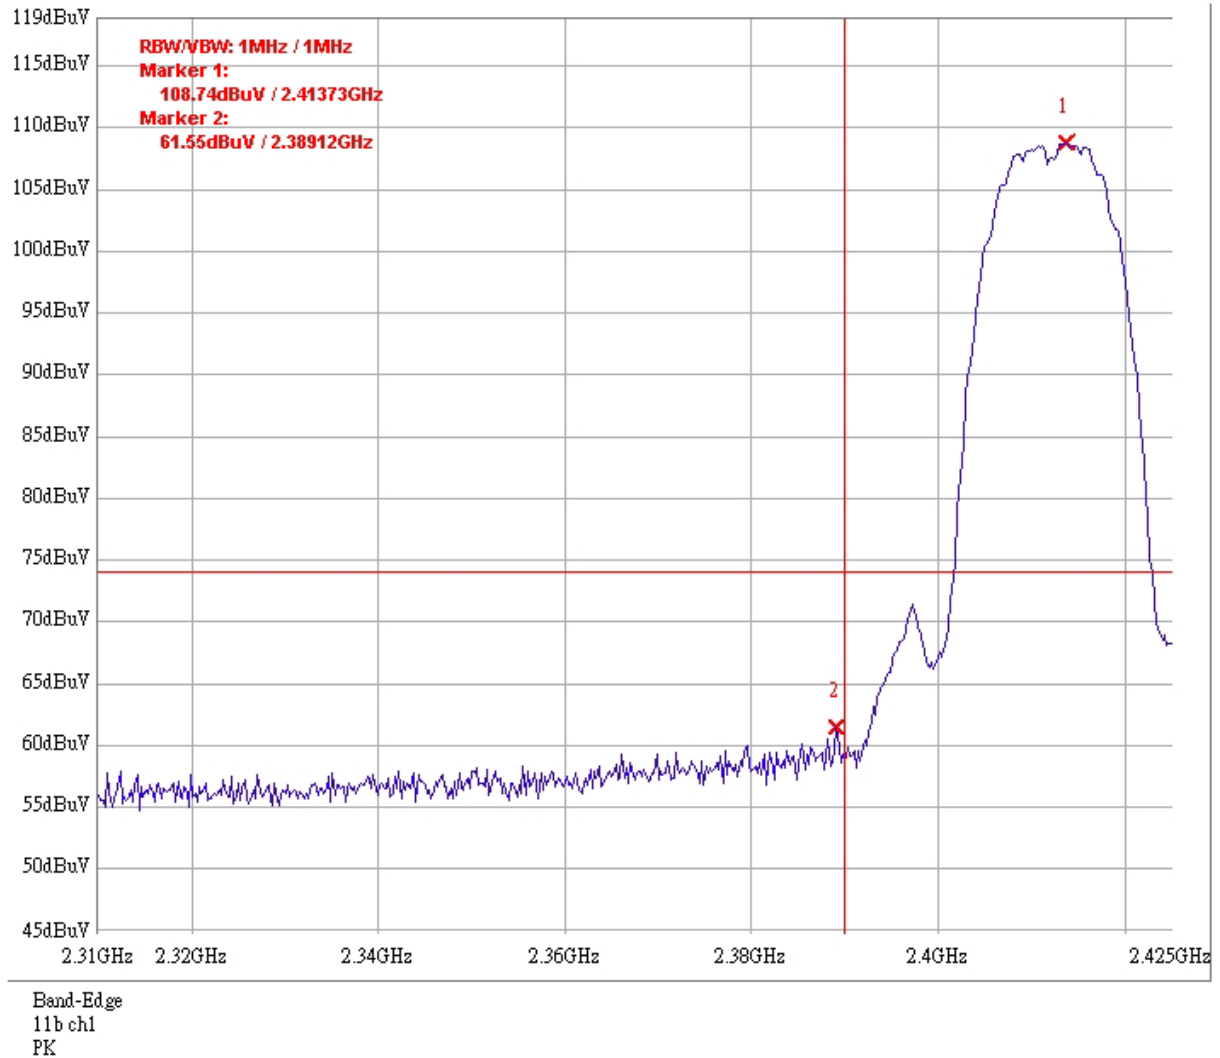


Test Mode: 802.11b mode ch1 AV

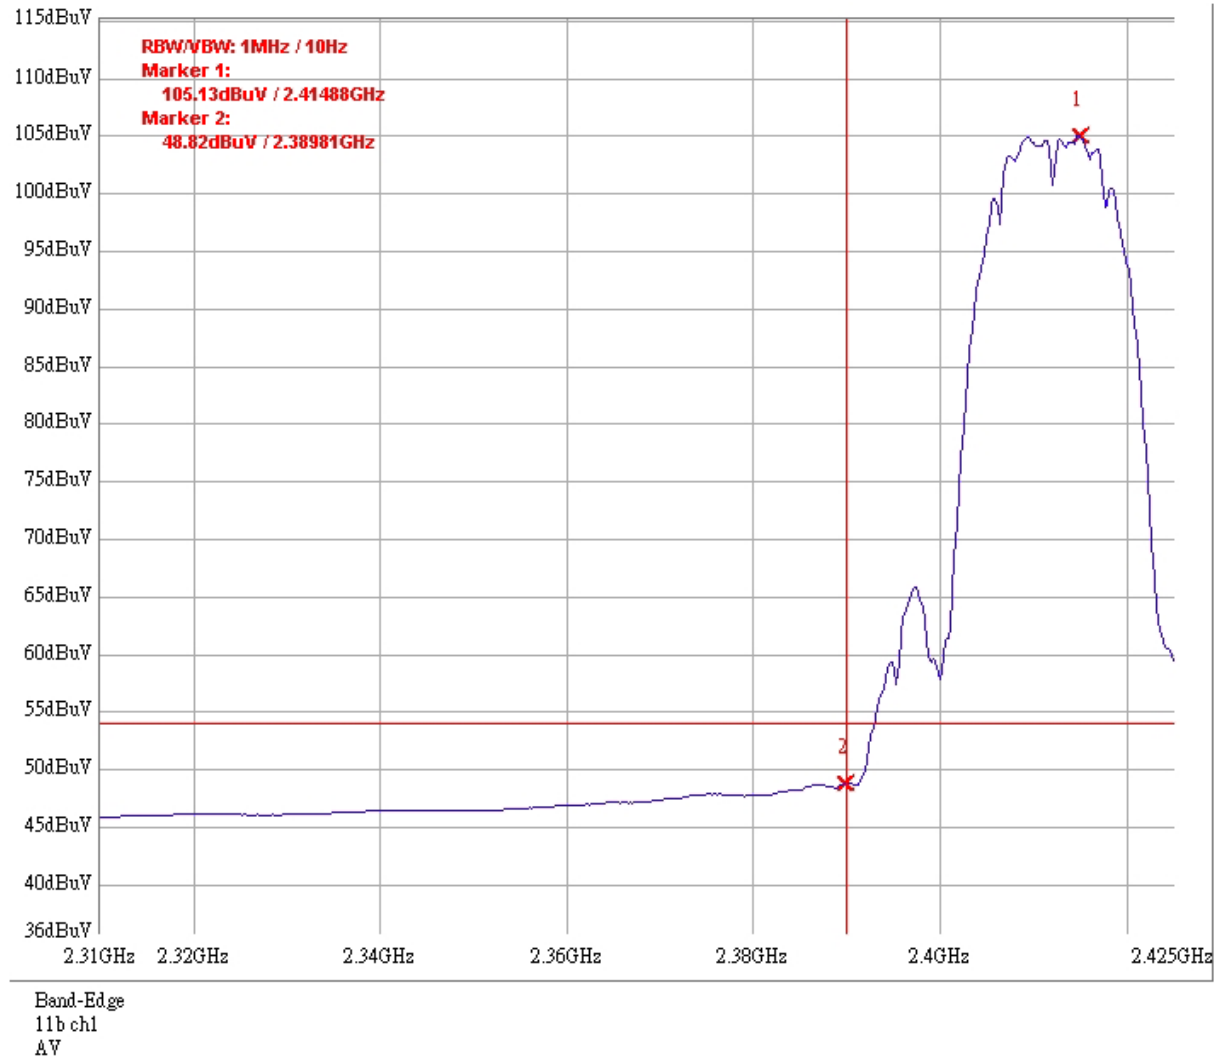


Test Mode: 802.11b mode ch11 PK

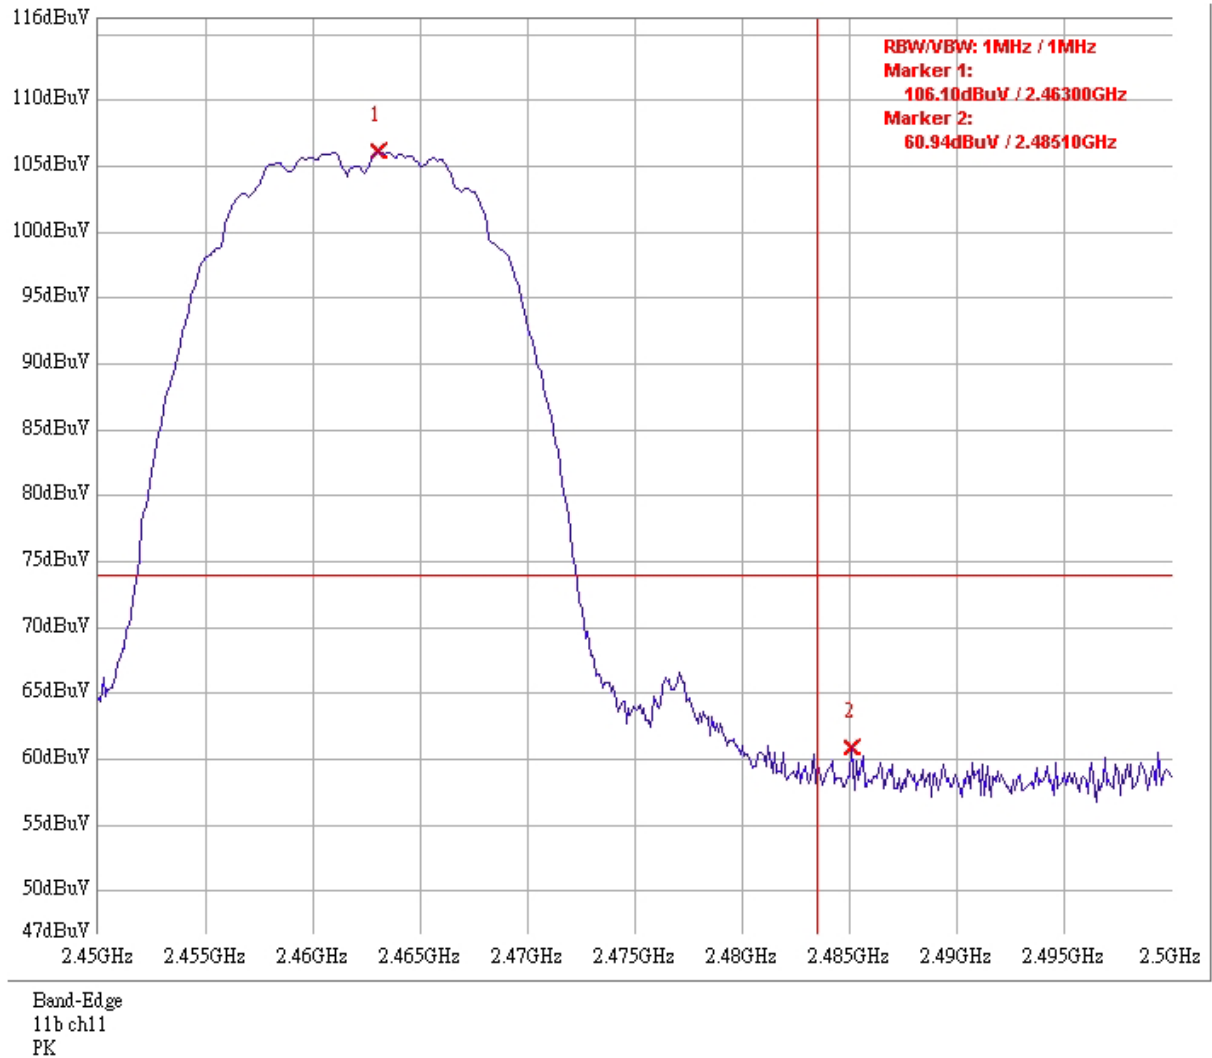


Test Mode: 802.11b mode ch11 AV

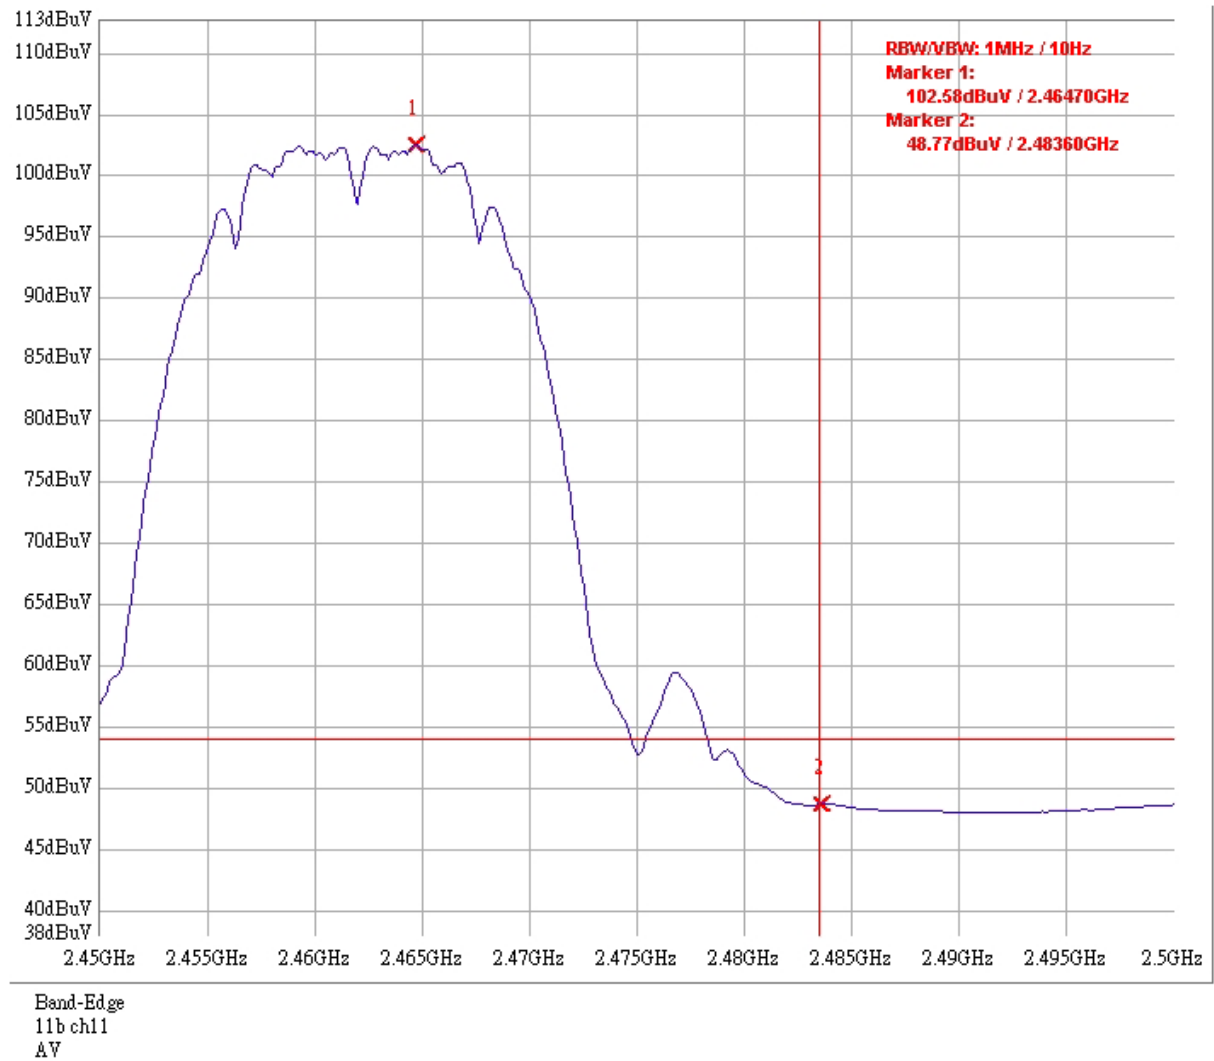


Test Mode: 802.11g mode ch1 PK

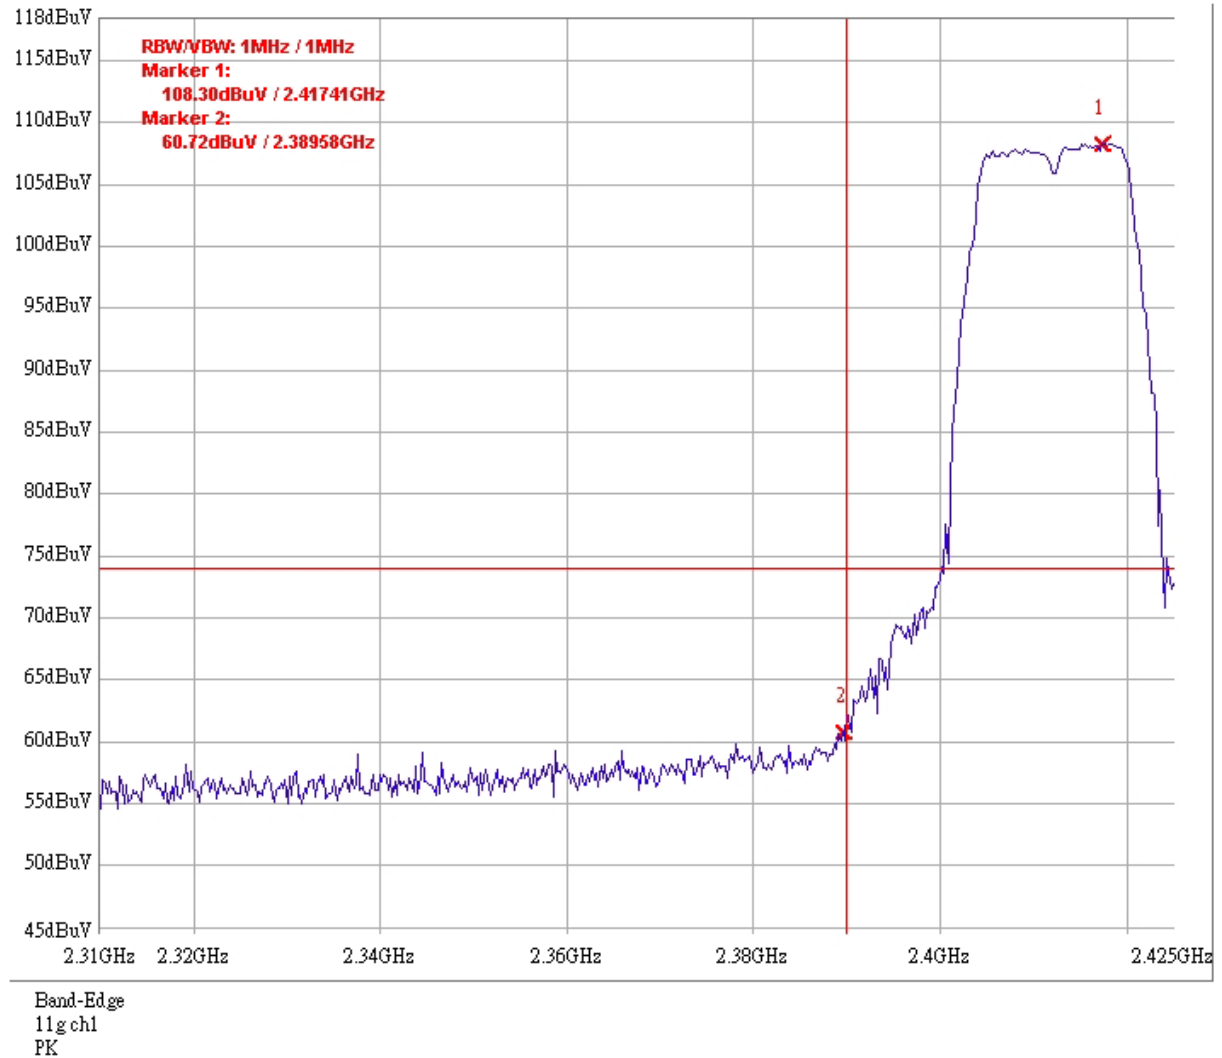

Test Mode: 802.11g mode ch1 AV

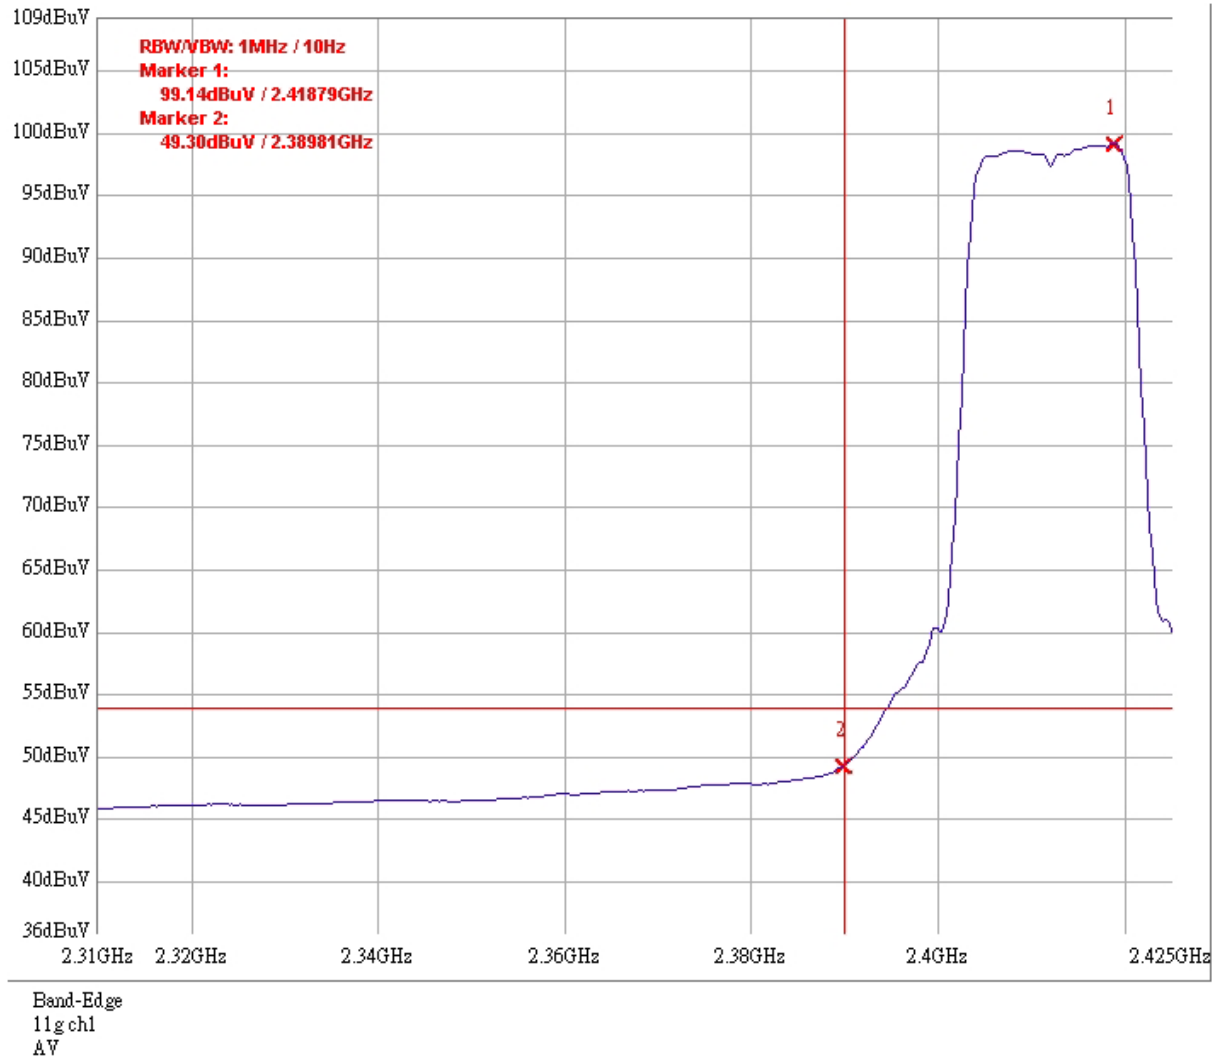


Test Mode: 802.11g mode ch11 PK

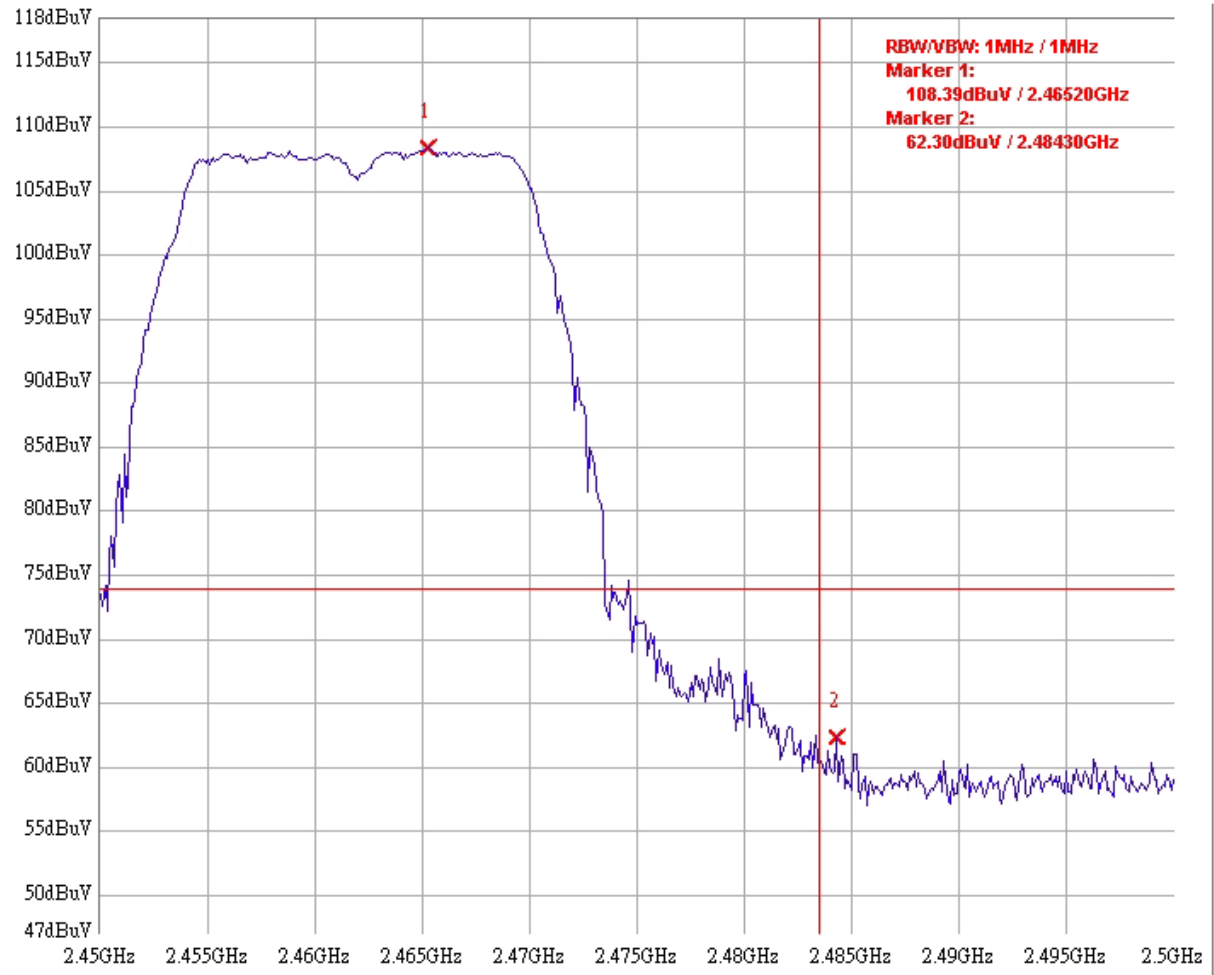

Band-Edge
11g ch11
PK

Test Mode: 802.11g mode ch11 AV

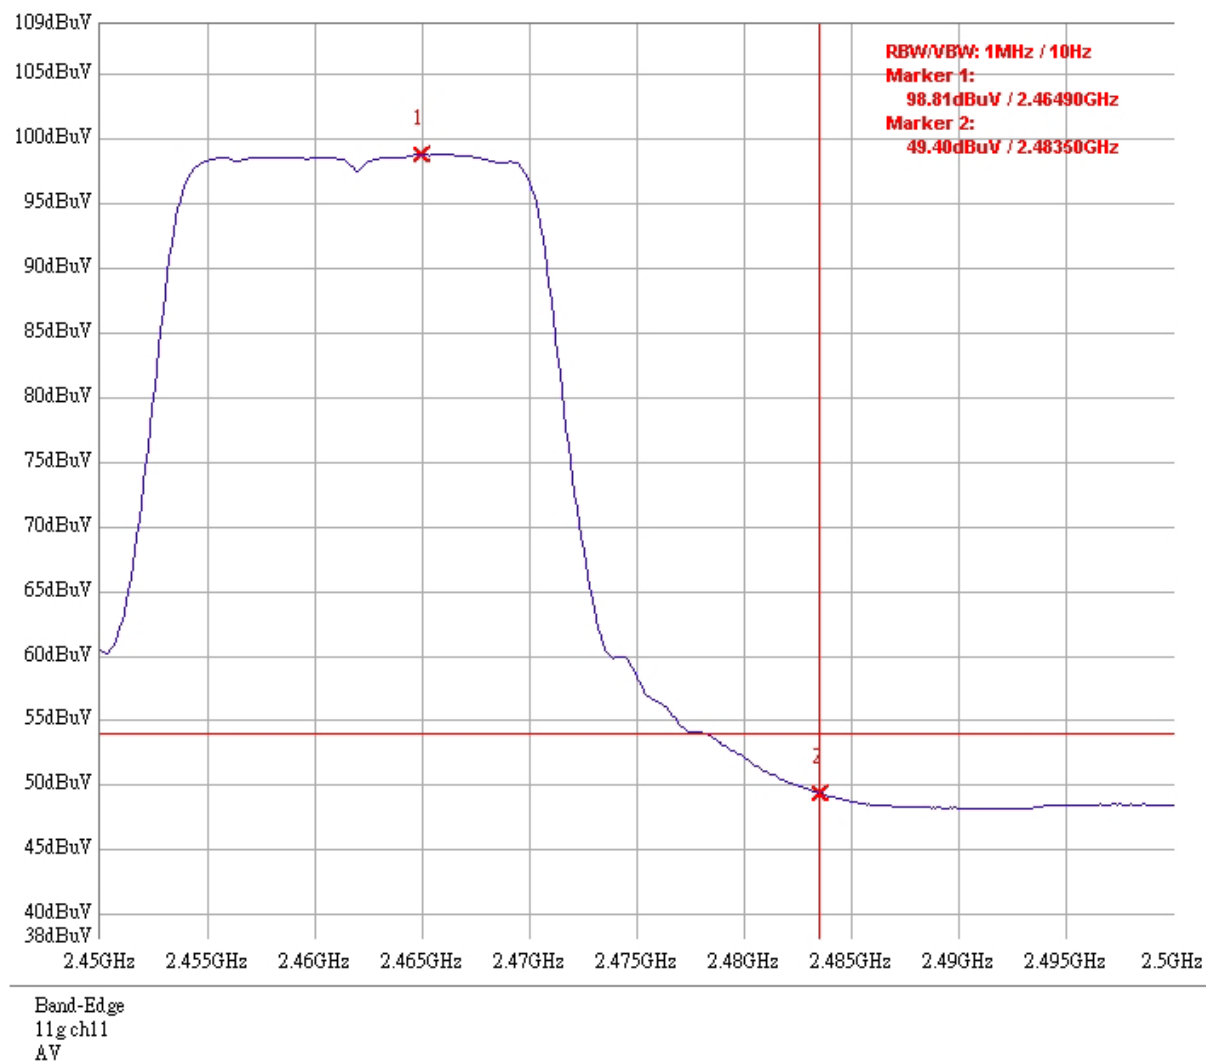


9. Power Line Conducted Emission test §FCC 15.207

9.1 Operating environment

Temperature: 24
Relative Humidity: 53 %
Atmospheric Pressure 1023 hPa

9.2 Test setup & procedure

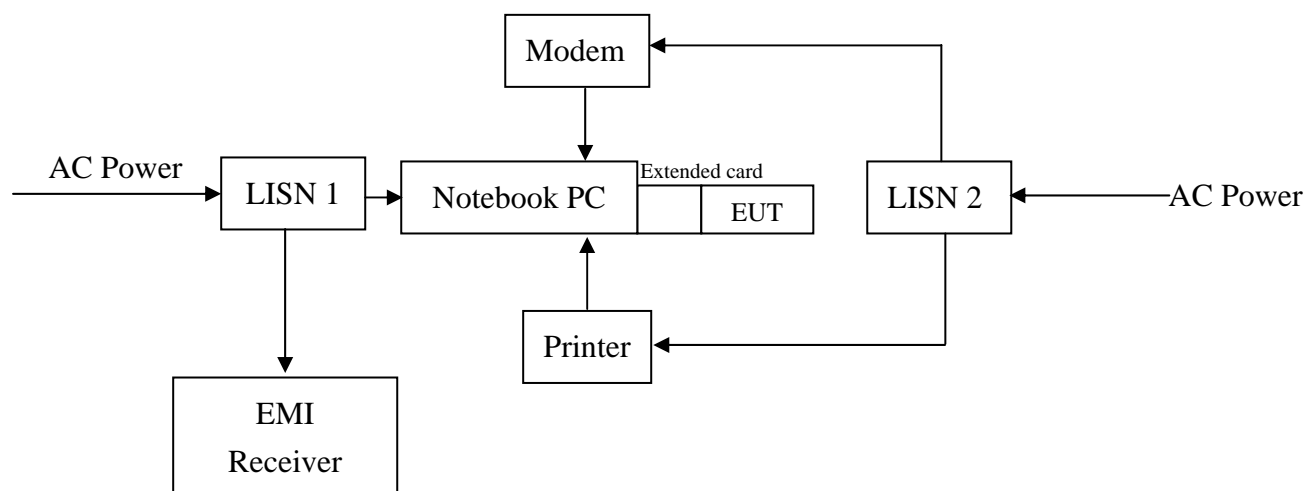

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/2003 on conducted measurement. The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

The EUT configuration please refer to the “Conducted set-up photo.pdf”.

9.3 Emission limit

| Freq. (MHz) | Conducted Limit (dBuV) | |
|----------------|------------------------|----------|
| | Q.P. | Ave. |
| 0.15~0.50 | 66 – 56* | 56 – 46* |
| 0.50~5.00 | 56 | 46 |
| 5.00~30.0 | 60 | 50 |

*Decreases with the logarithm of the frequency.

9.4 Uncertainty of Conducted Emission

Expanded uncertainty (k=2) of conducted emission measurement is ± 2.6 dB.


9.5 Power Line Conducted Emission test data

Phase : Line
EUT : WUG2K7C
Test Condition : Normal operating mode

| Frequency (MHz) | Corr. Factor (dB) | Level Qp (dBuV) | Limit Qp (dBuV) | Level Av (dBuV) | Limit Av (dBuV) | Margin (dB) | |
|--------------------|-------------------------|-----------------------|-----------------------|-----------------------|-----------------------|----------------|--------|
| | | | | | | Qp | Av |
| 0.17 | 0.80 | 53.15 | 64.94 | 48.33 | 54.94 | -11.79 | -6.61 |
| 1.93 | 0.14 | 38.77 | 56.00 | 31.00 | 46.00 | -17.23 | -15.00 |
| 2.16 | 0.16 | 36.97 | 56.00 | 27.39 | 46.00 | -19.03 | -18.61 |
| 3.18 | 0.24 | 35.01 | 56.00 | 21.59 | 46.00 | -20.99 | -24.41 |
| 3.35 | 0.25 | 35.38 | 56.00 | 22.77 | 46.00 | -20.62 | -23.23 |
| 3.75 | 0.27 | 34.83 | 56.00 | 23.13 | 46.00 | -21.17 | -22.87 |

Remark:

1. Correction Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

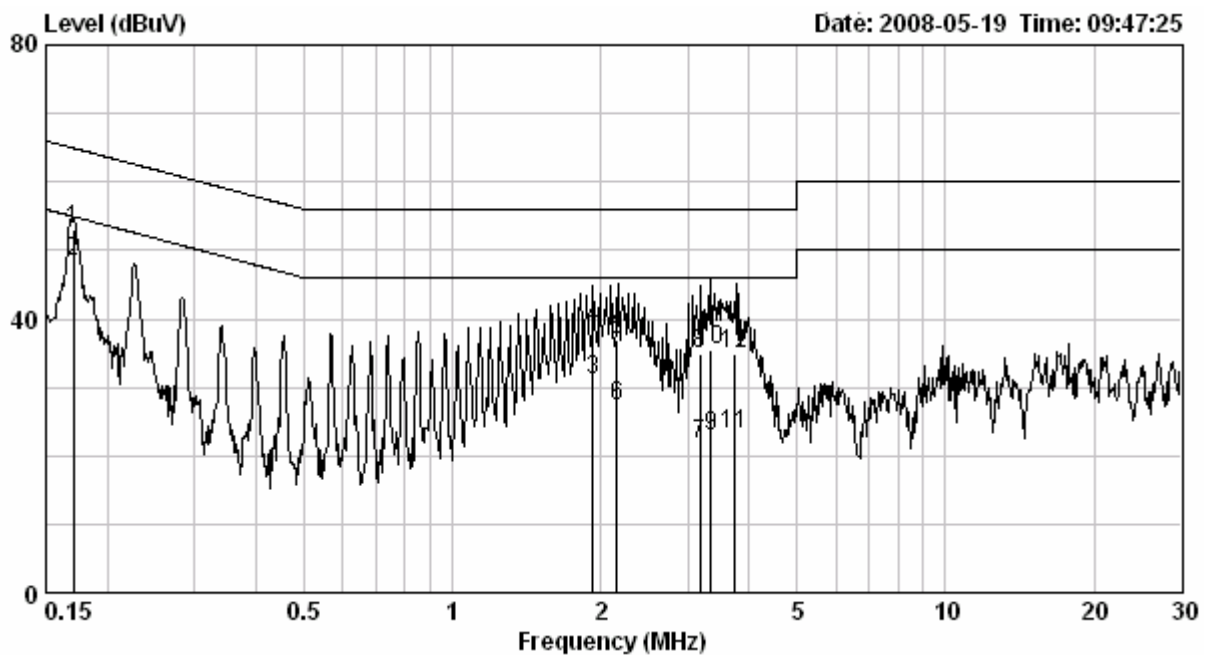

Phase : Neutral
EUT : WUG2K7C
Test Condition : Normal operating mode

| Frequency (MHz) | Corr. Factor (dB) | Level Qp (dBuV) | Limit Qp (dBuV) | Level Av (dBuV) | Limit Av (dBuV) | Margin (dB) | |
|--------------------|-------------------------|-----------------------|-----------------------|-----------------------|-----------------------|----------------|--------|
| | | | | | | Qp | Av |
| 1.86 | 0.14 | 42.71 | 56.00 | 35.16 | 46.00 | -13.29 | -10.84 |
| 2.03 | 0.15 | 42.52 | 56.00 | 34.94 | 46.00 | -13.48 | -11.06 |
| 2.20 | 0.16 | 42.13 | 56.00 | 33.65 | 46.00 | -13.87 | -12.35 |
| 3.22 | 0.24 | 42.70 | 56.00 | 29.61 | 46.00 | -13.30 | -16.39 |
| 3.50 | 0.26 | 44.70 | 56.00 | 31.44 | 46.00 | -11.30 | -14.56 |
| 3.61 | 0.27 | 44.12 | 56.00 | 30.33 | 46.00 | -11.88 | -15.67 |

Remark:

1. Correction Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

