



NVLAP LAB CODE 200707-0



FCC PART 15.247

MEASUREMENT AND TEST REPORT

For

Telean Technology Ltd.

1603, 16/F, FO TAN INDUSTRIAL CENTRE, 26-28 AU PUI WAN STREET,

FO TAN, SHATIN, N.T., HONG KONG

FCC ID: MQ5BM-01RX

Report Type: Original Report	Product Type: 2.4 GHz Wireless Camera (Baby Monitor)
Test Engineer:	<u>Bruce Zhang</u> <i>Bruce Zhang</i>
Report Number:	<u>RSZ09101201</u>
Report Date:	<u>2009-12-22</u>
Reviewed By:	<u>Merry Zhao</u> <i>Merry Zhao</i> EMC Engineer
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
EXTERNAL I/O CABLE.....	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
CFR47 §15.247 (i) & §2.1093 – RF EXPOSURE	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
STANDARD APPLICABLE	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207(a) - CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE	12
TEST RESULTS SUMMARY	12
TEST DATA	13
PLOT(S) OF TEST DATA	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	17
APPLICABLE STANDARD	17
MEASUREMENT UNCERTAINTY.....	17
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	19
TEST DATA	19
CFR47 §15.247(a)(1)-CHANNEL SEPARATION TEST	24
APPLICABLE STANDARD	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST PROCEDURE	24
TEST DATA	24

CFR47 §15.247(a)(1) – 20 dB BANDWIDTH TESTING	27
APPLICABLE STANDARD	27
TEST EQUIPMENT LIST AND DETAILS	27
TEST PROCEDURE	27
TEST DATA	27
CFR47 §15.247(a)(1)(iii)-QUANTITY OF HOPPING CHANNEL TEST	30
APPLICABLE STANDARD	30
TEST EQUIPMENT LIST AND DETAILS	30
TEST PROCEDURE	30
TEST DATA	30
CFR47 §15.247(a)(1)(iii) -TIME OF OCCUPANCY (DWELL TIME)	32
APPLICABLE STANDARD	32
TEST EQUIPMENT LIST AND DETAILS	32
TEST PROCEDURE	32
TEST DATA	32
CFR47 §15.247(b)(1) - PEAK OUTPUT POWER MEASUREMENT	35
APPLICABLE STANDARD	35
TEST EQUIPMENT LIST AND DETAILS	35
TEST PROCEDURE	35
TEST DATA	35
CFR47 §15.247(d) - BAND EDGES TESTING	38
APPLICABLE STANDARD	38
TEST EQUIPMENT LIST AND DETAILS	38
TEST PROCEDURE	38
TEST DATA	39

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Telean Technology Ltd.*'s product, model number: *BM-01RX (Monitor) (FCC ID: MQ5BM-01RX)* or the "EUT" as referred to in this report is a *2.4 GHz Wireless Camera (BABY MONITOR)*, which measures approximately: 9.5 cm L x 4.7 cm W x 16.5 cm H, input voltage: DC 6V adapter and 3*1.5 V AA battery.

Adapter Information:

Model: PS06B-0600500U;

Input: AC 100-240V 50-60Hz 9W;

Output: DC 6V 500mA.

* All measurement and test data in this report was gathered from production sample serial number: 0910006 (Assigned by BACL, Shenzhen). The EUT was received on 2009-10-12.

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2410.875	1	2414.250	2	2417.625
3	2421.000	4	2424.375	5	2427.750
6	2431.125	7	2434.500	8	2437.875
9	2441.250	10	2444.625	11	2448.000
12	2451.375	13	2454.750	14	2458.125
15	2461.500	16	2464.875	17	2468.250

Objective

This Type approval report is prepared on behalf of *Telean Technology Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 of Camera portion, with FCC ID: MQ5BM-01TX.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

N/A.


Equipment Modifications


No modification was made to the unit tested.

External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable Power Line	1.85	Adapter	EUT

Configuration of Test Setup

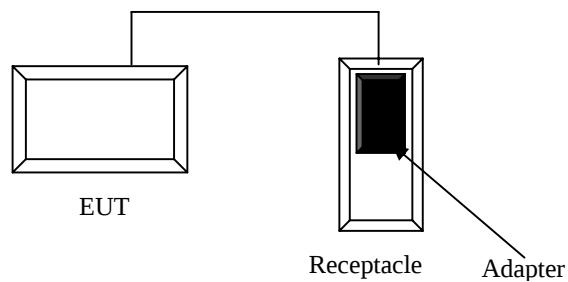

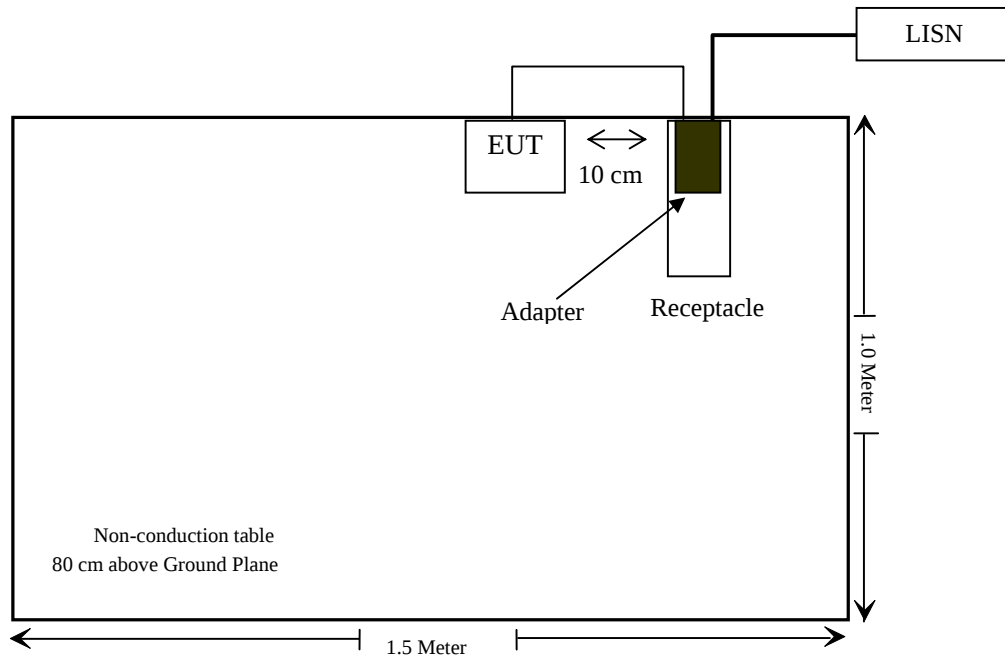Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1), §2.1093	RF Exposure	Compliant**
§15.203	Antenna Requirement	Compliant
§15.207 (a)	Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliant*
§15.247 (a)(1)	20 dB Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band Edges	Compliant

Note: *With measurement uncertainty!

** Please refer to the SAR report number: R0911111-FCC-SAR

CFR47 §15.247 (i) & §2.1093 – RF EXPOSURE

Applicable Standard

§1.1307 and §2.1093.

Test Result

Compliance

The EUT is a portable device, thus requires SAR evaluation; please refer to BACL SAR Report: R0911111-FCC-SAR.

FCC §15.203 - ANTENNA REQUIREMENT

Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an integral antenna soldered to the PCB, which in accordance to section 15.203, the maximum gain is 1.6 dBi; please refer to the internal photos.

Result: Compliant.

FCC §15.207(a) - CONDUCTED EMISSIONS

Applicable Standard


CFR47 §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB.

EUT Setup

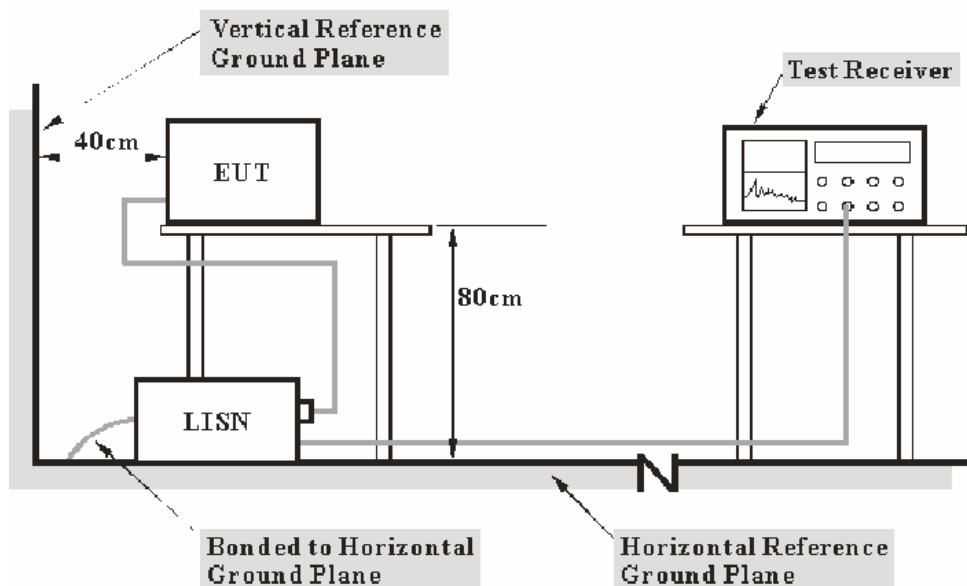

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2009-04-28	2010-04-27
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2009-04-28	2010-04-27

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the LISN

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

Transmitting mode: 7.70 dB at 0.3050 MHz in the Line conductor mode
Charging mode: 7.30 dB at 0.3000 MHz in the Neutral conductor mode

Test Data**Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Bruce Zhang on 2009-10-15 and 2009-12-08.

Test Mode: Transmitting

Line Conducted Emissions				FCC Part 15.207	
Frequency (MHz)	Amplitude (dBμV)	Detector (QP/AV)	Conductor (Line/Neutral)	Limit (dBμV)	Margin (dB)
0.3050	52.40	QP	Line	60.10	7.70
0.6150	37.50	AV	Neutral	46.00	8.50
0.3100	41.20	AV	Neutral	50.00	8.80
0.3050	41.10	AV	Line	50.10	9.00
0.6750	36.70	AV	Neutral	46.00	9.30
0.6150	46.00	QP	Neutral	56.00	10.00
0.5550	35.60	AV	Neutral	46.00	10.40
0.6750	45.20	QP	Neutral	56.00	10.80
0.5550	44.90	QP	Neutral	56.00	11.10
0.3100	48.70	QP	Neutral	60.00	11.30
1.1700	44.40	QP	Line	56.00	11.60
1.5350	43.00	QP	Line	56.00	13.00
0.6150	42.00	QP	Line	56.00	14.00
0.6150	31.20	AV	Line	46.00	14.80
0.3700	42.90	QP	Neutral	58.50	15.60
0.3700	32.90	AV	Neutral	48.50	15.60
1.1700	27.90	AV	Line	46.00	18.10
29.2000	41.50	QP	Neutral	60.00	18.50
29.0550	41.50	QP	Line	60.00	18.50
29.2000	30.30	AV	Neutral	50.00	19.70
1.5350	26.20	AV	Line	46.00	19.80
0.1850	43.40	QP	Line	64.30	20.90
28.8800	28.90	AV	Line	50.00	21.10
0.1850	32.20	AV	Line	54.30	22.10

Test Mode: Charging

Line Conducted Emissions				FCC Part 15.207	
Frequency (MHz)	Amplitude (dB μ V)	Detector (QP/AV)	Conductor (Line/Neutral)	Limit (dB μ V)	Margin (dB)
0.3000	52.90	QP	Neutral	60.20	7.30
30.0000	51.70	QP	Neutral	60.00	8.30
29.9450	51.40	QP	Line	60.00	8.60
0.3000	41.10	AV	Neutral	50.20	9.10
30.0000	40.20	AV	Neutral	50.00	9.80
0.3000	38.70	AV	Line	50.20	11.50
0.3400	47.30	QP	Neutral	59.20	11.90
0.3000	48.20	QP	Line	60.20	12.00
0.3200	46.50	QP	Neutral	59.70	13.20
0.3400	35.90	AV	Neutral	49.20	13.30
0.3200	35.10	AV	Neutral	49.70	14.60
30.0000	34.80	AV	Line	50.00	15.20
0.3400	34.00	AV	Line	49.20	15.20
0.3400	43.20	QP	Line	59.20	16.00
0.6000	39.50	QP	Neutral	56.00	16.50
0.6000	28.30	AV	Neutral	46.00	17.70
0.6000	38.20	QP	Line	56.00	17.80
0.6400	38.00	QP	Line	56.00	18.00
0.6000	26.10	AV	Line	46.00	19.90
0.6400	24.50	AV	Line	46.00	21.50
0.1800	42.50	QP	Neutral	64.50	22.00
0.1800	31.70	AV	Neutral	54.50	22.80
0.1800	28.90	AV	Line	54.50	25.60
0.1800	38.50	QP	Line	64.50	26.00


Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.

Line for transmitting mode:Conducted Emission
FCC PART 15


15. Oct 09 10:10

EUT: Baby Monitor
M/N: BM-01
Op Cond: TELEAN
Operator: Transmitting
Test Spec: Bruce
AC 120V/60Hz L
Comment: Temp: 25 Hum: 55%
BACL

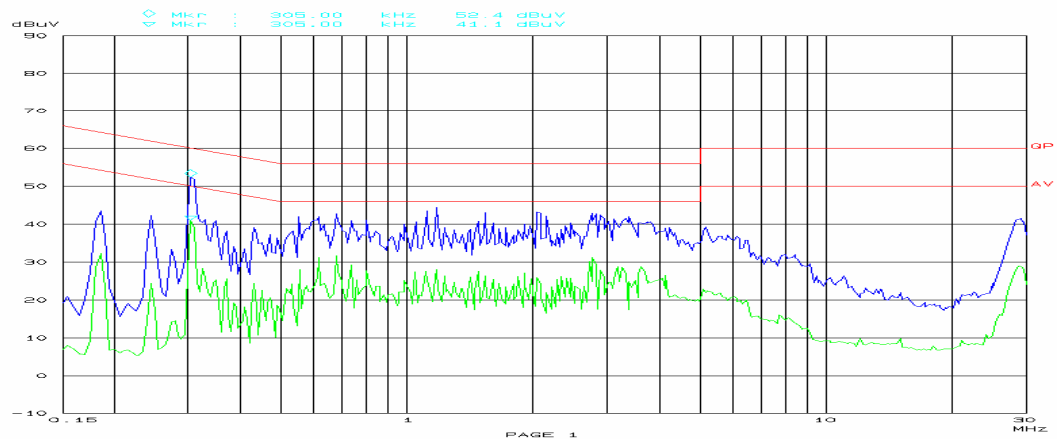**Neutral for transmitting mode:**Conducted Emission
FCC PART 15

15. Oct 09 09:47


EUT: Baby Monitor
M/N: BM-01
Op Cond: TELEAN
Operator: Transmitting
Test Spec: Bruce
AC 120V/60Hz N
Comment: Temp: 25 Hum: 55%
BACL

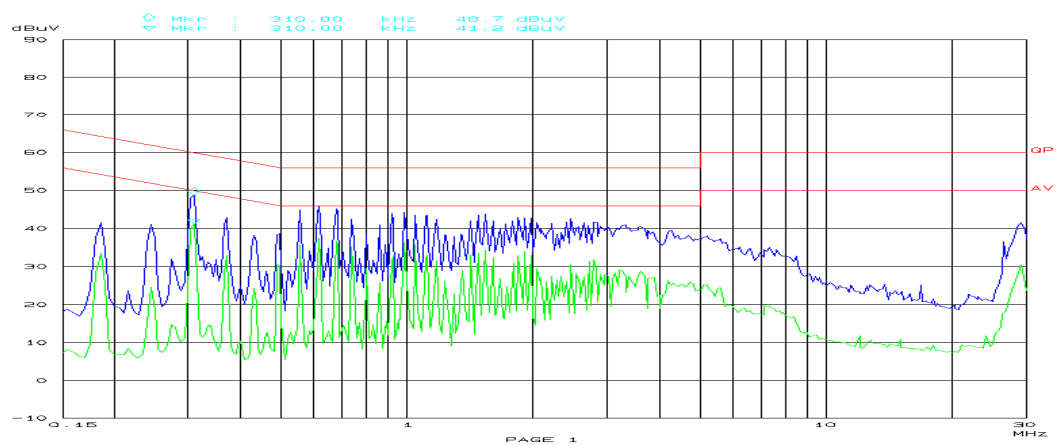

Line for charging model:Conducted Emission
FCC Part 15


08. Dec 09 14:40

EUT: BABY MONITOR M/N: BM-01
Manuf: TELEAN
Op Cond: charging
Operator: BRUCE
Test Spec: AC 120V/60Hz L
Comment: Tem: 25 Hum: 56%
BACL

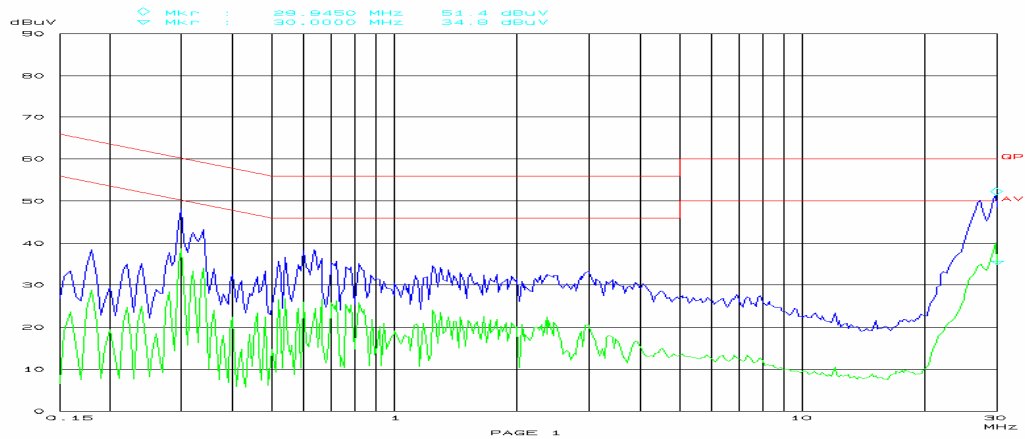**Neutral for charging mode:**Conducted Emission
FCC Part 15

08. Dec 09 14:55

EUT: BABY MONITOR M/N: BM-01
Manuf: TELEAN
Op Cond: charging
Operator: BRUCE
Test Spec: AC 120V/60Hz N
Comment: Tem: 25 Hum: 56%
BACL

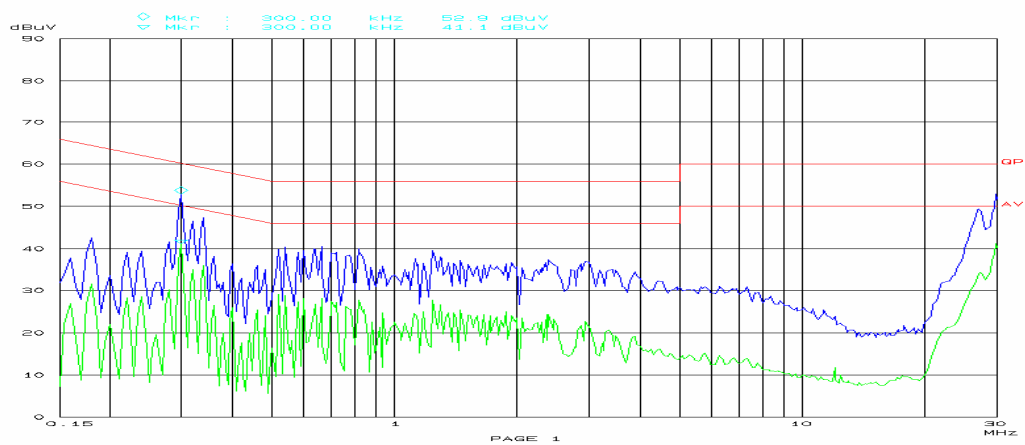

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB.

EUT Setup

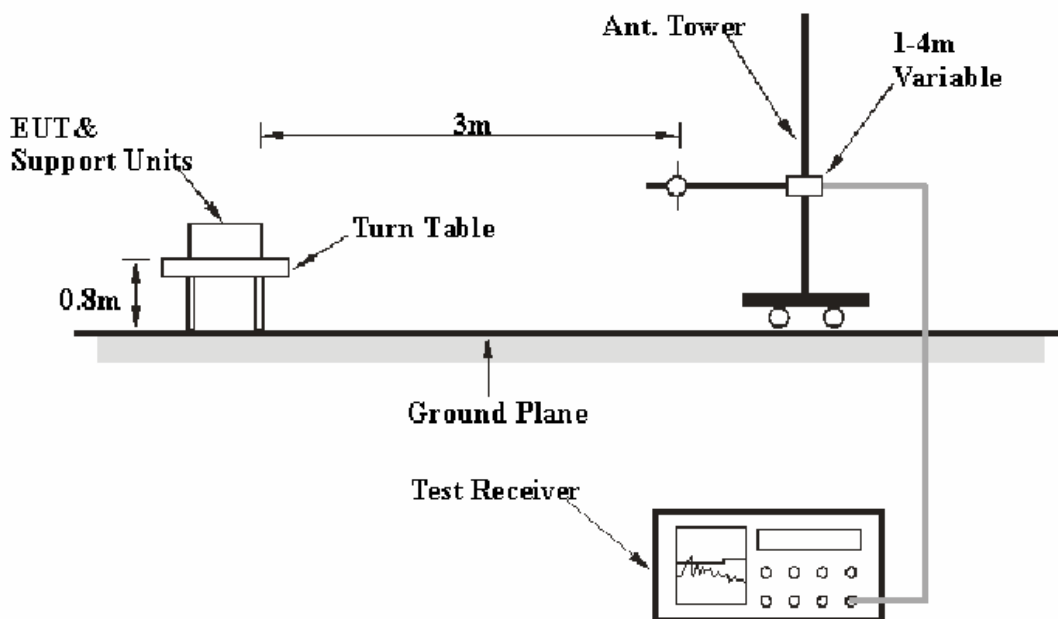

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Dectector</i>
30MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	AV

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2009-08-02	2010-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-24	2010-11-23
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2009-03-11	2010-03-11
HP	Amplifier	8449B	3008A00277	2009-09-12	2010-09-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2009-05-05	2010-05-04
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2009-07-08	2010-07-08

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz and peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

Below 1 GHz:

Transmitting mode: 6.4 dB at 767.976000 MHz in the **Vertical** polarization
Charging mode: 7.6 dB at 144.005000 MHz in the **Vertical** polarization

Above 1 GHz:

Low Channel: 6.88 dB at 2314.200 MHz in the **Vertical** polarization, for PK
Middle Channel: 7.28 dB at 2341.900 MHz in the **Vertical** polarization, for PK
High Channel: 7.16 dB at 2484.600 MHz in the **Vertical** polarization, for PK


Low Channel: 39.16 dB at 2314.200 MHz in the **Vertical** polarization, for Ave
Middle Channel: 38.64 dB at 2341.900 MHz in the **Vertical** polarization, for Ave
High Channel: 40.20 dB at 2372.300 MHz in the **Vertical** polarization, for Ave

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	52 %
ATM Pressure:	100.0kPa


The testing was performed by Bruce Zhang on 2009-10-22 and 2009-12-09.

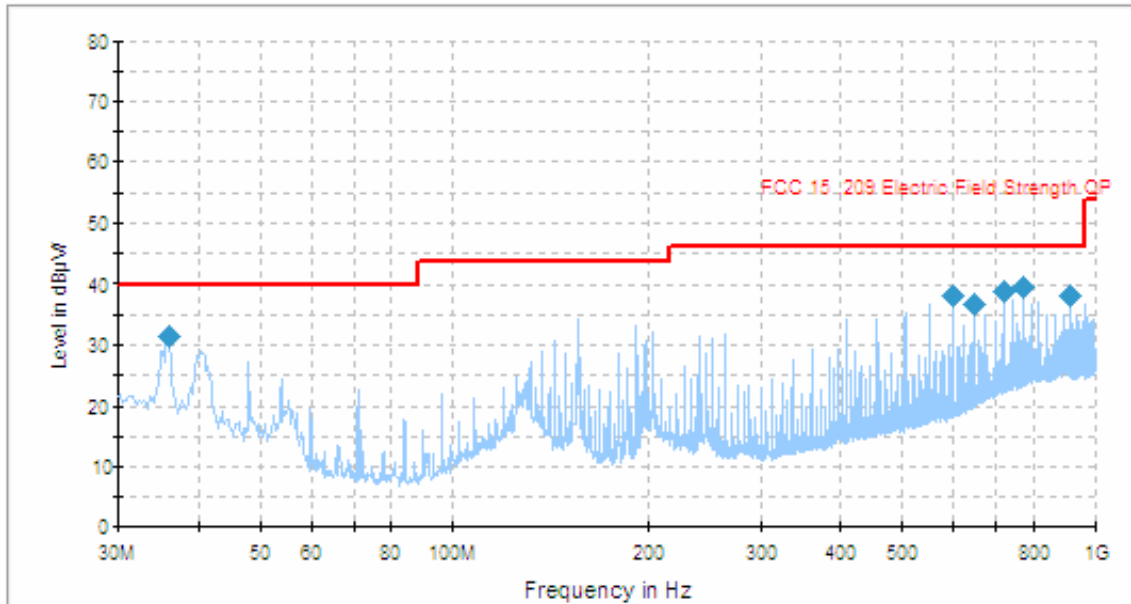Below 1 GHz:*Test Mode: Transmitting (worse case)*

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (degree)	Correction Factor (dB)	Limit (dBμV/m)	Margin (dB)
767.976000	39.6	97.0	V	0.0	-2.3	46.0	6.4
719.978750	39.0	99.0	V	0.0	-4.0	46.0	7.0
911.967750	38.3	115.0	V	163.0	-0.7	46.0	7.7
599.985500	38.2	97.0	V	67.0	-8.5	46.0	7.8
35.990000	31.5	100.0	V	220.0	-10.6	40.0	8.5
647.970500	36.9	100.0	V	49.0	-6.4	46.0	9.1

Test Mode: Charging (worse case)

Auto Test(FCC 15 Class B)

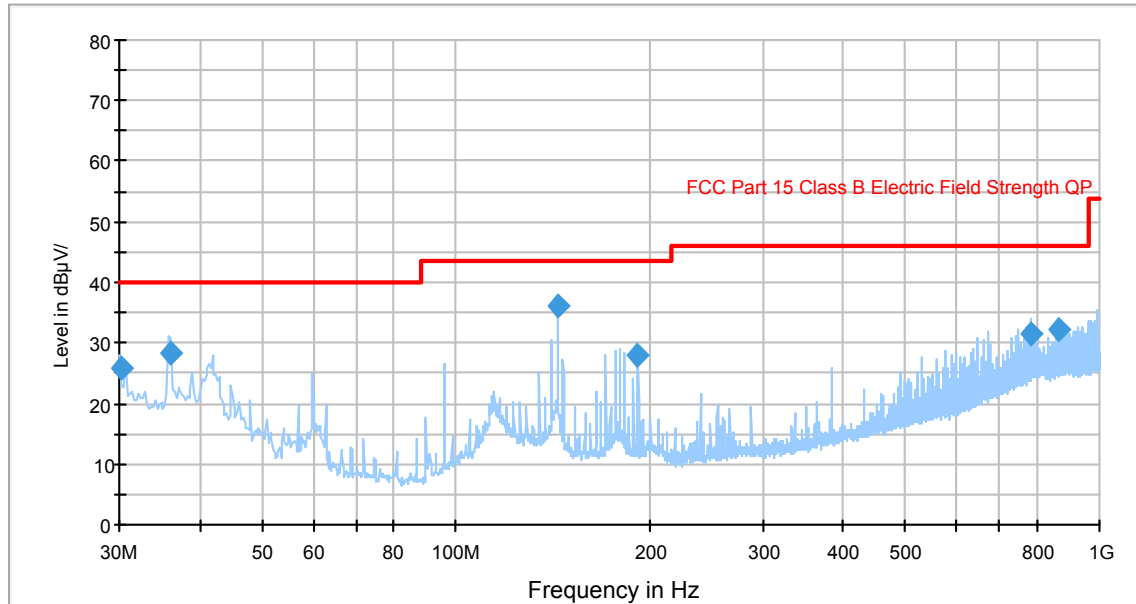

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (degree)	Correction Factor (dB)	Limit (dBμV/m)	Margin (dB)
144.005000	35.9	103.0	V	334.0	-14.8	43.5	7.6
35.968750	28.3	102.0	V	33.0	-10.5	40.0	11.7
863.973000	32.2	103.0	H	3.0	-1.1	46.0	13.8
30.240500	25.9	130.0	V	3.0	-6.1	40.0	14.1
779.968000	31.7	102.0	V	271.0	-1.9	46.0	14.3
191.976250	28.1	103.0	V	33.0	-15.5	43.5	15.4

Above 1 GHz:

Indicated		Detector (PK/AV)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209			
Frequency (MHz)	S.A. Reading (dBμV/m)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
Low Channel (2410.875 MHz)												
2314.200	64.13	PK	200	1.0	V	29.1	5.69	31.8	67.12	74	6.88	spurious
7232.625	46.88	PK	50	1.2	H	36.6	11.07	31.0	63.55	74	10.45	harmonic
4821.750	51.30	PK	360	1.2	H	33.8	8.79	30.8	63.09	74	10.91	harmonic
4821.750	50.25	PK	50	1.3	V	33.5	8.79	30.8	61.74	74	12.26	harmonic
2314.200	58.88	PK	194	1.1	H	28.9	5.69	31.8	61.67	74	12.33	spurious
7232.625	44.25	PK	360	1.1	V	37.0	11.07	31.0	61.32	74	12.68	harmonic
2506.200	56.18	PK	195	1.0	V	29.1	5.69	30.6	60.37	74	13.63	spurious
2506.200	50.21	PK	175	1.5	H	28.9	5.69	30.6	54.2	74	19.80	spurious
Middle Channel (2437.875 MHz)												
2341.900	63.73	PK	197	1.0	V	29.1	5.69	31.8	66.72	74	7.28	spurious
7313.625	46.96	PK	63	1.4	H	36.6	11.07	31.0	63.63	74	10.37	harmonic
7313.625	45.86	PK	68	1.4	V	37.0	11.07	31.0	62.93	74	11.07	harmonic
4875.750	51.07	PK	0	1.5	H	33.8	8.79	30.8	62.86	74	11.14	harmonic
4875.750	50.38	PK	60	1.4	V	33.5	8.79	30.8	61.87	74	12.13	harmonic
2341.900	58.58	PK	194	1.0	H	28.9	5.69	31.8	61.37	74	12.63	spurious
2533.900	54.38	PK	215	1.0	V	29.1	5.69	30.6	58.57	74	15.43	spurious
2533.900	49.75	PK	174	1.5	H	28.9	5.69	30.6	53.74	74	20.26	spurious
High Channel (2468.25 MHz)												
2484.600	63.85	PK	200	1.0	V	29.1	5.69	31.8	66.84	74	7.16	spurious
2372.300	62.36	PK	191	1.0	V	29.1	5.69	31.8	65.35	74	8.65	spurious
4936.500	51.80	PK	320	1.6	H	33.8	8.79	30.8	63.59	74	10.41	harmonic
2515.700	58.86	PK	162	1.5	H	28.9	5.69	30.6	62.85	74	11.15	spurious
7404.750	46.09	PK	52	1.4	H	36.3	11.07	31.0	62.46	74	11.54	harmonic
4936.500	50.36	PK	51	1.0	V	33.5	8.79	30.8	61.85	74	12.15	harmonic
7404.750	44.53	PK	350	1.0	V	37.0	11.07	31.0	61.6	74	12.40	harmonic
2484.600	57.64	PK	196	1.0	H	28.9	5.69	31.8	60.43	74	13.57	spurious
2372.300	57.16	PK	196	1.0	H	28.9	5.69	31.8	59.95	74	14.05	spurious
2515.700	55.46	PK	195	1.0	V	29.1	5.69	30.6	59.65	74	14.35	spurious

Indicated		Detector (PK/AV)	Table Angle Degree	Antenna		Correction Factor (dB)	Duty Cycle Factor (dB)	FCC Part 15.247/15.209			
Frequency (MHz)	S.A. Reading (dBμV/m)			Height (m)	Polar (H/V)			Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
Low Channel (2410.875 MHz)											
2314.200	64.13	PK	200	1.0	V	2.99	-45.88	21.24	54	32.76	spurious
7232.625	46.88	PK	50	1.2	H	16.67	-45.88	17.67	54	36.33	spurious
4821.750	51.30	PK	360	1.2	H	11.79	-45.88	17.21	54	36.79	spurious
4821.750	50.25	PK	50	1.3	V	11.49	-45.88	15.86	54	38.14	harmonic
2314.200	58.88	PK	194	1.1	H	2.79	-45.88	15.79	54	38.21	harmonic
7232.625	44.25	PK	360	1.1	V	17.07	-45.88	15.44	54	38.56	harmonic
2506.200	56.18	PK	195	1.0	V	4.19	-45.88	14.49	54	39.51	harmonic
2506.200	50.21	PK	175	1.5	H	3.99	-45.88	8.32	54	45.68	spurious
Middle Channel (2437.875 MHz)											
2341.900	63.73	PK	197	1.0	V	2.99	-45.88	20.84	54	33.16	spurious
7313.625	46.96	PK	63	1.4	H	16.67	-45.88	17.75	54	36.25	spurious
7313.625	45.86	PK	68	1.4	V	17.07	-45.88	17.05	54	36.95	harmonic
4875.750	51.07	PK	0	1.5	H	11.79	-45.88	16.98	54	37.02	spurious
4875.750	50.38	PK	60	1.4	V	11.49	-45.88	15.99	54	38.01	harmonic
2341.900	58.58	PK	194	1.0	H	2.79	-45.88	15.49	54	38.51	harmonic
2533.900	54.38	PK	215	1.0	V	4.19	-45.88	12.69	54	41.31	harmonic
2533.900	49.75	PK	174	1.5	H	3.99	-45.88	7.86	54	46.14	spurious
High Channel (2468.25 MHz)											
2484.600	63.85	PK	200	1.0	V	2.99	-45.88	20.96	54	33.04	spurious
2372.300	62.36	PK	191	1.0	V	2.99	-45.88	19.47	54	34.53	spurious
4936.500	51.80	PK	320	1.6	H	11.79	-45.88	17.71	54	36.29	spurious
2515.700	58.86	PK	162	1.5	H	3.99	-45.88	16.97	54	37.03	harmonic
7404.750	46.09	PK	52	1.4	H	16.37	-45.88	16.58	54	37.42	harmonic
4936.500	50.36	PK	51	1.0	V	11.49	-45.88	15.97	54	38.03	harmonic
7404.750	44.53	PK	350	1.0	V	17.07	-45.88	15.72	54	38.28	spurious
2484.600	57.64	PK	196	1.0	H	2.79	-45.88	14.55	54	39.45	spurious
2372.300	57.16	PK	196	1.0	H	2.79	-45.88	14.07	54	39.93	harmonic
2515.700	55.46	PK	195	1.0	V	4.19	-45.88	13.77	54	40.23	spurious

Note: Correction factor = Antenna Gain + Cable Loss – Pre-Amplifier Gain
Corrected Level = Reading + Correction factor + Duty Cycle Correction Factor.
Duty Cycle Correction Factor = $20 \log (\text{Duty Cycle}/T_p) = -45.88 \text{ dB}$

CFR47 §15.247(a)(1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

** The testing was performed by Bruce Zhang on 2009-10-12.*


Test Result: Compliant.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low Channel	2410.875	3.36	2.427	Pass
Adjacency Channel	2414.250			
Middle Channel	2437.875	3.36	2.427	Pass
Adjacency Channel	2441.250			
High Channel	2464.875	3.36	2.427	Pass
Adjacency Channel	2468.250			


Please refer to the following plots.

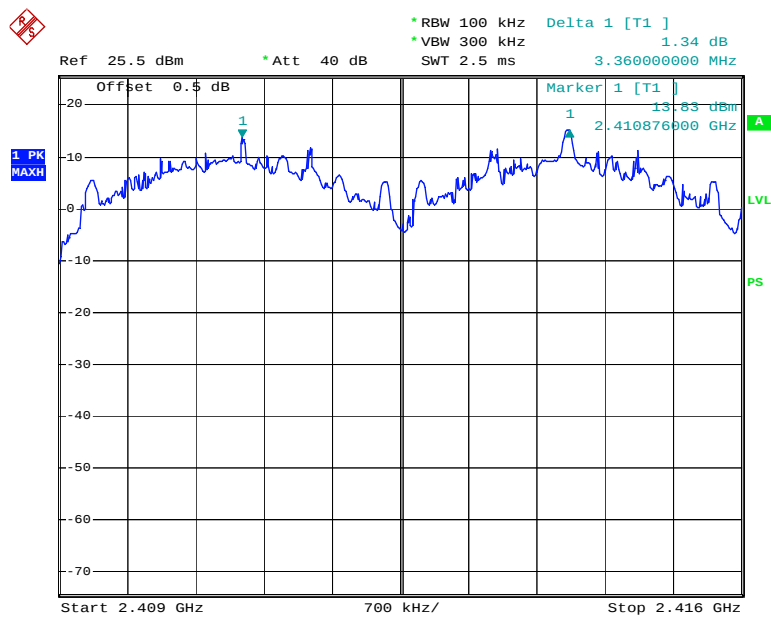Low Channel

Date: 12.OCT.2009 14:12:32

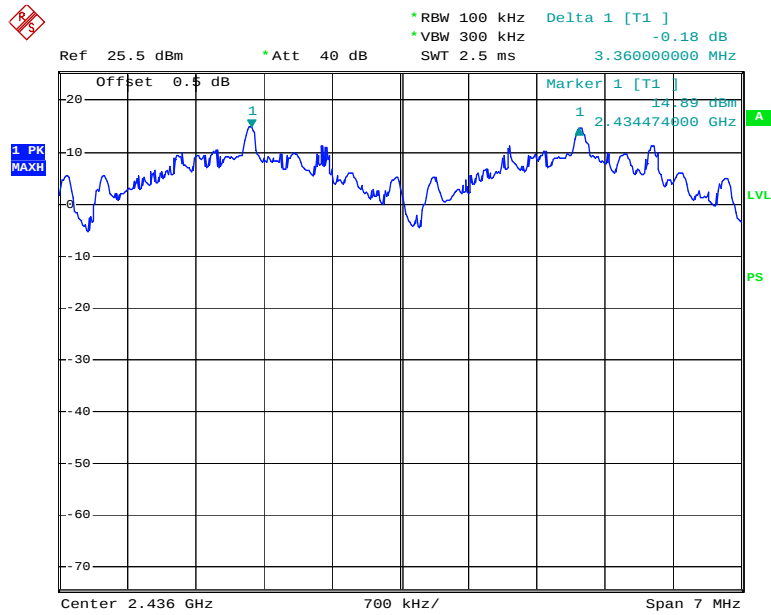Middle Channel

Date: 12.OCT.2009 14:29:18

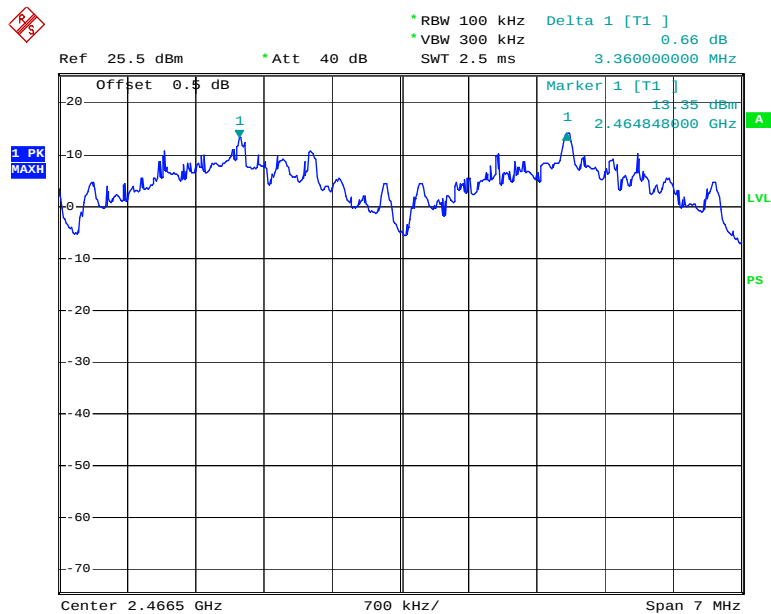High Channel

Date: 12.OCT.2009 14:41:22

CFR47 §15.247(a)(1) – 20 dB BANDWIDTH TESTING**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

** The testing was performed by Bruce Zhang on 2009-10-12.*

Test Result: Compliant.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low Channel	2410.875	3.640
Middle Channel	2437.875	3.640
High Channel	2468.250	3.640


Please refer to the following plots.

Low Channel

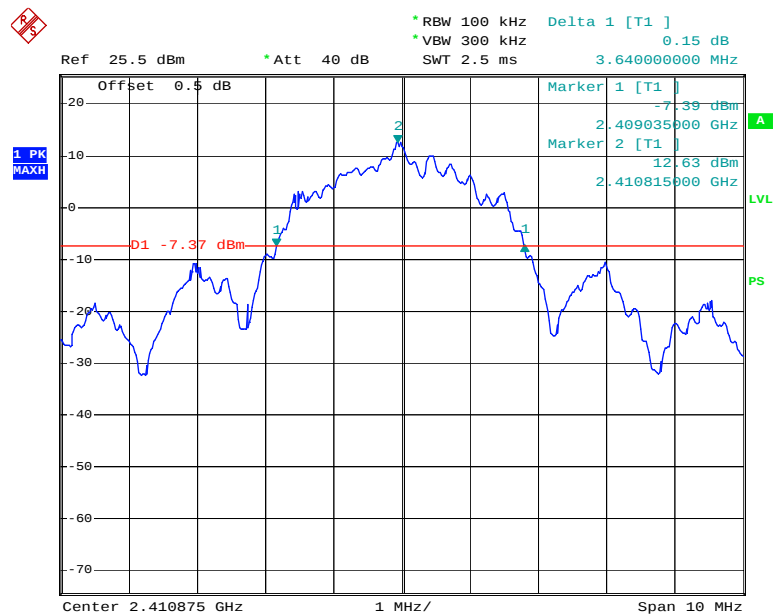


Date: 12.OCT.2009 13:41:47

Middle Channel

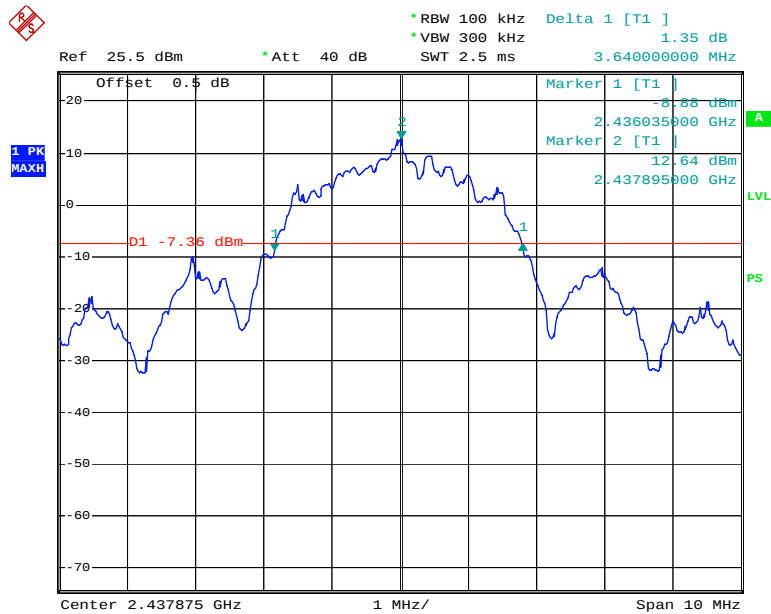

Date: 12.OCT.2009 13:44:06

High Channel

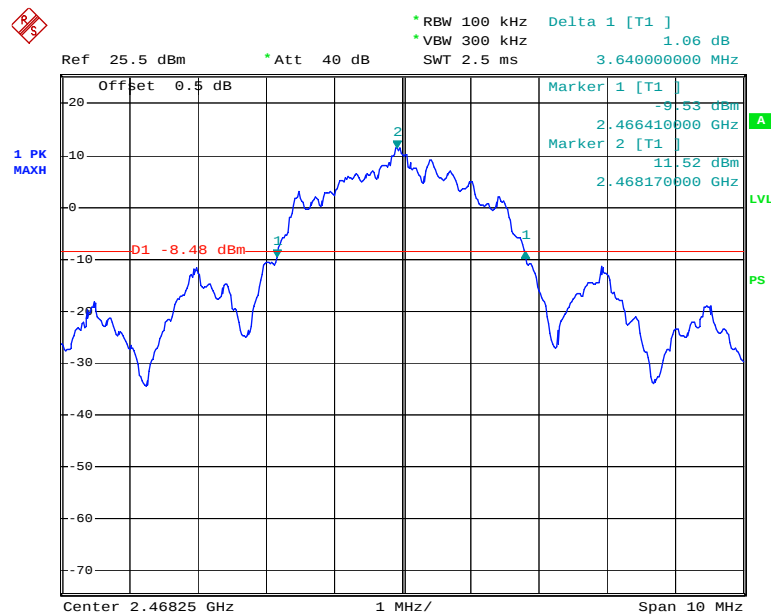

Date: 12.OCT.2009 13:50:49

CFR47 §15.247(a)(1)(iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa


The testing was performed by Bruce Zhang on 2009-10-12.

Test Result: Compliant.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	18	>15

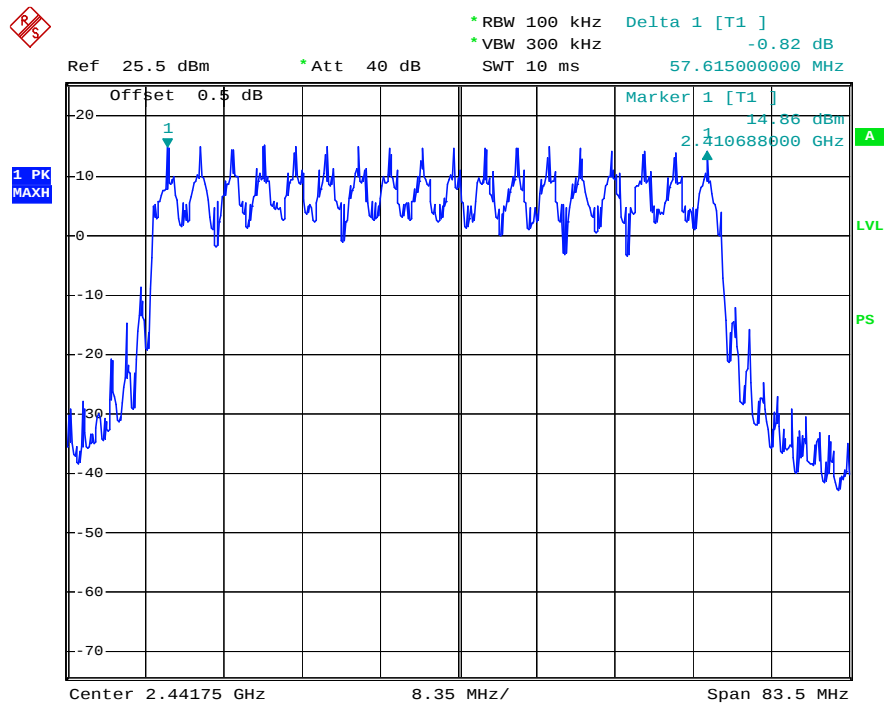Number of Hopping Channels

Date: 12.OCT.2009 16:23:19

CFR47 §15.247(a)(1)(iii) -TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/2/ number of hopping channels * (0.4×18s)
Hop rate=314.47/s (Base on 3180μs/each channel in the hopping information)

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Bruce Zhang on 2009-10-12.

Test Result: Compliant.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Pulse Width (ms)	Dwell Time (Sec)	Limit (Sec)	Result
Low Channel	0.510	0.0320	0.4	Pass
Mid Channel	0.508	0.0319	0.4	Pass
High Channel	0.510	0.0320	0.4	Pass

NOTE: Dwell time = Pulse time*314.47/2/18*(18*0.4s)


Please refer to the following plots.

Low Channel

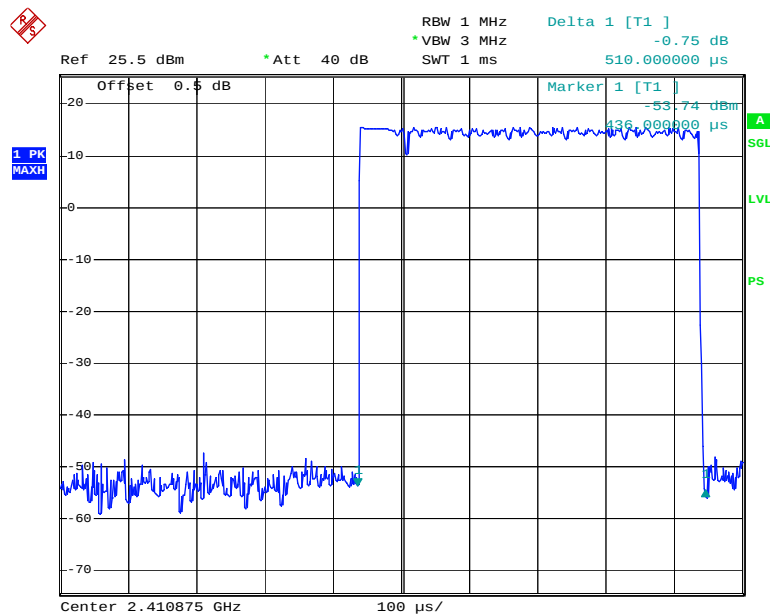


Date: 12.OCT.2009 14:45:32

Middle Channel

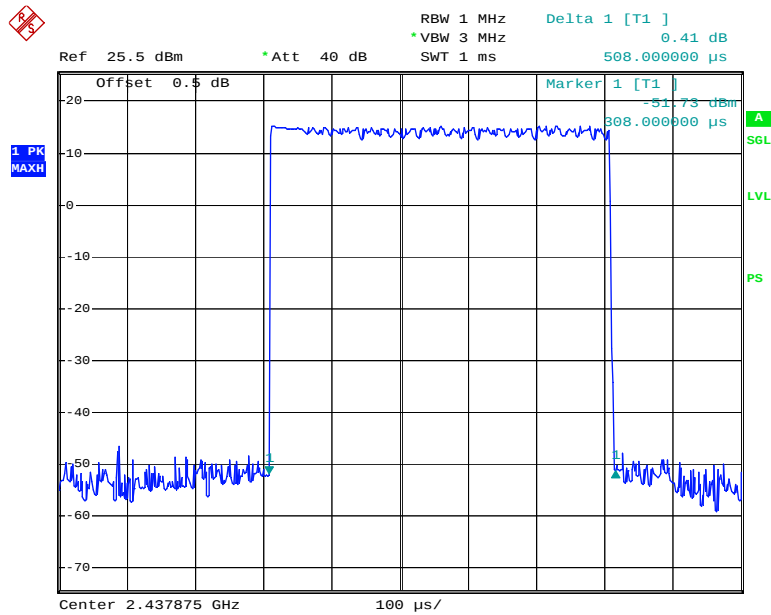

Date: 12.OCT.2009 14:46:30

High Channel

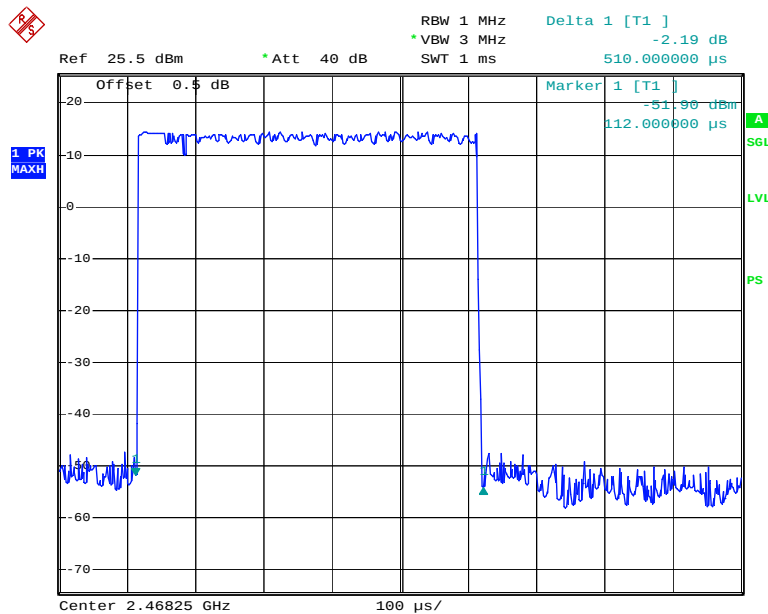

Date: 12.OCT.2009 14:52:28

CFR47 §15.247(b)(1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa


* The testing was performed by Bruce Zhang on 2009-10-12.

Test Result: Compliant.

Test Mode: Transmitting


Channel	Frequency (MHz)	Output Power		FCC Limit (mW)	Result
		(dBm)	(mW)		
Low	2410.875	15.86	38.547	1000	Pass
Mid	2437.875	15.55	35.892	1000	Pass
High	2468.250	15.18	32.960	1000	Pass

Low Channel

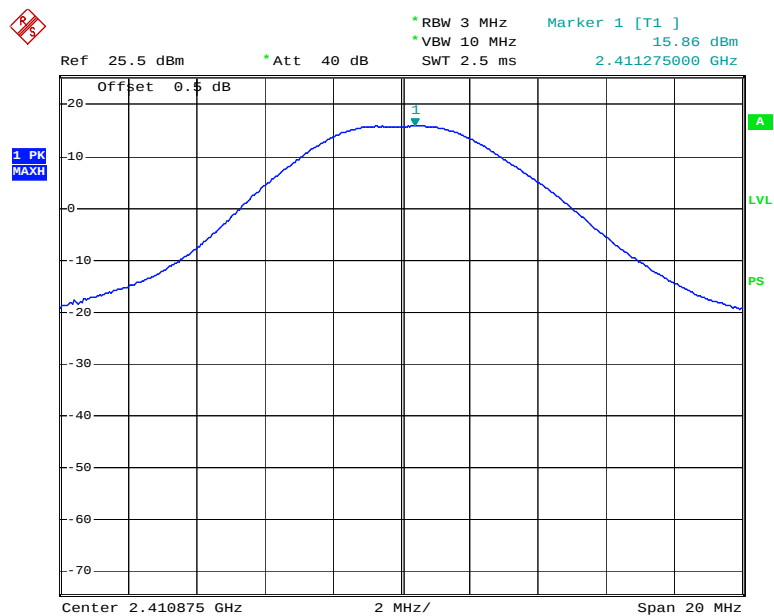


Date: 12.OCT.2009 15:44:57

Middle Channel

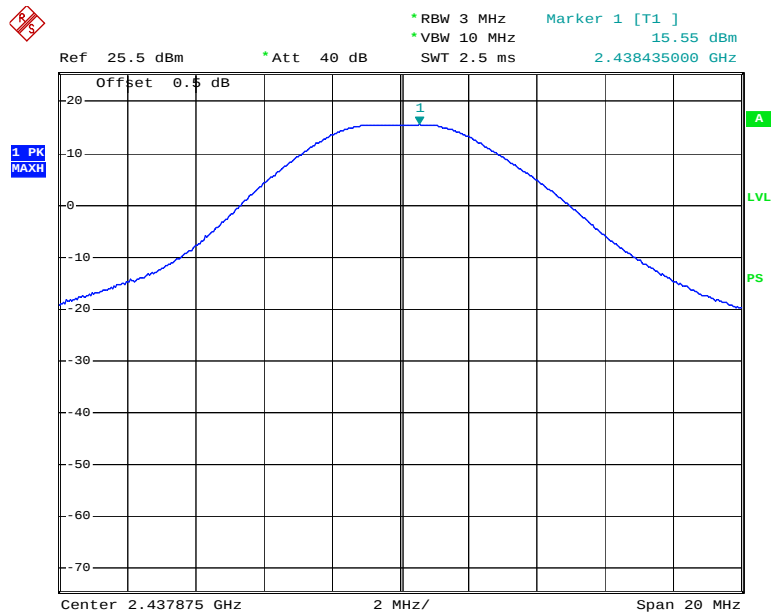

Date: 12.OCT.2009 15:44:13

High Channel

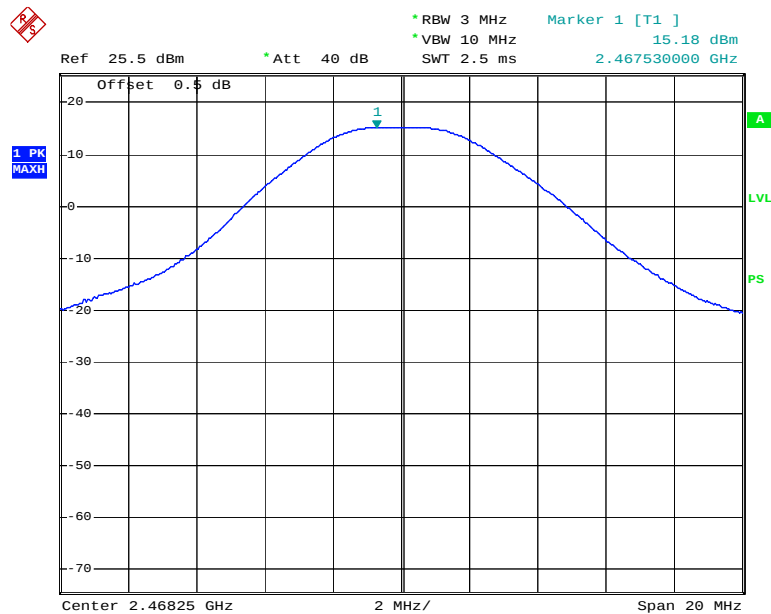

Date: 12.OCT.2009 15:43:32

CFR47 §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa


*The testing was performed by Bruce Zhang on 2009-10-12.

Test Result: Compliant


Test Mode: Transmitting

Frequency (MHz)	Delta Peak to Band Emission (dB)	Limit (dB)
2399.04	46.25	20
2484.74	46.44	20

Please refer to follow plots:

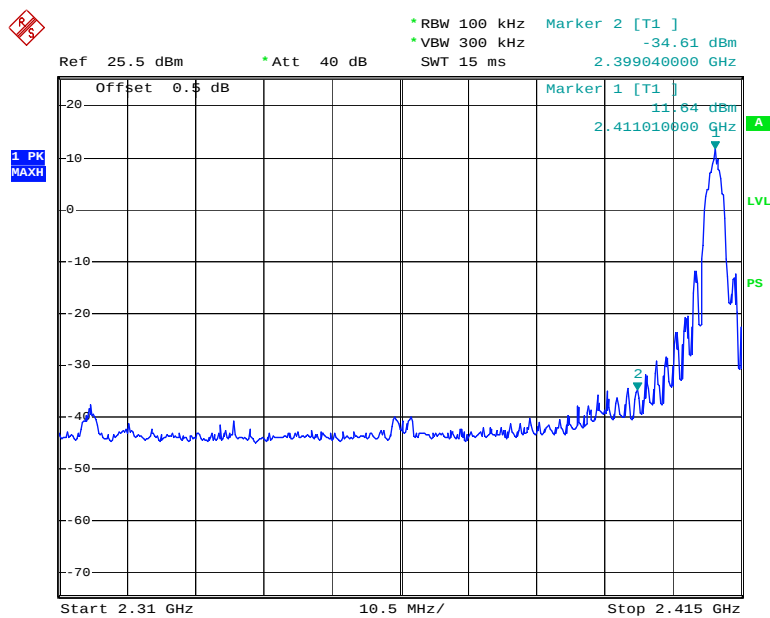Band Edge: Left Side

Date: 12.OCT.2009 13:55:47

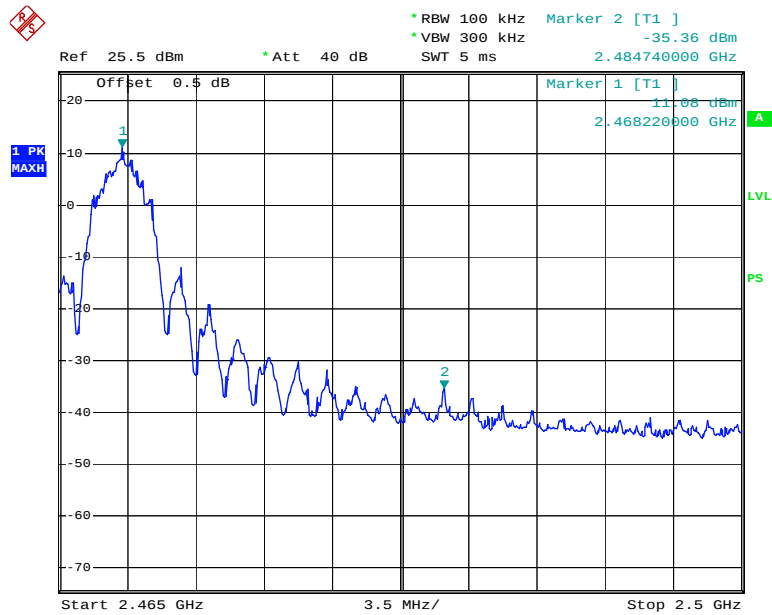Band Edge: Right Side

Date: 12.OCT.2009 13:57:13

******* END OF REPORT *******