



Engineering Solutions & Electromagnetic Compatibility Services

**Certification Application Report
FCC Part 15.247 & Industry Canada RSS-210**

Test Lab: Rhein Tech Laboratories, Inc. Phone: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 www.rheintech.com Herndon, VA 20170 E-Mail: atcbinfo@rheintech.com		Applicant: Vocollect, Inc. Phone: 412-349-2580 703 Rodi Road Fax: 412-829-1063 Pittsburgh, PA 15235 Contact: Joe Lesik	
FCC ID/ IC	MQO-TAP700-01/ 2570A-TAP70001	Test Report Date	November 14, 2012
Platform	N/A	RTL Work Order #	2012302
Model Name/ Model Number	T5 TERMINAL/ TAP700-01	RTL Quote Number	QRTL12-302A
American National Standard Institute	ANSI C63.4-2003 Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz		
FCC Classification	DTS – Part 15 Digital Transmission System (WLAN portion)		
FCC Rule Part(s)	FCC Rules Part 15.247: Operation within the bands 920-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz Direct Sequence System (10-01-05)		
Industry Canada	RSS-210: Low Power License-Exempt Communications Devices		
Digital Interface Information	Digital Interface was found to be compliant		
Frequency Range (MHz)	Output Power (W)	Frequency Tolerance	Emission Designator
2412-2462	0.093	N/A	10M3G7D
2412-2462	0.060	N/A	16M7G7D

* power is peak conducted

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, FCC 97-114, ANSI C63.4, and Industry Canada RSS-210.

Signature: 

Date: November 14, 2012

Typed/Printed Name: Desmond A. Fraser

Position: President

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANSI-ASQ National Accreditation Board/ACLASS. Refer to certificate and scope of accreditation AT-1445.

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. & Vocollect, Inc. The test results relate only to the item(s) tested.

Table of Contents

1	General Information	5
1.1	Scope	5
1.2	Description of EUT	5
1.3	Test Facility	5
1.4	Related Submittal(s)/Grant(s)	5
1.5	Modifications	5
2	Test Information	6
2.1	Description of Test Modes	6
2.2	Exercising the EUT	6
2.3	Test Result Summary.....	6
2.4	Test System Details	7
2.5	Configuration of Tested System.....	8
3	Peak Output Power – FCC §15.247(b)(1); RSS-210 §A8.4(4).....	9
3.1	Power Output Test Procedure.....	9
3.2	Power Output Test Data.....	9
4	Compliance with the Band Edge – FCC §15.247(d); RSS-210 §2.2.....	10
4.1	Band Edge Test Procedure.....	10
4.2	Restricted Band Edge Test Results	11
4.2.1	Calculation of Lower Band Edge – 802.11b.....	11
4.2.2	Calculation of Upper Band Edge – 802.11b.....	12
4.3	Restricted Band Edge Test Results	14
4.3.1	Calculation of Lower Band Edge – 802.11g.....	14
4.3.2	Calculation of Upper Band Edge – 802.11g.....	15
5	Antenna Conducted Spurious Emissions – FCC §15.247(d); RSS-Gen.....	16
5.1	Antenna Conducted Spurious Emissions Test Procedures	16
5.2	Antenna Conducted Spurious Emissions Test Results	16
6	6 dB Bandwidth – FCC §15.247(a)(2); RSS-210 §A8.2	17
6.1	6 db Bandwidth Test Procedure – Minimum 6 db Bandwidth	17
6.2	6 db Bandwidth Test Results	17
7	Power Spectral Density – FCC §15.247(e); RSS-210 §A8.2	24
7.1	Power Spectral Density Test Procedure	24
7.2	Power Spectral Density Test Data	24
8	Conducted Emissions Measurement Limits – FCC §15.207; RSS-Gen	31
8.1	Limits of Conducted Emissions Measurement.....	31
8.2	Conducted Emissions Measurement Test Procedure.....	31
8.3	Conducted Emissions Test Results	32
8.3.1	Conducted Emissions Transmit Channel 6 DSSS	32
8.3.2	Conducted Emissions Receive Channel 6 DSSS	33
9	Radiated Emissions – FCC §15.209; RSS-210 §A8.5 and RSS-Gen	34
9.1	Limits of Radiated Emissions Measurement.....	34
9.2	Radiated Emissions Measurement Test Procedure.....	34
9.3	Radiated Emissions Test Results	36
9.3.1	Radiated Emissions Digital/Receiver Test Data	36
9.3.2	Radiated Emissions Harmonics/Spurious Test Data – 802.11b	37
9.3.3	Radiated Emissions Harmonics/Spurious Test Data - 802.11g.....	38
10	Conclusion	40

Figure Index

Figure 2-1:	Configuration of System Under Test.....	8
-------------	---	---

Table Index

Table 2-1:	Channels Tested	6
Table 2-2:	Test Result Summary – FCC Part 15, Subpart C (Section 15.247) – DSSS WLAN	6
Table 2-3:	Equipment Under Test	7
Table 3-1:	Power Output Test Equipment.....	9
Table 3-2:	Power Output Test Data – DSSS WLAN 802.11b	9
Table 3-3:	Power Output Test Data – DSSS WLAN 802.11g	9
Table 4-1:	Band Edge Test Equipment - 802.11b	10
Table 4-2:	Band Edge Test Equipment – 802.11g	13
Table 5-1:	Antenna Conducted Spurious Test Equipment.....	16
Table 6-1:	6 dB Bandwidth Test Equipment.....	17
Table 6-2:	6 dB Bandwidth Test Data – 802.11b.....	17
Table 6-3:	6 dB Bandwidth Test Data –802.11g.....	17
Table 7-1:	Power Spectral Density Test Equipment	24
Table 7-2:	Power Spectral Density Test Data – 802.11b	24
Table 7-3:	Power Spectral Density Test Data –802.11g	24
Table 8-1:	Conducted Emissions Test Equipment	31
Table 8-2:	Conducted Emissions Transmit Channel 6 DSSS Neutral Side (Line 1).....	32
Table 8-3:	Conducted Emissions Transmit Channel 6 DSSS Hot Side (Line 2).....	32
Table 8-4:	Conducted Emissions Receive Channel 6 DSSS Neutral Side (Line 1).....	33
Table 8-5:	Conducted Emissions Receive Channel 6 DSSS Hot Side (Line 2).....	33
Table 9-1:	Radiated Emissions Test Equipment	35
Table 9-2:	Digital/Receiver Radiated Emissions	36
Table 9-3:	Radiated Emissions Harmonics/Spurious Channel 1 (TX Frequency: 2412 MHz).....	37
Table 9-4:	Radiated Emissions Harmonics/Spurious Channel 6 (TX Frequency: 2437 MHz).....	37
Table 9-5:	Radiated Emissions Harmonics/Spurious Channel 11 (TX Frequency: 2462 MHz).....	37
Table 9-6:	Radiated Emissions Harmonics/Spurious Channel 1 (TX Frequency: 2412 MHz).....	38
Table 9-7:	Radiated Emissions Harmonics/Spurious Channel 6 (TX Frequency: 2437 MHz).....	38
Table 9-8:	Radiated Emissions Harmonics/Spurious Channel 11 (TX Frequency: 2462 MHz).....	38
Table 9-9:	Radiated Emissions Test Equipment – 802.11g	39

Plot Index

Plot 4-1:	Lower Band Edge: Average Measurement Channel 1 (TX Frequency: 2412 MHz).....	11
Plot 4-2:	Upper Band Edge: Average Measurement Channel 11 (TX Frequency: 2462 MHz).....	12
Plot 4-3:	Lower Band Edge: Average Measurement Channel 1 (TX Frequency: 2412 MHz).....	14
Plot 4-4:	Upper Band Edge: Average Measurement Channel 11 (TX Frequency: 2462 MHz).....	15
Plot 6-1:	6 dB Bandwidth Channel 1 (TX Frequency: 2412 MHz).....	18
Plot 6-2:	6 dB Bandwidth Channel 6 (TX Frequency: 2437 MHz).....	19
Plot 6-3:	6 dB Bandwidth Channel 11 (TX Frequency: 2462 MHz).....	20
Plot 6-4:	6 dB Bandwidth Channel 1 (TX Frequency: 2412 MHz).....	21
Plot 6-5:	6 dB Bandwidth Channel 6 (TX Frequency: 2437 MHz).....	22
Plot 6-6:	6 dB Bandwidth Channel 11 (TX Frequency: 2462 MHz).....	23
Plot 7-1:	Power Spectral Density: Channel 1 (2412 MHz)	25
Plot 7-2:	Power Spectral Density: Channel 6 (2437 MHz)	26
Plot 7-3:	Power Spectral Density: Channel 11 (2462 MHz)	27
Plot 7-4:	Power Spectral Density: Channel 1 (2412 MHz)	28
Plot 7-5:	Power Spectral Density: Channel 6 (2437 MHz)	29
Plot 7-6:	Power Spectral Density: Channel 11 (2462 MHz)	30

Appendix Index

Appendix A:	RF Exposure Compliance	41
Appendix B:	Agency Authorization Letter	42
Appendix C:	FCC Confidentiality Request Letter.....	43
Appendix D:	IC Letters	44
Appendix E:	IC Confidentiality Request Letter	45
Appendix F:	Canadian Representative Attestation Letter	46
Appendix G:	ID Label and Label Location	47
Appendix H:	Technical Operational Description	48
Appendix I:	Schematics.....	49
Appendix J:	Block Diagram	50
Appendix K:	Manual.....	51
Appendix L:	Test Photographs	52
Appendix M:	External Photographs.....	56
Appendix N:	Internal Photographs	57

Photograph Index

Photograph 1:	Radiated Emissions Testing – Front View	52
Photograph 2:	Radiated Emissions Testing – Back View.....	53
Photograph 3:	Conducted Emissions Testing – Front View	54
Photograph 4:	Conducted Emissions Testing – Back View.....	55

1 General Information

1.1 Scope

Applicable Standards:

- FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.
- Industry Canada RSS-210: Low Power License-Exempt Communications Devices

1.2 Description of EUT

Equipment Under Test	Transceiver
Model Name / Model #	T5 TERMINAL / TAP700-01
Power Supply	Battery (Model: BT-700)
Modulation Type	DSSS/WLAN (802.11 b/g)
Transfer Rate	54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, and 1 Mbps
Frequency Range	2412–2462 MHz
Antenna Connector Type	Internal
Antenna Type	Internal

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 2003).

1.4 Related Submittal(s)/Grant(s)

This is an original certification application for Vocollect, Inc. Model #: TAP700-01, FCC ID: MQO-TAP700-01, IC: 2570A-TAP70001.

Please note that the EUT tested in this application is electrically identical to the EUT tested under FCC ID: MQOTT700-20000, IC: 2570A-TT700200, granted on 07/10/2006, with subsequent Class II permissive change granted on 2/19/2007, except for the internal Bluetooth module, which has been replaced with a new module. Therefore, the DTS results originally tested for the original application and subsequent Class II permissive change are still applicable. All test data information was verified and is still within the original test report's parameters.

Because of the replacement of the Bluetooth module, new DSS testing was performed and is presented in a separate test report. New SAR testing was also performed to reflect FCC KDB 248227 802.11a/b/g test procedures, which were not in effect at the time of the original certification of FCC ID: MQOTT700-20000, IC: 2570A-TT700200.

1.5 Modifications

No modifications were required for compliance.

2 Test Information

2.1 Description of Test Modes

In accordance with FCC 15.31(m), and because the EUT utilizes an operating band greater than 10 MHz, the following frequencies were tested:

Table 2-1: Channels Tested

Channel	Frequency
1	2412
6	2437
11	2462

2.2 Exercising the EUT

The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted. There were no deviations from the test standard(s) and/or methods. The test results reported relate only to the item tested.

2.3 Test Result Summary

Table 2-2: Test Result Summary – FCC Part 15, Subpart C (Section 15.247) – DSSS WLAN

Standard	Test	Pass/Fail or N/A
FCC 15.207	AC Power Conducted Emissions	Pass
FCC 15.209	Radiated Emissions	Pass
FCC 15.247(a)(2)	6 dB Bandwidth	Pass
FCC 15.247(b)	Maximum Peak Power Output	Pass
FCC 15.247(d)	Antenna Conducted Spurious Emissions	Pass
FCC 15.247(e)	Power Spectral Density	Pass
FCC 15.247(d)	Band Edge Measurement	Pass

2.4 Test System Details

The test samples were received on May 26, 2006 and February 1, 2007. The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in the following tables.

Table 2-3: Equipment Under Test

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
T5 Talkman WLAN/Bluetooth terminal	Vocollect, Inc.	TT-700-100_R WF	REV C 30	MQOTT700-20000	N/A	17248
T5 Talkman WLAN/Bluetooth terminal	Vocollect, Inc.	TT-700-100_R WF	REV C 30	MQOTT700-20000	N/A	17249
Battery	Vocollect, Inc.	730022	04180014	N/A	N/A	17218

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
T5 Talkman WLAN/Bluetooth Terminal	Vocollect, Inc.	TT-700-100_R WF	206323210	MQOTT700-20000	N/A	17760
T5 Talkman WLAN/Bluetooth Terminal	Vocollect, Inc.	TT-700-100_R WF	26495986	MQOTT700-20000	N/A	17759
Battery	Vocollect, Inc.	730022	135460010A	N/A	N/A	17762
Battery	Vocollect, Inc.	730022	1360102298	N/A	N/A	17761

2.5 Configuration of Tested System




Figure 2-1: Configuration of System Under Test

3 Peak Output Power – FCC §15.247(b)(1); RSS-210 §A8.4(4)

3.1 Power Output Test Procedure

A conducted power measurement of the EUT was taken using an Agilent 4416A EPM-P Series Power Meter with an E9323A Peak and Average Power Sensor.

Table 3-1: Power Output Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901184	Agilent Technologies	E4416A	EPM-P Power Meter, single channel	GB41050573	10/03/07
901356	Agilent Technologies	E9323A	Power Sensor	31764-264	10/03/07

3.2 Power Output Test Data

Table 3-2: Power Output Test Data – DSSS WLAN 802.11b

Channel	Frequency (MHz)	Peak Power Conducted Output (dBm)
1	2412	19.9
6	2437	19.8
11	2462	19.8

Test Personnel:



Richard B. McMurray EMC Test Engineer	 Signature	May 26, 2006 Date Of Test
--	--	------------------------------

Table 3-3: Power Output Test Data – DSSS WLAN 802.11g

Channel	Frequency (MHz)	Peak Power Conducted Output (dBm)
1	2412	17.8
6	2437	17.7
11	2462	17.5

Test Personnel:

Daniel W. Baltzell EMC Test Engineer	 Signature	February 2, 2007 Date Of Test
---	---	----------------------------------

4 Compliance with the Band Edge – FCC §15.247(d); RSS-210 §2.2

4.1 Band Edge Test Procedure

The transmitter output was connected to its appropriate antenna. Peak (1 MHz RBW/VBW) and average (1 MHz RBW/10 Hz VBW) radiated measurements were taken with a suitable span to encompass the peak of the fundamental. A delta measurement was performed from the highest peak in the restricted band to the peak of the fundamental, and subtracted from the field strength; the result was compared to the limit in the restricted band (54 dBuV/m).

Table 4-1: Band Edge Test Equipment - 802.11b

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	9/14/06
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	Not Required
901231	IW Microwave Products	KPS-1503-2400-KPS	High frequency RF cables	240"	9/1/06
901232	IW Microwave Products	KPS-1503-2400-KPS	High frequency RF cables	240"	9/1/06
901235	IW Microwave Products	KPS-1503-360-KPS	High frequency RF cables	36"	9/1/06
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	Not Required
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	5/20/07
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz – 22 GHz)	3138A07771	8/03/06

4.2 Restricted Band Edge Test Results


4.2.1 Calculation of Lower Band Edge – 802.11b

99.9 dBuV/m is the field strength measurement, from which the delta measurement of 55.2 dB is subtracted (reference plots), resulting in a level of 44.7 dB. This level has a margin of 9.3 dB below the limit of 54 dBuV/m.

Calculation: $99.9 \text{ dBuV/m} - 55.2 \text{ dB} - 54 \text{ dBuV/m} = -9.3 \text{ dB}$

Peak Field Strength of Lower Band Edge (1 MHz RBW/1 MHz VBW) = 112.3 dBuV/m
Average Field Strength of Lower Band Edge (1 MHz RBW/10 Hz VBW) = 99.9 dBuV/m
Delta measurement = 55.2 dB

Plot 4-1: Lower Band Edge: Average Measurement Channel 1 (TX Frequency: 2412 MHz)

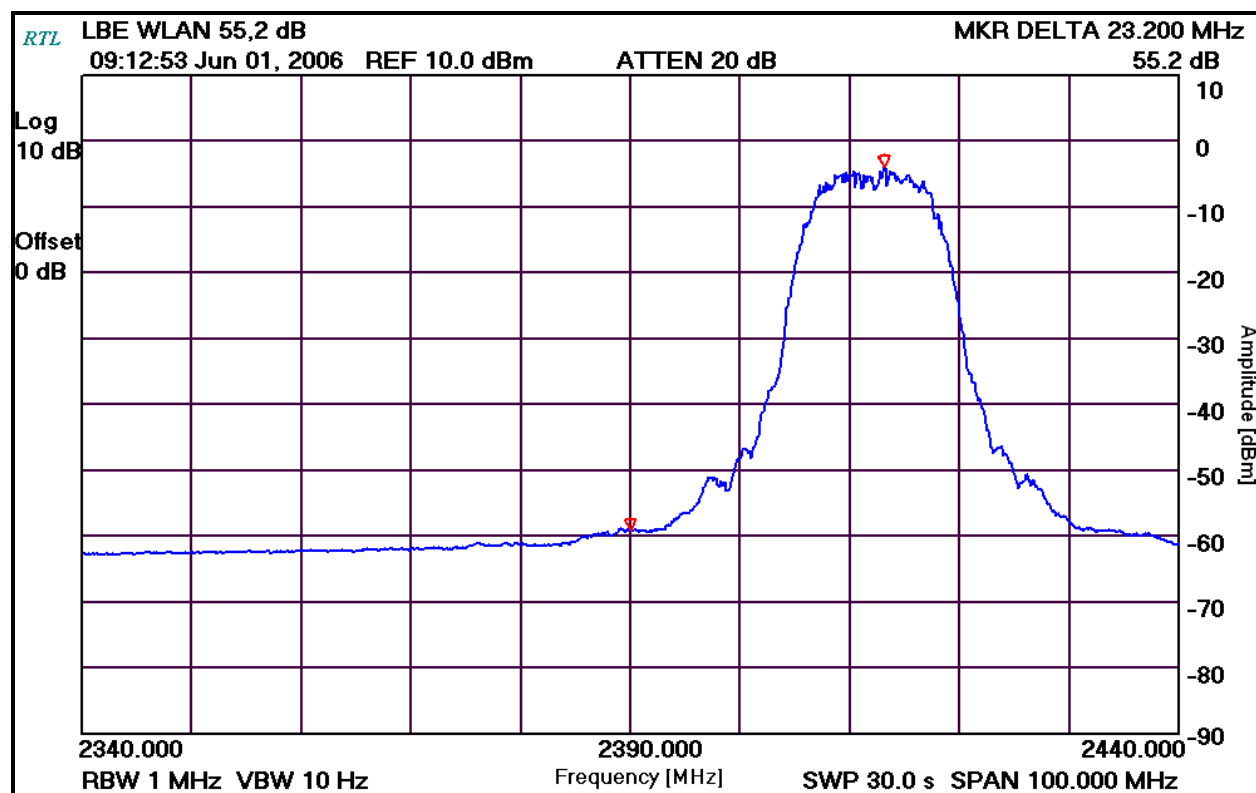


4.2.2 Calculation of Upper Band Edge – 802.11b

98.1 dBuV/m is the field strength measurement, from which the delta measurement of 54.5 dB is subtracted (reference plots), resulting in a level of 43.6 dB. This level has a margin of 10.4 dB below the limit of 54 dBuV/m.

Calculation: $98.1 \text{ dBuV/m} - 54.5 \text{ dB} - 54 \text{ dBuV/m} = -10.4 \text{ dB}$

Peak Field Strength of Upper Band Edge (1 MHz RBW/1 MHz VBW) = 111.1 dBuV/m
Average Field Strength of Upper Band Edge (1 MHz RBW/10 Hz VBW) = 98.1 dBuV/m
Delta measurement = 54.5 dB

Plot 4-2: Upper Band Edge: Average Measurement Channel 11 (TX Frequency: 2462 MHz)

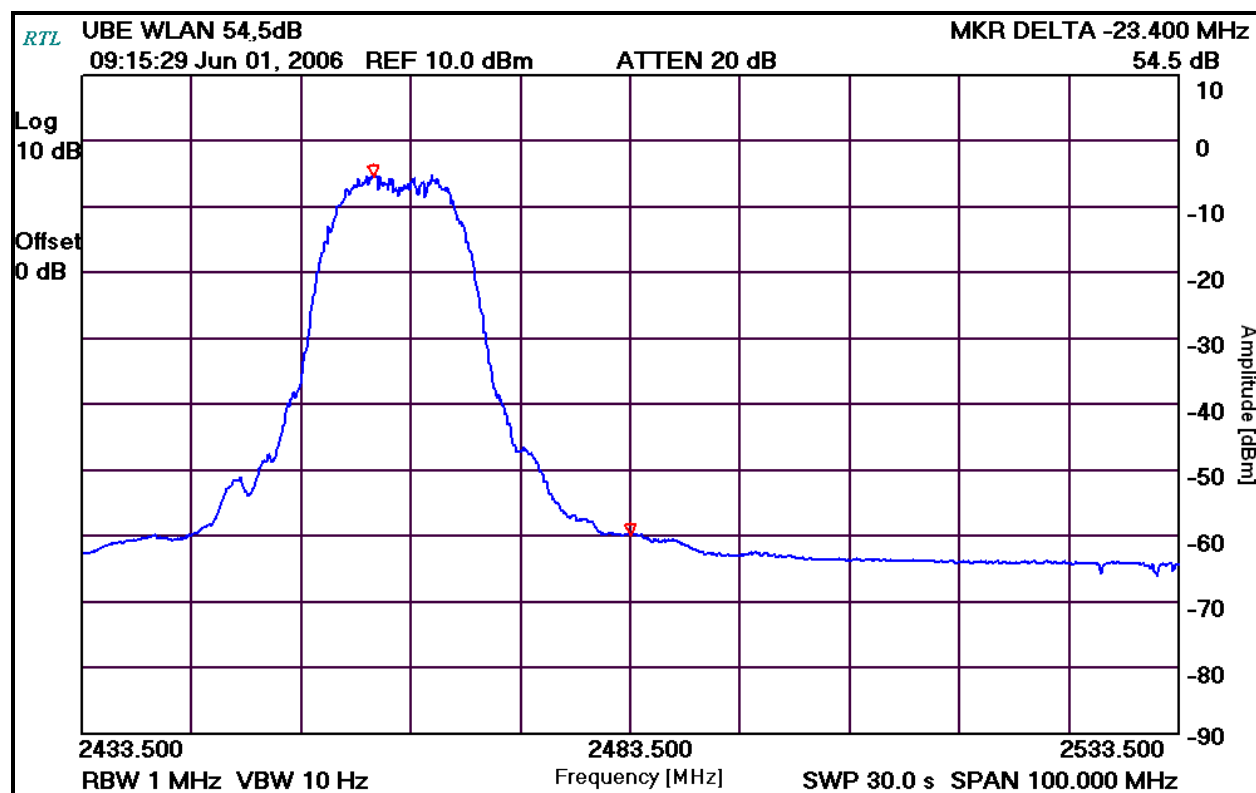

Test Personnel:

Daniel W. Baltzell
Test Engineer

Signature

June 1, 2006
Date Of Test

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Vocollect, Inc.
Model #: TAP700-01
Standards: FCC 15.247 & RSS-210
ID's: MQO-TAP700-01/2570A-TAP70001
Report #: 2012302DTS

Table 4-2: Band Edge Test Equipment – 802.11g

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 KHz – 6.5 GHz)	3325A00159	2/28/07
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	Not Required
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	Not Required
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	5/20/07

4.3 Restricted Band Edge Test Results

4.3.1 Calculation of Lower Band Edge – 802.11g

105.9 dBuV/m is the field strength measurement, from which the delta measurement of 53.2 dB is subtracted (reference plots), resulting in a level of 52.7 dB. This level has a margin of 1.3 dB below the limit of 54 dBuV/m.


Calculation: $105.9 \text{ dBuV/m} - 53.2 \text{ dB} - 54 \text{ dBuV/m} = -1.3 \text{ dB}$

Peak Field Strength of Lower Band Edge (1 MHz RBW/1 MHz VBW) = 108.9 dBuV/m

Average Field Strength of Lower Band Edge (1 MHz RBW/10 Hz VBW) = 105.9 dBuV/m

Delta measurement = 53.2 dB

Plot 4-3: Lower Band Edge: Average Measurement Channel 1 (TX Frequency: 2412 MHz)

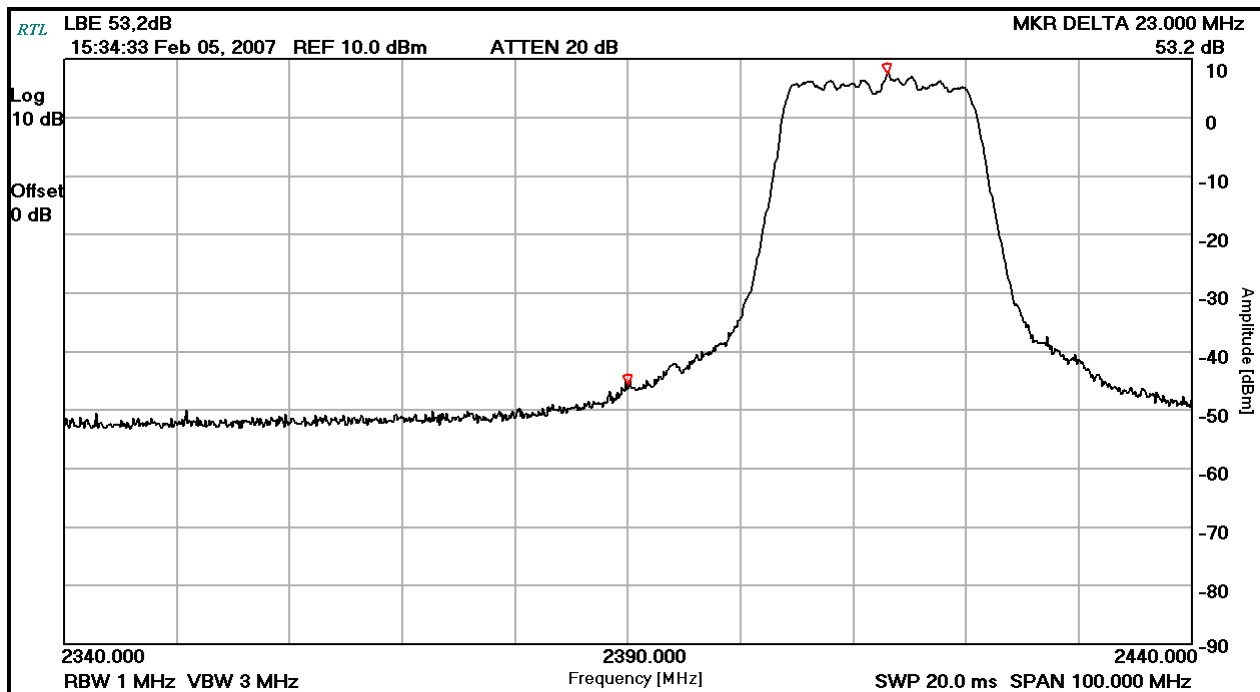

4.3.2 Calculation of Upper Band Edge – 802.11g

105.6 dBuV/m is the field strength measurement, from which the delta measurement of 52.7 dB is subtracted (reference plots), resulting in a level of 52.9 dB. This level has a margin of 1.1 dB below the limit of 54 dBuV/m.


Calculation: $105.6 \text{ dBuV/m} - 52.7 \text{ dB} - 54 \text{ dBuV/m} = -1.1 \text{ dB}$

Peak Field Strength of Upper Band Edge (1 MHz RBW/1 MHz VBW) = 108.6 dBuV/m

Average Field Strength of Upper Band Edge (1 MHz RBW/10 Hz VBW) = 105.6 dBuV/m

Delta measurement = 52.7 dB

Plot 4-4: Upper Band Edge: Average Measurement Channel 11 (TX Frequency: 2462 MHz)

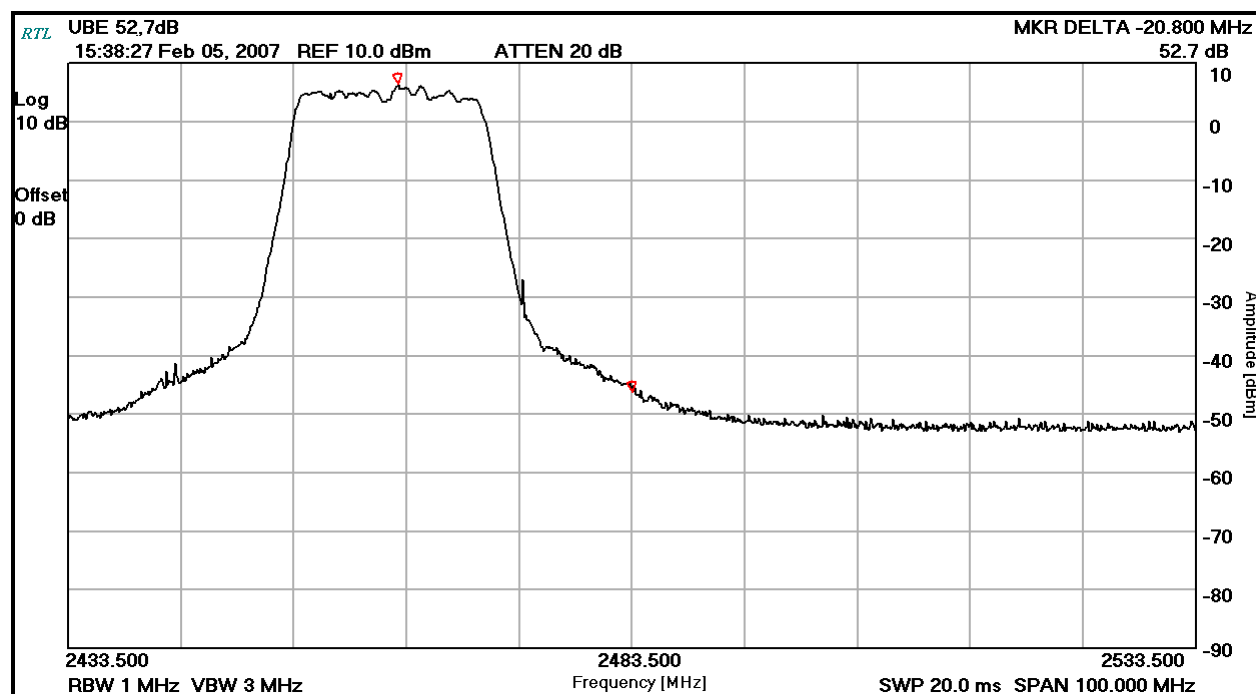

Test Personnel:

Daniel W. Baltzell
Test Engineer

Signature

February 5, 2007
Date Of Tests

5 Antenna Conducted Spurious Emissions – FCC §15.247(d); RSS-Gen

5.1 Antenna Conducted Spurious Emissions Test Procedures

Antenna spurious emissions per FCC 15.247(c) was measured from the EUT antenna port using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 100 kHz. The modulated carrier was identified at the following frequencies: 2412 MHz, 2437 MHz and 2462 MHz, and 2402 MHz, 2440 MHz and 2480 MHz.


5.2 Antenna Conducted Spurious Emissions Test Results

No harmonics or spurs were found within 20 dB (note that we are reporting power as peak) of the carrier level from the carrier to the 10th harmonic of the carrier frequency. Per FCC 15.31(o), no data is being reported.

Table 5-1: Antenna Conducted Spurious Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz – 22 GHz)	3138A07771	9/13/07

Test Personnel:

Daniel W. Baltzell		May 30, 2006 & February 2, 2007
Test Engineer	Signature	Dates Of Test

6 6 dB Bandwidth – FCC §15.247(a)(2); RSS-210 §A8.2

6.1 6 db Bandwidth Test Procedure – Minimum 6 db Bandwidth

The minimum 6 dB bandwidths per FCC 15.247(a)(2) were measured using a 50-ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 Hz. The device was modulated. The minimum 6 dB bandwidths are presented below.

Table 6-1: 6 dB Bandwidth Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900930/900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz – 22 GHz)	3138A07771	9/13/07

6.2 6 db Bandwidth Test Results


Table 6-2: 6 db Bandwidth Test Data – 802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
1	2412	10.1	0.5	Pass
6	2437	10.2	0.5	Pass
11	2462	10.25	0.5	Pass


Table 6-3: 6 db Bandwidth Test Data –802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
1	2412	16.7	0.5	Pass
6	2437	16.6	0.5	Pass
11	2462	16.6	0.5	Pass


Plot 6-1: 6 dB Bandwidth Channel 1 (TX Frequency: 2412 MHz)

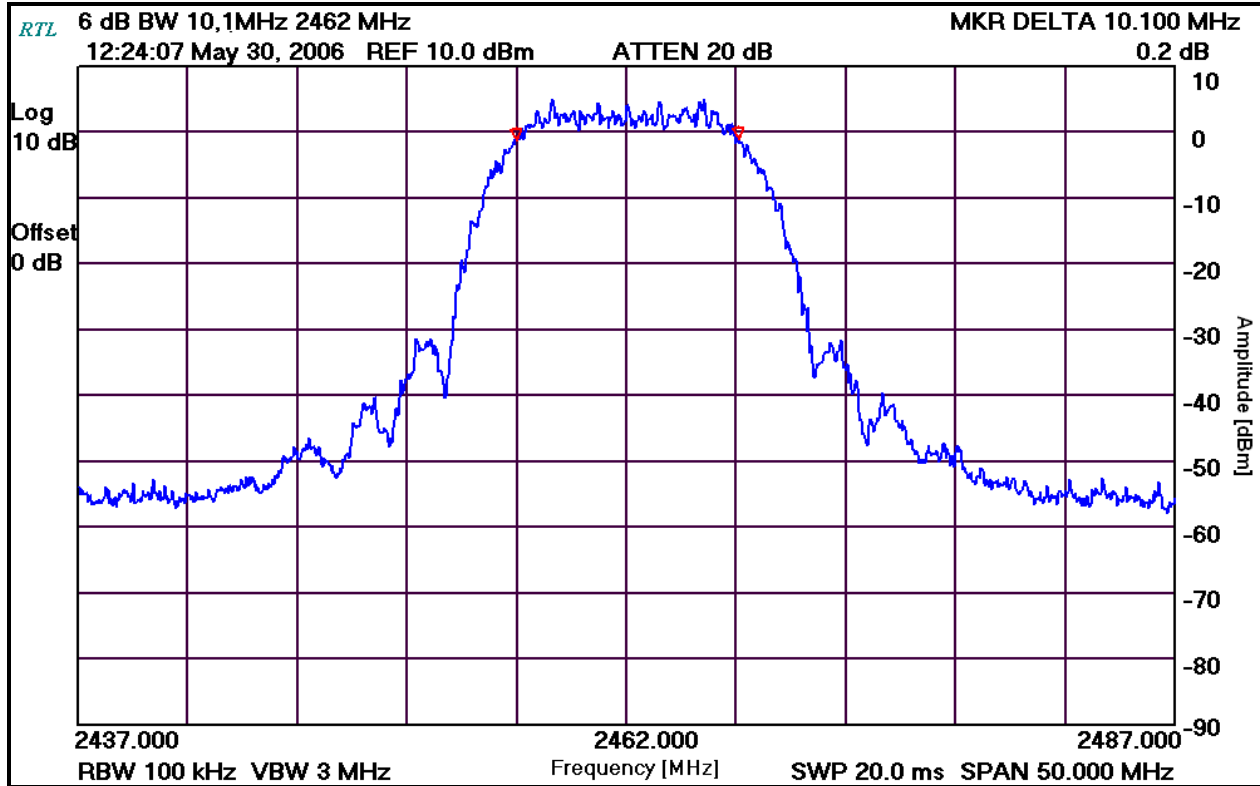

Plot 6-2: 6 dB Bandwidth Channel 6 (TX Frequency: 2437 MHz)

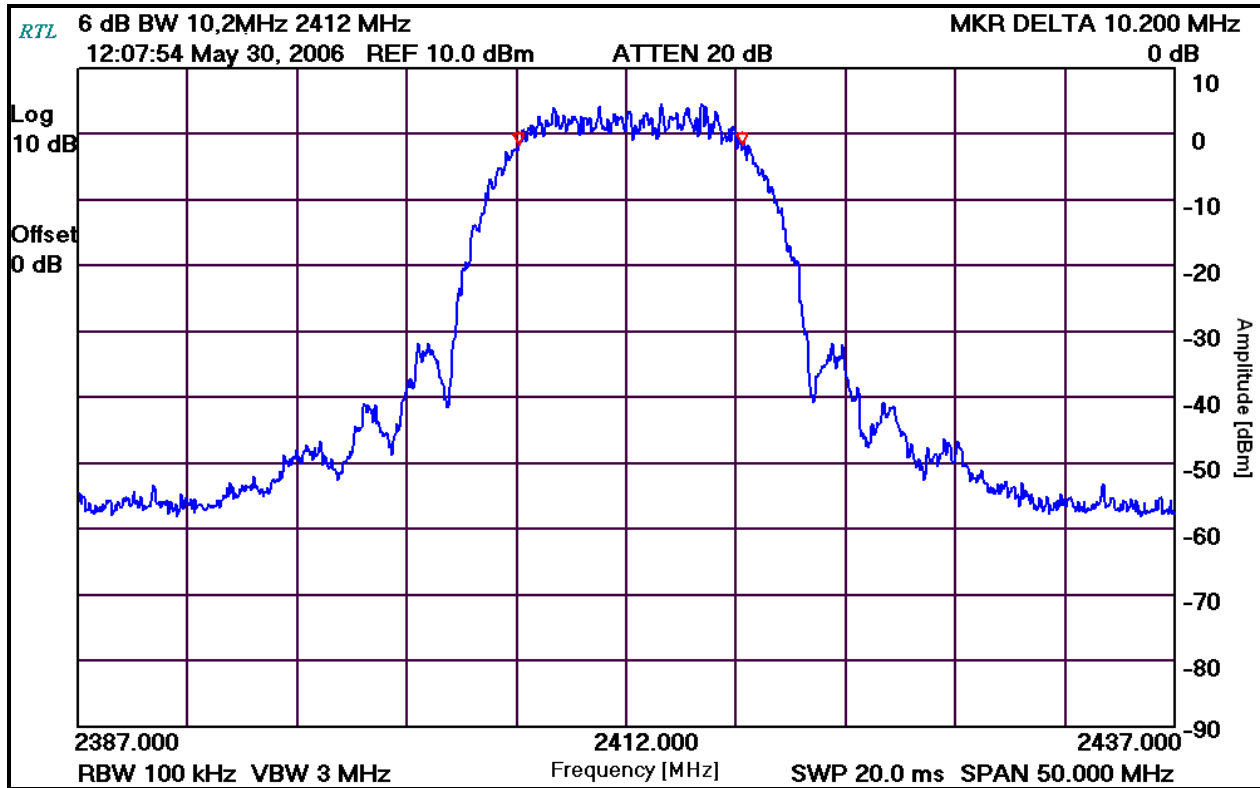

Plot 6-3: 6 dB Bandwidth Channel 11 (TX Frequency: 2462 MHz)

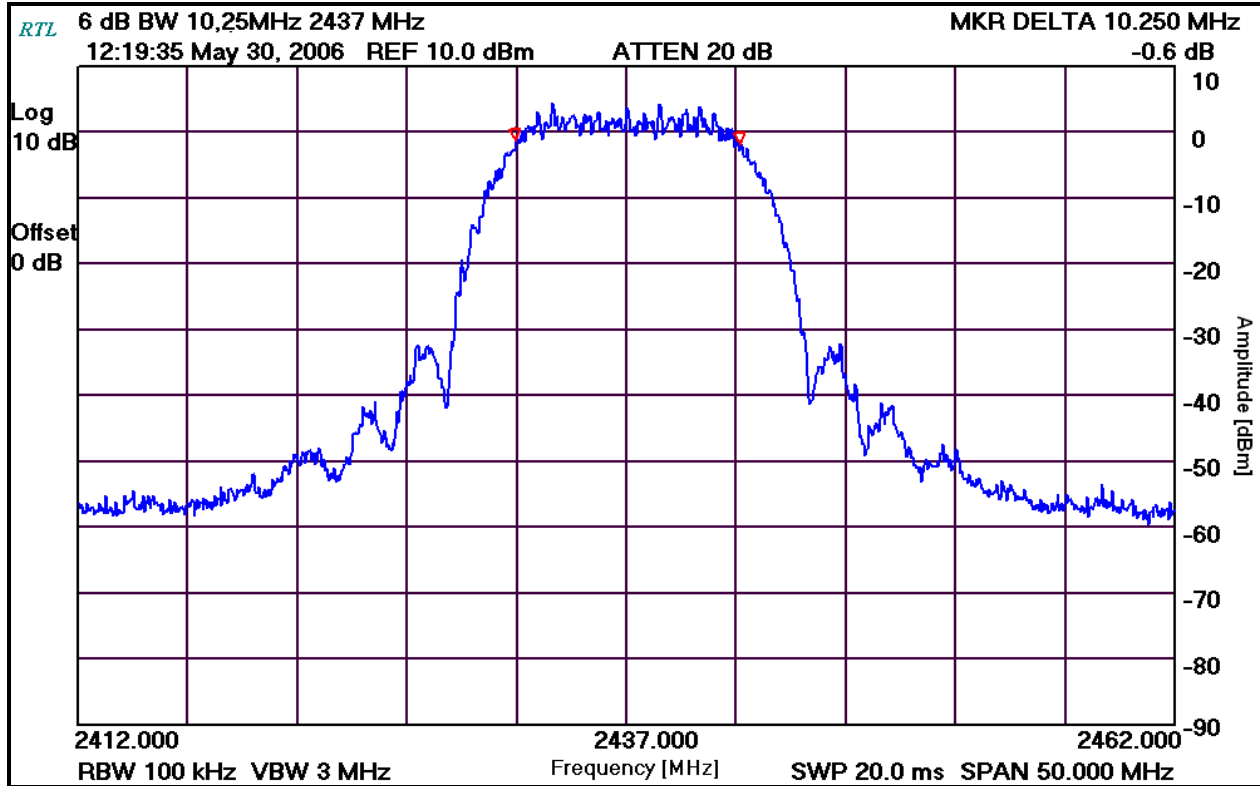


Test Personnel:

Daniel W. Baltzell
Test Engineer


Signature

May 30, 2006
Date Of Test


Plot 6-4: 6 dB Bandwidth Channel 1 (TX Frequency: 2412 MHz)

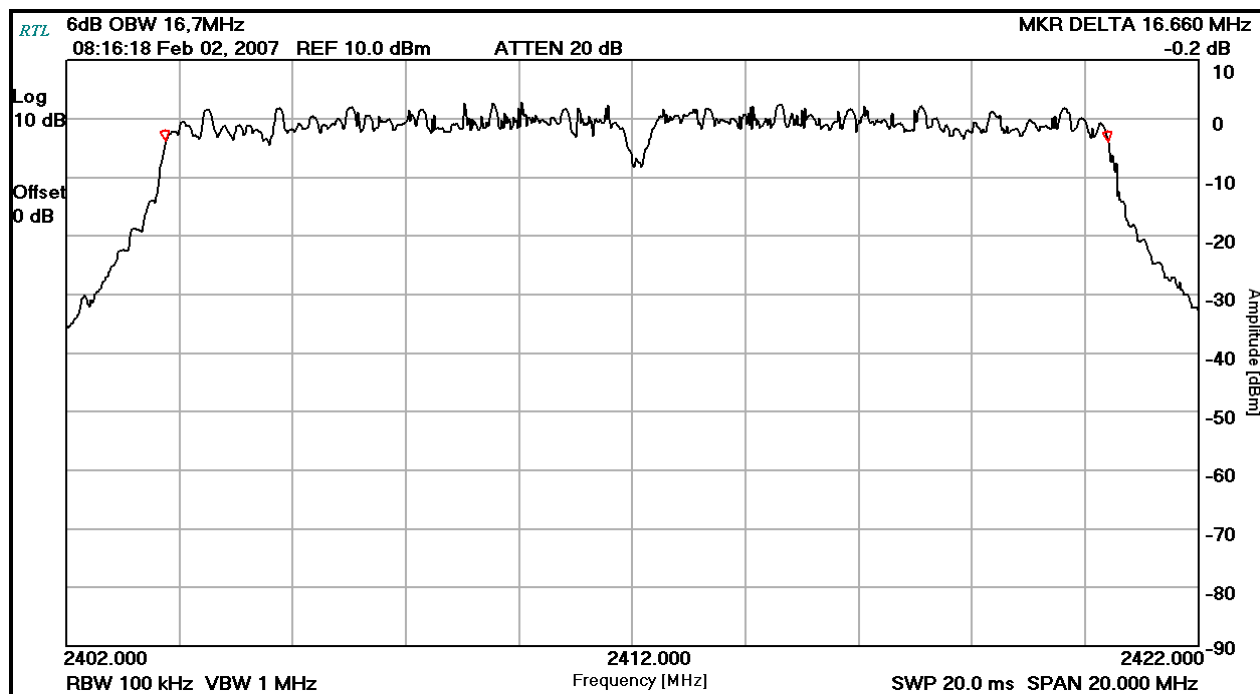

Plot 6-5: 6 dB Bandwidth Channel 6 (TX Frequency: 2437 MHz)

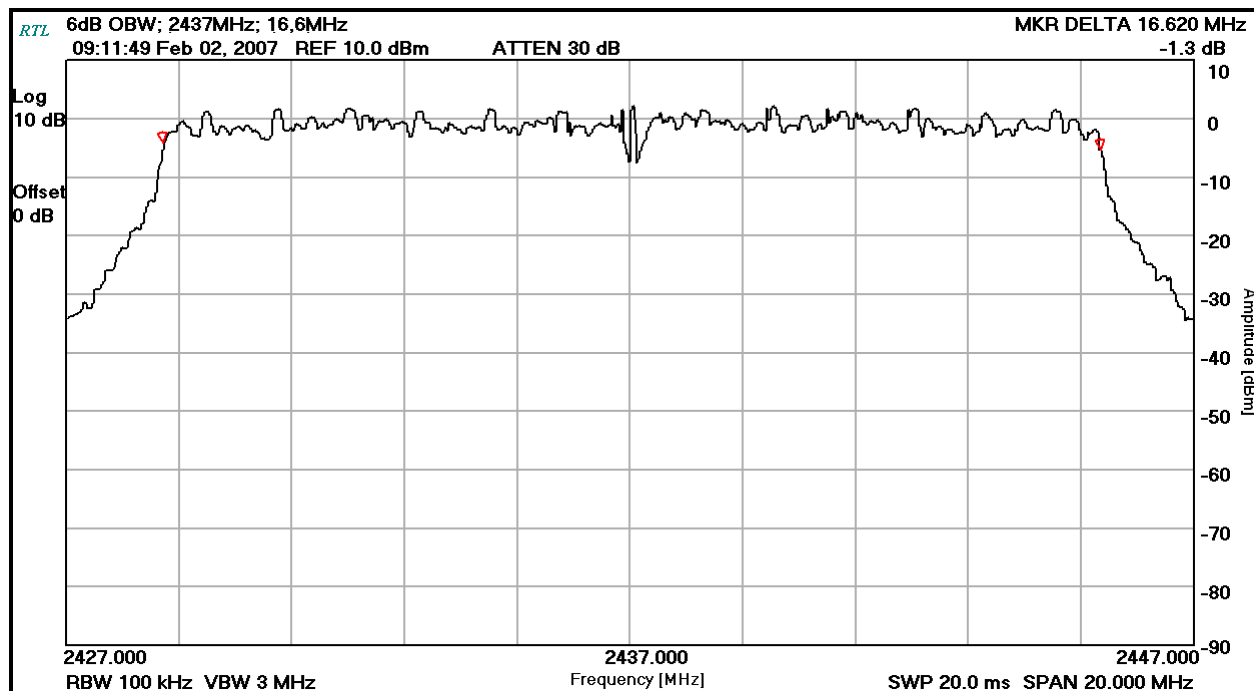

Plot 6-6: 6 dB Bandwidth Channel 11 (TX Frequency: 2462 MHz)

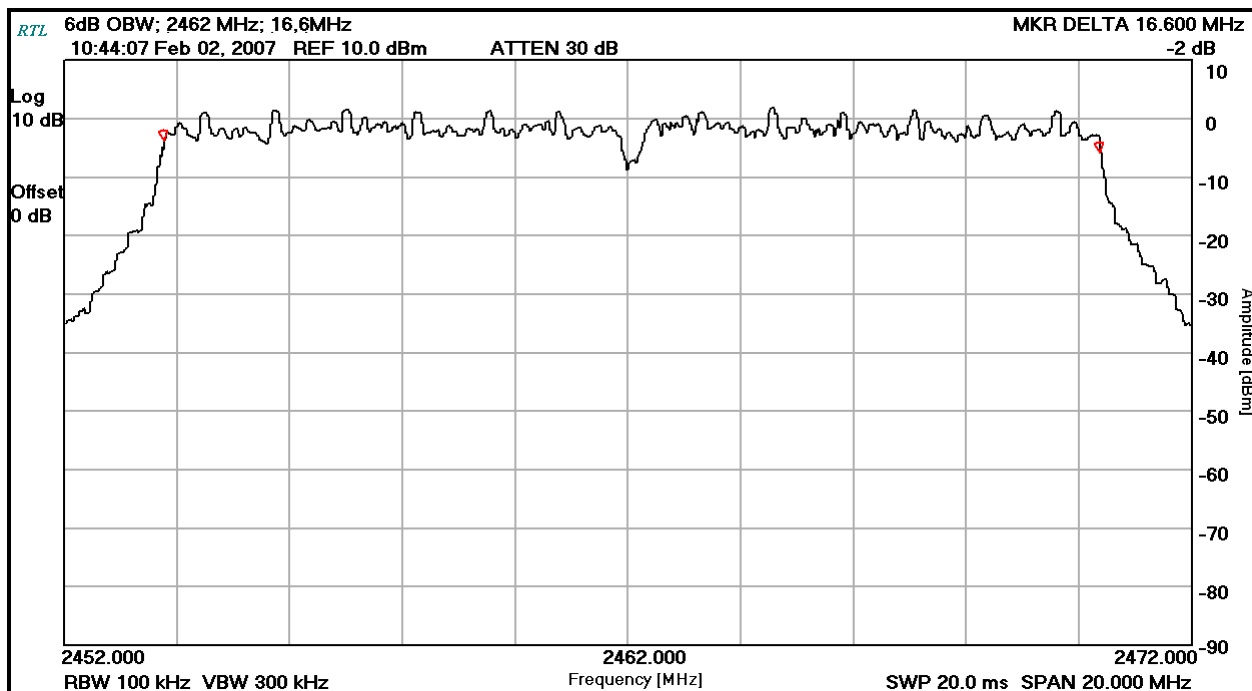

Test Personnel:

Daniel W. Baltzell
Test Engineer

Signature

February 2, 2007
Date Of Tests

7 Power Spectral Density – FCC §15.247(e); RSS-210 §A8.2

7.1 Power Spectral Density Test Procedure

The power spectral density per FCC 15.247(d) was measured using a 50-ohm spectrum analyzer with the resolution bandwidth set at 3 kHz, the video bandwidth set at 30 kHz, and the sweep time set at 500 seconds. The spectral lines were resolved for the modulated carriers at 2.412 GHz, 2.437 GHz, and 2.462 GHz respectively. These levels are below the +8 dBm limit. See the power spectral density table and plots.

Note: This test is not applicable for the Bluetooth transmitter.

Table 7-1: Power Spectral Density Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz – 22 GHz)	3138A07771	9/13/07

7.2 Power Spectral Density Test Data


Table 7-2: Power Spectral Density Test Data – 802.11b

Channel	Frequency (MHz)	RF Power Level (dBm)	Maximum Limit +8dBm	Pass/Fail
1	2412	3.4	8	Pass
6	2437	3.0	8	Pass
11	2462	3.5	8	Pass


Table 7-3: Power Spectral Density Test Data –802.11g

Channel	Frequency (MHz)	RF Power Level (dBm)	Maximum Limit +8dBm	Pass/Fail
1	2412	-10.0	8	Pass
6	2437	-11.4	8	Pass
11	2462	-13.1	8	Pass


Plot 7-1: Power Spectral Density: Channel 1 (2412 MHz)

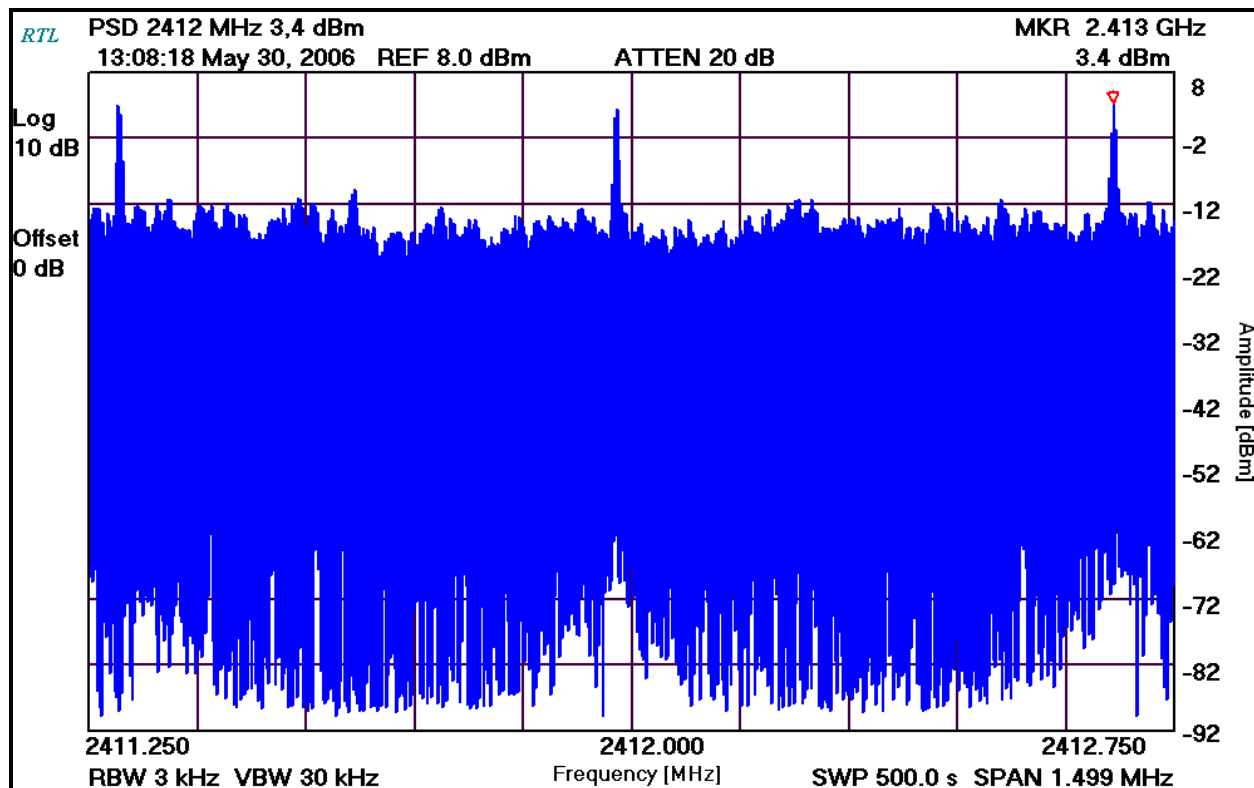

Plot 7-2: Power Spectral Density: Channel 6 (2437 MHz)

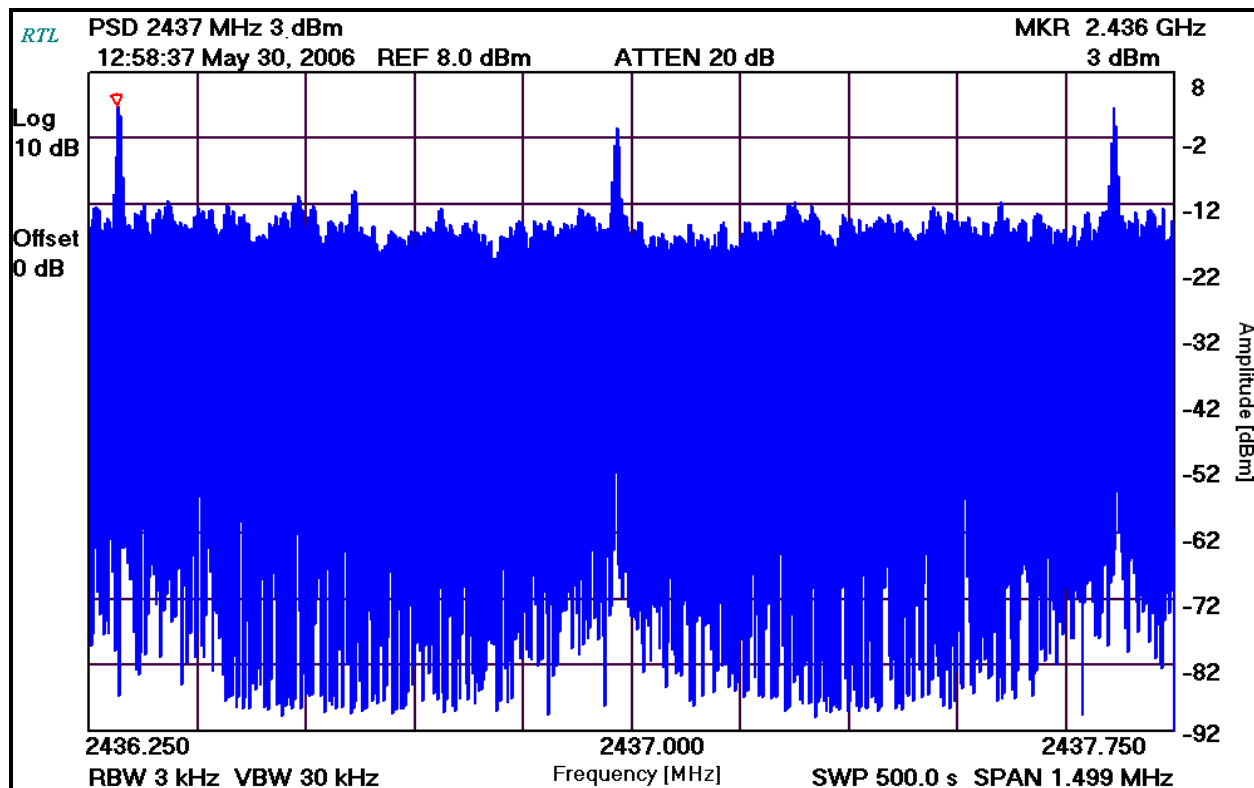

Plot 7-3: Power Spectral Density: Channel 11 (2462 MHz)

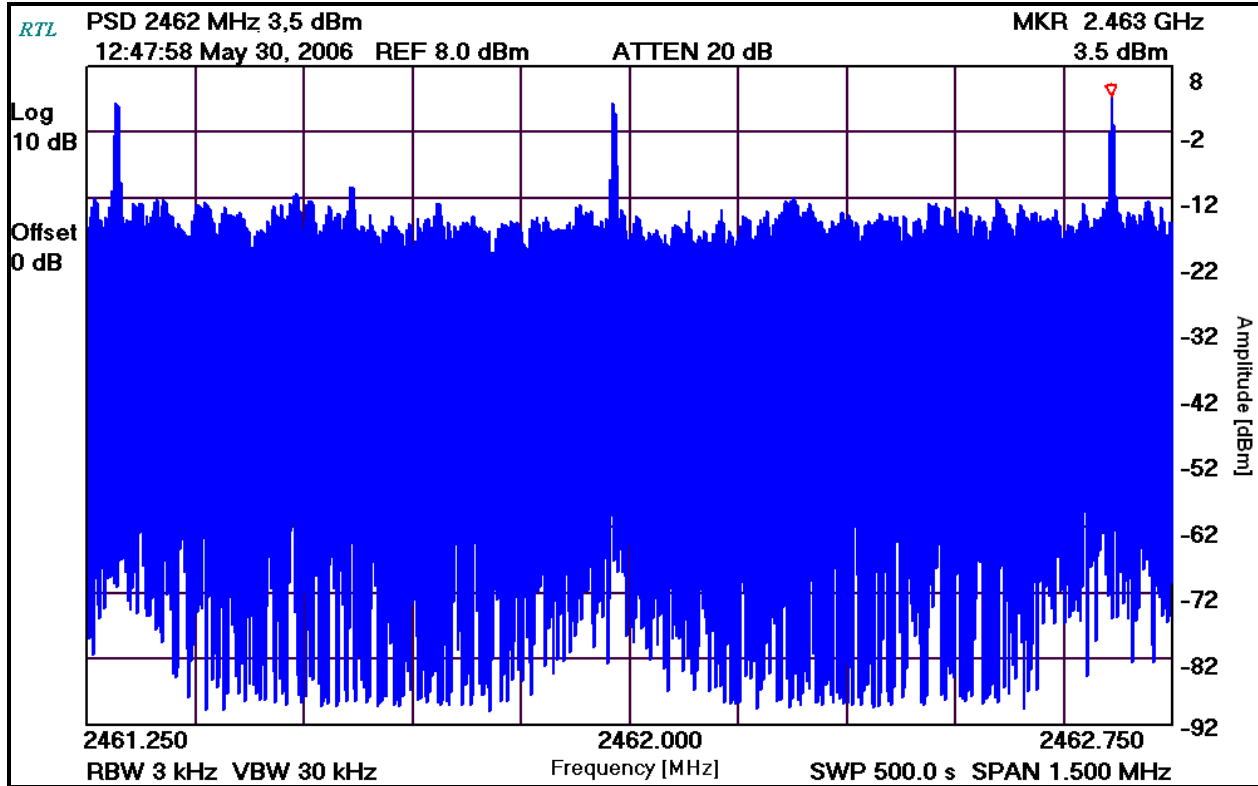


Test Personnel:

Daniel W. Baltzell
Test Engineer


Signature

May 30, 2006
Date Of Test

Plot 7-4: Power Spectral Density: Channel 1 (2412 MHz)

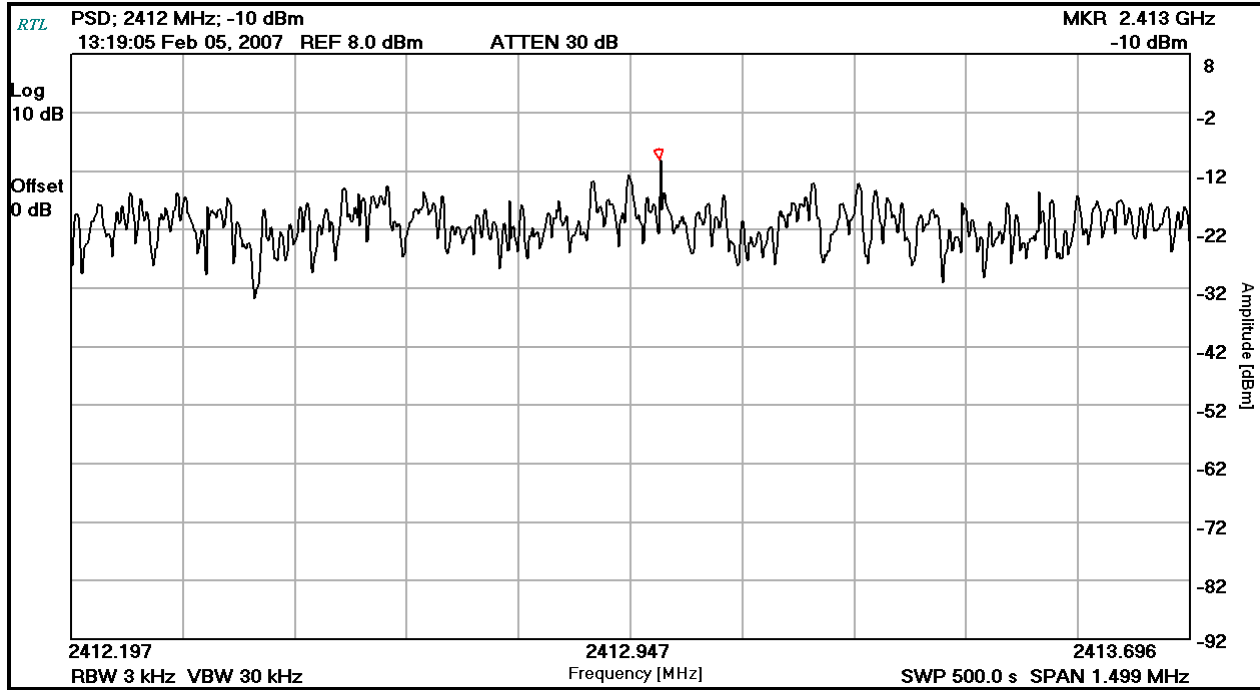


Plot 7-5: Power Spectral Density: Channel 6 (2437 MHz)

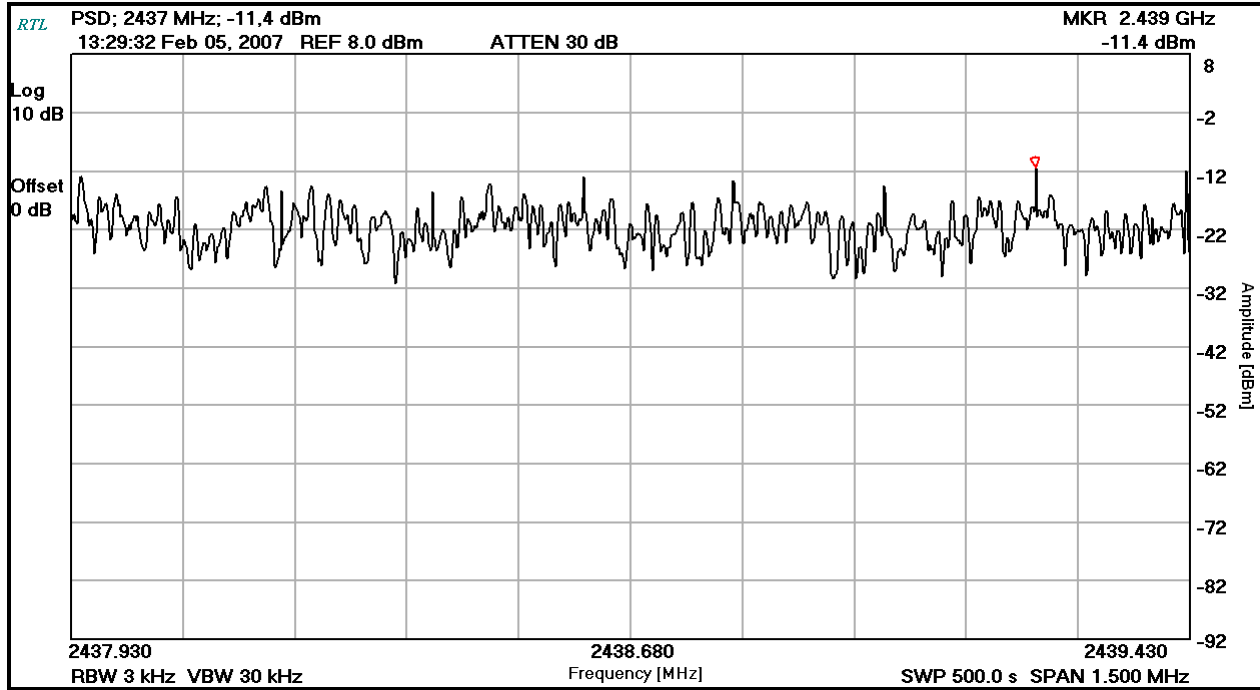

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Vocollect, Inc.
Model #: TAP700-01
Standards: FCC 15.247 & RSS-210
ID's: MQO-TAP700-01/2570A-TAP70001
Report #: 2012302DTS

Plot 7-6: Power Spectral Density: Channel 11 (2462 MHz)

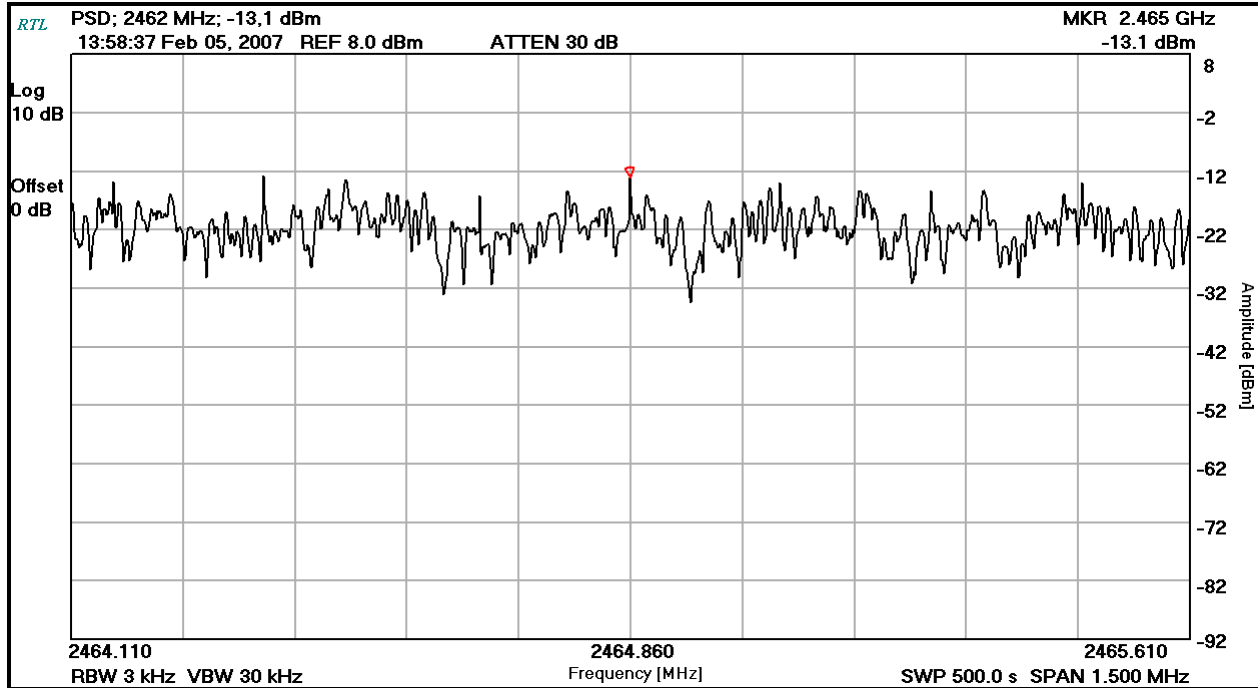

Test Personnel:

Daniel W. Baltzell
Test Engineer

Signature

February 5, 2007
Date Of Test

8 Conducted Emissions Measurement Limits – FCC §15.207; RSS-Gen

8.1 Limits of Conducted Emissions Measurement

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

8.2 Conducted Emissions Measurement Test Procedure

The conducted emissions measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 0.8 meters high. Power was fed to the EUT through a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EUT LISN was fed power through an AC filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed AC power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 7 kHz high-pass filter. The filter was used to prevent overload of the spectrum analyzer from noise below 7 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or average mode if applicable). The analyzer's 6 dB bandwidth was set to 9 kHz. No video filter less than 10 times the resolution bandwidth was used. Average measurements were performed in a linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by decreasing the sweep time in order to obtain a calibrated measurement. The highest emissions amplitudes relative to the appropriate limits were measured and have been recorded in this report.

Table 8-1: Conducted Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900969	Hewlett Packard	85650A	Quasi-Peak Adapter	2412A00414	8/3/06
900930	Hewlett Packard	85662A	Spectrum Analyzer Display Section	3144A20839	8/3/06
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	8/3/06
900889	Hewlett Packard	85685A	RF Preselector (20 Hz - 2 GHz)	3146A01309	4/12/07
901083	AFJ International	LS16	16A LISN (110 V)	16010020080	3/28/08
N/A	Rhein Tech Laboratories	Automated Emission Tester	Emissions testing software Rev. 14.0.2	N/A	N/A

8.3 Conducted Emissions Test Results

8.3.1 Conducted Emissions Transmit Channel 6 DSSS

Table 8-2: Conducted Emissions Transmit Channel 6 DSSS Neutral Side (Line 1)

Temperature: 74°F					Humidity: 40%				
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	QP Limit (dBuV)	QP Margin (dBuV)	AV Limit (dBuV)	AV Margin (dBuV)	Pass/Fail
0.152	Pk	49.0	0.2	49.2	65.9	-16.7	55.9	-6.7	Pass
0.210	Pk	40.9	0.2	41.1	63.2	-22.1	53.2	-12.1	Pass
0.391	Pk	34.3	0.3	34.6	58.0	-23.4	48.0	-13.4	Pass
0.657	Pk	35.9	0.2	36.1	56.0	-19.9	46.0	-9.9	Pass
1.004	Pk	35.4	0.4	35.8	56.0	-20.2	46.0	-10.2	Pass
2.760	Pk	28.6	0.9	29.5	56.0	-26.5	46.0	-16.5	Pass
6.000	Pk	28.4	1.4	29.8	60.0	-30.2	50.0	-20.2	Pass

Table 8-3: Conducted Emissions Transmit Channel 6 DSSS Hot Side (Line 2)

Temperature: 74°F					Humidity: 40%				
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	QP Limit (dBuV)	QP Margin (dBuV)	AV Limit (dBuV)	AV Margin (dBuV)	Pass/Fail
0.200	Pk	41.6	0.2	41.8	63.6	-21.8	53.6	-11.8	Pass
0.228	Pk	39.1	0.1	39.2	62.5	-23.3	52.5	-13.3	Pass
0.726	Pk	33.1	0.4	33.5	56.0	-22.5	46.0	-12.5	Pass
1.011	Pk	33.1	0.4	33.5	56.0	-22.5	46.0	-12.5	Pass
3.040	Pk	29.2	1.0	30.2	56.0	-25.8	46.0	-15.8	Pass
6.510	Pk	29.2	1.5	30.7	60.0	-29.3	50.0	-19.3	Pass

8.3.2 Conducted Emissions Receive Channel 6 DSSS

Table 8-4: Conducted Emissions Receive Channel 6 DSSS Neutral Side (Line 1)


Temperature: 74°F					Humidity: 40%				
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	QP Limit (dBuV)	QP Margin (dBuV)	AV Limit (dBuV)	AV Margin (dBuV)	Pass/Fail
0.156	Pk	47.4	0.2	47.6	65.7	-18.1	55.7	-8.1	Pass
0.214	Pk	40.1	0.2	40.3	63.0	-22.7	53.0	-12.7	Pass
0.702	Pk	36.2	0.4	36.6	56.0	-19.4	46.0	-9.4	Pass
1.157	Pk	35.0	0.4	35.4	56.0	-20.6	46.0	-10.6	Pass
2.810	Pk	27.9	0.9	28.8	56.0	-27.2	46.0	-17.2	Pass
6.120	Pk	27.8	1.4	29.2	60.0	-30.8	50.0	-20.8	Pass

Table 8-5: Conducted Emissions Receive Channel 6 DSSS Hot Side (Line 2)

Temperature: 74°F					Humidity: 40%				
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	QP Limit (dBuV)	QP Margin (dBuV)	AV Limit (dBuV)	AV Margin (dBuV)	Pass/Fail
0.164	Pk	42.4	0.2	42.6	65.3	-22.7	55.3	-12.7	Pass
0.216	Pk	40.7	0.2	40.9	63.0	-22.1	53.0	-12.1	Pass
1.008	Pk	33.2	0.4	33.6	56.0	-22.4	46.0	-12.4	Pass
1.502	Pk	32.3	0.6	32.9	56.0	-23.1	46.0	-13.1	Pass
2.980	Pk	28.9	1.0	29.9	56.0	-26.1	46.0	-16.1	Pass
5.980	Pk	30.0	1.4	31.4	60.0	-28.6	50.0	-18.6	Pass

Test Personnel:

Daniel W. Baltzell
Test Engineer



Signature

May 30, 2006
Date Of Test

9 Radiated Emissions – FCC §15.209; RSS-210 §A8.5 and RSS-Gen

9.1 Limits of Radiated Emissions Measurement

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009-0.490	2400/f (kHz)	300
0.490-1.705	2400/f (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any circumstances of modulation.

9.2 Radiated Emissions Measurement Test Procedure

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane. The spectrum was examined from 9 kHz to the 10th harmonic of the highest fundamental transmitter frequency (24.8 GHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations. For frequencies between 30 and 1000 MHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1000 MHz, emissions are measured using the average detector function with a minimum resolution bandwidth of 1 MHz. No video filter less than 10 times the resolution bandwidth was used. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Table 9-1: Radiated Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900151	Rohde and Schwarz	HFH2-Z2	Antenna (Loop, 9 kHz - 30 MHz)	827525/019	8/25/06
901365	Miteq	JS4-00102600-41-5P	Amplifier, 15 V, 0.1-26 GHz, 28 dB gain, power 5 dB	1094152	3/24/07
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	9/14/06
900905	Rhein Tech Laboratories	PR-1040	OATS 1 Preamplifier 40 dB (30 MHz – 2 GHz)	1006	3/15/07
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	Not Required
901231	IW Microwave Products	KPS-1503-2400-KPS	High frequency RF cables	240"	9/1/06
901232	IW Microwave Products	KPS-1503-2400-KPS	High frequency RF cables	240"	9/1/06
901235	IW Microwave Products	KPS-1503-360-KPS	High frequency RF cables	36"	9/1/06
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	Not Required
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	5/20/07
900321	EMCO	3161-03	Horn Antennas (4 - 8,2GHz)	9508-1020	5/20/07
900323	EMCO	3160-7	Horn Antennas (8,2 - 12,4 GHz)	9605-1054	5/20/07
900356	EMCO	3160-08	Horn Antenna (12.4 - 18 GHz)	9607-1044	5/20/07
900325	EMCO	3160-9	Horn Antennas (18 - 26.5 GHz)	9605-1051	5/20/07
901218	EMCO	3301B	Horn Antenna (18 - 26.5 GHz)	960281-003	5/20/07
900392	Hewlett Packard	1197OK	Harmonic Mixer (18 – 26.5 GHz)	3525A00159	11/27/07
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	8/3/06
900930	Hewlett Packard	85662A	Spectrum Analyzer Display Section	3144A20839	8/3/06
900889	Hewlett Packard	85685A	RF Preselector (20 Hz - 2 GHz)	3146A01309	4/12/07

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Vocollect, Inc.
Model #: TAP700-01
Standards: FCC 15.247 & RSS-210
ID's: MQO-TAP700-01/2570A-TAP70001
Report #: 2012302DTS

9.3 Radiated Emissions Test Results


9.3.1 Radiated Emissions Digital/Receiver Test Data

Table 9-2: Digital/Receiver Radiated Emissions

Temperature: 92°F Humidity: 46%										
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pass/Fail
294.884	Qp	H	20	1.0	43.6	-13.4	30.2	46.0	-15.8	Pass
417.744	Qp	H	300	1.0	41.9	-9.0	32.9	46.0	-13.1	Pass
430.030	Qp	H	300	1.0	41.4	-8.9	32.5	46.0	-13.5	Pass
442.316	Qp	H	300	1.0	50.7	-9.1	41.6	46.0	-4.4	Pass
454.606	Qp	H	300	1.0	41.8	-8.7	33.1	46.0	-12.9	Pass
466.892	Qp	H	300	1.0	46.7	-8.2	38.5	46.0	-7.5	Pass
491.456	Qp	H	30	1.2	39.9	-8.0	31.9	46.0	-14.1	Pass

Test Personnel:

Daniel W. Baltzell
Test Engineer



Signature

May 30, 2006
Date Of Test

9.3.2 Radiated Emissions Harmonics/Spurious Test Data – 802.11b

Table 9-3: Radiated Emissions Harmonics/Spurious Channel 1 (TX Frequency: 2412 MHz)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/ 10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4824.0	54.5	39.0	14.2	53.2	54.0	-0.8
7236.0	51.3	37.7	13.1	50.8	79.9	-29.1
9648.0	40.0	29.3	18.6	47.9	79.9	-32.0
12060.0	39.5	25.7	19.9	45.6	54.0	-8.4
14472.0	41.7	28.0	22.5	50.5	54.0	-3.5
16884.0	42.8	28.3	25.4	53.7	79.9	-26.2

Table 9-4: Radiated Emissions Harmonics/Spurious Channel 6 (TX Frequency: 2437 MHz)


Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/ 10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4874.0	52.3	37.2	14.4	51.6	54.0	-2.4
7311.0	55.2	39.5	13.1	52.6	54.0	-1.4
9748.0	41.7	31.0	18.1	49.1	78.7	-29.6
12185.0	40.8	26.0	18.5	44.5	54.0	-9.5
14622.0	43.2	28.3	23.4	51.7	78.7	-27.0
17059.0	42.7	28.7	25.9	54.6	78.7	-24.1

Table 9-5: Radiated Emissions Harmonics/Spurious Channel 11 (TX Frequency: 2462 MHz)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4924.0	53.2	37.8	14.7	52.5	54.0	-1.5
7386.0	49.2	35.0	13.3	48.3	54.0	-5.7
9848.0	42.2	28.7	18.1	46.8	78.1	-31.3
12310.0	38.0	27.2	18.7	45.9	54.0	-8.1
14772.0	39.5	27.7	24.1	51.8	78.1	-26.3
17234.0	40.5	28.7	24.3	53.0	78.1	-25.1

Test Personnel:

Daniel W. Baltzell
Test Engineer


Signature

May 31 and June 29, 2006
Dates Of Test

9.3.3 Radiated Emissions Harmonics/Spurious Test Data - 802.11g

Table 9-6: Radiated Emissions Harmonics/Spurious Channel 1 (TX Frequency: 2412 MHz)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4824.0	35.7	21.0	6.5	27.5	54.0	-26.5
7236.0	36.7	23.3	8.4	31.7	91.9	-60.2
9648.0	35.6	21.8	14.1	35.9	91.9	-56.0
12060.0	34.0	21.2	14.6	35.8	54.0	-18.2
14472.0	38.3	25.0	19.5	44.5	54.0	-9.5
16884.0	38.1	24.8	20.8	45.6	91.9	-46.3

Table 9-7: Radiated Emissions Harmonics/Spurious Channel 6 (TX Frequency: 2437 MHz)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4874.0	33.0	18.7	6.6	25.3	54.0	-28.7
7311.0	35.3	21.9	8.0	29.9	54.0	-24.1
9748.0	34.4	21.3	14.1	35.4	89.5	-54.1
12185.0	33.9	20.8	15.6	36.4	54.0	-17.6
14622.0	38.5	25.1	20.2	45.3	89.5	-44.2
17059.0	37.6	24.6	21.3	45.9	89.5	-43.6


Table 9-8: Radiated Emissions Harmonics/Spurious Channel 11 (TX Frequency: 2462 MHz)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4924.0	32.9	19.2	6.6	25.8	54.0	-28.2
7386.0	34.9	22.3	8.0	30.3	54.0	-23.7
9848.0	34.2	21.3	14.1	35.4	88.6	-53.2
12310.0	33.8	21.6	15.4	37.0	54.0	-17.0
14772.0	38.2	24.8	19.4	44.2	88.6	-44.4
17234.0	37.1	24.5	20.3	44.8	88.6	-43.8

Table 9-9: Radiated Emissions Test Equipment – 802.11g

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900151	Rohde and Schwarz	HFH2-Z2	Antenna (Loop, 9 kHz - 30 MHz)	827525/019	9/15/09
901053	Schaffner Chase	CBL6112B	Bi-Log Antenna (20 MHz - 2 GHz)	2648	11/01/07
901365	Miteq	JS4-00102600-41-5P	Amplifier, 15 V, 0. 1 - 26 GHz, 28 dB gain	1094152	3/24/07
900905	Rhein Tech Laboratories	PR-1040	OATS 1 Preamplifier 40 dB (30 MHz – 2 GHz)	1006	3/15/07
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	Not Required
901425	Insulated Wire, Inc.	KPS-1503-2400-KPS	RF cable, 20'	NA	12/5/07
901424	Insulated Wire Inc.	KPS-1503-360-KPS	RF cable 36"	NA	12/5/07
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	Not Required
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	5/20/07
900321	EMCO	3161-03	Horn Antennas (4 - 8,2 GHz)	9508-1020	5/20/07
900323	EMCO	3160-7	Horn Antennas (8,2 - 12,4 GHz)	9605-1054	5/20/07
900356	EMCO	3160-08	Horn Antenna (12.4 - 18 GHz)	9607-1044	5/20/07
900325	EMCO	3160-9	Horn Antennas (18 - 26.5 GHz)	9605-1051	5/20/07
901218	EMCO	3301B	Horn Antenna (18 - 26.5 GHz)	960281-003	5/20/07
900392	Hewlett Packard	1197OK	Harmonic Mixer (18 – 26.5 GHz)	3525A00159	11/27/07
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	9/13/07
900930	Hewlett Packard	85662A	Spectrum Analyzer Display Section	3144A20839	9/13/07
900889	Hewlett Packard	85685A	RF Preselector (20 Hz - 2 GHz)	3146A01309	4/12/07
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 KHz – 6.5 GHz)	3325A00159	2/28/07

Test Personnel:

Daniel W. Baltzell		February 6, 2007
Test Engineer	Signature	Date Of Test

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Vocollect, Inc.
Model #: TAP700-01
Standards: FCC 15.247 & RSS-210
ID's: MQO-TAP700-01/2570A-TAP70001
Report #: 2012302DTS

10 Conclusion

The data in this measurement report shows that the EUT as tested, Vocollect, Inc. Model # TAP700-01, FCC ID: MQO-TAP700-01, IC: 2570A-TAP70001, complies with all the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations, and Industry Canada RSS-210.