



Engineering Solutions & Electromagnetic Compatibility Services

**Unlicensed National Information Infrastructure (UNII) Transmitter Report
FCC Part 15E & Industry Canada RSS-210**

Test Lab: Rhein Tech Laboratories, Inc. Tel: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 www.rheintech.com Herndon, VA 20170 E-Mail: atcbinfo@rheintech.com		Applicant: Vocollect, Inc. Tel: 412-349-2409 703 Rodi Road Fax: 412-829-1063 Pittsburgh, PA 15235 Contact: Brian Sutton	
FCC ID/IC	MQO-TAP900-01/ 2570A-TAP90001	Test Report Date	August 7, 2013
Platform	N/A	RTL Work Order #	2013095
Model #'s	TAP910-01, TAP920-01, TAP930-01	RTL Quote #	QRTL13-095A
American National Standard Institute	ANSI C63.4-2003 Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz		
FCC Classification	NII - Unlicensed National Information Infrastructure		
FCC Rule Part(s)	FCC Rules Part 15.407 (Subpart E): Unlicensed National Information Infrastructure Devices (10-01-12)		
Industry Canada	RSS-210 Issue 8: Low Power License-Exempt Communications Devices		
Digital Interface Information	Digital Interface was found to be compliant		
Frequency Range (MHz)	Output Power (W)	Frequency Tolerance	Emission Designator
5180-5240	0.005	N/A	25M2G7D
5260-5320	0.028	N/A	27M5G7D
5500-5700	0.032	N/A	32M0G7D

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, ANSI C63.4, and Industry Canada RSS-210.

Signature: 

Date: August 7, 2013

Typed/Printed Name: Desmond A. Fraser

Position: President

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANSI-ASQ National Accreditation Board/ACLASS. Refer to certificate and scope of accreditation AT-1445.

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. and Vocollect, Inc. The test results relate only to the item(s) tested.

Table of Contents

1	General Information	7
1.1	Scope	7
1.2	Description of EUT	7
1.3	Test Facility	7
1.4	Related Submittal(s)/Grant(s)	7
1.5	Modifications	7
2	Test Information	8
2.1	Description of Test Modes	8
2.2	Exercising the EUT	8
2.3	Test Result Summary	8
2.4	Test System Details	9
2.5	Configuration of Tested System	9
3	Peak Transmit Power Measurement – FCC 15.407(a/1/2/3); RSS-210 A9.2	10
3.1	Power Output Test Procedure	10
3.2	Power Output Test Data	10
3.3	Limits of Maximum Transmit Power Measurement	10
4	Peak Power Excursion Measurement – FCC 15.407(a)(6)	11
4.1	Limits of Peak Power Excursion	11
4.2	Peak Power Excursion Measurement Test Procedure	11
4.3	Peak Power Excursion Test Data	12
5	Peak Power Spectral Density Measurement – FCC 15.407(a/1/2/3); RSS-210 A9.2	35
5.1	Limits of Peak Power Spectral Density	35
5.2	Peak Power Spectral Density Measurement Test Procedure	35
5.3	Peak Power Spectral Density Test Data	35
6	Frequency Stability Measurement – FCC 15.407(g)	45
6.1	Limits of Frequency Stability	45
6.2	Frequency Stability Measurement Test Procedure	45
6.3	Frequency Stability Test Data	45
7	Compliance With the Band Edge – FCC 15.407(b)(7), 15.205; RSS-210 A9.3	52
7.1	Limits of Band Edge Measurement	52
7.2	Band Edge Test Procedure	52
7.3	Restricted Band Edge Test Results	53
7.3.1	Calculation of Lower Band Edge	53
7.3.2	Calculation of Upper Band Edge	54
7.3.3	Calculation of Lower Band Edge	55
7.3.4	Upper Band Edge	56
8	Undesirable Emissions - 15.407(b); RSS-210 A9.3	57
8.1	Undesirable Emissions Test Procedures	57
8.2	Undesirable Emissions Test Results	58
8.3	Limits of Undesirable Emissions	75
9	26 dB Bandwidth – FCC 15.407(a); RSS-210 A9.2	76
9.1	26 db Bandwidth Test Procedure	76
9.2	26 db Bandwidth Test Results	76
10	Radiated Emissions – FCC 15.209; RSS-Gen	86
10.1	Limits of Radiated Emissions Measurement	86
10.2	Radiated Emissions Measurement Test Procedure	86
10.3	Radiated Emissions Test Results	88
10.3.1	Radiated Emissions Digital Test Data	88
10.3.2	Radiated Emissions Harmonics/Spurious Test Data	88

11	Conducted Emissions - FCC Rules and Regulations Part 15.207; RSS-Gen 7.2.2.....	91
11.1	Site and Test Description	91
11.2	Test Limits.....	91
11.3	Conducted Emissions Test Data.....	92
11.3.1	Conducted Emissions Transmit Center Channel Simultaneous TX	92
11.3.2	Conducted Emissions Receive Channel 6 DSSS	93
12	Conclusion	94

Figure Index

Figure 2-1:	Configuration of System Under Test.....	9
-------------	---	---

Table Index

Table 2-1:	Channels Tested - 802.11a (54 Mbps).....	8
Table 2-2:	Test Result Summary – FCC Part 15, Subpart E (Section 15.407)	8
Table 2-3:	Equipment Under Test	9
Table 2-4:	Support Equipment.....	9
Table 3-1:	Power Output Test Equipment	10
Table 3-2:	Power Output Test Data.....	10
Table 4-1:	Peak Power Excursion Measurement Test Equipment.....	11
Table 4-2:	Peak Power Excursion Test Data - Channel 60; 5300 MHz	12
Table 5-1:	Peak Power Spectral Density Measurement Test Equipment	35
Table 5-2:	Peak Power Spectral Density Test Data	35
Table 6-1:	Frequency Stability Measurement Test Equipment	45
Table 6-2:	Frequency Stability/Temperature Variation; Channel 36 – 5180 MHz.....	45
Table 6-3:	Frequency Stability/Voltage Variation; Channel 36 – 5180 MHz	46
Table 6-4:	Frequency Stability/Temperature Variation; Channel 40 – 5200 MHz.....	46
Table 6-5:	Frequency Stability/Voltage Variation; Channel 40 – 5200 MHz	46
Table 6-6:	Frequency Stability/Temperature Variation; Channel 48 – 5240 MHz.....	46
Table 6-7:	Frequency Stability/Voltage Variation; Channel 48 – 5240 MHz	47
Table 6-8:	Frequency Stability/Temperature Variation; Channel 52 – 5260 MHz.....	47
Table 6-9:	Frequency Stability/Voltage Variation; Channel 52 – 5260 MHz	47
Table 6-10:	Frequency Stability/Temperature Variation; Channel 60 – 5300 MHz.....	48
Table 6-11:	Frequency Stability/Voltage Variation; Channel 60 – 5300 MHz	48
Table 6-12:	Frequency Stability/Temperature Variation; Channel 64 – 5320 MHz.....	48
Table 6-13:	Frequency Stability/Voltage Variation; Channel 64 – 5320 MHz	49
Table 6-14:	Frequency Stability/Temperature Variation; Channel 100 – 5500 MHz.....	49
Table 6-15:	Frequency Stability/Voltage Variation; Channel 100 – 5500 MHz	49
Table 6-16:	Frequency Stability/Temperature Variation; Channel 116 – 5580 MHz.....	50
Table 6-17:	Frequency Stability/Voltage Variation; Channel 116 – 5580 MHz	50
Table 6-18:	Frequency Stability/Temperature Variation; Channel 140 – 5700 MHz.....	50
Table 6-19:	Frequency Stability/Voltage Variation; Channel 140 – 5700 MHz	51
Table 7-1:	Band Edge Test Equipment	52

Table 8-1:	Undesirable Test Equipment.....	57
Table 9-1:	26 dB Bandwidth Test Equipment.....	76
Table 9-2:	26 db Bandwidth Test Data.....	76
Table 10-1:	Radiated Emissions Test Equipment	87
Table 10-2:	Digital Radiated Emissions	88
Table 10-3:	Radiated Emissions Harmonics/Spurious Channel 36 (TX Frequency: 5180 MHz).....	88
Table 10-4:	Radiated Emissions Harmonics/Spurious Channel 40 (TX Frequency: 5200 MHz).....	88
Table 10-5:	Radiated Emissions Harmonics/Spurious Channel 48 (TX Frequency: 5240 MHz).....	89
Table 10-6:	Radiated Emissions Harmonics/Spurious Channel 52 (TX Frequency: 5260 MHz).....	89
Table 10-7:	Radiated Emissions Harmonics/Spurious Channel 60 (TX Frequency: 5300 MHz).....	89
Table 10-8:	Radiated Emissions Harmonics/Spurious Channel 64 (TX Frequency: 5320 MHz).....	89
Table 10-9:	Radiated Emissions Harmonics/Spurious Channel 100 (TX Frequency: 5500 MHz).....	90
Table 10-10:	Radiated Emissions Harmonics/Spurious Channel 116 (TX Frequency: 5580 MHz)....	90
Table 10-11:	Radiated Emissions Harmonics/Spurious Channel 140(TX Frequency: 5700 MHz).....	90
Table 11-1:	Conducted Emissions Test Equipment	94

Plot Index

Plot 4-1:	Peak Power Excursion: 6 mbps	13
Plot 4-2:	Peak Power Excursion: 9 mbps	14
Plot 4-3:	Peak Power Excursion: 12 mbps	15
Plot 4-4:	Peak Power Excursion: 18 mbps	16
Plot 4-5:	Peak Power Excursion: 24 mbps	17
Plot 4-6:	Peak Power Excursion: 36 mbps	18
Plot 4-7:	Peak Power Excursion: 48 mbps	19
Plot 4-8:	Peak Power Excursion: 54 mbps	20
Plot 4-9:	Peak Power Excursion: 6.5 mbps	21
Plot 4-10:	Peak Power Excursion: 7.2 mbps	22
Plot 4-11:	Peak Power Excursion: 13 mbps	23
Plot 4-12:	Peak Power Excursion: 14.4 mbps	24
Plot 4-13:	Peak Power Excursion: 19.5 mbps	25
Plot 4-14:	Peak Power Excursion: 21.7 mbps	26
Plot 4-15:	Peak Power Excursion: 28.9 mbps	27
Plot 4-16:	Peak Power Excursion: 39 mbps	28
Plot 4-17:	Peak Power Excursion: 43.3 mbps	29
Plot 4-18:	Peak Power Excursion: 52 mbps	30
Plot 4-19:	Peak Power Excursion: 57.8 mbps	31
Plot 4-20:	Peak Power Excursion: 58.5 mbps	32
Plot 4-21:	Peak Power Excursion: 65 mbps	33
Plot 4-22:	Peak Power Excursion: 72.2 mbps	34
Plot 5-1:	Peak Power Spectral Density: Channel 36 (5180 MHz)	36
Plot 5-2:	Peak Power Spectral Density: Channel 40 (5200 MHz)	37
Plot 5-3:	Peak Power Spectral Density: Channel 48 (5240 MHz)	38
Plot 5-4:	Peak Power Spectral Density: Channel 52 (5260 MHz)	39
Plot 5-5:	Peak Power Spectral Density: Channel 60 (5300 MHz)	40
Plot 5-6:	Peak Power Spectral Density: Channel 64 (5320 MHz)	41
Plot 5-7:	Peak Power Spectral Density: Channel 100 (5500 MHz)	42
Plot 5-8:	Peak Power Spectral Density: Channel 116 (5580 MHz)	43
Plot 5-9:	Peak Power Spectral Density: Channel 140 (5700 MHz)	44

Plot 7-1:	Lower Band Edge: Measurement Channel 36 (TX Frequency: 5180 MHz)	53
Plot 7-2:	Upper Band Edge: Measurement Channel 64 (TX Frequency: 5320 MHz)	54
Plot 7-3:	Lower Band Edge: Peak Measurement Channel 100 (TX Frequency: 5500 MHz)	55
Plot 7-4:	Upper Band Edge Measurement Channel 140 (TX Frequency: 5700 MHz)	56
Plot 8-1:	Undesirable Emissions Channel 36 (5180 MHz); 9 kHz – 26.5 GHz	58
Plot 8-2:	Undesirable Emissions Channel 36 (5180 MHz); 26.5 - 40 GHz	59
Plot 8-3:	Undesirable Emissions Channel 40 (5200 MHz); 9 kHz – 26.5 GHz	60
Plot 8-4:	Undesirable Emissions Channel 40 (5200 MHz); 26.5 - 40 GHz	61
Plot 8-5:	Undesirable Emissions Channel 48 (5240 MHz); 9 kHz – 26.5 GHz	62
Plot 8-6:	Undesirable Emissions Channel 48 (5240 MHz); 26.5 - 40 GHz	63
Plot 8-7:	Undesirable Emissions Channel 52 (5260 MHz); 9 kHz – 26.5 GHz	64
Plot 8-8:	Undesirable Emissions Channel 52 (5260 MHz); 26.5 - 40 GHz	65
Plot 8-9:	Undesirable Emissions Channel 60 (5300 MHz); 9 kHz – 26.5 GHz	66
Plot 8-10:	Undesirable Emissions Channel 60 (5300 MHz); 26.5 - 40 GHz	67
Plot 8-11:	Undesirable Emissions Channel 64 (5320 MHz); 9 kHz – 26.5 GHz	68
Plot 8-12:	Undesirable Emissions Channel 64 (5320 MHz); 26.5 - 40 GHz	69
Plot 8-13:	Undesirable Emissions Channel 100 (5500 MHz); 9 kHz – 26.5 GHz	70
Plot 8-14:	Undesirable Emissions Channel 100 (5500 MHz); 26.5 - 40 GHz	71
Plot 8-15:	Undesirable Emissions Channel 116 (5580 MHz); 9 kHz – 26.5 GHz	72
Plot 8-16:	Undesirable Emissions Channel 116 (5580 MHz); 26.5 - 40 GHz	73
Plot 8-17:	Undesirable Emissions Channel 140 (5700 MHz); 9 kHz – 26.5 GHz	74
Plot 8-18:	Undesirable Emissions Channel 140 (5700 MHz); 26.5 - 40 GHz	75
Plot 9-1:	26 dB Bandwidth Channel 36 (TX Frequency 5180 MHz) - 802.11a	77
Plot 9-2:	26 dB Bandwidth Channel 40 (TX Frequency 5200 MHz) - 802.11a	78
Plot 9-3:	26 dB Bandwidth Channel 48 (TX Frequency 5240 MHz) - 802.11a	79
Plot 9-4:	26 dB Bandwidth Channel 52 (TX Frequency 5260 MHz) - 802.11a	80
Plot 9-5:	26 dB Bandwidth Channel 60 (TX Frequency 5300 MHz) - 802.11a	81
Plot 9-6:	26 dB Bandwidth Channel 64 (TX Frequency 5320 MHz) - 802.11a	82
Plot 9-7:	26 dB Bandwidth Channel 100 (TX Frequency 5500 MHz) - 802.11a	83
Plot 9-8:	26 dB Bandwidth Channel 116 (TX Frequency 5580 MHz) - 802.11a	84
Plot 9-9:	26 dB Bandwidth Channel 140 (TX Frequency 5700 MHz) - 802.11a	85
Plot 11-1:	Conducted Emissions Transmit (Channel 100) - Neutral Side	92
Plot 11-2:	Conducted Emissions Transmit (Channel 100) - Hot Side	92
Plot 11-3:	Conducted Emissions Receive (Channel 100) - Neutral Side	93
Plot 11-4:	Conducted Emissions Receive (Channel 100) - Hot Side	93

Appendix Index

Appendix A:	RF Exposure Compliance	95
Appendix B:	Agency Authorization Letter	96
Appendix C:	Confidentiality Request Letter	97
Appendix D:	IC Letters	98
Appendix E:	Label and Label Location	99
Appendix F:	Technical Operational Description	100
Appendix G:	Schematics	101
Appendix H:	Block Diagram	102
Appendix I:	Manual	103
Appendix J:	Test Photographs	104
Appendix K:	External Photographs	108
Appendix L:	Internal Photographs	109

Photograph Index

Photograph 1:	Unintentional Radiated Emissions Testing – Front View	104
Photograph 2:	Unintentional Radiated Emissions Testing – Back View.....	105
Photograph 3:	Conducted Emissions Testing – Front View	106
Photograph 4:	Conducted Emissions Testing – Back View.....	107

1 General Information

1.1 Scope

Applicable Standards:

- FCC Rules Part 15E: Unlicensed National Information Infrastructure Devices
- Industry Canada RSS-210: Low Power License-Exempt Communications Devices

1.2 Description of EUT

Equipment Under Test	A700 Series Terminal
Models	TAP910-01, TAP920-01, TAP930-01
Power Supply	Battery operated
Modulation Type	DSSS, OFDM
Transfer Rate	1, 2, 5.5, 11, 6, 12, 18, 24, 36, 48, 54
Frequency Range	5180 – 5320; 5500 - 5700 MHz
Antenna Connector Type	Internal
Antenna Types	Internal

Note that the EUT is a slave/client device with no ad-hoc capabilities.

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 2003).

1.4 Related Submittal(s)/Grant(s)

This is an original certification application for Vocollect, Inc. A700 Series Terminal, Model #'s: TAP910-01, TAP920-01, TAP930-01, FCC ID: MQO-TAP900-01, IC: 2570A-TAP90001. IC will require a family certification.

The three models are electrically identical from an intentional radiator standpoint. The differences in the three models are the end caps, and only impact digital unintentional emissions. RF exposure (SAR) has been addressed for all three models individually.

1.5 Modifications

No modifications were required for compliance.

2 Test Information

2.1 Description of Test Modes

In accordance with FCC 15.31(m), and because the EUT utilizes an operating band greater than 10 MHz, the following frequencies were tested:

Table 2-1: Channels Tested - 802.11a (54 Mbps)

Channel	Frequency (MHz)
36	5180
40	5200
48	5240
52	5260
60	5300
64	5320
100	5500
116	5580
140	5700

2.2 Exercising the EUT

The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted. There were no deviations from the test standard(s) and/or methods. The test results reported relate only to the item tested.

2.3 Test Result Summary

Table 2-2: Test Result Summary – FCC Part 15, Subpart E (Section 15.407)

Standard	Test	Pass/Fail or N/A
FCC 15.407(a)/1/2/3)	Peak Transmit Power Measurement	Pass
FCC 15.407(a)(6)	Peak Power Excursion Measurement	Pass
FCC 15.407(a)/1/2/3)	Peak Power Spectral Density Measurement	Pass
FCC 15.407(g)	Frequency Stability Measurement	Pass
FCC 15.407(7), 15.205	Compliance With the Band Edge	Pass
FCC 15.407(6)(b)	Antenna Conducted Spurious Emissions	Pass
FCC 15.407(a)	26 dB Bandwidth	Pass
FCC 15.209	Radiated Emissions	Pass
FCC 15.207	Conducted AC Emissions	Pass

2.4 Test System Details

The test sample was received on June 17, 2013. The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in the following tables.

Table 2-3: Equipment Under Test

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
A700 Series Terminal	Vocollect, Inc.	TAP-910-01	6213270002	MQO-TAP900-01	N/A	21214
A700 Series Terminal	Vocollect, Inc.	TAP-920-01	6213234004	MQO-TAP900-01	N/A	21212
A700 Series Terminal	Vocollect, Inc.	TAP-930-01	5913224022	MQO-TAP900-01	N/A	21222
3.7VDC Lithium Ion Battery	Vocollect, Inc.	BT-902 (730044)	351309002900	N/A	N/A	21213
3.7VDC Lithium Ion Battery	Vocollect, Inc.	BT-902 (730044)	351309005500	N/A	N/A	21239
3.7VDC Lithium Ion Battery	Vocollect, Inc.	BT-902 (730044)	351228002500	N/A	N/A	21236

Table 2-4: Support Equipment

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
Headset	Vocollect, Inc.	N/A	N/A	N/A	N/A	20904

2.5 Configuration of Tested System

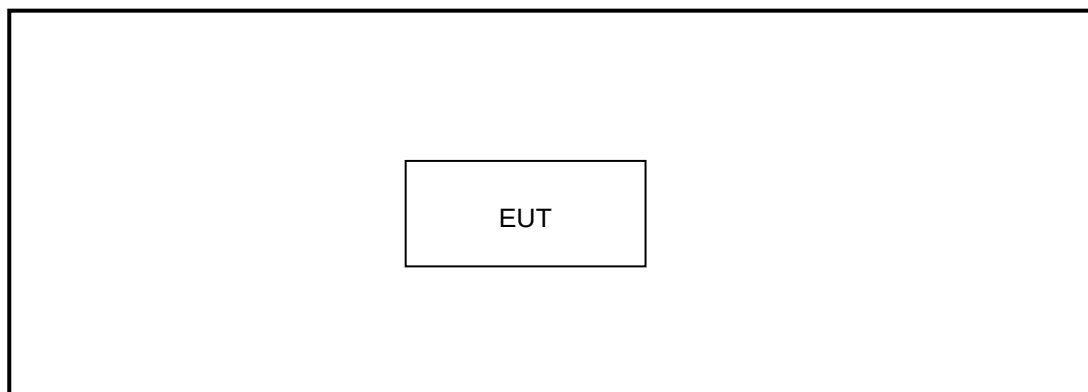


Figure 2-1: Configuration of System Under Test

3 Peak Transmit Power Measurement – FCC 15.407(a/1/2/3); RSS-210 A9.2

3.1 Power Output Test Procedure

Method SA-1 789033 D01 General UNII Test Procedures v01r03

Table 3-1: Power Output Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz - 26.5 GHz)	MY51250846	4/16/14
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	3/18/14

3.2 Power Output Test Data


Table 3-2: Power Output Test Data

Channel	Frequency (MHz)	Maximum Conducted Output Power (dBm)
36	5180	7.1
40	5200	7.0
48	5240	7.0
52	5260	14.5
60	5300	14.3
64	5320	14.3
100	5500	14.9
116	5580	15.0
140	5700	14.4

3.3 Limits of Maximum Transmit Power Measurement

Frequency Band	Limit
5.15-5.25GHz	The lesser of 50 mW (17 dBm) or 4 dBm+10logB (14+4)
5.25-5.35GHz	The lesser of 250 mW (24 dBm) or 11 dBm+10logB (14.4+11)
5.725-5.825GHz	The lesser of 1 W (30 dBm) or 17 dBm+10logB (15+17)

Test Personnel:

Daniel W. Baltzell		July 25, 2013
Test Engineer	Signature	Date of Test

4 Peak Power Excursion Measurement – FCC 15.407(a)(6)

4.1 Limits of Peak Power Excursion

Frequency Band	Limit
5.15-5.25 GHz	13 dB
5.25-5.35 GHz	13 dB
5.725-5.825 GHz	13 dB

4.2 Peak Power Excursion Measurement Test Procedure

1. The transmit output was connected to a spectrum analyzer.
2. Span was set to the entire emission bandwidth of signal.
3. Using peak detector and max hold function for trace 1, and average detector for trace 2, the RBW was set to 1 MHz and VBW to 3 MHz.
4. The delta measurement was recorded between the largest difference between the traces in any 1 MHz band for each modulation rate/type using channel 60, 5300 MHz.

Table 4-1: Peak Power Excursion Measurement Test Equipment


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz - 26.5 GHz)	MY51250846	4/16/14
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	3/18/14

4.3 Peak Power Excursion Test Data


Table 4-2: Peak Power Excursion Test Data - Channel 60; 5300 MHz

Rate (mbps)	Peak Power Excursion (dB)	Peak to Average Excursion Limit (dB)	Pass/Fail
6.0	8.0	13.0	Pass
9.0	6.3	13.0	Pass
12.0	7.7	13.0	Pass
18.0	7.7	13.0	Pass
24.0	7.3	13.0	Pass
36.0	7.5	13.0	Pass
48.0	6.8	13.0	Pass
54.0	8.0	13.0	Pass
6.5	6.6	13.0	Pass
7.2	7.2	13.0	Pass
13.0	7.8	13.0	Pass
14.4	7.3	13.0	Pass
19.5	7.0	13.0	Pass
21.7	7.2	13.0	Pass
26.0	8.2	13.0	Pass
28.9	7.8	13.0	Pass
39.0	8.5	13.0	Pass
43.3	7.6	13.0	Pass
52.0	7.5	13.0	Pass
57.8	8.4	13.0	Pass
58.5	7.8	13.0	Pass
65.0	7.7	13.0	Pass
72.2	7.8	13.0	Pass


Plot 4-1: Peak Power Excursion: 6 mbps

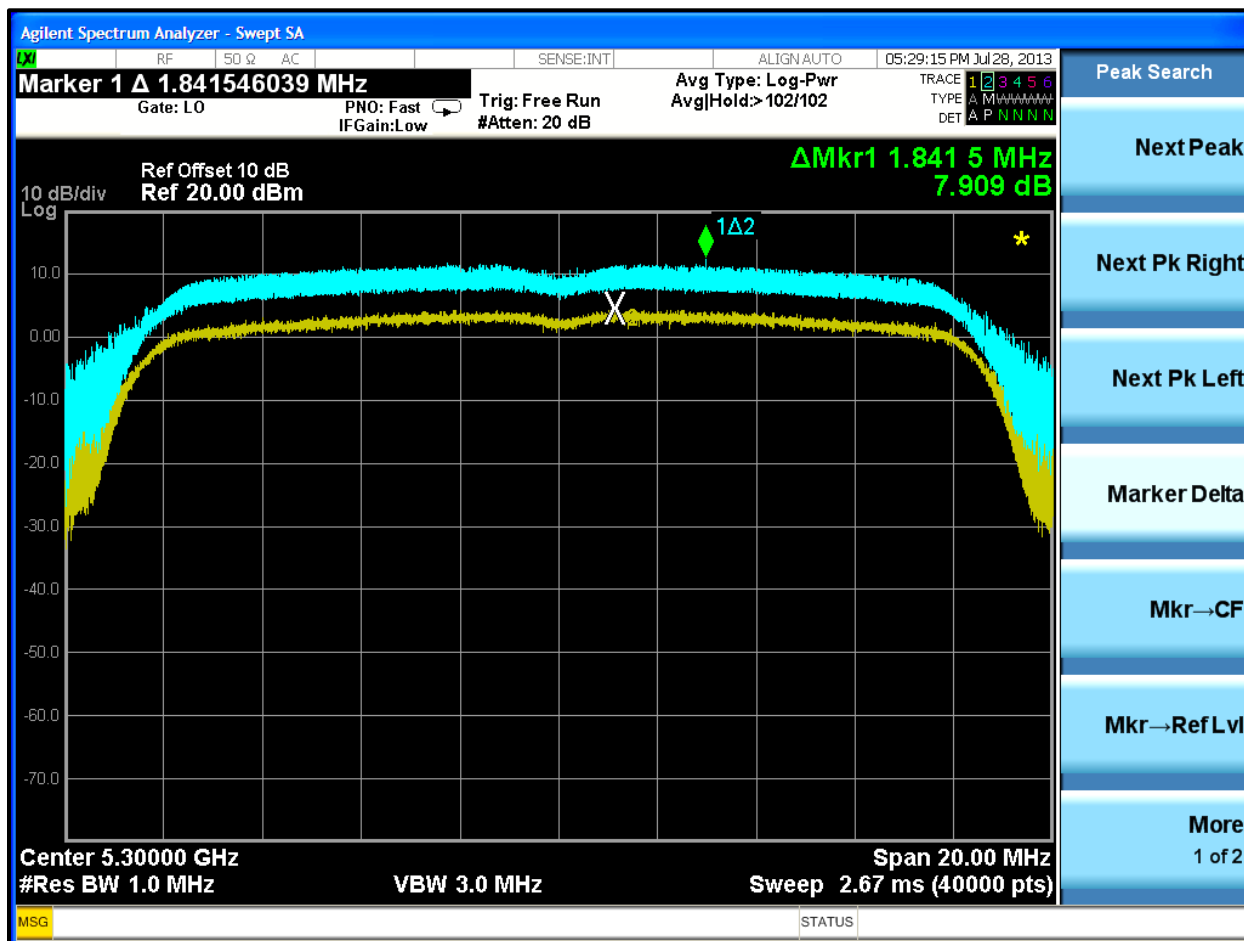


Plot 4-2: Peak Power Excursion: 9 mbps

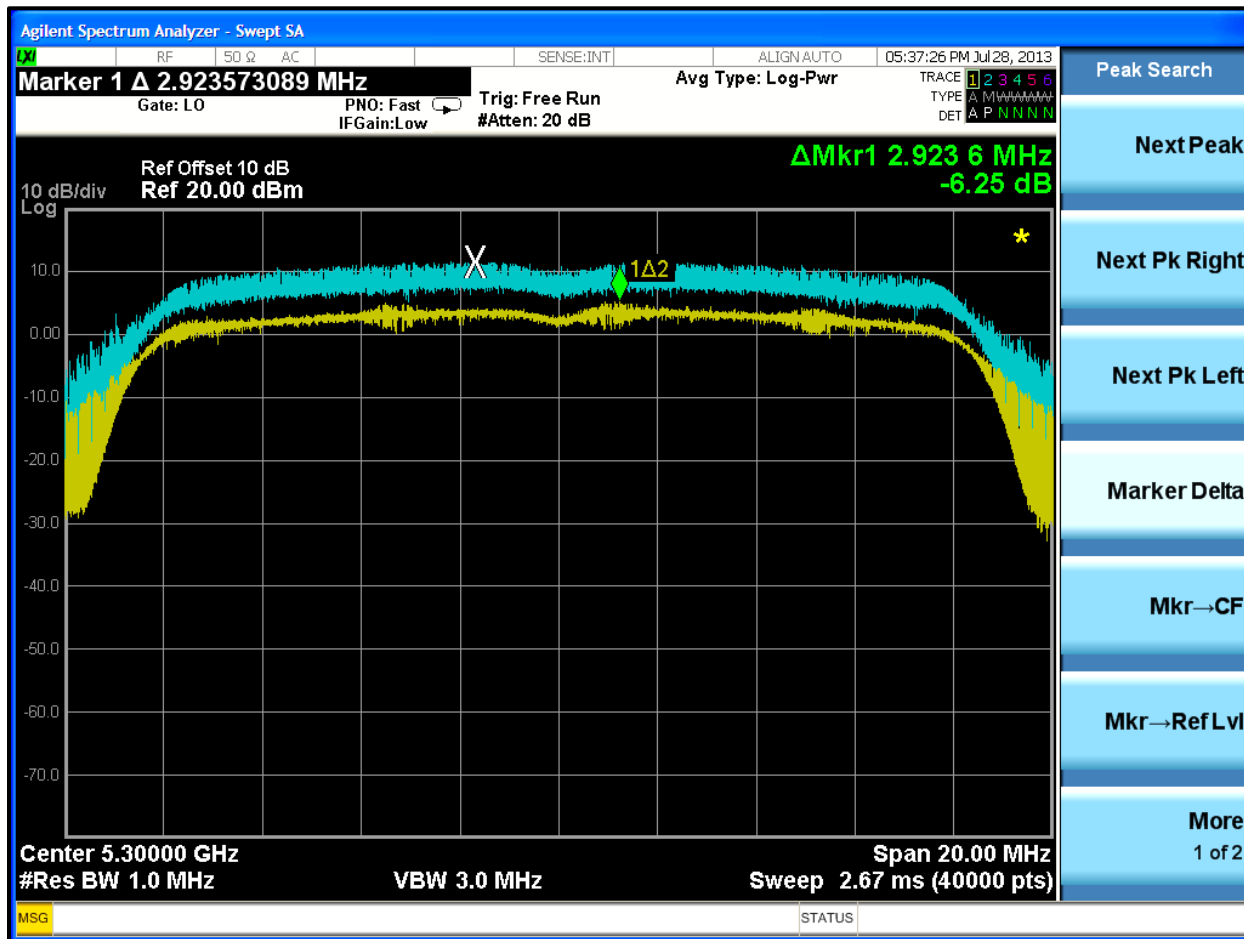


Plot 4-3: Peak Power Excursion: 12 mbps

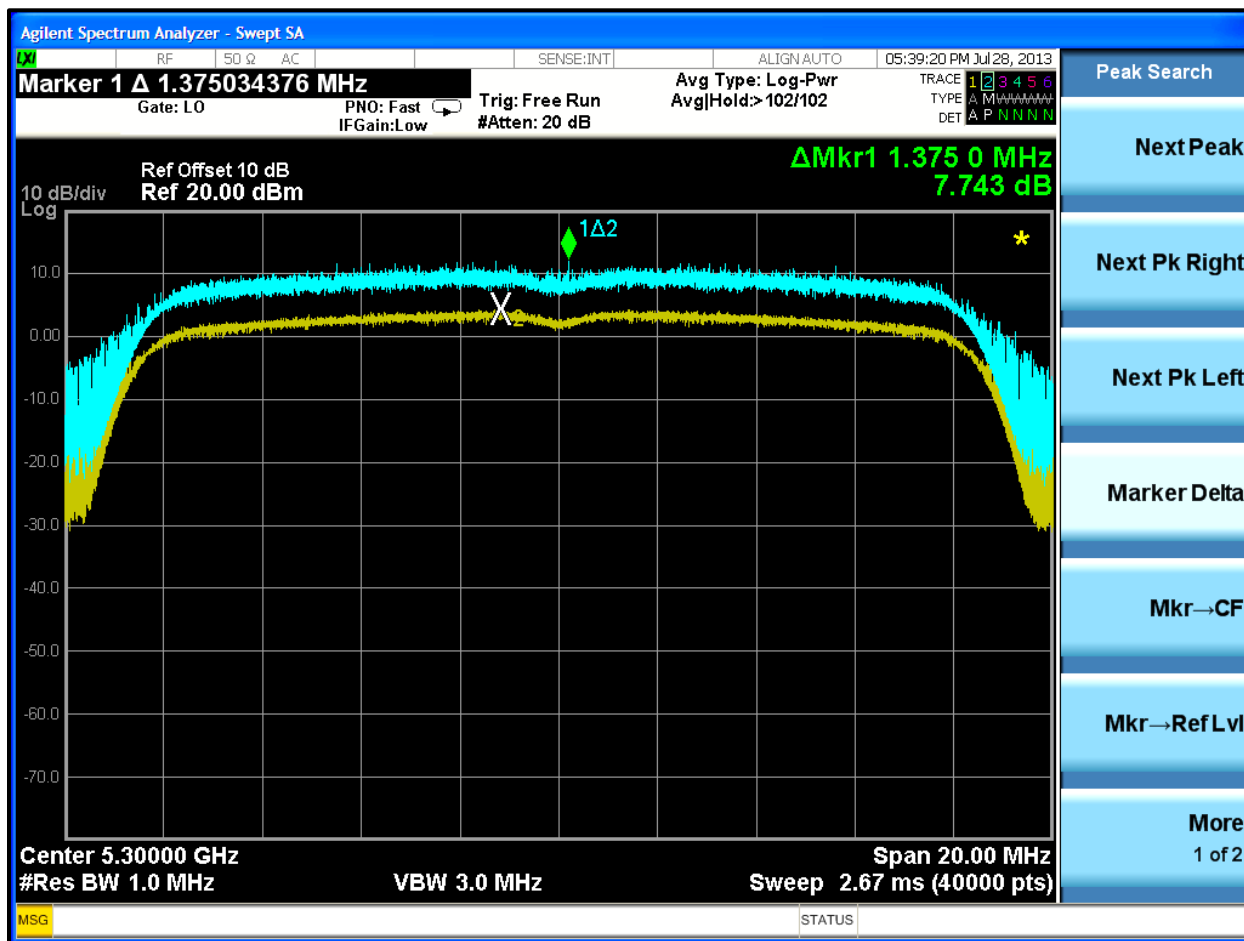


Plot 4-4: Peak Power Excursion: 18 mbps

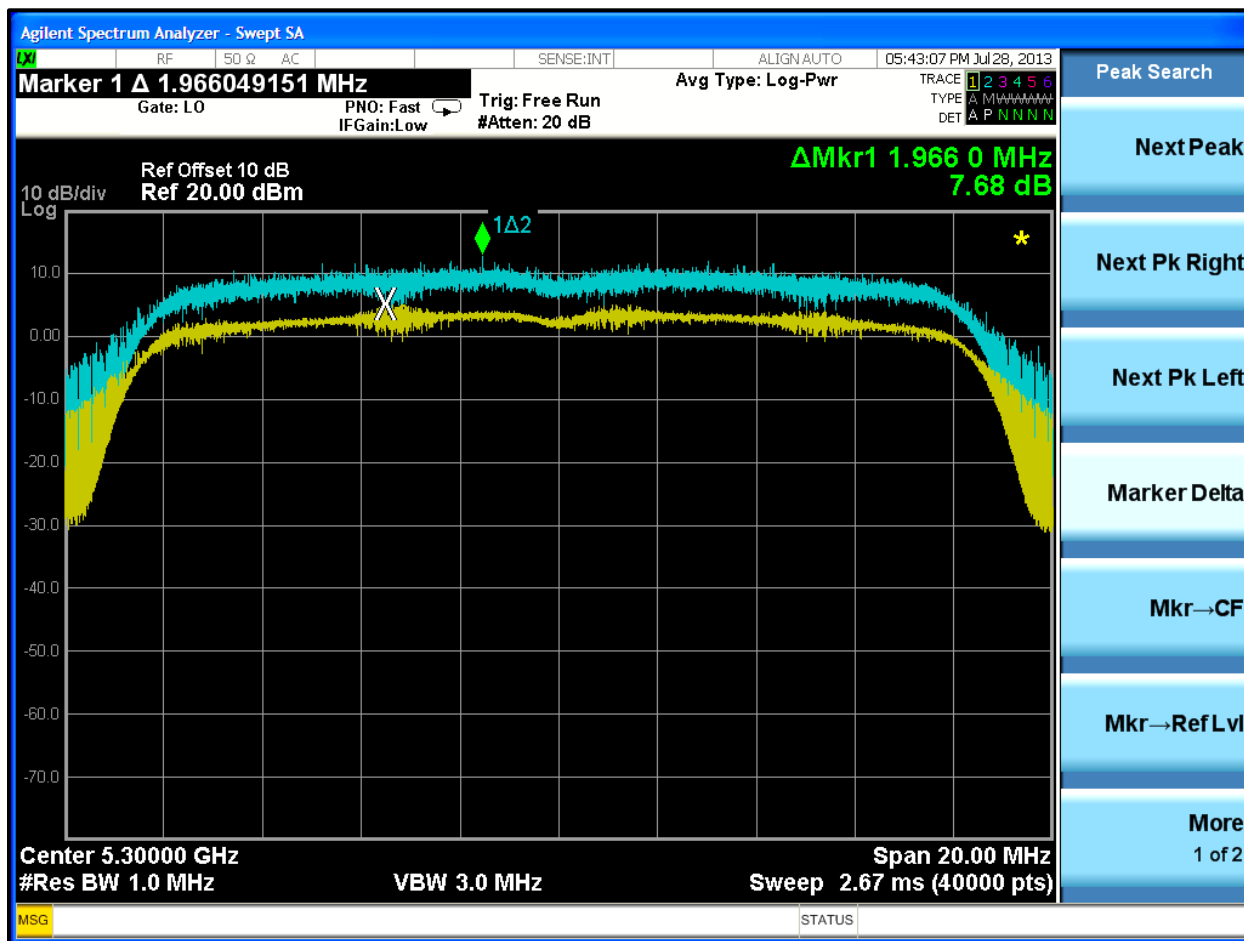


Plot 4-5: Peak Power Excursion: 24 mbps

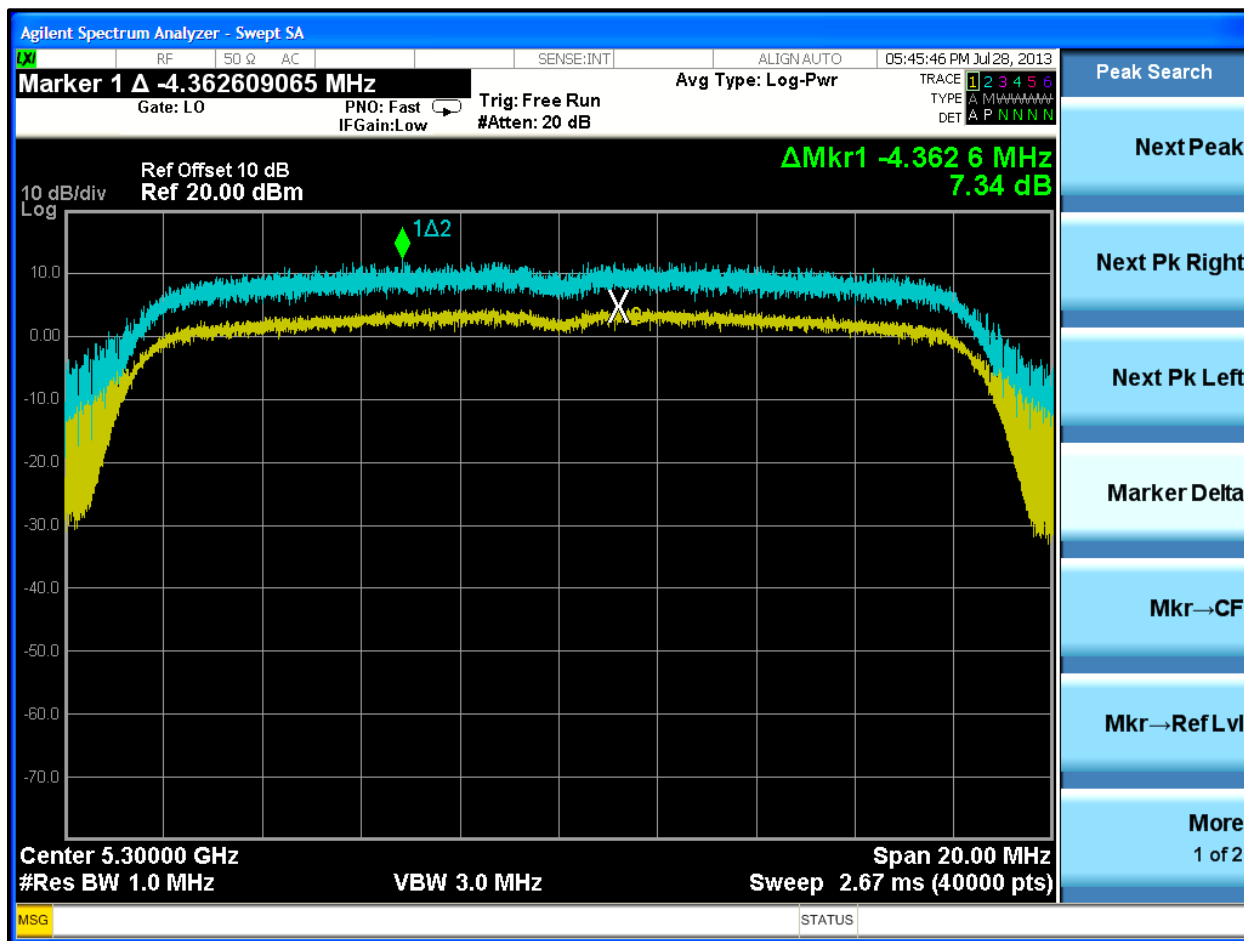


Plot 4-6: Peak Power Excursion: 36 mbps

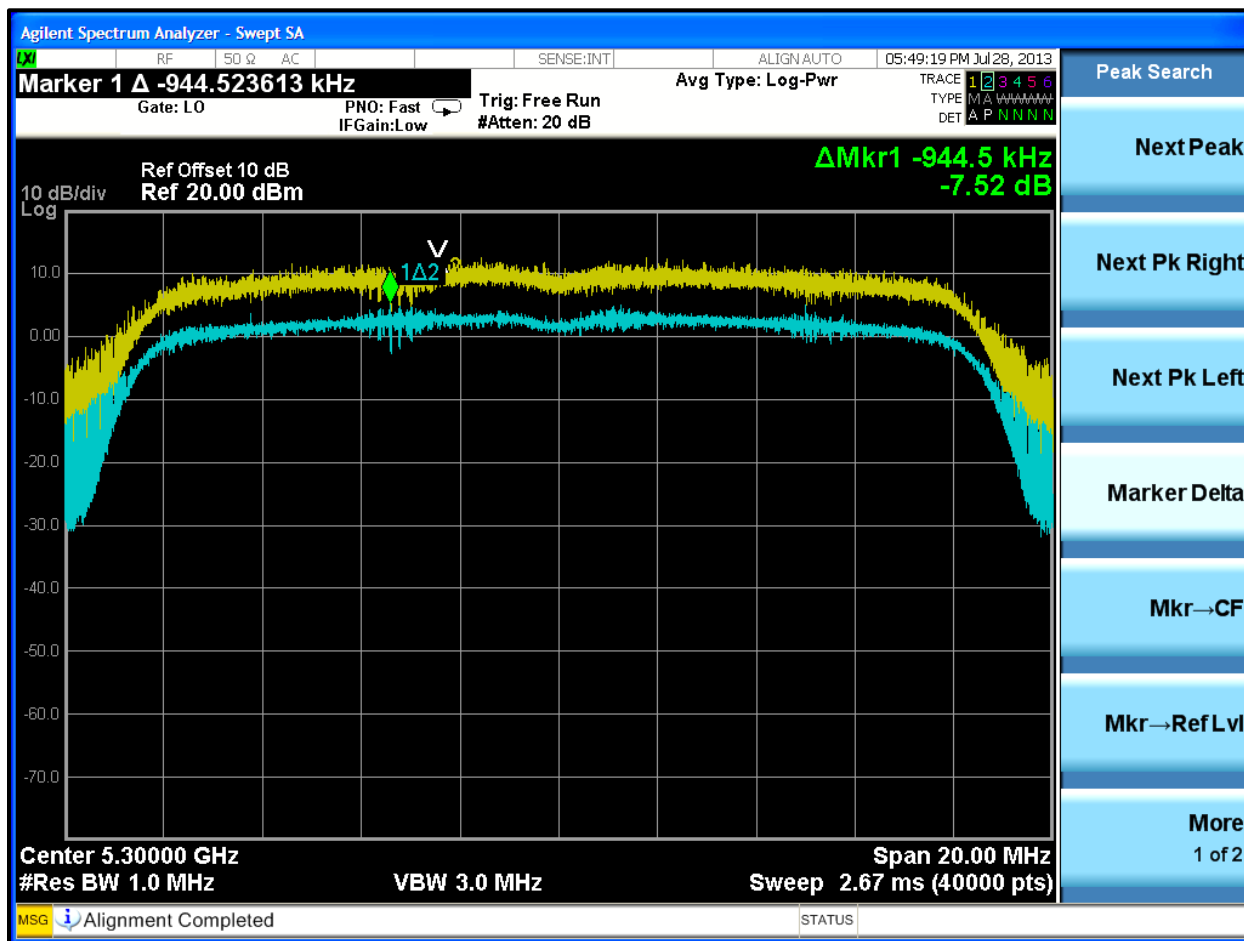


Plot 4-7: Peak Power Excursion: 48 mbps

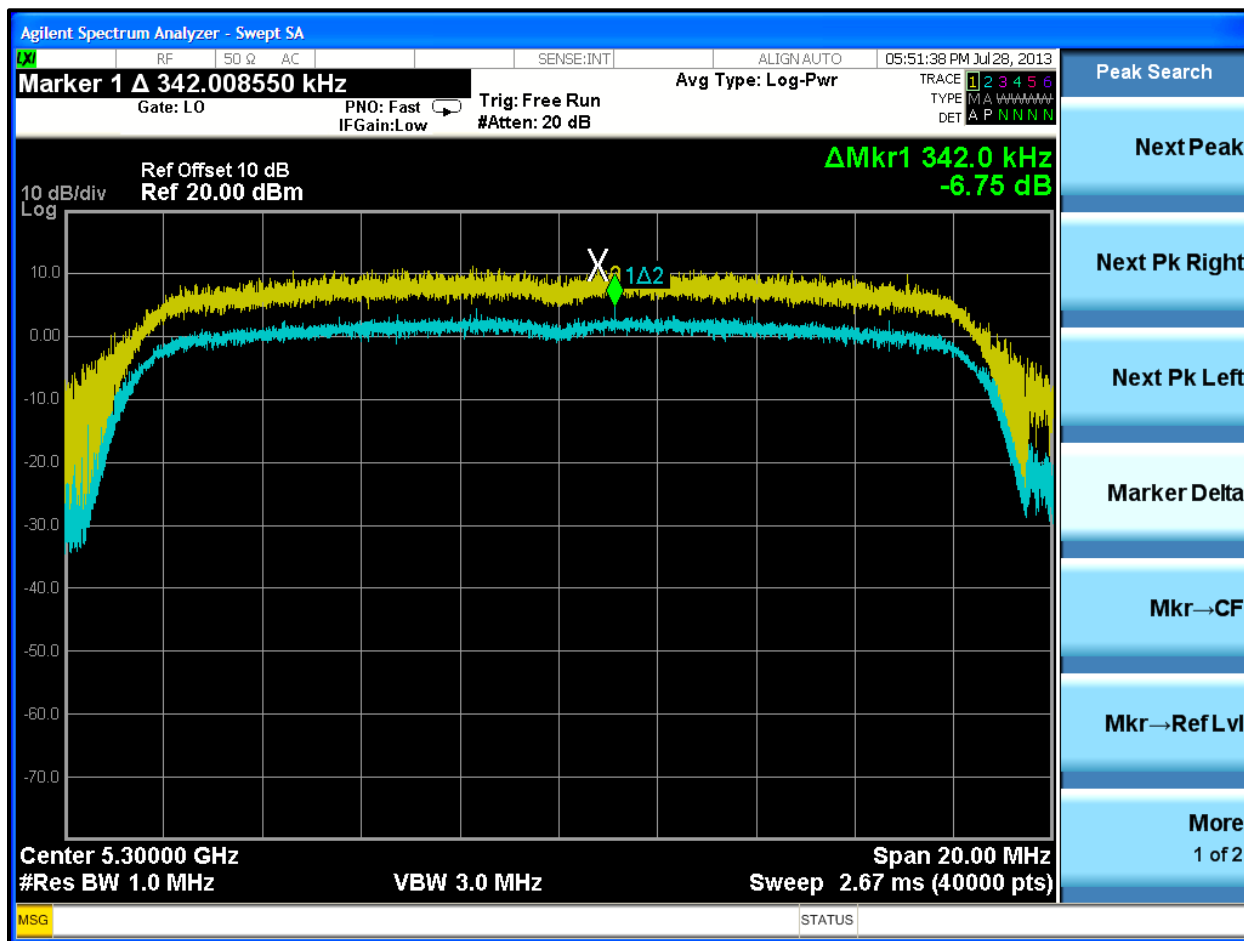


Plot 4-8: Peak Power Excursion: 54 mbps

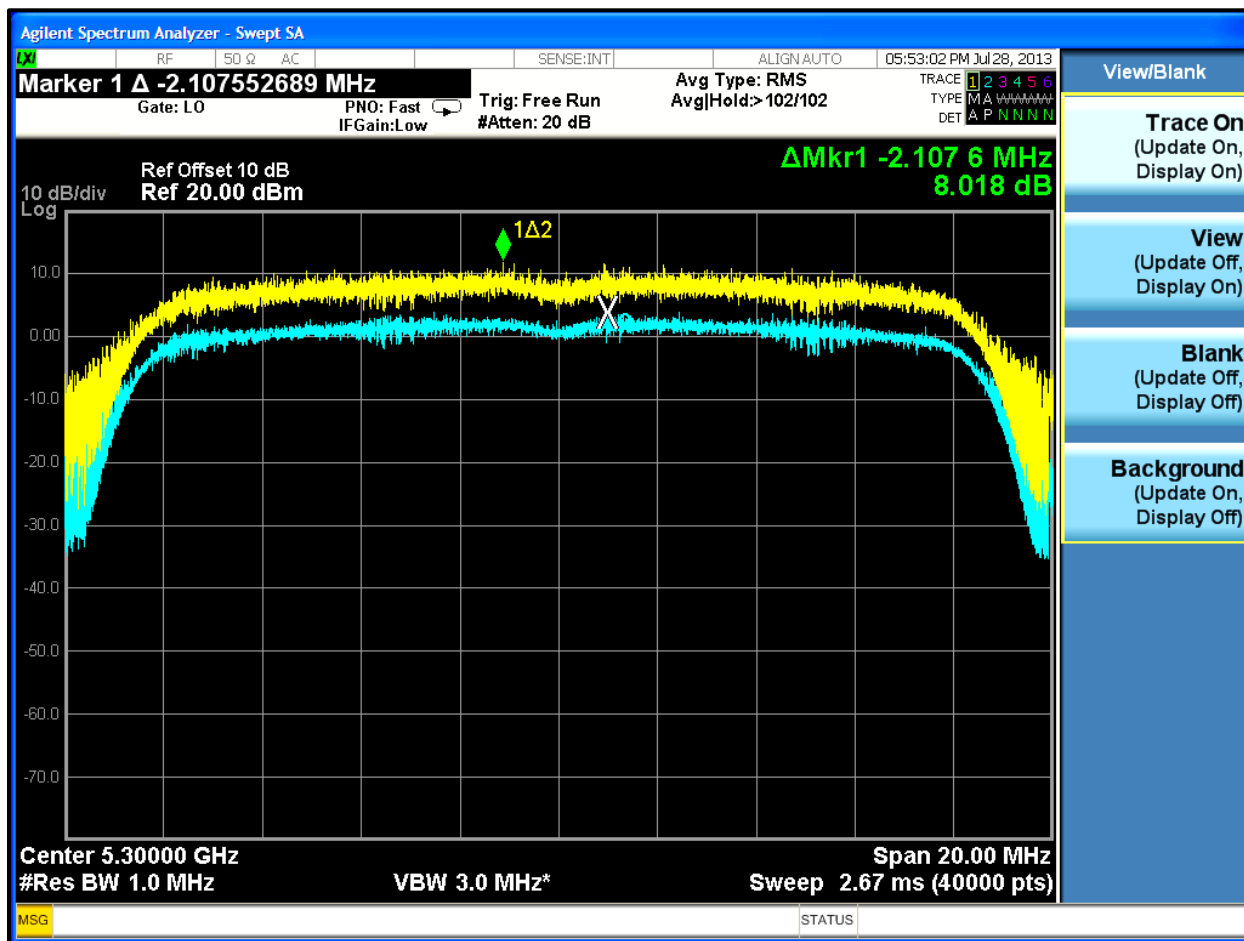


Plot 4-9: Peak Power Excursion: 6.5 mbps

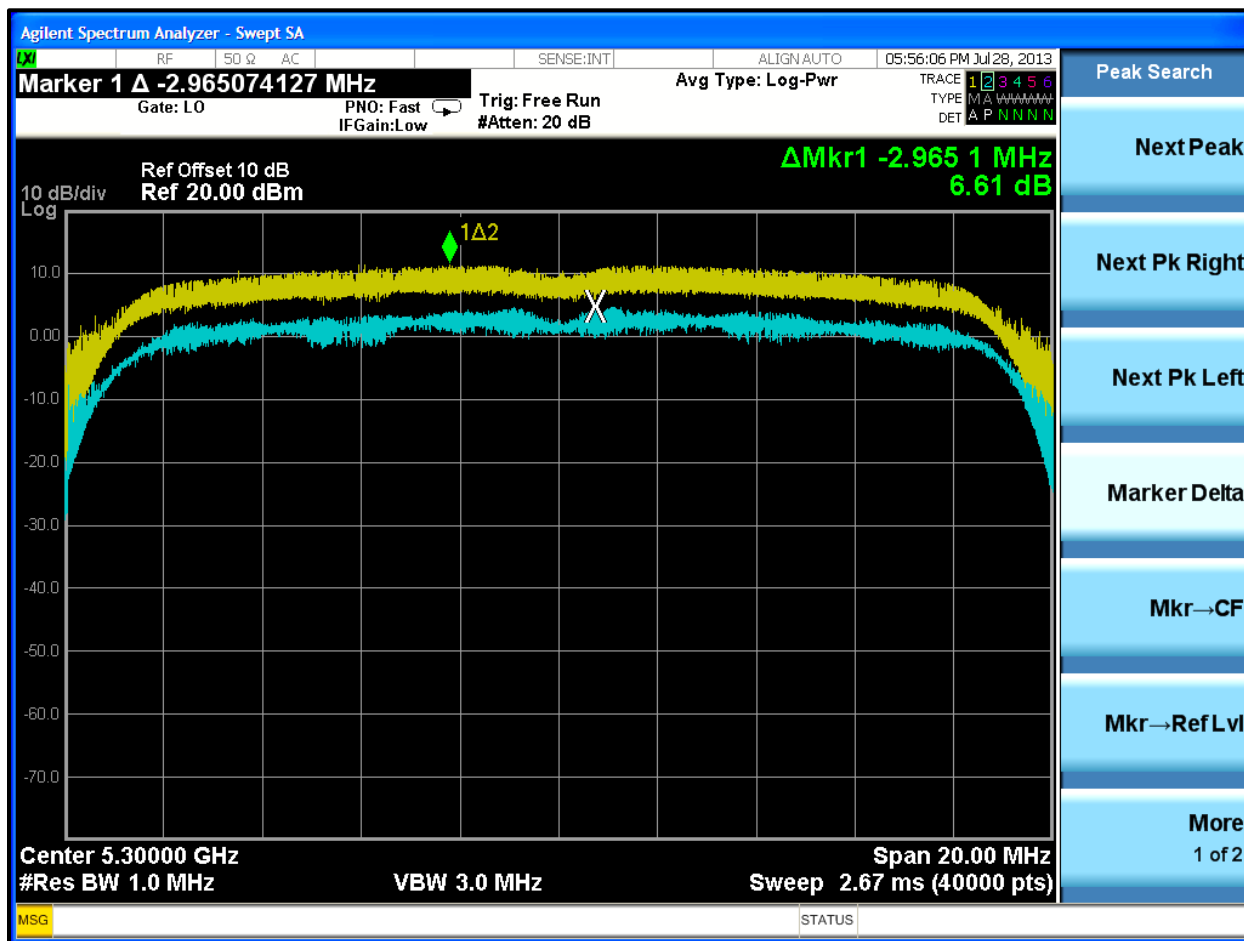


Plot 4-10: Peak Power Excursion: 7.2 mbps

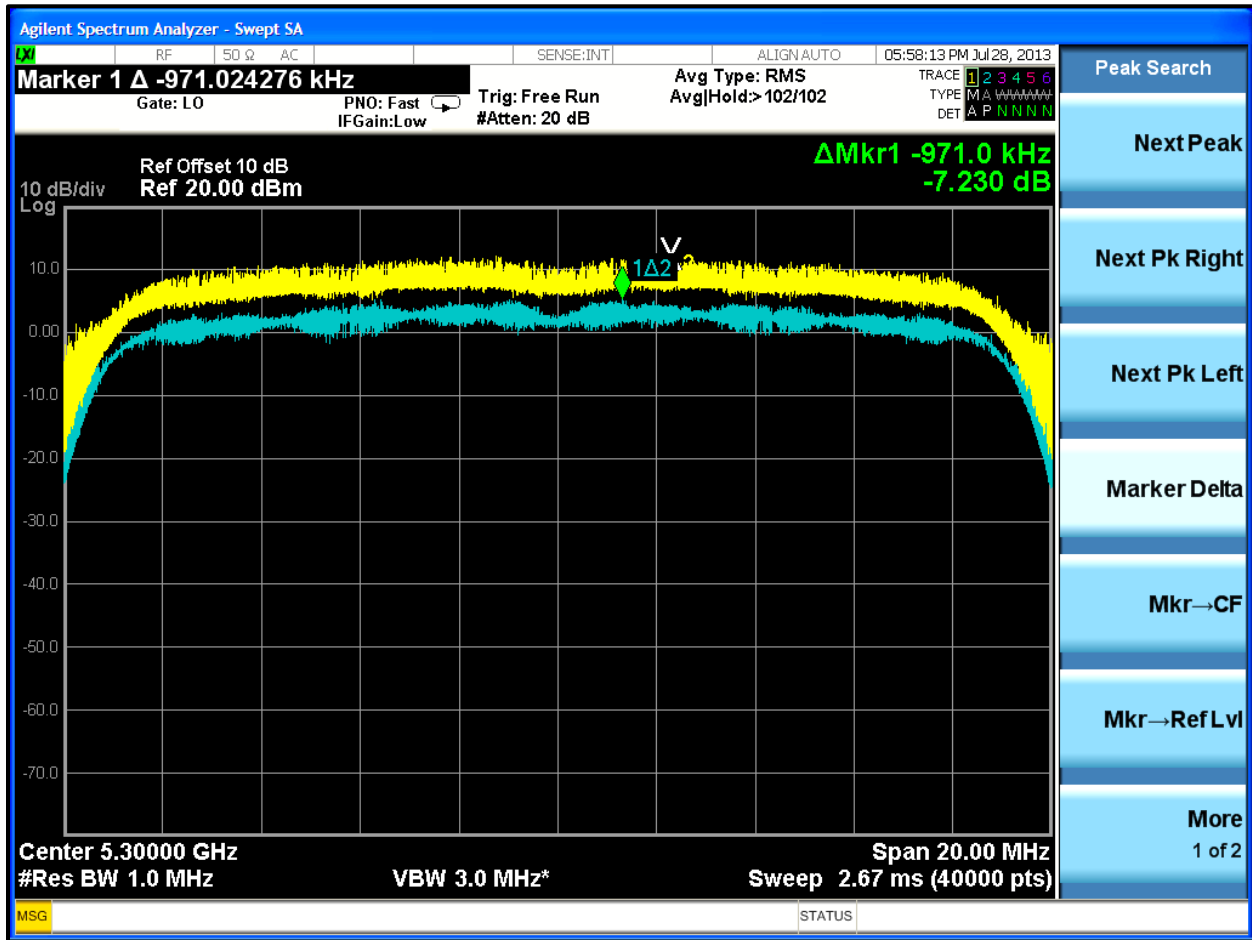


Plot 4-11: Peak Power Excursion: 13 mbps

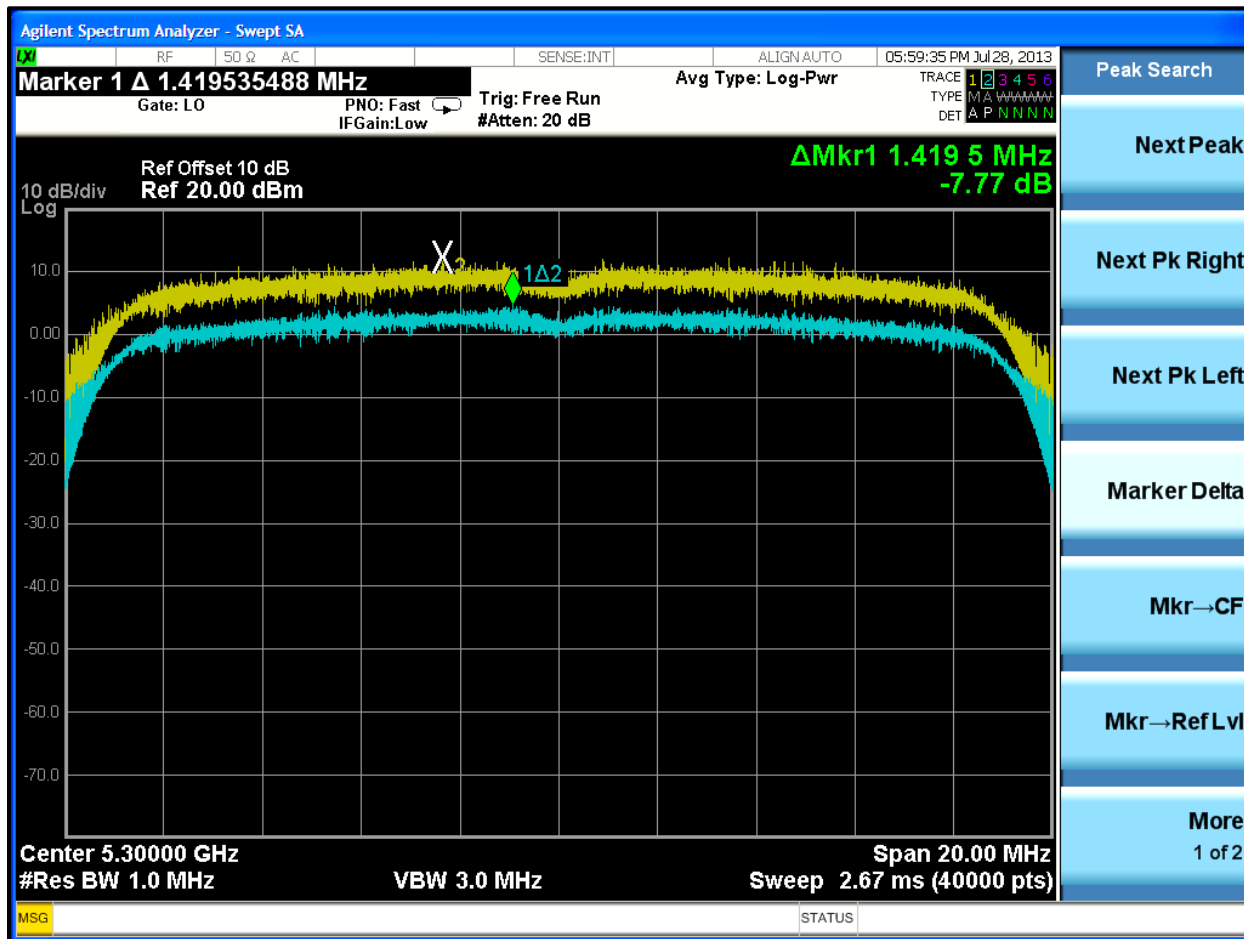


Plot 4-12: Peak Power Excursion: 14.4 mbps

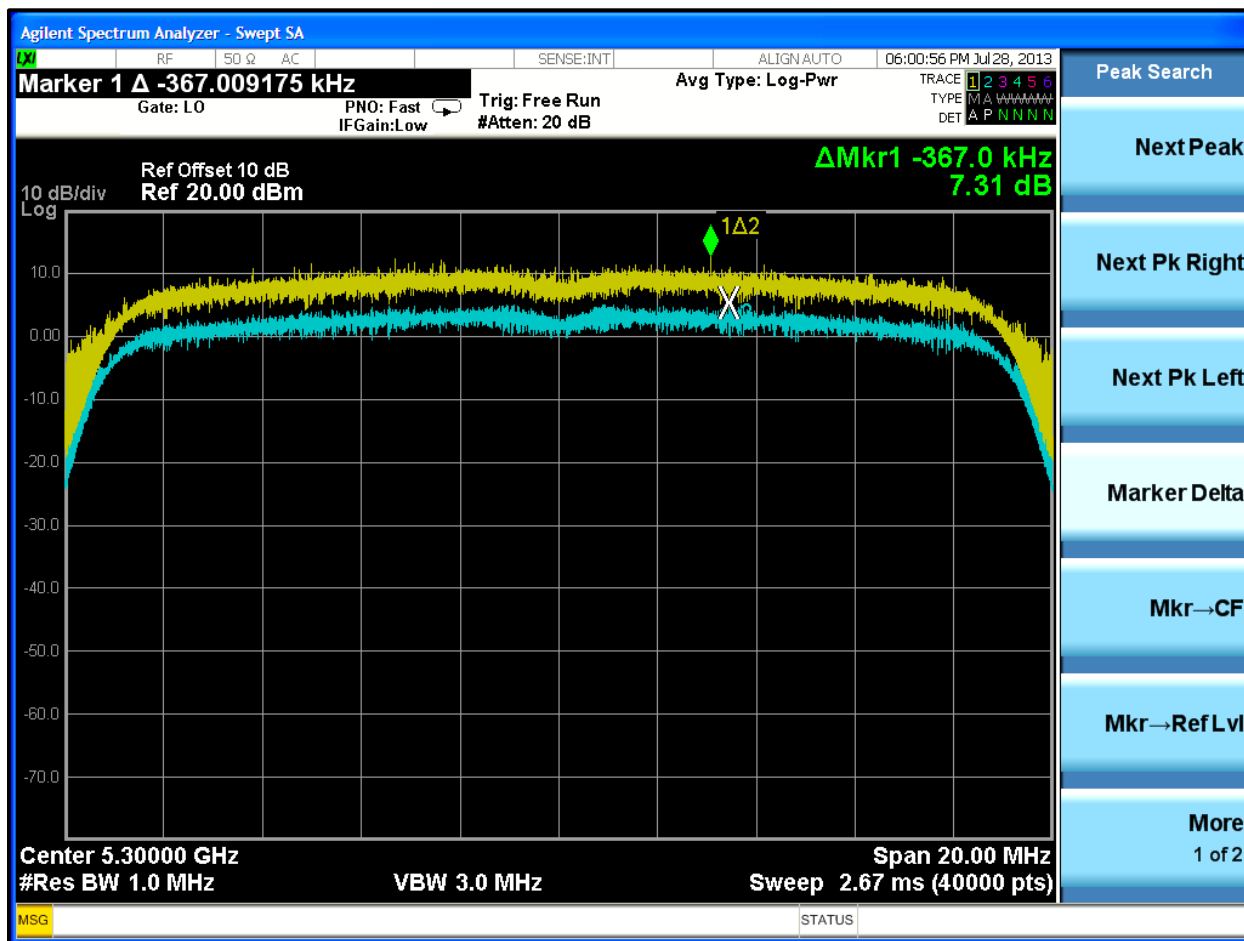


Plot 4-13: Peak Power Excursion: 19.5 mbps

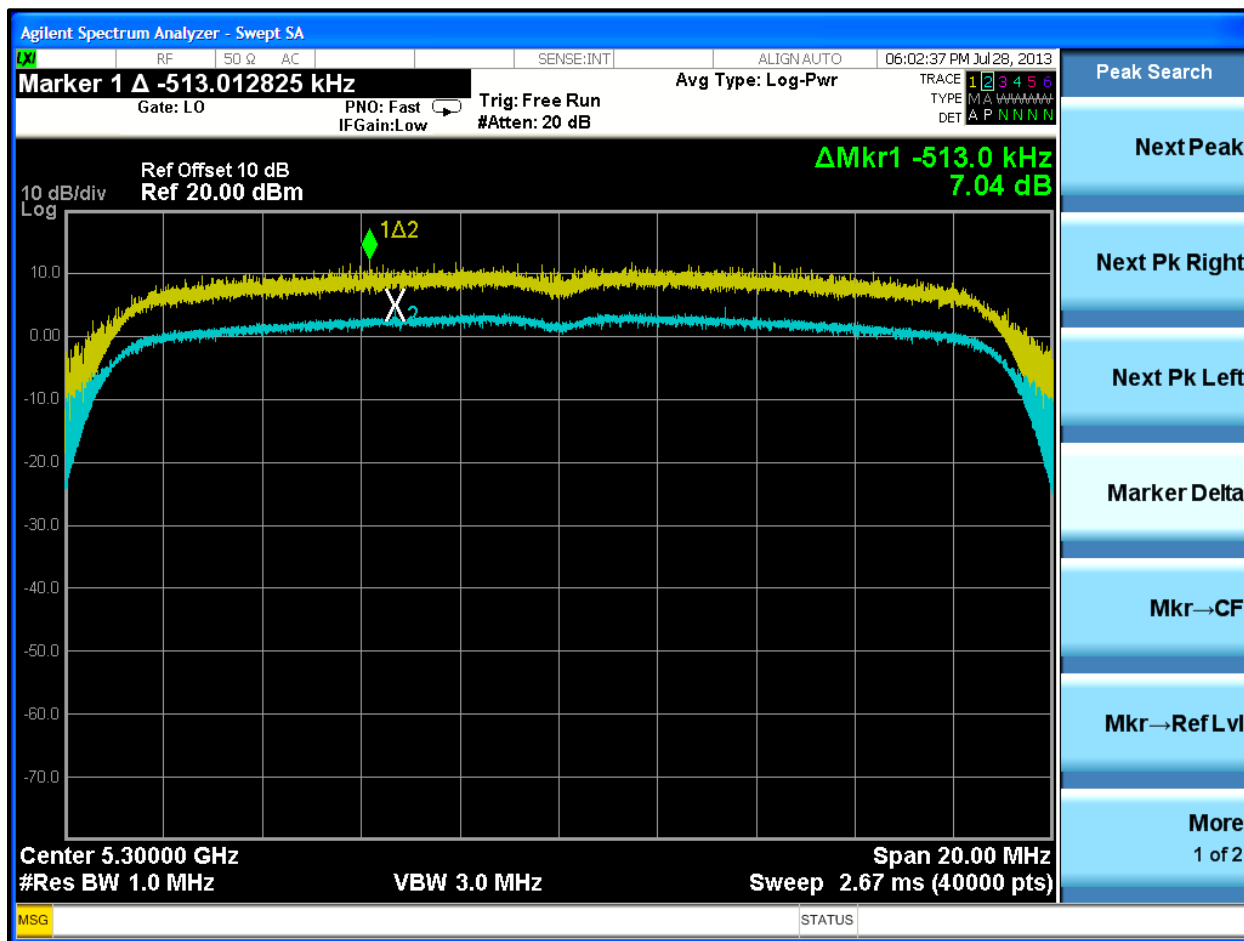


Plot 4-14: Peak Power Excursion: 21.7 mbps

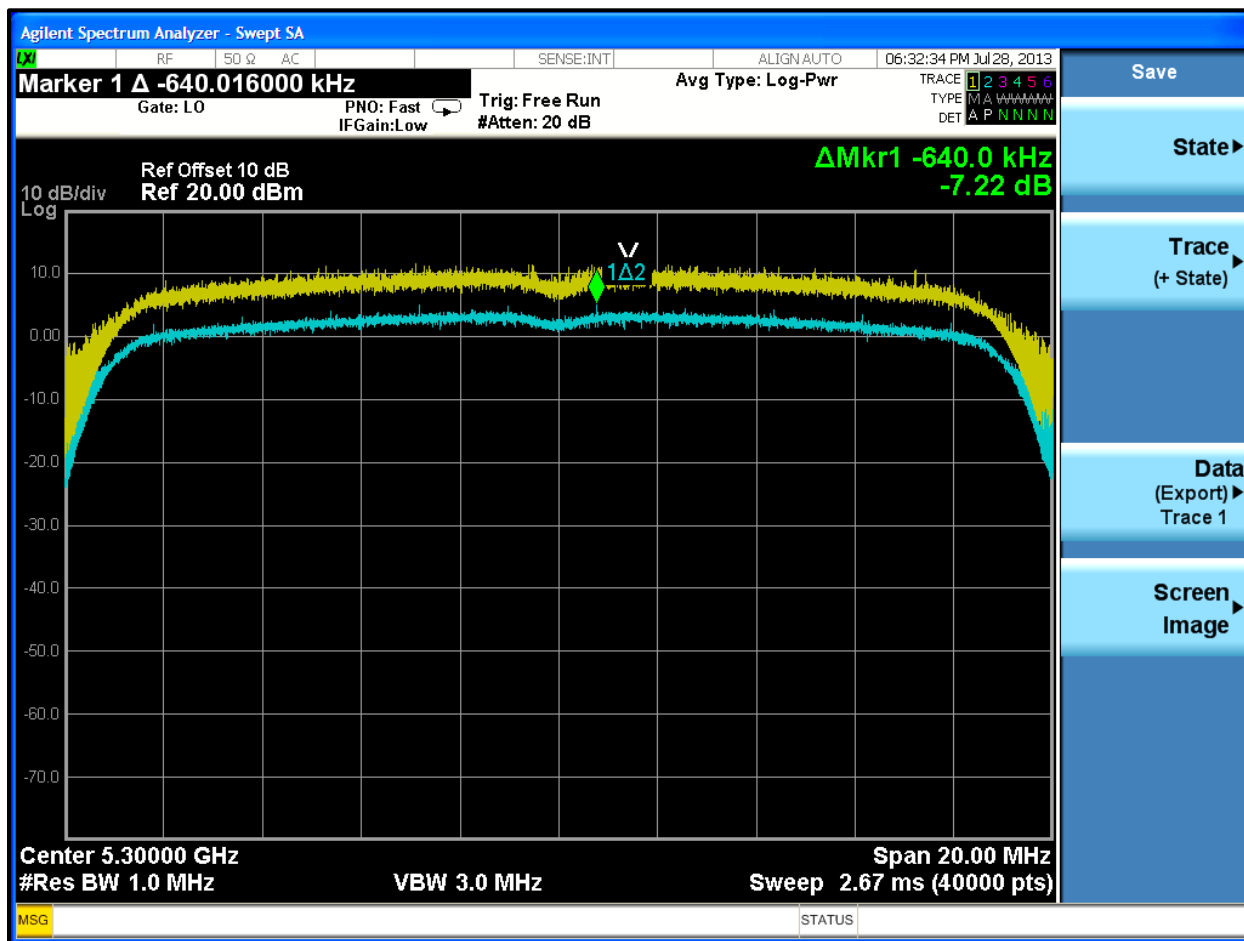


Plot 4-15: Peak Power Excursion: 28.9 mbps

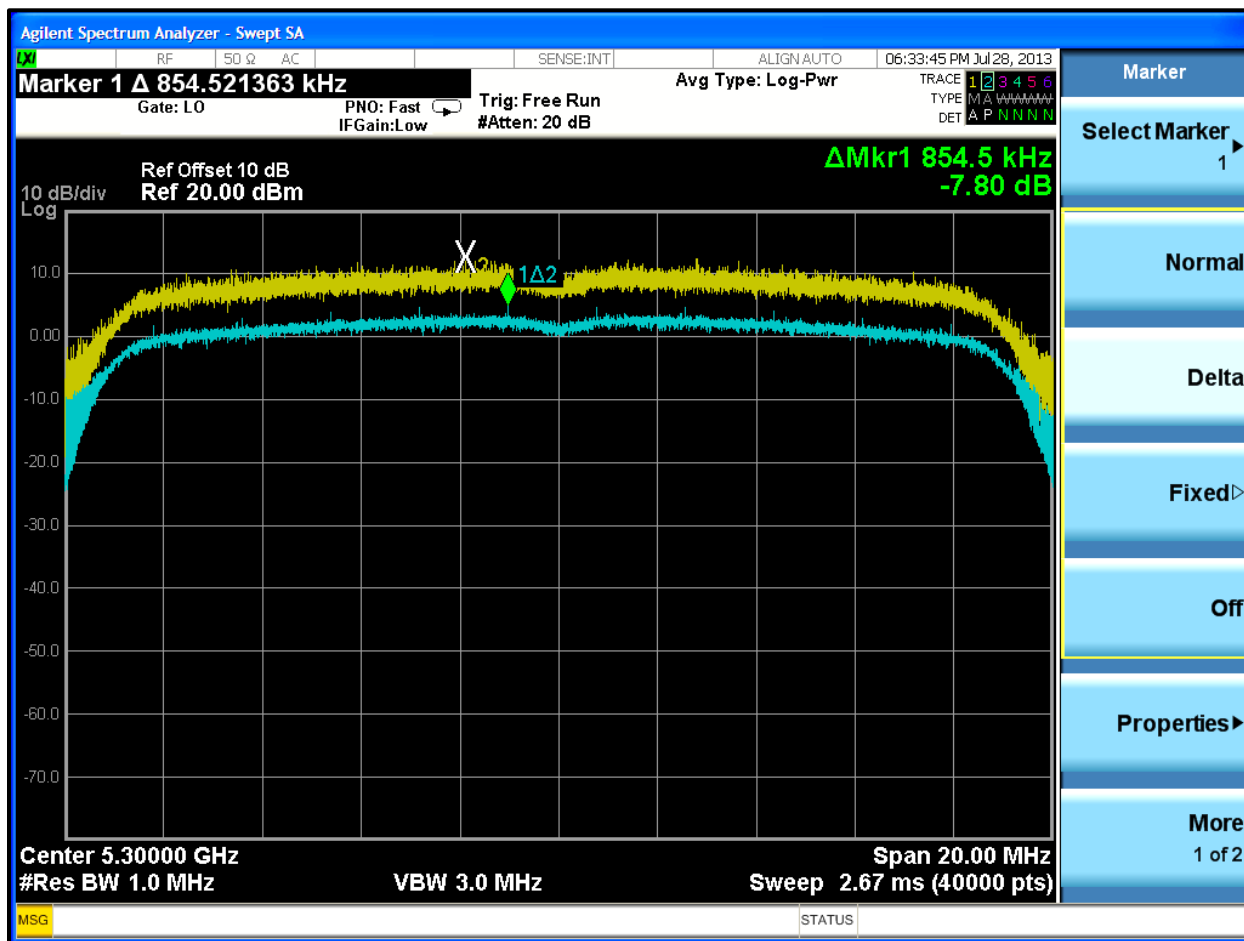


Plot 4-16: Peak Power Excursion: 39 mbps

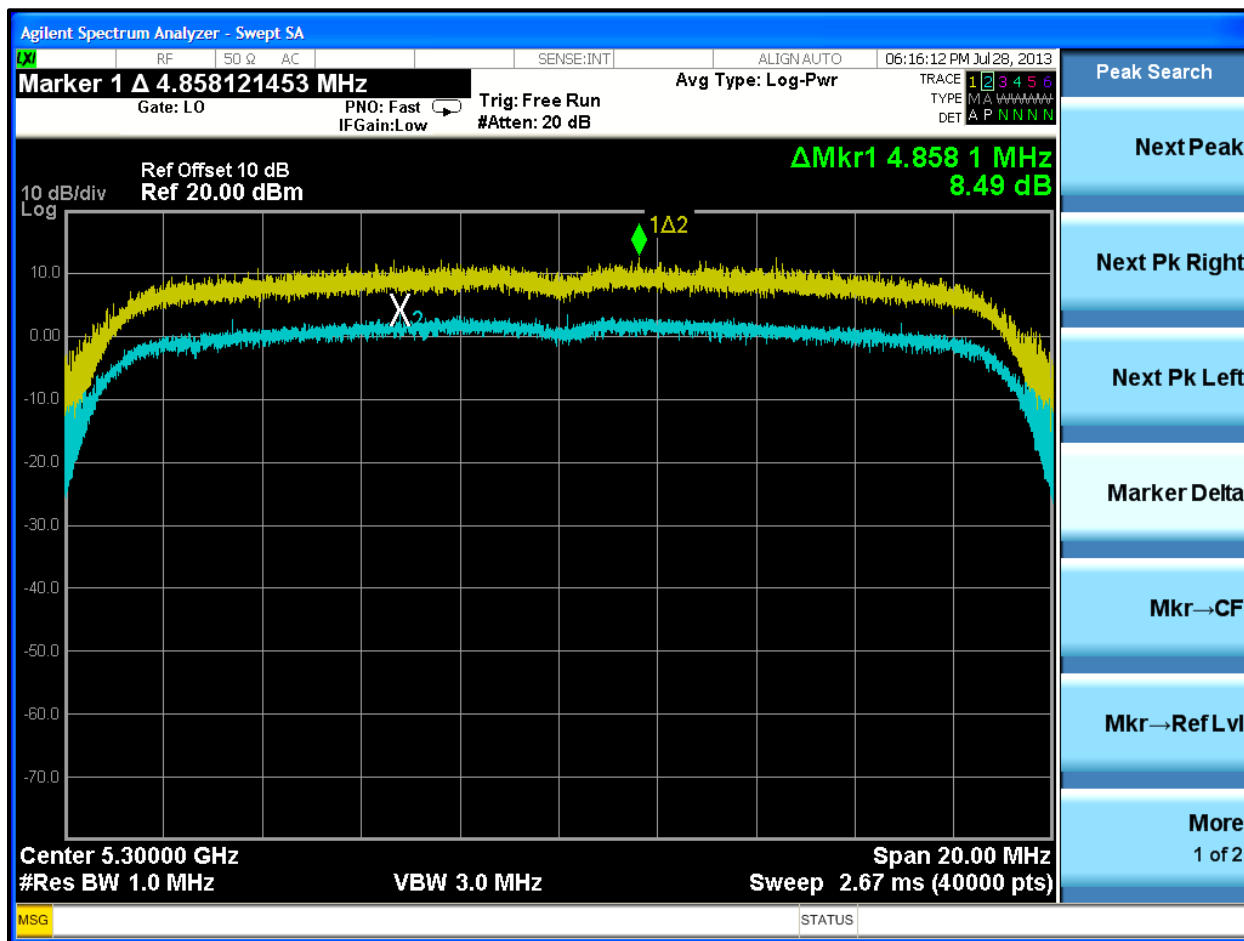


Plot 4-17: Peak Power Excursion: 43.3 mbps

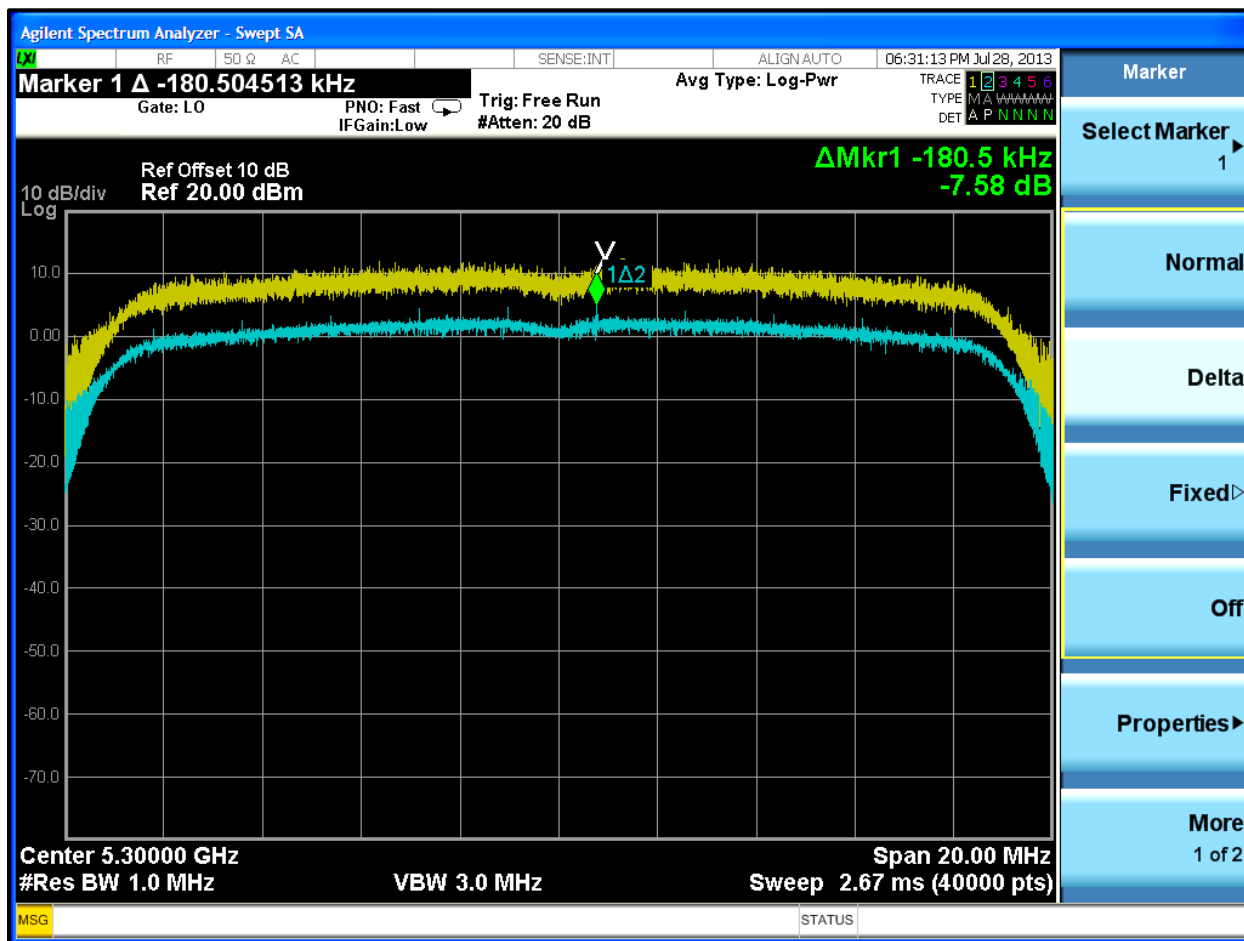


Plot 4-18: Peak Power Excursion: 52 mbps

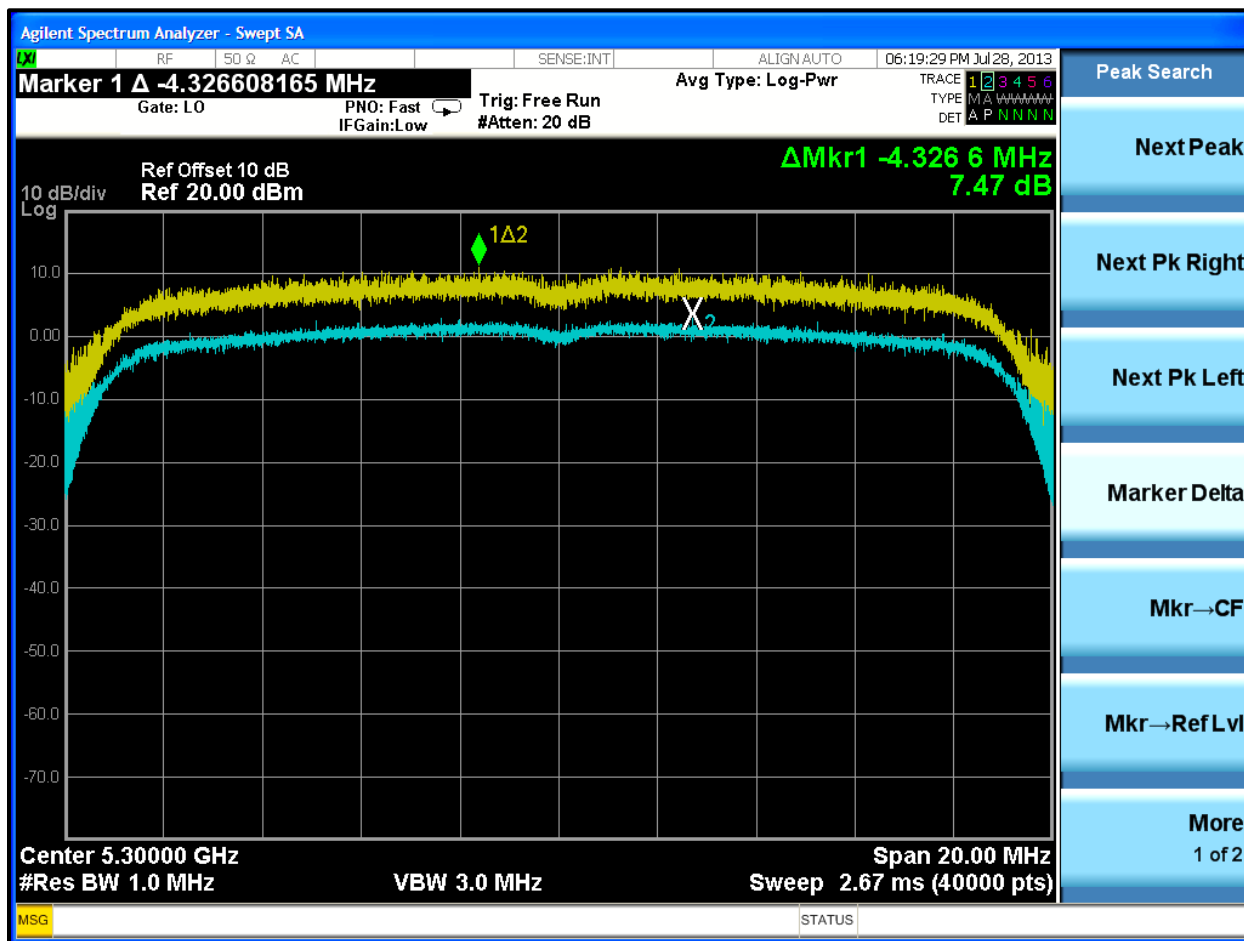


Plot 4-19: Peak Power Excursion: 57.8 mbps

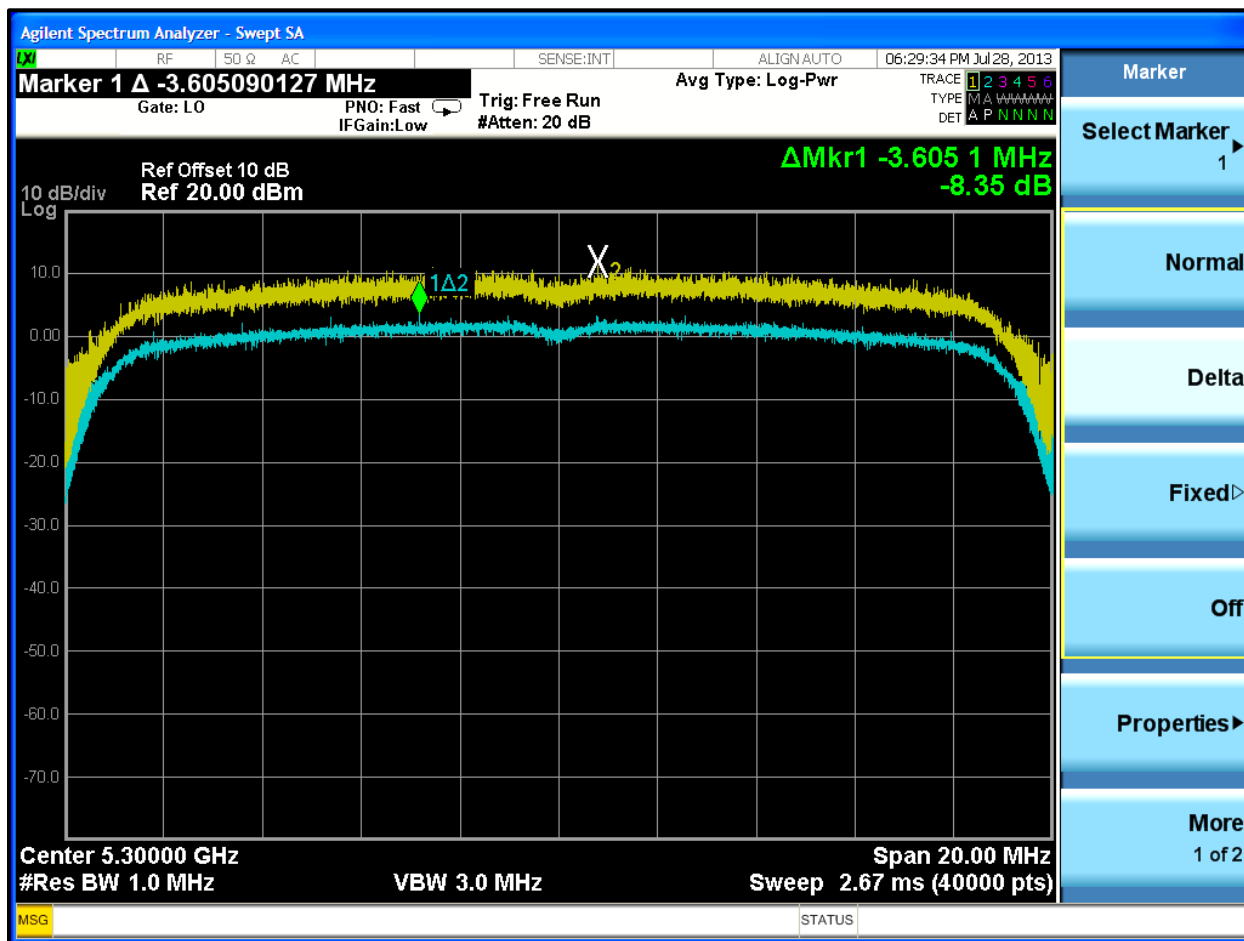


Plot 4-20: Peak Power Excursion: 58.5 mbps

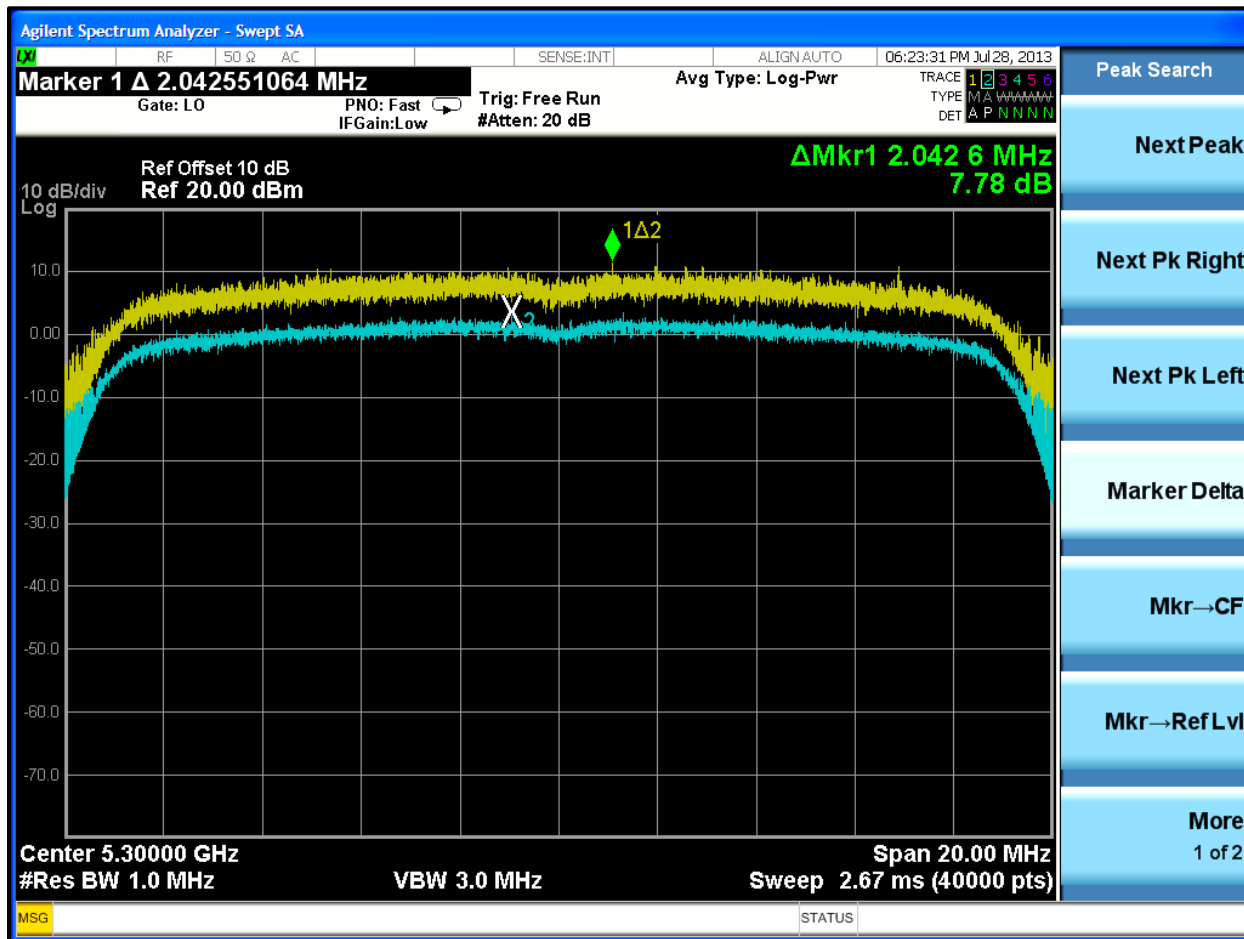

Plot 4-21: Peak Power Excursion: 65 mbps

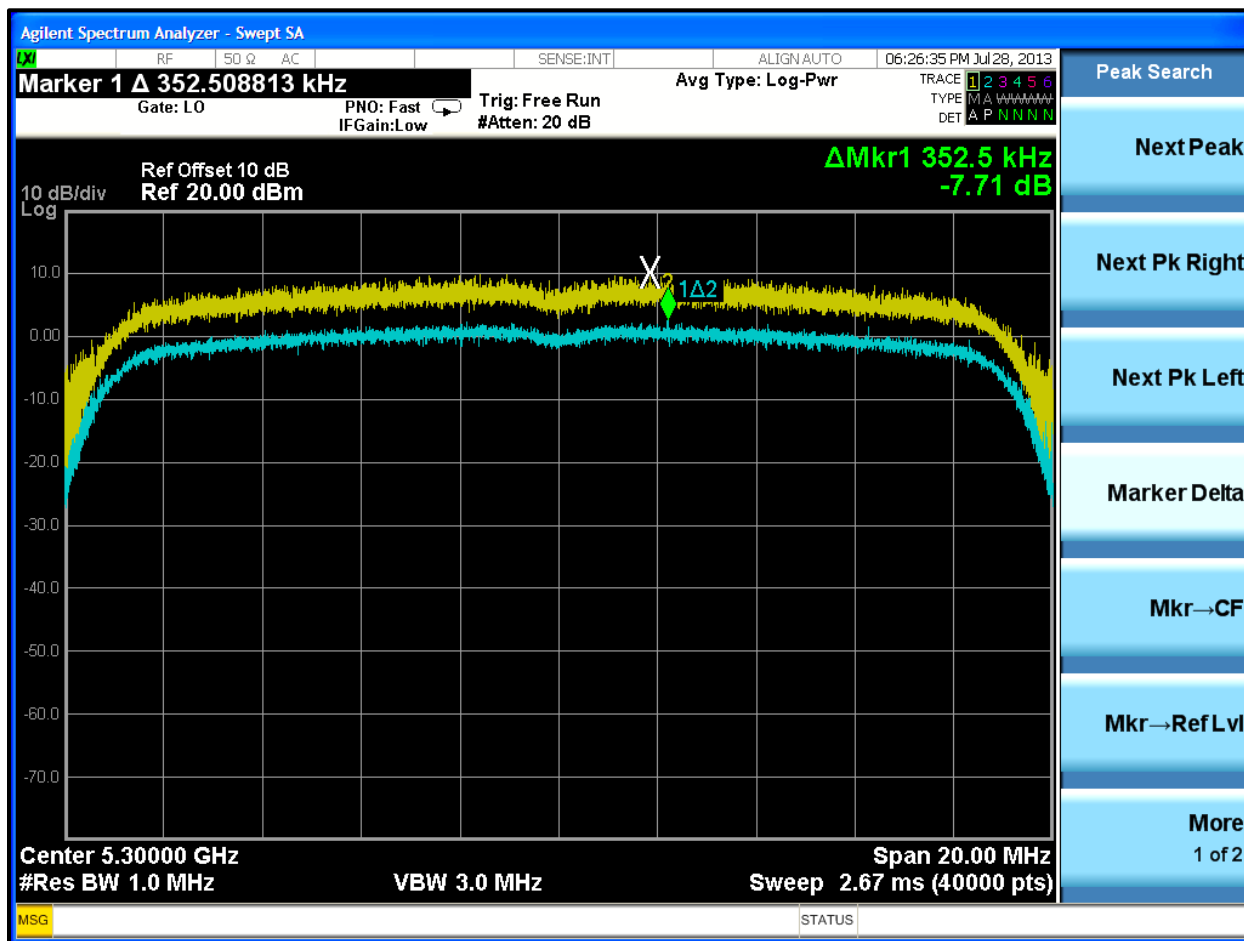

Plot 4-22: Peak Power Excursion: 72.2 mbps

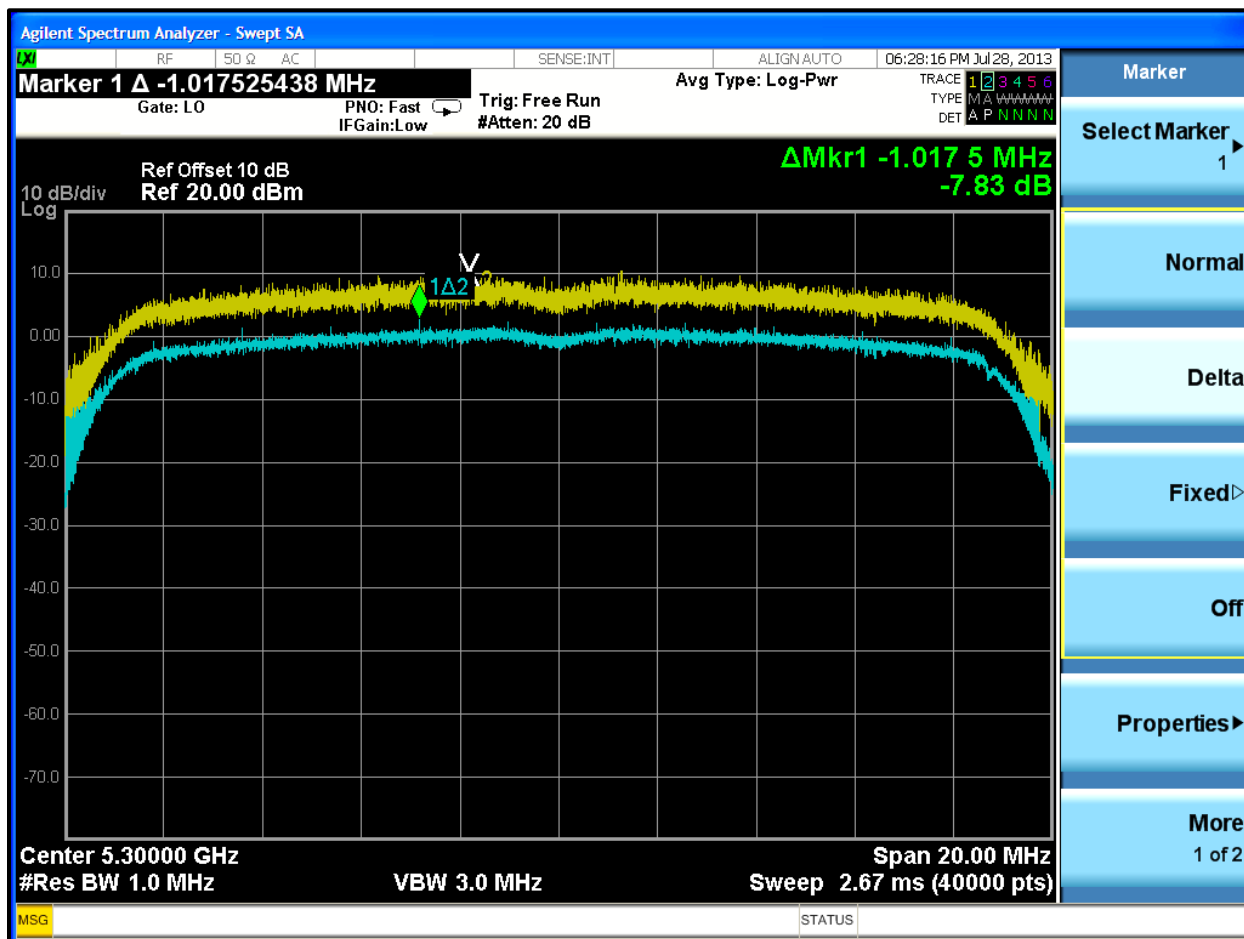

Test Personnel:

Daniel W. Baltzell
EMC Test Engineer

Daniel W. Baltzell

Signature

July 28, 2013
Date of Test

5 Peak Power Spectral Density Measurement – FCC 15.407(a/1/2/3); RSS-210 A9.2

5.1 Limits of Peak Power Spectral Density

Frequency Band	Limit
5.15-5.25 GHz	4 dBm
5.25-5.35 GHz	11 dBm
5.725-5.825 GHz	17 dBm

5.2 Peak Power Spectral Density Measurement Test Procedure

1. The transmitter output was connected to a spectrum analyzer
2. RBW was set to 1 MHz and VBW to 3 MHz. The highest level PPSD was measured across the emission in any 1 MHz band.

Table 5-1: Peak Power Spectral Density Measurement Test Equipment


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz - 26.5 GHz)	MY51250846	4/16/14
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	3/18/14

5.3 Peak Power Spectral Density Test Data


Table 5-2: Peak Power Spectral Density Test Data

Channel	Frequency (MHz)	RF Power Level in 1MHz BW (dBm)	Maximum Limit (dBm)	Pass/Fail
36	5180	-2.8	4	Pass
40	5200	-3.0	4	Pass
48	5240	-2.6	4	Pass
52	5260	4.6	11	Pass
60	5300	4.6	11	Pass
64	5320	4.6	11	Pass
100	5500	5.4	17	Pass
116	5580	5.5	17	Pass
140	5700	4.4	17	Pass


Plot 5-1: Peak Power Spectral Density: Channel 36 (5180 MHz)

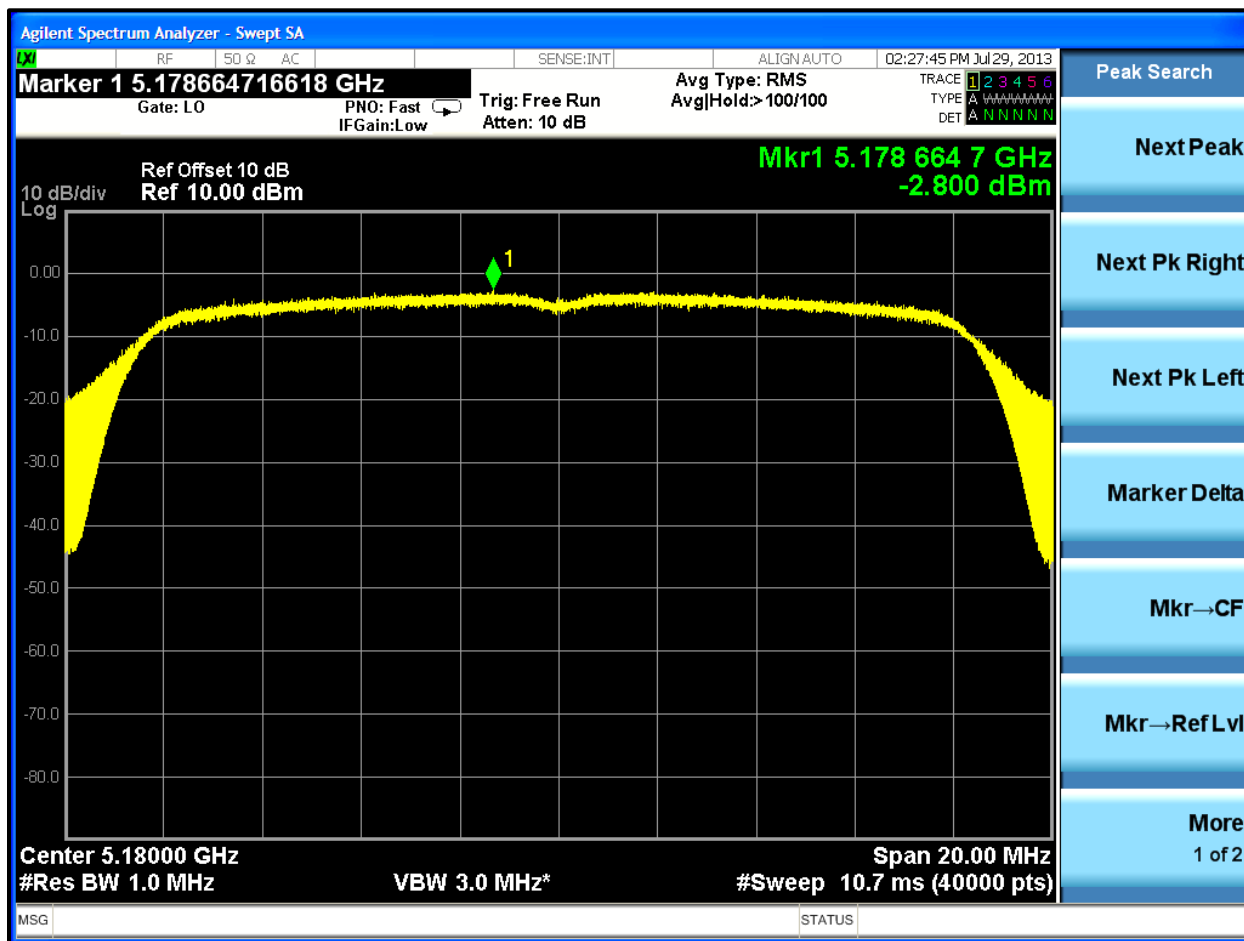


Plot 5-2: Peak Power Spectral Density: Channel 40 (5200 MHz)

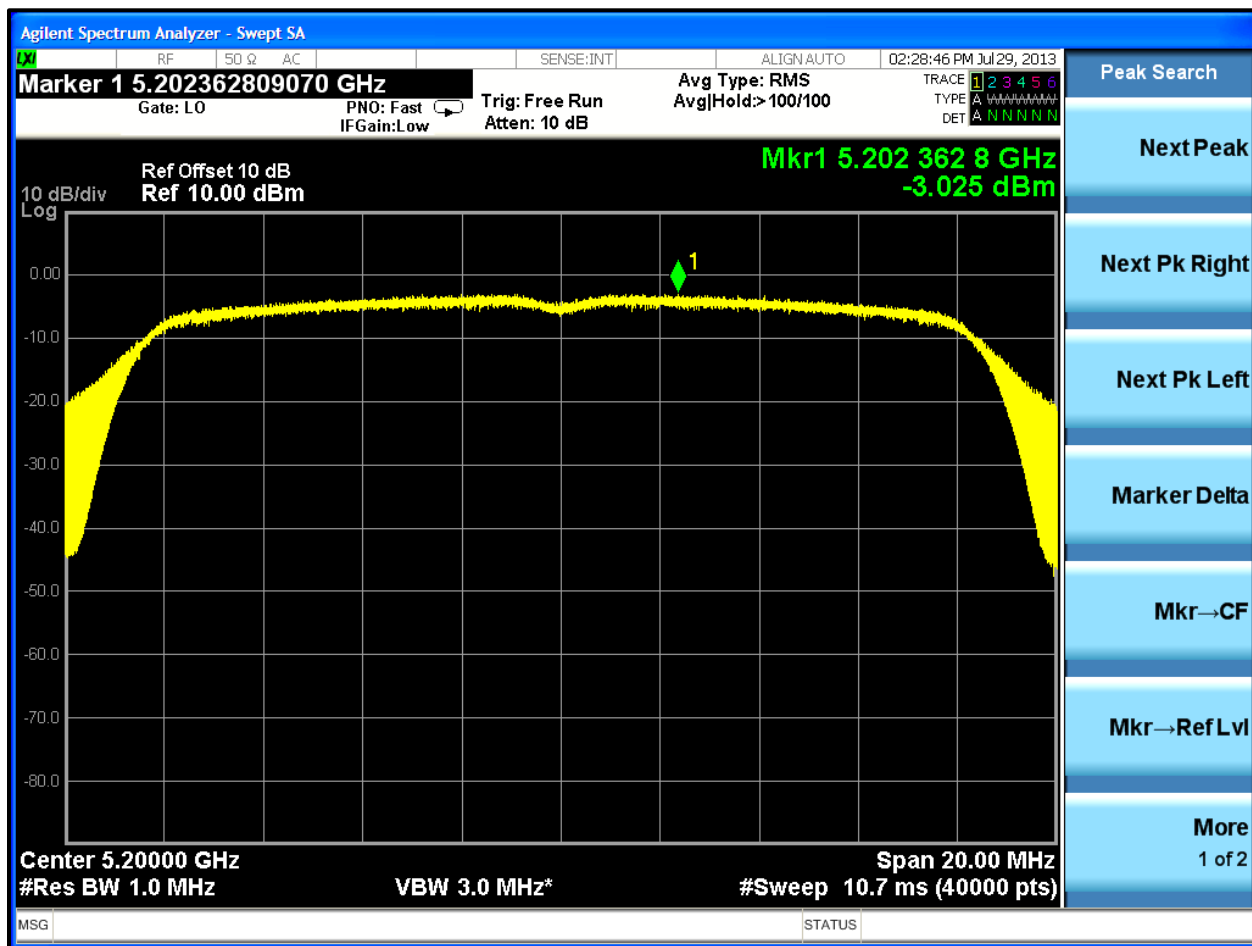


Plot 5-3: Peak Power Spectral Density: Channel 48 (5240 MHz)

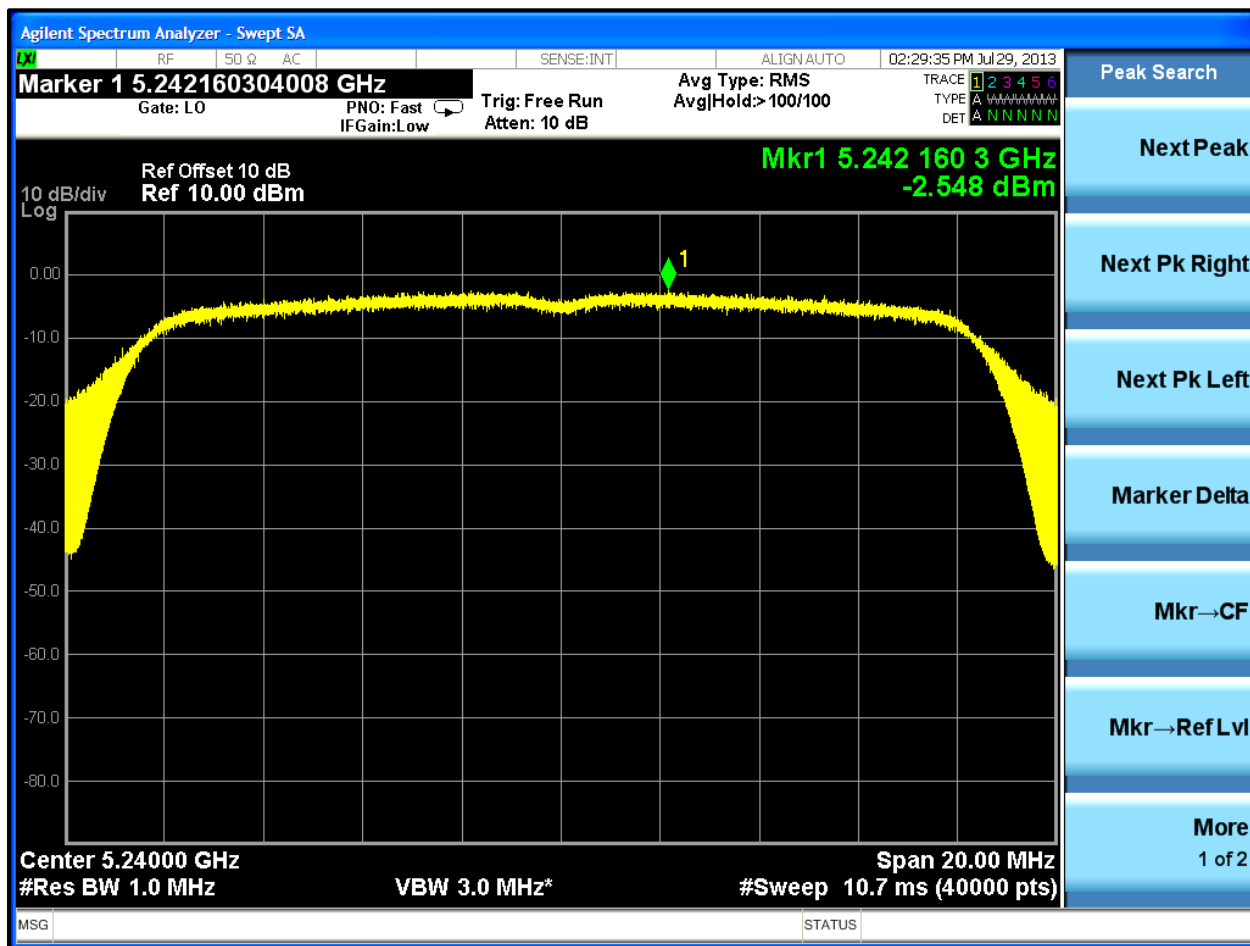


Plot 5-4: Peak Power Spectral Density: Channel 52 (5260 MHz)

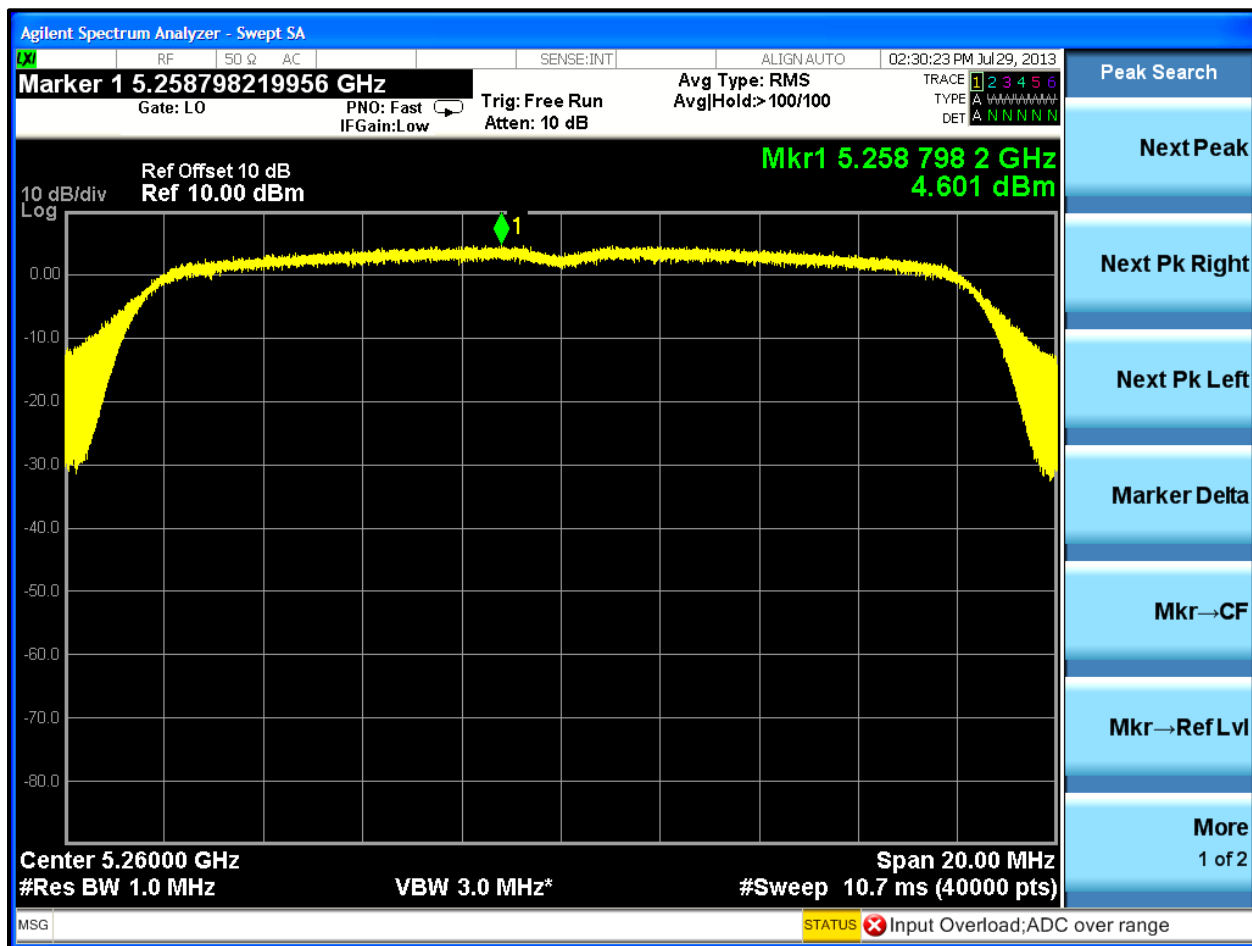


Plot 5-5: Peak Power Spectral Density: Channel 60 (5300 MHz)

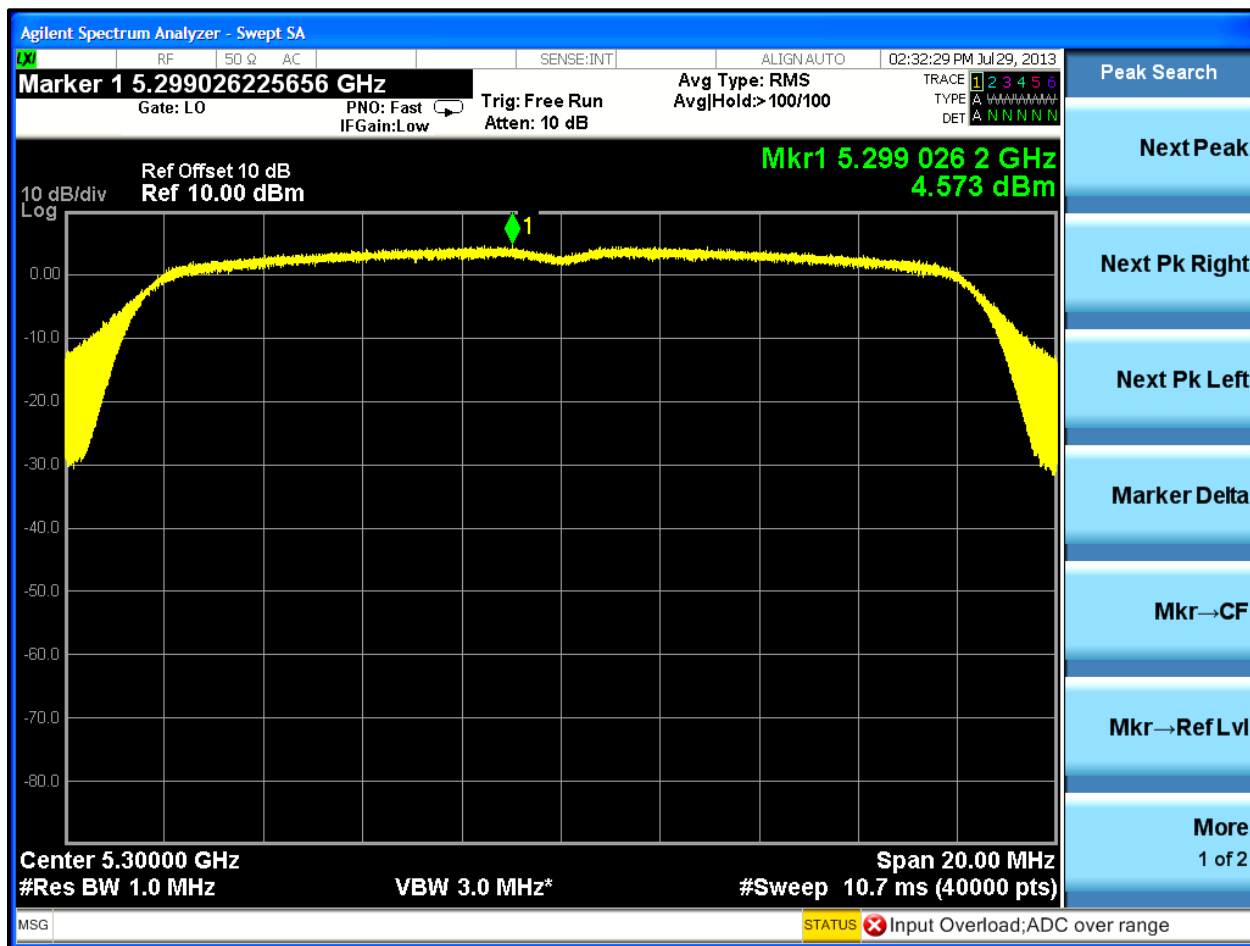


Plot 5-6: Peak Power Spectral Density: Channel 64 (5320 MHz)

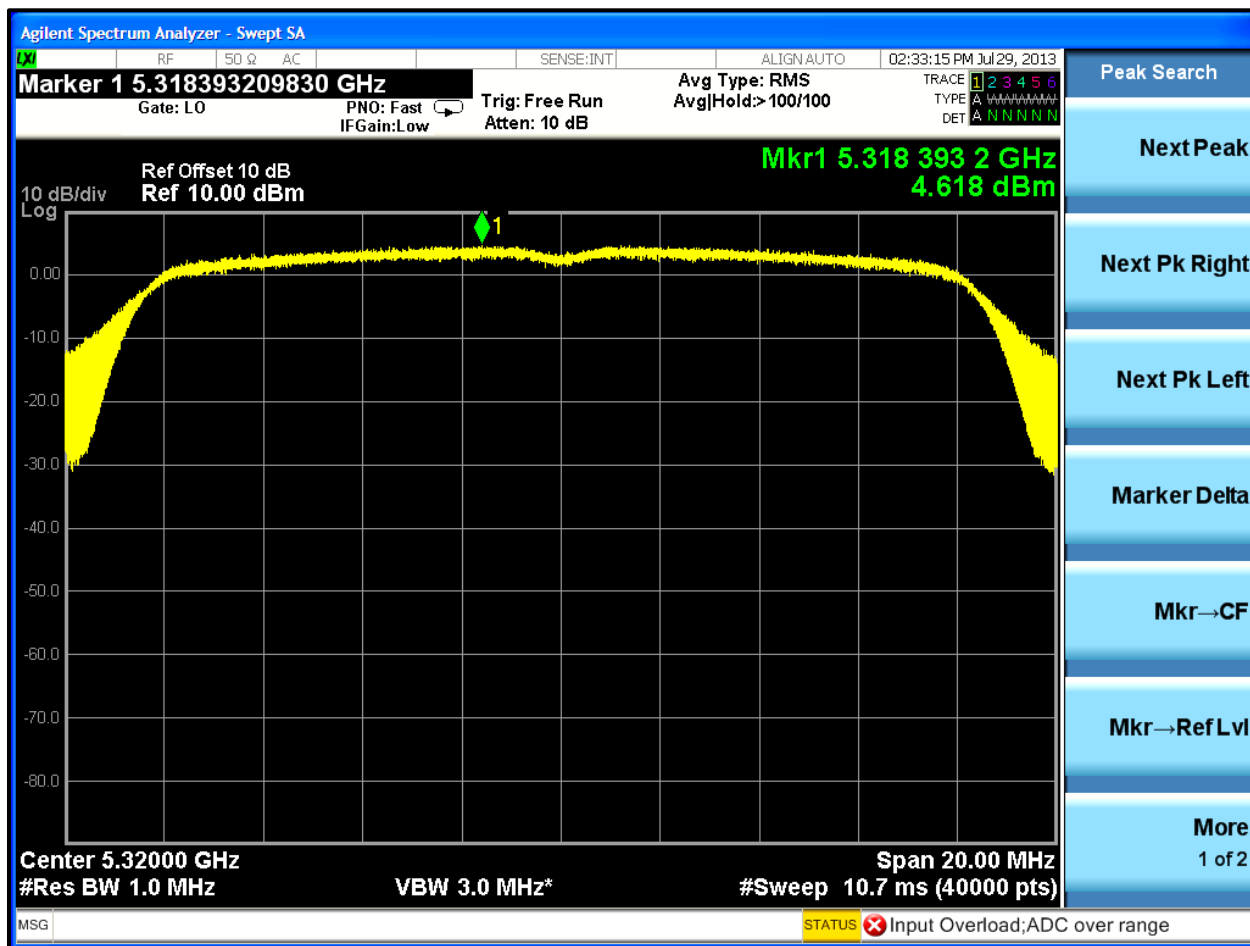


Plot 5-7: Peak Power Spectral Density: Channel 100 (5500 MHz)

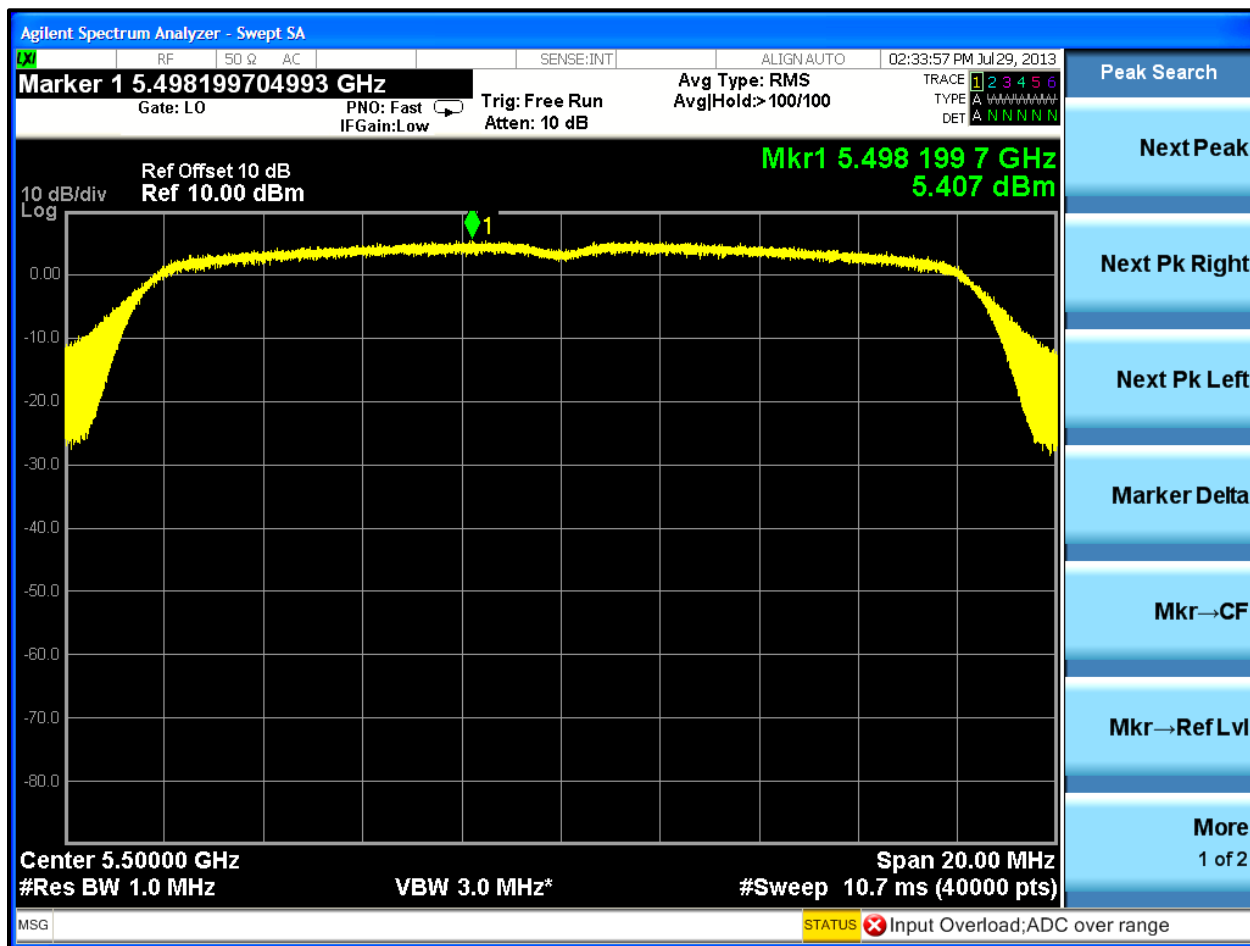

Plot 5-8: Peak Power Spectral Density: Channel 116 (5580 MHz)

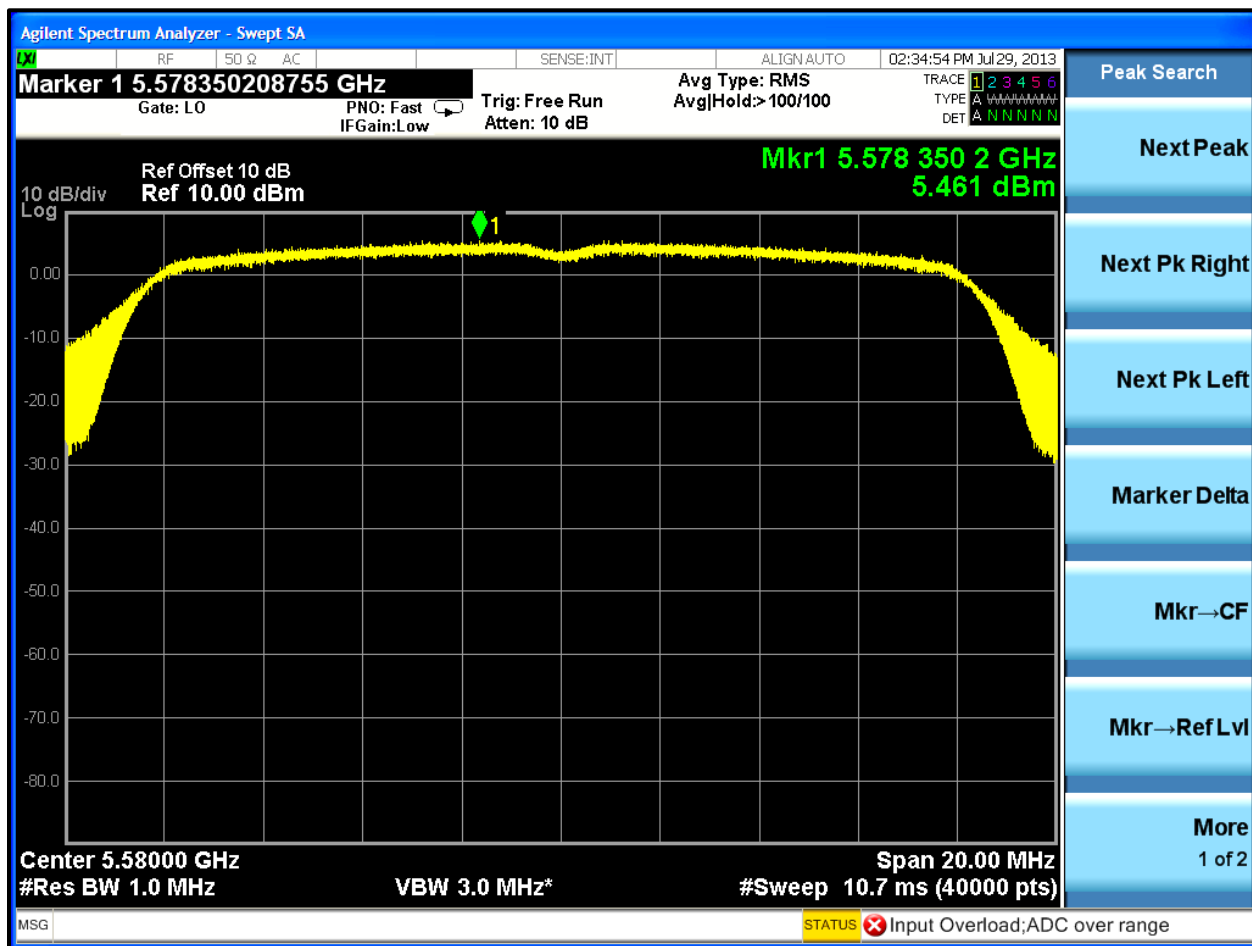

Plot 5-9: Peak Power Spectral Density: Channel 140 (5700 MHz)

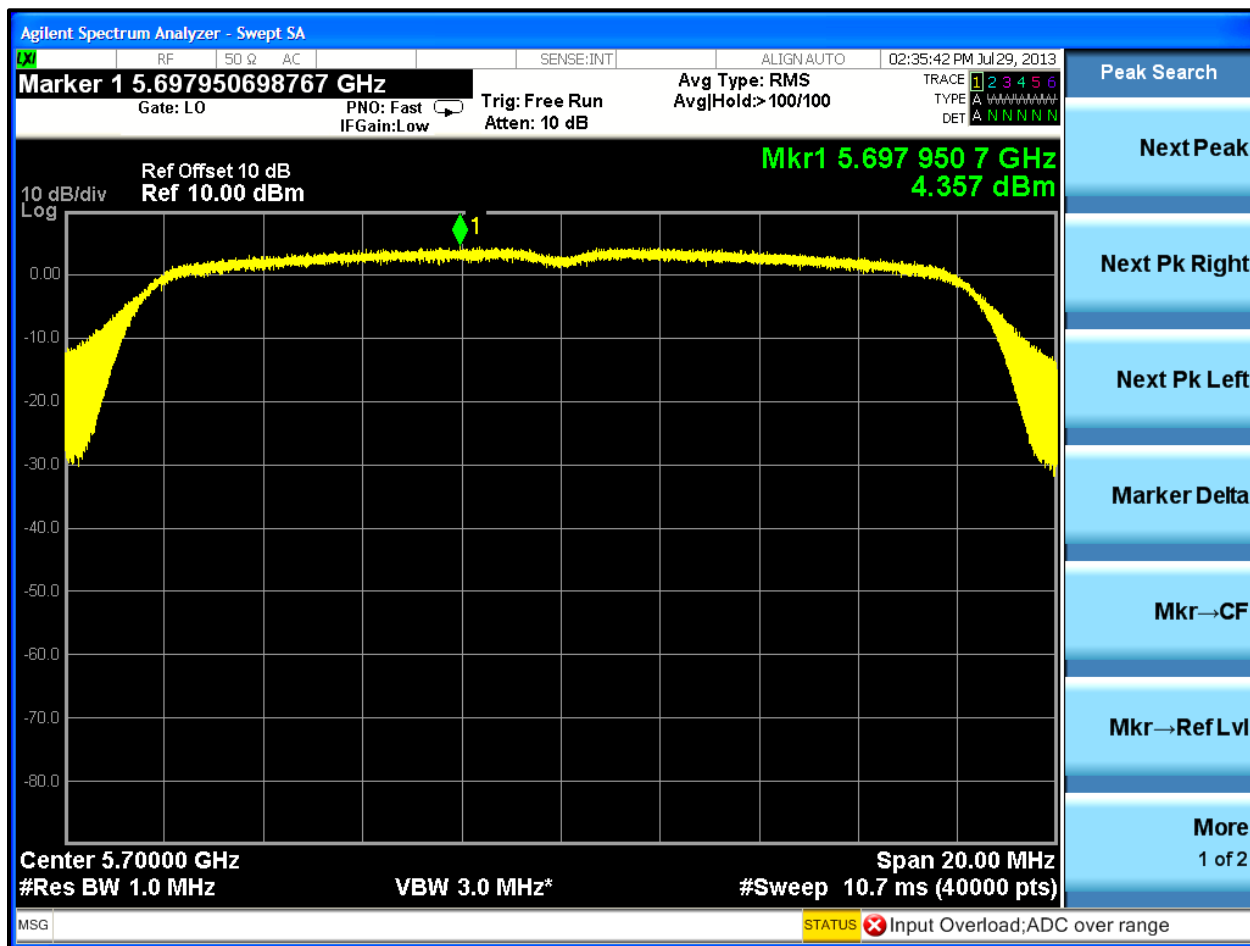

Test Personnel:

Daniel W. Baltzell
Test Engineer

Daniel W. Baltzell

Signature

July 29, 2013
Date of Test

6 Frequency Stability Measurement – FCC 15.407(g)

6.1 Limits of Frequency Stability

The frequency tolerance of the CW shall be maintained within +/-0.02% of the operating frequency over a temperature variation of -30° C to 50° C at normal supply voltage, and for a variation in the primary supply voltage from 85%-115% of the rated supply voltage at a temperature of 20° C.

6.2 Frequency Stability Measurement Test Procedure

The EUT was placed inside temperature chamber and supplied by nominal 3.7 VDC. The EUT was connected to an analyzer which was located outside of test chamber. The temperature was set to the lowest level and the EUT was allowed to stabilize with power off for a period of 30 minutes. The EUT was then powered up and the frequency of the CW was measured. This was continued in 10 degree steps to the highest temperature level of 50° C was measured. The chamber was allowed to stabilize between measurements for approximately 30 minutes. The EUT supply voltage was then adjusted to 85% and 115% of nominal voltage and the frequency was again recorded and finally normalized to 20° C.

Table 6-1: Frequency Stability Measurement Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz - 26.5 GHz)	MY51250846	4/16/14
901350	Meterman	33XR	Multimeter	040402802	3/20/15
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	N/A	8/16/13
900946	Tenney Engineering, Inc	TH65	Temperature Chamber with Humidity	11380	1/13/14
1724	Hewlett Packard	6024A	DC Power Supply	1912A00331	N/A

6.3 Frequency Stability Test Data

Table 6-2: Frequency Stability/Temperature Variation; Channel 36 – 5180 MHz

Temperature (°C)	Measured Frequency (MHz)	ppm
-30	5180.002873	0.55
-20	5180.001956	0.38
-10	5180.001402	0.27
0	5180.001933	0.37
10	5179.999963	-0.01
20	5180.000000	0.00
30	5179.999166	-0.16
40	5179.998084	-0.37
50	5179.997562	-0.47

Table 6-3: Frequency Stability/Voltage Variation; Channel 36 – 5180 MHz

Voltage (VDC)	Measured Frequency (MHz)	ppm
3.145	5180.000018	0.00
3.7	5180.000000	0.00
4.255	5180.000030	0.01

Table 6-4: Frequency Stability/Temperature Variation; Channel 40 – 5200 MHz

Temperature (°C)	Measured Frequency (MHz)	ppm
-30	5200.003000	0.58
-20	5200.002310	0.44
-10	5199.998408	-0.31
0	5200.002048	0.39
10	5200.000056	0.01
20	5200.000000	0.00
30	5199.998433	-0.30
40	5199.998225	-0.34
50	5199.997361	-0.51

Table 6-5: Frequency Stability/Voltage Variation; Channel 40 – 5200 MHz

Voltage (VDC)	Measured Frequency (MHz)	ppm
3.145	5200.000106	0.02
3.7	5200.000000	0.00
4.255	5200.000056	0.01

Table 6-6: Frequency Stability/Temperature Variation; Channel 48 – 5240 MHz

Temperature (°C)	Measured Frequency (MHz)	ppm
-30	5240.003036	0.58
-20	5240.002140	0.41
-10	5240.001546	0.30
0	5240.001892	0.36
10	5239.999982	0.00
20	5240.000000	0.00
30	5239.998338	-0.32
40	5239.998240	-0.34
50	5239.997400	-0.50

Table 6-7: Frequency Stability/Voltage Variation; Channel 48 – 5240 MHz

Voltage (VDC)	Measured Frequency (MHz)	Ppm
3.145	5240.000088	0.02
3.7	5240.000000	0.00
4.255	5240.000000	0.00

Table 6-8: Frequency Stability/Temperature Variation; Channel 52 – 5260 MHz

Temperature (°C)	Measured Frequency (MHz)	ppm
-30	5260.003054	0.58
-20	5260.002162	0.41
-10	5260.001523	0.29
0	5260.001767	0.34
10	5259.999961	-0.01
20	5260.000000	0.00
30	5259.998250	-0.33
40	5259.998206	-0.34
50	5259.997288	-0.52

Table 6-9: Frequency Stability/Voltage Variation; Channel 52 – 5260 MHz

Voltage (VDC)	Measured Frequency (MHz)	ppm
3.145	5260.000080	0.02
3.7	5260.000000	0.00
4.255	5259.999996	0.00

Table 6-10: Frequency Stability/Temperature Variation; Channel 60 – 5300 MHz

Temperature (°C)	Measured Frequency (MHz)	ppm
-30	5300.002991	0.56
-20	5300.002312	0.44
-10	5300.001429	0.27
0	5300.001585	0.30
10	5299.999834	-0.03
20	5300.000000	0.00
30	5299.998049	-0.37
40	5299.998117	-0.36
50	5299.997179	-0.53

Table 6-11: Frequency Stability/Voltage Variation; Channel 60 – 5300 MHz

Voltage (VDC)	Measured Frequency (MHz)	ppm
3.145	5300.000118	0.02
3.7	5300.000000	0.00
4.255	5299.999912	-0.02

Table 6-12: Frequency Stability/Temperature Variation; Channel 64 – 5320 MHz

Temperature (°C)	Measured Frequency (MHz)	ppm
-30	5320.003086	0.58
-20	5320.003012	0.57
-10	5320.001601	0.30
0	5320.001572	0.30
10	5319.999906	-0.02
20	5320.000000	0.00
30	5319.998034	-0.37
40	5319.998181	-0.34
50	5319.997263	-0.51

Table 6-13: Frequency Stability/Voltage Variation; Channel 64 – 5320 MHz

Voltage (VDC)	Measured Frequency (MHz)	ppm
3.145	5320.000122	0.02
3.7	5320.000000	0.00
4.255	5319.999948	-0.01

Table 6-14: Frequency Stability/Temperature Variation; Channel 100 – 5500 MHz

Temperature (°C)	Measured Frequency (MHz)	ppm
-30	5500.003228	0.59
-20	5500.002831	0.51
-10	5500.001618	0.29
0	5500.001602	0.29
10	5499.999889	-0.02
20	5500.000000	0.00
30	5499.997890	-0.38
40	5499.998082	-0.35
50	5499.997143	-0.52

Table 6-15: Frequency Stability/Voltage Variation; Channel 100 – 5500 MHz

Voltage (VDC)	Measured Frequency (MHz)	ppm
3.145	5500.000155	0.03
3.7	5500.000000	0.00
4.255	5499.999994	0.00

Table 6-16: Frequency Stability/Temperature Variation; Channel 116 – 5580 MHz

Temperature (°C)	Measured Frequency (MHz)	ppm
-30	5580.003237	0.58
-20	5580.002661	0.48
-10	5580.001616	0.29
0	5580.001576	0.28
10	5579.999876	-0.02
20	5580.000000	0.00
30	5579.997796	-0.39
40	5579.998024	-0.35
50	5579.996997	-0.54

Table 6-17: Frequency Stability/Voltage Variation; Channel 116 – 5580 MHz

Voltage (VDC)	Measured Frequency (MHz)	ppm
3.145	5580.000148	0.03
3.7	5580.000000	0.00
4.255	5579.999936	-0.01

Table 6-18: Frequency Stability/Temperature Variation; Channel 140 – 5700 MHz

Temperature (°C)	Measured Frequency (MHz)	ppm
-30	5700.003291	0.58
-20	5700.002608	0.46
-10	5700.001613	0.28
0	5700.001517	0.27
10	5699.999751	-0.04
20	5700.000000	0.00
30	5699.997661	-0.41
40	5699.997911	-0.37
50	5699.996863	-0.55

Table 6-19: Frequency Stability/Voltage Variation; Channel 140 – 5700 MHz

Voltage (VDC)	Measured Frequency (MHz)	ppm
3.145	5700.000068	0.01
3.7	5700.000000	0.00
4.255	5699.999952	-0.01

Test Personnel:

Daniel W. Baltzell		August 1, 2013
Test Engineer	Signature	Date of Test

7 Compliance With the Band Edge – FCC 15.407(b)(7), 15.205; RSS-210 A9.3

7.1 Limits of Band Edge Measurement

Below -20 dB of the highest emission level of operating band (in 100 kHz resolution bandwidth).

7.2 Band Edge Test Procedure

The transmitter output was connected to a spectrum analyzer through a low loss cable. The RBW was set to 1 MHz and the VBW was set to 1 MHz with a suitable span including 100 MHz bandwidth from band edge.

For signals in the restricted band above and below 5150 and 5350 MHz, a measurement of the amplitude of the spurious emissions was made with respect to the intentional signal. The relative amplitude, in dBc, was applied to the average measurement using the peak field strength which was measured on the OATS site to calculate the field strength of the unintentional signals.

Table 7-1: Band Edge Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz - 26.5 GHz)	MY51250846	4/16/14
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	3/18/14
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1 - 26.5 GHz)	3008A00505	8/10/13
900321	EMCO	3161-03	Horn Antenna (4.0 - 8.2 GHz)	9508-1020	4/20/15
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	NA	8/16/13
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/16/13

7.3 Restricted Band Edge Test Results

7.3.1 Calculation of Lower Band Edge

86.8 dBuV/m is the field strength measurement, from which the delta measurement of 55.3 dB is subtracted (reference plots), resulting in a level of 31.5 dB. This level has a margin of 22.5 dB below the limit of 54 dBuV/m.


Calculation: $86.8 \text{ dBuV/m} - 55.3 \text{ dB} - 54 \text{ dBuV/m} = -22.5 \text{ dB}$

Field strength of Lower Band Edge (Average) = 100.9 dBuV/m

Field strength of Lower Band Edge (Peak) = 86.8 dBuV/m

Delta measurement = 55.3 dB

Plot 7-1: Lower Band Edge: Measurement Channel 36 (TX Frequency: 5180 MHz)

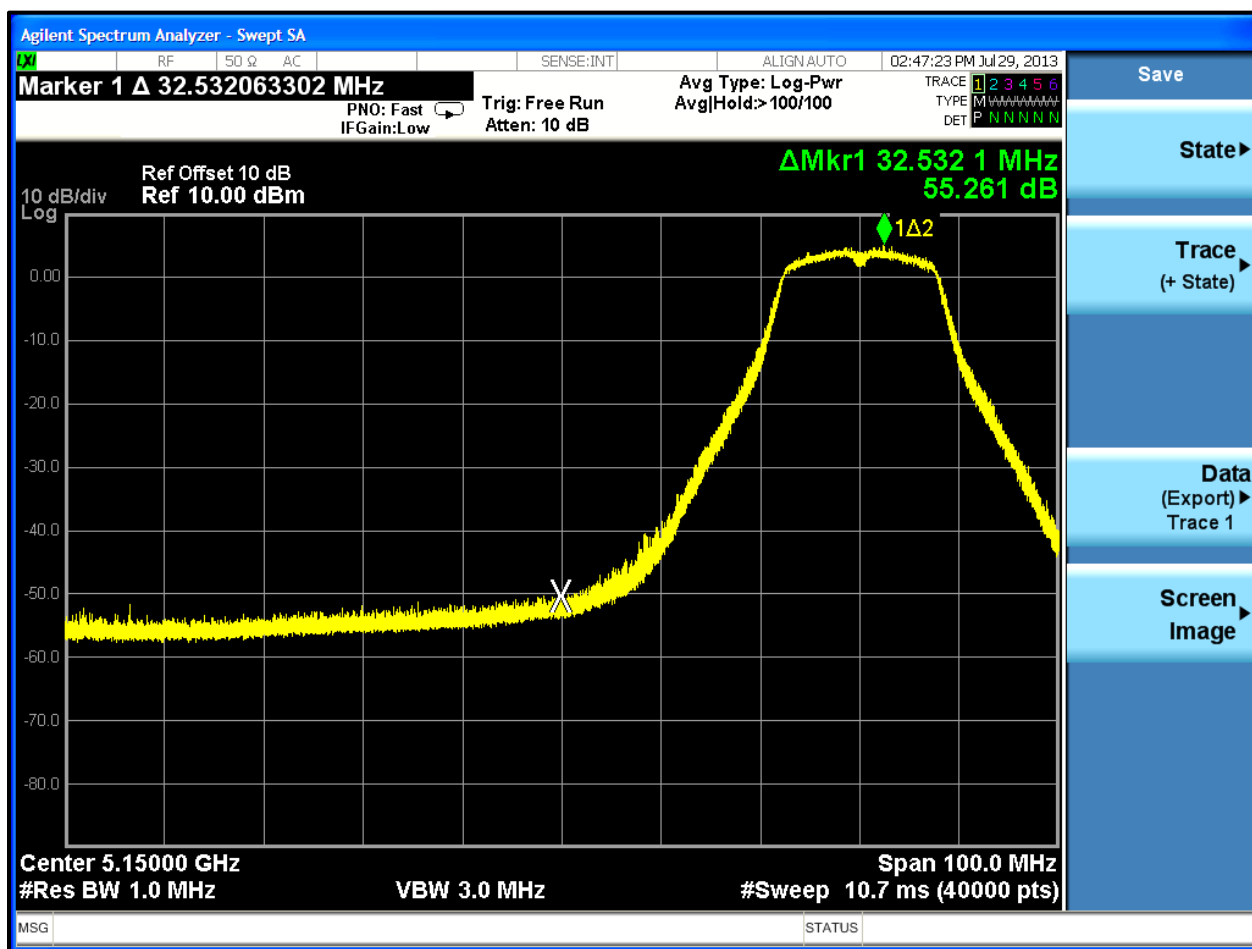

7.3.2 Calculation of Upper Band Edge

92.3 dBuV/m is the field strength measurement, from which the delta measurement of 44.7 dB is subtracted (reference plots), resulting in a level of 47.6 dB. This level has a margin of 6.4 dB below the limit of 54 dBuV/m.


Calculation: $92.3 \text{ dBuV/m} - 44.7 \text{ dB} - 54 \text{ dBuV/m} = -6.4 \text{ dB}$

Field strength of Lower Band (Average) = 106.6 dBuV/m

Field strength of Lower Band (Peak) = 92.3 dBuV/m

Delta measurement = 44.7 dB

Plot 7-2: Upper Band Edge: Measurement Channel 64 (TX Frequency: 5320 MHz)

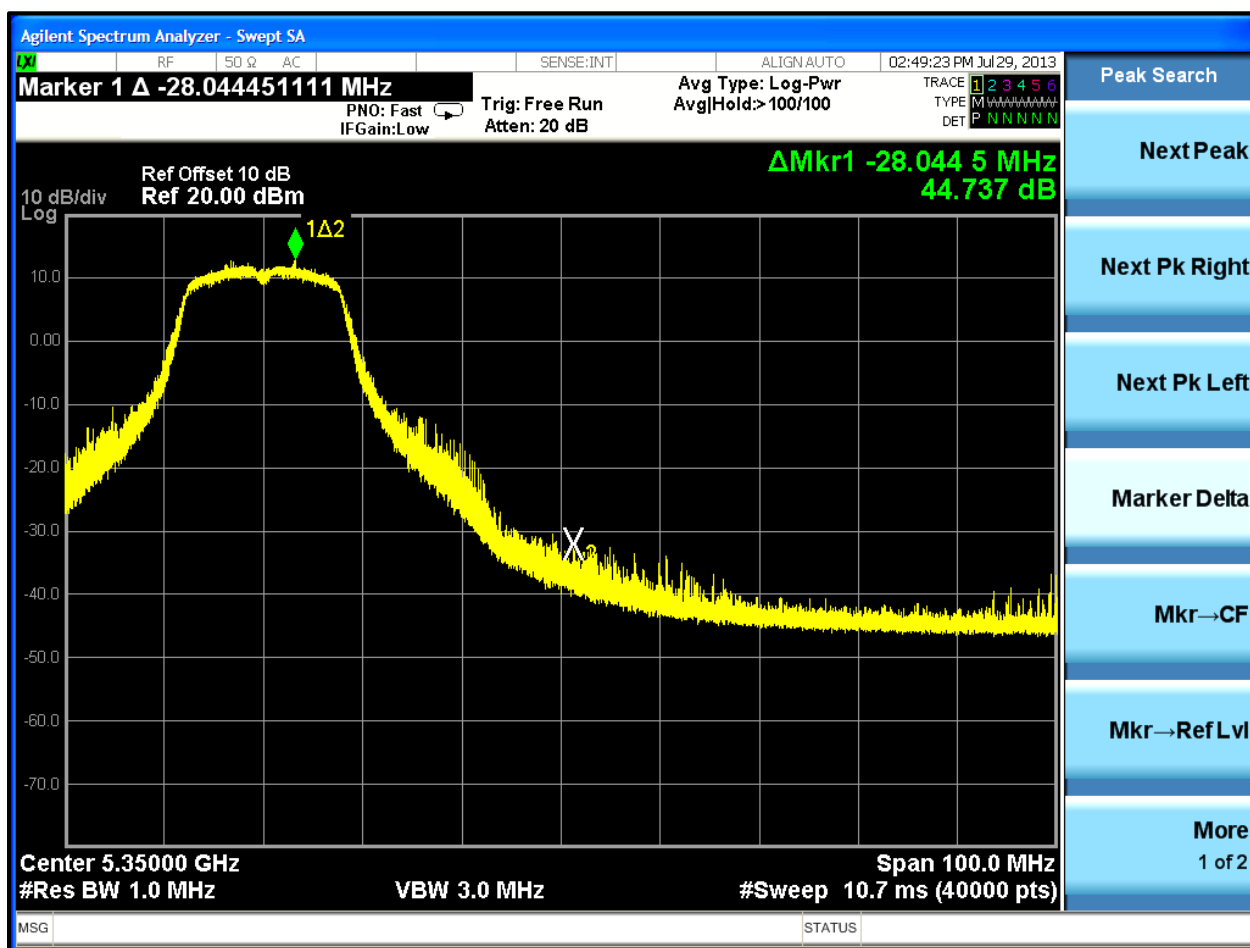

7.3.3 Calculation of Lower Band Edge

92.7 dBuV/m is the field strength measurement, from which the delta measurement of 44 dB is subtracted (reference plots), resulting in a level of 48.7 dB. This level has a margin of 6.3 dB below the limit of 54 dBuV/m.


Calculation: $92.7 \text{ dBuV/m} - 44 \text{ dB} - 54 \text{ dBuV/m} = -6.3 \text{ dB}$

Field strength of Lower Band (Average) = 107.3 dBuV/m

Field strength of Lower Band (Peak) = 92.7 dBuV/m


Delta measurement = 44 dB

Plot 7-3: Lower Band Edge: Peak Measurement Channel 100 (TX Frequency: 5500 MHz)

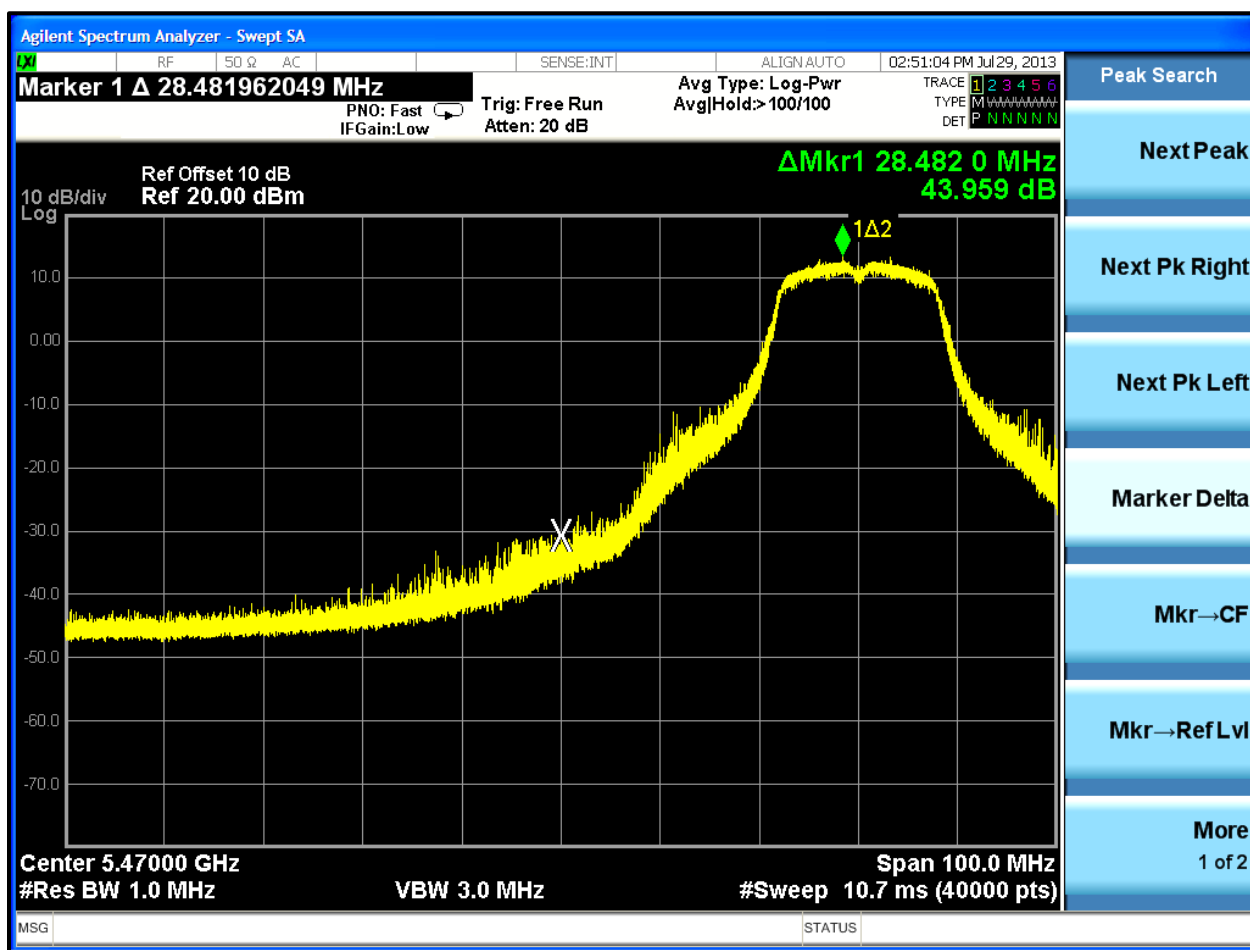

7.3.4 Upper Band Edge

Plot 7-4: Upper Band Edge Measurement Channel 140 (TX Frequency: 5700 MHz)

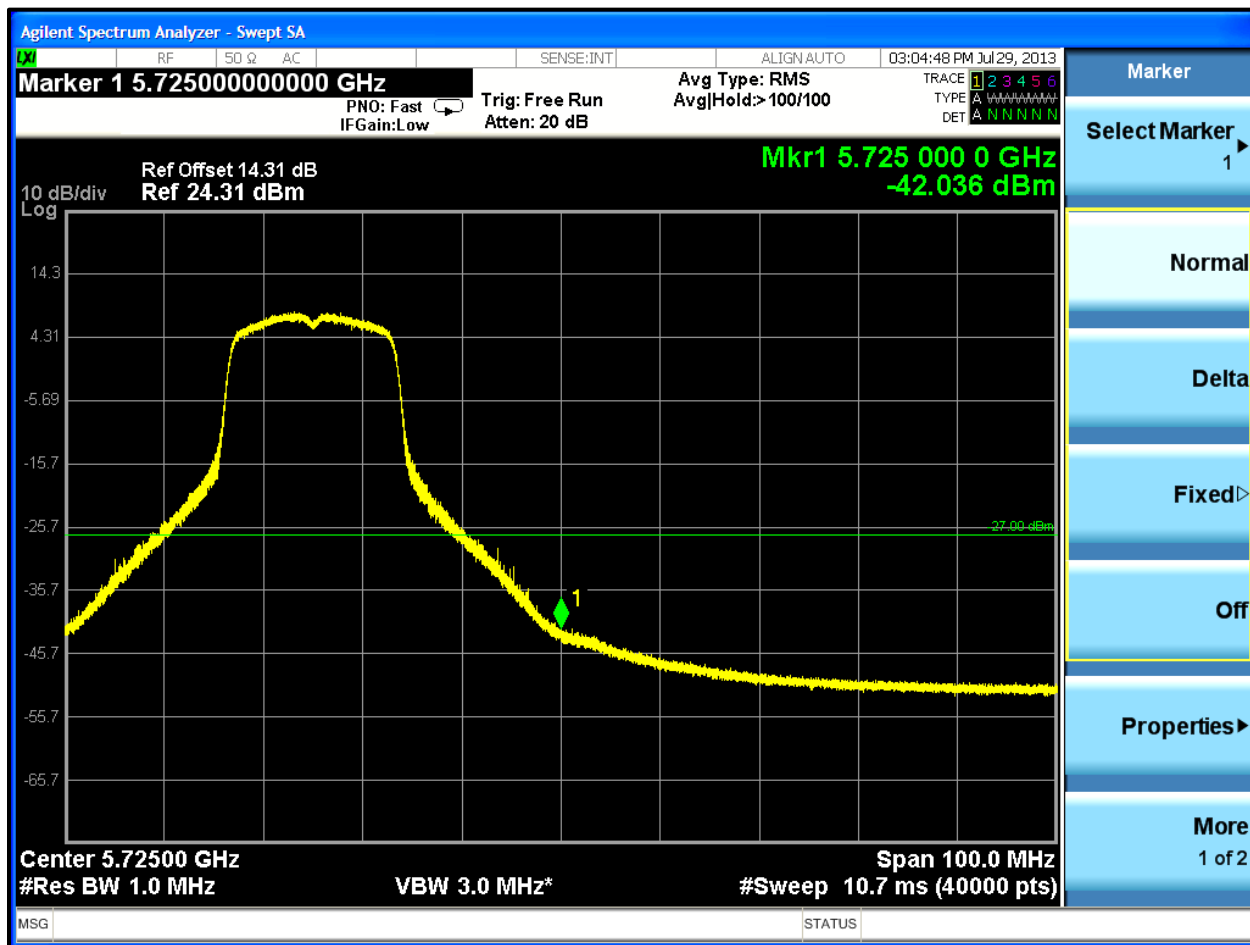

Note: Offset uses manufacturer's antenna gain added for EIRP comparison to limit.

Test Personnel:

Daniel W. Baltzell
Test Engineer

Daniel W. Baltzell
Signature

July 29, 2013
Date of Tests

8 Undesirable Emissions - 15.407(b); RSS-210 A9.3

8.1 Undesirable Emissions Test Procedures

Antenna spurious emissions were measured from the EUT antenna port using a 50-ohm spectrum analyzer.


NOTE: Offset is manufacturer's antenna gain added for EIRP comparison to limit.

Table 8-1: Undesirable Test Equipment


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz - 26.5 GHz)	MY51250846	4/16/14
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	3/18/14
900126	Hewlett Packard	11970A	Harmonic Mixer (26 - 40 GHz)	2332A01199	10/29/13
901521	Harris Corporation	2082-6174-20	20 dB Attenuator (2W, DC-4 GHz)	N/A	10/20/13


8.2 Undesirable Emissions Test Results

Plot 8-1: Undesirable Emissions Channel 36 (5180 MHz); 9 kHz – 26.5 GHz

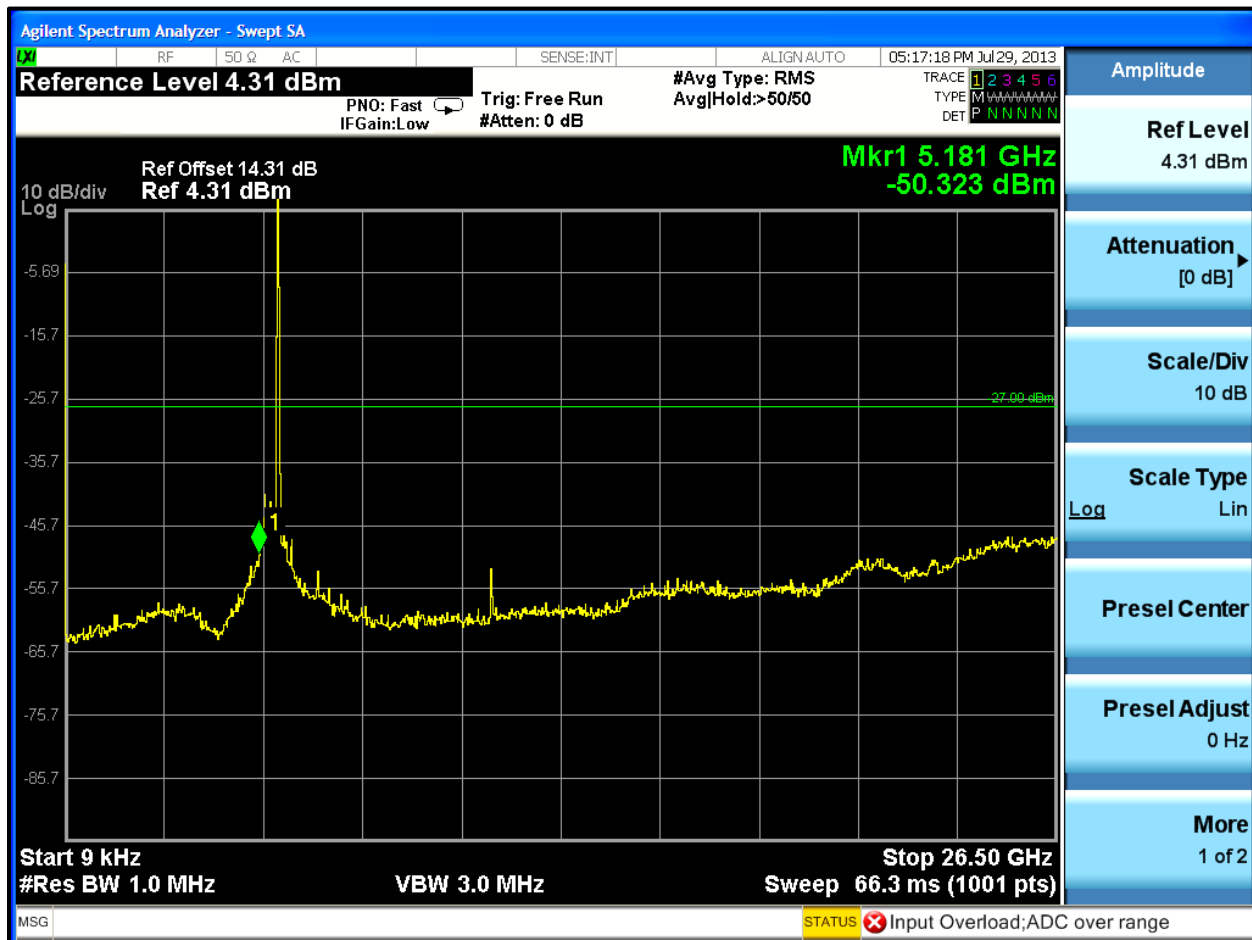


Plot 8-2: Undesirable Emissions Channel 36 (5180 MHz); 26.5 - 40 GHz

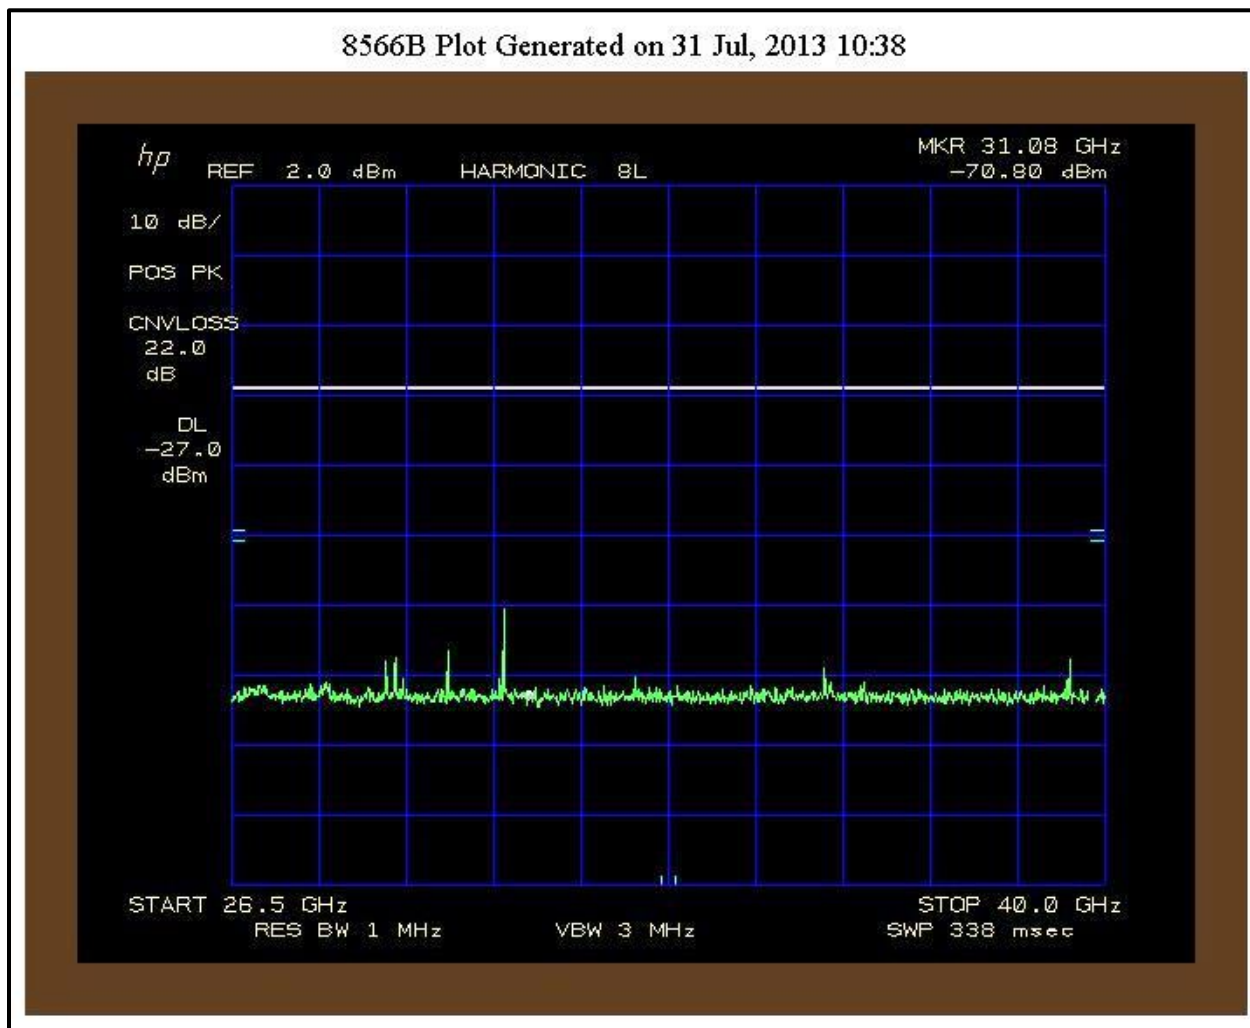


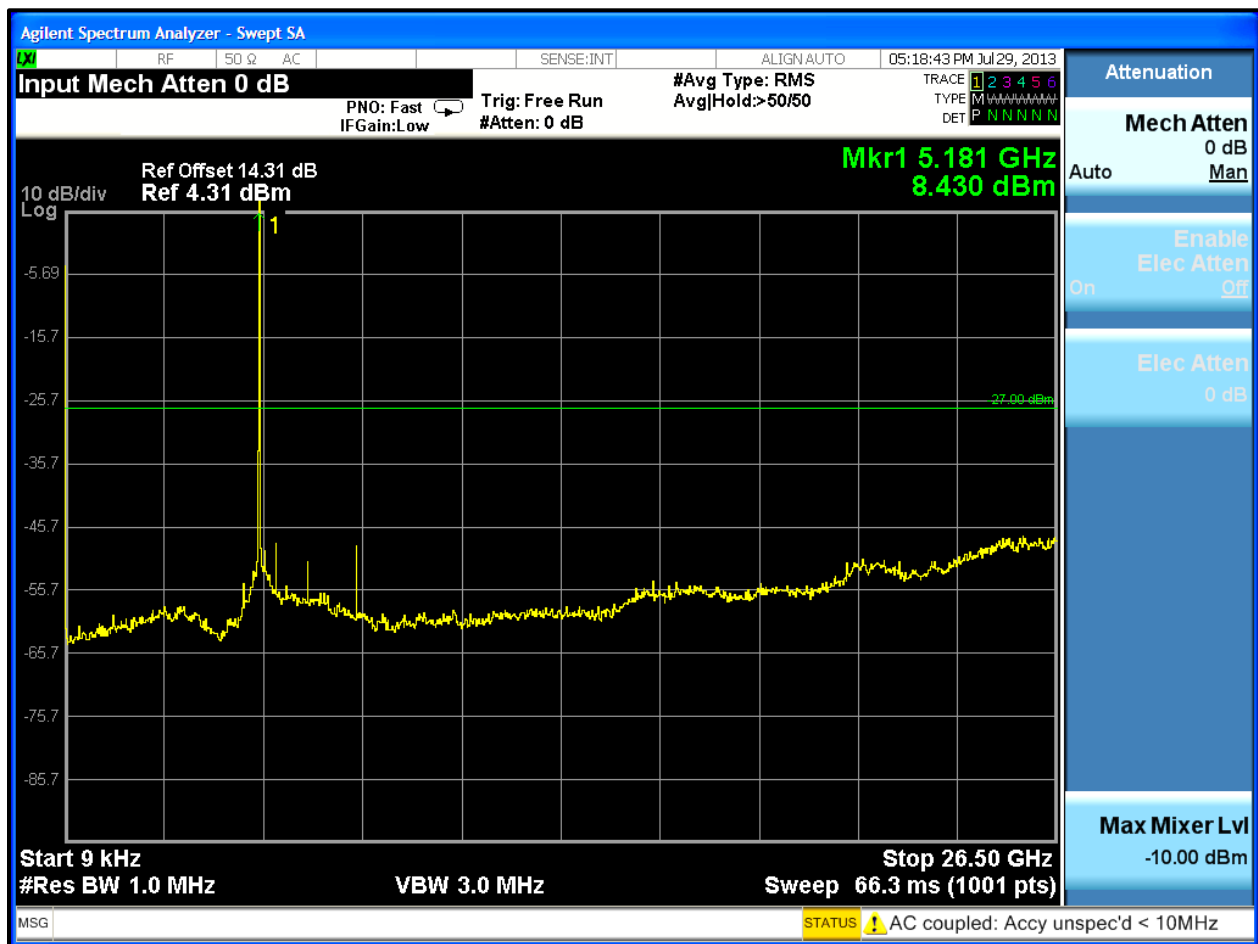


Plot 8-4: Undesirable Emissions Channel 40 (5200 MHz); 26.5 - 40 GHz

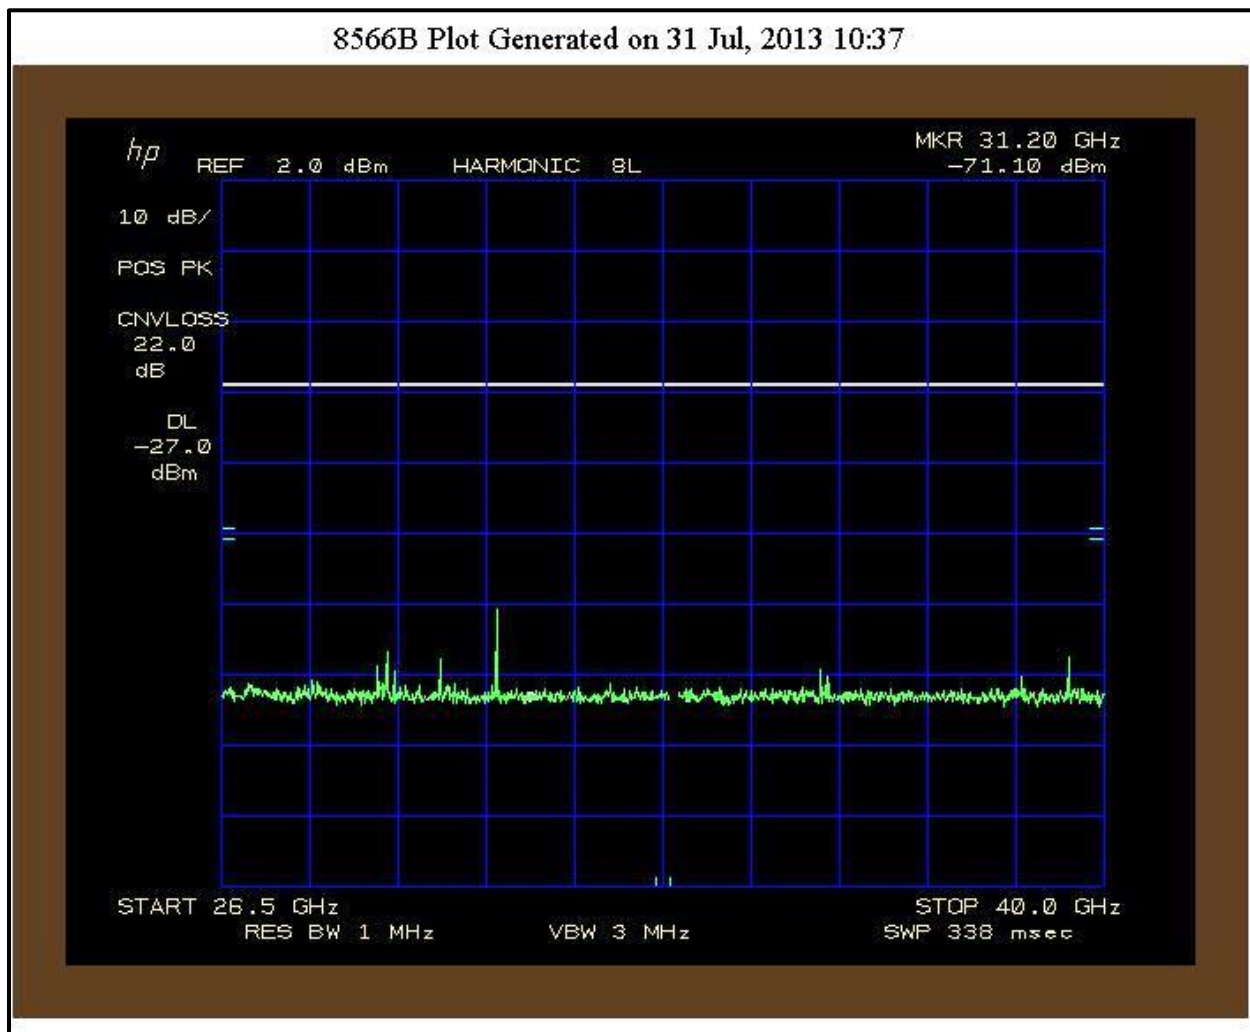


Plot 8-5: Undesirable Emissions Channel 48 (5240 MHz); 9 kHz – 26.5 GHz

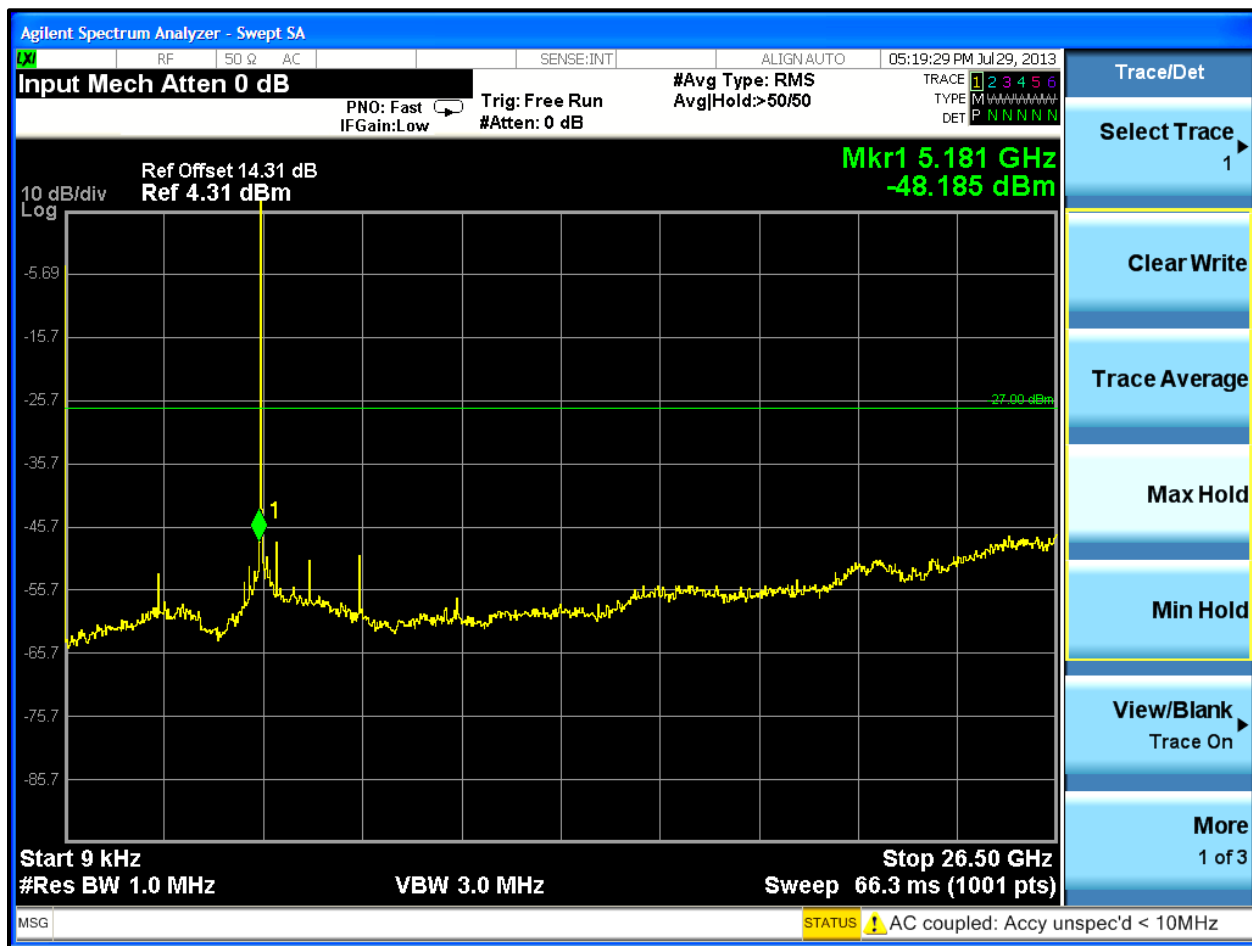



Plot 8-6: Undesirable Emissions Channel 48 (5240 MHz); 26.5 - 40 GHz

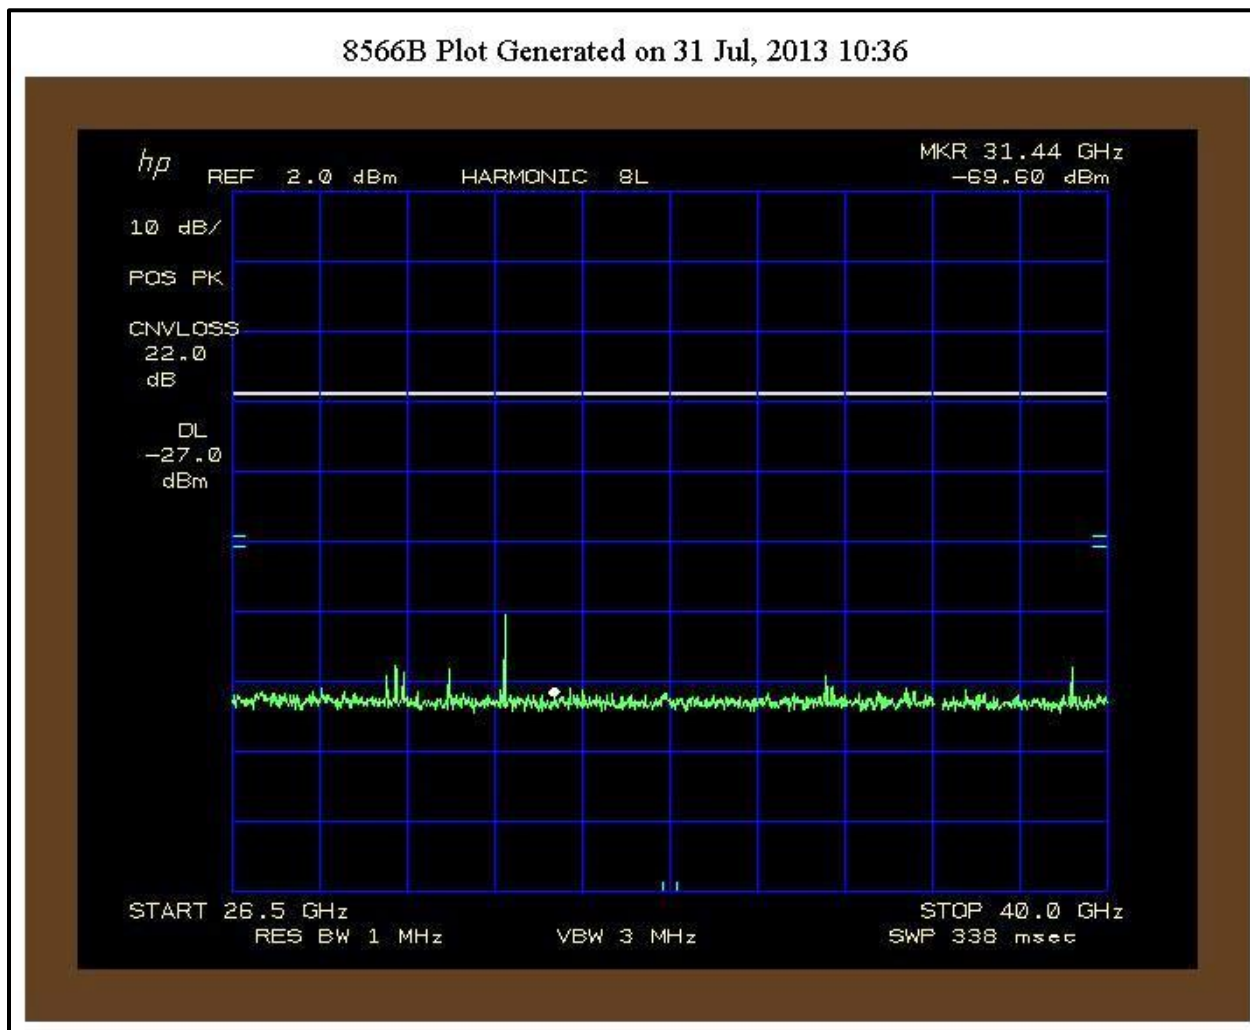

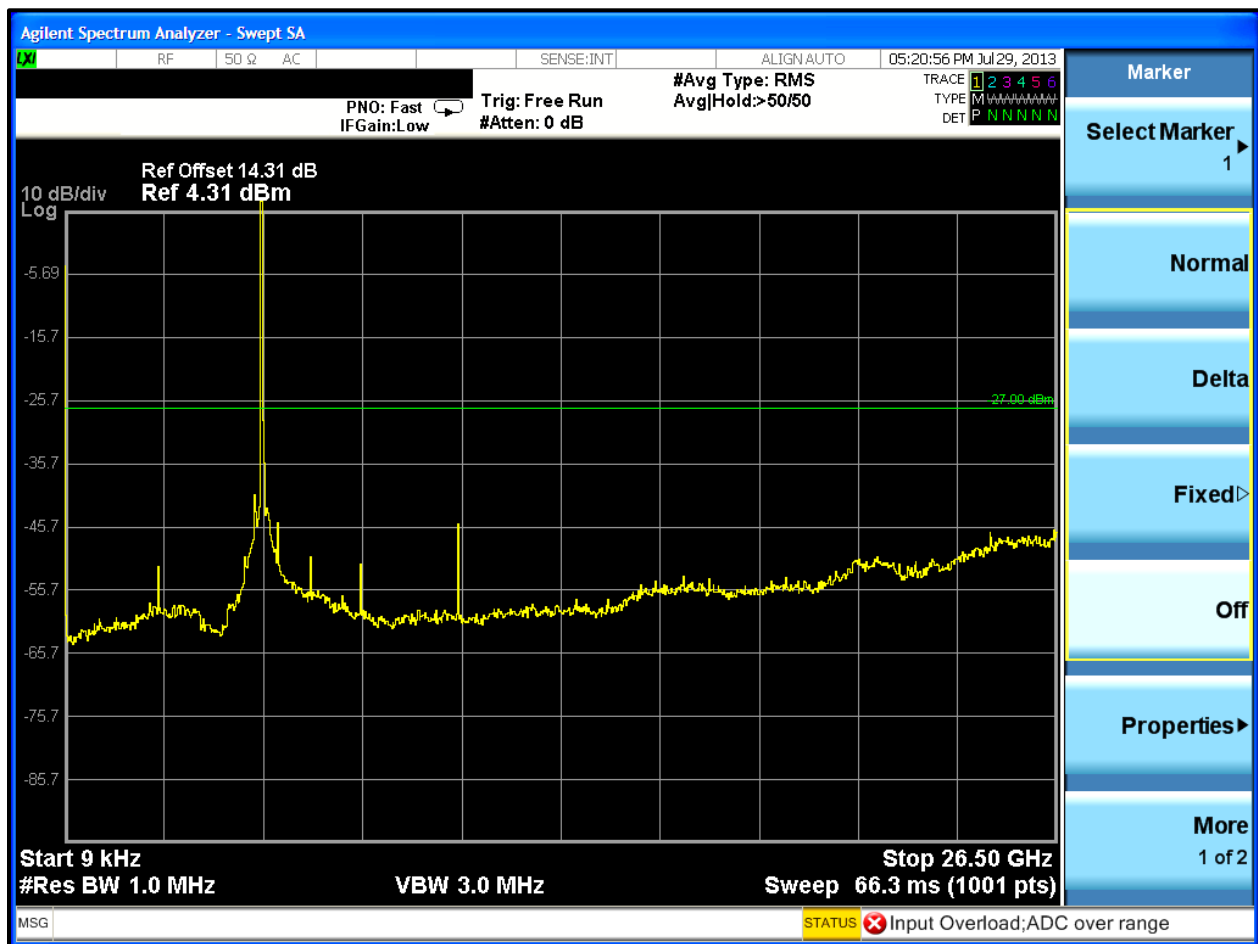


Plot 8-8: Undesirable Emissions Channel 52 (5260 MHz); 26.5 - 40 GHz

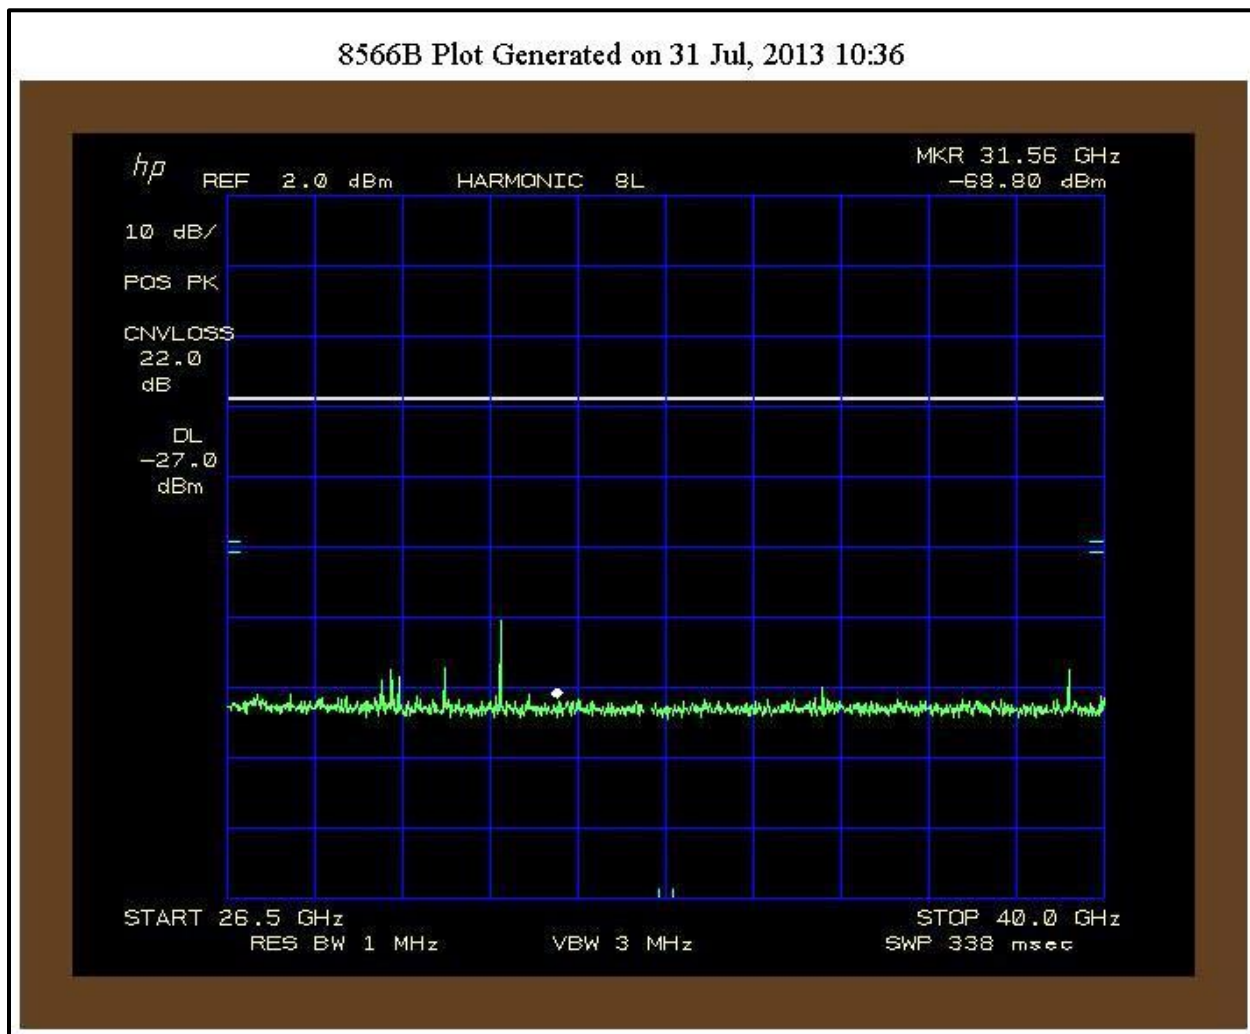


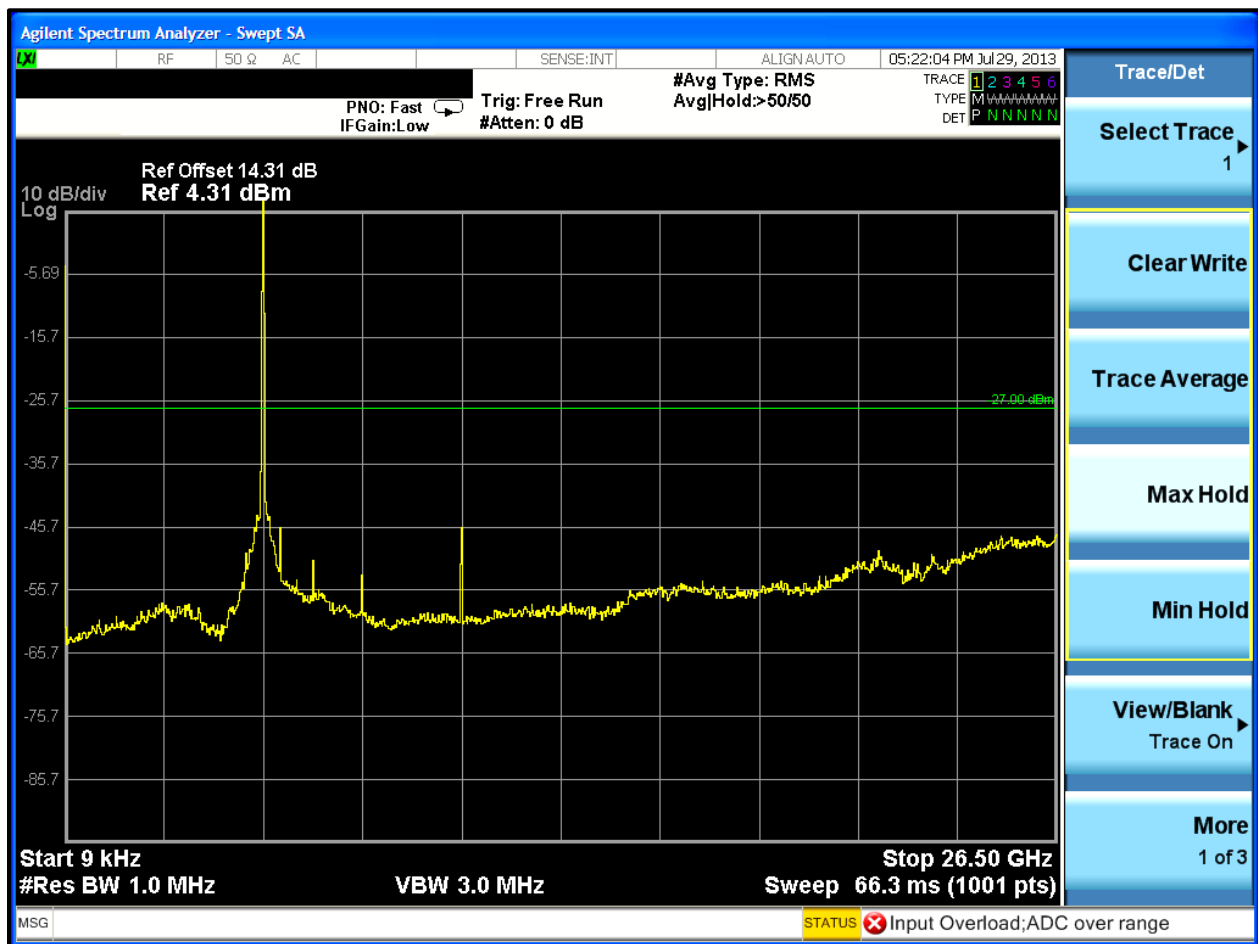


Plot 8-10: Undesirable Emissions Channel 60 (5300 MHz); 26.5 - 40 GHz

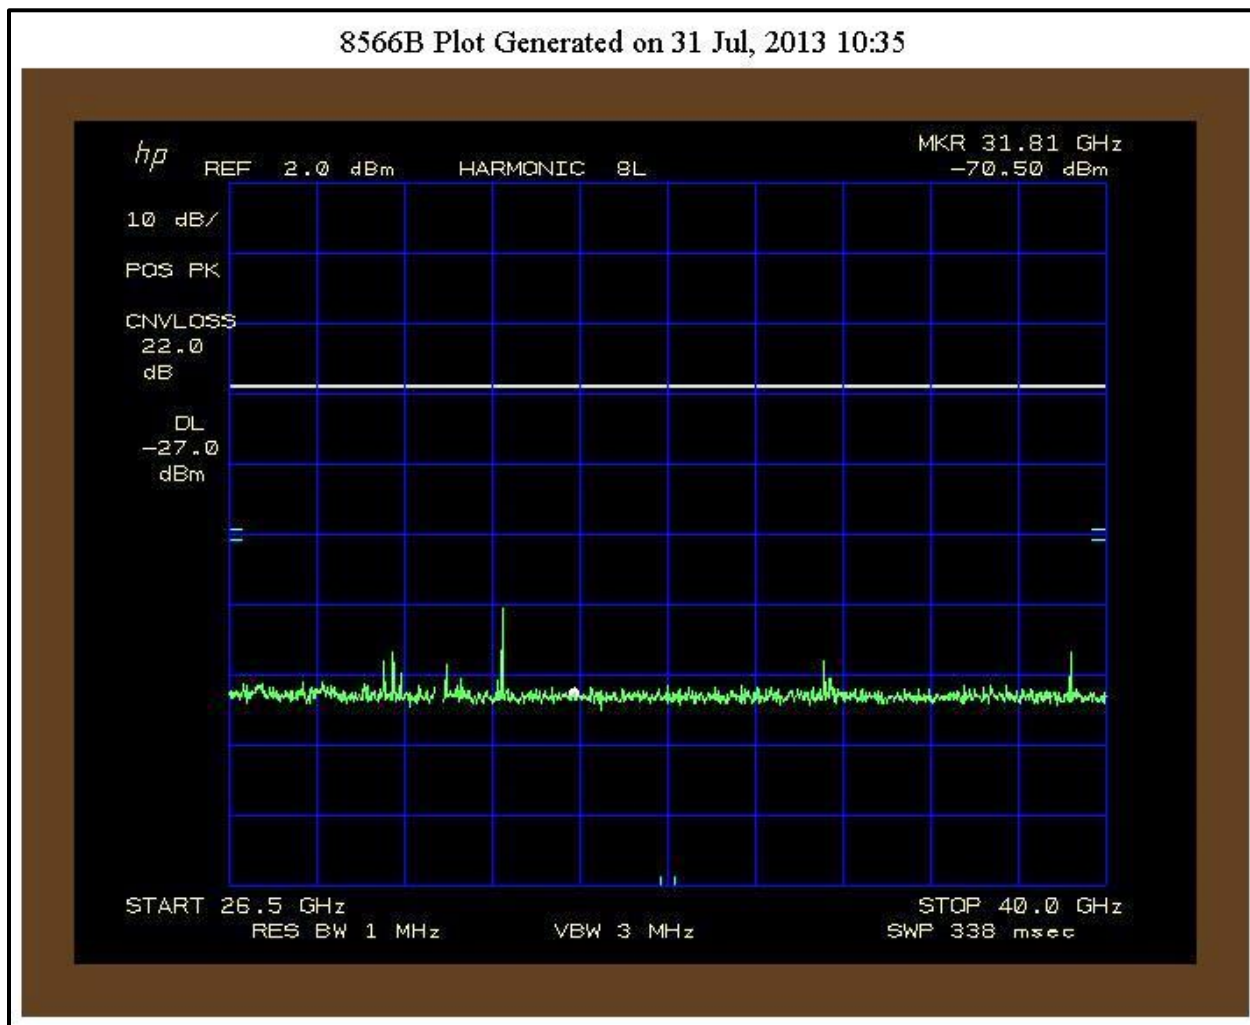


Plot 8-11: Undesirable Emissions Channel 64 (5320 MHz); 9 kHz – 26.5 GHz

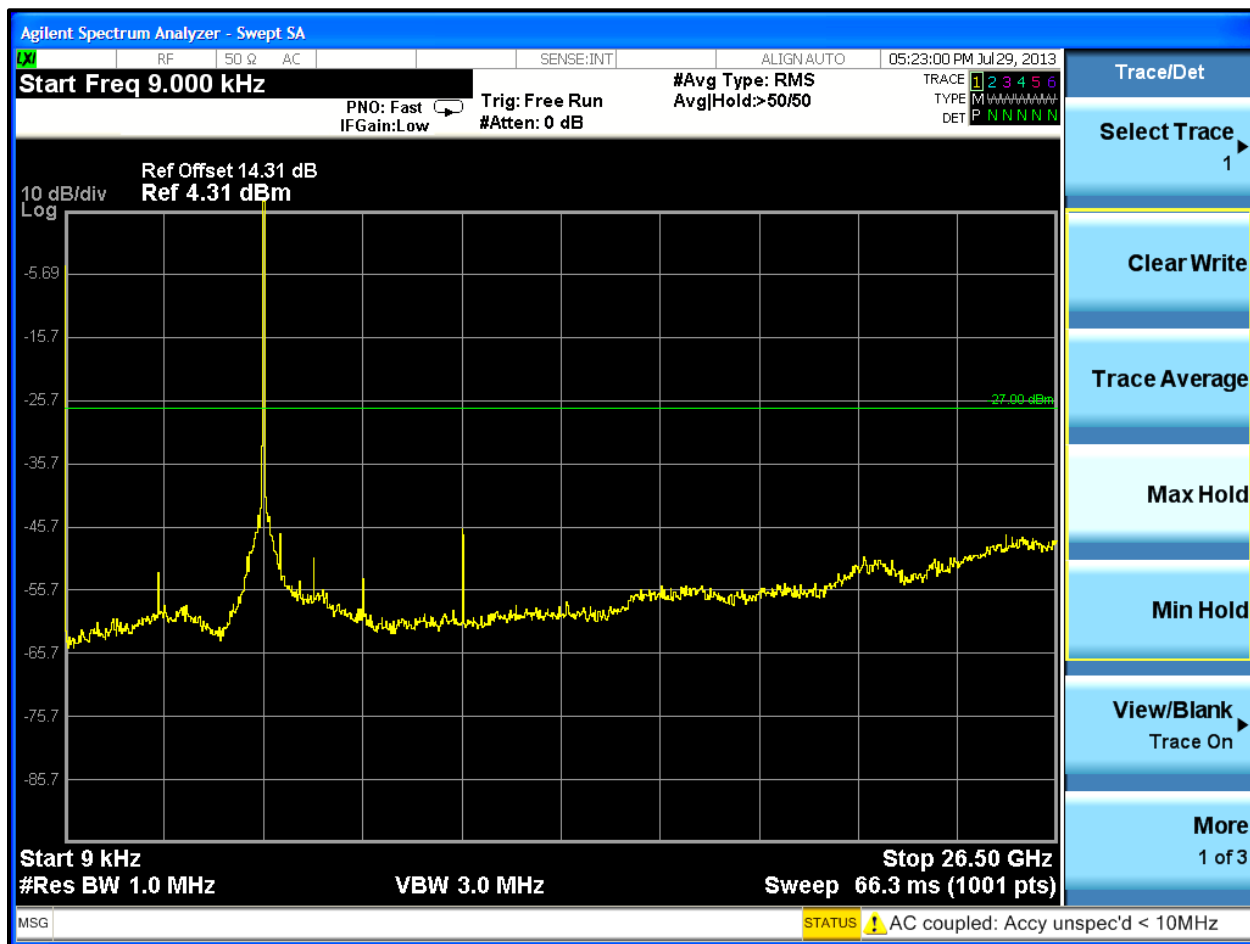


Plot 8-12: Undesirable Emissions Channel 64 (5320 MHz); 26.5 - 40 GHz

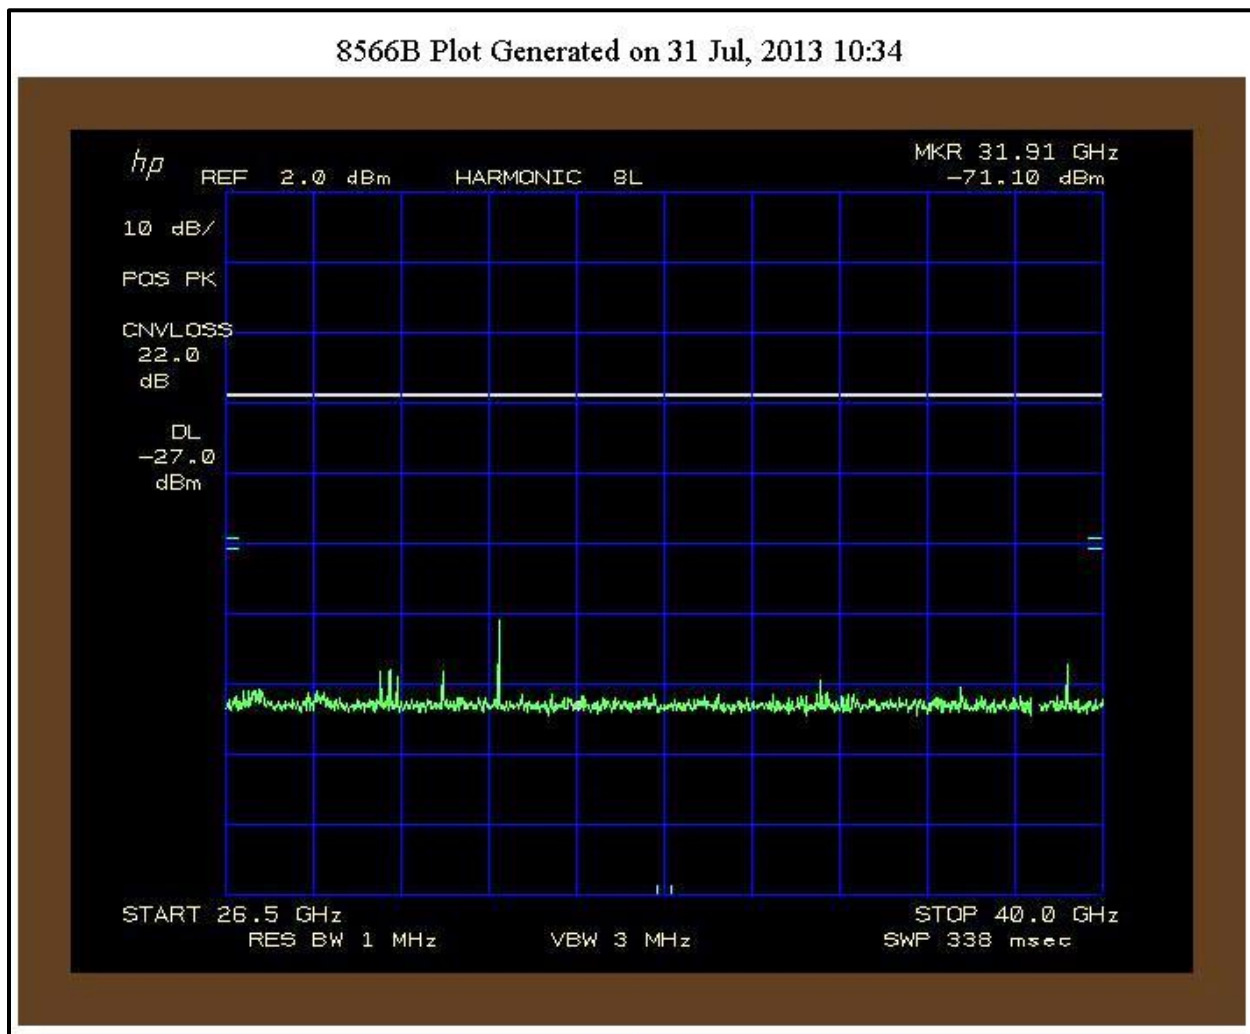


Plot 8-13: Undesirable Emissions Channel 100 (5500 MHz); 9 kHz – 26.5 GHz

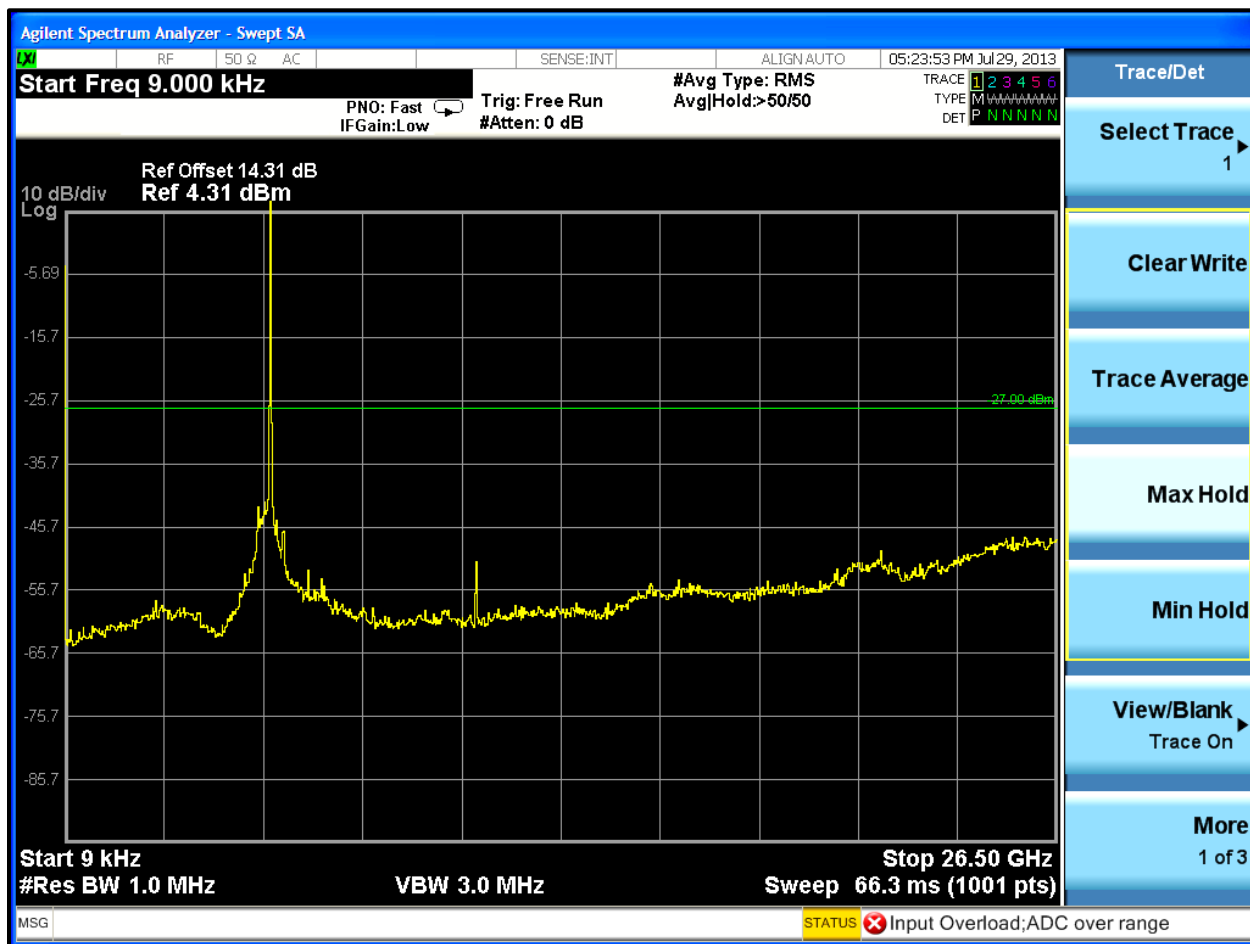


Plot 8-14: Undesirable Emissions Channel 100 (5500 MHz); 26.5 - 40 GHz

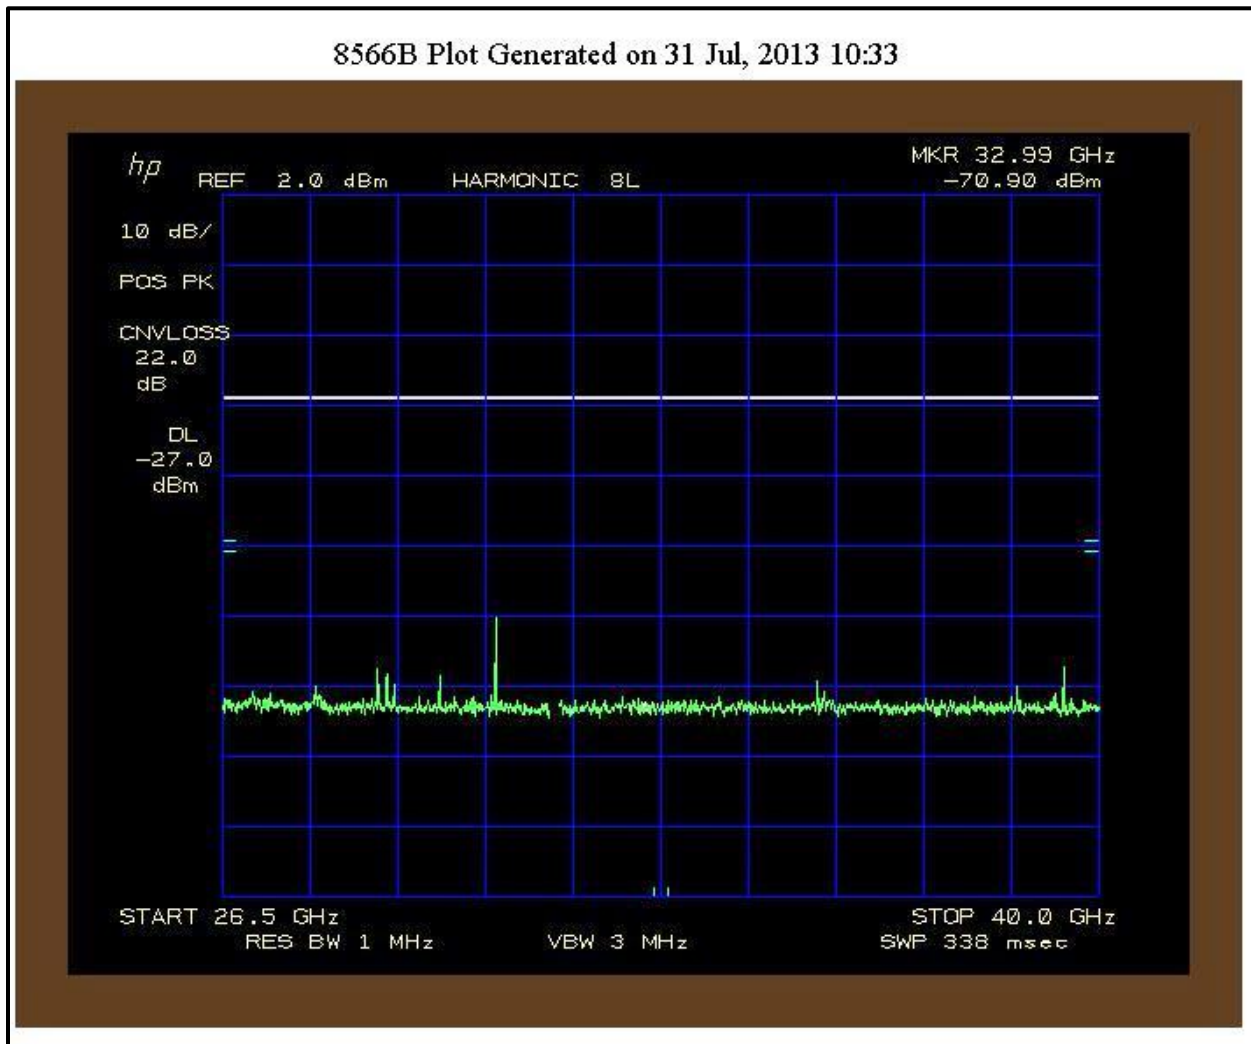


Plot 8-15: Undesirable Emissions Channel 116 (5580 MHz); 9 kHz – 26.5 GHz

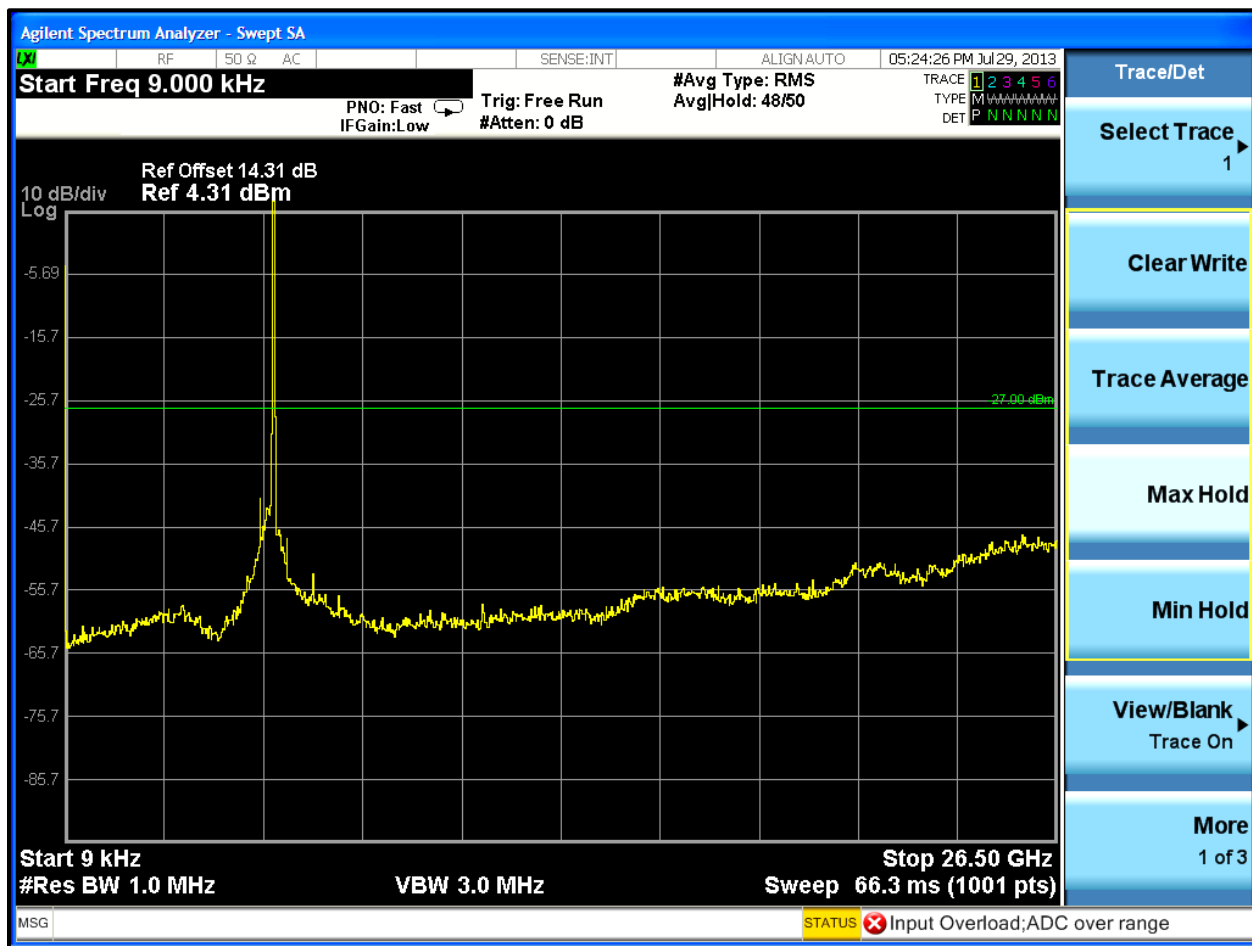


Plot 8-16: Undesirable Emissions Channel 116 (5580 MHz); 26.5 - 40 GHz

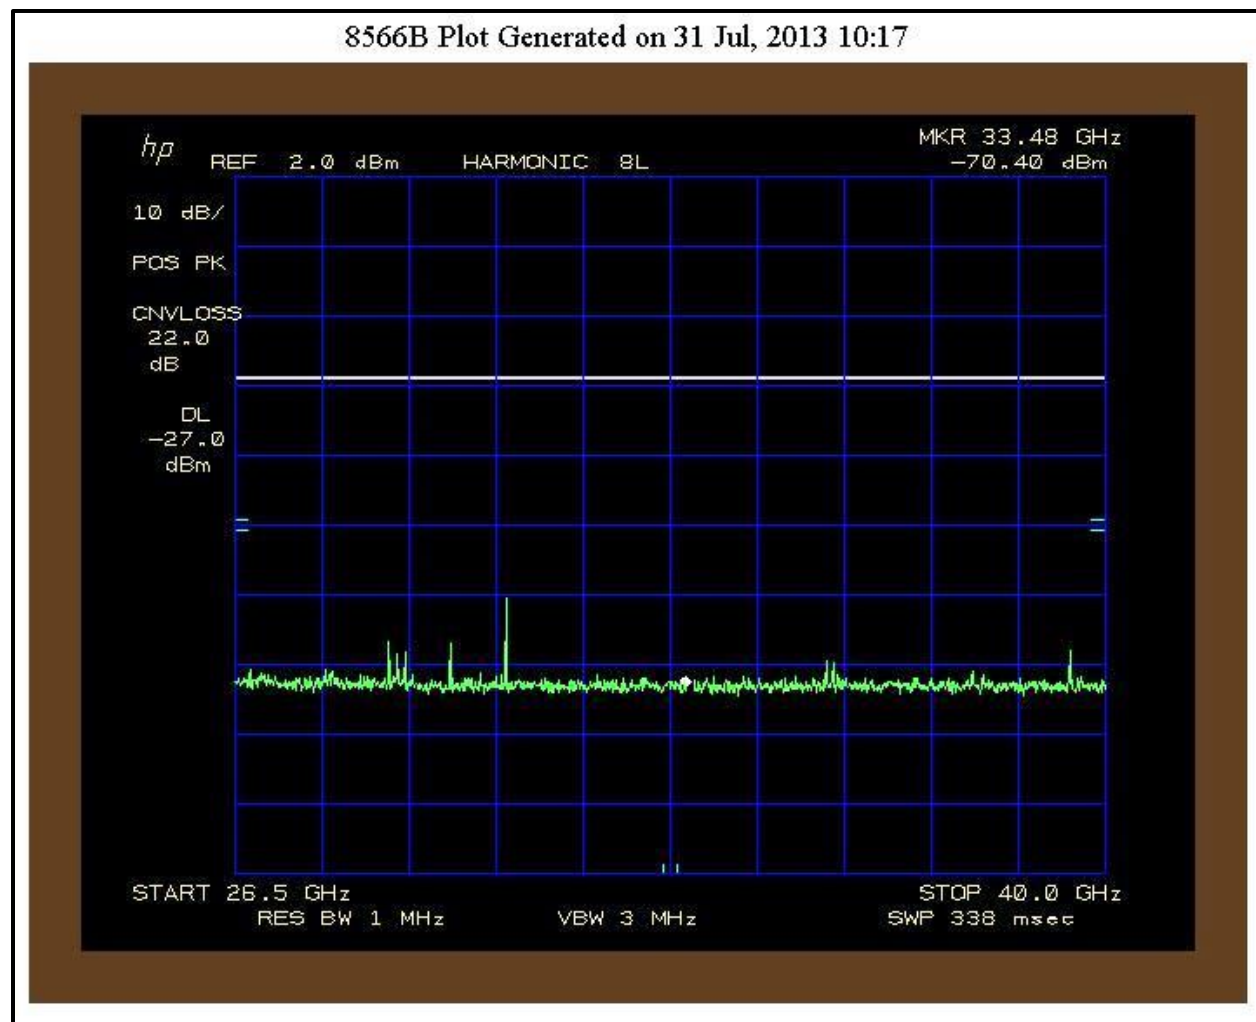

Plot 8-17: Undesirable Emissions Channel 140 (5700 MHz); 9 kHz – 26.5 GHz

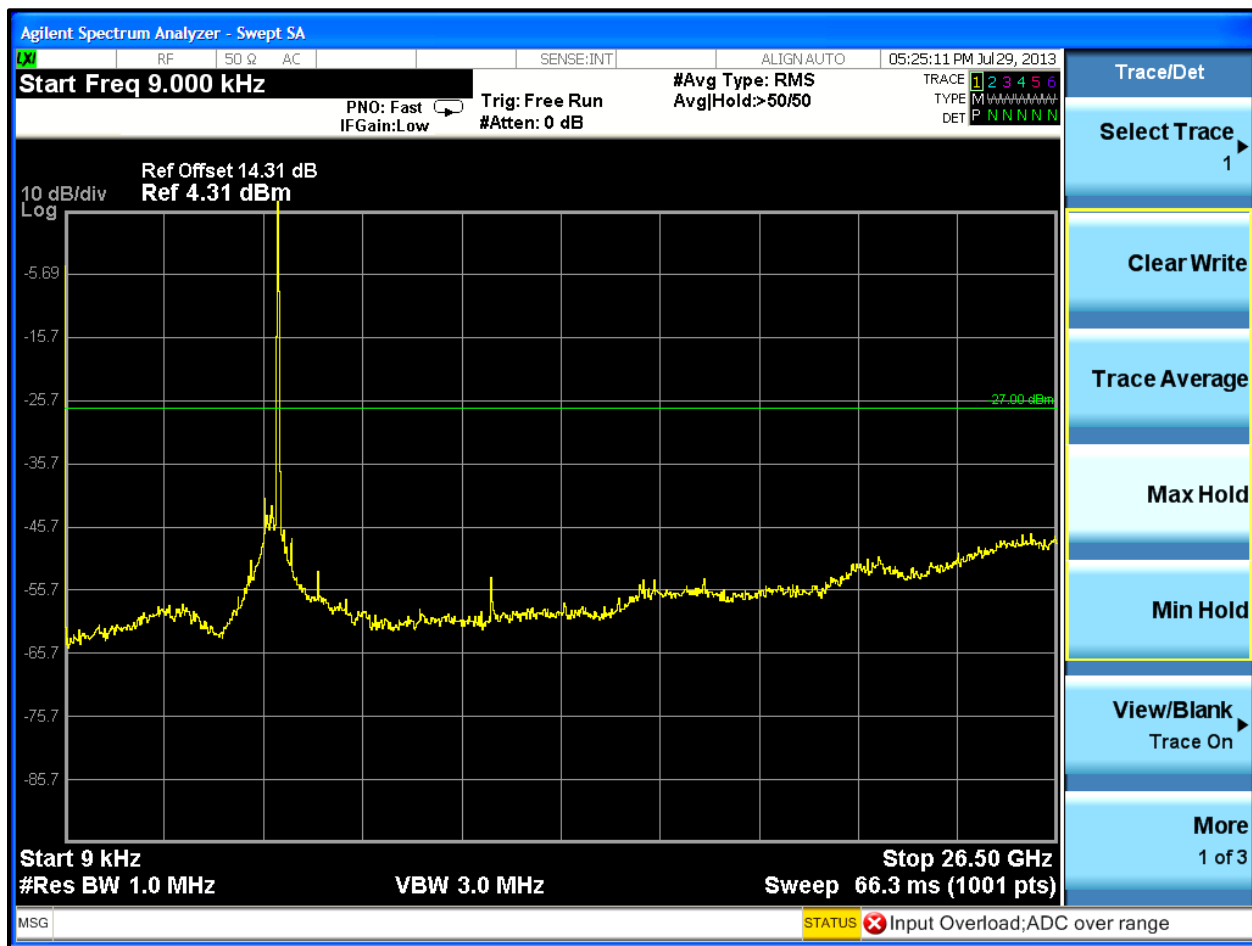

Plot 8-18: Undesirable Emissions Channel 140 (5700 MHz); 26.5 - 40 GHz

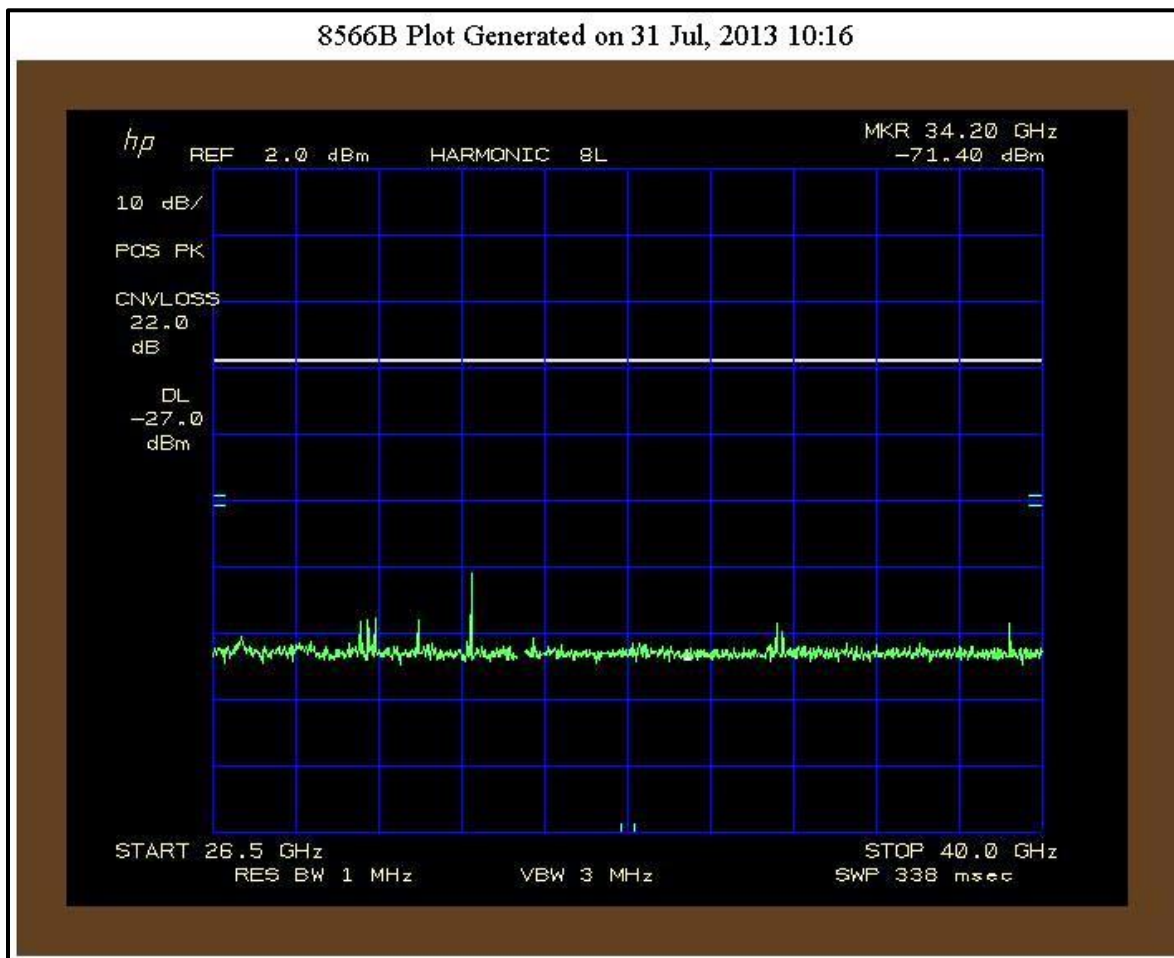

8.3 Limits of Undesirable Emissions

(b) *Undesirable emission limits:* Except as shown in paragraph (b)(6) of this section, the peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz. Devices operating in the 5.25–5.35 GHz band that generate emissions in the 5.15–5.25 GHz band must meet all applicable technical requirements for operation in the 5.15–5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of –27 dBm/MHz in the 5.15–5.25 GHz band.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of –27 dBm/MHz.

Test Personnel:

Daniel W. Baltzell
Test Engineer

Daniel W. Baltzell
Signature

July 29-30, 2013
Dates of Test

9 26 dB Bandwidth – FCC 15.407(a); RSS-210 A9.2

9.1 26 db Bandwidth Test Procedure

The 26 dB bandwidths were measured using a 50-ohm spectrum analyzer with the resolution bandwidth set at 1% of the span. The device was modulated and the spectrum analyzer placed in max hold to capture the trace. The minimum 26 dB bandwidths are presented below.

Table 9-1: 26 dB Bandwidth Test Equipment


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz - 26.5 GHz)	MY51250846	4/16/14
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	3/18/14

9.2 26 db Bandwidth Test Results


Table 9-2: 26 db Bandwidth Test Data

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	24.2
40	5200	25.2
48	5240	24.5
52	5260	27.5
60	5300	25.8
64	5320	26.2
100	5500	27.7
116	5580	32.0
140	5700	26.9


Plot 9-1: 26 dB Bandwidth Channel 36 (TX Frequency 5180 MHz) - 802.11a

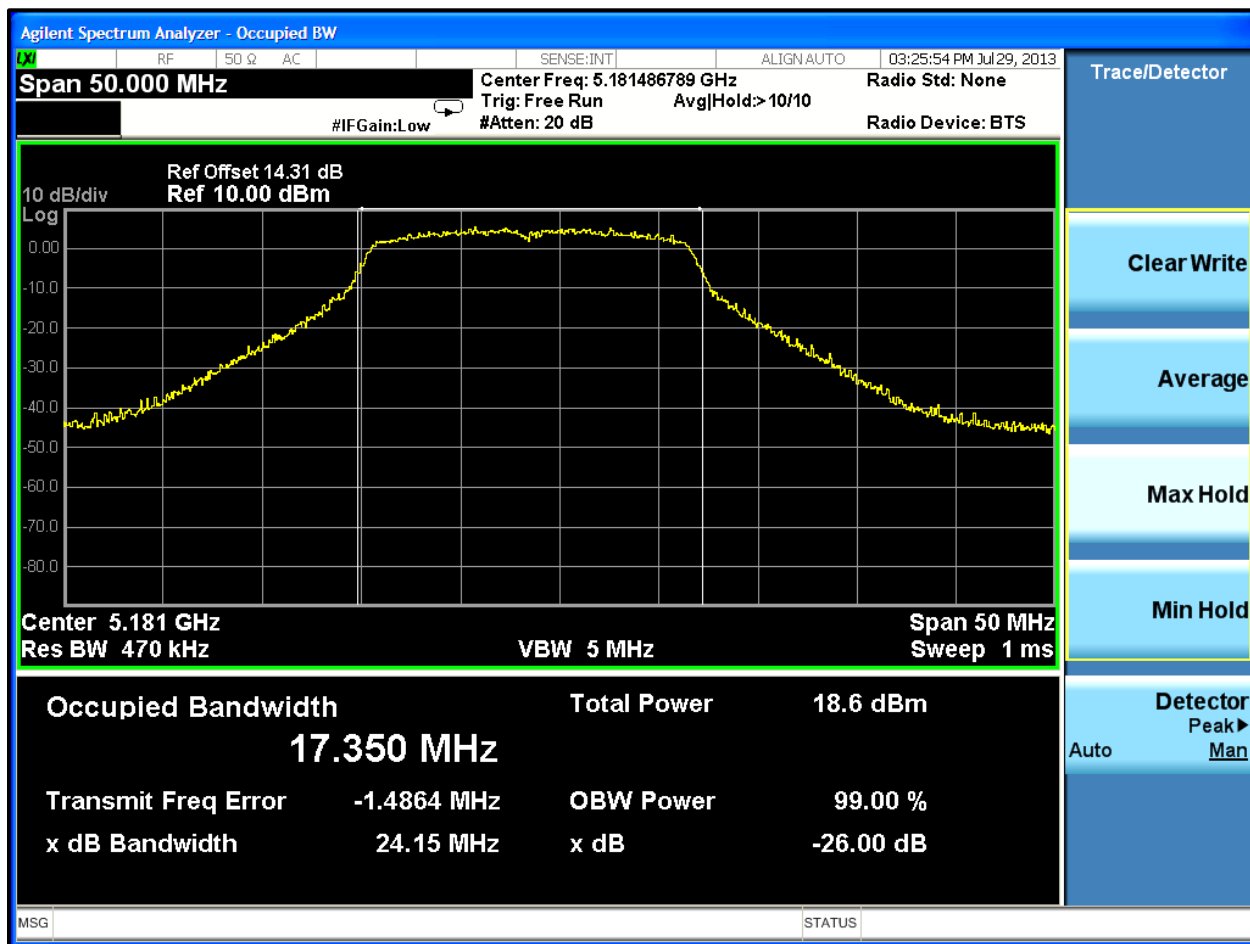


Plot 9-2: 26 dB Bandwidth Channel 40 (TX Frequency 5200 MHz) - 802.11a

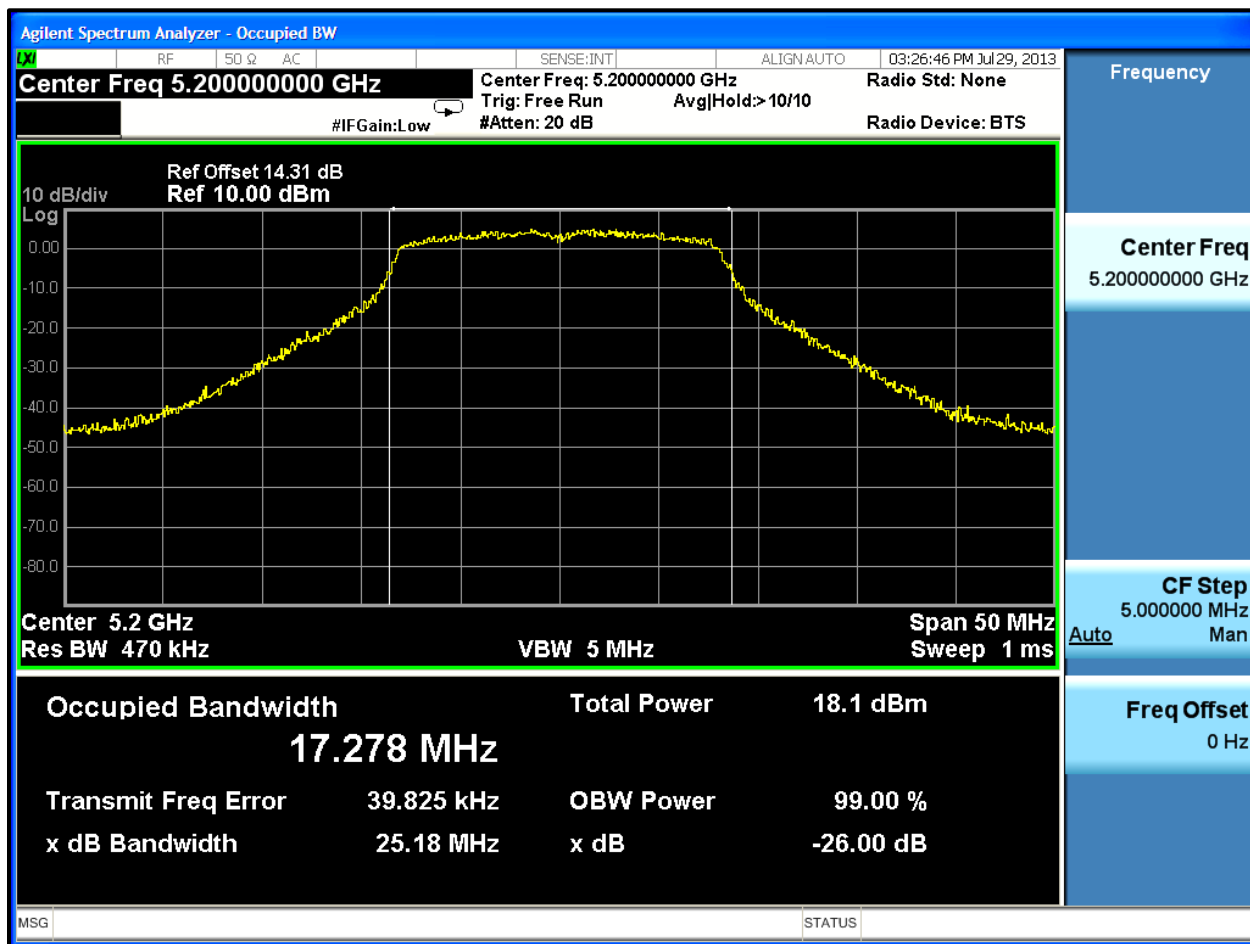


Plot 9-3: 26 dB Bandwidth Channel 48 (TX Frequency 5240 MHz) - 802.11a

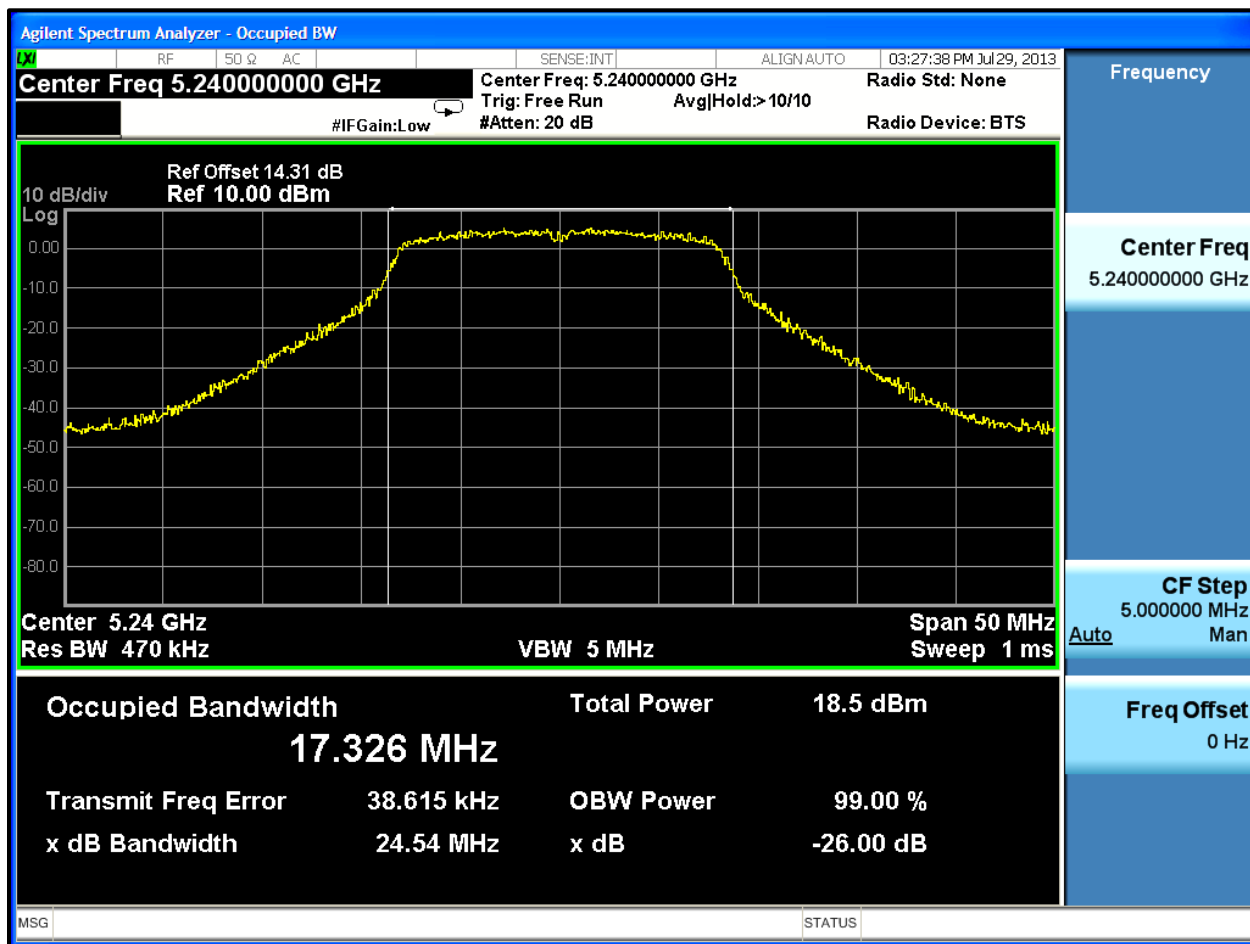


Plot 9-4: 26 dB Bandwidth Channel 52 (TX Frequency 5260 MHz) - 802.11a

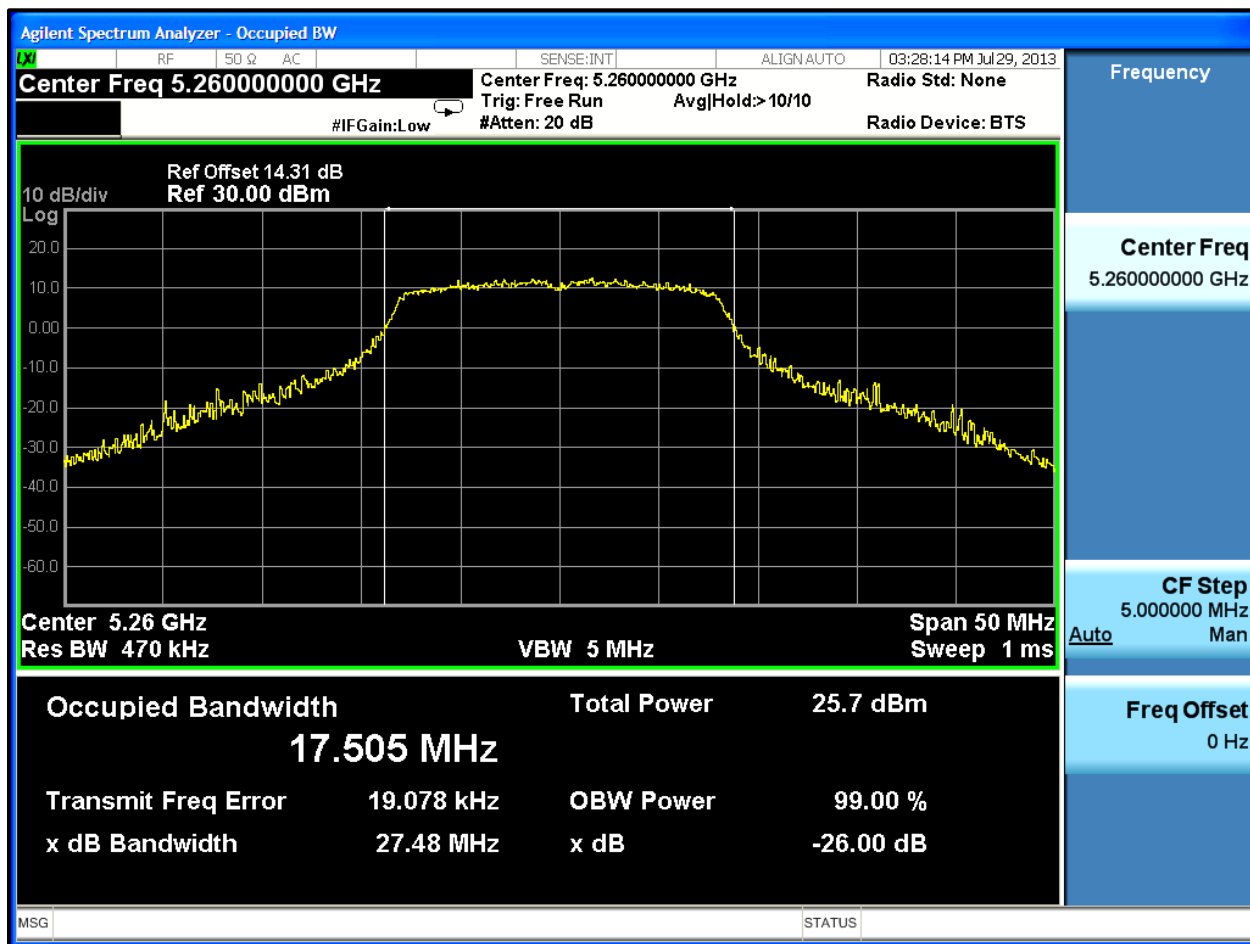


Plot 9-5: 26 dB Bandwidth Channel 60 (TX Frequency 5300 MHz) - 802.11a

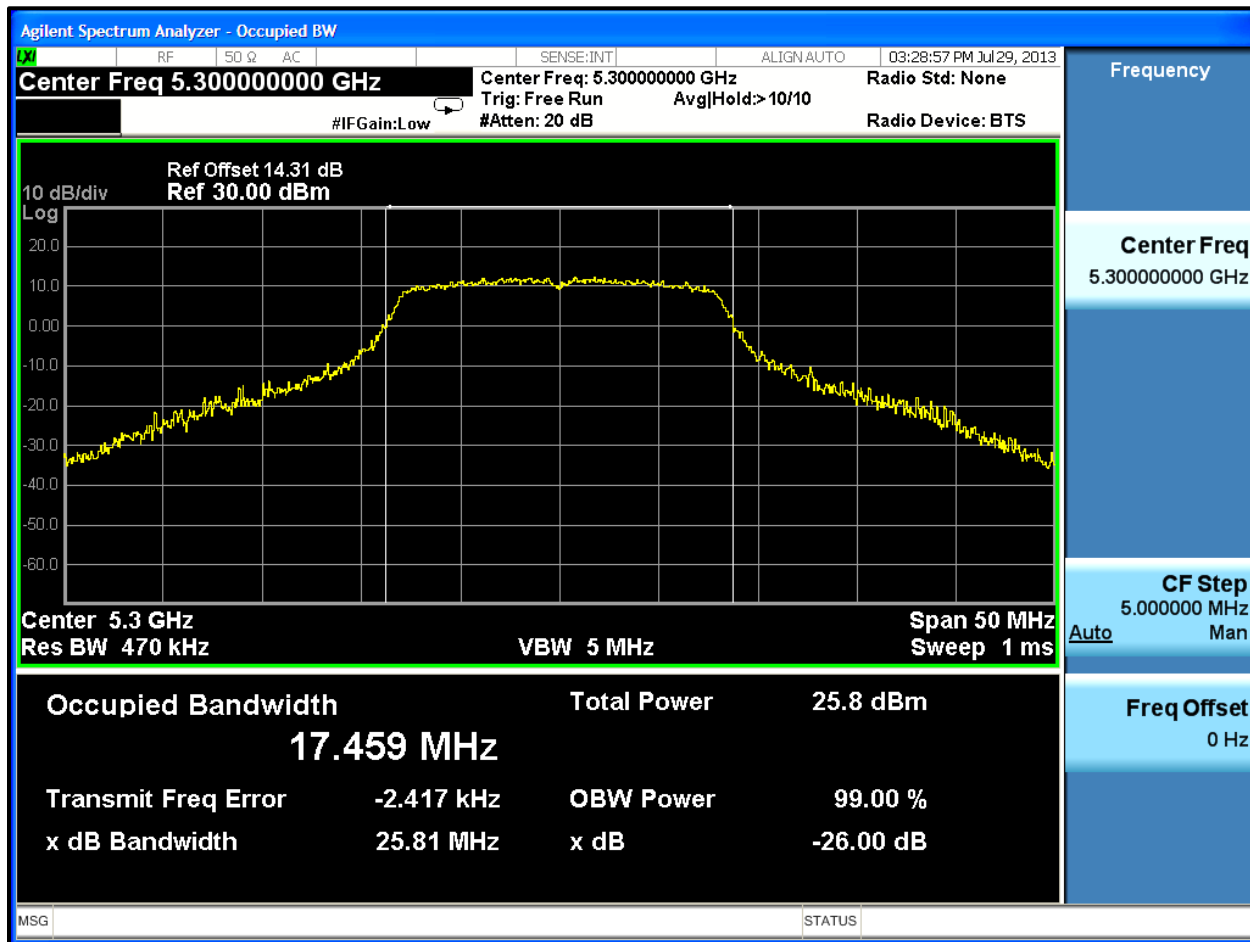


Plot 9-6: 26 dB Bandwidth Channel 64 (TX Frequency 5320 MHz) - 802.11a

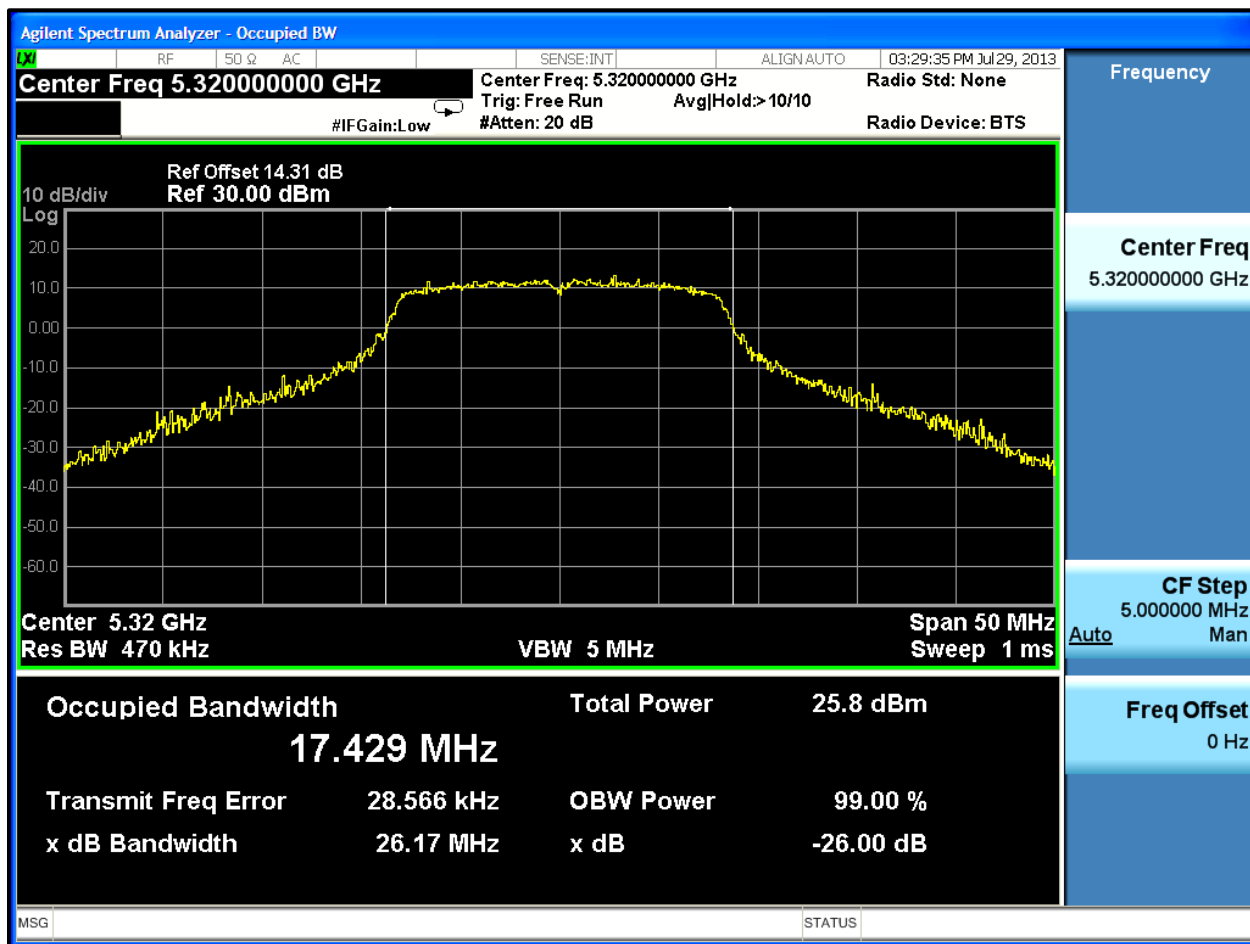


Plot 9-7: 26 dB Bandwidth Channel 100 (TX Frequency 5500 MHz) - 802.11a

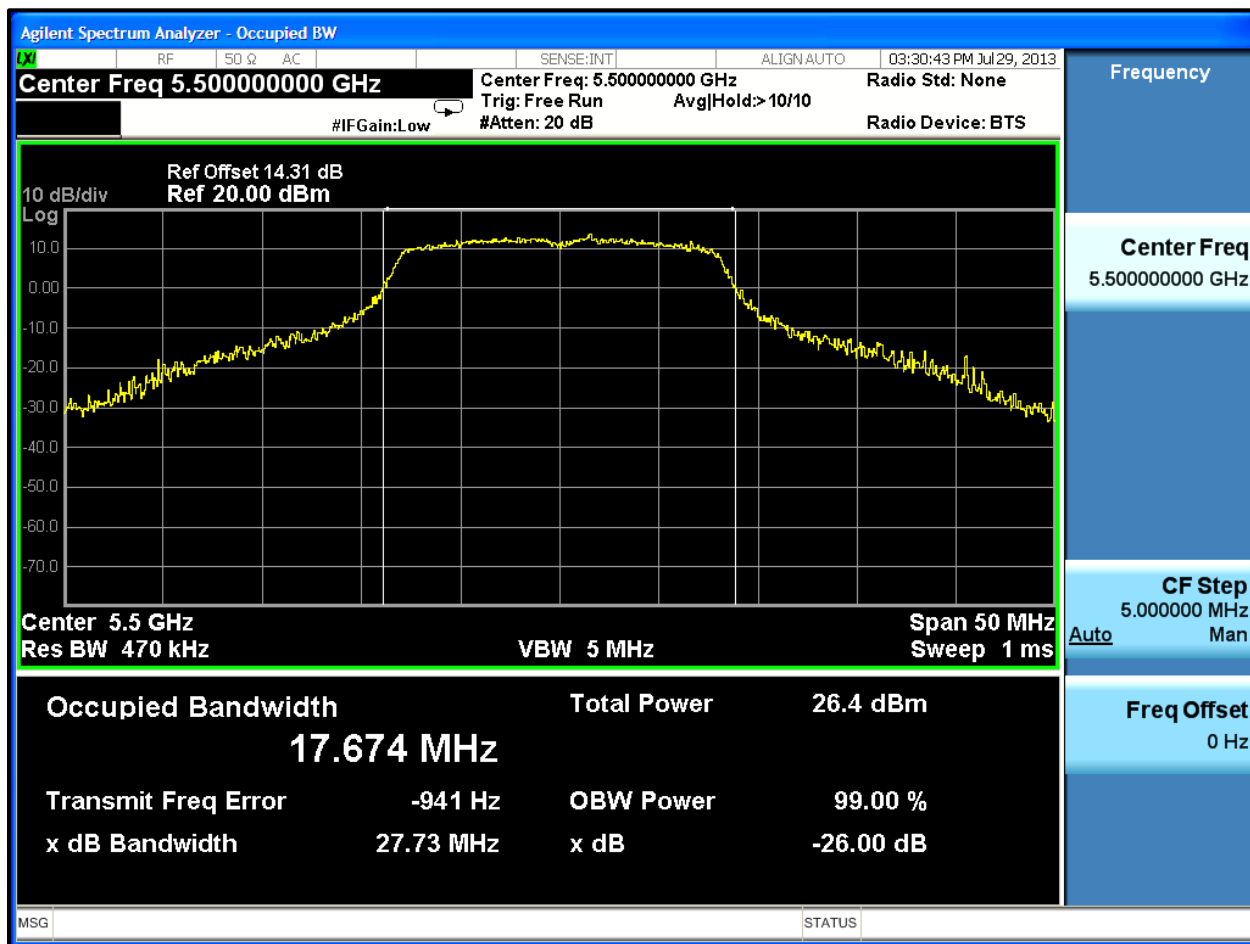

Plot 9-8: 26 dB Bandwidth Channel 116 (TX Frequency 5580 MHz) - 802.11a

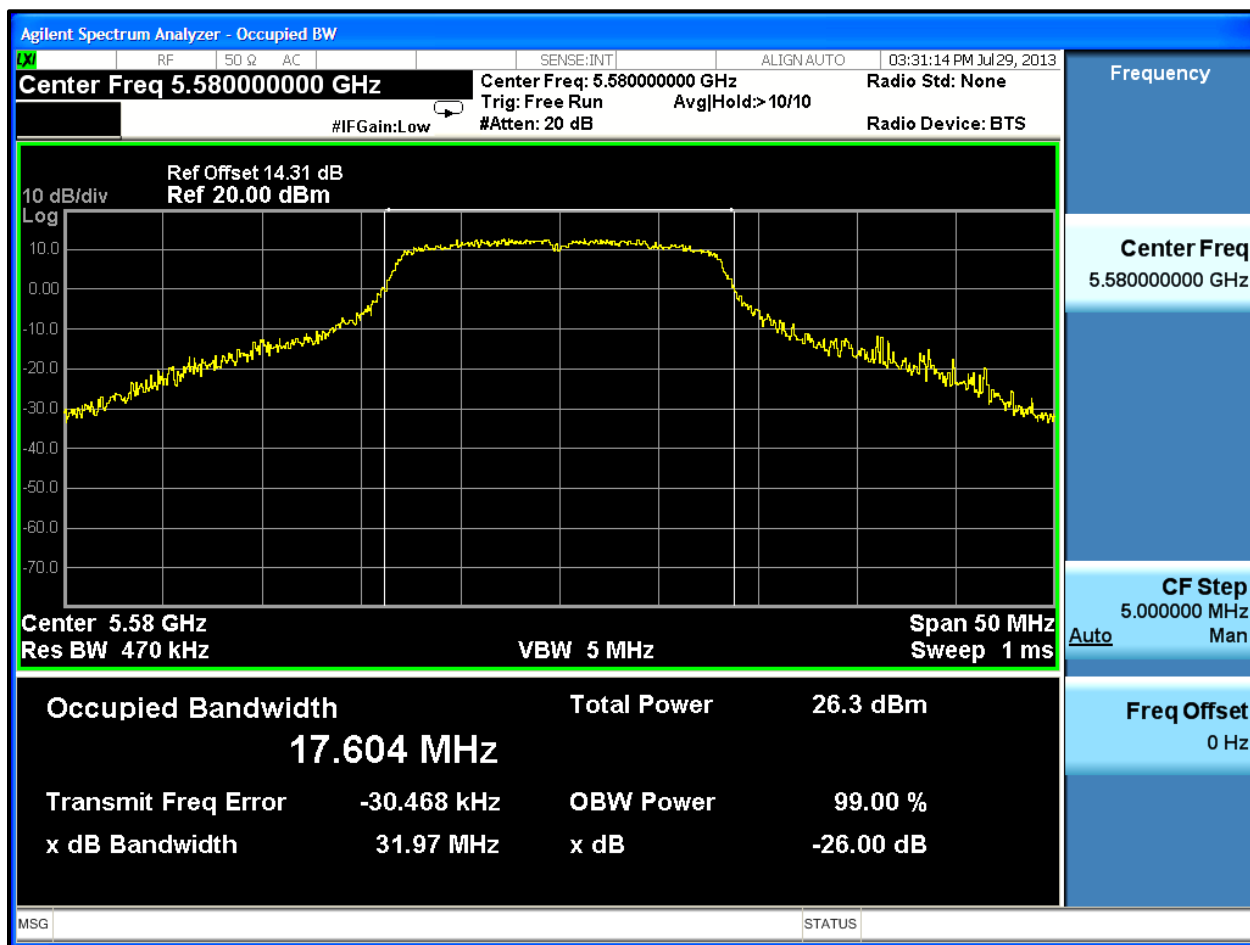

Plot 9-9: 26 dB Bandwidth Channel 140 (TX Frequency 5700 MHz) - 802.11a

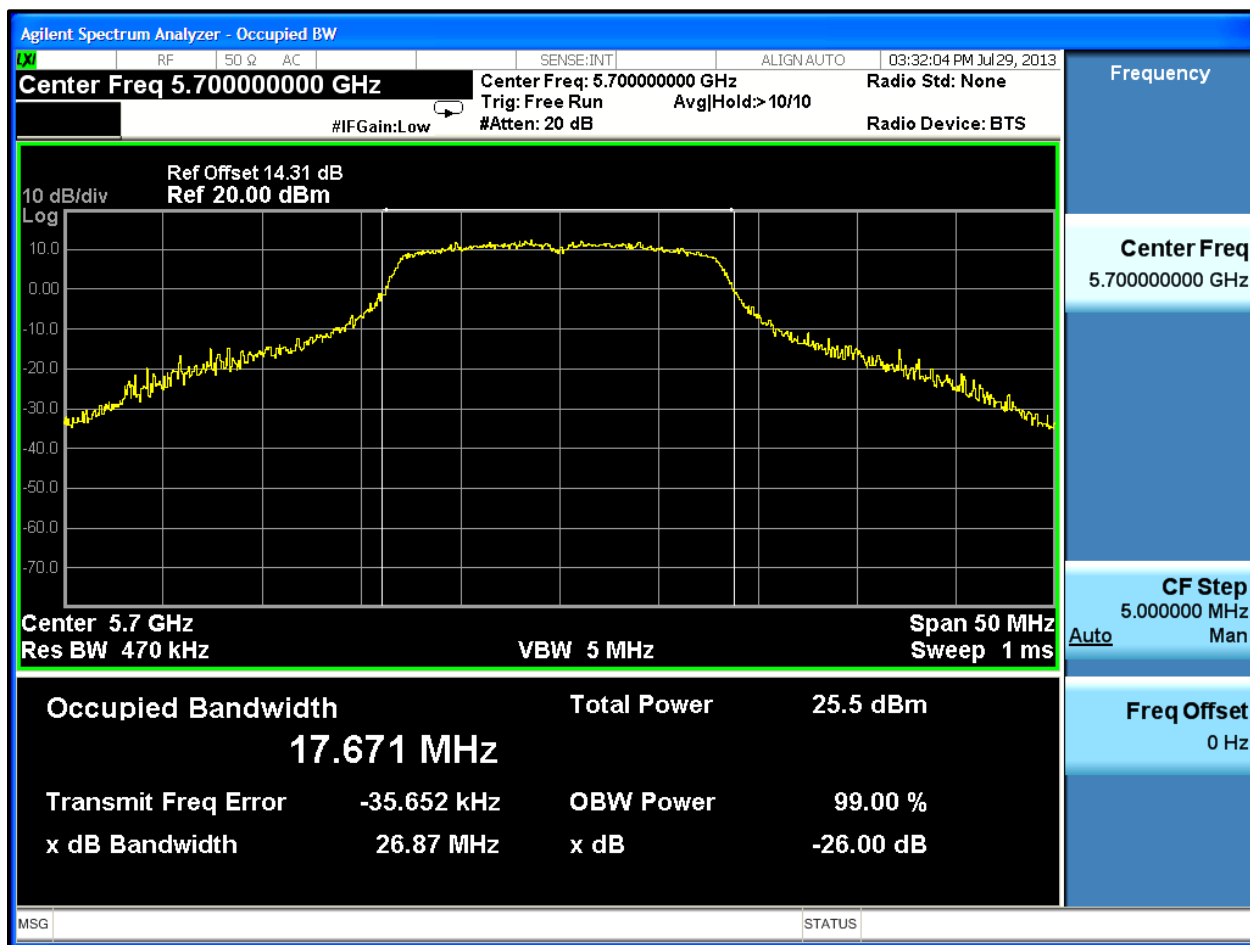

Test Personnel:

Daniel W. Baltzell
 Test Engineer

Daniel W. Baltzell

Signature

July 29, 2013
 Date of Tests

10 Radiated Emissions – FCC 15.209; RSS-Gen

10.1 Limits of Radiated Emissions Measurement

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009-0.490	2400/f (kHz)	300
0.490-1.705	2400/f (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any circumstances of modulation.

10.2 Radiated Emissions Measurement Test Procedure

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane. The spectrum was examined from 9 kHz to the 10th harmonic of the highest fundamental transmitter frequency (24.8 GHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations. For frequencies between 30 and 1000 MHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1000 MHz, emissions are measured using the average detector function with a minimum resolution bandwidth of 1 MHz. No video filter less than 10 times the resolution bandwidth was used. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Table 10-1: Radiated Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900151	Rohde and Schwarz	HFH2-Z2	Antenna (Loop, 9 kHz - 30 MHz)	827525/019	10/1/13
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1 - 26.5 GHz)	3008A00505	8/10/13
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz - 26.5 GHz)	MY51250846	4/16/14
900905	Rhein Tech Laboratories	PR-1040	OATS 1 Preamplifier 40 dB (30 MHz – 2 GHz)	1006	8/20/13
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	Not Required
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	NA	8/16/13
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/16/13
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	Not Required
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	4/19/14
900321	EMCO	3161-03	Horn Antennas (4 – 8.2 GHz)	9508-1020	4/19/14
900323	EMCO	3160-7	Horn Antennas (8.2 – 12.4 GHz)	9605-1054	4/19/14
900356	EMCO	3160-08	Horn Antenna (12.4 - 18 GHz)	9607-1044	4/19/14
900325	EMCO	3160-9	Horn Antennas (18 - 26.5 GHz)	9605-1051	4/19/14
900873	CMT	RA28-K-F-4B-C	26.5 - 40 GHz Waveguide WR-28	990706-001	1/23/14
901303	EMCO	3160-10	Horn Antenna 26.5 - 40.0 GHz WR-28	960452-007	1/23/14
900791	Chase	CBL6111B	Bilog Antenna (30 MHz – 2000 MHz)	N/A	2/2/14
900126	Hewlett Packard	11970A	Harmonic Mixer 26.5 - 40 GHz	2332A01199	1/23/14
900933	Hewlett Packard	11975A	Power Amplifier (2 - 8 GHz)	2304A00348	N/A
900930	Hewlett Packard	85662A	Spectrum Analyzer Display Section	3144A20839	2/6/14
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	2/6/14

10.3 Radiated Emissions Test Results

10.3.1 Radiated Emissions Digital Test Data

Table 10-2: Digital Radiated Emissions

Temperature: 78°F						Humidity: 37%				
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pass/Fail
156.000	Qp	H	0	1.0	31.0	-21.6	9.4	43.5	-34.1	Pass
215.995	Qp	V	40	1.0	40.2	-21.8	18.4	43.5	-25.1	Pass
228.000	Qp	V	0	1.0	37.6	-20.9	16.7	46.0	-29.3	Pass
240.000	Qp	V	30	1.0	37.1	-19.5	17.6	46.0	-28.4	Pass
264.000	Qp	H	0	1.0	36.2	-17.0	19.2	46.0	-26.8	Pass
276.000	Qp	H	0	1.2	36.8	-17.4	19.4	46.0	-26.6	Pass
288.000	Qp	H	0	1.0	38.8	-17.4	21.4	46.0	-24.6	Pass
400.000	Qp	V	180	1.2	34.4	-14.1	20.3	46.0	-25.7	Pass

Test Personnel:

Daniel W. Baltzell		August 1, 2013
Test Engineer	Signature	Date of Tests

10.3.2 Radiated Emissions Harmonics/Spurious Test Data

Table 10-3: Radiated Emissions Harmonics/Spurious Channel 36 (TX Frequency: 5180 MHz)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/ 10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
15540	15.7	15.1	14.7	29.8	54.0	-24.2
20720	19.5	19.5	20.8	40.3	54.0	-13.7

Table 10-4: Radiated Emissions Harmonics/Spurious Channel 40 (TX Frequency: 5200 MHz)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/ 10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
15600	15.8	15.3	14.8	30.1	54.0	-23.9
20800	21.1	20.2	20.9	41.1	54.0	-12.9

Table 10-5: Radiated Emissions Harmonics/Spurious Channel 48 (TX Frequency: 5240 MHz)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/ 10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
15720	15.9	14.9	14.8	29.7	54.0	-24.3
20960	19.3	18.3	21.2	39.5	54.0	-14.5

Table 10-6: Radiated Emissions Harmonics/Spurious Channel 52 (TX Frequency: 5260 MHz)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/ 10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
15780	17.3	17.1	14.9	32.0	54.0	-22.0
21040	19.1	19.1	21.3	40.4	54.0	-13.6
31560.0	20.1	7.9	8.7	16.6	54.0	-37.4

Table 10-7: Radiated Emissions Harmonics/Spurious Channel 60 (TX Frequency: 5300 MHz)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/ 10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
10600	27.7	27.4	9.1	36.5	54.0	-17.5
15900	16.4	15.5	14.9	30.4	54.0	-23.6
21200	18.9	18.2	21.5	39.7	54.0	-14.3

Table 10-8: Radiated Emissions Harmonics/Spurious Channel 64 (TX Frequency: 5320 MHz)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/ 10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
10640.0	28.6	28.3	9.1	37.4	54.0	-16.6
15960.0	17.5	16.9	15.0	31.9	54.0	-22.1
21280.0	21.6	20.7	21.5	42.2	54.0	-11.8

Table 10-9: Radiated Emissions Harmonics/Spurious Channel 100 (TX Frequency: 5500 MHz)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/ 10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
11000.0	25.0	24.5	9.1	33.6	54.0	-20.4

Table 10-10: Radiated Emissions Harmonics/Spurious Channel 116 (TX Frequency: 5580 MHz)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/ 10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
11160.0	26.6	26.5	12.8	39.3	54.0	-14.7
22320.0	17.4	14.1	25.5	39.6	54.0	-14.4

Table 10-11: Radiated Emissions Harmonics/Spurious Channel 140(TX Frequency: 5700 MHz)

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/VBW)	Average Analyzer Reading (dBuV) (1 MHz RBW/ 10 Hz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
11400.0	27.6	27.3	9.8	37.1	54.0	-16.9
22800.0	14.4	11.4	22.0	33.4	54.0	-20.6

Test Personnel:

Daniel W. Baltzell		July 31, 2013
Test Engineer	Signature	Date of Test

11 Conducted Emissions - FCC Rules and Regulations Part 15.207; RSS-Gen 7.2.2

11.1 Site and Test Description

The power line conducted emissions measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50-ohm/50 microhenry Line Impedance Stabilization Network (LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 100 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 100 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable).

The analyzer's 6 dB bandwidth was set to 9 kHz. Video filter less than 10 times the resolution bandwidth is not used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded.


11.2 Test Limits

Line-Conducted Emissions		
Limit (dBµV)		
Frequency (MHz)	Quasi-Peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.00	56	46
5.00 to 30.00	60	50


11.3 Conducted Emissions Test Data

11.3.1 Conducted Emissions Transmit Center Channel Simultaneous TX

Plot 11-1: Conducted Emissions Transmit (Channel 100) - Neutral Side

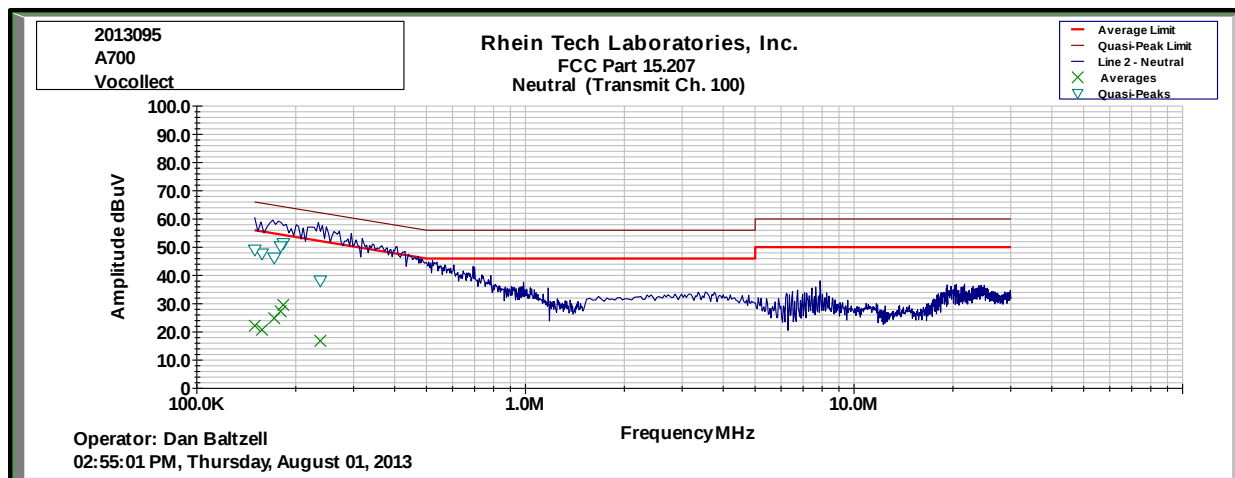


Plot 11-2: Conducted Emissions Transmit (Channel 100) - Hot Side

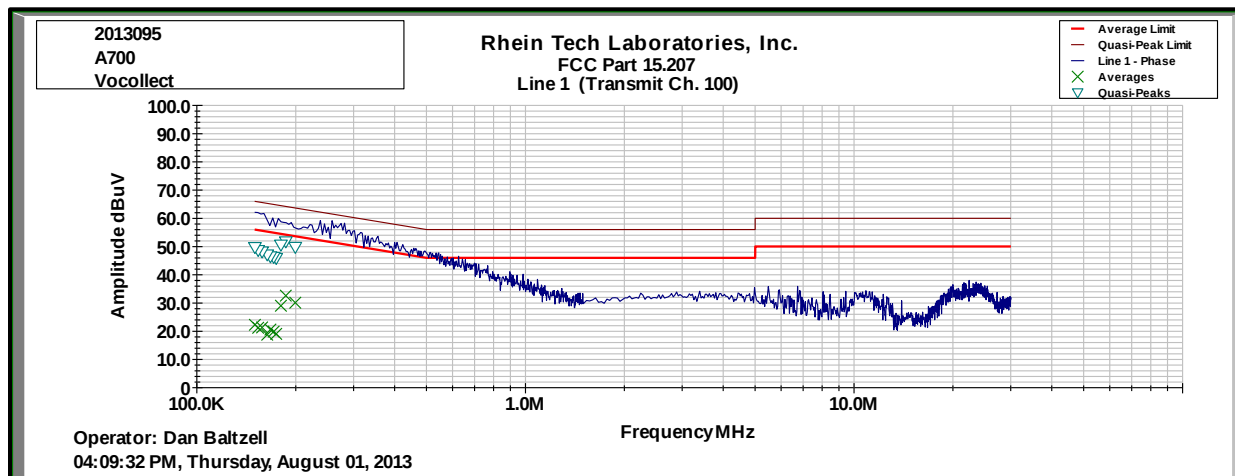


11.3.2 Conducted Emissions Receive Channel 6 DSSS

Plot 11-3: Conducted Emissions Receive (Channel 100) - Neutral Side

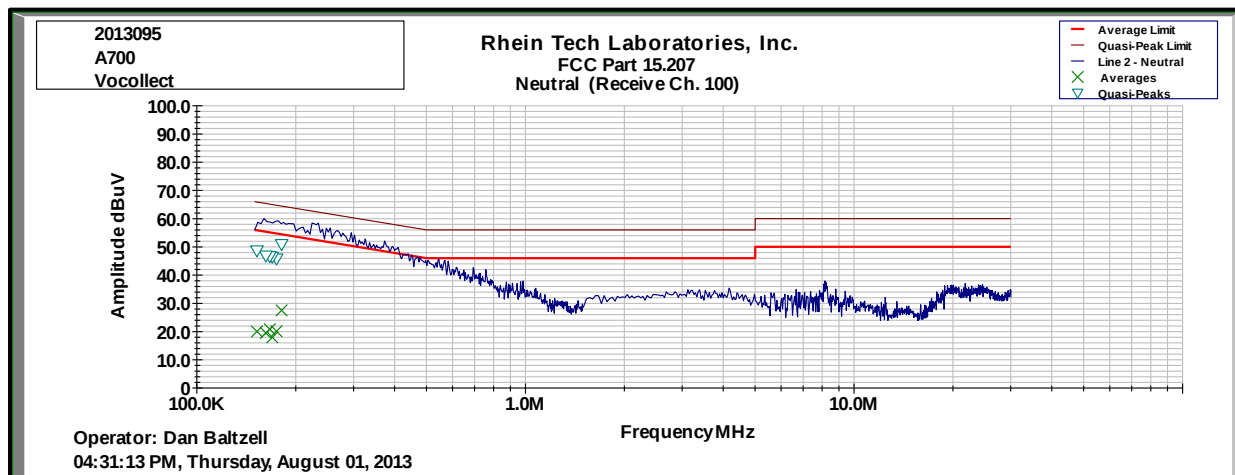

Plot 11-4: Conducted Emissions Receive (Channel 100) - Hot Side

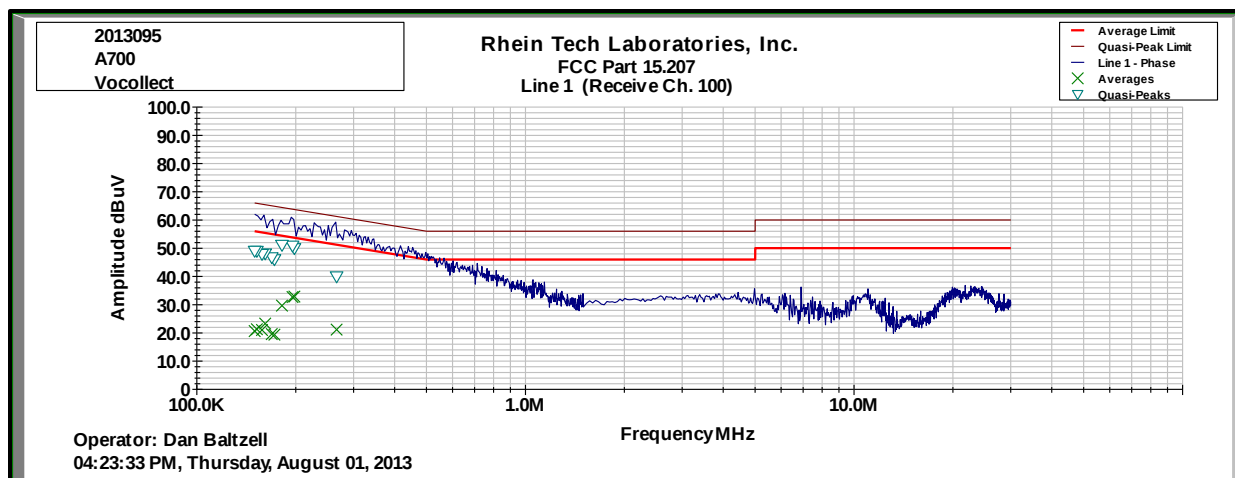


Results: Pass

Table 11-1: Conducted Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900339	Hewlett Packard	85650A	Quasi-Peak Adapter	2521A00743	2/7/14
900729	Solar	8130	Filter	947306	3/26/15
901082	AFJ International	LS16	16A LISN	16010020081	3/26/14
N/A	Quantum Change	Tile	Emissions Testing Software	4.0.A.8	N/A
900968	Hewlett Packard	8567A	Spectrum Analyzer (10 kHz - 1.5 GHz)	2602A00160	2/17/14
900970	Hewlett Packard	85662A	Spectrum Analyzer Display	2542A11239	2/17/14

Test Personnel:

Daniel W. Baltzell		August 1, 2013
Test Engineer	Signature	Date of Tests

12 Conclusion

The data in this measurement report shows that the EUT as tested, Vocollect, Inc. A700 Series Terminal, Model #'s TAP910-01, TAP920-01, and TAP930-01, FCC ID: MQO-TAP900-01, IC: 2570A-TAP90001, complies with all the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations and Industry Canada RSS-210.