





	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Certificate No. 2470.01




SAR TEST REPORT


RF EXPOSURE EVALUATION		SPECIFIC ABSORPTION RATE			
APPLICANT	VOCOLLECT INC.				
PRODUCT	PORTABLE WIRELESS DATA TERMINAL WITH 802.11B/G WLAN				
MODEL(S)	NAME	H1	NO.	AVA-100-01	
IDENTIFIER(S)	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
APPLICATION TYPE	New Certification				
STANDARD(S) APPLIED	FCC 47 CFR §2.1093		Health Canada Safety Code 6		
PROCEDURE(S) APPLIED	FCC OET Bulletin 65, Supplement C (01-01)				
	FCC OET SAR Measurement Procedures for 802.11a/b/g Transmitters				
	Industry Canada RSS-102 Issue 2				
FCC DEVICE CLASSIFICATION	Digital Transmission System (DTS) - §15C				
IC DEVICE CLASSIFICATION	Low Power License-Exempt Radiocommunication Device (RSS-210)				
RF EXPOSURE CATEGORY	General Population / Uncontrolled Exposure				
RF EXPOSURE EVALUATION	Body-Worn				
TEST REPORT SERIAL NO.	091807MQO-T853-S15W				
TEST REPORT REV. NO. & DATE	Revision 1.1	Change Model Listing		September 27, 2007	
	Revision 1.0	Initial Release		September 26, 2007	
TEST REPORT SIGNATORIES	Testing and Report By		Test Report Reviewed By		
	Cheri Frangiadakis Celltech Labs Inc.		Jonathan Hughes Celltech Labs Inc.		
TEST LAB AND LOCATION	Celltech Compliance Testing & Engineering Lab				
	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada				
TEST LAB CONTACT INFO.	Tel.: 250-765-7650		Fax: 250-765-7645		
	info@celltechlabs.com		www.celltechlabs.com		
TEST LAB ACCREDITATION(S)	<div> Certificate No. 2470.01</div>				

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 1 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

Test Lab Information:	Name	CELLTECH LABS INC.	Address	21-364 Lougheed Road, Kelowna B.C. V1X 7R8 Canada		
Applicant Information:	Name	VOCOLLECT INC.	Address	703 Rodi Road, Pittsburgh PA 15235 United States		
Standard(s) Applied:	FCC	47 CFR §2.1093	IC	Health Canada Safety Code 6		
Procedure(s) Applied:	FCC	OET Bulletin 65, Supplement C (Edition 01-01) SAR Measurement Procedures for 802.11a/b/g Transmitters				
	IC	RSS-102 Issue 2				
Device Classification(s):	FCC	Digital Transmission System	IC	Low Power License-Exempt Radiocommunication Device		
Device Identifier(s) :	FCC	MQOH1AVA-10001	IC	2570A-H1AVA101		
Device Description:	Portable Voice-Controlled Wireless Data Terminal with 802.11b/g WLAN					
Device Model(s):	Name	H1	No.	AVA-100-01	S/N:	207010101 (Pre-production) Radio S/N: 0017230151C9
Modulation Type(s):	802.11b mode	DBPSK (1 Mbps), DQPSK (2 Mbps), CCK (5.5, 11 Mbps)				
	802.11g mode	OFDM (6, 9, 12, 24, 36, 48, 54 Mbps)				
Transmit Frequency Range(s):	2412 - 2462 MHz			No. of Channels:	11	
Measured RF Output Power:	Transmit Mode	Frequency	Channel	Data Rate	Conducted Power	
		MHz		Mbps	Average Levels	
	802.11b	2412	1	1	14.0 dBm	25.1 mW
		2437	6	1	14.0 dBm	25.1 mW
		2462	11	1	14.1 dBm	25.7 mW
		2437	6	2	14.5 dBm	28.2 mW
		2462	11	5.5	13.7 dBm	23.4 mW
		2462	11	11	13.4 dBm	21.9 mW
	802.11g	2412	1	6	13.9 dBm	24.5 mW
		2437	6	6	14.0 dBm	25.1 mW
		2462	11	6	14.0 dBm	25.1 mW
	Note: The frequencies/channels and data rates reported for conducted output power levels are based on the guidance provided in FCC OET SAR Measurement Procedures for 802.11a/b/g Transmitters (see reference 7).					
Antenna Type(s) Tested:	Internal					
Battery Type(s) Tested:	Lithium-ion		3.7 V	2000 mAh	Model: 1000956 Rev. 02	
Body-worn Accessories Tested:	Belt-Holster		P/N: AC-110-01	1.5 cm thickness	Contains metal components	
Audio Accessories Tested:	Headset-Microphone		P/N: HE-100-01			
Max. SAR Level(s) Evaluated:	Body	802.11b	0.484 W/kg	1g average	ANSI/IEEE SAR Limit:	1.6 W/kg 1g average
<p>Celltech Labs Inc. declares under its sole responsibility that this wireless portable device was compliant with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6 for the General Population / Uncontrolled Exposure environment. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), FCC OET SAR Measurement Procedures for 802.11a/b/g Transmitters and Industry Canada RSS-102 Issue 2. All measurements were performed in accordance with the SAR system manufacturer recommendations.</p> <p>I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.</p> <p>This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.</p>						
Test Report Approved By:				 		
	Sean Johnston		Celltech Labs Inc.			

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 2 of 36






	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

TABLE OF CONTENTS	
1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 MEASUREMENT SUMMARY	5
4.0 DETAILS OF SAR EVALUATION	6
5.0 EVALUATION PROCEDURES	6
6.0 SYSTEM PERFORMANCE CHECK	7
7.0 SIMULATED EQUIVALENT TISSUES	8
8.0 SAR SAFETY LIMITS	8
9.0 ROBOT SYSTEM SPECIFICATIONS	9
10.0 PROBE SPECIFICATION (EX3DV4)	10
11.0 SAM PHANTOM V4.0C	10
12.0 DEVICE HOLDER	10
13.0 TEST EQUIPMENT LIST	11
14.0 MEASUREMENT UNCERTAINTIES	12
MEASUREMENT UNCERTAINTIES (Cont.)	13
15.0 REFERENCES	14
APPENDIX A - SAR MEASUREMENT DATA	15
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	22
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	25
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	27
APPENDIX E - SYSTEM VALIDATION	34
APPENDIX F - PROBE CALIBRATION	35
APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY	36

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					


	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

1.0 INTRODUCTION

This measurement report demonstrates that the VOCOLLECT INC. Model: H1 AVA-100-01 Portable Voice-Controlled Wireless Data Terminal with 802.11b/g WLAN complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]), FCC OET SAR Measurement Procedures for 802.11a/b/g Transmitters (see reference [7]) and IC RSS-102 Issue 2 (see reference [4]) were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM


Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

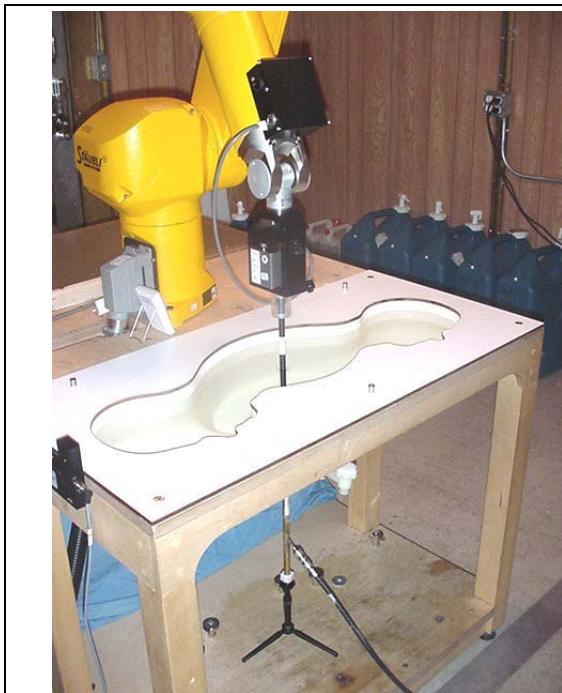



DASY4 System with SAM Phantom and validation dipole



DASY4 System with SAM Phantom and device holder

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

4.0 DETAILS OF SAR EVALUATION

The VOCOLLECT INC. Model: H1 AVA-100-01 Portable Voice-Controlled Wireless Data Terminal with 802.11b/g WLAN was compliant for localized Specific Absorption Rate (Uncontrolled Exposure) based on the test provisions and conditions described below. The SAR test setup photographs are shown in Appendix D.

Test Configuration(s)


1. The DUT was tested for body-worn SAR with the LED side placed parallel to, and touching, the outer surface of the SAM phantom (planar section). The headset-microphone audio accessory was connected to the DUT for the duration of the tests.
2. The DUT was tested for body-worn SAR with the battery side placed parallel to, and touching, the outer surface of the SAM phantom (planar section). The headset-microphone audio accessory was connected to the DUT for the duration of the test.
3. The DUT was evaluated for body-worn SAR with the belt-holster accessory. The back side of the DUT (LCD side) was placed parallel to the outer surface of the SAM phantom (planar section). The belt-holster accessory provided a 1.5 cm spacing from the back of the DUT to the outer surface of the SAM phantom (planar section). The headset-microphone audio accessory was connected to the DUT for the duration of the test.



Test Mode(s) & Power Setting(s)

4. The DUT was placed into test mode using an executable program provided by the customer and controlled via PC with serial cable connected to the DUT. Once the DUT was placed in test mode at maximum RF output power and channel setting the serial cable was then removed from the DUT prior to the SAR evaluation.
5. The DUT was tested in continuous transmit operation at 100% duty cycle with a modulated DSSS signal in 802.11b mode and a modulated OFDM signal in 802.11g mode..
6. The average conducted output power levels of the DUT were measured prior to the SAR evaluations by Rhein Tech Labs.
7. The DUT battery was fully charged prior to the SAR evaluations.

5.0 EVALUATION PROCEDURES

- (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
- (ii) For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
 - Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
 - A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:
 - Extrapolation is used to determine the values between the dipole center of the probe and the surface of the phantom. This data cannot be measured because the center of the dipole sensors is 1.0 mm away from the probe tip and the distance between the probe and the boundary must be larger than 25% of the probe diameter. The probe diameter is 2.4 mm. In the DASY4 software, the distance between the sensor center and phantom surface is set to 2.0 mm. This provides a distance of 1.0 mm between the probe tip and the surface. The extrapolation of the values between the dipole center and the surface of the phantom was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
 - Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1 mm grid (42875 interpolated points).
 - A zoom scan volume of 24 mm x 24 mm x 20 mm (7x7x9 points) centered at the peak SAR location determined from the area scan was used and a zoom scan resolution of 4 mm x 4 mm x 2.5 mm was used.

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 6 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

6.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations a system check was performed at the planar section of the SAM phantom with a 2450 MHz validation dipole (see Appendix E for system validation procedures). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the system validation target SAR value (see Appendix B for system performance check test plot).

SYSTEM PERFORMANCE CHECK EVALUATION

Test Date	Equiv. Tissue Mixture	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		2450 MHz	Sys. Val. Target	Meas.	Dev.	Sys. Val. Target	Meas.	Dev.	Sys. Val. Target	Meas.						
Sep 19	Body	13.4±10%	14.0	+4.5%	50.1 ±5%	52.4	+4.6%	1.99 ±5%	2.00	+0.6%	1000	23.7	23.8	≥ 15	32	101.1
Note(s)		1. The target SAR values are referenced from the System Validation procedures performed by Celltech Labs Inc. (see Appendix E).														
		2. The target dielectric parameters are referenced from the System Validation procedures performed by Celltech Labs Inc. (see Appendix E).														
		3. The fluid temperature was measured prior to and after the system performance check. The fluid temperature remained within +/-2°C of the fluid temperature from the dielectric parameter measurements.														
		4. The SAR evaluations were performed within 24 hours of the system performance check.														

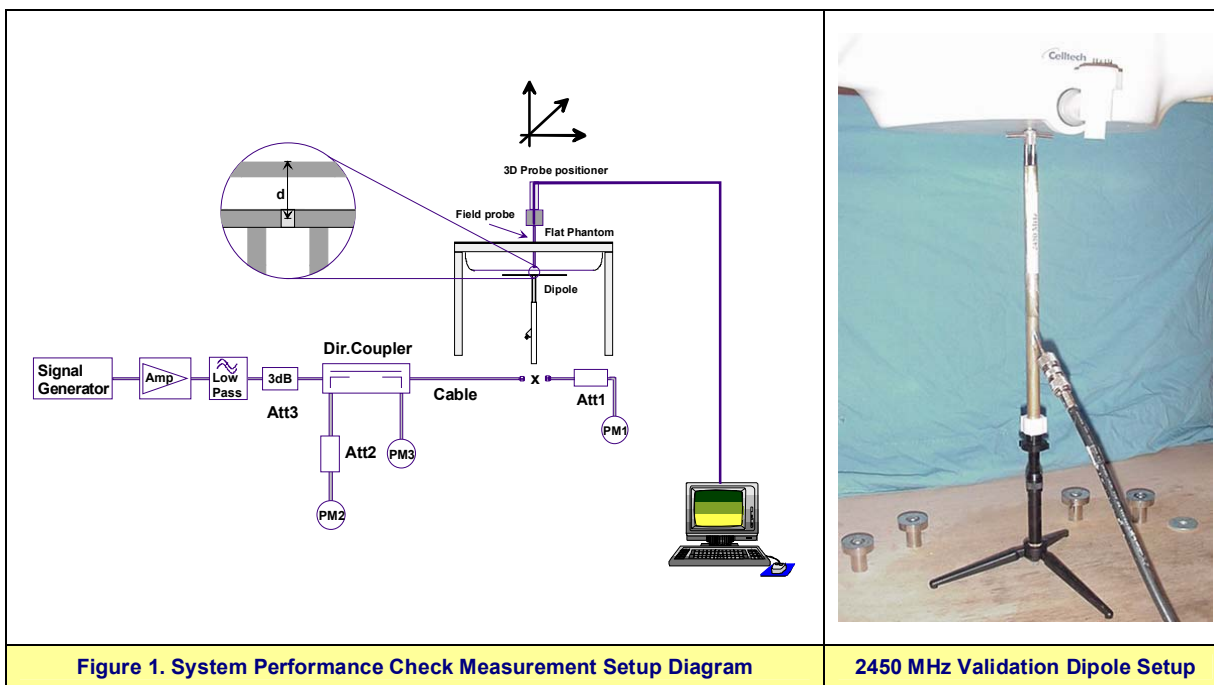





Figure 1. System Performance Check Measurement Setup Diagram

2450 MHz Validation Dipole Setup

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 7 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	


7.0 SIMULATED EQUIVALENT TISSUES



The simulated tissue mixture consisted of Glycol-monobutyl, water and salt. The tissue mixtures were prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURE		
INGREDIENT	2450 MHz Body	2450 MHz Body
	System Performance Check	DUT Evaluation
Water	69.98 %	69.98 %
Glycol Monobutyl	30.00 %	30.00 %
Salt	0.02 %	0.02 %

8.0 SAR SAFETY LIMITS


EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0
The Spatial Average value of the SAR averaged over the whole body.		
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.		
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.		



Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 8 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	


9.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info.; Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	EX3DV4
Serial No.	3600
Construction	Symmetrical design with triangular core
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<u>Phantom(s)</u>	
Type	SAM V4.0C
Shell Material	Fiberglass
Thickness	2.0 ±0.1 mm
Volume	Approx. 25 liters


Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 9 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	


10.0 PROBE SPECIFICATION (EX3DV4)


<p>Construction: Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. DGBE)</p> <p>Calibration: Basic Broadband Calibration in air: 10-3000 MHz Conversion Factors (CF) for HSL 900 and HSL 1750</p> <p>Frequency: 10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)</p> <p>Directivity: ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)</p> <p>Dynamic Range: 10 μW/g to >100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μW/g)</p> <p>Dimensions: Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1.0 mm</p> <p>Application: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better than 30%.</p>	 <p>EX3DV4 E-Field Probe</p>
--	--



11.0 SAM PHANTOM V4.0C

<p>The SAM phantom V4.0C is a fiberglass shell phantom with a 2.0 mm (+/-0.2 mm) shell thickness for left and right head and flat planar area integrated in a wooden table. The shape of the fiberglass shell corresponds to the phantom defined by SCC34-SC2. The device holder positions are adjusted to the standard measurement positions in the three sections (see Appendix G for specifications of the SAM phantom V4.0C).</p>	 <p>SAM Phantom V4.0C</p>
---	--

12.0 DEVICE HOLDER

<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>	 <p>Device Holder</p>
--	---


Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 10 of 36



	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Certificate No. 2470.01

13.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED		CALIBRATION DUE DATE
USED	DESCRIPTION					
x	Schmid & Partner DASY4 System	-	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	N/A	N/A	N/A
x	-Robot	00046	599396-01	N/A	N/A	N/A
x	-DAE4	00019	353	10Jul07		10Jul08
	-DAE3	00018	370	13Mar07		13Mar08
	-ET3DV6 E-Field Probe	00016	1387	16Mar07		16Mar08
x	-EX3DV4 E-Field Probe	00213	3600	24Jan07		24Jan08
	-300 MHz Validation Dipole	00023	135	08Jun07		08Jun08
	-450 MHz Validation Dipole	00024	136	30Jul07		30Jul08
	-835 MHz Validation Dipole	00022	411	Brain	07Jun07	07Jun08
				Body	07Jun07	07Jun08
	-900 MHz Validation Dipole	00020	054	Brain	07Jun07	07Jun08
				Body	07Jun07	07Jun08
	-1800 MHz Validation Dipole	00021	247	Brain	06Jun07	06Jun08
				Body	06Jun07	06Jun08
	-1900 MHz Validation Dipole	00032	151	Brain	06Jun07	06Jun08
				Body	06Jun07	06Jun08
	-2450 MHz Validation Dipole	00025	150	Brain	16Jul07	16Jul08
x				Body	08Jun07	08Jun08
	5GHz Validation Dipole	00126	1031	Body	18May07	18May08
				Body	22May07	22May08
				Brain	09May07	09May08
				Body	10May07	10May08
x	-SAM Phantom V4.0C	00154	1033	N/A		N/A
	-Barski Planar Phantom	00155	03-01	N/A		N/A
	-Plexiglas Side Planar Phantom	00156	161	N/A		N/A
	-Plexiglas Validation Planar Phantom	00157	137	N/A		N/A
	ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	N/A		N/A
x	HP 85070C Dielectric Probe Kit	00033	US39240170	N/A		N/A
x	Gigatronics 8652A Power Meter	00007	1835272	26Mar07		26Mar08
	Gigatronics 8652A Power Meter	00008	1835267	22Jan07		22Jan08
x	Gigatronics 80701A Power Sensor	00012	1834350	22Jan07		22Jan08
x	Gigatronics 80701A Power Sensor	00014	1833699	22Jan07		22Jan08
	Gigatronics 80701A Power Sensor	00109	1834366	26Mar07		26Mar08
x	HP 8753ET Network Analyzer	00134	US39170292	20Apr07		20Apr08
	HP 8648D Signal Generator	00005	3847A00611	NCR		NCR
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	NCR		NCR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	NCR		NCR
	Amplifier Research 10W1000C Power Amplifier	00041	27887	NCR		NCR
	Nextec NB00383 Microwave Amplifier	00151	0535	NCR		NCR
	HP E4408B Spectrum Analyzer	00015	US39240170	05Feb07		05Feb08


Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 11 of 36



	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Certificate No. 2470.01

14.0 MEASUREMENT UNCERTAINTIES


UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration (2450 MHz)	5.9	Normal	1	1	5.9	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	0.7	1.9	∞
Spherical isotropy of the probe	9.6	Rectangular	1.732050808	0.7	3.9	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0.8	Rectangular	1.732050808	1	0.5	∞
Integration time	2.6	Rectangular	1.732050808	1	1.5	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Test Sample Related						
Device positioning	2.9	Normal	1	1	2.9	12
Device holder uncertainty	3.6	Normal	1	1	3.6	8
Power drift	5	Rectangular	1.732050808	1	2.9	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	5	Normal	1	0.64	3.2	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	5	Normal	1	0.6	3.0	∞
Combined Standard Uncertainty					11.44	
Expanded Uncertainty (k=2)					22.89	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])						



Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 12 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

MEASUREMENT UNCERTAINTIES (Cont.)


UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{off}
Measurement System						
Probe calibration (2450 MHz)	5.9	Normal	1	1	5.9	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Dipole						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	5	Normal	1	0.64	3.2	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	5	Normal	1	0.6	3.0	∞
Combined Standard Uncertainty					9.81	
Expanded Uncertainty (k=2)					19.61	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])						



Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 13 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	


15.0 REFERENCES



- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] ANSI/IEEE C95.1-2005 - "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3 kHz to 300 GHz", New York: IEEE, April 2006.
- [7] Federal Communication Commission - "SAR Measurement Procedures for 802.11a/b/g Transmitters": May 2007 (Rev 1.2).

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 14 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

APPENDIX A - SAR MEASUREMENT DATA

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 15 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 09/19/2007

Body-Worn SAR - 802.11b - 1 Mbps - 2462 MHz - Channel 11 - LED Side of DUT (Touch)

DUT: Vocollect H1 AVA-100-01; **Type:** Wireless Data Terminal with 802.11b/g WLAN; **Serial:** 207010101

Body-Worn Accessory: None; **Audio Accessory:** Headset-Microphone (P/N: HE-100-01)

Ambient Temp: 23.7°C; Fluid Temp: 23.8°C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication System: DSSS WLAN

RF Output Power: 14.1 dBm (Conducted)

3.7V, 2000mAh Li-ion Battery Pack

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 2 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.31, 6.31, 6.31); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 10/07/2007
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - LED Side of DUT Touching Planar Phantom - Channel 11 - 2462 MHz - 802.11b - 1 Mbps

Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.619 mW/g

Body-Worn SAR - LED Side of DUT Touching Planar Phantom - Channel 11 - 2462 MHz - 802.11b - 1 Mbps



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 8.51 V/m; Power Drift = 0.130 dB



Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.484 mW/g; SAR(10 g) = 0.221 mW/g

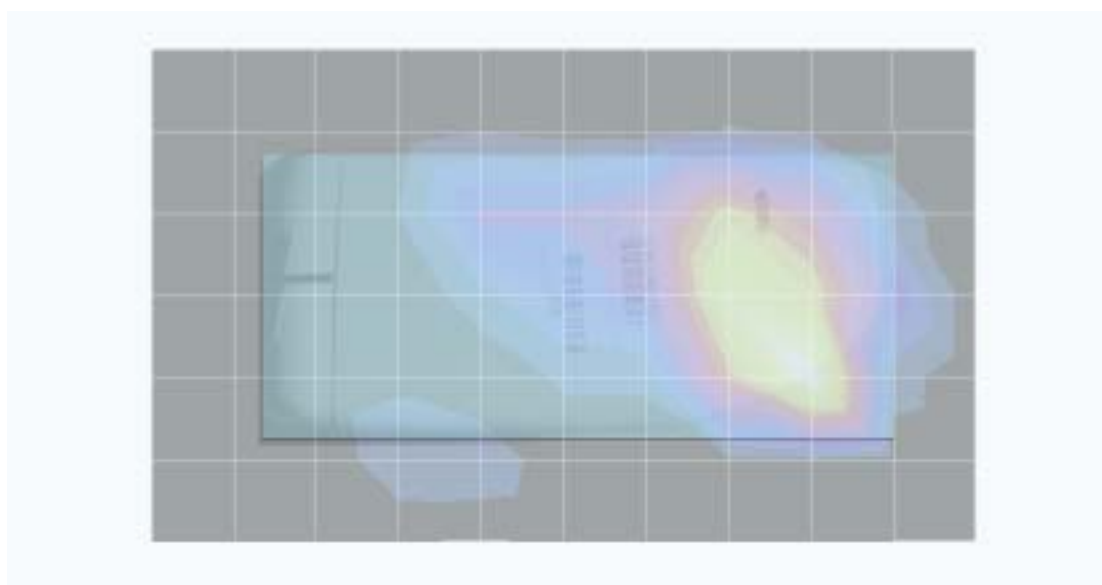
Maximum value of SAR (measured) = 0.758 mW/g






Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

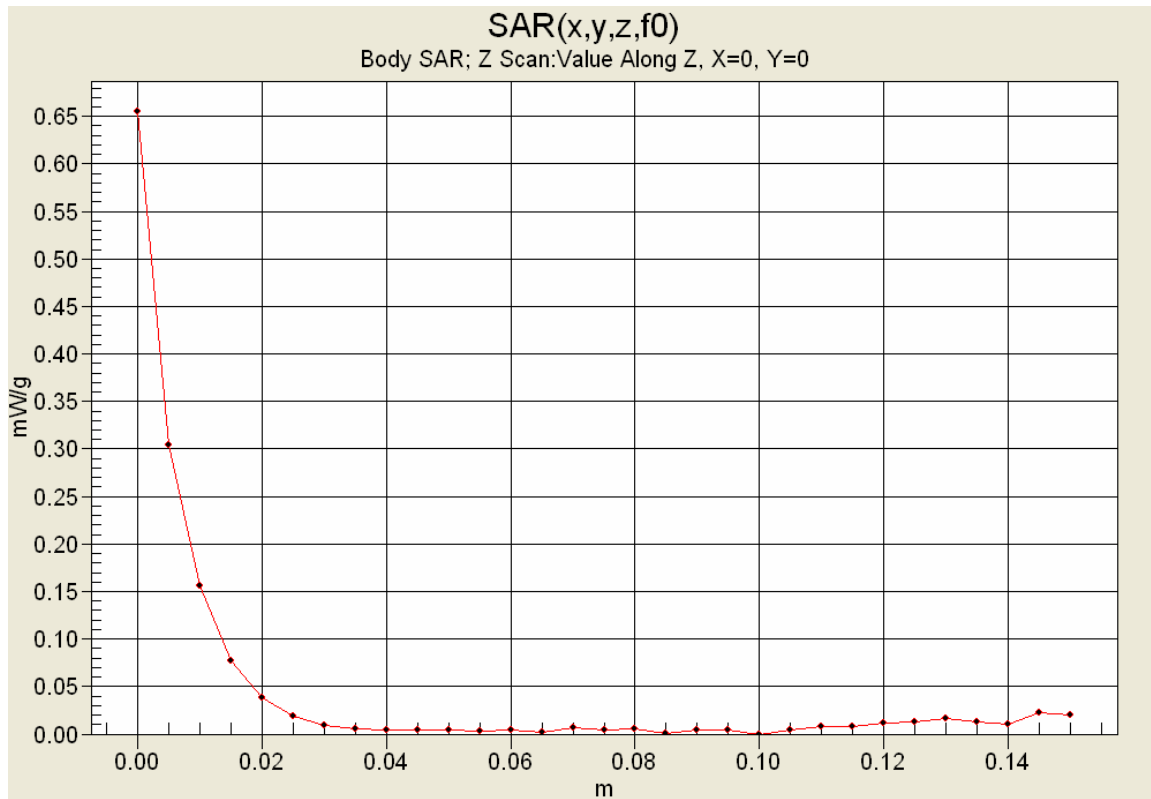Z-Axis Scan



Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 09/19/2007

Body-Worn SAR - 802.11b - 1 Mbps - 2462 MHz - Channel 11 - Battery Side of DUT (Touch)

DUT: Vocollect H1 AVA-100-01; **Type:** Wireless Data Terminal with 802.11b/g WLAN; **Serial:** 207010101

Body-Worn Accessory: None; **Audio Accessory:** Headset-Microphone (P/N: HE-100-01)

Ambient Temp: 23.7°C; Fluid Temp: 23.8°C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication System: DSSS WLAN

RF Output Power: 14.1 dBm (Conducted)

3.7V, 2000mAh Li-ion Battery Pack

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 2 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.31, 6.31, 6.31); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 10/07/2007
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - Battery Side of DUT Touching Planar Phantom - Channel 11 - 2462 MHz - 802.11b - 1 Mbps

Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.495 mW/g

Body-Worn SAR - Battery Side of DUT Touching Planar Phantom - Channel 11 - 2462 MHz - 802.11b - 1 Mbps



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 7.84 V/m; Power Drift = 0.126 dB



Peak SAR (extrapolated) = 0.895 W/kg

SAR(1 g) = 0.411 mW/g; SAR(10 g) = 0.193 mW/g

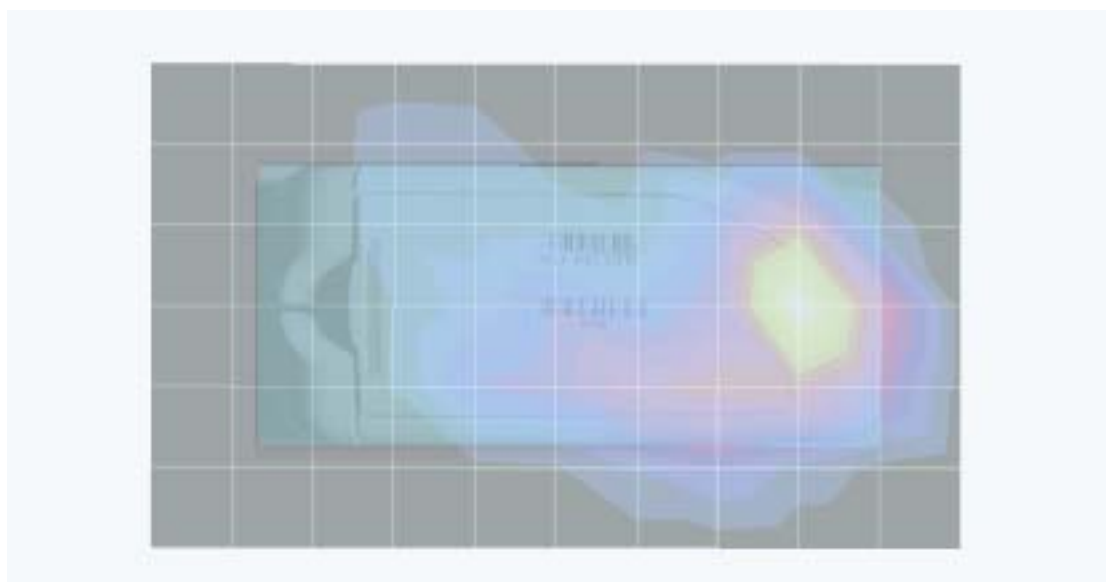Maximum value of SAR (measured) = 0.630 mW/g



Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 09/19/2007

Body-Worn SAR - 802.11b - 1 Mbps - 2462 MHz - Channel 11 - LED Side of DUT (Belt-Holster)

DUT: Vocollect H1 AVA-100-01; **Type:** Wireless Data Terminal with 802.11b/g WLAN; **Serial:** 207010101

Body-Worn Accessory: Belt-Holster (P/N: AC-110-01); **Audio Accessory:** Headset-Microphone (P/N: HE-100-01)

Ambient Temp: 23.7°C; Fluid Temp: 23.8°C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication System: DSSS WLAN

RF Output Power: 14.1 dBm (Conducted)

3.7V, 2000mAh Li-ion Battery Pack

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 2 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.31, 6.31, 6.31); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 10/07/2007
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 1.5 cm Belt-Holster Spacing from LED Side of DUT to Planar Phantom - Ch. 11 - 2462 MHz - 802.11b - 1 Mbps Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.185 mW/g


Body-Worn SAR - 1.5 cm Belt-Holster Spacing from LED Side of DUT to Planar Phantom - Ch. 11 - 2462 MHz - 802.11b - 1 Mbps Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 6.20 V/m; Power Drift = -0.038 dB



Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.076 mW/g

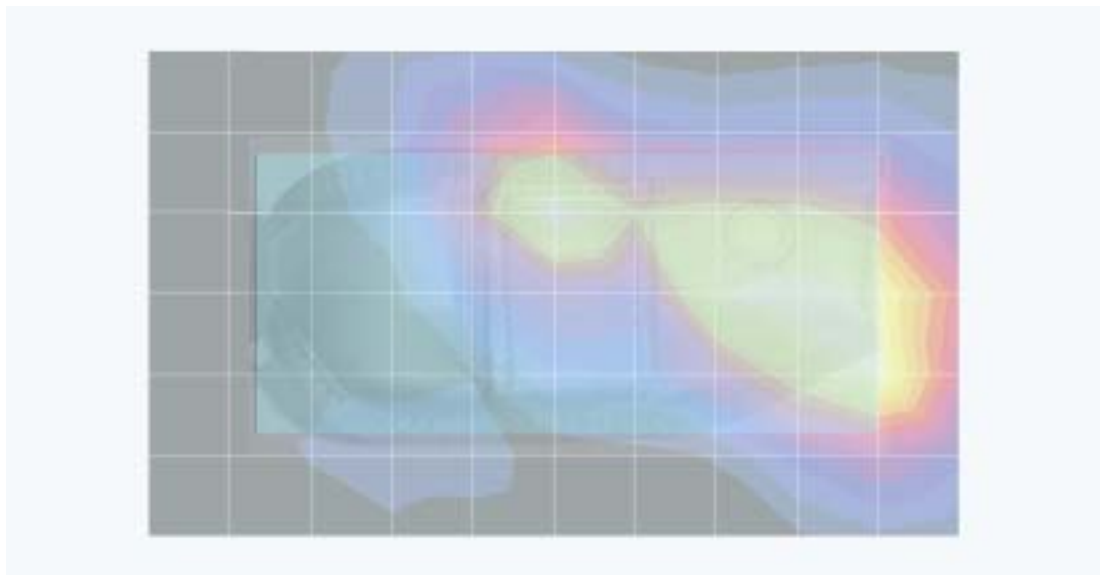Maximum value of SAR (measured) = 0.191 mW/g



Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 19 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 09/19/2007

Body-Worn SAR - 802.11b - 2 Mbps - 2437 MHz - Channel 6 - LED Side of DUT (Touch)

DUT: Vocollect H1 AVA-100-01; **Type:** Wireless Data Terminal with 802.11b/g WLAN; **Serial:** 207010101

Body-Worn Accessory: None; **Audio Accessory:** Headset-Microphone (P/N: HE-100-01)

Ambient Temp: 23.7°C; Fluid Temp: 23.8°C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication System: DSSS WLAN

RF Output Power: 14.5 dBm (Conducted)

3.7V, 2000mAh Li-ion Battery Pack

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 2 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.31, 6.31, 6.31); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 10/07/2007
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - LED Side of DUT Touching Planar Phantom - Channel 6 - 2437 MHz - 802.11b - 2 Mbps

Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.504 mW/g

Body-Worn SAR - LED Side of DUT Touching Planar Phantom - Channel 6 - 2437 MHz - 802.11b - 2 Mbps


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 8.03 V/m; Power Drift = 0.073 dB



Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.451 mW/g; SAR(10 g) = 0.210 mW/g

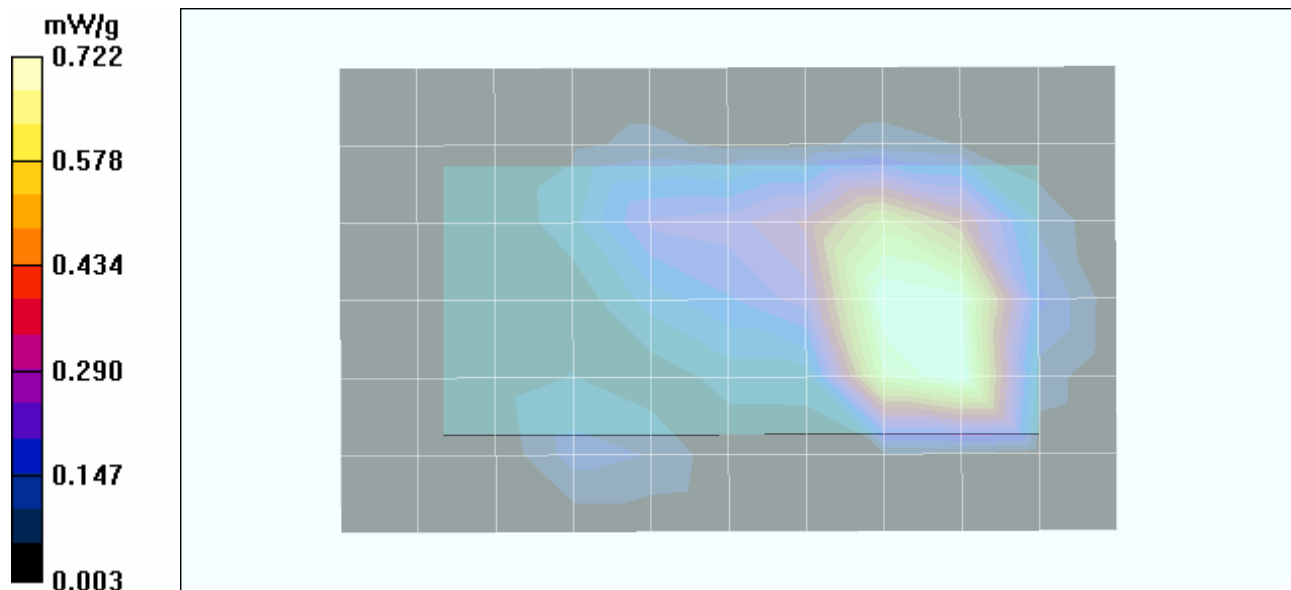Maximum value of SAR (measured) = 0.722 mW/g



Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 20 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 09/19/2007

Body-Worn SAR - 802.11g - 6 Mbps - 2462 MHz - Channel 11 - LED Side of DUT (Touch)

DUT: Vocollect H1 AVA-100-01; **Type:** Wireless Data Terminal with 802.11b/g WLAN; **Serial:** 207010101

Body-Worn Accessory: None; **Audio Accessory:** Headset-Microphone (P/N: HE-100-01)

Ambient Temp: 23.7°C; Fluid Temp: 23.8°C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication System: OFDM 802.11g

RF Output Power: 14.0 dBm (Conducted)

3.7V, 2000mAh Li-ion Battery Pack

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 2 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.31, 6.31, 6.31); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 10/07/2007
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - LED Side of DUT Touching Planar Phantom - Channel 11 - 2462 MHz - 802.11g - 6 Mbps

Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.567 mW/g

Body-Worn SAR - LED Side of DUT Touching Planar Phantom - Channel 11 - 2462 MHz - 802.11g - 6 Mbps


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 7.75 V/m; Power Drift = 0.240 dB



Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.200 mW/g

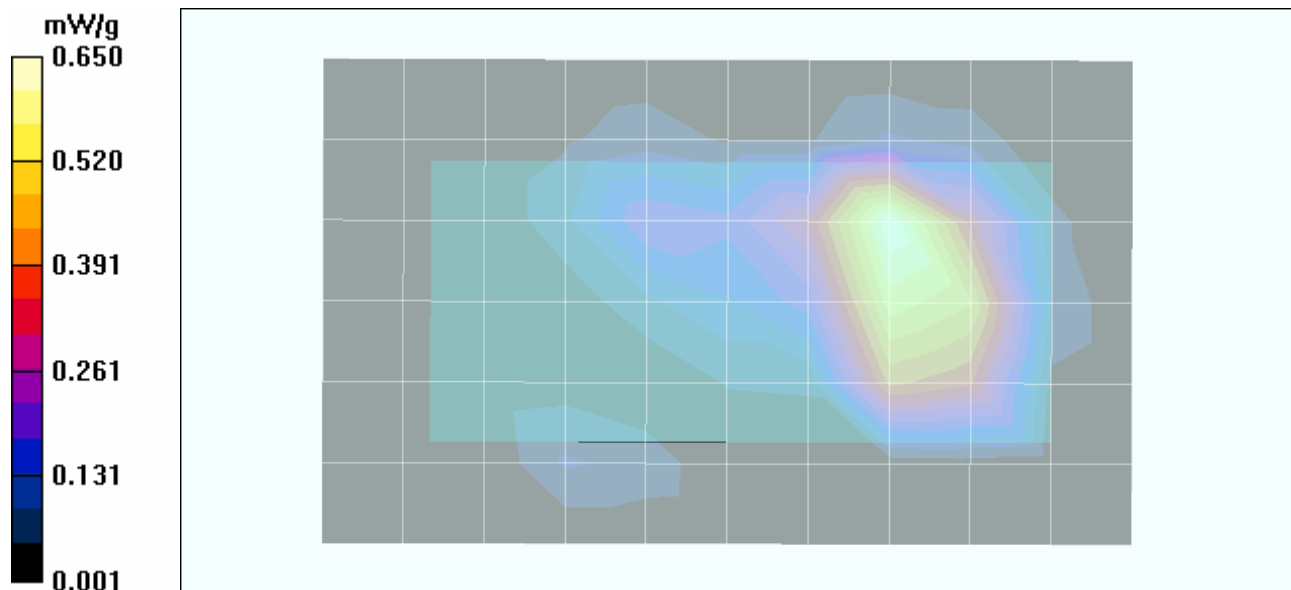
Maximum value of SAR (measured) = 0.650 mW/g





Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 21 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 09/19/2007

System Performance Check - 2450 MHz Dipole - MSL

DUT: Dipole 2450 MHz; Asset: 00025; Serial: 150; Calibrated: 06/08/2007

Ambient Temp: 23.7°C; Fluid Temp: 23.8°C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2.00 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.31, 6.31, 6.31); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 10/07/2007
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

2450 MHz Dipole - System Performance Check/Area Scan (6x10x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 18.0 mW/g

2450 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 104.8 V/m; Power Drift = 0.069 dB



Peak SAR (extrapolated) = 28.3 W/kg

SAR(1 g) = 14 mW/g; SAR(10 g) = 6.41 mW/g

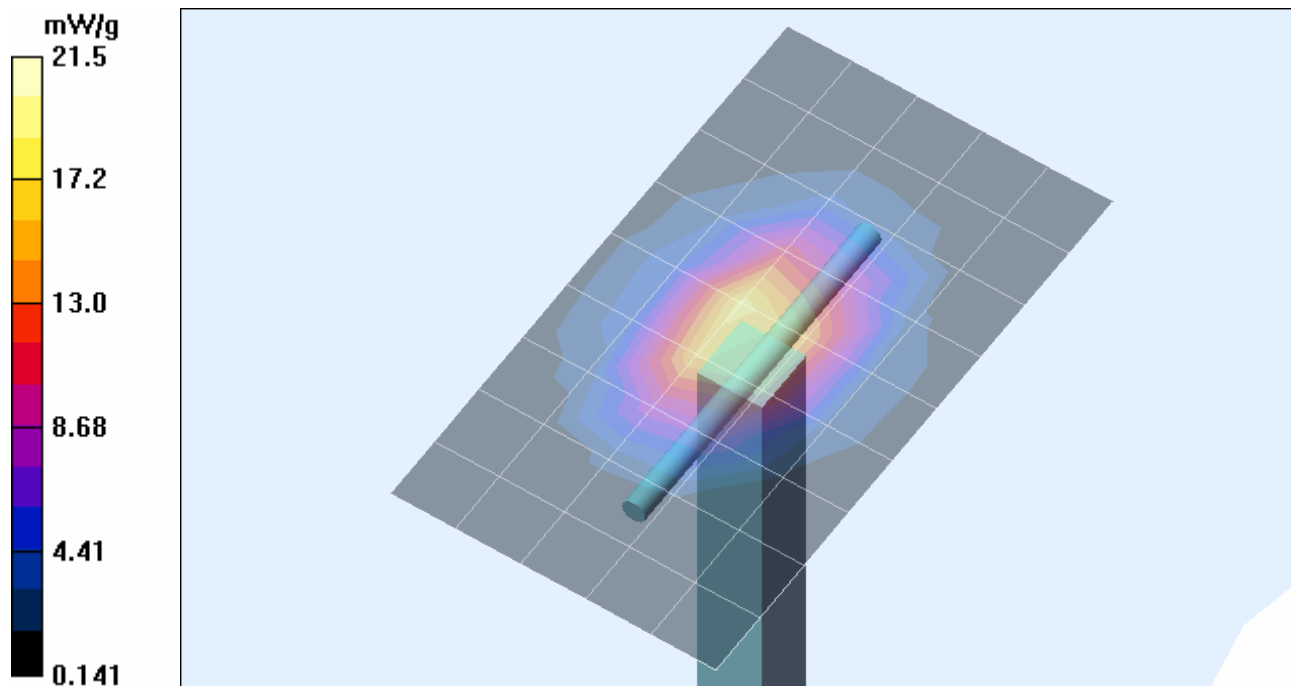
Maximum value of SAR (measured) = 21.5 mW/g






Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 23 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

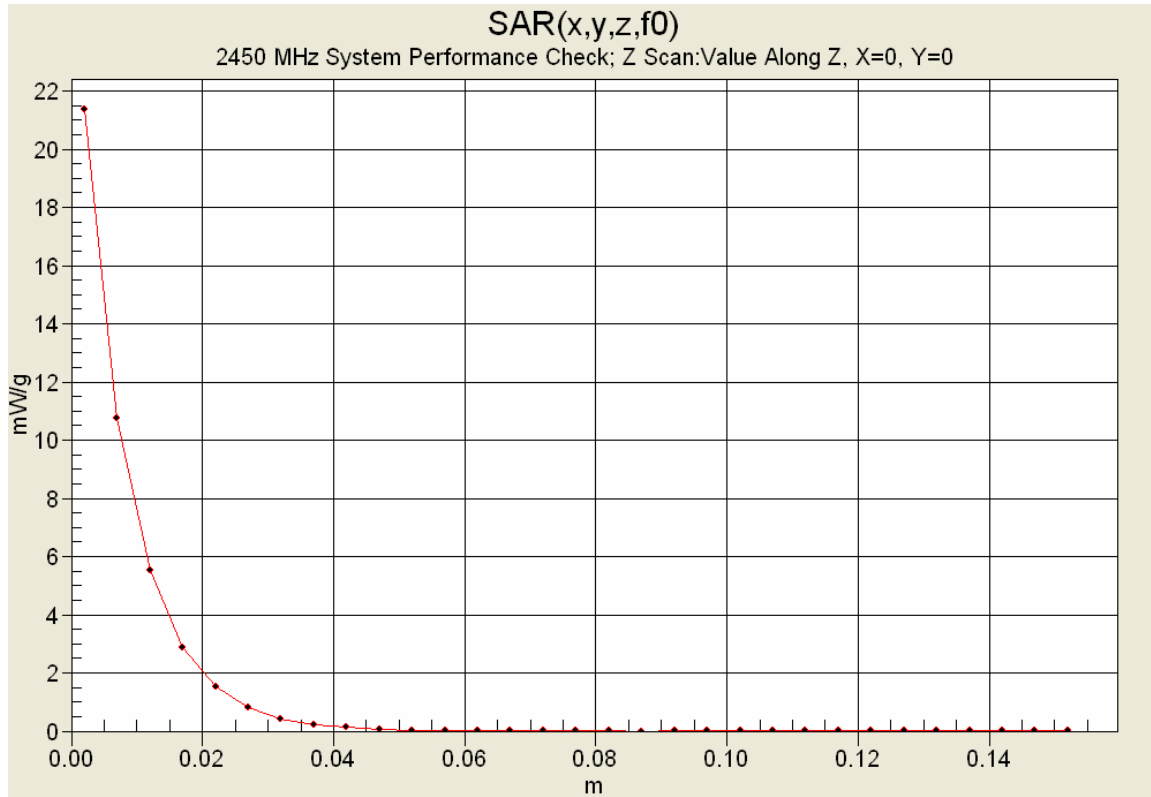
Z-Axis Scan





Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS


Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					



	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

2450 MHz System Performance Check & DUT Evaluation (Body)


Celltech Labs Inc.
Test Result for UIM Dielectric Parameter
Wed 19/Sep/2007
Frequency (GHz)
FCC_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB FCC Limits for Body Epsilon
FCC_sB FCC Limits for Body Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM



Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.3500	52.83	1.85	52.71	1.88
2.3600	52.82	1.86	52.58	1.89
2.3700	52.81	1.87	52.62	1.90
2.3800	52.79	1.88	52.57	1.91
2.3900	52.78	1.89	52.53	1.92
2.4000	52.77	1.90	52.57	1.93
2.4100	52.75	1.91	52.46	1.95
2.4200	52.74	1.92	52.50	1.96
2.4300	52.73	1.93	52.42	1.98
2.4400	52.71	1.94	52.43	1.99
2.4500	52.70	1.95	52.41	2.00
2.4600	52.69	1.96	52.32	2.01
2.4700	52.67	1.98	52.39	2.02
2.4800	52.66	1.99	52.34	2.04
2.4900	52.65	2.01	52.29	2.05
2.5000	52.64	2.02	52.29	2.07
2.5100	52.62	2.04	52.25	2.08
2.5200	52.61	2.05	52.25	2.10
2.5300	52.60	2.06	52.28	2.11
2.5400	52.59	2.08	52.24	2.12
2.5500	52.57	2.09	52.16	2.14

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	


APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS



Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 27 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

BODY SAR TEST SETUP PHOTOGRAPHS
LED Side of DUT Touching Planar Phantom
with Headset-Microphone Audio Accessory






Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 28 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	



BODY SAR TEST SETUP PHOTOGRAPHS
Battery Side of DUT Touching Planar Phantom
with Headset-Microphone Audio Accessory






Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 29 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

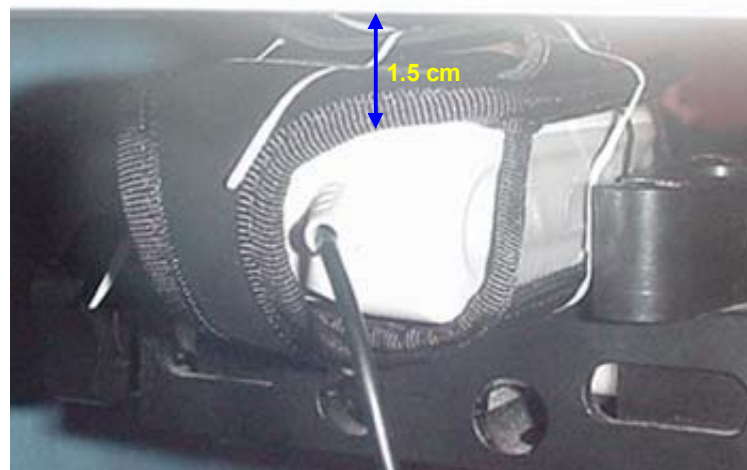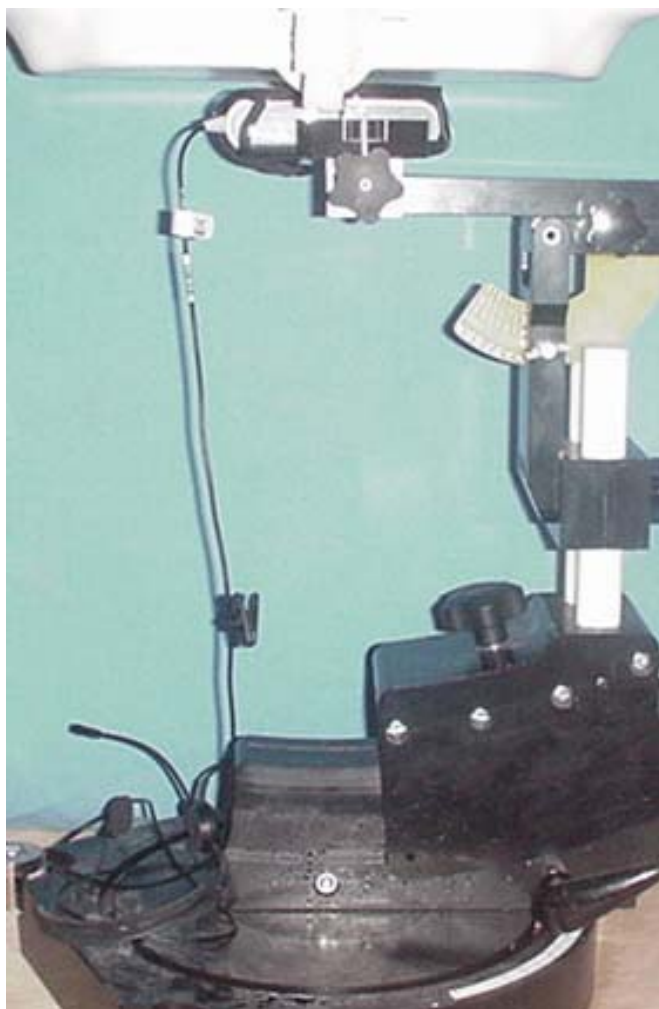BODY SAR TEST SETUP PHOTOGRAPHS
1.5 cm Belt-Holster Spacing from LED Side of DUT to Planar Phantom
with Headset-Microphone Audio Accessory










Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					



	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Certificate No. 2470.01

DUT PHOTOGRAPHS

	
LED Side of DUT	Battery Side of DUT
	
Button Side of DUT	Opposite Side of DUT
	
Audio Connector end of DUT	Opposite end of DUT

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

DUT PHOTOGRAPHS



DUT audio connector



Headset-Microphone and connector (P/N: HE-100-01)



DUT with Headset-Microphone audio accessory (P/N: HE-100-01)




DUT with Headset-Microphone & Belt-Holster (P/N: AC-110-01)





DUT Battery Compartment




DUT Battery (Lithium-ion Model: 1000956 Rev. 02)



Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 32 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	


DUT PHOTOGRAPHS


	
Back Side of Belt-Holster accessory (P/N: AC-110-01)	Front Side of Belt-Holster accessory (P/N: AC-110-01)
	
	
Top end of Belt-Holster accessory (P/N: AC-110-01)	Bottom end of Belt-Holster accessory (P/N: AC-110-01)

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 33 of 36

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

APPENDIX E - SYSTEM VALIDATION

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	Date of Evaluation:	June 08, 2007	Document Serial No.:	SV2450M-060807-R1.3
	Evaluation Type:	System Validation	Validation Dipole:	2450 MHz
			Fluid Type:	Body

2450 MHz SYSTEM VALIDATION

Type:

2450 MHz Validation Dipole

Asset Number:

00025

Serial Number:

150

Place of Validation:

Celltech Labs Inc.

Date of Validation:

June 08, 2007


Celltech Labs Inc. certifies that the 2450 MHz System Validation was performed on the date indicated above.

Performed by:

Cheri Frangiadakis

Approved by:

Jon Hughes

	Date of Evaluation:	June 08, 2007	Document Serial No.:	SV2450M-060807-R1.3
	Evaluation Type:	System Validation	Validation Dipole:	2450 MHz
			Fluid Type:	Body

1. Dipole Construction & Electrical Characteristics

The validation dipole was constructed in accordance with the requirements specified in IEEE Standard 1528-2003 and International Standard IEC 62209-1:2005. The electrical properties were measured using an HP 8753ET Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 10.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:


Feed point impedance at 2450 MHz

$$\text{Re}\{Z\} = 45.100\Omega$$



$$\text{Im}\{Z\} = 3.5605\Omega$$

Return Loss at 2450 MHz

$$-23.411\text{dB}$$

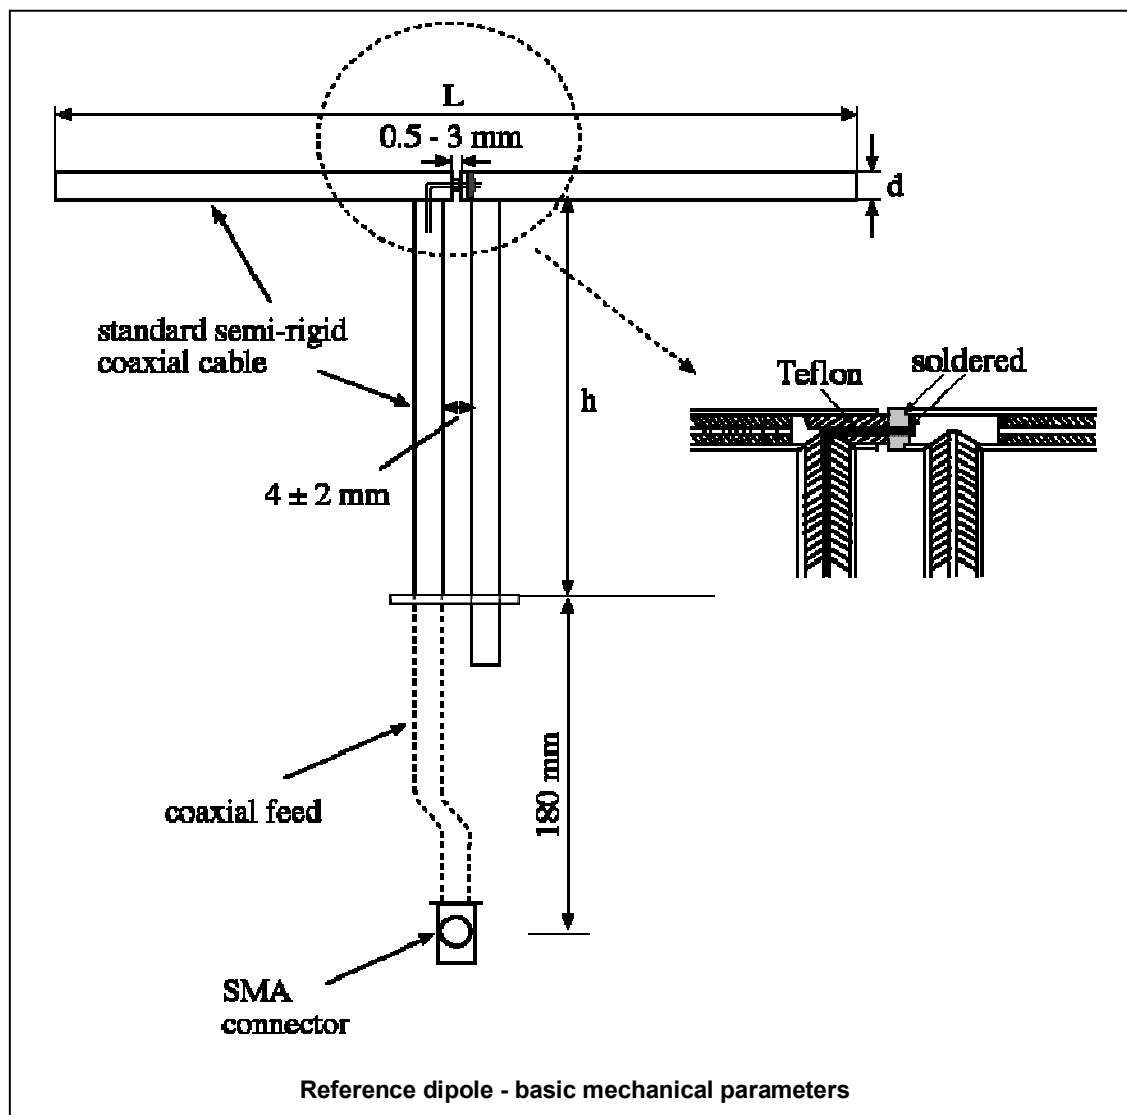

2. Validation Dipole VSWR Data

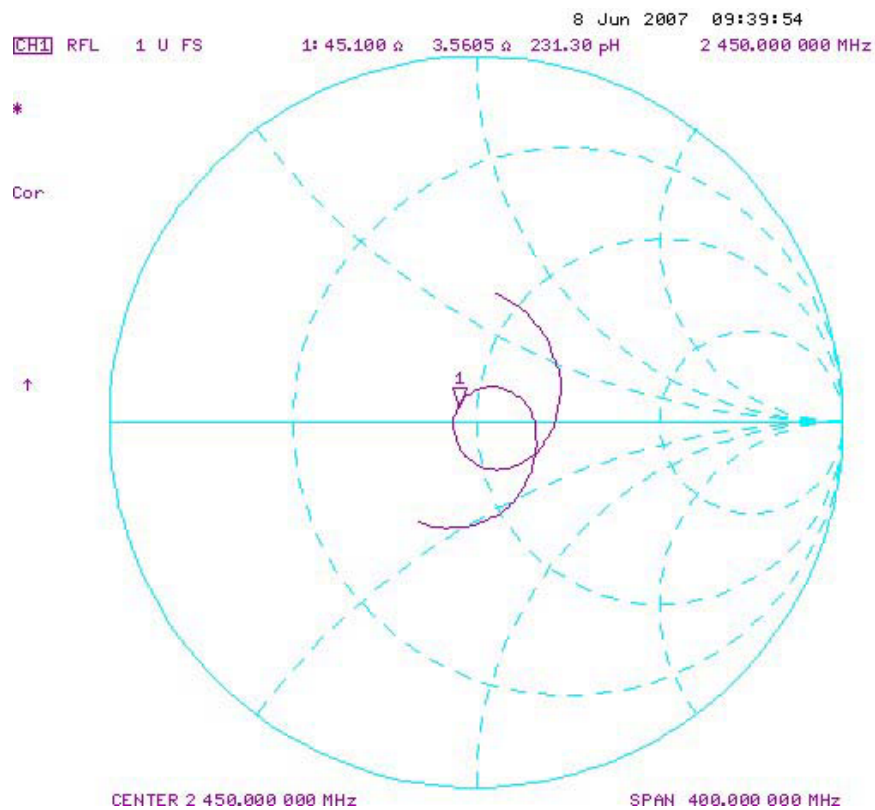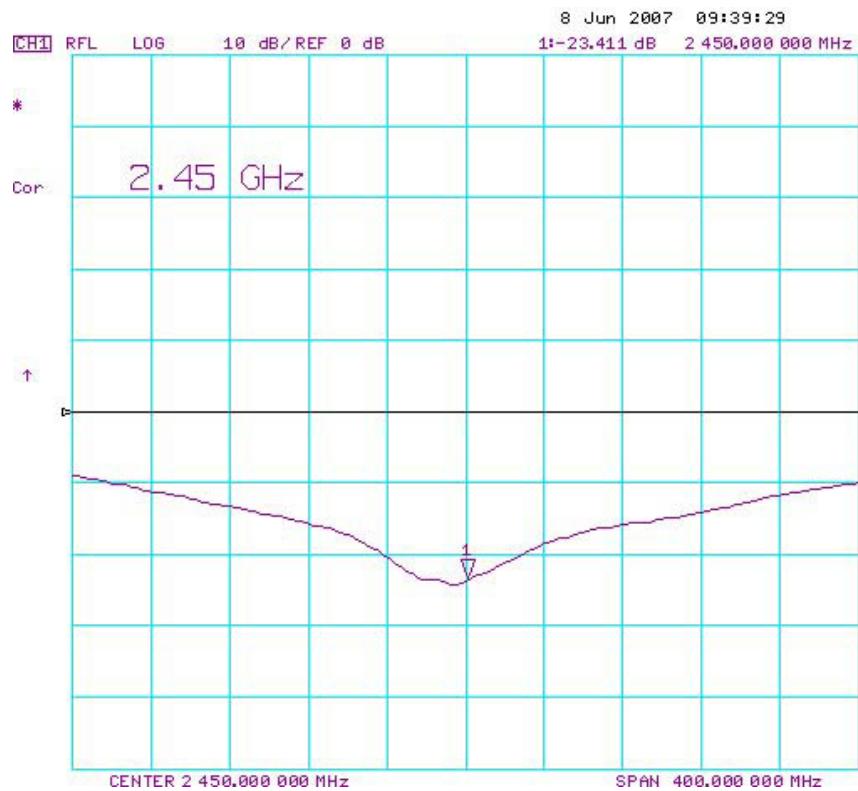


3. Validation Dipole Dimensions


Frequency (MHz)	L (mm)	H (mm)	D (mm)
300	396.0	250.0	6.0
450	270.0	167.0	6.0
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.5	30.4	3.6
3000	41.5	25.0	3.6

4. Validation Phantom

The validation phantom is the SAM (Specific Anthropomorphic Mannequin) phantom manufactured by Schmid & Partner Engineering AG. The SAM phantom is a Fiberglass shell integrated in a wooden table. The shape of the shell corresponds to the phantom defined by SCC34-SC2. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.


Shell Thickness: 2.0 ± 0.1 mm
Filling Volume: Approx. 25 liters
Dimensions: 50 cm (W) x 100 cm (L)

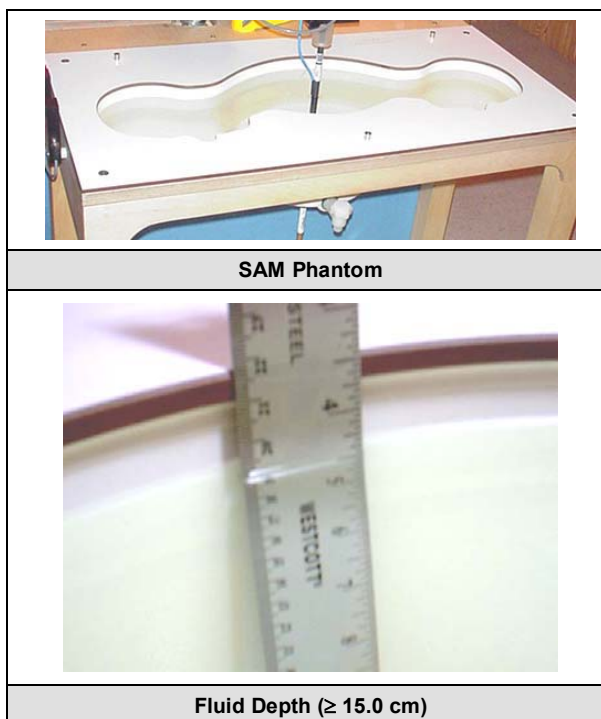

	Date of Evaluation:	June 08, 2007	Document Serial No.:	SV2450M-060807-R1.3
	Evaluation Type:	System Validation	Validation Dipole:	2450 MHz
			Fluid Type:	Body


5. 2450 MHz System Validation Setup



	Date of Evaluation:	June 08, 2007	Document Serial No.:	SV2450M-060807-R1.3
	Evaluation Type:	System Validation	Validation Dipole:	2450 MHz
			Fluid Type:	Body

6. 2450 MHz Validation Dipole Setup





	Date of Evaluation:	June 08, 2007	Document Serial No.:	SV2450M-060807-R1.3	
	Evaluation Type:	System Validation	Validation Dipole:	2450 MHz	Fluid Type: Body

7. SAR Measurement

Measurements were made at the planar section of the SAM phantom using a dosimetric E-field probe EX3DV4 (S/N: 3600, conversion factor 6.31). The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the procedures described below.

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

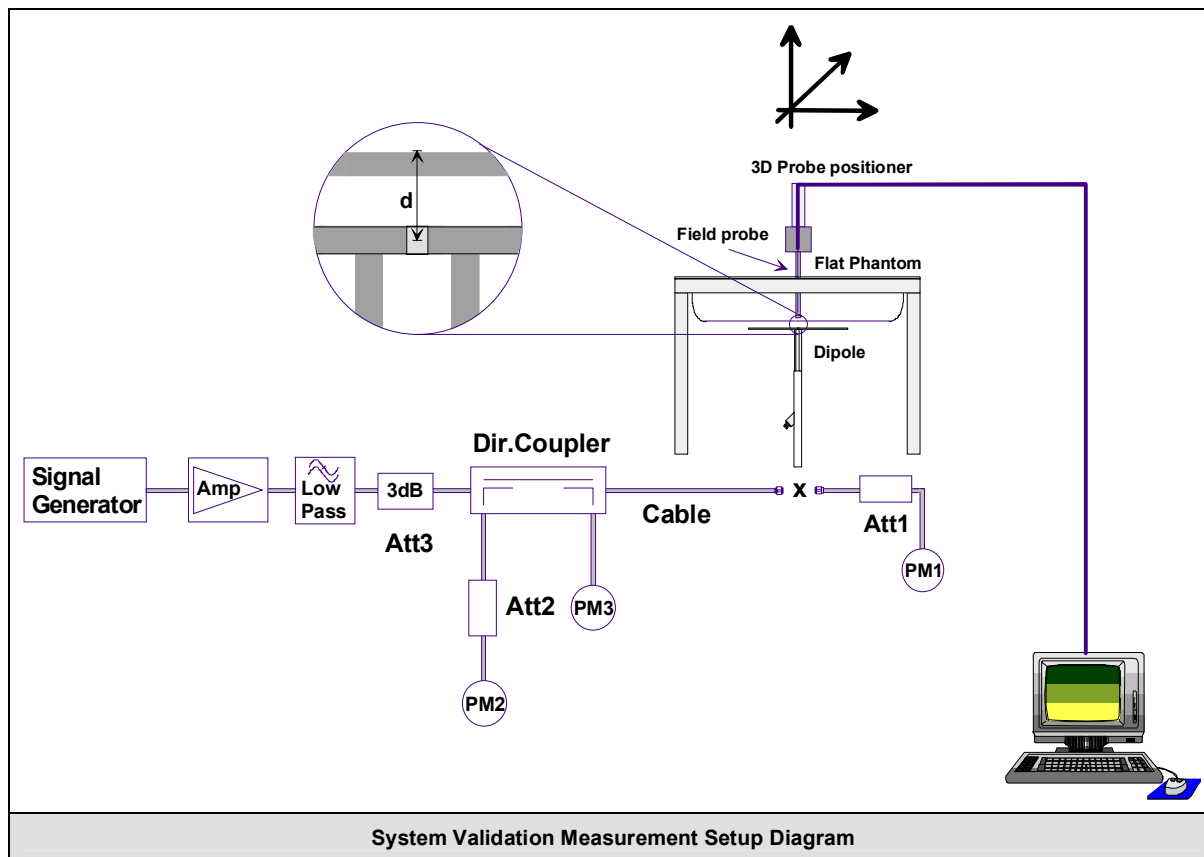

	Date of Evaluation:	June 08, 2007	Document Serial No.:	SV2450M-060807-R1.3
	Evaluation Type:	System Validation	Validation Dipole:	2450 MHz
			Fluid Type:	Body

8. Measurement Conditions

The SAM phantom was filled with 2450 MHz Body tissue simulant.

Relative Permittivity: 50.1 (-4.9% deviation from target)
Conductivity: 1.99 mho/m (+2.1% deviation from target)
Fluid Temperature: 21.5 °C (Start of Test) / 21.2 °C (End of Test)
Fluid Depth: ≥ 15.0 cm

Environmental Conditions:

Ambient Temperature: 22.7 °C
Barometric Pressure: 101.1 kPa
Humidity: 31 %

The 2450 MHz Body tissue simulant consisted of the following ingredients:


Ingredient	Percentage by weight	
Water	69.98%	
Glycol Monobutyl	30.00%	
Salt	0.02%	
IEEE Target Dielectric Parameters:	$\epsilon_r = 52.7 (+/-5\%)$	$\sigma = 1.95 \text{ S/m } (+/-5\%)$

9. System Validation SAR Results

SAR @ 0.25W Input averaged over 1g (W/kg)				SAR @ 1W Input averaged over 1g (W/kg)			
SPEAG Target		Measured	Deviation	SPEAG Target		Measured	Deviation
12.8	+/- 10%	13.4	+4.7%	51.2	+/- 10%	53.6	+4.7%
SAR @ 0.25W Input averaged over 10g (W/kg)				SAR @ 1W Input averaged over 10g (W/kg)			
SPEAG Target		Measured	Deviation	SPEAG Target		Measured	Deviation
5.93	+/- 10%	6.03	+1.7%	23.7	+/- 10%	24.1	+1.7%

Dipole Type	Distance [mm]	Frequency [MHz]	SAR (1g) [W/kg]	SAR (10g) [W/kg]	SAR (peak) [W/kg]
D300V2	15	300	3.02	2.06	4.36
D450V2	15	450	5.01	3.36	7.22
D835V2	15	835	9.71	6.38	14.1
D900V2	15	900	11.1	7.17	16.3
D1450V2	10	1450	29.6	16.6	49.8
D1500V2	10	1500	30.8	17.1	52.1
D1640V2	10	1640	34.4	18.7	59.4
D1800V2	10	1800	38.5	20.3	67.5
D1900V2	10	1900	39.8	20.8	69.6
D2000V2	10	2000	40.9	21.2	71.5
D2450V2	10	2450	51.2	23.7	97.6
D3000V2	10	3000	61.9	24.8	136.7

Table 32.1: Numerical reference SAR values for SPEAG dipoles and flat phantom filled with body-tissue simulating liquid. Note: All SAR values normalized to 1 W forward power.

	Date of Evaluation:	June 08, 2007	Document Serial No.:	SV2450M-060807-R1.3
	Evaluation Type:	System Validation	Validation Dipole:	2450 MHz
			Fluid Type:	Body

System Validation - 2450 MHz Dipole - June 8, 2007

DUT: Dipole 2450 MHz; Asset: 00025; Serial: 150

Ambient Temp: 22.7°C; Fluid Temp: 21.5°C; Barometric Pressure: 101.1 kPa; Humidity: 31%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.31, 6.31, 6.31); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

2450 MHz System Validation/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 13.1 mW/g

2450 MHz System Validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 91.9 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 28.6 W/kg

SAR(1 g) = 13.4 mW/g; SAR(10 g) = 6.03 mW/g

Maximum value of SAR (measured) = 15.5 mW/g

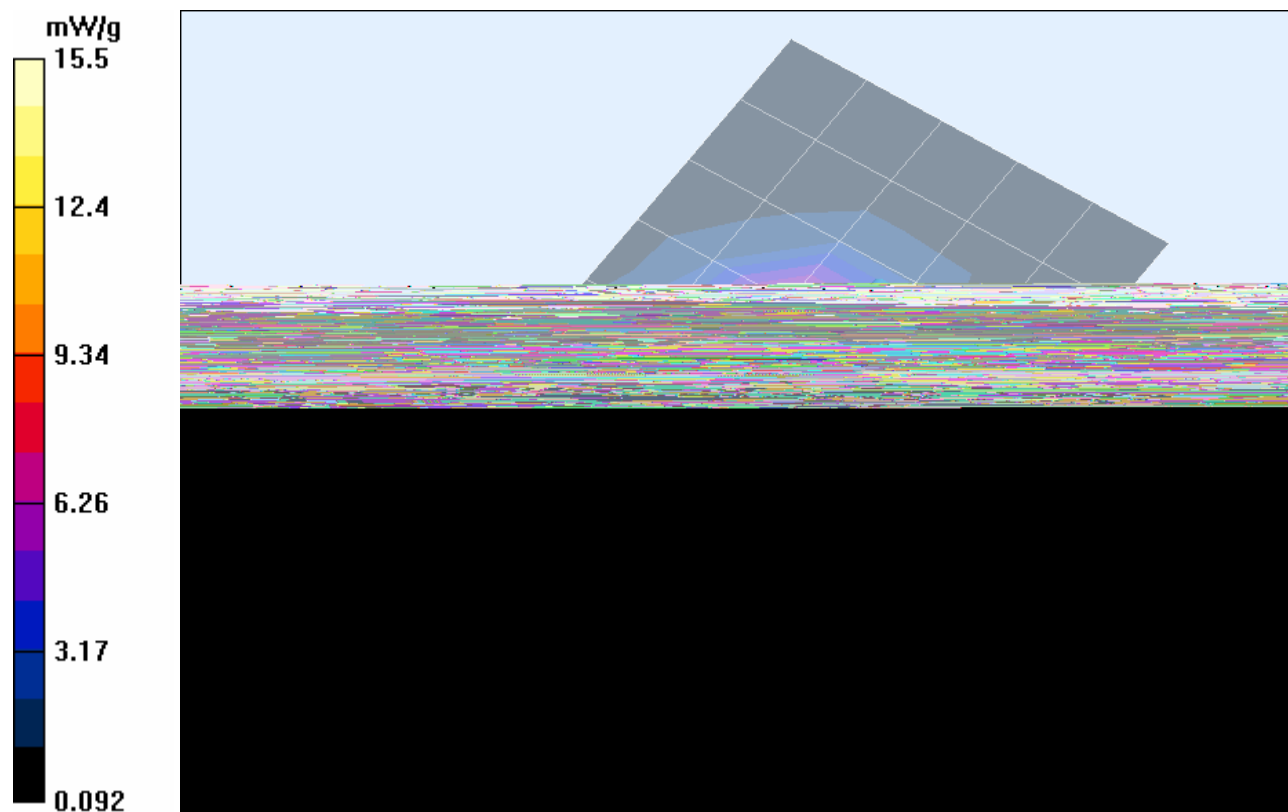

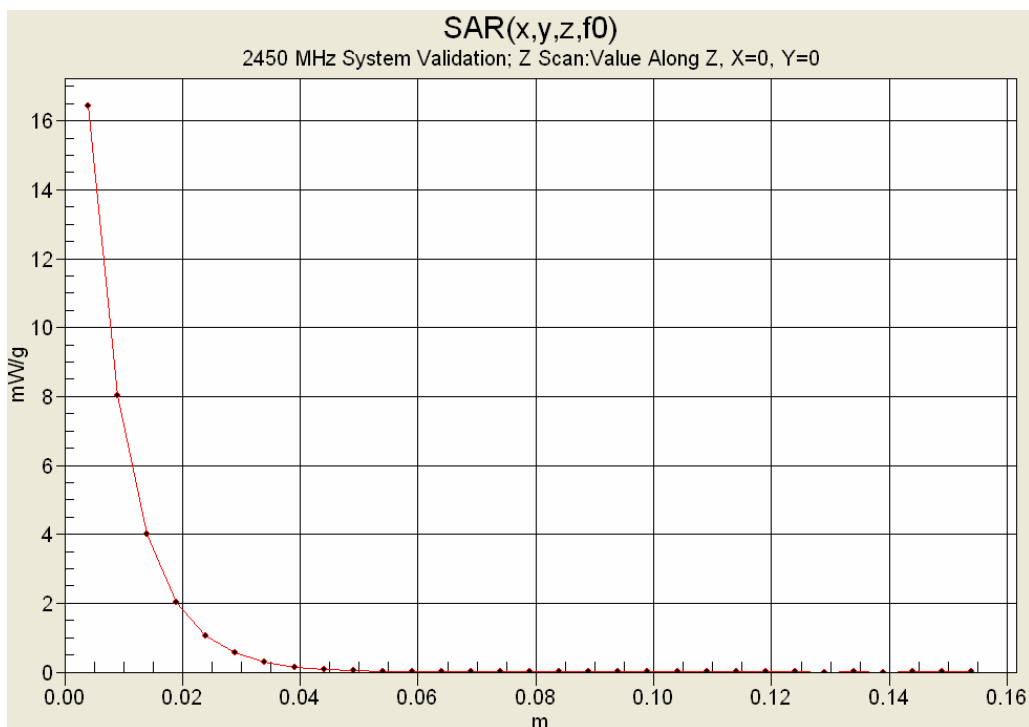

10. Measured Fluid Dielectric Parameters

System Validation - 2450 MHz (Body)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Fri 08/Jun/2007

Frequency (GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma


FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.3500	52.83	1.85	50.39	1.89
2.3600	52.82	1.86	50.32	1.90
2.3700	52.81	1.87	50.28	1.91
2.3800	52.79	1.88	50.28	1.93
2.3900	52.78	1.89	50.31	1.94
2.4000	52.77	1.90	50.26	1.95
2.4100	52.75	1.91	50.24	1.96
2.4200	52.74	1.92	50.21	1.96
2.4300	52.73	1.93	50.21	1.98
2.4400	52.71	1.94	50.13	1.99
2.4500	52.70	1.95	50.09	1.99
2.4600	52.69	1.96	50.01	2.03
2.4700	52.67	1.98	50.10	2.03
2.4800	52.66	1.99	50.12	2.05
2.4900	52.65	2.01	50.09	2.07
2.5000	52.64	2.02	50.08	2.07
2.5100	52.62	2.04	50.03	2.08
2.5200	52.61	2.05	50.02	2.09
2.5300	52.60	2.06	49.93	2.10
2.5400	52.59	2.08	49.87	2.11
2.5500	52.57	2.09	49.78	2.13



	Date of Evaluation:	June 08, 2007	Document Serial No.:	SV2450M-060807-R1.3
	Evaluation Type:	System Validation	Validation Dipole:	2450 MHz
			Fluid Type:	Body

11. Measurement Uncertainties


UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration (2450 MHz)	5.9	Normal	1	1	5.9	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Dipole						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	5	Normal	1	0.64	3.2	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	5	Normal	1	0.6	3.0	∞
Combined Standard Uncertainty					9.81	
Expanded Uncertainty (k=2)					19.61	
Note(s)	1. Measurement Uncertainty Table in accordance with IEEE 1528-2003 and IEC 62209-1:2005.					

12. Test Equipment List

TEST EQUIPMENT	ASSET NO.	SERIAL NO.	DATE OF CAL.	CAL. DUE DATE
SPEAG DASY4 Measurement Server	00158	1078	N/A	N/A
SPEAG Robot	00046	599396-01	N/A	N/A
SPEAG DAE4	00019	353	21Jun06	21Jun07
SPEAG EX3DV4 E-Field Probe	00213	3600	24Jan07	24Jan08
2450 MHz Validation Dipole	00025	150	08Jun07	08Jun08
SPEAG SAM Phantom V4.0C	00154	1033	N/A	N/A
ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	N/A	N/A
Gigatronics 8652A Power Meter	00007	1835272	26Mar07	26Mar08
Gigatronics 80701A Power Sensor	00014	1833699	22Jan07	22Jan08
Gigatronics 80701A Power Sensor	00109	1834366	26Mar07	26Mar08
HP 8753ET Network Analyzer	00134	US39170292	20Apr07	20Apr08
HP 8648D Signal Generator	00005	3847A00611	NCR	NCR
Amplifier Research 5S1G4 Power Amplifier	00106	26235	NCR	NCR

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

APPENDIX F - PROBE CALIBRATION

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
						Page 35 of 36



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **EX3-3600_Jan07**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3600**

Calibration procedure(s) **QA CAL-01.v5 and QA CAL-14.v3
Calibration procedure for dosimetric E-field probes**

Calibration date: **January 24, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41498087	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	4-Apr-06 (METAS, No. 251-00558)	Apr-07
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

Calibrated by: **Katja Pokovic** **Technical Manager**

Approved by: **Niels Kuster** **Quality Manager**

Signature

Issued: January 24, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe EX3DV4

SN:3600

Manufactured:	January 10, 2007
Calibrated:	January 24, 2007

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: EX3DV4 SN:3600

Sensitivity in Free Space^A

Diode Compression^B

NormX	0.460 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	90 mV
NormY	0.470 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	88 mV
NormZ	0.380 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	89 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL **1810 MHz** **Typical SAR gradient: 10 % per mm**

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR _{be} [%]	Without Correction Algorithm	4.5	3.5
SAR _{be} [%]	With Correction Algorithm	0.2	0.4

TSL **5800 MHz** **Typical SAR gradient: 30 % per mm**

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR _{be} [%]	Without Correction Algorithm	3.5	2.0
SAR _{be} [%]	With Correction Algorithm	0.1	0.3

Sensor Offset

Probe Tip to Sensor Center **1.0 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).




^B Numerical linearization parameter: uncertainty not required.

Frequency Response of E-Field


(TEM-Cell: ifi110 EXX, Waveguide: R22)

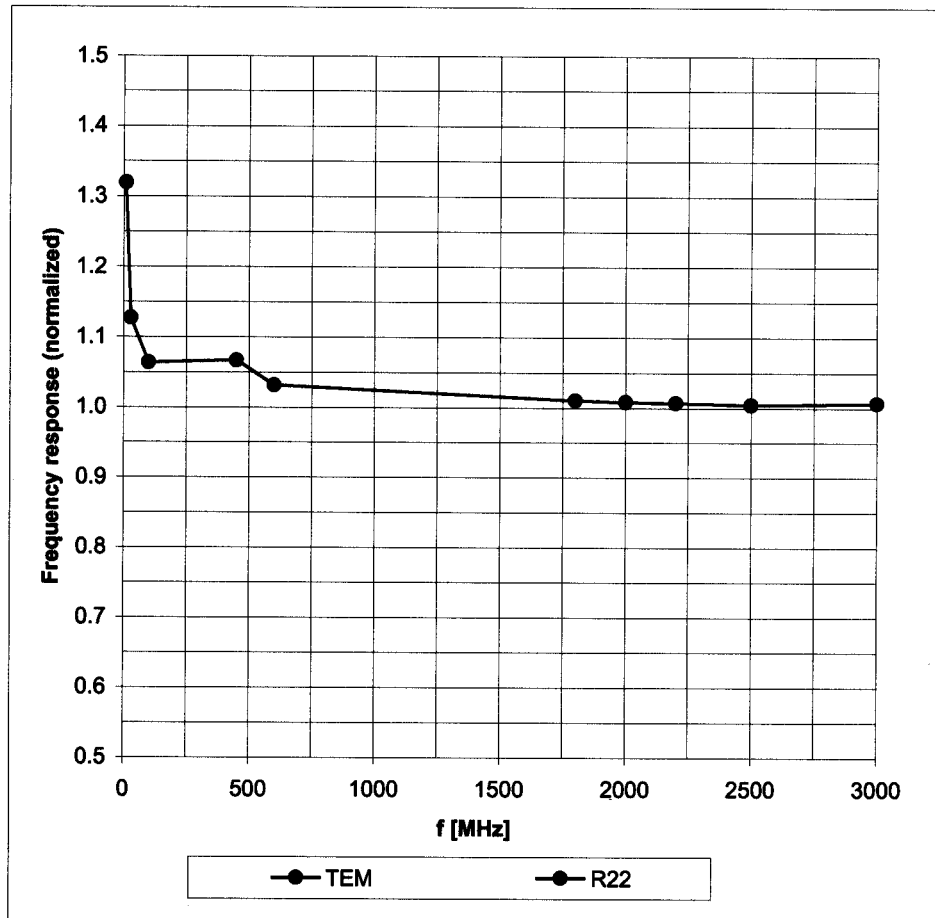

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

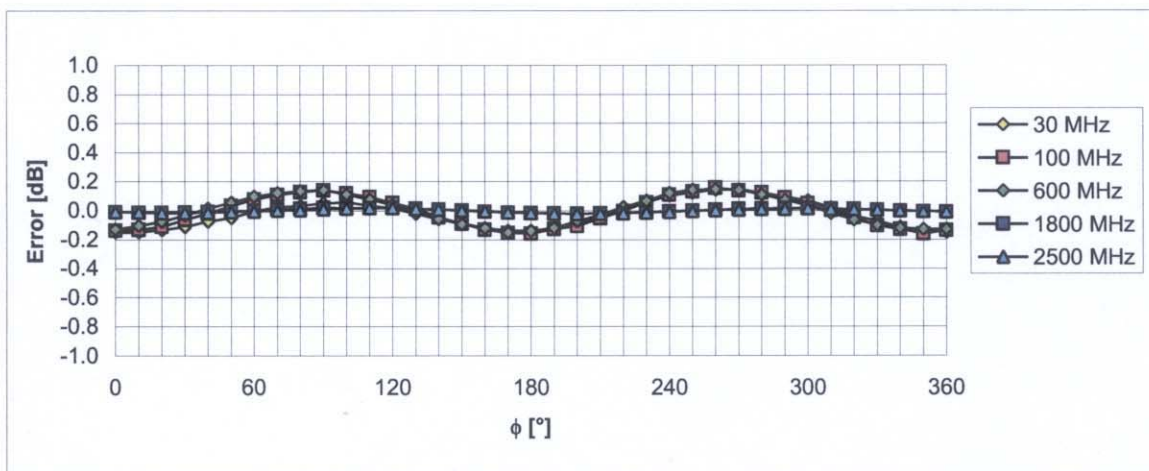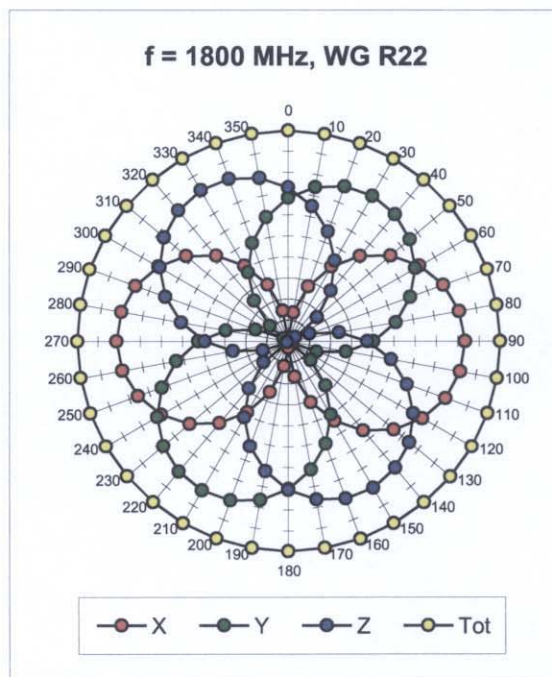
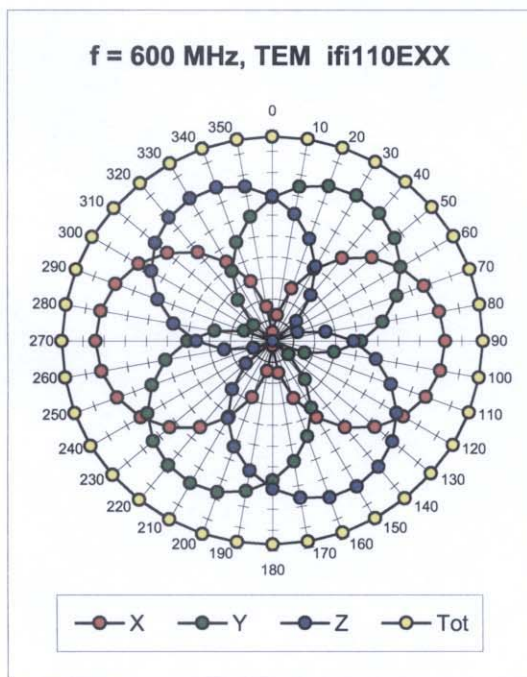
Receiving Pattern (ϕ), $\vartheta = 0^\circ$ Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)

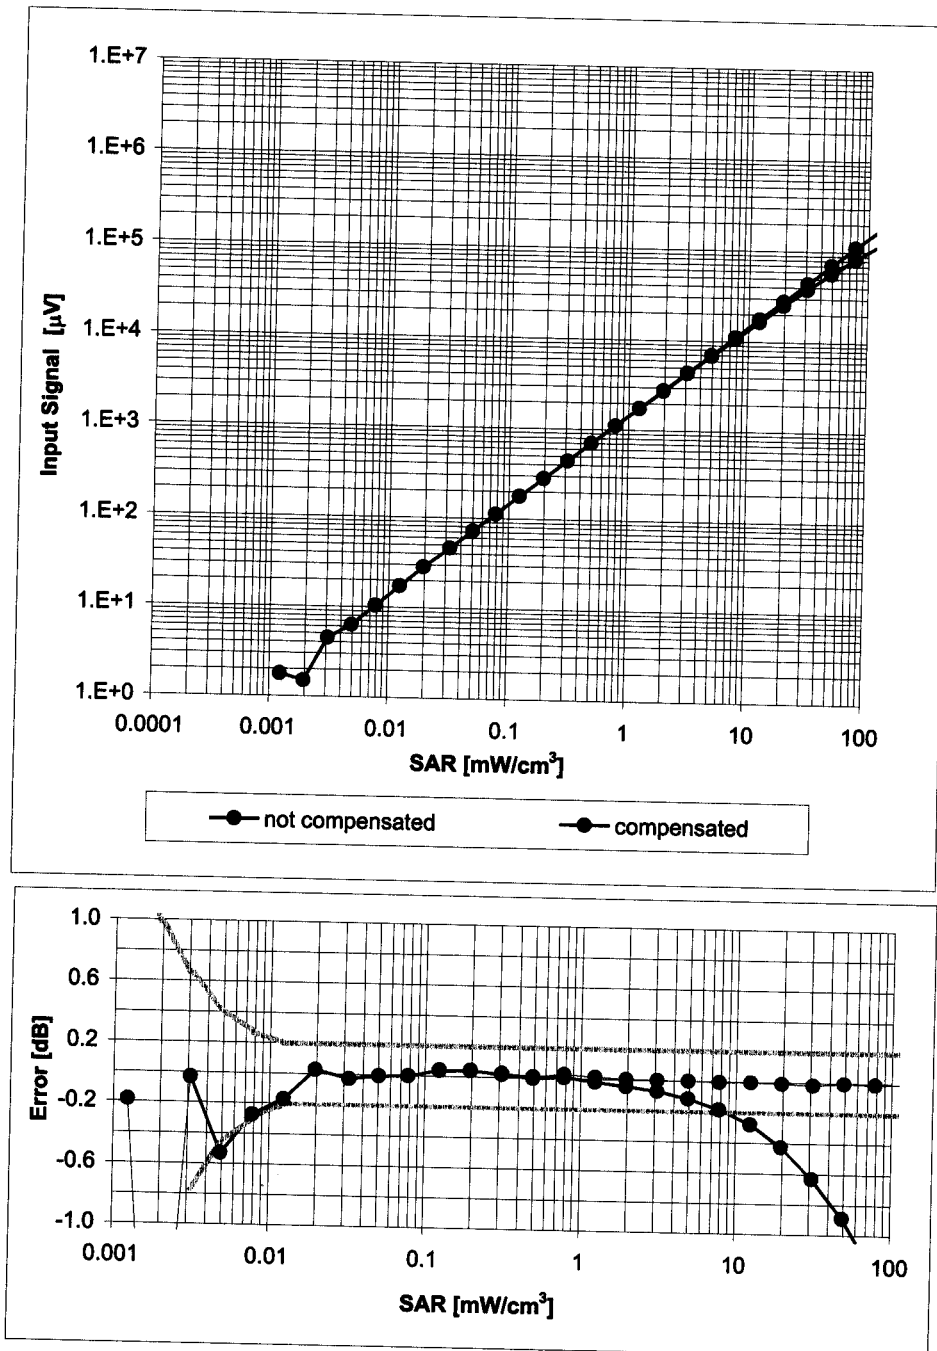

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

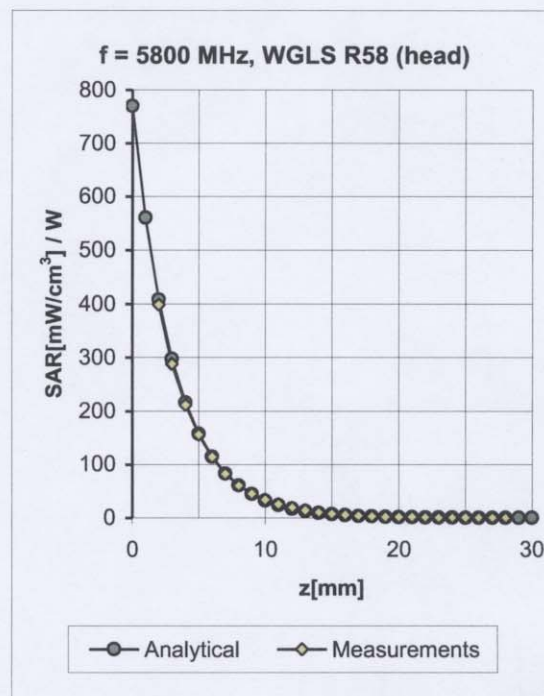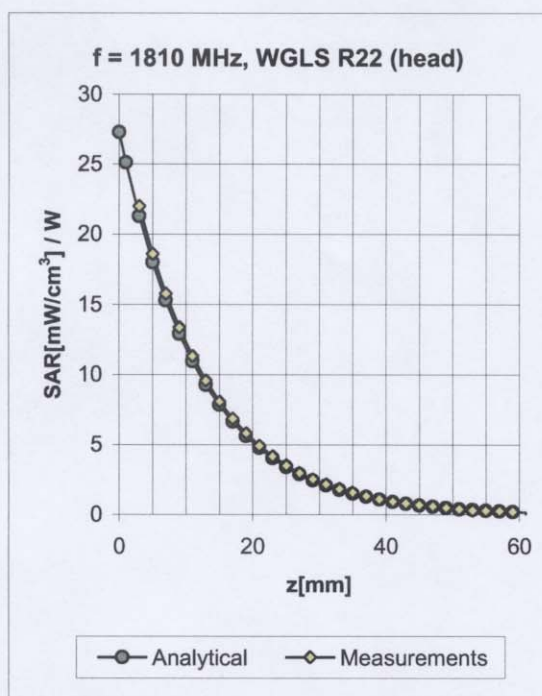


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.20	1.01	7.02	± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.26	1.05	6.59	± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.44	1.00	6.37	± 11.8% (k=2)
5800	± 50 / ± 100	Head	35.3 ± 5%	5.27 ± 5%	0.37	1.65	4.34	± 13.1% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.24	1.06	6.85	± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.16	1.35	6.54	± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.42	1.00	6.31	± 11.8% (k=2)
5200	± 50 / ± 100	Body	49.0 ± 5%	5.30 ± 5%	0.35	1.70	4.10	± 13.1% (k=2)
5500	± 50 / ± 100	Body	48.6 ± 5%	5.65 ± 5%	0.32	1.70	3.95	± 13.1% (k=2)
5800	± 50 / ± 100	Body	48.2 ± 5%	6.00 ± 5%	0.33	1.70	4.14	± 13.1% (k=2)



^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

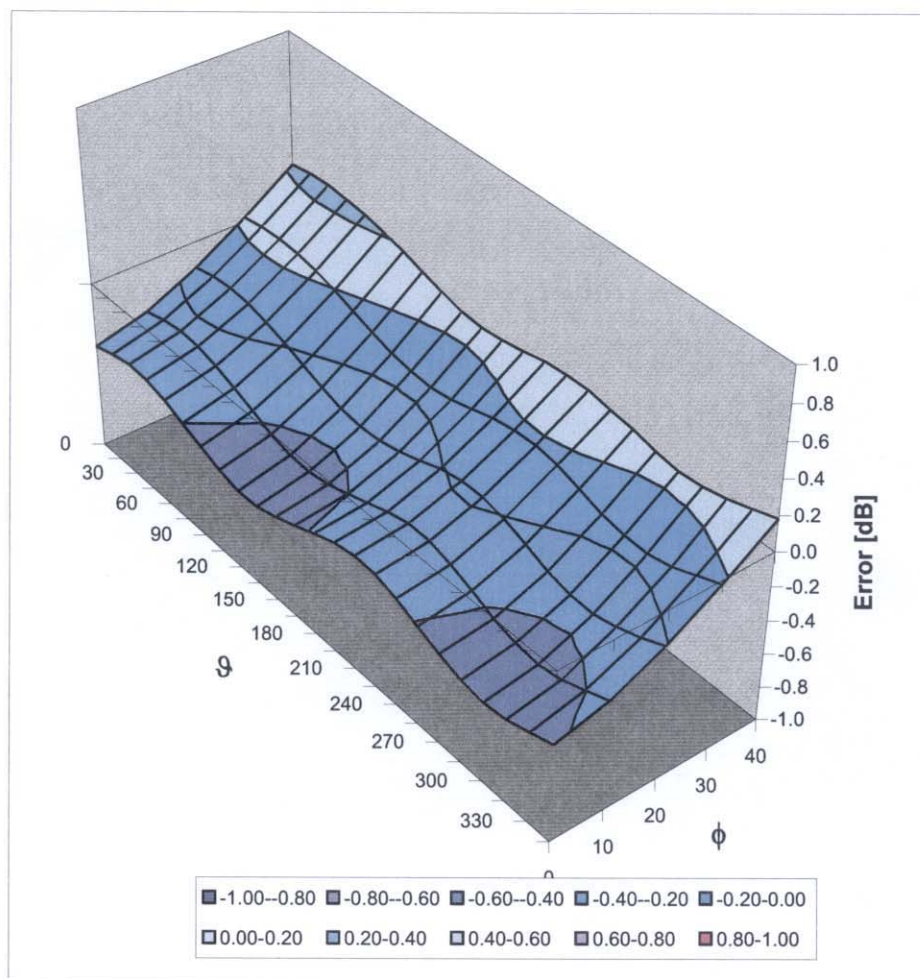
Error (ϕ , ϑ), $f = 900$ MHz



Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

	<u>Date(s) of Evaluation</u> September 19, 2007	<u>Test Report Serial No.</u> 091807MQO-T853-S15W	<u>Test Report Revision No.</u> Revision 1.1	 Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 27, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY

Company Name:	VOCOLLECT INC.	FCC ID:	MQOH1AVA-10001	IC ID:	2570A-H1AVA101	
Model Name: H1	Model No.: AVA-100-01	DUT:	Portable Wireless Data Terminal with 802.11b/g WLAN			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 BA
Series No	TP-1002 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland

Tests

The series production process used allows the limitation to test of first articles.
Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz – 3 GHz Relative permittivity < 5 Loss tangent < 0.05.	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9


(*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 18.11.2001

Signature / Stamp



**Schmid & Partner
Engineering AG**



Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79