



Engineering and Testing for EMC and Safety Compliance

CERTIFICATION APPLICATION REPORT
FCC PART 15.247 CERTIFICATION & INDUSTRY CANADA CERTIFICATION

Test Lab: Rhein Tech Laboratories, Inc. Phone: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 Web Site: www.rheintech.com Herndon, VA 20170 E-Mail: FCCINFO@rheintech.com		Applicant Information: Vocollect Phone: 412-829-8145 Contact: Doug Zatezalo Fax: 412-829-0972 701 Rodi Road E-Mail: dzatezalo@vocollect.com Pittsburgh, PA 15235	
FCC ID:	MQOTT600-35300	GRANTEE FRN NUMBER:	0007-0735-47
PLAT FORM:	N/A	RTL WORK ORDER NUMBER:	2002147
MODEL(S):	TT-600	RTL QUOTE NUMBER:	QRTL02-499
DATE OF TEST REPORT:	September 5, 2002		
American National Standard Institute:	ANSI C63.4: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz		
FCC Classification:	DSS – Part 15 Spread Spectrum Transmitter		
FCC Rule Part(s):	Part 15.247: Operation within the bands 920-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz Direct Sequence System 97-114: Amendment of Parts 2 and 15 of the Commission's Rules Regarding Spread Spectrum Transmitters; ET Docket No. 96-8		
Industry Canada Standard:	RSS-210: Low Power License-Exempt Radio Communication Devices (All Frequency Bands)		
Digital Interface Information	Digital Interface was found to be compliant		
Receiver Information	Receiver was found to be compliant		
Frequency Range (MHz)	Output Power* (W)	Freq. Tolerance	Emission Designator
2412-2462	0.065	N/A	N/A

* output power is maximum peak conducted

We, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards.

Furthermore, there was no deviation from, additions to, or exclusions from the FCC Part 2, FCC Part 15, Industry Canada RSS-210, ANSI C63.4, and FCC 97-114.

Signature: 

Date: September 5, 2002

Typed/Printed Name: Desmond A. Fraser

Position: President

360 Herndon Parkway, Suite 1400
Herndon, VA 20170
Phone: 703-689-0368; Fax: 703-689-2056; Metro: 703-471-6441

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	SCOPE	5
1.2	TEST FACILITY	5
1.3	RELATED SUBMITTAL(S)/GRANT(S).....	5
2	TEST INFORMATION.....	6
2.1	TEST JUSTIFICATION	6
2.2	EXERCISING THE EUT	6
2.3	TEST RESULT SUMMARY	6
2.4	TEST SYSTEM DETAILS	7
2.5	CONFIGURATION OF TESTED SYSTEM.....	7
3	COMPLIANCE WITH THE RESTRICTED BAND EDGE - §15.205	8
3.1	TEST PROCEDURE.....	8
3.2	BAND EDGE TEST EQUIPMENT	8
3.3	COMPLIANCE WITH THE RESTRICTED BAND EDGE TEST DATA	8
4	CONDUCTED LIMITS - §15.207	13
4.1	TEST METHODOLOGY FOR CONDUCTED LINE EMISSIONS MEASUREMENTS	13
4.2	CONDUCTED LINE EMISSION TEST	13
4.3	CONDUCTED LINE TEST EQUIPMENT	13
4.4	CONDUCTED LINE EMISSION TEST DATA	14
5	RADIATED EMISSION LIMITS RECEIVER/DIGITAL INTERFACE - §15.209	15
5.1	RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST PROCEDURE.....	15
5.2	RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT	15
5.3	RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST DATA	16
6	RADIATED EMISSION LIMITS; SPURIOUS AND HARMONICS - §15.247	17
6.1	RADIATED SPURIOUS EMISSION LIMITS TEST PROCEDURE.....	17
6.2	RADIATED SPURIOUS TEST EQUIPMENT	17
6.3	RADIATED EMISSIONS HARMONICS/SPURIOUS TEST DATA	18
7	MODULATED BANDWIDTH - §15.247(A)(2)	21
7.1	MODULATED BANDWIDTH TEST PROCEDURE – MINIMUM 6 DB BANDWIDTH.....	21
7.2	BANDWIDTH TEST EQUIPMENT	21
7.3	BANDWIDTH TEST DATA	21
7.4	MODULATED BANDWIDTH PLOTS	22
8	PEAK OUTPUT POWER - §15.247(B)(1).....	25
8.1	POWER OUTPUT TEST PROCEDURE	25
8.2	POWER OUTPUT TEST EQUIPMENT	25
8.3	POWER OUTPUT TEST DATA	25
9	ANTENNA CONDUCTED SPURIOUS EMISSIONS - §15.247(C)	26
9.1	ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST PROCEDURES	26
9.2	ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT	26
9.3	ANTENNA CONDUCTED SPURIOUS DATA PLOTS	27
9.4	ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 1.....	29
9.5	ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 6.....	30
9.6	ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 11.....	31
10	POWER SPECTRAL DENSITY - §15.247(D).....	32
10.1	POWER SPECTRAL DENSITY TEST PROCEDURE	32
10.2	POWER SPECTRAL DENSITY TEST EQUIPMENT	32
10.3	POWER SPECTRAL DENSITY TEST DATA	32
10.4	POWER SPECTRAL DENSITY PLOTS	33
11	CONCLUSION	36

FIGURE INDEX

FIGURE 1: WORST CASE CONFIGURATION OF SYSTEM UNDER TEST	7
---	---

TABLE INDEX

TABLE 2-1: TEST RESULT SUMMARY WITH FCC RULES AND REGULATIONS	6
TABLE 2-2: EQUIPMENT UNDER TEST (EUT)	7
TABLE 3-1: BAND EDGE TEST EQUIPMENT	8
TABLE 4-1: CONDUCTED LINE TEST EQUIPMENT	13
TABLE 4-2: CONDUCTED EMISSIONS (NEUTRAL SIDE)	14
TABLE 4-3: CONDUCTED EMISSIONS (PHASE SIDE)	14
TABLE 5-1: RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT	15
TABLE 5-2: RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS	16
TABLE 6-1: RADIATED SPURIOUS EMISSIONS TEST EQUIPMENT	17
TABLE 6-2: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 1; 2412 MHZ)	18
TABLE 6-3: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 6; 2437 MHZ)	19
TABLE 6-4: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 11; 2462 MHZ)	20
TABLE 7-1: BANDWIDTH TEST EQUIPMENT	21
TABLE 7-2: MINIMUM 6 DB BANDWIDTH TEST DATA	21
TABLE 8-1: POWER OUTPUT TEST EQUIPMENT	25
TABLE 8-2: POWER OUTPUT TEST DATA	25
TABLE 9-1: ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT	26
TABLE 9-2: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 1	29
TABLE 9-3: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 6	30
TABLE 9-4: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 11	31
TABLE 10-1: POWER SPECTRAL DENSITY TEST EQUIPMENT	32
TABLE 10-2: POWER SPECTRAL DENSITY TEST DATA	32
TABLE 11-1: 20 DB BANDWIDTH TEST EQUIPMENT	68
TABLE 11-2: MODULATED BANDWIDTH TEST DATA	68

PLOT INDEX

PLOT 3-1: BAND EDGE: RADIATED DELTA MEASUREMENT (CHANNEL 1)	9
PLOT 3-2: BAND EDGE: ANTENNA PORT MEASUREMENT (CHANNEL 1)	10
PLOT 3-3: BAND EDGE: RADIATED DELTA MEASUREMENT (CHANNEL 11)	11
PLOT 3-4: BAND EDGE: ANTENNA PORT MEASUREMENT (CHANNEL 11)	12
PLOT 7-1: MODULATED BANDWIDTH CHANNEL 1	22
PLOT 7-2: MODULATED BANDWIDTH CHANNEL 6	23
PLOT 7-3: MODULATED BANDWIDTH CHANNEL 11	24
PLOT 9-1: ANTENNA CONDUCTED SPURIOUS (30 MHZ-2 GHZ) CHANNEL 6	27
PLOT 9-2: ANTENNA CONDUCTED SPURIOUS (2-24 GHZ) CHANNEL 6	28
PLOT 10-1: POWER SPECTRAL DENSITY: CHANNEL 1	33
PLOT 10-2: POWER SPECTRAL DENSITY: CHANNEL 6	34
PLOT 10-3: POWER SPECTRAL DENSITY: CHANNEL 11	35
PLOT 11-1: 20 DB BANDWIDTH CHANNEL 1	69
PLOT 11-2: 20 DB BANDWIDTH CHANNEL 6	70
PLOT 11-3: 20 DB BANDWIDTH CHANNEL 11	71

APPENDIX INDEX

APPENDIX A:	SAR	37
APPENDIX B:	ANTENNA SPECIFICATIONS	38
APPENDIX C:	AGENCY AUTHORIZATION LETTER	39
APPENDIX D:	CONFIDENTIALITY REQUEST LETTER (IF APPLICABLE)	40
APPENDIX E:	ATTESTATION LETTERS (IF APPLICABLE)	41
APPENDIX F:	PRODUCT DESCRIPTION	42
APPENDIX G:	LABEL AND LABEL LOCATION	43
APPENDIX H:	BILL OF MATERIAL (PARTS LIST) (IF APPLICABLE)	44
APPENDIX I:	SCHEMATIC	45
APPENDIX J:	BLOCK DIAGRAM (IF APPLICABLE)	46
APPENDIX K:	MANUAL	47
APPENDIX L:	TEST PHOTOGRAPHS	48
APPENDIX M:	EXTERNAL PHOTOGRAPHS	52
APPENDIX N:	INTERNAL PHOTOGRAPHS	55
APPENDIX O:	ADDITIONAL INFORMATION FOR CANADIAN CERTIFICATION	68

PHOTOGRAPH INDEX

PHOTOGRAPH 1:	LABEL LOCATION	43
PHOTOGRAPH 2:	RADIATED EMISSION FRONT VIEW; WORST CASE CONFIGURATION	48
PHOTOGRAPH 3:	RADIATED EMISSION REAR VIEW; WORST CASE CONFIGURATION	49
PHOTOGRAPH 4:	CONDUCTED EMISSION FRONT VIEW	50
PHOTOGRAPH 5:	CONDUCTED EMISSION REAR VIEW	51
PHOTOGRAPH 6:	FRONT VIEW WITH BATTERY	52
PHOTOGRAPH 7:	FRONT VIEW WITHOUT BATTERY	53
PHOTOGRAPH 8:	REAR VIEW SHOWING BELT CLIP AND SIDE CONNECTORS	54
PHOTOGRAPH 9:	OVERALL INTERNAL VIEW	55
PHOTOGRAPH 10:	INTERNAL VIEW WITH WLAN CARD	56
PHOTOGRAPH 11:	INSIDE FRONT COVER	57
PHOTOGRAPH 12:	INSIDE REAR COVER	58
PHOTOGRAPH 13:	PCB TOP	59
PHOTOGRAPH 14:	PCB REAR WITH SHIELD	60
PHOTOGRAPH 15:	PCB REAR WITHOUT SHIELD	61
PHOTOGRAPH 16:	WLAN CARD FRONT WITH ANTENNA	62
PHOTOGRAPH 17:	WLAN CARD REAR WITH ANTENNA	63
PHOTOGRAPH 18:	ANTENNA FRONT	64
PHOTOGRAPH 19:	FRONT WLAN PCMCIA CARD	65
PHOTOGRAPH 20:	BACK WLAN PCMCIA CARD	66
PHOTOGRAPH 21:	PCB CONNECTIONS	67

1 GENERAL INFORMATION

1.1 SCOPE

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

IC RSS-210 Section 6.2.2(o): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

A direct sequence (DS) system is a spread spectrum (SS) system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high-speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal.

1.2 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).

1.3 RELATED SUBMITTAL(S)/GRANT(S)

This is an original application for Certification for Vocollect Inc. Talkman T2 M/N: TT-600, FCC ID: MQOTT600-35300. The IF, LO and up to the 2nd LO were investigated and tested.

2 TEST INFORMATION

2.1 TEST JUSTIFICATION

The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. Channel 1 at 2412 MHz, Channel 6 at 2437 MHz and channel 11 at 2462 MHz were tested and investigated from 9 kHz to 24 GHz. Data for all three channels are presented in this report.

The EUT contains an internal dipole antenna. The dipole antenna transmits, receives, and is connected to the internal antenna port.

The worst-case data taken in this report represents the highest data rate at 11 Mbps. Data rates of 5.5 Mbps, 2 Mbps and 1 Mbps were investigated and found to be in compliance. The change in envelope did not cause the EUT to be non-compliant in any of the aforementioned modes.

2.2 EXERCISING THE EUT

The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted.

2.3 TEST RESULT SUMMARY

TABLE 2-1: TEST RESULT SUMMARY WITH FCC RULES AND REGULATIONS

STANDARD	TEST	PASS/FAIL OR N/A
FCC 15.205	Compliance with the Restricted Band Edge	Pass
FCC 15.207	Conducted Emissions	Pass
FCC 15.209	Radiated Emissions	Pass
FCC 15.247(a)(2)	Modulated Bandwidth	Pass
FCC 15.247(b)	Power Output	Pass
FCC 15.247(c)	Antenna Conducted Spurious Emissions	Pass
FCC 15.247(d)	Power Spectral Density	Pass

2.4 TEST SYSTEM DETAILS

The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system are identified in Table 2-2.

TABLE 2-2: EQUIPMENT UNDER TEST (EUT)

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
TALKMAN	VOCOLLECT, INC.	T2	62305783	MQOTT600-35300	N/A	014592
BATTERY	VOCOLLECT, INC.	1500MAH	0038	N/A	N/A	014394
WALL MOUNT CHARGER	VOCOLLECT, INC.	CM-601-1	42172872	N/A	UNSHIELDED	014547
WIRELESS LAN ADAPTER	SYMBOL TECHNOLOGIES, INC.	LA-4121-1100-US	00A0F8447E4E	H9PLA4121	N/A	14601

2.5 CONFIGURATION OF TESTED SYSTEM




FIGURE 1: WORST CASE CONFIGURATION OF SYSTEM UNDER TEST

3 COMPLIANCE WITH THE RESTRICTED BAND EDGE - §15.205

3.1 TEST PROCEDURE

Compliance with the band edges was performed using the FCC's "Radiated Measurement at a Band Edge" guidance document. The data taken in this report represents the worst case at 11 Mbps. Data rates of 5.5 Mbps, 2 Mbps and 1 Mbps were investigated and found to be in compliance. A conducted plot with the display line referenced -20 dB from peak, is also shown.

3.2 BAND EDGE TEST EQUIPMENT

TABLE 3-1: BAND EDGE TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900878	Rhein Tech Labs	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	N/A
900913	Hewlett Packard	85462A	EMI Receiver RF Section, 9 KHz - 6.5 GHz	3325A00159	12/5/02
900914	Hewlett Packard	85460A	RF Filter Section, 100 KHz to 6.5 GHz	3330A00107	12/5/02
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna 1-18 GHz	2310	2/26/03
901242	Rhein Tech Labs	WRT-000-0003	Wood rotating table	N/A	N/A
901231	IW Microwave Products	KPS-1503-2400-KPS	High frequency RF cables	240"	N/A
901235	IW Microwave Products	KPS-1503-360-KPS	High frequency RF cables	36"	N/A
900931	HP	8566B	Spectrum Analyzer (100Hz – 22 GHz)	3138A07771	5/10/03

3.3 COMPLIANCE WITH THE RESTRICTED BAND EDGE TEST DATA

Calculation of Lower Band Edge


The level 108.7 dBuV/m is the peak Field Strength measurement (worst case), from which the delta measurement of 56.14 dB is subtracted (reference plots), which is equivalent to a level of 52.6 dB. This level has a margin of 1.4 dB below the limit of 54 dBuV/m

Calculation: $108.7 \text{ dBuV/m} - 56.14 \text{ dB} - 54 \text{ dBuV/m} = -1.4 \text{ dB}$

Channel Number: 1
Frequency (MHz): 2412
Resolution Bandwidth (kHz): 300
Video Bandwidth (kHz): 300
Sweep Time (ms): 20

PLOT 3-1: BAND EDGE: RADIATED DELTA MEASUREMENT (CHANNEL 1)

Peak Field Strength (1 MHz/1 MHz) = 108.65 dBuV/m
Average Field Strength (1 MHz/10 Hz) = 101.0 dBuV/m

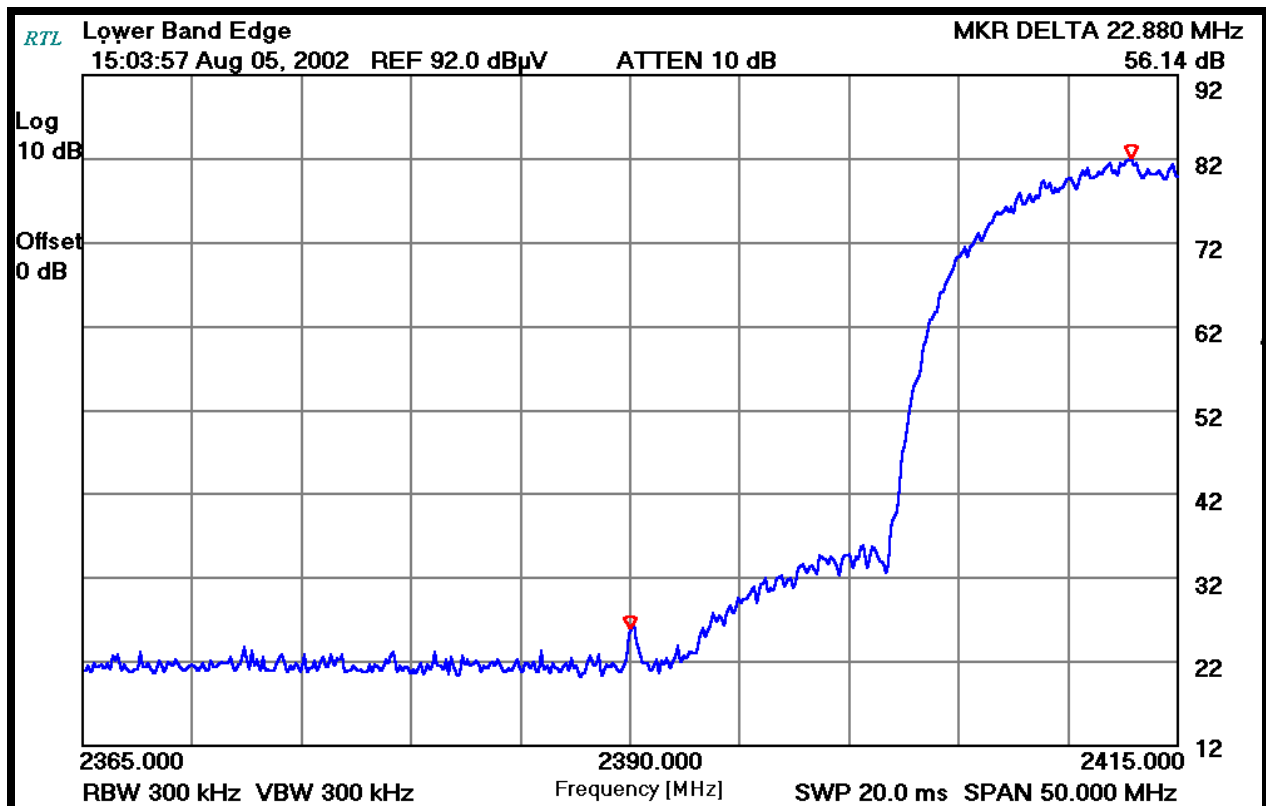

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer


Daniel W. Baltzell

Signature

August 5, 2002
Date Of Test

PLOT 3-2: BAND EDGE: ANTENNA PORT MEASUREMENT (CHANNEL 1)

Conducted Power 17.2 dBm

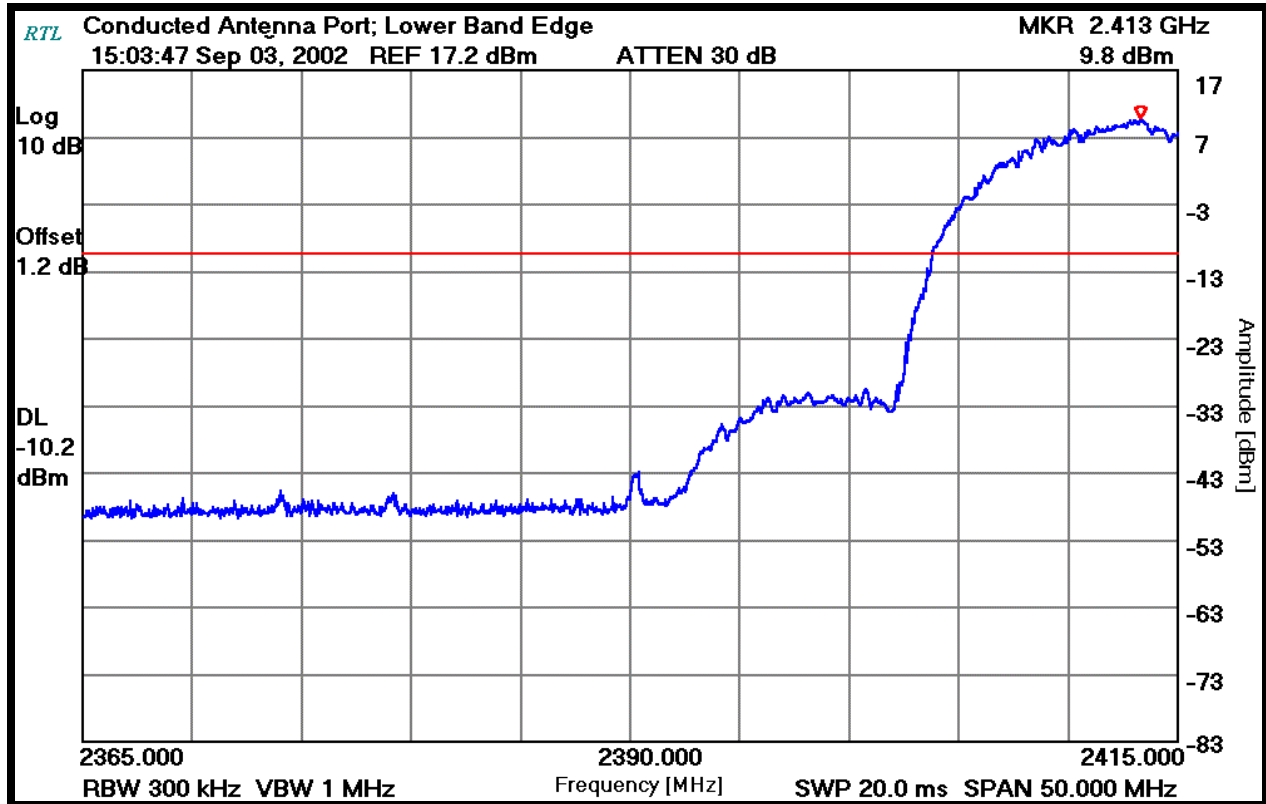

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Daniel W. Baltzell
 Signature

September 3, 2002
 Date Of Test

Calculation of Upper Band Edge


The level 110.1 dBuV/m is the peak Field Strength measurement (worst case), from which the delta measurement of 58.0 dB is subtracted (reference plots), which is equivalent to a level of 52.1 dB. This level has a margin of 1.9 dB below the limit of 54 dBuV/m.

Calculation: $110.1 \text{ dBuV/m} - 58.0 \text{ dB} - 54 \text{ dBuV/m} = -1.9 \text{ dB}$

Channel Number: 11
Frequency (MHz): 2462
Resolution Bandwidth (kHz): 300
Video Bandwidth (kHz): 300
Sweep Time (ms): 20.0

PLOT 3-3: BAND EDGE: RADIATED DELTA MEASUREMENT (CHANNEL 11)

Peak Field Strength (1 MHz/1 MHz) = 110.1 dBuV/m
Average Field Strength (1 MHz/10 Hz) = 102.5 dBuV/m

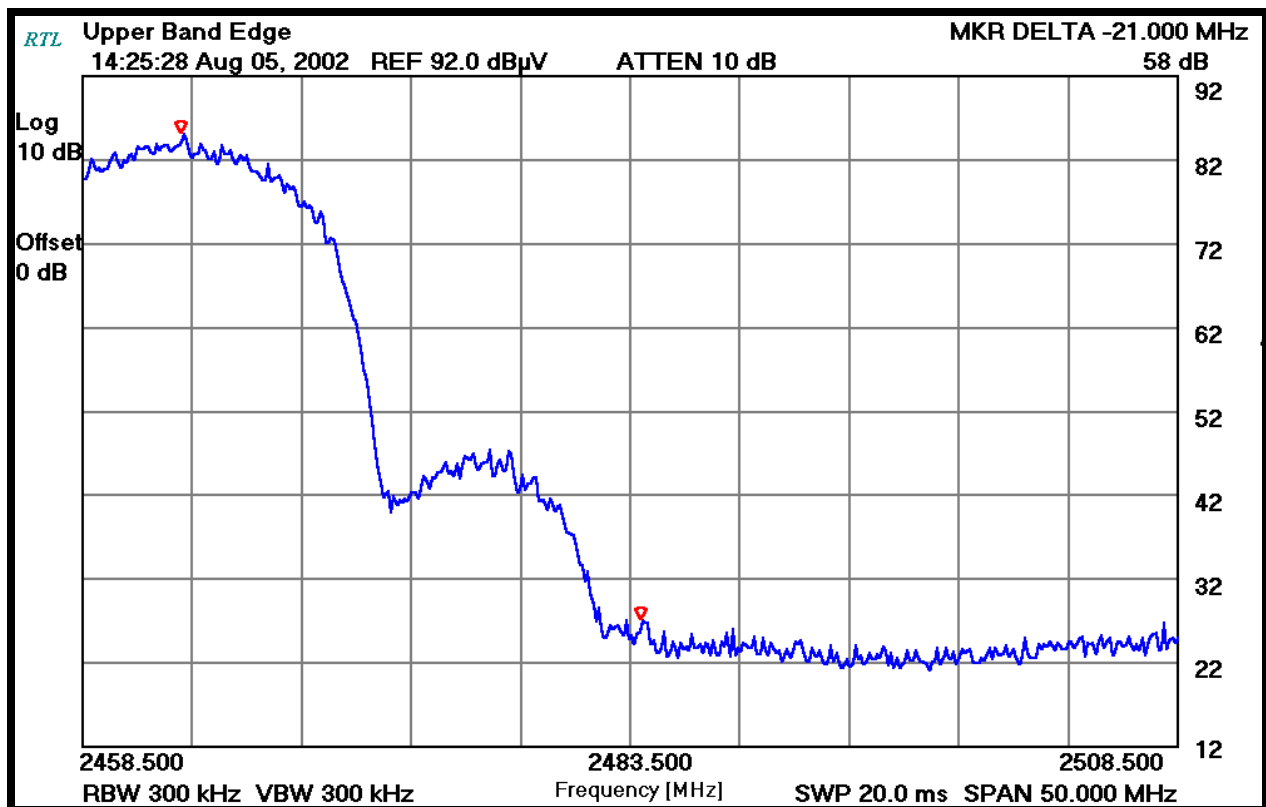

TEST PERSONNEL:


Daniel W. Baltzell
EMC Test Engineer

Signature

August 5, 2002
Date Of Test

PLOT 3-4: BAND EDGE: ANTENNA PORT MEASUREMENT (CHANNEL 11)

Conducted Power 18.1 dBm

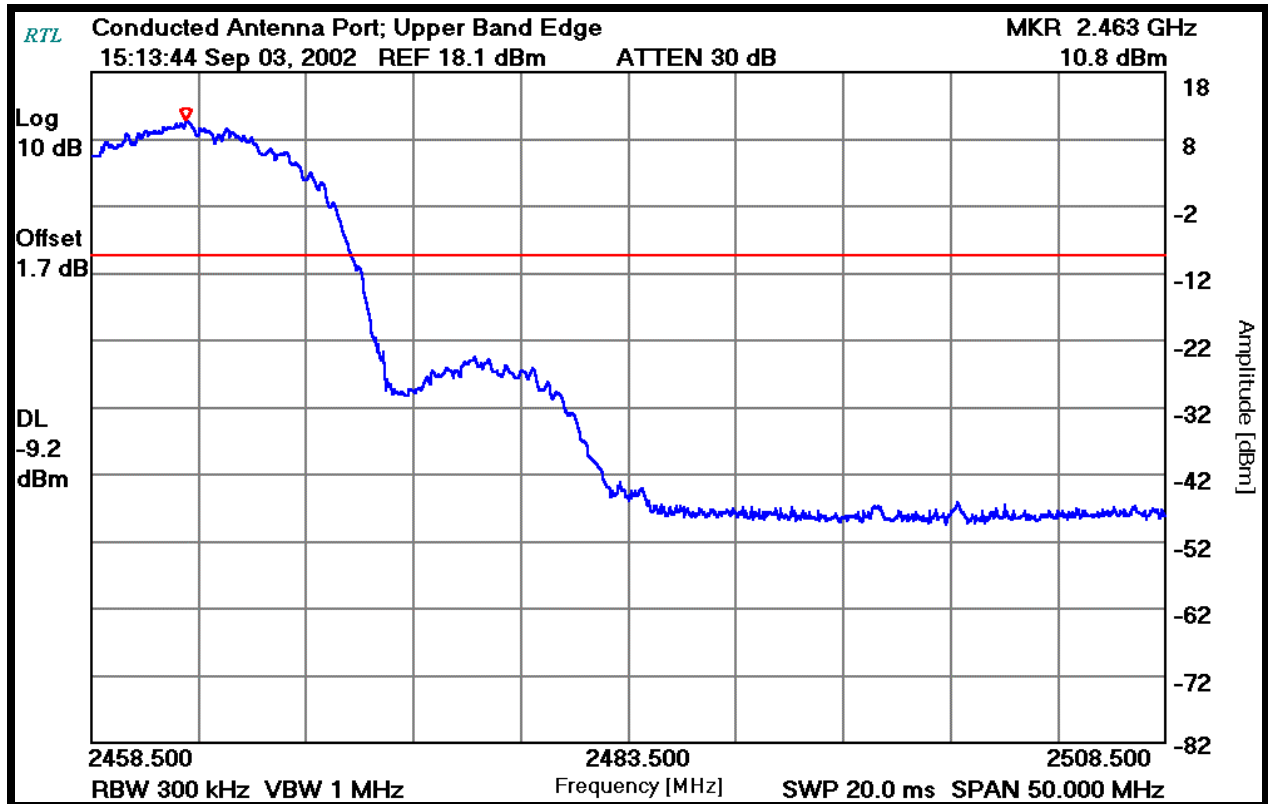

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Daniel W. Baltzell
 Signature

September 3, 2002
 Date Of Test

4 CONDUCTED LIMITS - §15.207

4.1 TEST METHODOLOGY FOR CONDUCTED LINE EMISSIONS MEASUREMENTS

The power line conducted emission measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50 ohm / 50 micro Henry Line Impedance Stabilization Network (EUT LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the A.C. line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 400 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 400 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The analyzer's 6 dB bandwidth was set to 9 kHz. No video filter less than 10 times the resolution bandwidth was used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from (150/450) kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in this report.

Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech quality manual, section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.

4.2 CONDUCTED LINE EMISSION TEST

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emissions exceed the limit with the instrument set to the quasi-peak mode, then measurements are made in the average mode. If the quasi-peak measurement is at least 6dB higher than the amplitude in the average mode, the level measured in the quasi-peak mode may be reduced by 13dB before comparing it to the limit.

The conducted test was performed with the EUT exercise program loaded, and the emissions were scanned between 450 kHz to 30 MHz on the NEUTRAL SIDE and PHASE SIDE.

4.3 CONDUCTED LINE TEST EQUIPMENT

TABLE 4-1: CONDUCTED LINE TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900931	HP	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	5/10/03
901084	AFJ international	LS16	16A LISN	16010020082	9/5/03

4.4 CONDUCTED LINE EMISSION TEST DATA

TABLE 4-2: CONDUCTED EMISSIONS (NEUTRAL SIDE)

Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.472	Pk	31.8	0.8	32.6	48.0	-15.4
2.080	Pk	31.8	1.2	33.0	48.0	-15.0
3.050	Pk	32.1	1.3	33.4	48.0	-14.6
3.820	Pk	30.9	1.4	32.3	48.0	-15.7
10.110	Pk	34.1	2.1	36.2	48.0	-11.8
15.110	Pk	24.7	2.8	27.5	48.0	-20.5

TABLE 4-3: CONDUCTED EMISSIONS (PHASE SIDE)

Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.470	Pk	32.1	0.8	32.9	48.0	-15.1
1.400	Pk	30.4	0.9	31.3	48.0	-16.7
2.930	Pk	31.9	1.3	33.2	48.0	-14.8
3.700	Pk	29.3	1.4	30.7	48.0	-17.3
5.470	Pk	28.4	1.8	30.2	48.0	-17.8
18.240	Pk	27.6	3.0	30.6	48.0	-17.4

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer



Signature

August 5, 2002
 Date Of Test

5 RADIATED EMISSION LIMITS RECEIVER/DIGITAL INTERFACE - §15.209

5.1 RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST PROCEDURE

Emissions apply to spurious emissions that fall in the restricted and non-restricted bands. The restricted bands are listed in Part 15.205. The maximum permitted average field strength for the restricted band is listed in Part 15.209. The IF, LO and up to the 2nd LO were investigated and tested. Channels 1, 6, and 11 were tested and investigated in the transmitting and receiving mode between 10kHz and 1GHz.

5.2 RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT

TABLE 5-1: RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900878	Rhein Tech Labs	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	N/A
900889	Hewlett Packard	85685A	RF Preselector for HP 8566B or 8568B (20Hz-2GHz)	3146A01309	11/21/02
900905	RTL	PR-1040	Amplifier	900905	N/A
900931	HP	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	5/10/03
900969	Hewlett Packard	85650A	Quasi-Peak Adapter	2412A00414	5/10/03
901053	Schaffner Chase	CBL6112B	Bi-Log Antenna (20 MHz - 2 GHz)	2648	5/22/03
901242	Rhein Tech Labs	WRT-000-0003	Wood rotating table	N/A	N/A

5.3 RECEIVER/DIGITAL INTERFACE RADIATED EMISSION LIMITS TEST DATA

TABLE 5-2: RECEIVER/DIGITAL INTERFACE RADIATED EMISSIONS

Temperature: 88°F					Humidity: 46%				
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
34.390	Qp	H	0	1.0	34.4	-9.8	24.6	40.0	-15.4
43.160	Qp	H	0	1.0	34.7	-9.7	25.0	40.0	-15.0
385.003	Qp	H	300	1.5	50.9	-7.3	43.6	46.0	-2.4
429.007	Qp	H	90	1.5	44.1	-7.0	37.1	46.0	-8.9
561.007	Qp	H	150	2.0	42.4	-6.1	36.3	46.0	-9.7
627.003	Qp	H	300	1.5	43.7	-5.7	38.0	46.0	-8.0
660.003	Qp	H	300	1.2	37.9	-5.4	32.5	46.0	-13.5

QP: RES. =100 KHZ, VID= 100 KHZ

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer



Signature

August 5, 2002
 Date Of Test

6 RADIATED EMISSION LIMITS; SPURIOUS AND HARMONICS - §15.247

6.1 RADIATED SPURIOUS EMISSION LIMITS TEST PROCEDURE

Radiated Spurious Emissions applies to harmonics and spurious emissions that fall in the restricted and non-restricted bands. The restricted bands are listed in Part 15.205. The maximum permitted average field strength for the restricted band is listed in Part 15.209. The EUT was tested in the X-Y, X-Z and Y-Z orthogonal planes.

6.2 RADIATED SPURIOUS TEST EQUIPMENT

TABLE 6-1: RADIATED SPURIOUS EMISSIONS TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900772	EMCO	3161-02	Horn Antenna	9804-1044	N/A
900321	EMCO	3161-03	Horn Antennas (4-8,2GHz)	9508-1020	N/A
900323	EMCO	3160-7	Horn Antennas (8,2-12.4 GHz)	9605-1054	N/A
900356	EMCO	3160-08	Horn Antennas (12.4 – 18 GHz)	9607-1044	N/A
900325	EMCO	3160-9	Horn Antennas (18 - 26.5 GHz)	9605-1051	N/A
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna 1-18 GHz	2310	2/26/03
900878	Rhein Tech Labs	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	N/A
900889	Hewlett Packard	85685A	RF Preselector for HP 8566B or 8568B (20Hz-2GHz)	3146A01309	11/21/02
900905	RTL	PR-1040	Amplifier	900905	N/A
900931	Hewlett Packard	8566B	Spectrum Analyzer	3138A07771	5/10/03
900666	Hewlett Packard	8449B	Microwave Preamplifier, 1 to 26.5 GHz	3008A00505	N/A
900969	Hewlett Packard	85650A	Quasi-Peak Adapter	2412A00414	5/10/03
901242	Rhein Tech Labs	WRT-000-0003	Wood rotating table	N/A	N/A

6.3 RADIATED EMISSIONS HARMONICS/SPURIOUS TEST DATA

Operating Frequency (MHz): 2412
Channel: 1

TABLE 6-2: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 1; 2412 MHZ)

Emission Frequency (MHz)	Peak Test Detector (dBuV)	Average Test Detector (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1663.55	51.1	41.9	4.2	46.1	54.0	-7.9
2379.006	32.9	32.4	10.3	42.7	54.0	-11.3
4824.0	11.0	2.4	13.6	16.0	54.0	-38.0
12060.0	22.7	14.2	16.7	30.9	54.0	-23.1
14472.0	25.2	16.7	20.8	37.5	54.0	-16.5

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer


Signature

August 5, 2002
Date Of Test

Operating Frequency (MHz): 2437
 Channel: 6

TABLE 6-3: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 6; 2437 MHZ)

Emission Frequency (MHz)	Peak Test Detector (dBuV)	Average Test Detector (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1688.636	50.3	41.3	4.8	46.1	54.0	-7.9
4872.0	10.5	1.3	13.9	15.2	54.0	-38.8
7308.0	20.4	11.8	12.0	23.8	54.0	-30.2

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	August 5, 2002 Date Of Test
---	--	--------------------------------

Operating Frequency (MHz): 2462
Channel: 11

TABLE 6-4: RADIATED EMISSIONS HARMONICS/SPURIOUS (CHANNEL 11; 2462 MHZ)

Emission Frequency (MHz)	Peak Test Detector (dBuV)	Average Test Detector (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2495.020	34.7	25.3	11.0	36.3	54.0	-17.7
2498.766	38.6	28.6	11.0	39.6	54.0	-14.4
4924.0	10.1	1.7	14.3	16.0	54.0	-38.0
7386.0	25.4	16.8	11.7	28.5	54.0	-25.5
12310.0	25.4	16.8	16.6	33.4	54.0	-20.6

PEAK: RES. =1 MHz, VID= 1MHz; AVERAGE: RES. =1 MHz, VID= 10Hz

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 5, 2002
Date Of Test

7 MODULATED BANDWIDTH - §15.247(A)(2)

7.1 MODULATED BANDWIDTH TEST PROCEDURE – MINIMUM 6 DB BANDWIDTH

The minimum 6 dB bandwidths per FCC 15.247 (a)(2) were measured using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz. The device was modulated using the maximum 11Mbps data rate. The minimum 6 dB bandwidths are presented in Table 7-2.

7.2 BANDWIDTH TEST EQUIPMENT

TABLE 7-1: BANDWIDTH TEST EQUIPMENT


RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900931	HP	8566B	Spectrum Analyzer (100Hz – 22 GHz)	3138A07771	5/10/03

7.3 BANDWIDTH TEST DATA

TABLE 7-2: MINIMUM 6 DB BANDWIDTH TEST DATA

CHANNEL	6 dB BANDWIDTH (MHz)
1	10.06
6	10.36
11	10.40


TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	August 5, 2002 Date Of Test
---	--	--------------------------------

7.4 MODULATED BANDWIDTH PLOTS

Channel Number: 1
Frequency (MHz): 2412
Resolution Bandwidth (kHz): 100
Video Bandwidth (kHz): 100
Sweep Time (ms): 20

PLOT 7-1: MODULATED BANDWIDTH CHANNEL 1

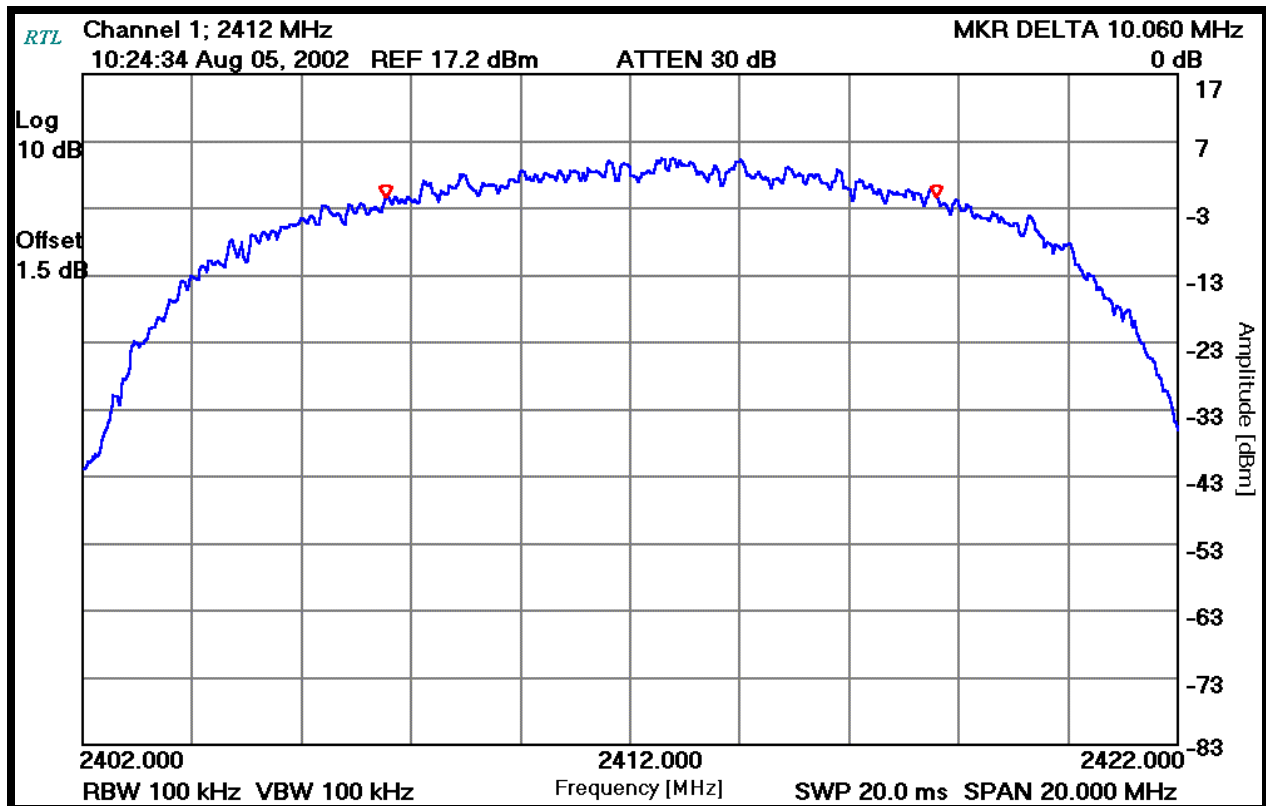

TEST PERSONNEL:


Daniel W. Baltzell
EMC Test Engineer

Daniel W. Baltzell
Signature

August 5, 2002
Date Of Test

Channel Number: 6
 Frequency (MHz): 2437
 Resolution Bandwidth (kHz): 100
 Video Bandwidth (kHz): 100
 Sweep Time (ms): 20.0

PLOT 7-2: MODULATED BANDWIDTH CHANNEL 6

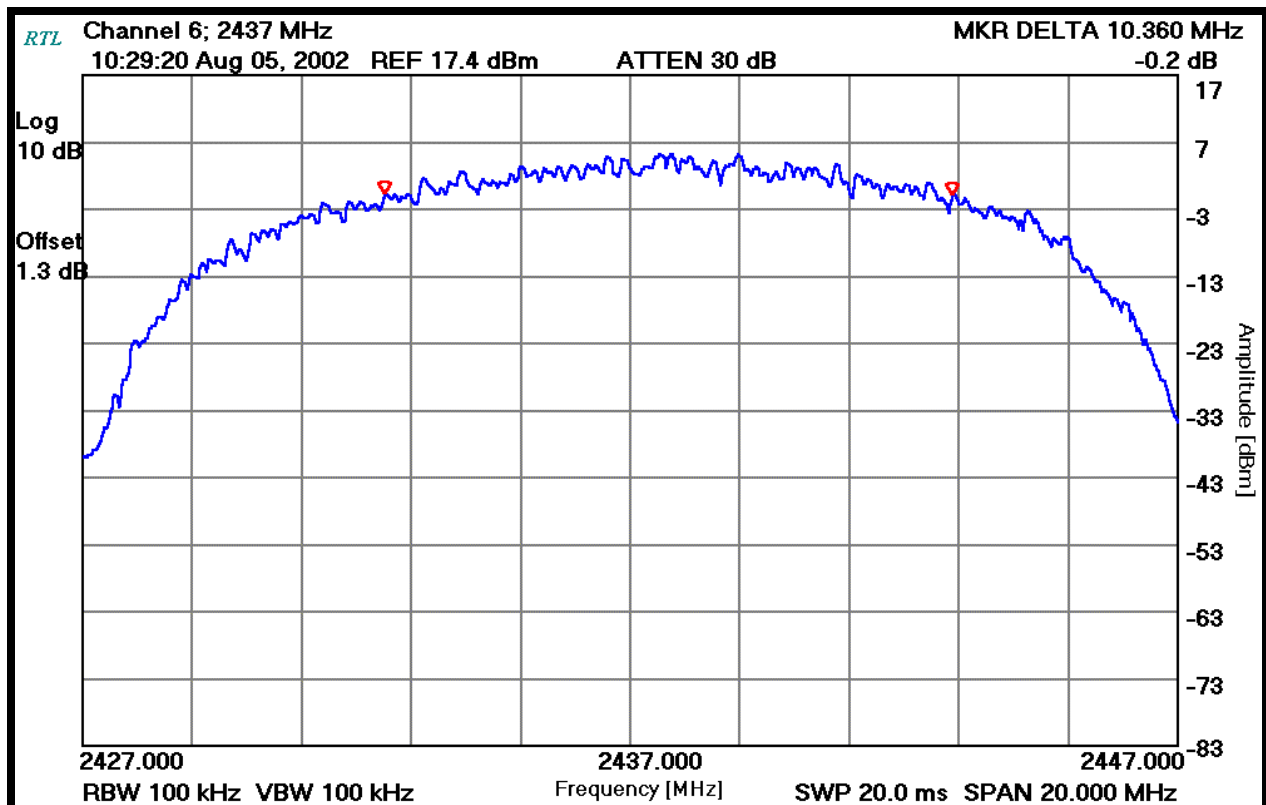

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer


Daniel W. Baltzell

Signature

August 5, 2002
 Date Of Test

Channel Number: 11
 Frequency (MHz): 2462
 Resolution Bandwidth (kHz): 100
 Video Bandwidth (kHz): 100
 Sweep Time (ms): 20.0

PLOT 7-3: MODULATED BANDWIDTH CHANNEL 11

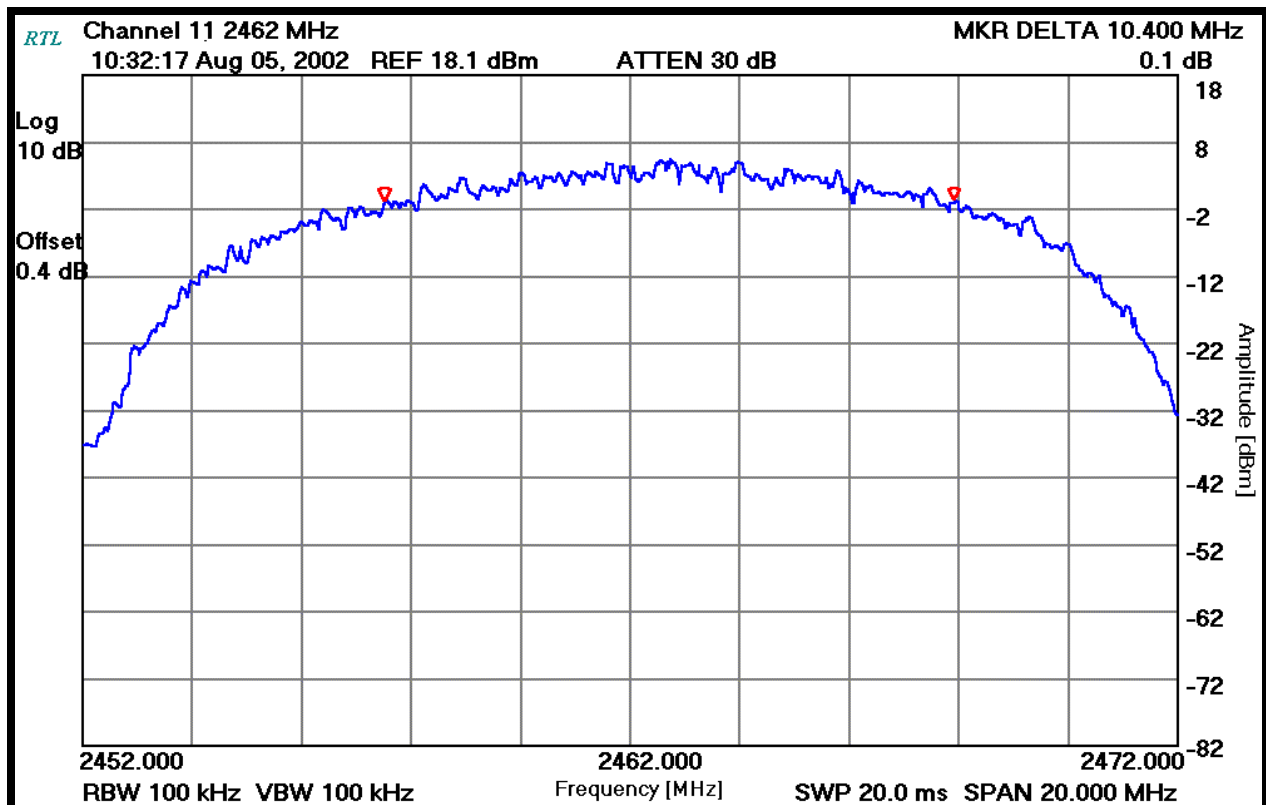

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Daniel W. Baltzell

Signature

August 5, 2002
 Date Of Test

8 PEAK OUTPUT POWER - §15.247(B)(1)

8.1 POWER OUTPUT TEST PROCEDURE

A conducted power measurement of the EUT was measured using an Agilent 4416A EPM-P Series Power Meter with a E9323A Peak and Average Power Sensor.

8.2 POWER OUTPUT TEST EQUIPMENT

TABLE 8-1: POWER OUTPUT TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
901186	Agilent Technologies	E9323A (50MHz-6GHz)	Peak & Avg. Power Sensor	US40410380	6/25/02
901184	Agilent Technologies	E4416A	EPM-P Power Meter, single channel	GB41050573	7/5/02

8.3 POWER OUTPUT TEST DATA

TABLE 8-2: POWER OUTPUT TEST DATA

FREQUENCY (MHZ)	CHANNEL	PEAK POWER CONDUCTED OUTPUT (dBm)
2412	1	17.2
2437	6	17.4
2462	11	18.1

TEST PERSONNEL:

Daniel W. Baltzell EMC Test Engineer	 Signature	August 5, 2002 Date Of Test
---	--	--------------------------------

9 ANTENNA CONDUCTED SPURIOUS EMISSIONS - §15.247(C)

9.1 ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST PROCEDURES

Antenna spurious emission per FCC 15.247(c) was measured from the EUT antenna port using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz. The modulated carrier was identified at 2.412GHz for Channel 1, 2.437GHz for Channel 6 and 2.462GHz for Channel 11. No other harmonics or spurs were found within 20 dB of the carrier level from 9kHz to the carrier 10th harmonic. See antenna conducted spurious noise table. Channels 1, 6, and 11 were investigated and tested. Notch filter used was found to have no effect on emission levels so it was not used in data presented.


9.2 ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT

TABLE 9-1: ANTENNA CONDUCTED SPURIOUS TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900931	HP	8566B	Spectrum Analyzer (100Hz – 22 GHz)	3138A07771	5/10/03
901137	Par Electronics	2.4-2.4850 GHz	Notch Filter	N/A	N/A

9.3 ANTENNA CONDUCTED SPURIOUS DATA PLOTS

PLOT 9-1: ANTENNA CONDUCTED SPURIOUS (30 MHZ-2 GHZ) CHANNEL 6

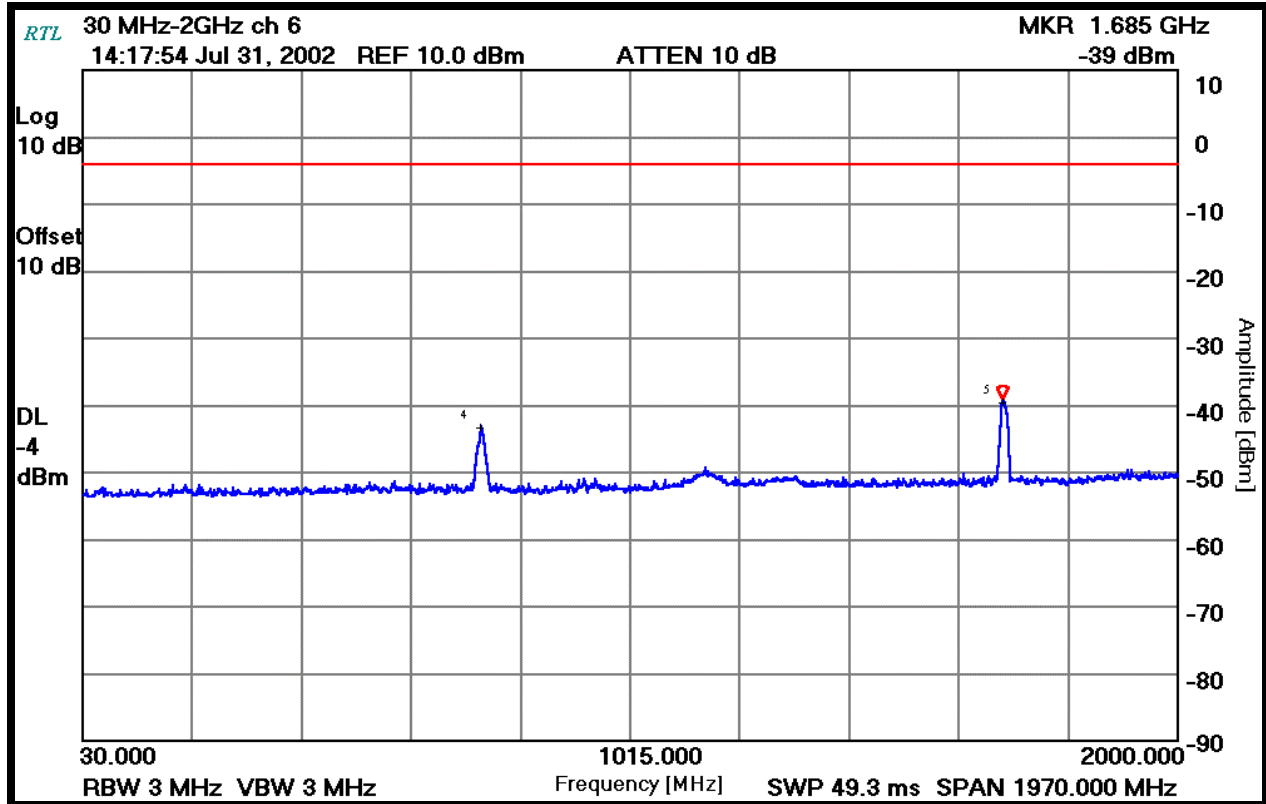

TEST PERSONNEL:


Daniel W. Baltzell
 EMC Test Engineer

Daniel W. Baltzell

Signature

July 31, 2002
 Date Of Test

PLOT 9-2: ANTENNA CONDUCTED SPURIOUS (2-24 GHZ) CHANNEL 6

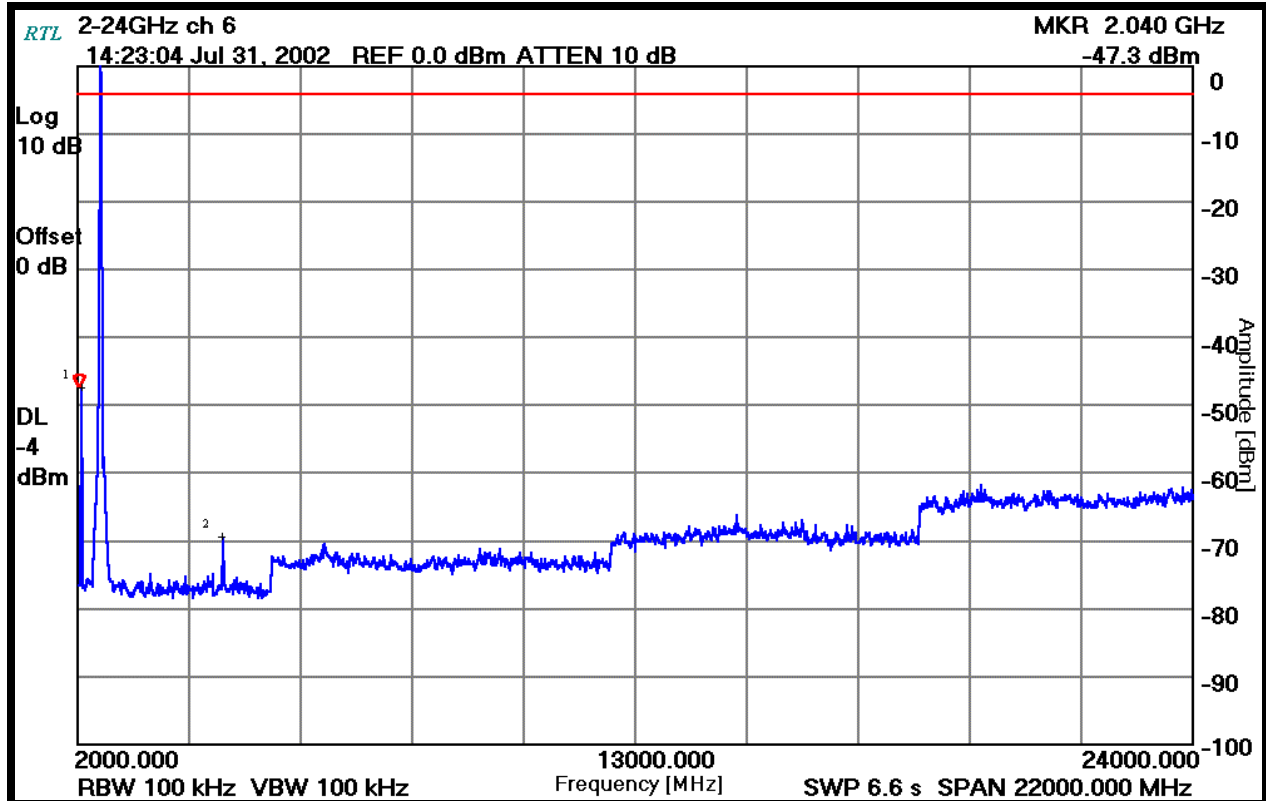

TEST PERSONNEL:

Daniel W. Baltzell
 EMC Test Engineer

Daniel W. Baltzell
 Signature

July 31, 2002
 Date Of Test

9.4 ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 1

Operating Frequency (MHz): 2412
Channel: 1
Measured Level at 100kHz (dBm): 4
Limit (dBm): -16

TABLE 9-2: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 1

Frequency (MHz)	Measured Level (dBm)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
1663.550	-49.0	53.0	-20.0	-33.0
1664.000	-48.9	52.9	-20.0	-32.9
2038.012	-46.5	50.5	-20.0	-30.5
2379.006	-53.9	57.9	-20.0	-37.9
2390.077	-51.0	55.0	-20.0	-35.0
2484.014	-57.8	61.8	-20.0	-41.8
4824.000	-69.1	73.1	-20.0	-53.1
7236.000	-74.7	78.7	-20.0	-58.7
9648.000	-73.3	77.3	-20.0	-57.3
12060.000	-71.7	75.7	-20.0	-55.7
14472.000	-68.1	72.1	-20.0	-52.1
16884.000	-68.0	72.0	-20.0	-52.0
19296.000	-62.5	66.5	-20.0	-46.5
21708.000	-62.6	66.6	-20.0	-46.6
24120.000	-67.0	71.0	-20.0	-51.0

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 5, 2002
Date Of Test

9.5 ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 6

Operating Frequency (MHz): 2437
Channel: 6
Measured Level at 100kHz (dBm): 4
Limit (dBm): -16

TABLE 9-3: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 6

Frequency (MHz)	Measured Level (dBm)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
749.064	-65.3	69.3	-20.0	-49.3
1688.636	-50.1	54.1	-20.0	-34.1
2063.010	-49.0	53.0	-20.0	-33.0
2415.100	-52.7	56.7	-20.0	-36.7
2515.024	-59.0	63.0	-20.0	-43.0
4874.000	-78.0	82.0	-20.0	-62.0
7311.000	-72.9	76.9	-20.0	-56.9
9748.000	-74.1	78.1	-20.0	-58.1
12185.000	-74.8	78.8	-20.0	-58.8
14622.000	-69.3	73.3	-20.0	-53.3
17059.000	-71.1	75.1	-20.0	-55.1
19496.000	-64.2	68.2	-20.0	-48.2
21933.000	-66.6	70.6	-20.0	-50.6
24370.000	-63.3	67.3	-20.0	-47.3

TEST PERSONNEL:

 Daniel W. Baltzell EMC Test Engineer	 Signature	August 5, 2002 Date Of Test
--	---------------	--------------------------------

9.6 ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 11

Operating Frequency (MHz): 2462
Channel: 11
Measured Level at 100kHz (dBm): 5
Limit (dBc): -15

TABLE 9-4: ANTENNA CONDUCTED SPURIOUS EMISSIONS CHANNEL 11

Frequency (MHz)	Measured Level (dBm)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
748.140	-60.4	65.4	-20.0	-45.4
1707.000	-54.5	59.5	-20.0	-39.5
1711.010	-62.4	67.4	-20.0	-47.4
2088.006	-48.7	53.7	-20.0	-33.7
2833.400	-74.9	79.9	-20.0	-59.9
4924.000	-68.3	73.3	-20.0	-53.3
7386.000	-73.7	78.7	-20.0	-58.7
9848.000	-70.7	75.7	-20.0	-55.7
12310.000	-79.0	84.0	-20.0	-64.0
14772.000	-78.5	83.5	-20.0	-63.5
17234.000	-79.8	84.8	-20.0	-64.8
19696.000	-75.4	80.4	-20.0	-60.4
22158.000	-75.6	80.6	-20.0	-60.6
24620.000	-71.8	76.8	-20.0	-56.8

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 5, 2002
Date Of Test

10 POWER SPECTRAL DENSITY - §15.247(D)

10.1 POWER SPECTRAL DENSITY TEST PROCEDURE

The Power spectral density per FCC 15.247(d) was measured using a 50 ohm spectrum analyzer with the resolution bandwidth set at 3 kHz, the video bandwidth set at 300 kHz, and the sweep time set at 1000 seconds. The spectral lines were resolved for the modulated carriers at 2.412GHz, 2.437GHz, and 2.462GHz respectively. These levels are below the +8 dBm limit. See power spectral density table and plots.

10.2 POWER SPECTRAL DENSITY TEST EQUIPMENT

TABLE 10-1: POWER SPECTRAL DENSITY TEST EQUIPMENT

RTL ASSET #	MANUFACTURER	MODEL	PART TYPE	SERIAL NUMBER	CALIBRATION DUE DATE
900931	HP	8566B	Spectrum Analyzer (100Hz – 22 GHz)	3138A07771	5/10/03

10.3 POWER SPECTRAL DENSITY TEST DATA

Operating Frequency (MHz): 2412, 2437 & 2462
Channel: 1, 6 & 11
Measured Cond. Pwr. (dBm): 17.2, 17.4, 18.1
Modulation Bandwidth (MHz): 10.4
Limit (dBm): 8

TABLE 10-2: POWER SPECTRAL DENSITY TEST DATA

CHANNEL	POWER SPECTRAL DENSITY LIMIT = +8dBm
1	-9.6
6	-9.2
11	-8.2

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer




Signature

August 5, 2002
Date Of Test

10.4 POWER SPECTRAL DENSITY PLOTS

Operating Frequency (MHz): 2412
Channel: 1
Measured Cond. Pwr. (dBm): 17.2
Bandwidth Resolution (kHz): 3
Bandwidth Video (kHz): 3
Sweep Time (sec.): 500.0

PLOT 10-1: POWER SPECTRAL DENSITY: CHANNEL 1

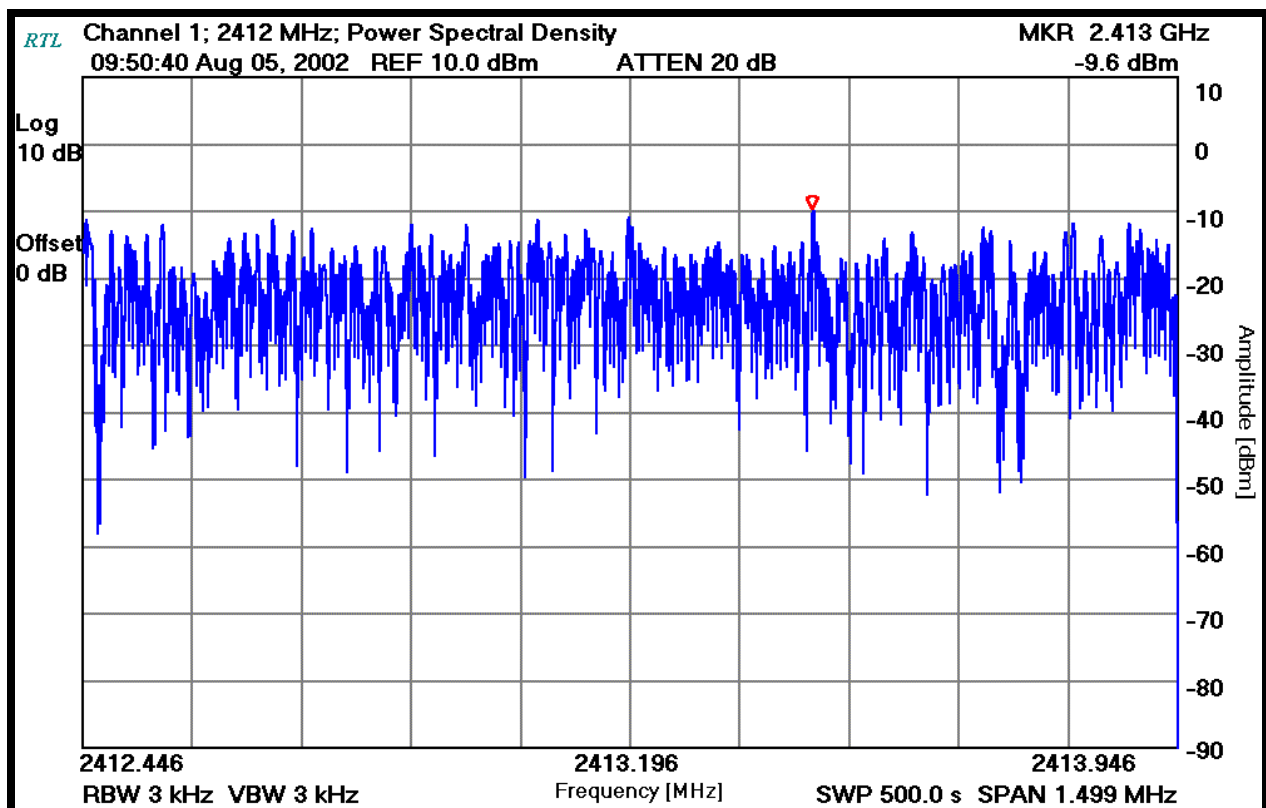

TEST PERSONNEL:


Daniel W. Baltzell
EMC Test Engineer

Signature

August 5, 2002
Date Of Test

Operating Frequency (MHz): 2437
Channel: 6
Measured Cond. Pwr. (dBm): 17.4
Bandwidth Resolution (kHz): 3
Bandwidth Video (kHz): 3
Sweep Time (sec.): 500.0

PLOT 10-2: POWER SPECTRAL DENSITY: CHANNEL 6

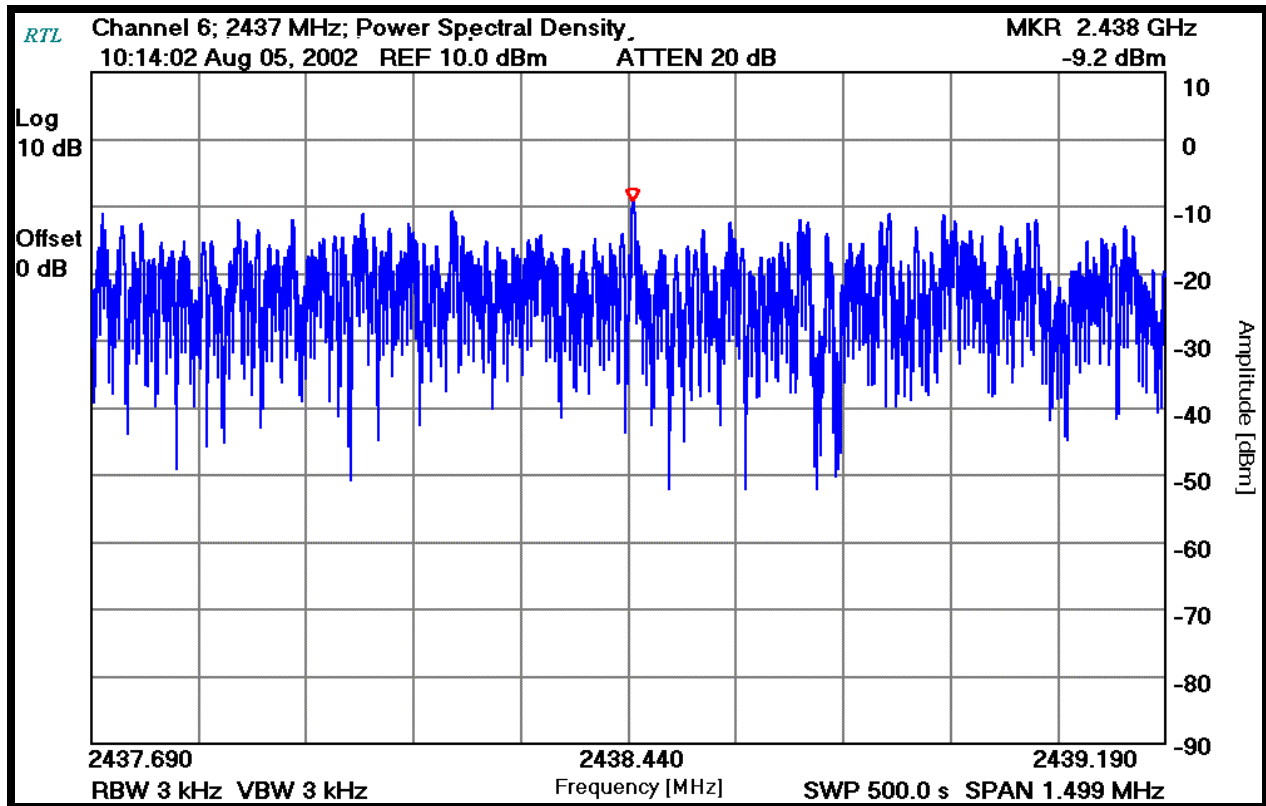

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer


Daniel W. Baltzell

Signature

August 5, 2002
Date Of Test

Operating Frequency (MHz): 2462
Channel: 11
Measured Cond. Pwr. (dBm): 18.1
Bandwidth Resolution (kHz): 3
Bandwidth Video (kHz): 3
Sweep Time (sec.): 500.0

PLOT 10-3: POWER SPECTRAL DENSITY: CHANNEL 11

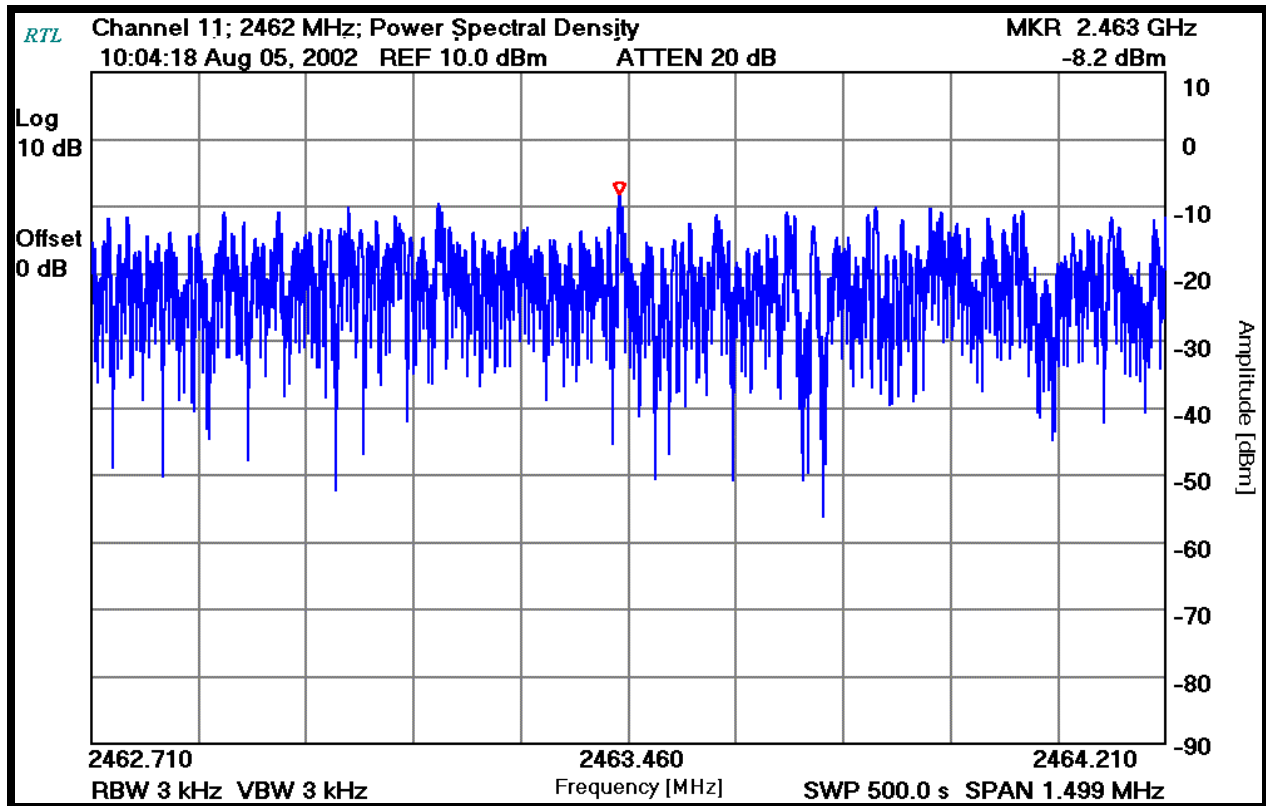

TEST PERSONNEL:

Daniel W. Baltzell
EMC Test Engineer

Signature

August 5, 2002
Date Of Test

11 CONCLUSION

The data in this measurement report shows that Vocollect, Inc. Talkman T2 Model: TT-600, FCC ID: MQOTT600-35300, complies with all the requirements of Parts 2 and 15 of the FCC Rules and Industry Canada RSS-210.