

FCC Test Report (WLAN-5GHz)

Report No.: RF160509E03B-1

FCC ID: MQT-200I10YXF

Test Model: xCE_E200I-10YXF

Series Model: xCE_E200I-10NXF, xCE_E200I-10YXX, xCE_E200I-10NXX

Received Date: May 09, 2016

Test Date: May 20 to July 29, 2016

Issued Date: Aug. 24, 2016

Applicant: XAC AUTOMATION CORP.

Address: 4F, No. 30, INDUSTRY E. RD. IX, SCIENCE-BASED INDUSTRIAL
PARK,HSINCHU,TAIWAN

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT (WLAN)	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standard	17
4 Test Types and Results	18
4.1 Radiated Emission and Bandedge Measurement	18
4.1.1 Limits of Radiated Emission and Bandedge Measurement	18
4.1.2 Test Instruments	19
4.1.3 Test Procedure	21
4.1.4 Deviation from Test Standard	21
4.1.5 Test Setup	22
4.1.6 EUT Operating Condition	22
4.1.7 Test Results	23
4.2 Conducted Emission Measurement	57
4.2.1 Limits of Conducted Emission Measurement	57
4.2.2 Test Instruments	57
4.2.3 Test Procedure	58
4.2.4 Deviation from Test Standard	58
4.2.5 Test Setup	58
4.2.6 EUT Operating Condition	58
4.2.7 Test Results (Mode 1)	59
4.2.8 Test Results (Mode 2)	61
4.3 Transmit Power Measurement	63
4.3.1 Limits of Transmit Power Measurement	63
4.3.2 Test Setup	63
4.3.3 Test Instruments	64
4.3.4 Test Procedure	64
4.3.5 Deviation from Test Standard	64
4.3.6 EUT Operating Condition	64
4.3.7 Test Result	65
4.4 Peak Power Spectral Density Measurement	72
4.4.1 Limits of Peak Power Spectral Density Measurement	72
4.4.2 Test Setup	72
4.4.3 Test Instruments	72
4.4.4 Test Procedure	73
4.4.5 Deviation from Test Standard	73
4.4.6 EUT Operating Condition	73
4.4.7 Test Results	74
4.5 Frequency Stability Measurement	79
4.5.1 Limits of Frequency Stability Measurement	79
4.5.2 Test Setup	79
4.5.3 Test Instruments	79
4.5.4 Test Procedure	79
4.5.5 Deviation from Test Standard	80

4.5.6 EUT Operating Condition	80
4.5.7 Test Results	81
4.6 6dB Bandwidth Measurement	82
4.6.1 Limits of 6dB Bandwidth Measurement	82
4.6.2 Test Setup	82
4.6.3 Test Instruments	82
4.6.4 Test Procedure	82
4.6.5 Deviation from Test Standard	82
4.6.6 EUT Operating Condition	82
4.6.7 Test Results	83
5 Pictures of Test Arrangements	85
Annex A- Radiated Out of Band Emisison (OOBE) Measurement (For U-NII-3 band)	86
Appendix – Information on the Testing Laboratories	89

Release Control Record

Issue No.	Description	Date Issued
RF160509E03B-1	Original release.	Aug. 24, 2016

1 Certificate of Conformity

Product: Terminal

Brand: XAC

Test Model: xCE_E200I-10YXF

Series Model: xCE_E200I-10NXF, xCE_E200I-10YXX, xCE_E200I-10NXX

Sample Status: ENGINEERING SAMPLE

Applicant: XAC AUTOMATION CORP.

Test Date: May 20 to July 29, 2016

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Midoli Peng , **Date:** Aug. 24, 2016
Midoli Peng / Specialist

Approved by : May Chen , **Date:** Aug. 24, 2016
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (SECTION 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -3.41dB at 0.43906MHz.
15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement*	Pass	Meet the requirement of limit. Minimum passing margin is -0.8dB at 5350.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.37 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.65 dB
	6GHz ~ 18GHz	3.88 dB
	18GHz ~ 40GHz	4.11 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (WLAN)

Product	Terminal
Brand	XAC
Test Model	xCE_E200I-10YXF
Series Model	xCE_E200I-10NXF, xCE_E200I-10YXX, xCE_E200I-10NXX
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 24V
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 150Mbps
Operating Frequency	For 15.247 2.412 ~ 2.462GHz
	For 15.407 5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz, 5.5 ~ 5.7GHz, 5.745 ~ 5.825GHz
Number of Channel	For 15.247 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
	For 15.407 24 for 802.11b, 802.11g, 802.11n (HT20) 11 for 802.11n (HT40)
Output Power	For 15.247 802.11n (HT20): 80.168mW
	For 15.407 5.18 ~ 5.24GHz 802.11n (HT40): 11.324mW 5.26 ~ 5.32GHz 802.11n (HT40): 11.429mW 5.5 ~ 5.7GHz 802.11n (HT40): 7.925mW 5.745 ~ 5.825GHz 802.11n (HT40): 7.709mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter (Optional) x 1
Data Cable Supplied	NA

Note:

- All models are listed as below.

Brand	Model	Difference	
XAC	xCE_E200I-10YXF	with Modem	with camera
	xCE_E200I-10YXX		without camera
	xCE_E200I-10NXF	without Modem	with camera
	xCE_E200I-10NXX		without camera

From the above models, model: xCE_E200I-10YXF was the worst case and it was selected as representative model for the test and its data was recorded in this report.

- There are WLAN and Bluetooth technology used for the EUT.
- For WLAN: 2.4GHz & 5GHz technology cannot transmit at same time.

4. WLAN and Bluetooth coexistence mode:

Condition	Technology	
1	WLAN (2.4GHz)	Bluetooth
2	WLAN (5GHz)	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

5. The EUT power needs to be supplied from one power adapter, the information is as below table:

Brand	Model No.	Spec.
FSP GROUP INC	FSP060-DAAN2	Input: 100-240Vac, 1.5A, 50-60Hz AC cable: unshielded, 1.8m Output: 24V, 2.5A DC cable: unshielded, 1.5m with one core

6. The antenna provided to the EUT, please refer to the following table:

Brand	Model	Antenna Type	Connecter Type	Antenna Gain(dBi)	Frequency range
INPAQ	ACM3-5036-A1-CC-S	Chip	NA	3	2.4~2.4835GHz 5.15~5.85GHz

7. The EUT incorporates a SISO function.

2.4GHz			
Modulation Mode	Data Rate (MCS)	Tx & Rx Configuration	
802.11b	1 ~ 11Mbps	1TX	1RX
802.11g	6 ~ 54Mbps	1TX	1RX
802.11n (HT20)	MCS 0~7	1TX	1RX
802.11n (HT40)	MCS 0~7	1TX	1RX
5GHz			
Modulation Mode	Data Rate (MCS)	Tx & Rx Configuration	
802.11a	6 ~ 54Mbps	1TX	1RX
802.11n (HT20)	MCS 0~7	1TX	1RX
802.11n (HT40)	MCS 0~7	1TX	1RX

8. The EUT was pre-tested under following test modes:

Pre-test Mode	Description
Mode A	Adapter (FSP060-DAAN2)
Mode B	Print + Adapter (FSP120-AAAN2)

The worst radiated emission was found in **Mode A**. Therefore only the test data of the modes were recorded in this report.

9. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

FOR 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

FOR 5500 ~ 5700MHz

11 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz		

5 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz		

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
1	√	√	√	√	EUT with Adapter (FSP060-DAAN2)
2	-	-	√	-	EUT with Print + Adapter (FSP120-AAAN2)

Where **RE \geq 1G**: Radiated Emission above 1GHz **RE $<$ 1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: 1. "-" means no effect.

2. The EUT's monitor had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Z-plane.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11n (HT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11n (HT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6
802.11n (HT20)		52 to 64	52, 60, 64	OFDM	BPSK	6.5
802.11n (HT40)		54 to 62	54, 62	OFDM	BPSK	13.5
802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6
802.11n (HT20)		100 to 140	100, 116, 140	OFDM	BPSK	6.5
802.11n (HT40)		102 to 134	102, 110, 134	OFDM	BPSK	13.5
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11n (HT20)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11n (HT40)		151 to 159	151, 159	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11n (HT40)	5180-5320	36 to 64	54	OFDM	BPSK	13.5
	5500-5700	100 to 140				
	5745-5825	149 to 165				

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11n (HT40)	5180-5320	36 to 64	54	OFDM	BPSK	13.5
	5500-5700	100 to 140				
	5745-5825	149 to 165				

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11n (HT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11n (HT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6
802.11n (HT20)		52 to 64	52, 60, 64	OFDM	BPSK	6.5
802.11n (HT40)		54 to 62	54, 62	OFDM	BPSK	13.5
802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6
802.11n (HT20)		100 to 140	100, 116, 140	OFDM	BPSK	6.5
802.11n (HT40)		102 to 134	102, 110, 134	OFDM	BPSK	13.5
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11n (HT20)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11n (HT40)		151 to 159	151, 159	OFDM	BPSK	13.5

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	JyunChun Lin
RE<1G	25deg. C, 69%RH	120Vac, 60Hz	Weiwei Lo
PLC	25deg. C, 61%RH	120Vac, 60Hz	JyunChun Lin
APCM	23deg. C, 65%RH	120Vac, 60Hz	Anderson Chen


3.3 Duty Cycle of Test Signal

Duty cycle of test signal is < 98 %, duty factor is required

802.11a: Duty cycle = $2.725/3.055 = 0.892$, Duty factor = $10 * \log(1/0.892) = 0.5$

802.11n (HT20): Duty cycle = $2.532/2.867 = 0.883$, Duty factor = $10 * \log(1/0.883) = 0.54$

802.11n (HT40): Duty cycle = $1.233/1.561 = 0.79$, Duty factor = $10 * \log(1/0.79) = 1.02$

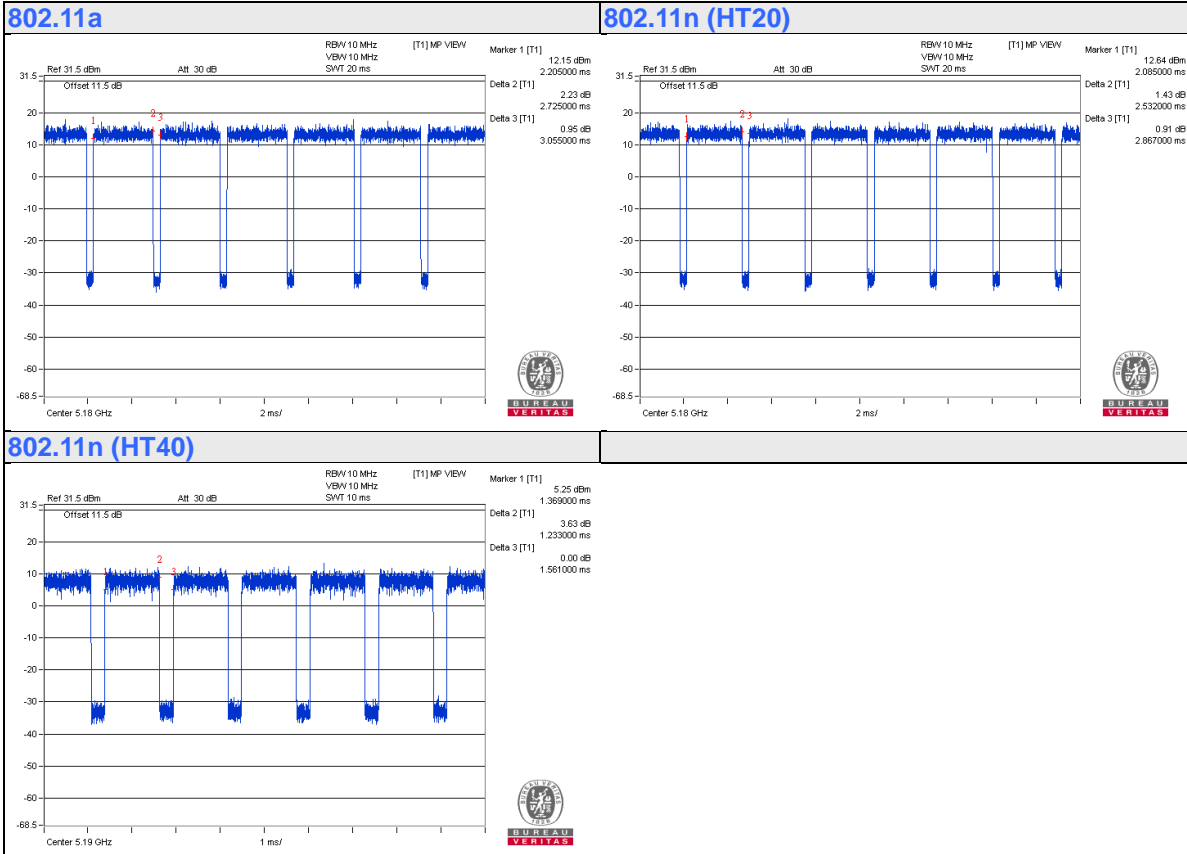

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	iPod	Apple	MC749TA/A	CC4DMFJUDFDM	NA	Provided by Lab
B.	iPod	Apple	MC749TA/A	CC4DN29UDFDM	NA	Provided by Lab
C.	iPod	Apple	MD778TA/A	CC4JMFL0F4T1	NA	Provided by Lab
D.	iPod	Apple	MC749TA/A	CC4DN25WDFDM	NA	Provided by Lab
E.	iPod	Apple	MD778TA/A	CC4JG3SSF4T1	NA	Provided by Lab
F.	Notebook computer	DELL	PP32LA	GSLB32S	FCC DoC	Provided by Lab
G.	Earphone	Hawk	HKC920	H003	FCC DoC	Provided by Lab
H.	Micro SD	Sandisk	2G	NA	NA	Provided by Lab
I.	Adapter	FSP GROUP INC	FSP060-DAAN2	NA	NA	Supplied by client
J.	Print	XAC	TP72-SA	NA	NA	Supplied by client
K.	Adapter	FSP GROUP INC	FSP120-AAAN2	NA	NA	Supplied by client

Note:


1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.5	No	1	Supplied by client
2.	AC Cable	1	1.8	No	0	Supplied by client
3.	RJ 11 Cable	1	1.5	No	0	Supplied by client
4.	RJ11 To RS232 Cable	1	1.5	No	0	Supplied by client
5.	RJ45 Cable	1	10	No	0	Provided by Lab
6.	RJ11 To RS232 Cable	1	1.5	No	0	Supplied by client
7.	RJ11 To RS232 Cable	1	1.5	No	0	Supplied by client
8.	USB Cable	1	0.1	Yes	0	Provided by Lab
9.	USB Cable	1	0.1	Yes	0	Provided by Lab
10.	USB Cable	1	0.1	Yes	0	Provided by Lab
11.	USB Cable	1	0.1	Yes	0	Provided by Lab
12.	USB Cable	1	0.1	Yes	0	Provided by Lab
13.	Audio Cable	1	1.3	No	0	Provided by Lab
14.	USB Cable	1	1.8	Yes	0	Supplied by client
15.	DC Cable	1	1	No	0	Supplied by client
16.	DC Cable	1	1.5	No	1	Supplied by client
17.	AC Cable	1	1.8	No	0	Supplied by client


Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

Adapter Mode

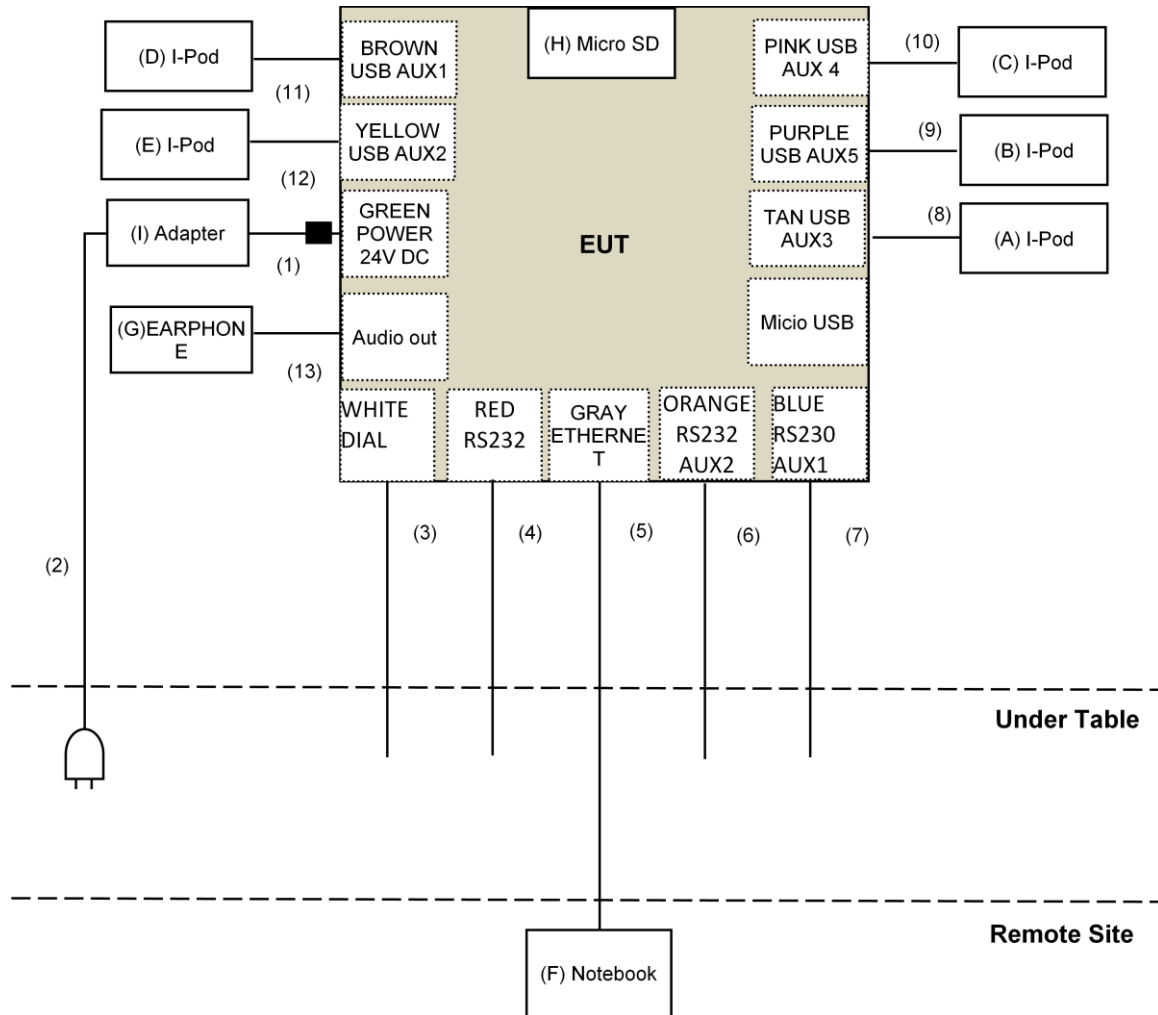

Print Mode

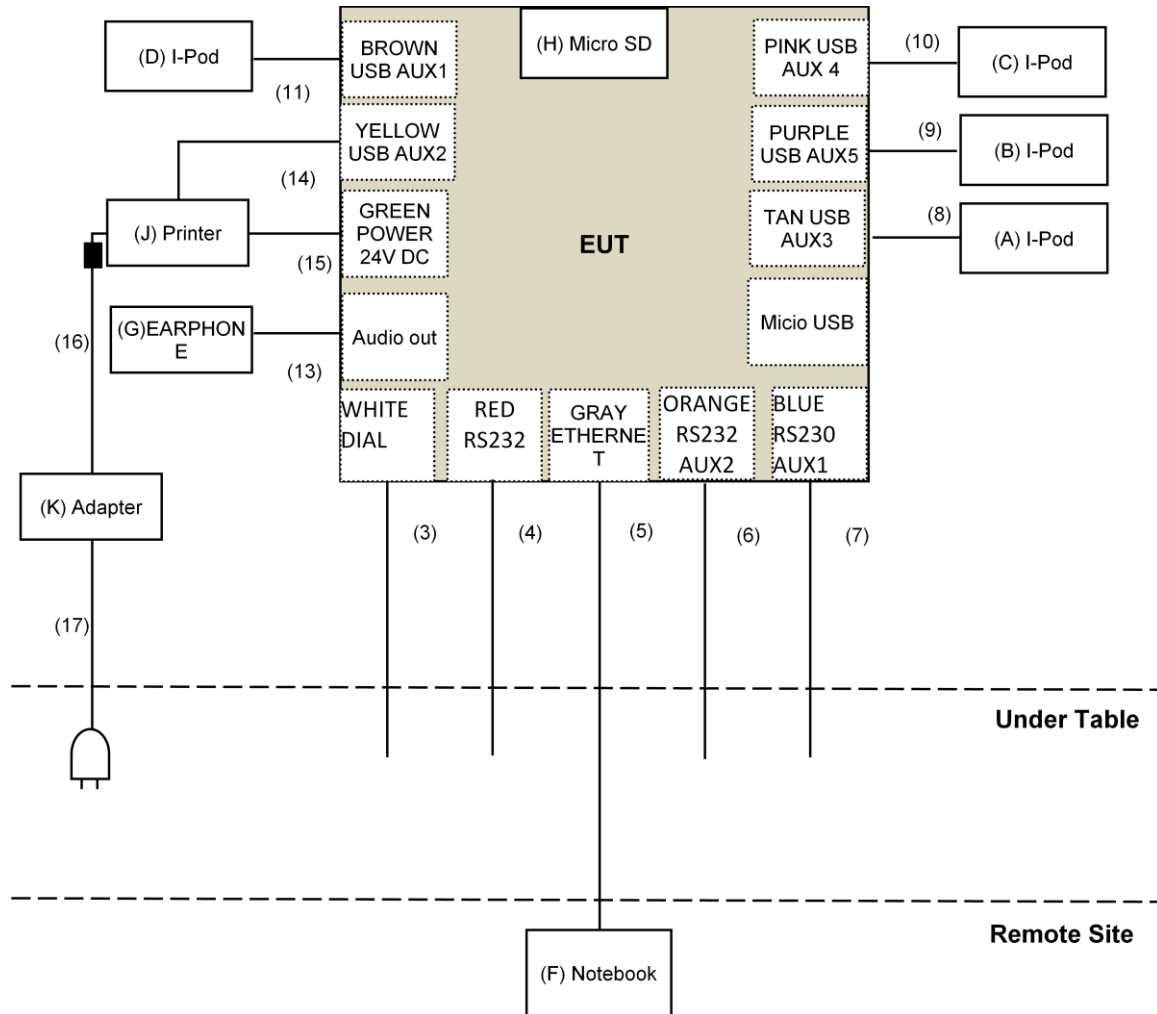

3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v01r03

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v01r03		Field Strength at 3m	
		PK:74 (dBμV/m)	AV:54 (dBμV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBμV/m) ^{*1} PK:105.2 (dBμV/m) ^{*2} PK: 110.8(dBμV/m) ^{*3} PK:122.2 (dBμV/m) ^{*4}
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

For above 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210105	July 24, 2015	July 23, 2016
Horn_Antenna AISI	AIH.8018	000032009111 0	Jan. 19, 2016	Jan. 18, 2017
Pre-Amplifier Agilent	8449B	3008A02578	June 23, 2015	June 22, 2016
RF Cable	NA	131205 131216 131217 SNMY23684/ 4	Jan. 15, 2016	Jan. 14, 2017
Spectrum Analyzer Agilent	E4446A	MY48250254	Nov. 25, 2015	Nov. 24, 2016
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Dec. 11, 2015	Dec. 10, 2016
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Jan. 18, 2016	Jan. 17, 2017
RF Cable	SUCOFLEX 102	36442/2 36434/2	Dec. 10, 2015	Dec.09, 2016
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	CM100	NA	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-WD01	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. G.
3. The FCC Site Registration No. is 966073.
4. The CANADA Site Registration No. is IC 7450H-2.
5. Tested Date: May 20, 2016

For below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210105	July 06, 2016	July 05, 2017
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 11, 2015	Nov. 10, 2016
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Jan. 04, 2016	Jan. 03, 2017
RF Cable	8D-FB	CHGCAB-001 -1 CHGCAB-001 -2	Oct. 03, 2015	Oct. 02, 2016
	RF-141	CHGCAB-004	Oct. 03, 2015	Oct. 02, 2016
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	CM100	NA	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-WD01	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Loop antenna was used for all emissions below 30 MHz.
4. The test was performed in 966 Chamber No. G.
5. The FCC Site Registration No. is 966073.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: July 25, 2016

4.1.3 Test Procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

<Frequency Range below 1GHz>

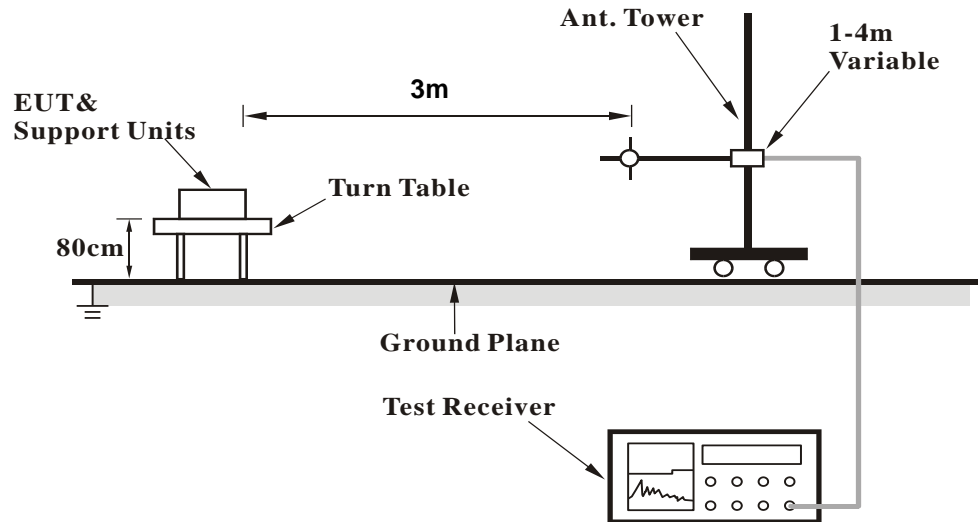

<Frequency Range above 1GHz>

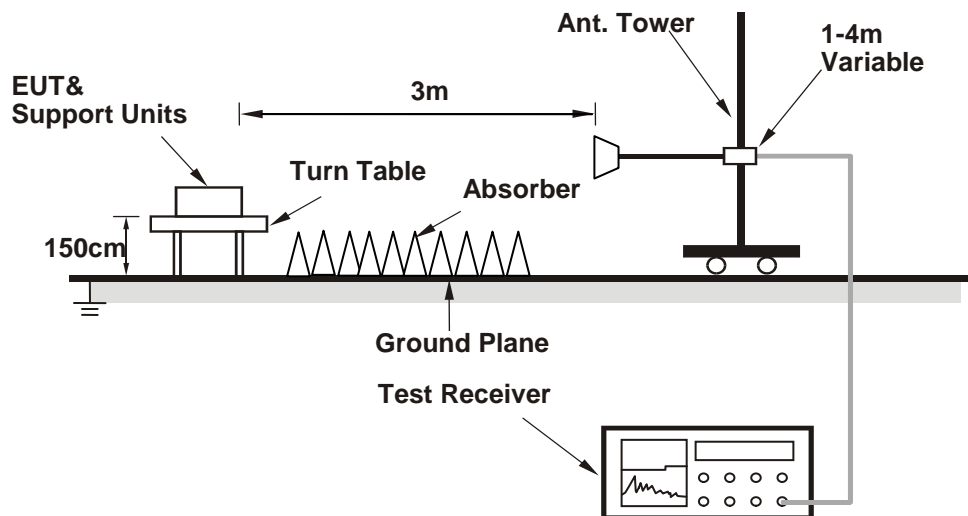

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

1. Connect the EUT with the support unit F (Notebook Computer) which is placed on remote site.
2. The communication partner run test program "Run hyperterm terminal paste command" to enable EUT under transmission/receiving condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data :

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.80 PK	74.00	-14.20	1.48 H	334	49.50	10.30
2	5150.00	42.60 AV	54.00	-11.40	1.48 H	334	32.30	10.30
3	*5180.00	105.00 PK			1.48 H	334	94.40	10.60
4	*5180.00	94.20 AV			1.48 H	334	83.60	10.60
5	#10360.00	56.80 PK	74.00	-17.20	1.50 H	220	40.00	16.80
6	#10360.00	44.00 AV	54.00	-10.00	1.50 H	220	27.20	16.80
7	15540.00	61.00 PK	74.00	-13.00	1.62 H	262	38.50	22.50
8	15540.00	48.00 AV	54.00	-6.00	1.62 H	262	25.50	22.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.60 PK	74.00	-13.40	1.77 V	27	50.30	10.30
2	5150.00	43.80 AV	54.00	-10.20	1.77 V	27	33.50	10.30
3	*5180.00	108.30 PK			1.77 V	27	97.70	10.60
4	*5180.00	97.70 AV			1.77 V	27	87.10	10.60
5	#10360.00	57.10 PK	74.00	-16.90	1.55 V	48	40.30	16.80
6	#10360.00	44.30 AV	54.00	-9.70	1.55 V	48	27.50	16.80
7	15540.00	60.60 PK	74.00	-13.40	1.48 V	62	38.10	22.50
8	15540.00	47.80 AV	54.00	-6.20	1.48 V	62	25.30	22.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	104.60 PK			1.43 H	324	93.90	10.70
2	*5200.00	94.00 AV			1.43 H	324	83.30	10.70
3	#10400.00	57.60 PK	74.00	-16.40	1.49 H	211	40.70	16.90
4	#10400.00	44.70 AV	54.00	-9.30	1.49 H	211	27.80	16.90
5	15600.00	60.30 PK	74.00	-13.70	1.61 H	251	37.80	22.50
6	15600.00	47.70 AV	54.00	-6.30	1.61 H	251	25.20	22.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	107.40 PK			1.74 V	27	96.70	10.70
2	*5200.00	97.30 AV			1.74 V	27	86.60	10.70
3	#10400.00	57.50 PK	74.00	-16.50	1.53 V	55	40.60	16.90
4	#10400.00	44.60 AV	54.00	-9.40	1.53 V	55	27.70	16.90
5	15600.00	59.90 PK	74.00	-14.10	1.52 V	48	37.40	22.50
6	15600.00	47.40 AV	54.00	-6.60	1.52 V	48	24.90	22.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	105.10 PK			1.46 H	331	94.40	10.70
2	*5240.00	94.00 AV			1.46 H	331	83.30	10.70
3	5350.00	60.20 PK	74.00	-13.80	1.46 H	331	49.60	10.60
4	5350.00	42.70 AV	54.00	-11.30	1.46 H	331	32.10	10.60
5	#10480.00	57.10 PK	74.00	-16.90	1.48 H	227	40.60	16.50
6	#10480.00	44.10 AV	54.00	-9.90	1.48 H	227	27.60	16.50
7	15720.00	60.60 PK	74.00	-13.40	1.60 H	250	38.00	22.60
8	15720.00	47.80 AV	54.00	-6.20	1.60 H	250	25.20	22.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	107.30 PK			1.75 V	24	96.60	10.70
2	*5240.00	97.30 AV			1.75 V	24	86.60	10.70
3	5350.00	54.90 PK	74.00	-19.10	1.75 V	24	44.30	10.60
4	5350.00	42.70 AV	54.00	-11.30	1.75 V	24	32.10	10.60
5	#10480.00	57.20 PK	74.00	-16.80	1.60 V	37	40.70	16.50
6	#10480.00	44.70 AV	54.00	-9.30	1.60 V	37	28.20	16.50
7	15720.00	60.80 PK	74.00	-13.20	1.51 V	78	38.20	22.60
8	15720.00	48.20 AV	54.00	-5.80	1.51 V	78	25.60	22.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5260.00	105.30 PK			1.46 H	322	94.70	10.60
2	*5260.00	94.30 AV			1.46 H	322	83.70	10.60
3	5350.00	60.40 PK	74.00	-13.60	1.46 H	322	49.80	10.60
4	5350.00	42.90 AV	54.00	-11.10	1.46 H	322	32.30	10.60
5	#10520.00	56.70 PK	74.00	-17.30	1.54 H	219	40.40	16.30
6	#10520.00	43.80 AV	54.00	-10.20	1.54 H	219	27.50	16.30
7	15780.00	60.90 PK	74.00	-13.10	1.66 H	262	38.50	22.40
8	15780.00	48.30 AV	54.00	-5.70	1.66 H	262	25.90	22.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5260.00	107.60 PK			1.74 V	25	97.00	10.60
2	*5260.00	97.40 AV			1.74 V	25	86.80	10.60
3	5350.00	55.80 PK	74.00	-18.20	1.74 V	25	45.20	10.60
4	5350.00	43.00 AV	54.00	-11.00	1.74 V	25	32.40	10.60
5	#10520.00	57.40 PK	74.00	-16.60	1.60 V	40	41.10	16.30
6	#10520.00	44.30 AV	54.00	-9.70	1.60 V	40	28.00	16.30
7	15780.00	61.10 PK	74.00	-12.90	1.44 V	70	38.70	22.40
8	15780.00	48.20 AV	54.00	-5.80	1.44 V	70	25.80	22.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	104.90 PK			1.48 H	331	94.30	10.60
2	*5300.00	94.00 AV			1.48 H	331	83.40	10.60
3	5350.00	59.90 PK	74.00	-14.10	1.48 H	331	49.30	10.60
4	5350.00	42.50 AV	54.00	-11.50	1.48 H	331	31.90	10.60
5	10600.00	57.30 PK	74.00	-16.70	1.50 H	220	41.10	16.20
6	10600.00	44.40 AV	54.00	-9.60	1.50 H	220	28.20	16.20
7	15900.00	61.10 PK	74.00	-12.90	1.64 H	276	38.60	22.50
8	15900.00	48.20 AV	54.00	-5.80	1.64 H	276	25.70	22.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	107.30 PK			1.68 V	23	96.70	10.60
2	*5300.00	97.50 AV			1.68 V	23	86.90	10.60
3	5350.00	56.30 PK	74.00	-17.70	1.68 V	23	45.70	10.60
4	5350.00	43.20 AV	54.00	-10.80	1.68 V	23	32.60	10.60
5	10600.00	57.10 PK	74.00	-16.90	1.50 V	62	40.90	16.20
6	10600.00	44.30 AV	54.00	-9.70	1.50 V	62	28.10	16.20
7	15900.00	60.60 PK	74.00	-13.40	1.51 V	55	38.10	22.50
8	15900.00	48.00 AV	54.00	-6.00	1.51 V	55	25.50	22.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	104.70 PK			1.40 H	334	94.10	10.60
2	*5320.00	93.80 AV			1.40 H	334	83.20	10.60
3	5350.00	60.00 PK	74.00	-14.00	1.40 H	334	49.40	10.60
4	5350.00	42.70 AV	54.00	-11.30	1.40 H	334	32.10	10.60
5	10640.00	57.00 PK	74.00	-17.00	1.48 H	209	40.50	16.50
6	10640.00	44.30 AV	54.00	-9.70	1.48 H	209	27.80	16.50
7	15960.00	60.60 PK	74.00	-13.40	1.56 H	248	37.60	23.00
8	15960.00	48.00 AV	54.00	-6.00	1.56 H	248	25.00	23.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	107.40 PK			1.68 V	22	96.80	10.60
2	*5320.00	97.20 AV			1.68 V	22	86.60	10.60
3	5350.00	63.40 PK	74.00	-10.60	1.68 V	22	52.80	10.60
4	5350.00	44.90 AV	54.00	-9.10	1.68 V	22	34.30	10.60
5	10640.00	56.70 PK	74.00	-17.30	1.52 V	47	40.20	16.50
6	10640.00	43.90 AV	54.00	-10.10	1.52 V	47	27.40	16.50
7	15960.00	60.60 PK	74.00	-13.40	1.49 V	47	37.60	23.00
8	15960.00	47.70 AV	54.00	-6.30	1.49 V	47	24.70	23.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	59.50 PK	74.00	-14.50	1.39 H	339	48.40	11.10
2	#5470.00	42.20 AV	54.00	-11.80	1.39 H	339	31.10	11.10
3	*5500.00	104.50 PK			1.39 H	339	93.30	11.20
4	*5500.00	93.20 AV			1.39 H	339	82.00	11.20
5	11000.00	57.20 PK	74.00	-16.80	1.47 H	207	40.00	17.20
6	11000.00	44.20 AV	54.00	-9.80	1.47 H	207	27.00	17.20
7	#16500.00	60.80 PK	74.00	-13.20	1.65 H	251	35.90	24.90
8	#16500.00	48.20 AV	54.00	-5.80	1.65 H	251	23.30	24.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	59.40 PK	74.00	-14.60	1.66 V	19	48.30	11.10
2	#5470.00	44.30 AV	54.00	-9.70	1.66 V	19	33.20	11.10
3	*5500.00	106.90 PK			1.66 V	19	95.70	11.20
4	*5500.00	96.70 AV			1.66 V	19	85.50	11.20
5	11000.00	57.40 PK	74.00	-16.60	1.61 V	41	40.20	17.20
6	11000.00	44.70 AV	54.00	-9.30	1.61 V	41	27.50	17.20
7	#16500.00	60.70 PK	74.00	-13.30	1.46 V	60	35.80	24.90
8	#16500.00	48.00 AV	54.00	-6.00	1.46 V	60	23.10	24.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	60.10 PK	74.00	-13.90	1.39 H	326	49.00	11.10
2	#5470.00	42.70 AV	54.00	-11.30	1.39 H	326	31.60	11.10
3	*5580.00	104.50 PK			1.39 H	326	93.20	11.30
4	*5580.00	93.30 AV			1.39 H	326	82.00	11.30
5	11160.00	56.50 PK	74.00	-17.50	1.53 H	225	38.70	17.80
6	11160.00	44.00 AV	54.00	-10.00	1.53 H	225	26.20	17.80
7	#16740.00	60.60 PK	74.00	-13.40	1.67 H	276	35.00	25.60
8	#16740.00	47.70 AV	54.00	-6.30	1.67 H	276	22.10	25.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	55.90 PK	74.00	-18.10	1.62 V	18	44.80	11.10
2	#5470.00	43.00 AV	54.00	-11.00	1.62 V	18	31.90	11.10
3	*5580.00	106.80 PK			1.62 V	18	95.50	11.30
4	*5580.00	96.70 AV			1.62 V	18	85.40	11.30
5	11160.00	57.00 PK	74.00	-17.00	1.57 V	35	39.20	17.80
6	11160.00	44.20 AV	54.00	-9.80	1.57 V	35	26.40	17.80
7	#16740.00	60.60 PK	74.00	-13.40	1.52 V	71	35.00	25.60
8	#16740.00	48.00 AV	54.00	-6.00	1.52 V	71	22.40	25.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	104.40 PK			1.40 H	319	92.90	11.50
2	*5700.00	93.30 AV			1.40 H	319	81.80	11.50
3	#5725.00	60.30 PK	74.00	-13.70	1.40 H	319	48.80	11.50
4	#5725.00	42.70 AV	54.00	-11.30	1.40 H	319	31.20	11.50
5	11400.00	57.40 PK	74.00	-16.60	1.48 H	234	39.80	17.60
6	11400.00	44.30 AV	54.00	-9.70	1.48 H	234	26.70	17.60
7	#17100.00	60.30 PK	74.00	-13.70	1.58 H	253	33.40	26.90
8	#17100.00	47.80 AV	54.00	-6.20	1.58 H	253	20.90	26.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	106.60 PK			1.83 V	19	95.10	11.50
2	*5700.00	96.60 AV			1.83 V	19	85.10	11.50
3	#5725.00	61.50 PK	74.00	-12.50	1.83 V	19	50.00	11.50
4	#5725.00	44.90 AV	54.00	-9.10	1.83 V	19	33.40	11.50
5	11400.00	57.00 PK	74.00	-17.00	1.50 V	36	39.40	17.60
6	11400.00	44.40 AV	54.00	-9.60	1.50 V	36	26.80	17.60
7	#17100.00	61.10 PK	74.00	-12.90	1.51 V	75	34.20	26.90
8	#17100.00	48.10 AV	54.00	-5.90	1.51 V	75	21.20	26.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	104.30 PK			1.43 H	326	92.60	11.70
2	*5745.00	93.10 AV			1.43 H	326	81.40	11.70
3	11490.00	56.70 PK	74.00	-17.30	1.51 H	220	38.80	17.90
4	11490.00	43.90 AV	54.00	-10.10	1.51 H	220	26.00	17.90
5	#17235.00	61.00 PK	74.00	-13.00	1.59 H	277	33.80	27.20
6	#17235.00	48.30 AV	54.00	-5.70	1.59 H	277	21.10	27.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	106.50 PK			1.83 V	18	94.80	11.70
2	*5745.00	96.40 AV			1.83 V	18	84.70	11.70
3	11490.00	57.00 PK	74.00	-17.00	1.53 V	59	39.10	17.90
4	11490.00	44.40 AV	54.00	-9.60	1.53 V	59	26.50	17.90
5	#17235.00	61.30 PK	74.00	-12.70	1.44 V	69	34.10	27.20
6	#17235.00	48.50 AV	54.00	-5.50	1.44 V	69	21.30	27.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	103.50 PK			1.44 H	327	91.60	11.90
2	*5785.00	92.40 AV			1.44 H	327	80.50	11.90
3	11570.00	57.50 PK	74.00	-16.50	1.44 H	222	39.50	18.00
4	11570.00	44.40 AV	54.00	-9.60	1.44 H	222	26.40	18.00
5	#17355.00	61.20 PK	74.00	-12.80	1.57 H	260	33.90	27.30
6	#17355.00	48.60 AV	54.00	-5.40	1.57 H	260	21.30	27.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	105.60 PK			1.83 V	17	93.70	11.90
2	*5785.00	95.50 AV			1.83 V	17	83.60	11.90
3	11570.00	57.40 PK	74.00	-16.60	1.56 V	64	39.40	18.00
4	11570.00	44.80 AV	54.00	-9.20	1.56 V	64	26.80	18.00
5	#17355.00	61.60 PK	74.00	-12.40	1.48 V	76	34.30	27.30
6	#17355.00	48.90 AV	54.00	-5.10	1.48 V	76	21.60	27.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	103.70 PK			1.47 H	327	91.80	11.90
2	*5825.00	92.80 AV			1.47 H	327	80.90	11.90
3	11650.00	57.10 PK	74.00	-16.90	1.46 H	222	39.10	18.00
4	11650.00	44.00 AV	54.00	-10.00	1.46 H	222	26.00	18.00
5	#17475.00	61.60 PK	74.00	-12.40	1.52 H	273	33.80	27.80
6	#17475.00	48.80 AV	54.00	-5.20	1.52 H	273	21.00	27.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	105.80 PK			2.03 V	15	93.90	11.90
2	*5825.00	96.00 AV			2.03 V	15	84.10	11.90
3	11650.00	57.30 PK	74.00	-16.70	1.56 V	62	39.30	18.00
4	11650.00	44.60 AV	54.00	-9.40	1.56 V	62	26.60	18.00
5	#17475.00	61.80 PK	74.00	-12.20	1.44 V	60	34.00	27.80
6	#17475.00	49.10 AV	54.00	-4.90	1.44 V	60	21.30	27.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.20 PK	74.00	-13.80	1.48 H	350	49.90	10.30
2	5150.00	42.70 AV	54.00	-11.30	1.48 H	350	32.40	10.30
3	*5180.00	105.30 PK			1.48 H	350	94.70	10.60
4	*5180.00	94.50 AV			1.48 H	350	83.90	10.60
5	#10360.00	57.80 PK	74.00	-16.20	1.52 H	232	41.00	16.80
6	#10360.00	44.90 AV	54.00	-9.10	1.52 H	232	28.10	16.80
7	15540.00	60.80 PK	74.00	-13.20	1.65 H	294	38.30	22.50
8	15540.00	47.70 AV	54.00	-6.30	1.65 H	294	25.20	22.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.30 PK	74.00	-11.70	1.71 V	27	52.00	10.30
2	5150.00	44.40 AV	54.00	-9.60	1.71 V	27	34.10	10.30
3	*5180.00	108.90 PK			1.71 V	27	98.30	10.60
4	*5180.00	97.80 AV			1.71 V	27	87.20	10.60
5	#10360.00	57.20 PK	74.00	-16.80	1.64 V	78	40.40	16.80
6	#10360.00	44.40 AV	54.00	-9.60	1.64 V	78	27.60	16.80
7	15540.00	60.20 PK	74.00	-13.80	1.46 V	52	37.70	22.50
8	15540.00	47.20 AV	54.00	-6.80	1.46 V	52	24.70	22.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	104.90 PK			1.46 H	348	94.20	10.70
2	*5200.00	94.20 AV			1.46 H	348	83.50	10.70
3	#10400.00	56.60 PK	74.00	-17.40	1.47 H	218	39.70	16.90
4	#10400.00	44.10 AV	54.00	-9.90	1.47 H	218	27.20	16.90
5	15600.00	61.00 PK	74.00	-13.00	1.63 H	275	38.50	22.50
6	15600.00	47.80 AV	54.00	-6.20	1.63 H	275	25.30	22.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	108.20 PK			1.70 V	27	97.50	10.70
2	*5200.00	97.70 AV			1.70 V	27	87.00	10.70
3	#10400.00	57.40 PK	74.00	-16.60	1.59 V	72	40.50	16.90
4	#10400.00	44.30 AV	54.00	-9.70	1.59 V	72	27.40	16.90
5	15600.00	60.30 PK	74.00	-13.70	1.43 V	45	37.80	22.50
6	15600.00	47.00 AV	54.00	-7.00	1.43 V	45	24.50	22.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	104.90 PK			1.54 H	322	94.20	10.70
2	*5240.00	94.30 AV			1.54 H	322	83.60	10.70
3	5350.00	60.10 PK	74.00	-13.90	1.54 H	322	49.50	10.60
4	5350.00	42.40 AV	54.00	-11.60	1.54 H	322	31.80	10.60
5	#10480.00	57.10 PK	74.00	-16.90	1.54 H	216	40.60	16.50
6	#10480.00	44.30 AV	54.00	-9.70	1.54 H	216	27.80	16.50
7	15720.00	61.20 PK	74.00	-12.80	1.61 H	272	38.60	22.60
8	15720.00	48.00 AV	54.00	-6.00	1.61 H	272	25.40	22.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	108.30 PK			1.71 V	23	97.60	10.70
2	*5240.00	97.70 AV			1.71 V	23	87.00	10.70
3	5350.00	55.30 PK	74.00	-18.70	1.71 V	23	44.70	10.60
4	5350.00	42.80 AV	54.00	-11.20	1.71 V	23	32.20	10.60
5	#10480.00	57.70 PK	74.00	-16.30	1.63 V	60	41.20	16.50
6	#10480.00	44.60 AV	54.00	-9.40	1.63 V	60	28.10	16.50
7	15720.00	60.40 PK	74.00	-13.60	1.43 V	64	37.80	22.60
8	15720.00	47.10 AV	54.00	-6.90	1.43 V	64	24.50	22.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5260.00	105.10 PK			1.47 H	337	94.50	10.60
2	*5260.00	94.50 AV			1.47 H	337	83.90	10.60
3	5350.00	55.10 PK	74.00	-18.90	1.47 H	337	44.50	10.60
4	5350.00	42.90 AV	54.00	-11.10	1.47 H	337	32.30	10.60
5	#10520.00	57.60 PK	74.00	-16.40	1.53 H	227	41.30	16.30
6	#10520.00	44.90 AV	54.00	-9.10	1.53 H	227	28.60	16.30
7	15780.00	61.40 PK	74.00	-12.60	1.57 H	277	39.00	22.40
8	15780.00	47.90 AV	54.00	-6.10	1.57 H	277	25.50	22.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5260.00	108.30 PK			1.71 V	23	97.70	10.60
2	*5260.00	97.80 AV			1.71 V	23	87.20	10.60
3	5350.00	55.60 PK	74.00	-18.40	1.71 V	23	45.00	10.60
4	5350.00	43.30 AV	54.00	-10.70	1.71 V	23	32.70	10.60
5	#10520.00	58.10 PK	74.00	-15.90	1.59 V	70	41.80	16.30
6	#10520.00	45.00 AV	54.00	-9.00	1.59 V	70	28.70	16.30
7	15780.00	60.40 PK	74.00	-13.60	1.45 V	53	38.00	22.40
8	15780.00	47.50 AV	54.00	-6.50	1.45 V	53	25.10	22.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	104.30 PK			1.48 H	329	93.70	10.60
2	*5300.00	93.80 AV			1.48 H	329	83.20	10.60
3	10600.00	57.00 PK	74.00	-17.00	1.53 H	208	40.80	16.20
4	10600.00	44.20 AV	54.00	-9.80	1.53 H	208	28.00	16.20
5	15900.00	61.30 PK	74.00	-12.70	1.55 H	284	38.80	22.50
6	15900.00	48.00 AV	54.00	-6.00	1.55 H	284	25.50	22.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	107.70 PK			1.71 V	21	97.10	10.60
2	*5300.00	97.20 AV			1.71 V	21	86.60	10.60
3	10600.00	57.30 PK	74.00	-16.70	1.62 V	74	41.10	16.20
4	10600.00	44.30 AV	54.00	-9.70	1.62 V	74	28.10	16.20
5	15900.00	60.70 PK	74.00	-13.30	1.37 V	51	38.20	22.50
6	15900.00	47.60 AV	54.00	-6.40	1.37 V	51	25.10	22.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	104.20 PK			1.45 H	339	93.60	10.60
2	*5320.00	94.00 AV			1.45 H	339	83.40	10.60
3	5350.00	62.20 PK	74.00	-11.80	1.45 H	339	51.60	10.60
4	5350.00	43.80 AV	54.00	-10.20	1.45 H	339	33.20	10.60
5	10640.00	57.20 PK	74.00	-16.80	1.51 H	221	40.70	16.50
6	10640.00	44.50 AV	54.00	-9.50	1.51 H	221	28.00	16.50
7	15960.00	61.30 PK	74.00	-12.70	1.60 H	278	38.30	23.00
8	15960.00	48.10 AV	54.00	-5.90	1.60 H	278	25.10	23.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	107.90 PK			1.73 V	21	97.30	10.60
2	*5320.00	97.40 AV			1.73 V	21	86.80	10.60
3	5350.00	66.60 PK	74.00	-7.40	1.73 V	21	56.00	10.60
4	5350.00	46.00 AV	54.00	-8.00	1.73 V	21	35.40	10.60
5	10640.00	57.60 PK	74.00	-16.40	1.62 V	65	41.10	16.50
6	10640.00	44.70 AV	54.00	-9.30	1.62 V	65	28.20	16.50
7	15960.00	60.60 PK	74.00	-13.40	1.41 V	50	37.60	23.00
8	15960.00	47.50 AV	54.00	-6.50	1.41 V	50	24.50	23.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	55.50 PK	74.00	-18.50	1.45 H	352	44.40	11.10
2	#5470.00	43.10 AV	54.00	-10.90	1.45 H	352	32.00	11.10
3	*5500.00	102.30 PK			1.45 H	352	91.10	11.20
4	*5500.00	92.50 AV			1.45 H	352	81.30	11.20
5	11000.00	57.80 PK	74.00	-16.20	1.46 H	251	40.60	17.20
6	11000.00	44.50 AV	54.00	-9.50	1.46 H	251	27.30	17.20
7	#16500.00	61.10 PK	74.00	-12.90	1.51 H	283	36.20	24.90
8	#16500.00	48.40 AV	54.00	-5.60	1.51 H	283	23.50	24.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	55.90 PK	74.00	-18.10	1.73 V	21	44.80	11.10
2	#5470.00	44.20 AV	54.00	-9.80	1.73 V	21	33.10	11.10
3	*5500.00	105.90 PK			1.73 V	21	94.70	11.20
4	*5500.00	96.10 AV			1.73 V	21	84.90	11.20
5	11000.00	57.70 PK	74.00	-16.30	1.59 V	53	40.50	17.20
6	11000.00	44.50 AV	54.00	-9.50	1.59 V	53	27.30	17.20
7	#16500.00	61.00 PK	74.00	-13.00	1.49 V	55	36.10	24.90
8	#16500.00	47.90 AV	54.00	-6.10	1.49 V	55	23.00	24.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	102.20 PK			1.43 H	340	90.90	11.30
2	*5580.00	92.30 AV			1.43 H	340	81.00	11.30
3	11600.00	57.50 PK	74.00	-16.50	1.47 H	246	39.50	18.00
4	11600.00	44.00 AV	54.00	-10.00	1.47 H	246	26.00	18.00
5	#16740.00	61.30 PK	74.00	-12.70	1.50 H	281	35.70	25.60
6	#16740.00	48.70 AV	54.00	-5.30	1.50 H	281	23.10	25.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	105.80 PK			1.73 V	19	94.50	11.30
2	*5580.00	95.70 AV			1.73 V	19	84.40	11.30
3	11160.00	57.10 PK	74.00	-16.90	1.61 V	61	39.30	17.80
4	11160.00	44.10 AV	54.00	-9.90	1.61 V	61	26.30	17.80
5	#16740.00	60.60 PK	74.00	-13.40	1.39 V	47	35.00	25.60
6	#16740.00	48.20 AV	54.00	-5.80	1.39 V	47	22.60	25.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	104.10 PK			1.47 H	346	92.60	11.50
2	*5700.00	93.80 AV			1.47 H	346	82.30	11.50
3	#5725.00	60.90 PK	74.00	-13.10	1.47 H	346	49.40	11.50
4	#5725.00	43.10 AV	54.00	-10.90	1.47 H	346	31.60	11.50
5	11400.00	57.40 PK	74.00	-16.60	1.48 H	236	39.80	17.60
6	11400.00	44.00 AV	54.00	-10.00	1.48 H	236	26.40	17.60
7	#17100.00	61.60 PK	74.00	-12.40	1.51 H	281	34.70	26.90
8	#17100.00	48.80 AV	54.00	-5.20	1.51 H	281	21.90	26.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	107.40 PK			1.81 V	19	95.90	11.50
2	*5700.00	96.70 AV			1.81 V	19	85.20	11.50
3	#5725.00	64.20 PK	74.00	-9.80	1.81 V	19	52.70	11.50
4	#5725.00	45.10 AV	54.00	-8.90	1.81 V	19	33.60	11.50
5	11400.00	57.50 PK	74.00	-16.50	1.60 V	56	39.90	17.60
6	11400.00	44.80 AV	54.00	-9.20	1.60 V	56	27.20	17.60
7	#17100.00	60.70 PK	74.00	-13.30	1.48 V	45	33.80	26.90
8	#17100.00	48.10 AV	54.00	-5.90	1.48 V	45	21.20	26.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	103.00 PK			1.47 H	325	91.30	11.70
2	*5745.00	93.00 AV			1.47 H	325	81.30	11.70
3	11490.00	57.00 PK	74.00	-17.00	1.45 H	231	39.10	17.90
4	11490.00	43.90 AV	54.00	-10.10	1.45 H	231	26.00	17.90
5	#17235.00	61.70 PK	74.00	-12.30	1.47 H	264	34.50	27.20
6	#17235.00	49.20 AV	54.00	-4.80	1.47 H	264	22.00	27.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	106.30 PK			1.76 V	17	94.60	11.70
2	*5745.00	95.80 AV			1.76 V	17	84.10	11.70
3	11490.00	57.20 PK	74.00	-16.80	1.57 V	50	39.30	17.90
4	11490.00	44.30 AV	54.00	-9.70	1.57 V	50	26.40	17.90
5	#17235.00	61.30 PK	74.00	-12.70	1.44 V	45	34.10	27.20
6	#17235.00	48.60 AV	54.00	-5.40	1.44 V	45	21.40	27.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	102.80 PK			1.41 H	326	90.90	11.90
2	*5785.00	92.90 AV			1.41 H	326	81.00	11.90
3	11570.00	56.50 PK	74.00	-17.50	1.46 H	206	38.50	18.00
4	11570.00	43.60 AV	54.00	-10.40	1.46 H	206	25.60	18.00
5	#17355.00	61.90 PK	74.00	-12.10	1.54 H	274	34.60	27.30
6	#17355.00	49.10 AV	54.00	-4.90	1.54 H	274	21.80	27.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	106.00 PK			2.15 V	17	94.10	11.90
2	*5785.00	95.40 AV			2.15 V	17	83.50	11.90
3	11570.00	56.90 PK	74.00	-17.10	1.55 V	77	38.90	18.00
4	11570.00	44.50 AV	54.00	-9.50	1.55 V	77	26.50	18.00
5	#17355.00	61.50 PK	74.00	-12.50	1.41 V	72	34.20	27.30
6	#17355.00	48.90 AV	54.00	-5.10	1.41 V	72	21.60	27.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	102.30 PK			1.54 H	327	90.40	11.90
2	*5825.00	92.50 AV			1.54 H	327	80.60	11.90
3	11650.00	56.90 PK	74.00	-17.10	1.40 H	225	38.90	18.00
4	11650.00	43.90 AV	54.00	-10.10	1.40 H	225	25.90	18.00
5	#17475.00	62.00 PK	74.00	-12.00	1.56 H	285	34.20	27.80
6	#17475.00	49.30 AV	54.00	-4.70	1.56 H	285	21.50	27.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	105.50 PK			2.15 V	15	93.60	11.90
2	*5825.00	95.10 AV			2.15 V	15	83.20	11.90
3	11650.00	57.60 PK	74.00	-16.40	1.53 V	51	39.60	18.00
4	11650.00	44.90 AV	54.00	-9.10	1.53 V	51	26.90	18.00
5	#17475.00	61.70 PK	74.00	-12.30	1.50 V	49	33.90	27.80
6	#17475.00	48.80 AV	54.00	-5.20	1.50 V	49	21.00	27.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.10 PK	74.00	-6.90	1.57 H	332	56.80	10.30
2	5150.00	48.00 AV	54.00	-6.00	1.57 H	332	37.70	10.30
3	*5190.00	99.70 PK			1.57 H	332	89.00	10.70
4	*5190.00	89.10 AV			1.57 H	332	78.40	10.70
5	5350.00	54.00 PK	74.00	-20.00	1.57 H	332	43.40	10.60
6	5350.00	42.00 AV	54.00	-12.00	1.57 H	332	31.40	10.60
7	#10380.00	57.10 PK	74.00	-16.90	1.56 H	241	40.30	16.80
8	#10380.00	44.60 AV	54.00	-9.40	1.56 H	241	27.80	16.80
9	15570.00	62.00 PK	74.00	-12.00	1.54 H	275	39.40	22.60
10	15570.00	48.30 AV	54.00	-5.70	1.54 H	275	25.70	22.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.50 PK	74.00	-4.50	1.74 V	26	59.20	10.30
2	5150.00	50.40 AV	54.00	-3.60	1.74 V	26	40.10	10.30
3	*5190.00	105.60 PK			1.74 V	26	94.90	10.70
4	*5190.00	94.70 AV			1.74 V	26	84.00	10.70
5	5350.00	54.20 PK	74.00	-19.80	1.74 V	26	43.60	10.60
6	5350.00	42.20 AV	54.00	-11.80	1.74 V	26	31.60	10.60
7	#10380.00	57.20 PK	74.00	-16.80	1.58 V	58	40.40	16.80
8	#10380.00	44.50 AV	54.00	-9.50	1.58 V	58	27.70	16.80
9	15570.00	61.20 PK	74.00	-12.80	1.53 V	48	38.60	22.60
10	15570.00	48.50 AV	54.00	-5.50	1.53 V	48	25.90	22.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	54.80 PK	74.00	-19.20	1.55 H	323	44.50	10.30
2	5150.00	42.20 AV	54.00	-11.80	1.55 H	323	31.90	10.30
3	*5230.00	99.20 PK			1.55 H	323	88.50	10.70
4	*5230.00	88.80 AV			1.55 H	323	78.10	10.70
5	5350.00	54.30 PK	74.00	-19.70	1.55 H	323	43.70	10.60
6	5350.00	41.90 AV	54.00	-12.10	1.55 H	323	31.30	10.60
7	#10460.00	57.50 PK	74.00	-16.50	1.58 H	235	41.00	16.50
8	#10460.00	45.00 AV	54.00	-9.00	1.58 H	235	28.50	16.50
9	15690.00	61.80 PK	74.00	-12.20	1.53 H	271	39.20	22.60
10	15690.00	48.30 AV	54.00	-5.70	1.53 H	271	25.70	22.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	54.90 PK	74.00	-19.10	1.74 V	25	44.60	10.30
2	5150.00	42.40 AV	54.00	-11.60	1.74 V	25	32.10	10.30
3	*5230.00	105.30 PK			1.74 V	25	94.60	10.70
4	*5230.00	94.20 AV			1.74 V	25	83.50	10.70
5	5350.00	55.10 PK	74.00	-18.90	1.74 V	25	44.50	10.60
6	5350.00	42.60 AV	54.00	-11.40	1.74 V	25	32.00	10.60
7	#10460.00	57.90 PK	74.00	-16.10	1.53 V	58	41.40	16.50
8	#10460.00	45.00 AV	54.00	-9.00	1.53 V	58	28.50	16.50
9	15690.00	61.30 PK	74.00	-12.70	1.46 V	43	38.70	22.60
10	15690.00	48.60 AV	54.00	-5.40	1.46 V	43	26.00	22.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	54.20 PK	74.00	-19.80	1.61 H	317	43.90	10.30
2	5150.00	42.00 AV	54.00	-12.00	1.61 H	317	31.70	10.30
3	*5270.00	99.00 PK			1.61 H	317	88.30	10.70
4	*5270.00	88.60 AV			1.61 H	317	77.90	10.70
5	5350.00	55.00 PK	74.00	-19.00	1.61 H	317	44.40	10.60
6	5350.00	42.50 AV	54.00	-11.50	1.61 H	317	31.90	10.60
7	#10540.00	58.00 PK	74.00	-16.00	1.53 H	221	41.80	16.20
8	#10540.00	45.30 AV	54.00	-8.70	1.53 H	221	29.10	16.20
9	15810.00	61.60 PK	74.00	-12.40	1.56 H	290	39.30	22.30
10	15810.00	48.10 AV	54.00	-5.90	1.56 H	290	25.80	22.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	54.60 PK	74.00	-19.40	1.74 V	23	44.30	10.30
2	5150.00	42.10 AV	54.00	-11.90	1.74 V	23	31.80	10.30
3	*5270.00	105.20 PK			1.74 V	23	94.50	10.70
4	*5270.00	94.20 AV			1.74 V	23	83.50	10.70
5	5350.00	56.10 PK	74.00	-17.90	1.74 V	23	45.50	10.60
6	5350.00	43.10 AV	54.00	-10.90	1.74 V	23	32.50	10.60
7	#10540.00	57.40 PK	74.00	-16.60	1.52 V	65	41.20	16.20
8	#10540.00	44.80 AV	54.00	-9.20	1.52 V	65	28.60	16.20
9	15810.00	61.20 PK	74.00	-12.80	1.47 V	46	38.90	22.30
10	15810.00	48.40 AV	54.00	-5.60	1.47 V	46	26.10	22.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	99.00 PK			1.59 H	320	88.40	10.60
2	*5310.00	88.70 AV			1.59 H	320	78.10	10.60
3	5350.00	69.60 PK	74.00	-4.40	1.59 H	320	59.00	10.60
4	5350.00	49.80 AV	54.00	-4.20	1.59 H	320	39.20	10.60
5	10620.00	57.90 PK	74.00	-16.10	1.51 H	214	41.70	16.20
6	10620.00	45.30 AV	54.00	-8.70	1.51 H	214	29.10	16.20
7	15930.00	61.60 PK	74.00	-12.40	1.57 H	281	38.80	22.80
8	15930.00	47.90 AV	54.00	-6.10	1.57 H	281	25.10	22.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	104.80 PK			1.66 V	21	94.20	10.60
2	*5310.00	94.20 AV			1.66 V	21	83.60	10.60
3	5350.00	73.10 PK	74.00	-0.90	1.66 V	21	62.50	10.60
4	5350.00	53.20 AV	54.00	-0.80	1.66 V	21	42.60	10.60
5	10620.00	58.00 PK	74.00	-16.00	1.53 V	42	41.80	16.20
6	10620.00	45.10 AV	54.00	-8.90	1.53 V	42	28.90	16.20
7	15930.00	61.60 PK	74.00	-12.40	1.46 V	37	38.80	22.80
8	15930.00	48.40 AV	54.00	-5.60	1.46 V	37	25.60	22.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	65.10 PK	74.00	-8.90	1.56 H	342	54.00	11.10
2	#5470.00	43.40 AV	54.00	-10.60	1.56 H	342	32.30	11.10
3	*5510.00	97.20 PK			1.56 H	342	85.90	11.30
4	*5510.00	86.50 AV			1.56 H	342	75.20	11.30
5	11020.00	57.40 PK	74.00	-16.60	1.35 H	219	40.10	17.30
6	11020.00	44.40 AV	54.00	-9.60	1.35 H	219	27.10	17.30
7	#16530.00	61.40 PK	74.00	-12.60	1.60 H	299	36.50	24.90
8	#16530.00	48.60 AV	54.00	-5.40	1.60 H	299	23.70	24.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	68.80 PK	74.00	-5.20	1.66 V	21	57.70	11.10
2	#5470.00	46.10 AV	54.00	-7.90	1.66 V	21	35.00	11.10
3	*5510.00	102.60 PK			1.66 V	21	91.30	11.30
4	*5510.00	92.00 AV			1.66 V	21	80.70	11.30
5	11020.00	57.50 PK	74.00	-16.50	1.58 V	55	40.20	17.30
6	11020.00	44.90 AV	54.00	-9.10	1.58 V	55	27.60	17.30
7	#16530.00	61.80 PK	74.00	-12.20	1.48 V	63	36.90	24.90
8	#16530.00	48.70 AV	54.00	-5.30	1.48 V	63	23.80	24.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	56.30 PK	74.00	-17.70	1.55 H	319	45.20	11.10
2	#5470.00	42.60 AV	54.00	-11.40	1.55 H	319	31.50	11.10
3	*5550.00	98.10 PK			1.55 H	319	86.80	11.30
4	*5550.00	87.60 AV			1.55 H	319	76.30	11.30
5	11100.00	56.50 PK	74.00	-17.50	1.40 H	239	38.80	17.70
6	11100.00	43.70 AV	54.00	-10.30	1.40 H	239	26.00	17.70
7	#16650.00	61.90 PK	74.00	-12.10	1.57 H	270	36.70	25.20
8	#16650.00	49.10 AV	54.00	-4.90	1.57 H	270	23.90	25.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	58.50 PK	74.00	-15.50	1.63 V	19	47.40	11.10
2	#5470.00	43.80 AV	54.00	-10.20	1.63 V	19	32.70	11.10
3	*5550.00	103.50 PK			1.63 V	19	92.20	11.30
4	*5550.00	93.00 AV			1.63 V	19	81.70	11.30
5	11100.00	57.40 PK	74.00	-16.60	1.50 V	36	39.70	17.70
6	11100.00	44.80 AV	54.00	-9.20	1.50 V	36	27.10	17.70
7	#16650.00	61.30 PK	74.00	-12.70	1.53 V	59	36.10	25.20
8	#16650.00	48.50 AV	54.00	-5.50	1.53 V	59	23.30	25.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	98.70 PK			1.59 H	325	87.30	11.40
2	*5670.00	87.00 AV			1.59 H	325	75.60	11.40
3	#5725.00	56.10 PK	74.00	-17.90	1.59 H	325	44.60	11.50
4	#5725.00	42.30 AV	54.00	-11.70	1.59 H	325	30.80	11.50
5	11340.00	56.60 PK	74.00	-17.40	1.37 H	232	39.10	17.50
6	11340.00	43.50 AV	54.00	-10.50	1.37 H	232	26.00	17.50
7	#17010.00	61.60 PK	74.00	-12.40	1.59 H	295	34.90	26.70
8	#17010.00	48.90 AV	54.00	-5.10	1.59 H	295	22.20	26.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	103.00 PK			1.63 V	21	91.60	11.40
2	*5670.00	92.30 AV			1.63 V	21	80.90	11.40
3	#5725.00	58.10 PK	74.00	-15.90	1.63 V	21	46.60	11.50
4	#5725.00	44.80 AV	54.00	-9.20	1.63 V	21	33.30	11.50
5	11340.00	57.80 PK	74.00	-16.20	1.49 V	41	40.30	17.50
6	11340.00	45.20 AV	54.00	-8.80	1.49 V	41	27.70	17.50
7	#17010.00	61.50 PK	74.00	-12.50	1.52 V	47	34.80	26.70
8	#17010.00	48.70 AV	54.00	-5.30	1.52 V	47	22.00	26.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	96.70 PK			1.54 H	328	85.00	11.70
2	*5755.00	85.30 AV			1.54 H	328	73.60	11.70
3	11510.00	56.10 PK	74.00	-17.90	1.40 H	211	38.20	17.90
4	11510.00	43.40 AV	54.00	-10.60	1.40 H	211	25.50	17.90
5	#17265.00	62.20 PK	74.00	-11.80	1.54 H	289	34.90	27.30
6	#17265.00	49.30 AV	54.00	-4.70	1.54 H	289	22.00	27.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	102.50 PK			2.00 V	16	90.80	11.70
2	*5755.00	91.20 AV			2.00 V	16	79.50	11.70
3	11510.00	57.30 PK	74.00	-16.70	1.48 V	64	39.40	17.90
4	11510.00	44.40 AV	54.00	-9.60	1.48 V	64	26.50	17.90
5	#17265.00	62.40 PK	74.00	-11.60	1.51 V	45	35.10	27.30
6	#17265.00	49.20 AV	54.00	-4.80	1.51 V	45	21.90	27.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	97.00 PK			1.54 H	327	85.10	11.90
2	*5795.00	85.60 AV			1.54 H	327	73.70	11.90
3	11590.00	57.20 PK	74.00	-16.80	1.34 H	232	39.20	18.00
4	11590.00	44.10 AV	54.00	-9.90	1.34 H	232	26.10	18.00
5	#17385.00	62.60 PK	74.00	-11.40	1.55 H	289	35.20	27.40
6	#17385.00	49.80 AV	54.00	-4.20	1.55 H	289	22.40	27.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	102.80 PK			2.00 V	17	90.90	11.90
2	*5795.00	91.50 AV			2.00 V	17	79.60	11.90
3	11590.00	57.30 PK	74.00	-16.70	1.50 V	51	39.30	18.00
4	11590.00	44.80 AV	54.00	-9.20	1.50 V	51	26.80	18.00
5	#17385.00	62.00 PK	74.00	-12.00	1.46 V	61	34.60	27.40
6	#17385.00	49.20 AV	54.00	-4.80	1.46 V	61	21.80	27.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

BELOW 1GHz DATA

802.11n (HT40)

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	96.32	37.9 QP	43.5	-5.6	2.00 H	277	51.0	-13.1
2	115.63	34.9 QP	43.5	-8.6	2.00 H	282	45.2	-10.3
3	136.89	32.7 QP	43.5	-10.8	2.00 H	264	41.2	-8.5
4	192.01	34.1 QP	43.5	-9.4	1.50 H	272	44.9	-10.8
5	608.05	39.6 QP	46.0	-6.4	1.50 H	296	38.3	1.3
6	624.03	40.2 QP	46.0	-5.8	1.50 H	295	38.5	1.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	74.57	36.6 QP	40.0	-3.4	1.00 V	293	47.6	-11.0
2	94.38	35.7 QP	43.5	-7.8	2.00 V	360	49.1	-13.4
3	120.02	35.9 QP	43.5	-7.6	1.00 V	145	45.8	-9.9
4	148.15	38.4 QP	43.5	-5.1	1.00 V	161	46.1	-7.7
5	168.78	31.9 QP	43.5	-11.6	1.00 V	4	40.0	-8.1
6	624.03	35.8 QP	46.0	-10.2	1.50 V	348	34.1	1.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2015	Oct. 22, 2016
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 28, 2015	Oct. 27, 2016
RF Cable	5D-FB	COACAB-002	Mar. 04, 2016	Mar. 03, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	Jun. 20, 2016	Jun. 19, 2017
Software BVADT	BVADT_Cond_ V7.3.7.3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
- 3 Tested Date: July 29, 2016

4.2.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

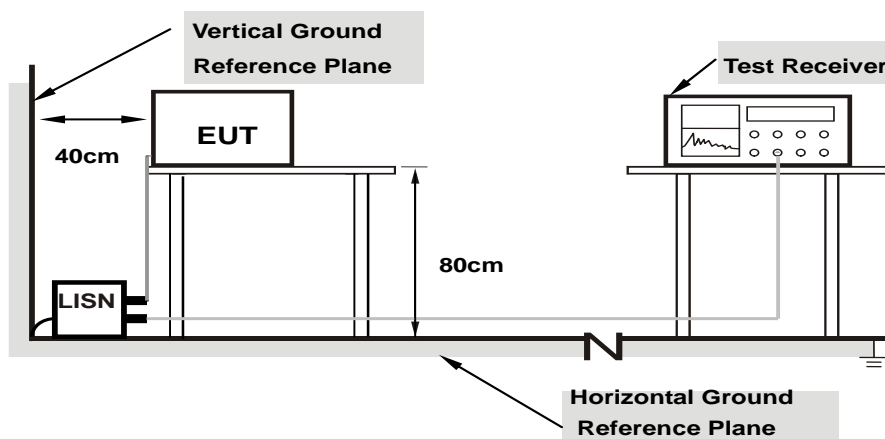

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.21	39.56	23.78	49.77	33.99	66.00	56.00	-16.23	-22.01
2	0.21250	10.22	28.69	16.86	38.91	27.08	63.11	53.11	-24.20	-26.03
3	0.43906	10.22	38.19	33.45	48.41	43.67	57.08	47.08	-8.67	-3.41
4	0.88828	10.25	24.64	21.12	34.89	31.37	56.00	46.00	-21.11	-14.63
5	12.82422	10.87	21.57	16.98	32.44	27.85	60.00	50.00	-27.56	-22.15
6	24.00000	11.43	31.71	31.07	43.14	42.50	60.00	50.00	-16.86	-7.50

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

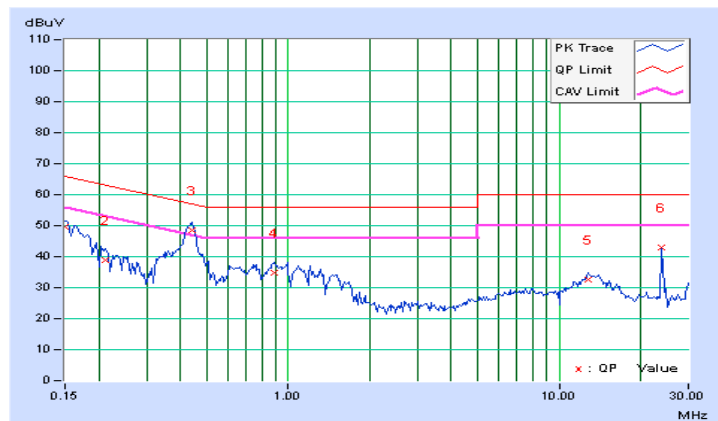


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.19	39.63	23.82	49.82	34.01	66.00	56.00	-16.18	-21.99
2	0.18906	10.21	32.36	17.40	42.57	27.61	64.08	54.08	-21.51	-26.47
3	0.43516	10.20	37.83	32.41	48.03	42.61	57.15	47.15	-9.12	-4.54
4	0.76328	10.22	21.47	15.06	31.69	25.28	56.00	46.00	-24.31	-20.72
5	1.83594	10.28	19.49	14.61	29.77	24.89	56.00	46.00	-26.23	-21.11
6	24.00000	11.13	31.61	30.85	42.74	41.98	60.00	50.00	-17.26	-8.02

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

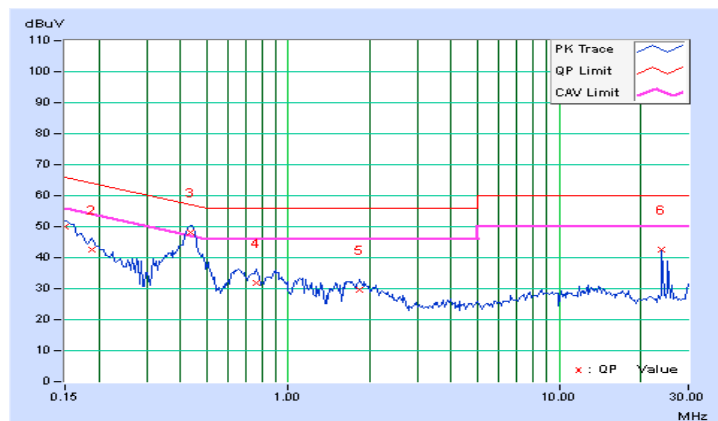


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.42344	10.22	33.03	25.43	43.25	35.65	57.38	47.38	-14.13	-11.73
2	0.45469	10.22	33.69	26.15	43.91	36.37	56.79	46.79	-12.88	-10.42
3	0.98203	10.26	18.74	10.17	29.00	20.43	56.00	46.00	-27.00	-25.57
4	1.72266	10.30	16.20	7.39	26.50	17.69	56.00	46.00	-29.50	-28.31
5	2.95703	10.30	21.70	4.79	32.00	15.09	56.00	46.00	-24.00	-30.91
6	13.55859	10.94	30.57	14.77	41.51	25.71	60.00	50.00	-18.49	-24.29

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

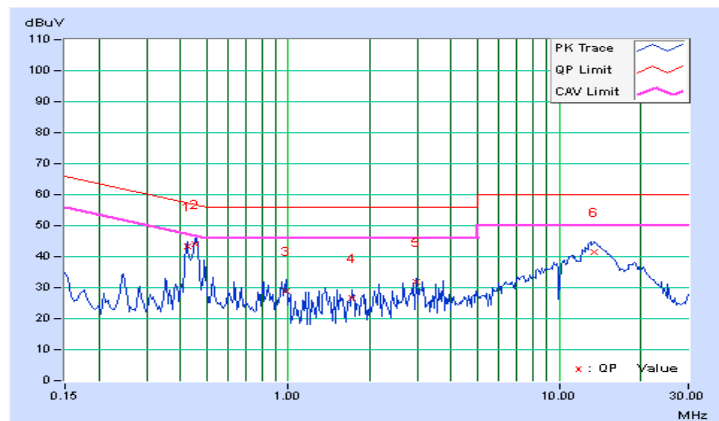


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.42344	10.20	34.03	26.29	44.23	36.49	57.38	47.38	-13.15	-10.89
2	0.45859	10.20	33.70	26.42	43.90	36.62	56.72	46.72	-12.81	-10.09
3	0.98503	10.24	24.20	16.75	34.44	26.99	56.00	46.00	-21.56	-19.01
4	2.98438	10.27	22.33	7.16	32.60	17.43	56.00	46.00	-23.40	-28.57
5	4.01172	10.25	22.00	11.49	32.25	21.74	56.00	46.00	-23.75	-24.26
6	13.46484	10.77	30.86	16.51	41.63	27.28	60.00	50.00	-18.37	-22.72

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

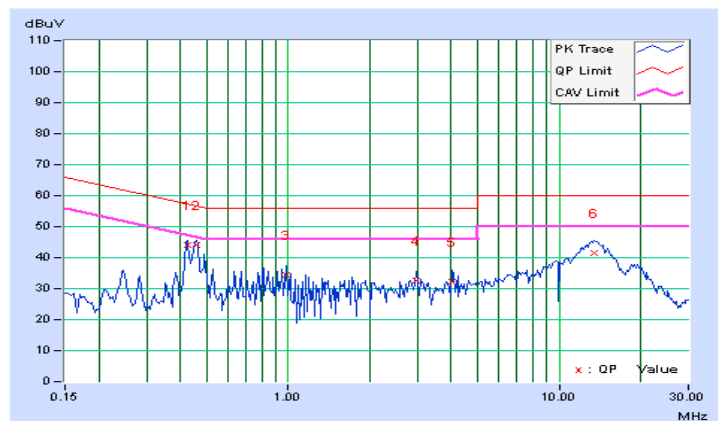

4.3 Transmit Power Measurement


4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	√	Mobile and Portable client device	250mW (24 dBm)
U-NII-2A		√	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C		√	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3		√	1 Watt (30 dBm)


*B is the 26 dB emission bandwidth in megahertz

4.3.2 Test Setup

FOR POWER OUTPUT MEASUREMENT



FOR 26dB OCCUPIED BANDWIDTH



4.3.3 Test Instruments

FOR POWER OUTPUT MEASUREMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power meter Anritsu	ML2495A	0824006	May 26, 2016	May 25, 2017
Power sensor Anritsu	MA2411B	0738172	May 26, 2016	May 25, 2017

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. Tested Date: June 07, 2016

FOR 26dB OCCUPIED BANDWIDTH

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSP40	100036	Jan. 27, 2016	Jan. 26, 2017

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. Tested Date: June 07, 2016

4.3.4 Test Procedure

FOR POWER OUTPUT MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 26dB OCCUPIED BANDWIDTH

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Power Output:

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
36	5180	10.864	10.36	24	Pass
40	5200	10.789	10.33	24	Pass
48	5240	10.209	10.09	24	Pass
52	5260	10.495	10.21	24	Pass
60	5300	9.795	9.91	24	Pass
64	5320	9.638	9.84	24	Pass
100	5500	7.295	8.63	24	Pass
120	5600	6.966	8.43	24	Pass
140	5700	7.096	8.51	24	Pass
149	5745	7.345	8.66	30	Pass
157	5785	7.194	8.57	30	Pass
165	5825	6.934	8.41	30	Pass

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
52	5260	21.24
60	5300	21.57
64	5320	22.31
100	5500	20.40
116	5580	20.23
140	5700	20.20

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
52	5260	21.24	24.27 > 24
60	5300	21.57	24.33 > 24
64	5320	22.31	24.48 > 24
100	5500	20.40	24.09 > 24
116	5580	20.23	24.05 > 24
140	5700	20.20	24.05 > 24

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
36	5180	10.666	10.28	24	Pass
40	5200	10.233	10.10	24	Pass
48	5240	10.28	10.12	24	Pass
52	5260	10.544	10.23	24	Pass
60	5300	10.023	10.01	24	Pass
64	5320	9.705	9.87	24	Pass
100	5500	7.586	8.80	24	Pass
120	5600	6.855	8.36	24	Pass
140	5700	6.918	8.40	24	Pass
149	5745	7.145	8.54	30	Pass
157	5785	7.194	8.57	30	Pass
165	5825	7.295	8.63	30	Pass

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
52	5260	23.29
60	5300	24.73
64	5320	23.80
100	5500	21.54
116	5580	21.28
140	5700	21.31

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
52	5260	23.29	24.67 > 24
60	5300	24.73	24.93 > 24
64	5320	23.80	24.76 > 24
100	5500	21.54	24.33 > 24
116	5580	21.28	24.27 > 24
140	5700	21.31	24.28 > 24

802.11n (HT40)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
38	5190	11.298	10.53	24	Pass
46	5230	11.324	10.54	24	Pass
54	5270	11.429	10.58	24	Pass
62	5310	10.839	10.35	24	Pass
102	5510	7.362	8.67	24	Pass
110	5550	7.925	8.99	24	Pass
134	5670	7.499	8.75	24	Pass
151	5755	7.396	8.69	30	Pass
159	5795	7.709	8.87	30	Pass

26dB OCCUPIED BANDWIDTH


Channel	Frequency (MHz)	26dB Bandwidth (MHz)
54	5270	53.92
62	5310	49.97
102	5510	50.78
110	5550	51.24
134	5670	51.04

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth


Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
54	5270	53.92	28.31 > 24
62	5310	49.97	27.98 > 24
102	5510	50.78	28.05 > 24
110	5550	51.24	28.09 > 24
134	5670	51.04	28.07 > 24

Spectrum Plot of Worst Value


802.11a_CH140

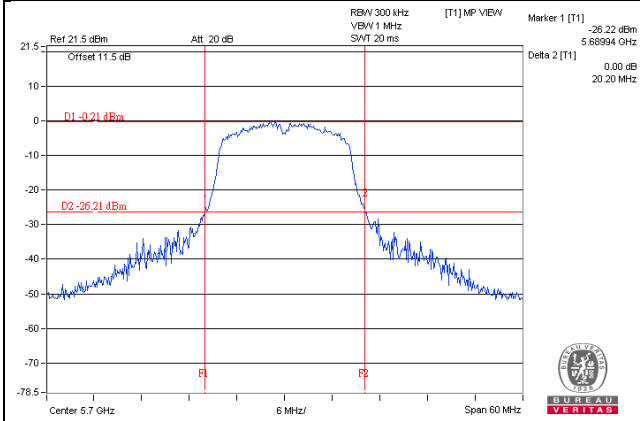

802.11n (HT20)_CH116

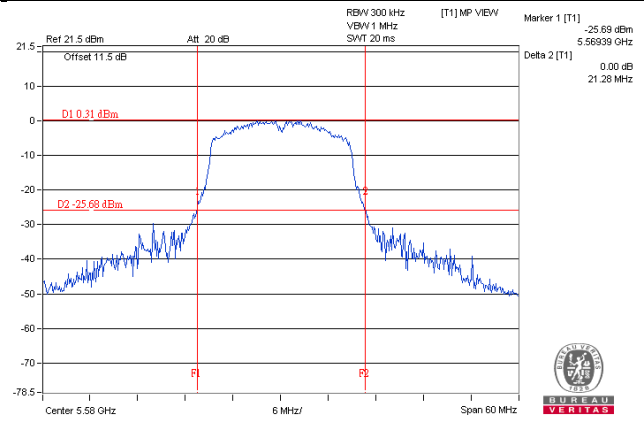

8802.11n (HT40)_CH38

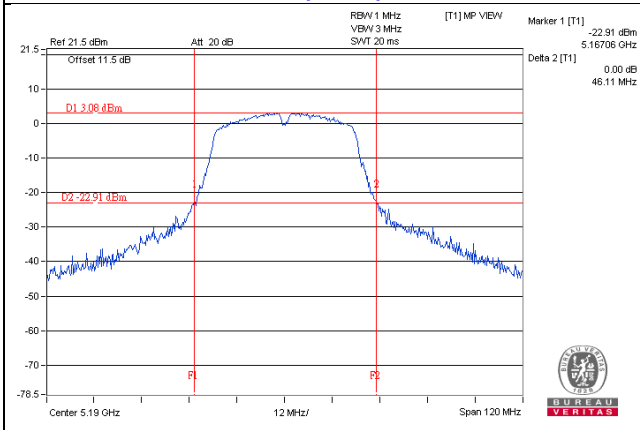


4.4 Peak Power Spectral Density Measurement

4.4.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
	√	Mobile and Portable client device	11dBm/ MHz
U-NII-2A	√		11dBm/ MHz
U-NII-2C	√		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.4.2 Test Setup



4.4.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSP40	100036	Jan. 27, 2016	Jan. 26, 2017

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. Tested Date: June 07, 2016

4.4.4 Test Procedure

For U-NII-1, U-NII-2A & U-NII-2C:

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add 10 log (1/duty cycle)

For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value and add 10 log (1/duty cycle)

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Condition

Same as Item 4.3.6.

4.4.7 Test Results

For U-NII-1, U-NII-2A, U-NII-2C Band 802.11a

Chan.	Chan. Freq. (MHz)	Conducted PSD W/O Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD With Duty Factor (dBm/MHz)	MAX. EIRP Limit (dBm/MHz)	Pass / Fail
36	5180	-3.47	0.5	-2.97	11	Pass
40	5200	-2.92	0.5	-2.42	11	Pass
48	5240	-2.61	0.5	-2.11	11	Pass
52	5260	-2.79	0.5	-2.29	11	Pass
60	5300	-2.50	0.5	-2.00	11	Pass
64	5320	-2.04	0.5	-1.54	11	Pass
100	5500	-4.61	0.5	-4.11	11	Pass
120	5600	-5.13	0.5	-4.63	11	Pass
140	5700	-5.80	0.5	-5.30	11	Pass

Note: 1. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Conducted PSD W/O Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD With Duty Factor (dBm/MHz)	MAX. EIRP Limit (dBm/MHz)	Pass / Fail
36	5180	-3.25	0.54	-2.71	11	Pass
40	5200	-2.72	0.54	-2.18	11	Pass
48	5240	-2.86	0.54	-2.32	11	Pass
52	5260	-2.58	0.54	-2.04	11	Pass
60	5300	-3.14	0.54	-2.60	11	Pass
64	5320	-3.25	0.54	-2.71	11	Pass
100	5500	-5.17	0.54	-4.63	11	Pass
120	5600	-5.02	0.54	-4.48	11	Pass
140	5700	-5.93	0.54	-5.39	11	Pass

Note: 1. Refer to section 3.3 for duty cycle spectrum plot.


802.11n (HT40)

Chan.	Chan. Freq. (MHz)	Conducted PSD W/O Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD With Duty Factor (dBm/MHz)	MAX. EIRP Limit (dBm/MHz)	Pass / Fail
38	5190	-9.50	1.02	-8.48	11	Pass
46	5230	-6.48	1.02	-5.46	11	Pass
54	5270	-8.17	1.02	-7.15	11	Pass
62	5310	-7.19	1.02	-6.17	11	Pass
102	5510	-9.49	1.02	-8.46	11	Pass
110	5550	-9.30	1.02	-8.27	11	Pass
134	5670	-9.74	1.02	-8.71	11	Pass


Note: 1. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a_CH64

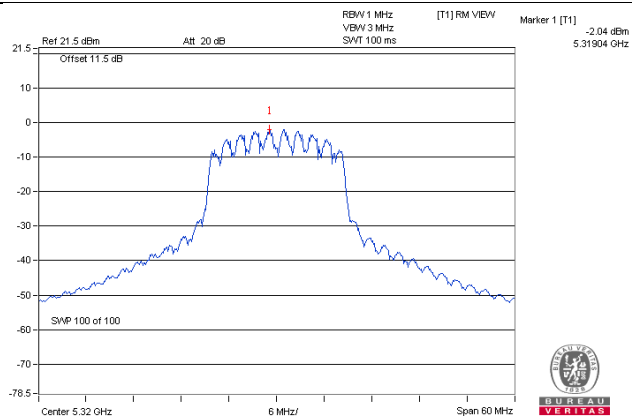

802.11n (HT20)_CH52

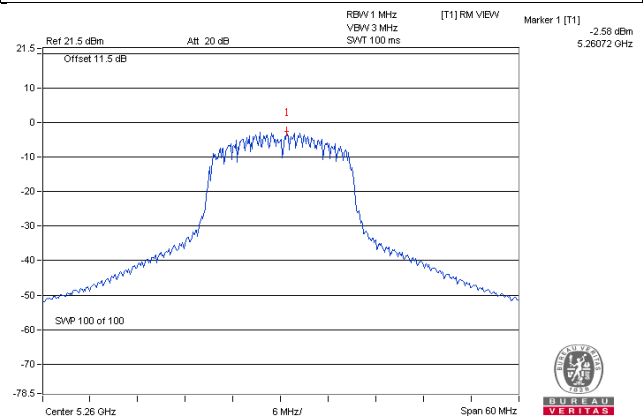

802.11n (HT40)_CH46

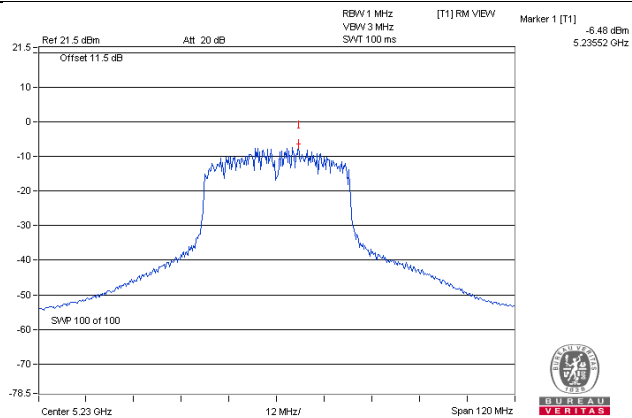

For U-NII-3 Band

802.11a

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor		Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
		(dBm/300kHz)	(dBm/500kHz)				
149	5745	-14.32	-12.10	0.5	-11.60	30	Pass
157	5785	-13.98	-11.76	0.5	-11.26	30	Pass
165	5825	-13.54	-11.32	0.5	-10.82	30	Pass

Note: 1. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor		Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
		(dBm/300kHz)	(dBm/500kHz)				
149	5745	-14.54	-12.32	0.54	-11.78	30	Pass
157	5785	-13.62	-11.40	0.54	-10.86	30	Pass
165	5825	-13.59	-11.37	0.54	-10.83	30	Pass

Note: 1. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)



Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor		Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
		(dBm/300kHz)	(dBm/500kHz)				
151	5755	-17.45	-15.23	1.02	-14.21	30	Pass
159	5795	-18.88	-16.66	1.02	-15.64	30	Pass

Note: 1. Refer to section 3.3 for duty cycle spectrum plot.


Spectrum Plot of Worst Value

802.11a_CH165

802.11n (HT20)_CH165

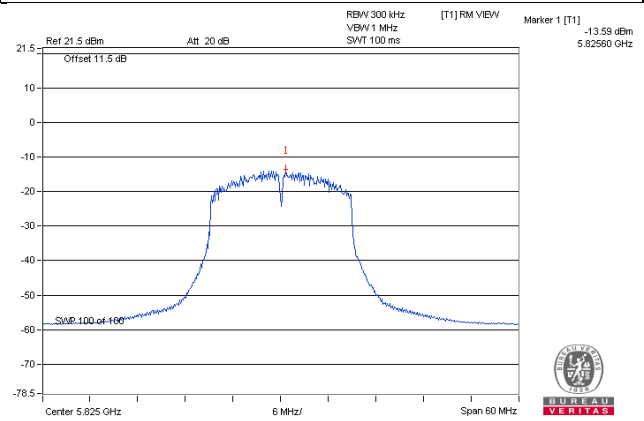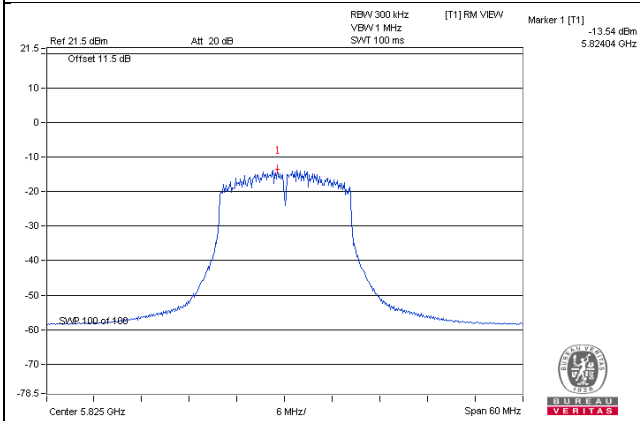

802.11n (HT40)_CH151

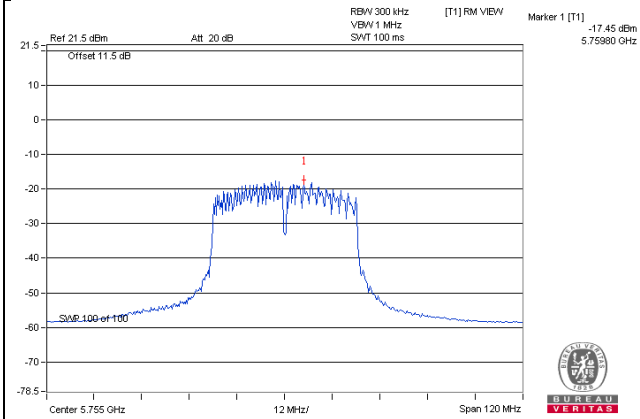


4.5 Frequency Stability Measurement

4.5.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.5.2 Test Setup

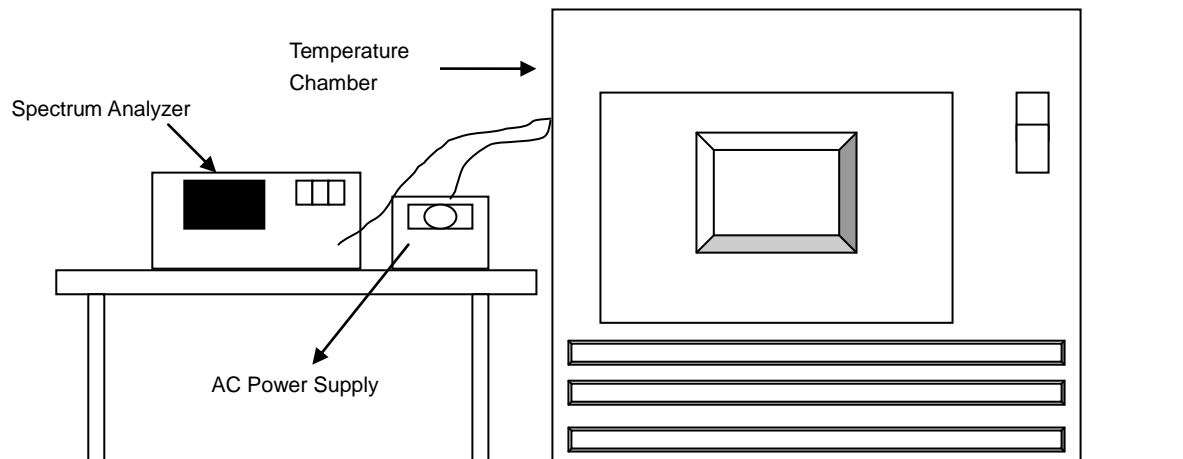

4.5.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSP40	100036	Jan. 27, 2016	Jan. 26, 2017
Temperature & Humidity Chamber TERCHY	MHU-225AU	911033	Dec. 03, 2015	Dec. 02, 2016
Digital Multimeter FLUKE	87III	73680266	Nov. 10, 2015	Nov. 09, 2016

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. Tested Date: June 07, 2016

4.5.4 Test Procedure

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.5.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
50	120	5180.0036	PASS	5180.0045	PASS	5180.0016	PASS	5180.004	PASS
40	120	5180.0188	PASS	5180.0179	PASS	5180.0201	PASS	5180.0196	PASS
30	120	5180.001	PASS	5180.0011	PASS	5180.0029	PASS	5180.0026	PASS
20	120	5179.9849	PASS	5179.9832	PASS	5179.9835	PASS	5179.9836	PASS
10	120	5179.9925	PASS	5179.9914	PASS	5179.9921	PASS	5179.9958	PASS
0	120	5179.9944	PASS	5179.9918	PASS	5179.9959	PASS	5179.994	PASS
-10	120	5180.0185	PASS	5180.0187	PASS	5180.0172	PASS	5180.0205	PASS
-20	120	5179.9895	PASS	5179.9918	PASS	5179.9889	PASS	5179.9883	PASS
-30	120	5180.0029	PASS	5180.0047	PASS	5180.0071	PASS	5180.0062	PASS


Frequency Stability Versus Voltage									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
20	138	5179.9851	PASS	5179.9822	PASS	5179.9833	PASS	5179.9833	PASS
	120	5179.9849	PASS	5179.9832	PASS	5179.9835	PASS	5179.9836	PASS
	102	5179.9845	PASS	5179.9822	PASS	5179.9833	PASS	5179.9832	PASS

4.6 6dB Bandwidth Measurement

4.6.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.6.2 Test Setup



4.6.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSP40	100036	Jan. 27, 2016	Jan. 26, 2017

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. Tested Date: June 07, 2016

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
149	5745	15.16	0.5	Pass
157	5785	15.10	0.5	Pass
165	5825	15.16	0.5	Pass

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
149	5745	15.15	0.5	Pass
157	5785	15.13	0.5	Pass
165	5825	15.14	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
151	5755	35.14	0.5	Pass
159	5795	35.05	0.5	Pass

Spectrum Plot of Worst Value


802.11a_CH157

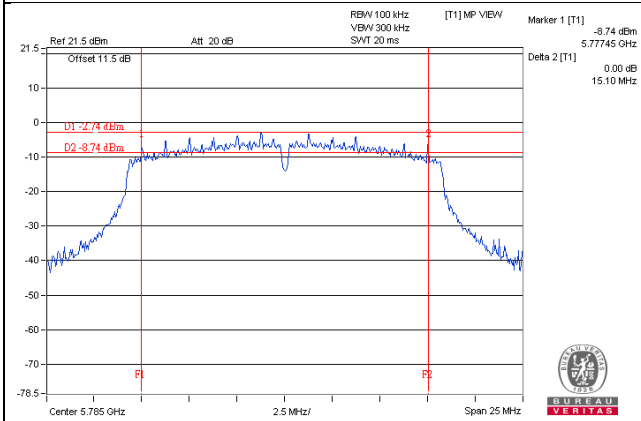

802.11n (HT20)_CH157

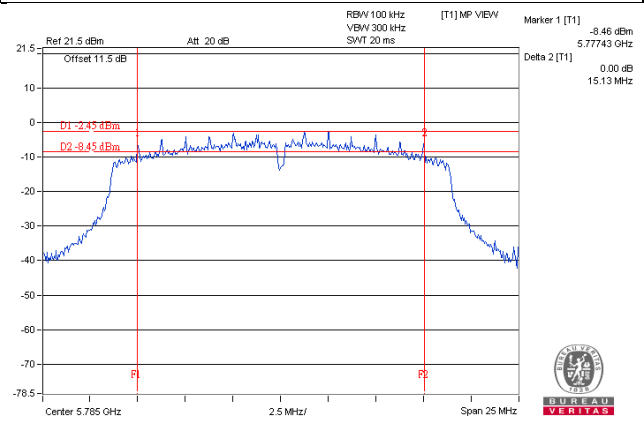

802.11n (HT40)_CH159

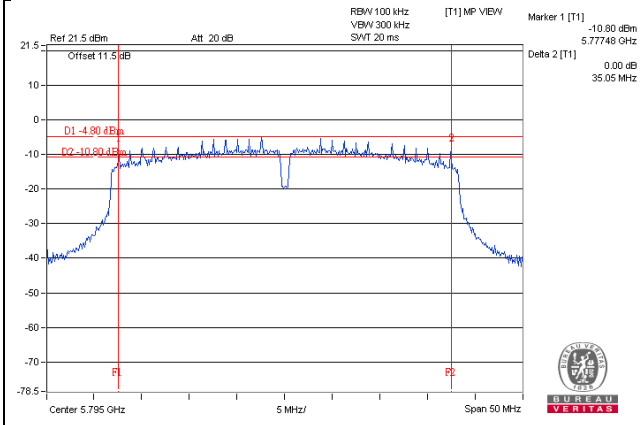

5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emisison (OOBE) Measurement (For U-NII-3 band)


802.11a

CH 149 5745 MHz

Horizontal

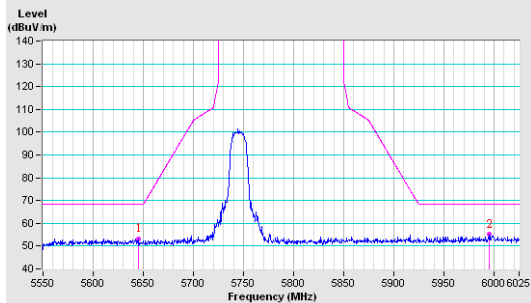


Vertical

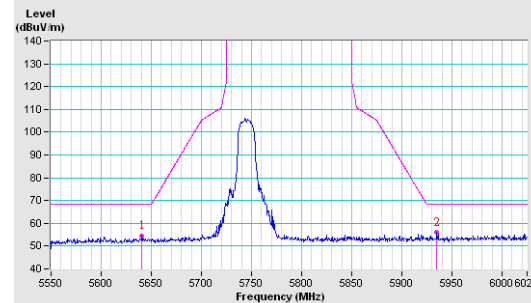


CH 157 5785 MHz

Horizontal

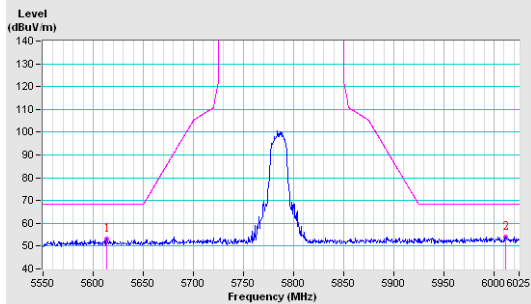


Vertical

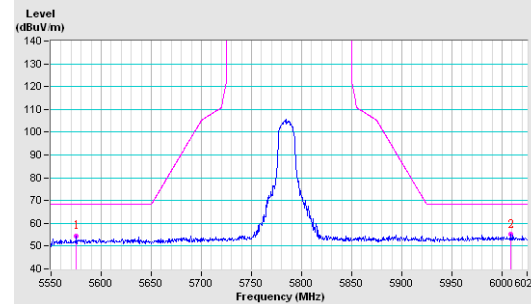


CH 165 5825 MHz

Horizontal

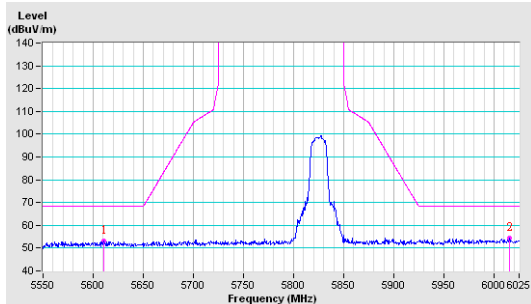


Vertical

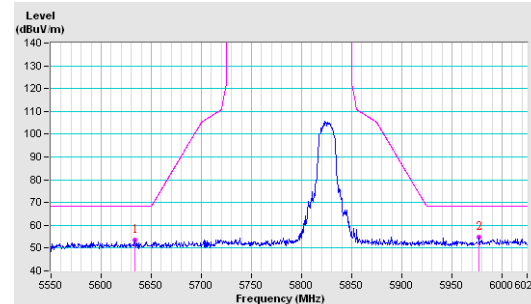


802.11n (HT20)

CH 149 5745 MHz

Horizontal

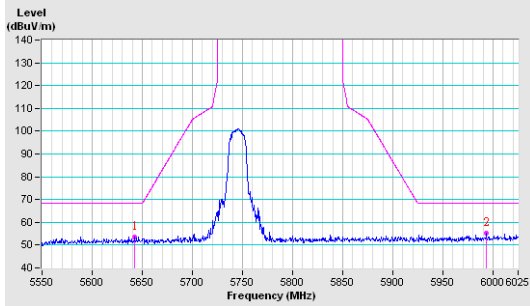


Vertical

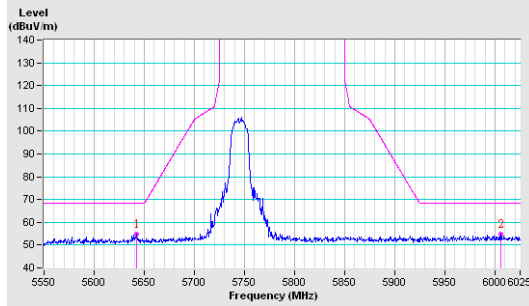


CH 157 5785 MHz

Horizontal

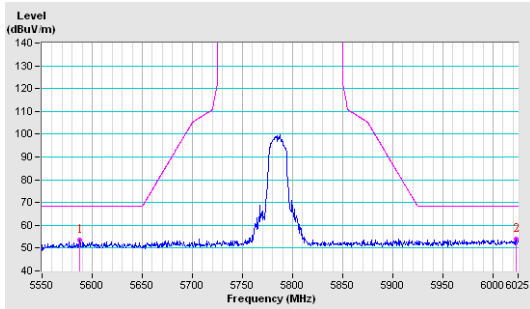


Vertical

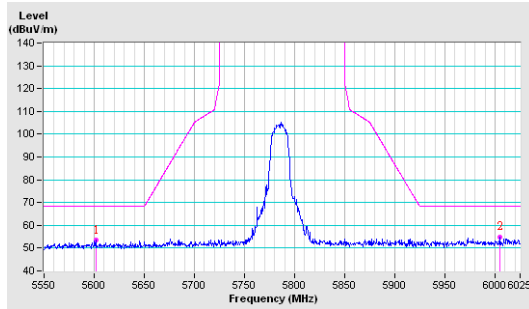


CH 165 5825 MHz

Horizontal

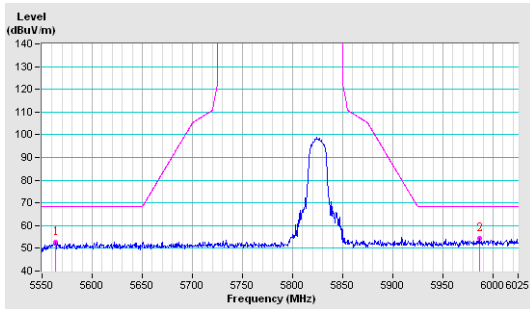


Vertical

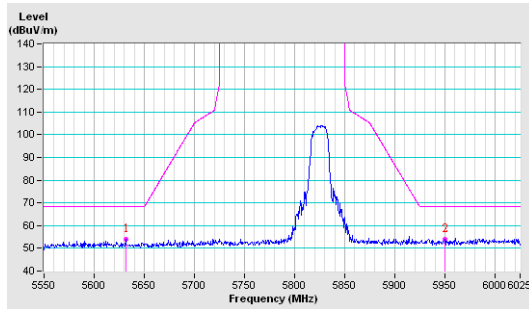


802.11n (HT40)

CH 151 5755 MHz

Horizontal

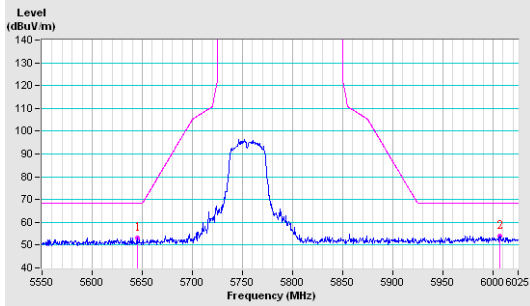


Vertical

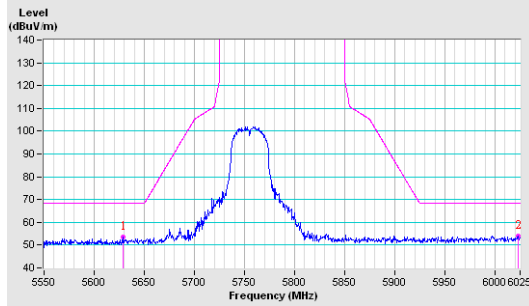


CH 159 5795 MHz

Horizontal

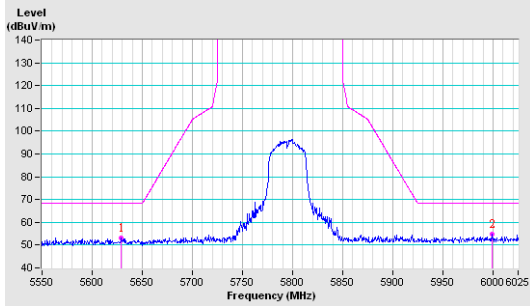

Vertical

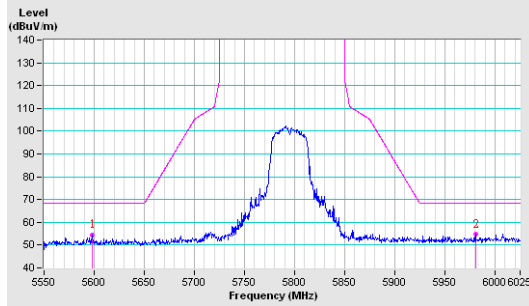

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---