

## FCC Test Report (WLAN)

**Report No.:** RF200518E05

**FCC ID:** MQT-AT150R3

**Test Model:** xCL\_AT-150-R3-18U

**Received Date:** May 26, 2020

**Test Date:** June 09 to 17, 2020

**Issued Date:** Sep. 18, 2020

**Applicant:** XAC AUTOMATION CORP.

**Address:** 4F, No. 30, INDUSTRY E. RD. IX, SCIENCE-BASED INDUSTRIAL PARK,HSINCHU,TAIWAN

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**FCC Registration /  
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Modification Record .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT (WLAN) .....	7
3.2 Description of Test Modes .....	10
3.2.1 Test Mode Applicability and Tested Channel Detail .....	11
3.3 Duty Cycle of Test Signal .....	13
3.4 Description of Support Units .....	14
3.4.1 Configuration of System under Test .....	15
3.5 General Description of Applied Standards and references .....	16
<b>4 Test Types and Results</b> .....	<b>17</b>
4.1 Radiated Emission and Bandedge Measurement .....	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	17
4.1.2 Test Instruments .....	18
4.1.3 Test Procedures .....	20
4.1.4 Deviation from Test Standard .....	21
4.1.5 Test Setup .....	21
4.1.6 EUT Operating Conditions .....	22
4.1.7 Test Results .....	23
4.2 Conducted Emission Measurement .....	34
4.2.1 Limits of Conducted Emission Measurement .....	34
4.2.2 Test Instruments .....	34
4.2.3 Test Procedures .....	35
4.2.4 Deviation from Test Standard .....	35
4.2.5 Test Setup .....	35
4.2.6 EUT Operating Conditions .....	35
4.2.7 Test Results .....	36
4.3 6dB Bandwidth Measurement .....	38
4.3.1 Limits of 6dB Bandwidth Measurement .....	38
4.3.2 Test Setup .....	38
4.3.3 Test Instruments .....	38
4.3.4 Test Procedure .....	38
4.3.5 Deviation from Test Standard .....	38
4.3.6 EUT Operating Conditions .....	38
4.3.7 Test Result .....	39
4.4 Conducted Output Power Measurement .....	41
4.4.1 Limits of Conducted Output Power Measurement .....	41
4.4.2 Test Setup .....	41
4.4.3 Test Instruments .....	41
4.4.4 Test Procedures .....	41
4.4.5 Deviation from Test Standard .....	41
4.4.6 EUT Operating Conditions .....	41
4.4.7 Test Results .....	42
4.5 Power Spectral Density Measurement .....	44
4.5.1 Limits of Power Spectral Density Measurement .....	44
4.5.2 Test Setup .....	44
4.5.3 Test Instruments .....	44
4.5.4 Test Procedure .....	44
4.5.5 Deviation from Test Standard .....	44
4.5.6 EUT Operating Condition .....	44

4.5.7 Test Results .....	45
4.6 Conducted Out of Band Emission Measurement .....	47
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	47
4.6.2 Test Setup.....	47
4.6.3 Test Instruments .....	47
4.6.4 Test Procedure .....	47
4.6.5 Deviation from Test Standard .....	47
4.6.6 EUT Operating Condition .....	47
4.6.7 Test Results .....	47
<b>5 Pictures of Test Arrangements.....</b>	<b>51</b>
<b>Annex A - Band-Edge Measurement.....</b>	<b>52</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>55</b>

### Release Control Record

Issue No.	Description	Date Issued
RF200518E05	Original release.	Sep. 18, 2020

## 1 Certificate of Conformity

**Product:** Terminal

**Brand:** XAC

**Test Model:** xCL\_AT-150-R3-18U

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** XAC AUTOMATION CORP.

**Test Date:** June 09 to 17, 2020

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Joyce Kuo , **Date:** Sep. 18, 2020  
Joyce Kuo / Specialist

**Approved by :** Clark Lin , **Date:** Sep. 18, 2020  
Clark Lin / Technical Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.20dB at 0.46250MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2487.20MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

### Note:

- For 2.4GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.4 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT (WLAN)

Product	Terminal
Brand	XAC
Test Model	xCL_AT-150-R3-18U
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	Refer to note 3
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 150 Mbps
Operating Frequency	<b>2.4GHz:</b> 2.412 ~ 2.462 GHz <b>5GHz:</b> 5.18 ~ 5.24 GHz, 5.26 ~ 5.32 GHz, 5.50 ~ 5.72 GHz, 5.745 ~ 5.825 GHz
Number of Channel	<b>2.4GHz:</b> 802.11b, 802.11g, 802.11n (HT20): 13 <b>5GHz:</b> 802.11a, 802.11n (HT20): 25 802.11n (HT40): 23
Output Power	<b>2.4 GHz:</b> 267.917 mW <b>5.18 ~ 5.24 GHz:</b> 40.272 mW <b>5.26 ~ 5.32 GHz:</b> 47.863 mW <b>5.5 ~ 5.72 GHz:</b> 34.674 mW <b>5.745 ~ 5.825 GHz:</b> 27.704 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Battery x1 (Option)
Data Cable Supplied	NA

Note:

1. The EUT has three radios as following table:

Radio 1	Radio 2	Radio 3
WLAN(2.4GHz + 5GHz) + Bluetooth	WWAN(LTE + WCDMA)	NFC

2. Simultaneously transmission condition.

Condition	Technology	
1	WWAN	NFC
2	WWAN	Bluetooth
3	WLAN 2.4GHz	NFC
4	WLAN 5GHz	NFC
5	Bluetooth	NFC

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied power adapter and battery as following table:

Adapter (Only test not for sale)		
Brand	Model	Specification
MASS POWER	NBS10B050200VUU	AC Input: 100-240Vac, 0.3A, 50-60Hz DC Output: 5Vdc, 2A
Battery (Option)		
Brand	Model	Specification
Shenzhen Rishengzhi Electronics Technology Co., Ltd.	J625	3.7V, 3000mAh, 11.1Wh

4. The antennas provided to the EUT, please refer to the following table:

Antenna No.	RF Chain NO.	Brand	Model	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type
NFC	Main	XAC	RTOS	13	13.56MHz	wire	None
Wi-Fi BT	Main	AWAN	AYF6P-100002	-2.7	2.4~2.4835GHz	PIFA	i-pex(MHF)
				2.19	5.15~5.85GHz		
				-2.7	2.4~2.4835GHz		
LTE	Main(B2) TX	AWAN	AXF6P-100004	1.55	1850 MHz to 1910 MHz	PIFA	i-pex(MHF)
	Main(B4) TX			1.48	1710 MHz to 1755 MHz		
	Main(B12) TX			2.87	699 MHz to 716 MHz		
	Aux(B2) RX	AWAN	AXF6P-100005	2.36	1930 MHz to 1990 MHz	PIFA	i-pex(MHF)
	Aux(B4) RX			2.91	2110 MHz to 2155 MHz		
	Aux(B12) RX			2.8	729 MHz to 746 MHz		
WCDMA	Main(B2) TX	AWAN	AXF6P-100004	1.55	1850 MHz to 1910 MHz	PIFA	i-pex(MHF)
	Main(B5) TX			1.23	824 MHz to 849 MHz		
	Aux(B2) RX	AWAN	AXF6P-100005	2.36	1930 MHz to 1990 MHz	PIFA	i-pex(MHF)
	Aux(B5) RX			2.84	869 MHz to 894 MHz		

5. The EUT was pre-tested for radiated test under following test modes:

Pre-test Mode	Power
<b>Mode A</b>	<b>Power from Adapter</b>
Mode B	Power from Laptop

From the above modes, the worst radiated test was found in **Mode A**.

6. The EUT was pre-tested for conducted test under following test modes:

Pre-test Mode	Power
<b>Mode A</b>	<b>Power from Adapter</b>
Mode B	Power from Battery

From the above modes, the worst radiated test was found in **Mode A**.



7. The EUT incorporates a SISO function.

<b>2.4GHz Band</b>		
<b>MODULATION MODE</b>	<b>TX &amp; RX CONFIGURATION</b>	
<b>802.11b</b>	1TX	1RX
<b>802.11g</b>	1TX	1RX
<b>802.11n (HT20)</b>	1TX	1RX
<b>5GHz Band</b>		
<b>MODULATION MODE</b>	<b>TX &amp; RX CONFIGURATION</b>	
<b>802.11a</b>	1TX	1RX
<b>802.11n (HT20)</b>	1TX	1RX
<b>802.11n (HT40)</b>	1TX	1RX

8. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	-	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz & Bandedge Measurement  
**RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission  
**APCM**: Antenna Port Conducted Measurement

#### **Radiated Emission Test (Above 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

#### **Radiated Emission Test (Below 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1	DSSS	DBPSK	1

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1	DSSS	DBPSK	1

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

**Test Condition:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (System)	TESTED BY
RE $\geq$ 1G	25deg. C, 75%RH	120Vac, 60Hz	Kevin Ko
RE<1G	29deg. C, 71%RH	120Vac, 60Hz	Kevin Ko
PLC	21deg. C, 60%RH	120Vac, 60Hz	Kevin Ko
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

### 3.3 Duty Cycle of Test Signal


If duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.

If duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.

802.11b: Duty cycle =  $12.269 \text{ ms} / 12.494 \text{ ms} = 0.982$

802.11g: Duty cycle =  $2.03 \text{ ms} / 2.231 \text{ ms} = 0.91$ , Duty factor =  $10 * \log(1/\text{Duty cycle}) = 0.41 \text{ dB}$

802.11n (HT20): Duty cycle =  $1.89 \text{ ms} / 2.11 \text{ ms} = 0.896$ , Duty factor =  $10 * \log(1/\text{Duty cycle}) = 0.48 \text{ dB}$

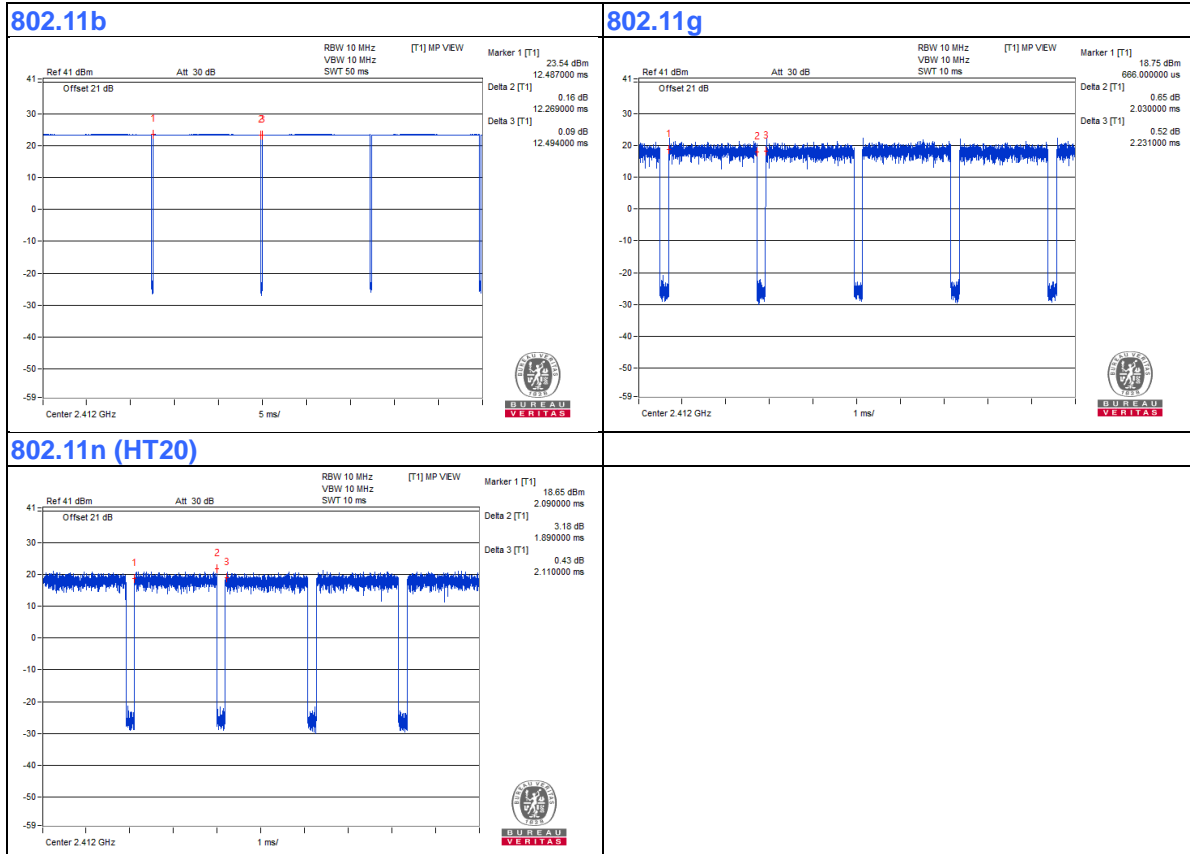


### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	USB Adapter	MASS POWER	NBS10B050200VUU	NA	NA	Supplied by client
B.	SIM Card	Keysight	NA	NA	NA	Provided by Lab
C.	SAM Card *2	XAC	NA	NA	NA	Supplied by client
D.	IC Card	XAC	NA	NA	NA	Supplied by client
E.	Magnetic Card	XAC	NA	NA	NA	Supplied by client
F.	NFC Card	XAC	NA	NA	NA	Supplied by client
G.	Earphone	Infinix	NA	NA	NA	Provided by Lab

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Type C to USB Cable	1	1.2	Yes	0	Supplied by client
2.	Earphone Cable	1	1.1	Yes	0	Provided by Lab

### 3.4.1 Configuration of System under Test

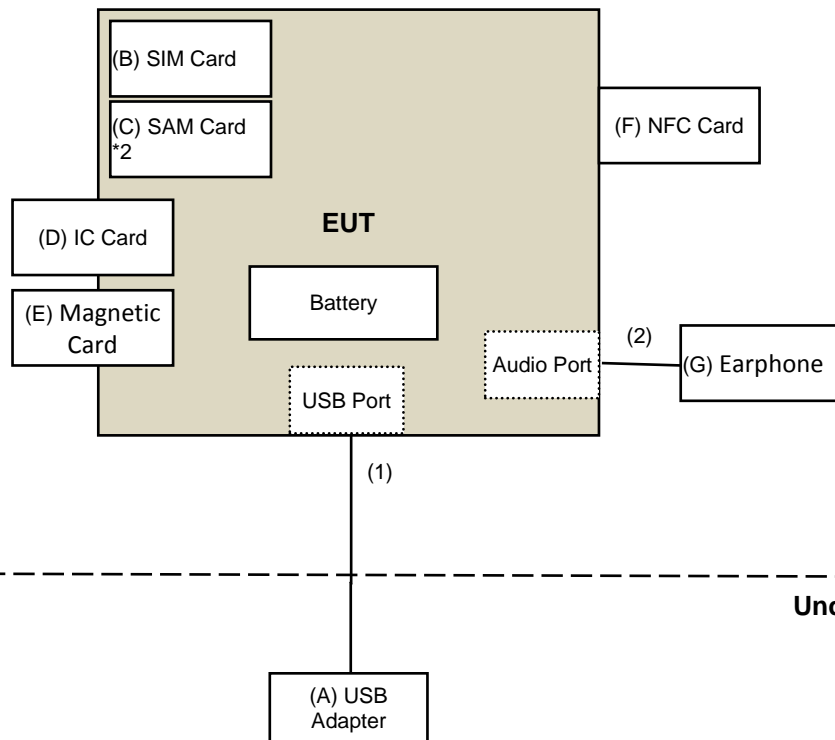

### 3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test standard:**

**FCC Part 15, Subpart C (15.247)**  
**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

**References Test Guidance :**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

All test items have been performed as a reference to the above KDB test guidance.



## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

## 4.1.2 Test Instruments

**For Radiated Emission & Bangedge test:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-00 1	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-00 2	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	Apr. 28, 2020	Apr. 27, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-3-1	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-2	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-3	Mar. 17, 2020	Mar. 16, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 26, 2019	Sep. 25, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1200	160922	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 09, 2020	June 08, 2021
RF Cable	EMC104-SM-SM-6000	180602	June 09, 2020	June 08, 2021
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.0 8	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: June 09 to 11, 2020

**For other test:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Power meter Anritsu	ML2495A	1014008	July 26, 2019	July 25, 2020
Power sensor Anritsu	MA2411B	0917122	July 26, 2019	July 25, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. Tested Date: June 17, 2020

#### 4.1.3 Test Procedures

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


**For Radiated emission below 30MHz**

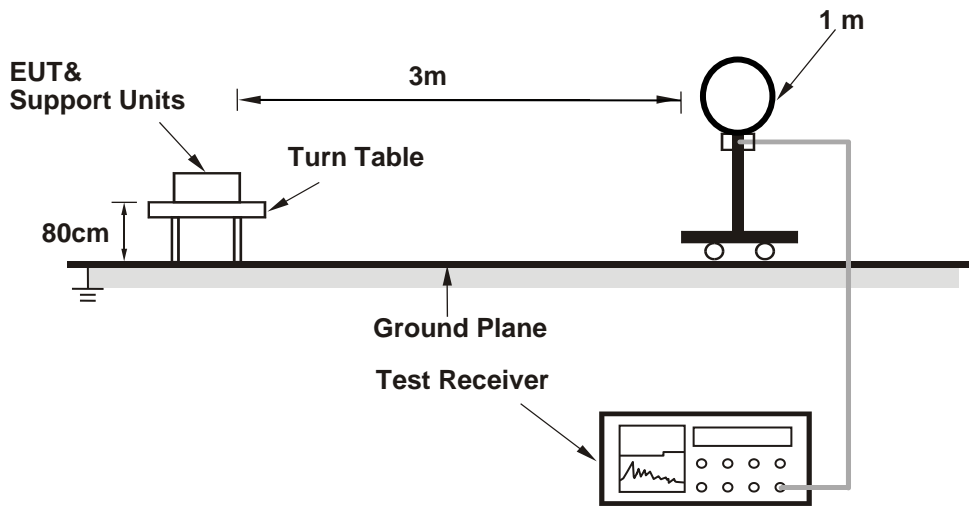

**For Radiated emission 30MHz to 1GHz**

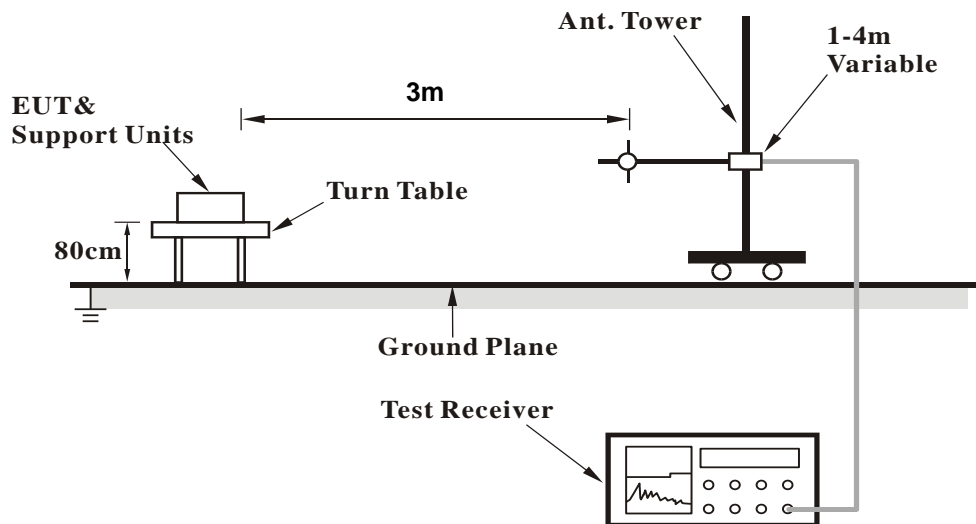

### For Radiated emission above 1GHz

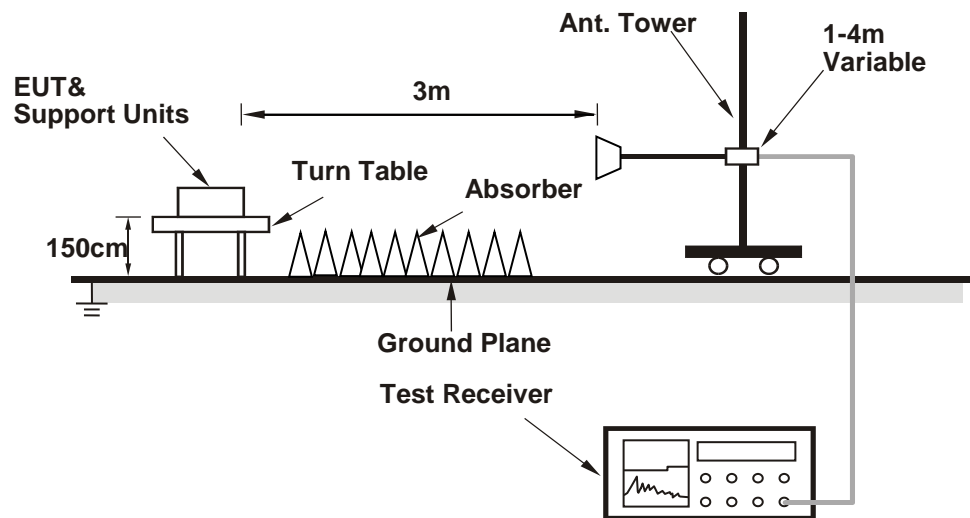

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Controlling software (QDART 4.8.29) has been activated to set the EUT under transmission condition continuously.

## 4.1.7 Test Results

## ABOVE 1GHz DATA

## 802.11b

<b>Channel</b>	TX Channel 1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.8 PK	74.0	-19.2	1.20 H	227	56.7	-1.9
2	2390.00	42.8 AV	54.0	-11.2	1.20 H	227	44.7	-1.9
3	*2412.00	105.4 PK			1.20 H	227	107.3	-1.9
4	*2412.00	103.1 AV			1.20 H	227	105.0	-1.9
5	4824.00	47.1 PK	74.0	-26.9	1.05 H	223	44.2	2.9
6	4824.00	44.3 AV	54.0	-9.7	1.05 H	223	41.4	2.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.0 PK	74.0	-19.0	1.54 V	225	56.9	-1.9
2	2390.00	44.9 AV	54.0	-9.1	1.54 V	225	46.8	-1.9
3	*2412.00	108.4 PK			1.54 V	225	110.3	-1.9
4	*2412.00	106.1 AV			1.54 V	225	108.0	-1.9
5	4824.00	51.2 PK	74.0	-22.8	3.72 V	144	48.3	2.9
6	4824.00	49.6 AV	54.0	-4.4	3.72 V	144	46.7	2.9

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>Channel</b>	TX Channel 6	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.2 PK	74.0	-19.8	1.16 H	221	56.1	-1.9
2	2390.00	41.6 AV	54.0	-12.4	1.16 H	221	43.5	-1.9
3	*2437.00	106.5 PK			1.16 H	221	108.5	-2.0
4	*2437.00	103.9 AV			1.16 H	221	105.9	-2.0
5	2483.50	54.9 PK	74.0	-19.1	1.16 H	221	56.8	-1.9
6	2483.50	42.2 AV	54.0	-11.8	1.16 H	221	44.1	-1.9
7	4874.00	47.1 PK	74.0	-26.9	1.02 H	213	44.3	2.8
8	4874.00	44.6 AV	54.0	-9.4	1.02 H	213	41.8	2.8
9	7311.00	45.6 PK	74.0	-28.4	2.23 H	240	36.7	8.9
10	7311.00	35.7 AV	54.0	-18.3	2.23 H	240	26.8	8.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.6 PK	74.0	-19.4	2.17 V	272	56.5	-1.9
2	2390.00	41.9 AV	54.0	-12.1	2.17 V	272	43.8	-1.9
3	*2437.00	109.3 PK			2.17 V	272	111.3	-2.0
4	*2437.00	107.0 AV			2.17 V	272	109.0	-2.0
5	2483.50	55.1 PK	74.0	-18.9	2.17 V	272	57.0	-1.9
6	2483.50	42.3 AV	54.0	-11.7	2.17 V	272	44.2	-1.9
7	4874.00	51.4 PK	74.0	-22.6	3.72 V	131	48.6	2.8
8	4874.00	50.0 AV	54.0	-4.0	3.72 V	131	47.2	2.8
9	7311.00	43.2 PK	74.0	-30.8	2.17 V	37	34.3	8.9
10	7311.00	33.6 AV	54.0	-20.4	2.17 V	37	24.7	8.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.



<b>Channel</b>	TX Channel 11	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.5 PK			1.57 H	240	105.4	-1.9
2	*2462.00	101.5 AV			1.57 H	240	103.4	-1.9
3	2487.20	59.1 PK	74.0	-14.9	1.57 H	240	61.0	-1.9
4	2487.20	52.3 AV	54.0	-1.7	1.57 H	240	54.2	-1.9
5	4924.00	46.9 PK	74.0	-27.1	1.08 H	225	44.2	2.7
6	4924.00	44.1 AV	54.0	-9.9	1.08 H	225	41.4	2.7
7	7386.00	45.3 PK	74.0	-28.7	2.27 H	256	36.3	9.0
8	7386.00	35.1 AV	54.0	-18.9	2.27 H	256	26.1	9.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.2 PK			1.72 V	212	108.1	-1.9
2	*2462.00	104.7 AV			1.72 V	212	106.6	-1.9
3	2487.20	59.0 PK	74.0	-15.0	1.72 V	212	60.9	-1.9
<b>4</b>	<b>2487.20</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.72 V</b>	<b>212</b>	<b>55.8</b>	<b>-1.9</b>
5	4924.00	51.2 PK	74.0	-22.8	3.68 V	156	48.5	2.7
6	4924.00	49.4 AV	54.0	-4.6	3.68 V	156	46.7	2.7
7	7386.00	42.7 PK	74.0	-31.3	2.15 V	60	33.7	9.0
8	7386.00	33.2 AV	54.0	-20.8	2.15 V	60	24.2	9.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

## 802.11g

<b>Channel</b>	TX Channel 1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	1.56 H	234	70.0	-1.9
2	2390.00	53.1 AV	54.0	-0.9	1.56 H	234	55.0	-1.9
3	*2412.00	106.5 PK			1.56 H	234	108.4	-1.9
4	*2412.00	97.2 AV			1.56 H	234	99.1	-1.9
5	4824.00	47.2 PK	74.0	-26.8	1.11 H	212	44.3	2.9
6	4824.00	44.4 AV	54.0	-9.6	1.11 H	212	41.5	2.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.7 PK	74.0	-5.3	2.10 V	254	70.6	-1.9
2	2390.00	53.7 AV	54.0	-0.3	2.10 V	254	55.6	-1.9
3	*2412.00	108.5 PK			2.10 V	254	110.4	-1.9
4	*2412.00	99.5 AV			2.10 V	254	101.4	-1.9
5	4824.00	51.4 PK	74.0	-22.6	3.69 V	152	48.5	2.9
6	4824.00	49.6 AV	54.0	-4.4	3.69 V	152	46.7	2.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>Channel</b>	TX Channel 6	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.8 PK	74.0	-18.2	1.54 H	252	57.7	-1.9
2	2390.00	43.7 AV	54.0	-10.3	1.54 H	252	45.6	-1.9
3	*2437.00	107.8 PK			1.54 H	252	109.8	-2.0
4	*2437.00	98.6 AV			1.54 H	252	100.6	-2.0
5	2483.50	59.9 PK	74.0	-14.1	1.54 H	252	61.8	-1.9
6	2483.50	46.6 AV	54.0	-7.4	1.54 H	252	48.5	-1.9
7	4874.00	47.1 PK	74.0	-26.9	1.01 H	235	44.3	2.8
8	4874.00	44.4 AV	54.0	-9.6	1.01 H	235	41.6	2.8
9	7311.00	45.5 PK	74.0	-28.5	2.26 H	254	36.6	8.9
10	7311.00	35.6 AV	54.0	-18.4	2.26 H	254	26.7	8.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.2 PK	74.0	-18.8	2.23 V	272	57.1	-1.9
2	2390.00	43.3 AV	54.0	-10.7	2.23 V	272	45.2	-1.9
3	*2437.00	111.2 PK			2.23 V	272	113.2	-2.0
4	*2437.00	101.9 AV			2.23 V	272	103.9	-2.0
5	2483.50	59.6 PK	74.0	-14.4	2.23 V	272	61.5	-1.9
6	2483.50	46.2 AV	54.0	-7.8	2.23 V	272	48.1	-1.9
7	4874.00	51.5 PK	74.0	-22.5	3.73 V	149	48.7	2.8
8	4874.00	49.8 AV	54.0	-4.2	3.73 V	149	47.0	2.8
9	7311.00	43.0 PK	74.0	-31.0	2.17 V	37	34.1	8.9
10	7311.00	33.4 AV	54.0	-20.6	2.17 V	37	24.5	8.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>Channel</b>	TX Channel 11	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.5 PK			1.52 H	239	103.4	-1.9
2	*2462.00	92.1 AV			1.52 H	239	94.0	-1.9
3	2483.50	65.9 PK	74.0	-8.1	1.52 H	239	67.8	-1.9
4	2483.50	52.0 AV	54.0	-2.0	1.52 H	239	53.9	-1.9
5	4924.00	46.9 PK	74.0	-27.1	1.07 H	209	44.2	2.7
6	4924.00	44.0 AV	54.0	-10.0	1.07 H	209	41.3	2.7
7	7386.00	44.9 PK	74.0	-29.1	2.27 H	238	35.9	9.0
8	7386.00	35.3 AV	54.0	-18.7	2.27 H	238	26.3	9.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.4 PK			2.03 V	240	104.3	-1.9
2	*2462.00	92.6 AV			2.03 V	240	94.5	-1.9
3	2483.50	67.4 PK	74.0	-6.6	2.03 V	240	69.3	-1.9
4	2483.50	53.7 AV	54.0	-0.3	2.03 V	240	55.6	-1.9
5	4924.00	51.2 PK	74.0	-22.8	3.69 V	158	48.5	2.7
6	4924.00	49.6 AV	54.0	-4.4	3.69 V	158	46.9	2.7
7	7386.00	43.0 PK	74.0	-31.0	2.21 V	45	34.0	9.0
8	7386.00	33.6 AV	54.0	-20.4	2.21 V	45	24.6	9.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

**802.11n (HT20)**

<b>Channel</b>	TX Channel 1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.2 PK	74.0	-10.8	1.57 H	249	65.1	-1.9
2	2390.00	50.2 AV	54.0	-3.8	1.57 H	249	52.1	-1.9
3	*2412.00	103.9 PK			1.57 H	249	105.8	-1.9
4	*2412.00	94.4 AV			1.57 H	249	96.3	-1.9
5	4824.00	47.2 PK	74.0	-26.8	1.08 H	222	44.3	2.9
6	4824.00	44.6 AV	54.0	-9.4	1.08 H	222	41.7	2.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.4 PK	74.0	-5.6	1.84 V	226	70.3	-1.9
2	2390.00	53.8 AV	54.0	-0.2	1.84 V	226	55.7	-1.9
3	*2412.00	106.4 PK			1.84 V	226	108.3	-1.9
4	*2412.00	97.9 AV			1.84 V	226	99.8	-1.9
5	4824.00	50.7 PK	74.0	-23.3	3.68 V	129	47.8	2.9
6	4824.00	49.4 AV	54.0	-4.6	3.68 V	129	46.5	2.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>Channel</b>	TX Channel 6	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.3 PK	74.0	-18.7	1.56 H	238	57.2	-1.9
2	2390.00	43.4 AV	54.0	-10.6	1.56 H	238	45.3	-1.9
3	*2437.00	105.5 PK			1.56 H	238	107.5	-2.0
4	*2437.00	97.3 AV			1.56 H	238	99.3	-2.0
5	2483.50	56.9 PK	74.0	-17.1	1.56 H	238	58.8	-1.9
6	2483.50	47.1 AV	54.0	-6.9	1.56 H	238	49.0	-1.9
7	4874.00	47.6 PK	74.0	-26.4	1.08 H	229	44.8	2.8
8	4874.00	44.6 AV	54.0	-9.4	1.08 H	229	41.8	2.8
9	7311.00	45.0 PK	74.0	-29.0	2.22 H	263	36.1	8.9
10	7311.00	35.3 AV	54.0	-18.7	2.22 H	263	26.4	8.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.2 PK	74.0	-18.8	2.19 V	256	57.1	-1.9
2	2390.00	43.4 AV	54.0	-10.6	2.19 V	256	45.3	-1.9
3	*2437.00	108.8 PK			2.19 V	256	110.8	-2.0
4	*2437.00	100.6 AV			2.19 V	256	102.6	-2.0
5	2483.50	56.8 PK	74.0	-17.2	2.19 V	256	58.7	-1.9
6	2483.50	47.2 AV	54.0	-6.8	2.19 V	256	49.1	-1.9
7	4874.00	51.6 PK	74.0	-22.4	3.72 V	132	48.8	2.8
8	4874.00	49.9 AV	54.0	-4.1	3.72 V	132	47.1	2.8
9	7311.00	43.0 PK	74.0	-31.0	2.12 V	28	34.1	8.9
10	7311.00	33.8 AV	54.0	-20.2	2.12 V	28	24.9	8.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>Channel</b>	TX Channel 11	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.5 PK			1.59 H	239	103.4	-1.9
2	*2462.00	92.1 AV			1.59 H	239	94.0	-1.9
3	2483.50	69.7 PK	74.0	-4.3	1.59 H	239	71.6	-1.9
4	2483.50	53.2 AV	54.0	-0.8	1.59 H	239	55.1	-1.9
5	4924.00	46.4 PK	74.0	-27.6	1.04 H	215	43.7	2.7
6	4924.00	43.8 AV	54.0	-10.2	1.04 H	215	41.1	2.7
7	7386.00	45.3 PK	74.0	-28.7	2.27 H	238	36.3	9.0
8	7386.00	35.6 AV	54.0	-18.4	2.27 H	238	26.6	9.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.9 PK			1.77 V	228	103.8	-1.9
2	*2462.00	93.0 AV			1.77 V	228	94.9	-1.9
3	2483.50	68.5 PK	74.0	-5.5	1.77 V	228	70.4	-1.9
4	2483.50	53.8 AV	54.0	-0.2	1.77 V	228	55.7	-1.9
5	4924.00	51.5 PK	74.0	-22.5	3.75 V	133	48.8	2.7
6	4924.00	49.8 AV	54.0	-4.2	3.75 V	133	47.1	2.7
7	7386.00	43.2 PK	74.0	-30.8	2.11 V	53	34.2	9.0
8	7386.00	33.7 AV	54.0	-20.3	2.11 V	53	24.7	9.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

Below 1GHz Data:

802.11b


<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.22	33.3 QP	40.0	-6.7	1.50 H	302	42.0	-8.7
2	132.53	35.3 QP	43.5	-8.2	2.00 H	282	43.2	-7.9
3	189.54	36.8 QP	43.5	-6.7	1.50 H	251	46.2	-9.4
4	244.90	34.6 QP	46.0	-11.4	1.50 H	34	42.7	-8.1
5	292.02	33.6 QP	46.0	-12.4	1.00 H	300	39.8	-6.2
6	332.06	33.0 QP	46.0	-13.0	1.00 H	131	37.7	-4.7

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

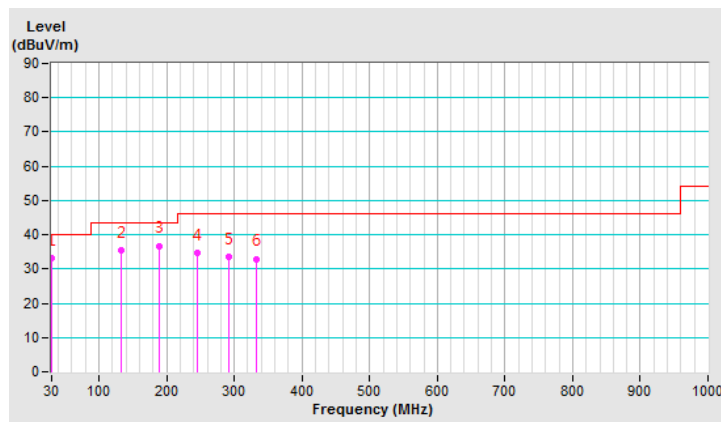




<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.33	34.6 QP	40.0	-5.4	1.00 V	148	42.1	-7.5
2	109.86	31.7 QP	43.5	-11.8	1.00 V	332	41.8	-10.1
3	157.51	28.5 QP	43.5	-15.0	1.50 V	37	35.3	-6.8
4	247.30	29.7 QP	46.0	-16.3	1.50 V	330	37.7	-8.0
5	323.98	31.1 QP	46.0	-14.9	1.00 V	358	36.1	-5.0
6	444.55	31.7 QP	46.0	-14.3	1.00 V	1	33.3	-1.6

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

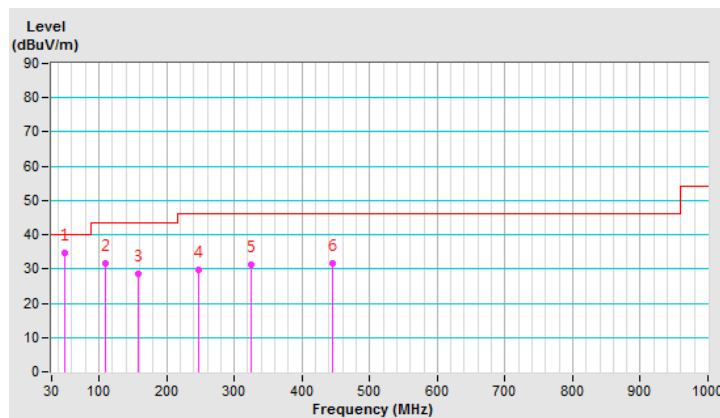

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 30, 2019	Aug. 29, 2020
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
3. Tested Date: June 09, 2020

#### 4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**Note:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

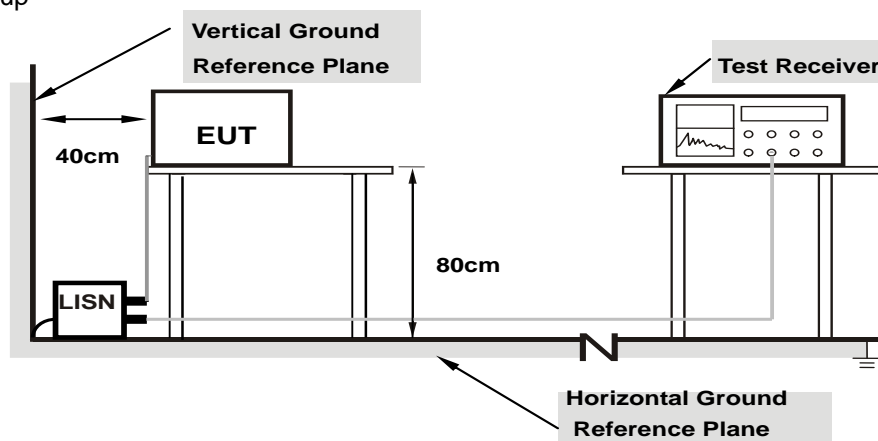

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


#### 4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	9.97	40.33	17.75	50.30	27.72	64.61	54.61	-14.31	-26.89
2	0.19687	9.97	38.27	18.58	48.24	28.55	63.74	53.74	-15.50	-25.19
3	0.48594	9.99	32.87	18.28	42.86	28.27	56.24	46.24	-13.38	-17.97
4	0.61875	9.99	31.33	18.31	41.32	28.30	56.00	46.00	-14.68	-17.70
5	0.90391	10.01	28.88	12.54	38.89	22.55	56.00	46.00	-17.11	-23.45
6	1.35547	10.04	30.19	16.66	40.23	26.70	56.00	46.00	-15.77	-19.30

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

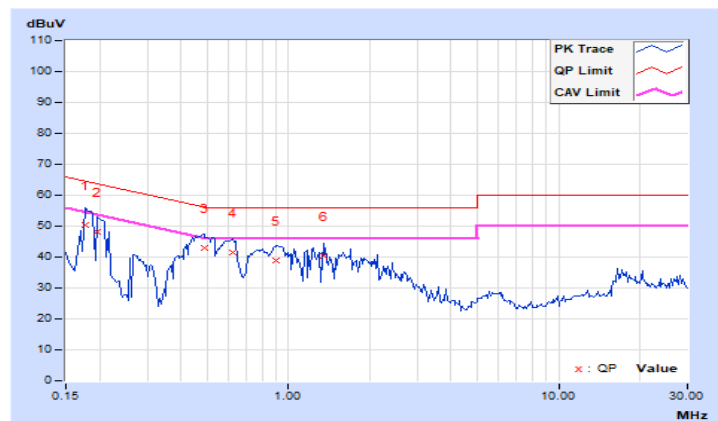


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18125	9.97	38.41	17.36	48.38	27.33	64.43	54.43	-16.05	-27.10
2	0.20859	9.97	36.52	17.58	46.49	27.55	63.26	53.26	-16.77	-25.71
<b>3</b>	<b>0.46250</b>	<b>9.98</b>	<b>33.47</b>	<b>17.56</b>	<b>43.45</b>	<b>27.54</b>	<b>56.65</b>	<b>46.65</b>	<b>-13.20</b>	<b>-19.11</b>
4	0.62656	10.00	31.86	19.27	41.86	29.27	56.00	46.00	-14.14	-16.73
5	0.91953	10.01	29.00	12.76	39.01	22.77	56.00	46.00	-16.99	-23.23
6	1.36719	10.03	30.49	17.34	40.52	27.37	56.00	46.00	-15.48	-18.63

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

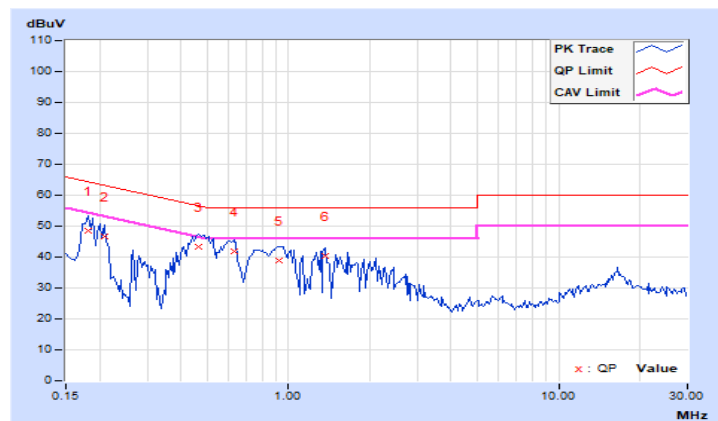


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	10.15	0.5	Pass
6	2437	10.1	0.5	Pass
11	2462	9.03	0.5	Pass

##### 802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.41	0.5	Pass
6	2437	16.37	0.5	Pass
11	2462	16.41	0.5	Pass

##### 802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	17.62	0.5	Pass
6	2437	16.38	0.5	Pass
11	2462	16.37	0.5	Pass

Spectrum Plot of Worst Value


802.11b / CH11

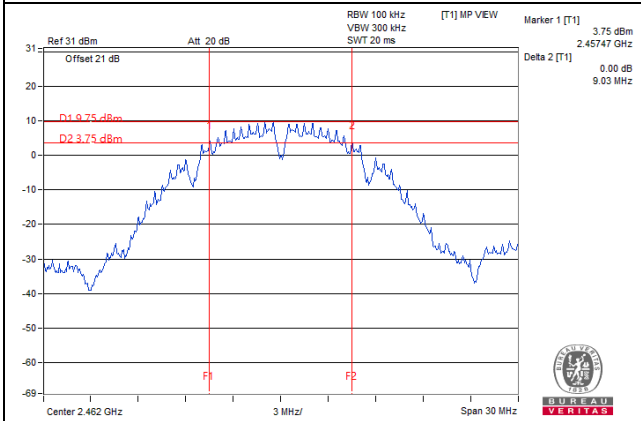

802.11g / CH6

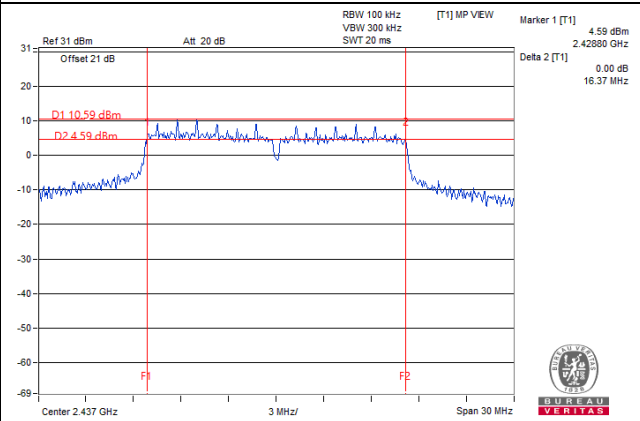

802.11n (HT20) / CH11

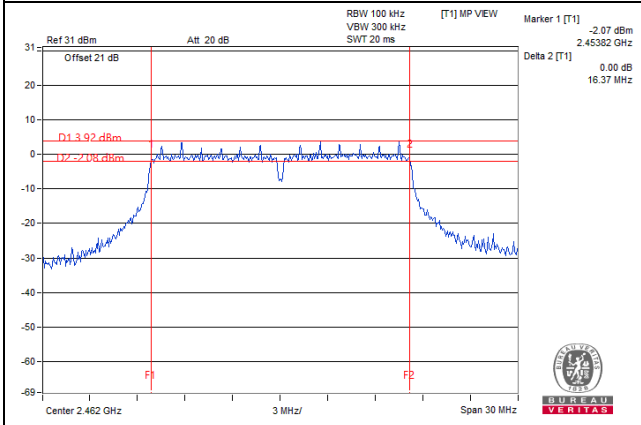




## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

### 4.4.2 Test Setup



### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

#### 4.4.7 Test Results

#### FOR PEAK POWER

##### 802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	192.752	22.85	30	Pass
6	2437	183.654	22.64	30	Pass
11	2462	117.22	20.69	30	Pass

##### 802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	215.278	23.33	30	Pass
6	2437	255.859	24.08	30	Pass
11	2462	152.405	21.83	30	Pass

##### 802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	198.609	22.98	30	Pass
6	2437	267.917	24.28	30	Pass
11	2462	136.458	21.35	30	Pass

## FOR AVERAGE POWER

### 802.11b

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	138.038	21.40
6	2437	115.08	20.61
11	2462	66.681	18.24

### 802.11g

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	51.404	17.11
6	2437	103.276	20.14
11	2462	25.763	14.11

### 802.11n (HT20)


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	51.168	17.09
6	2437	97.724	19.90
11	2462	21.135	13.25

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set the VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as Item 4.3.6

#### 4.5.7 Test Results

##### 802.11b

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-1.79	8	Pass
6	2437	-3.54	8	Pass
11	2462	-4.95	8	Pass

##### 802.11g


Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-7.26	8	Pass
6	2437	-4.90	8	Pass
11	2462	-10.25	8	Pass

##### 802.11n (HT20)


Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-7.82	8	Pass
6	2437	-4.82	8	Pass
11	2462	-10.71	8	Pass

Spectrum Plot of Worst Value


802.11b / CH1

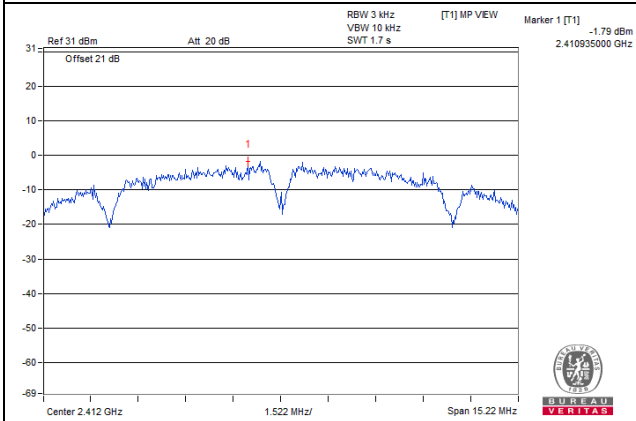

802.11g / CH6

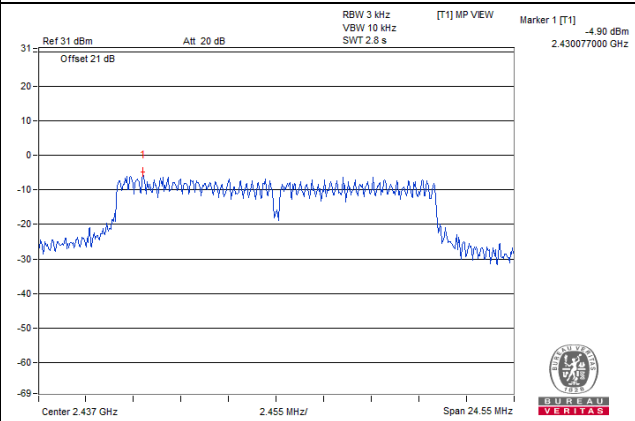

802.11n (HT20) / CH6

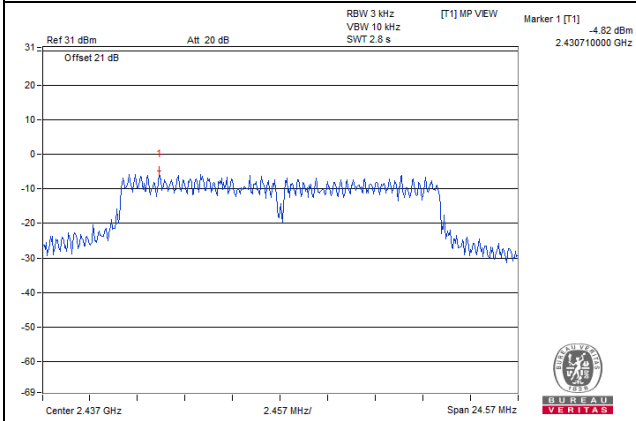


## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup

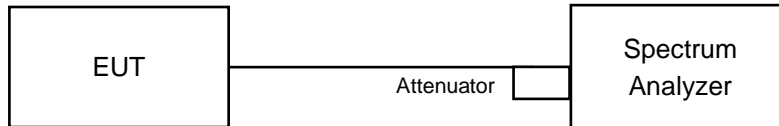

### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition



Same as Item 4.3.6

### 4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b



CH 1

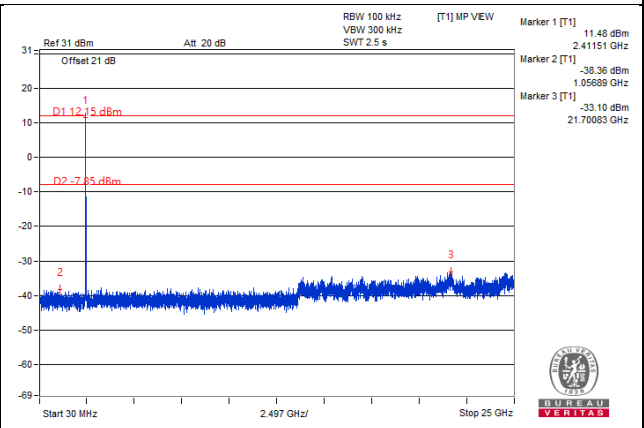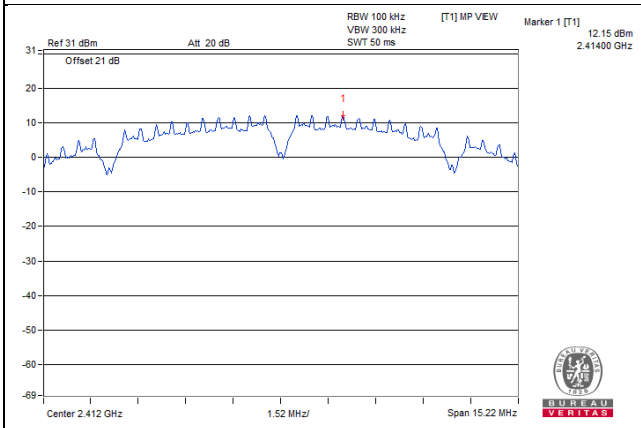


CH 6

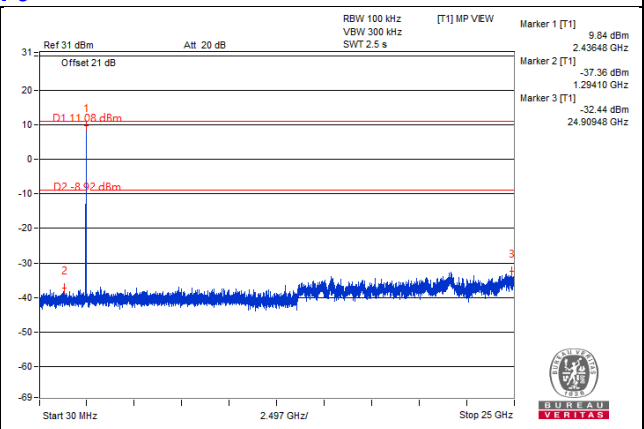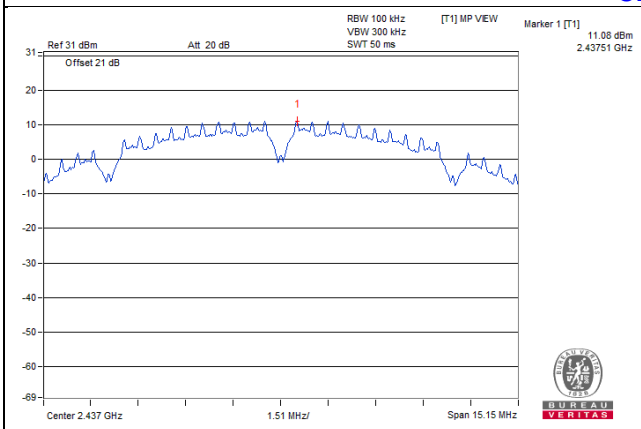


CH 11

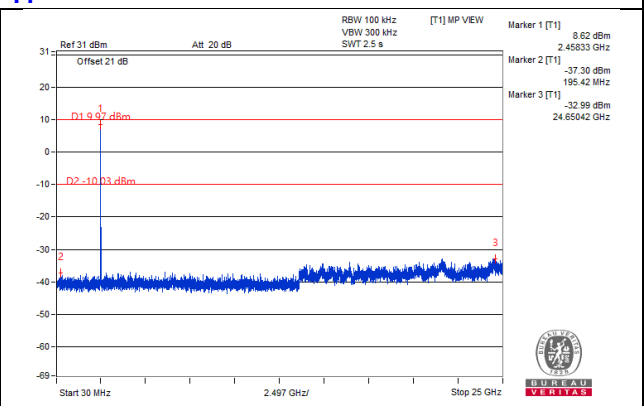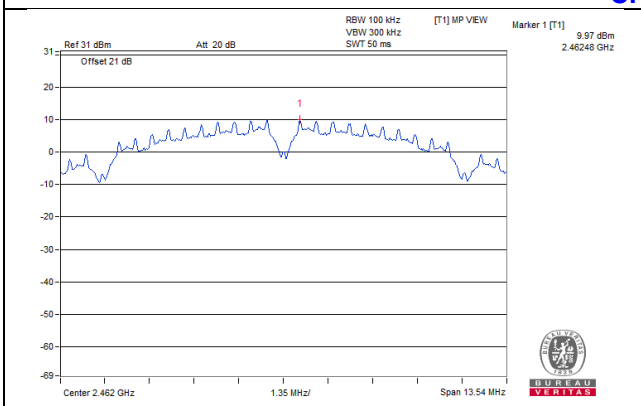

CH 1 Band edge

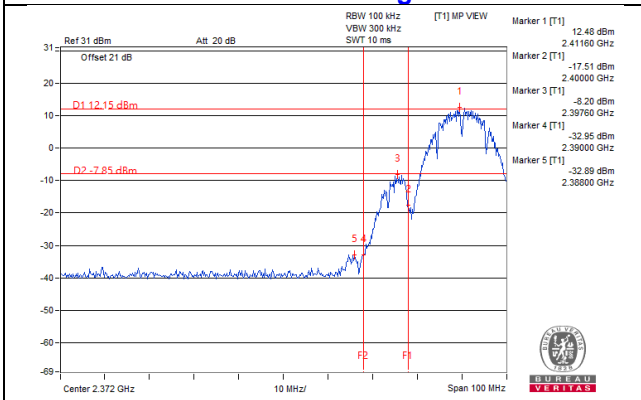



CH 11 Band edge

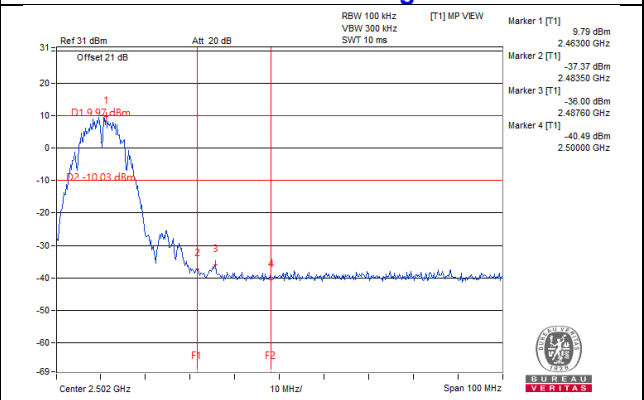





802.11g



CH 1

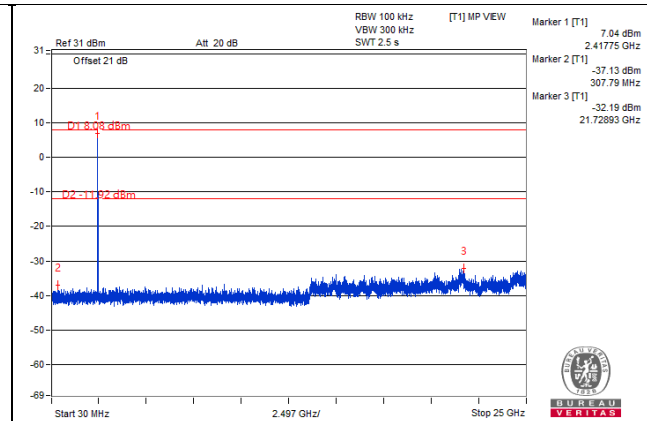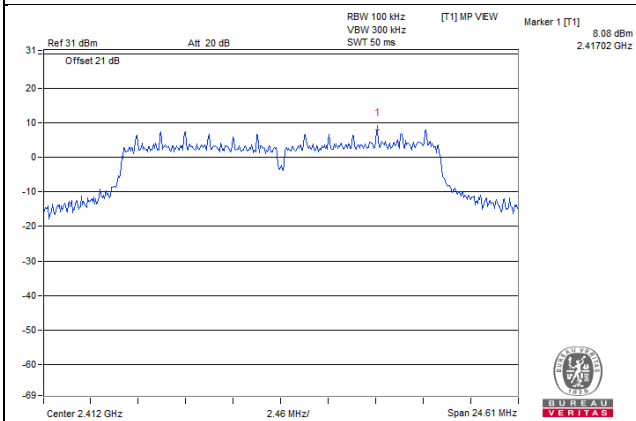



CH 6

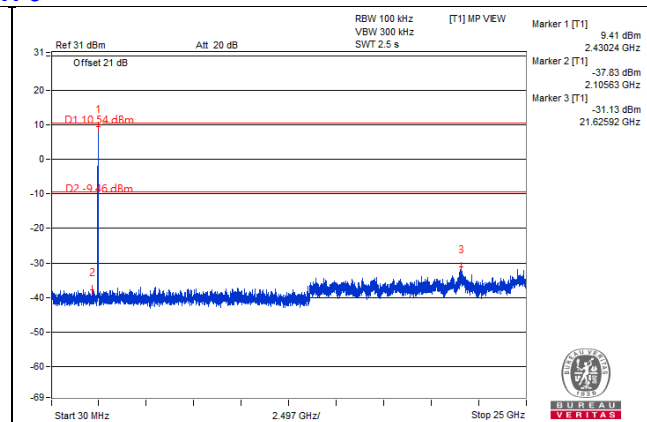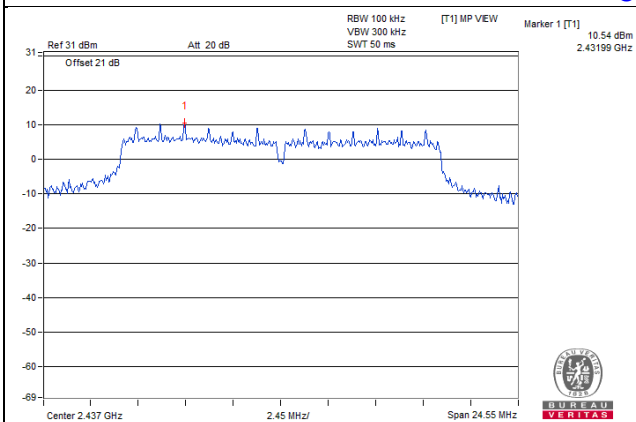

CH 11

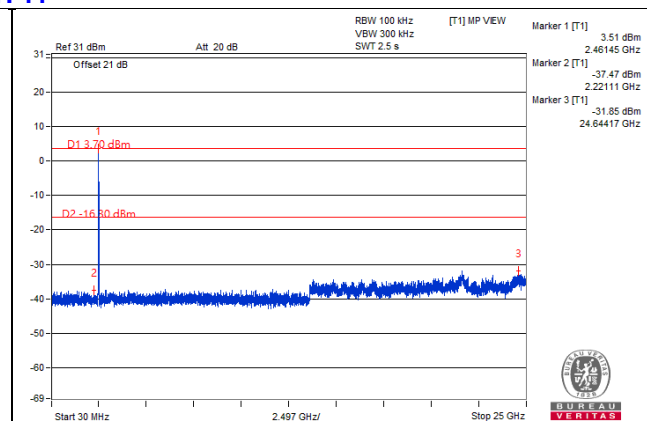
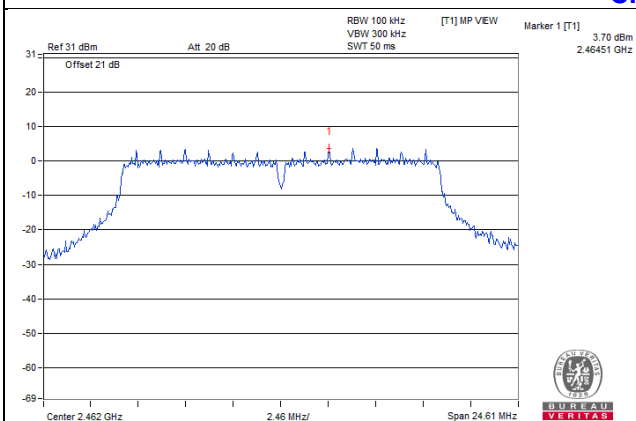


CH 1 Band edge

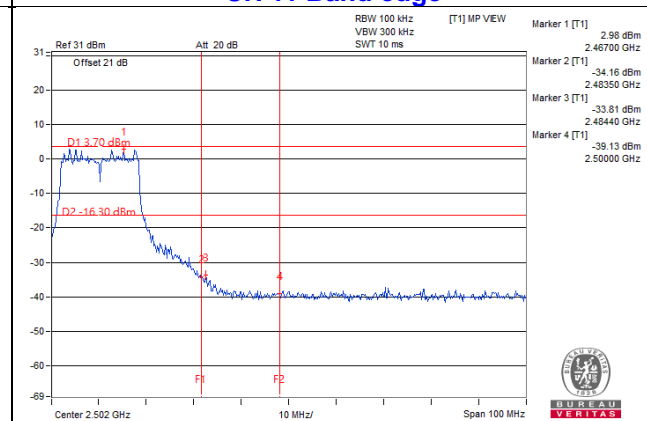
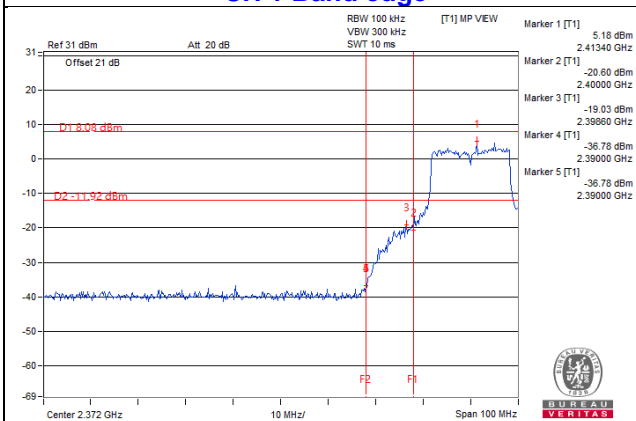


802.11n (HT20)



CH 1

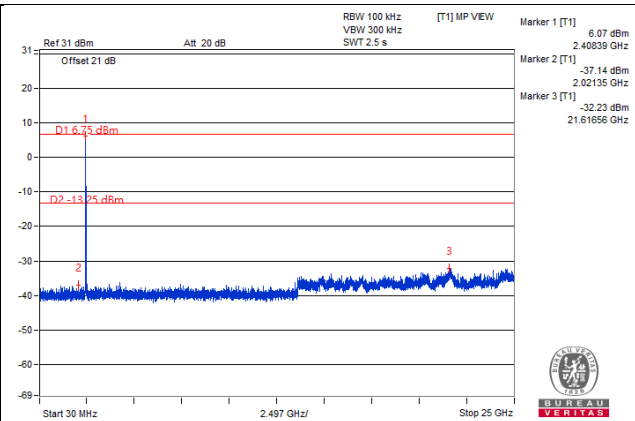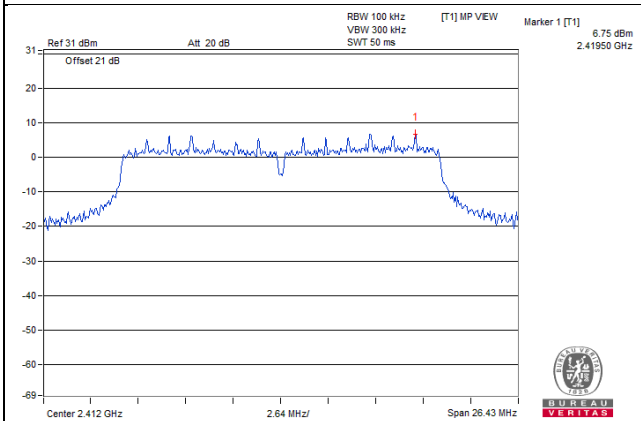


CH 6

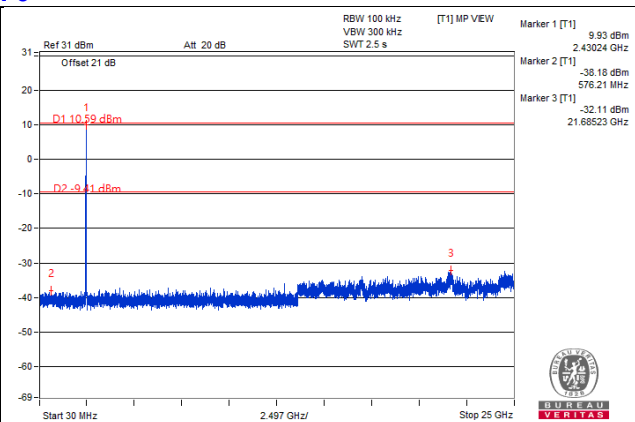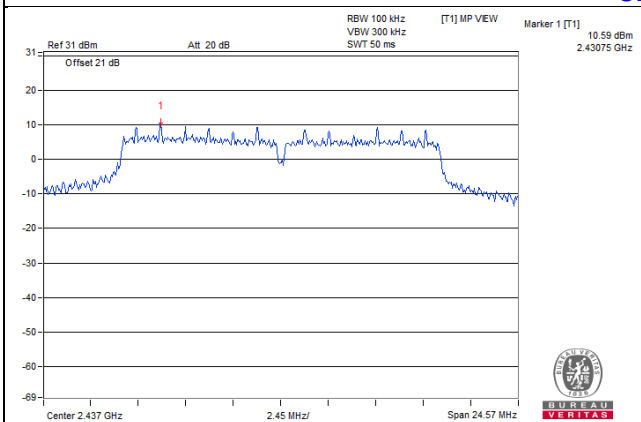


CH 11

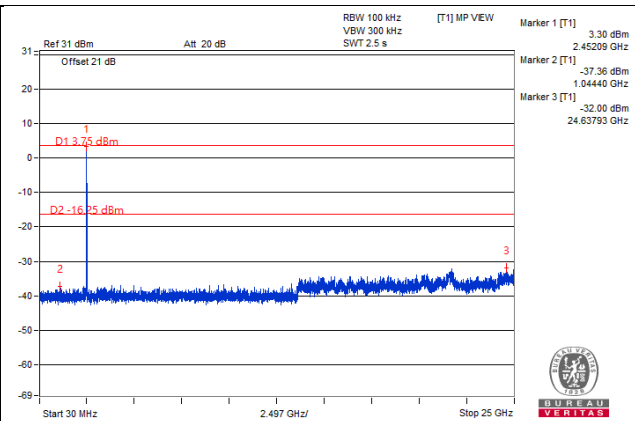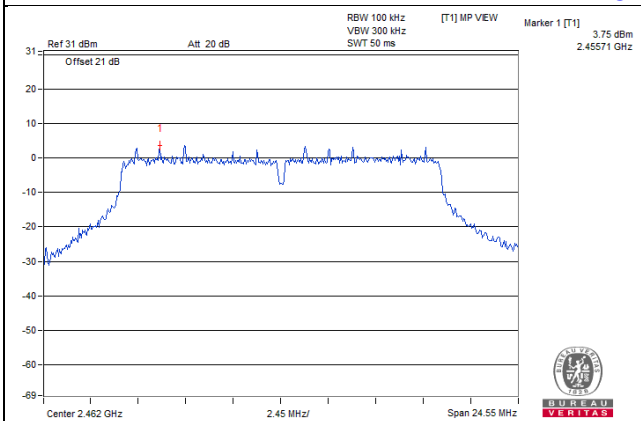

CH 1 Band edge

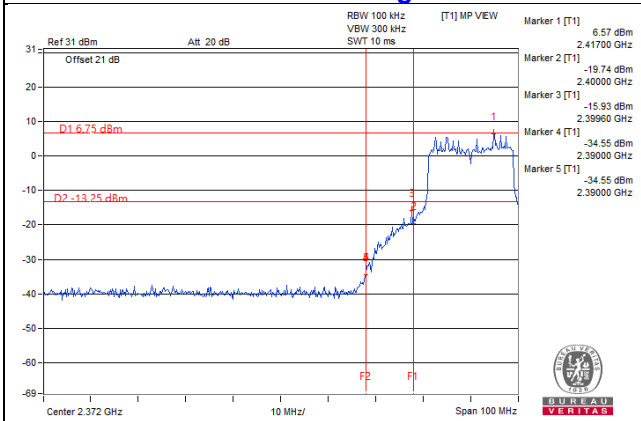

CH 11 Band edge

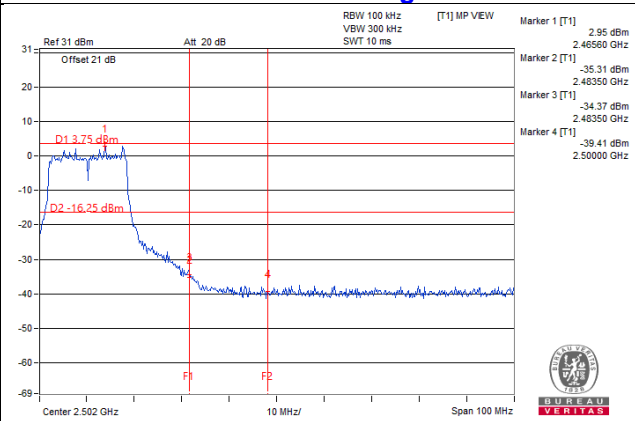


## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

# Annex A - Band-Edge Measurement


## 802.11b

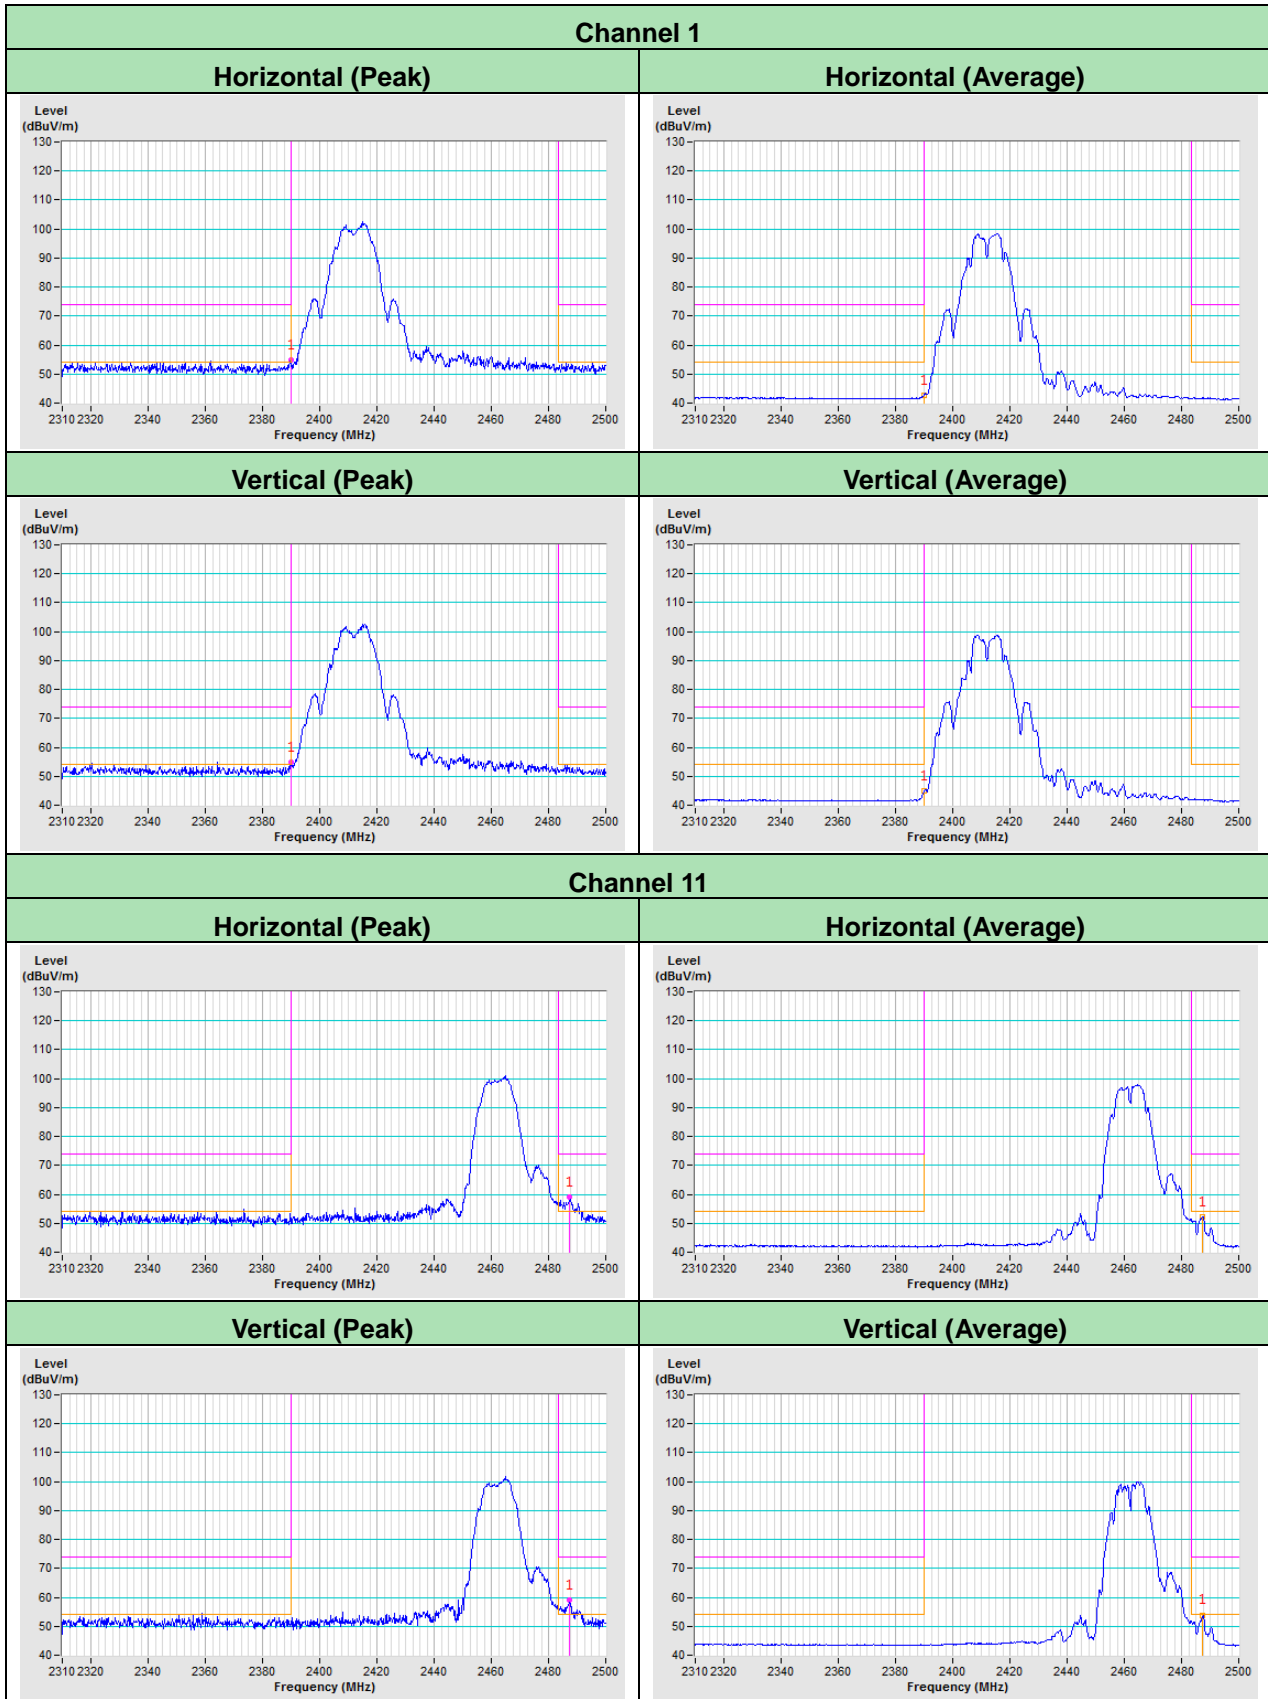


802.11g

**Channel 1**


**Horizontal (Peak)**

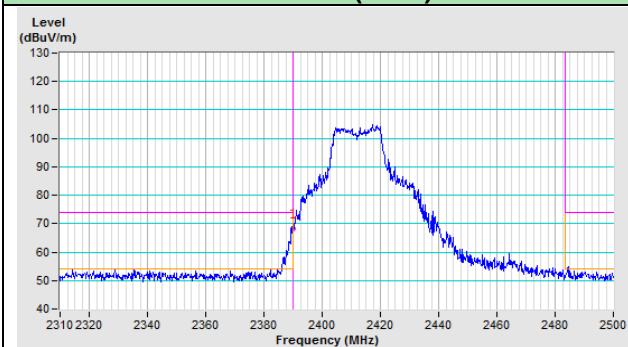


**Horizontal (Average)**

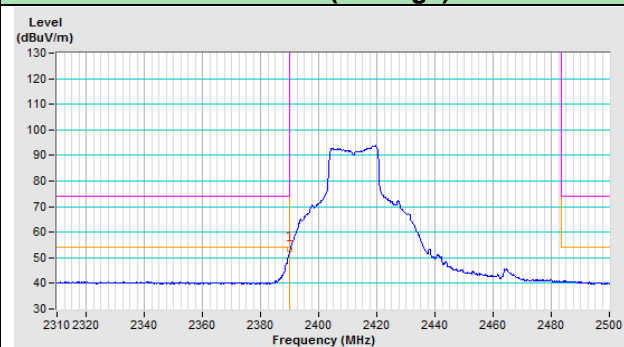

**Vertical (Peak)**

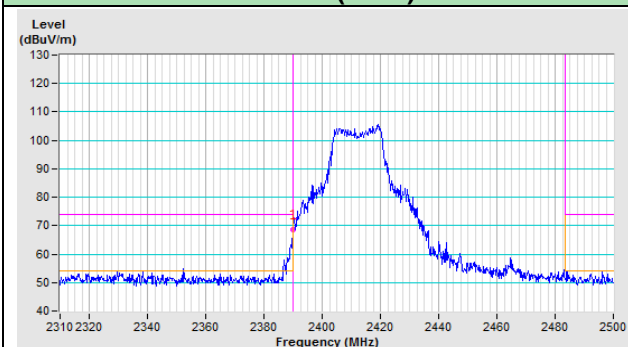


**Vertical (Average)**

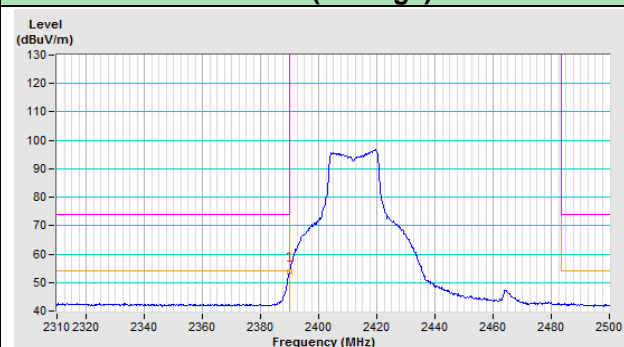


**Channel 11**


**Horizontal (Peak)**

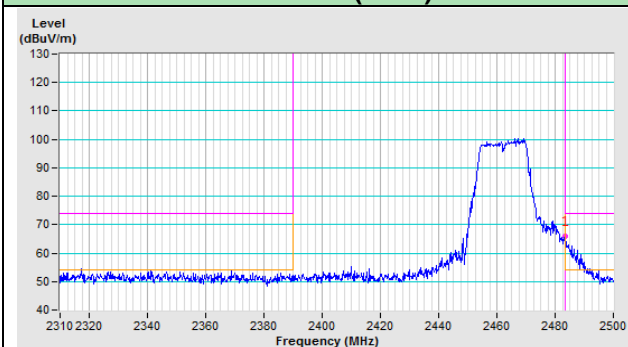


**Horizontal (Average)**

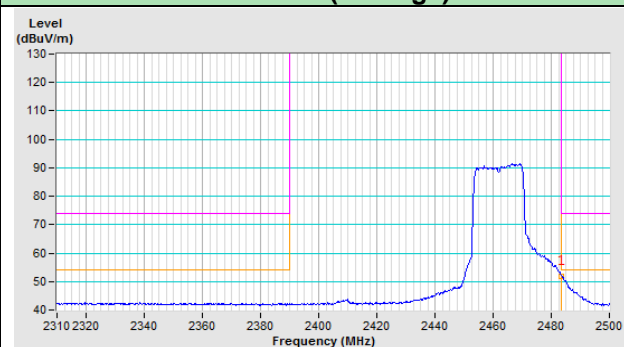


**Vertical (Peak)**

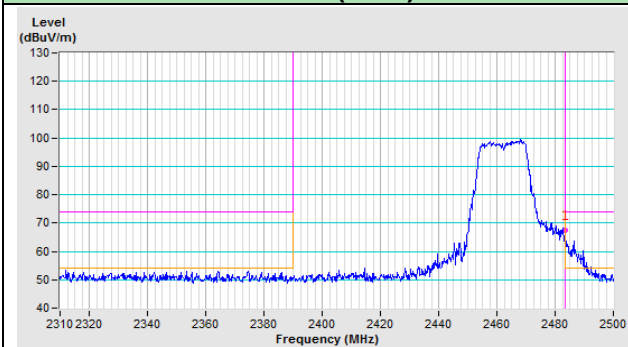

**Vertical (Average)**

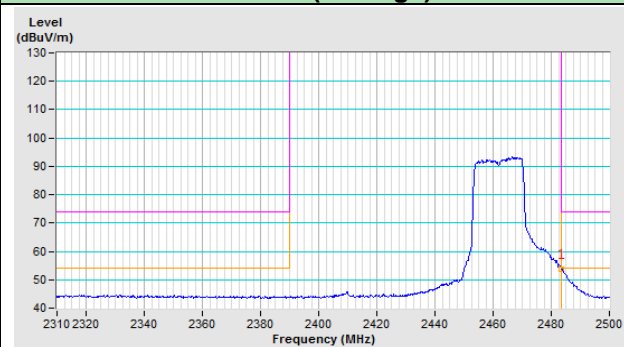

802.11n (HT20)

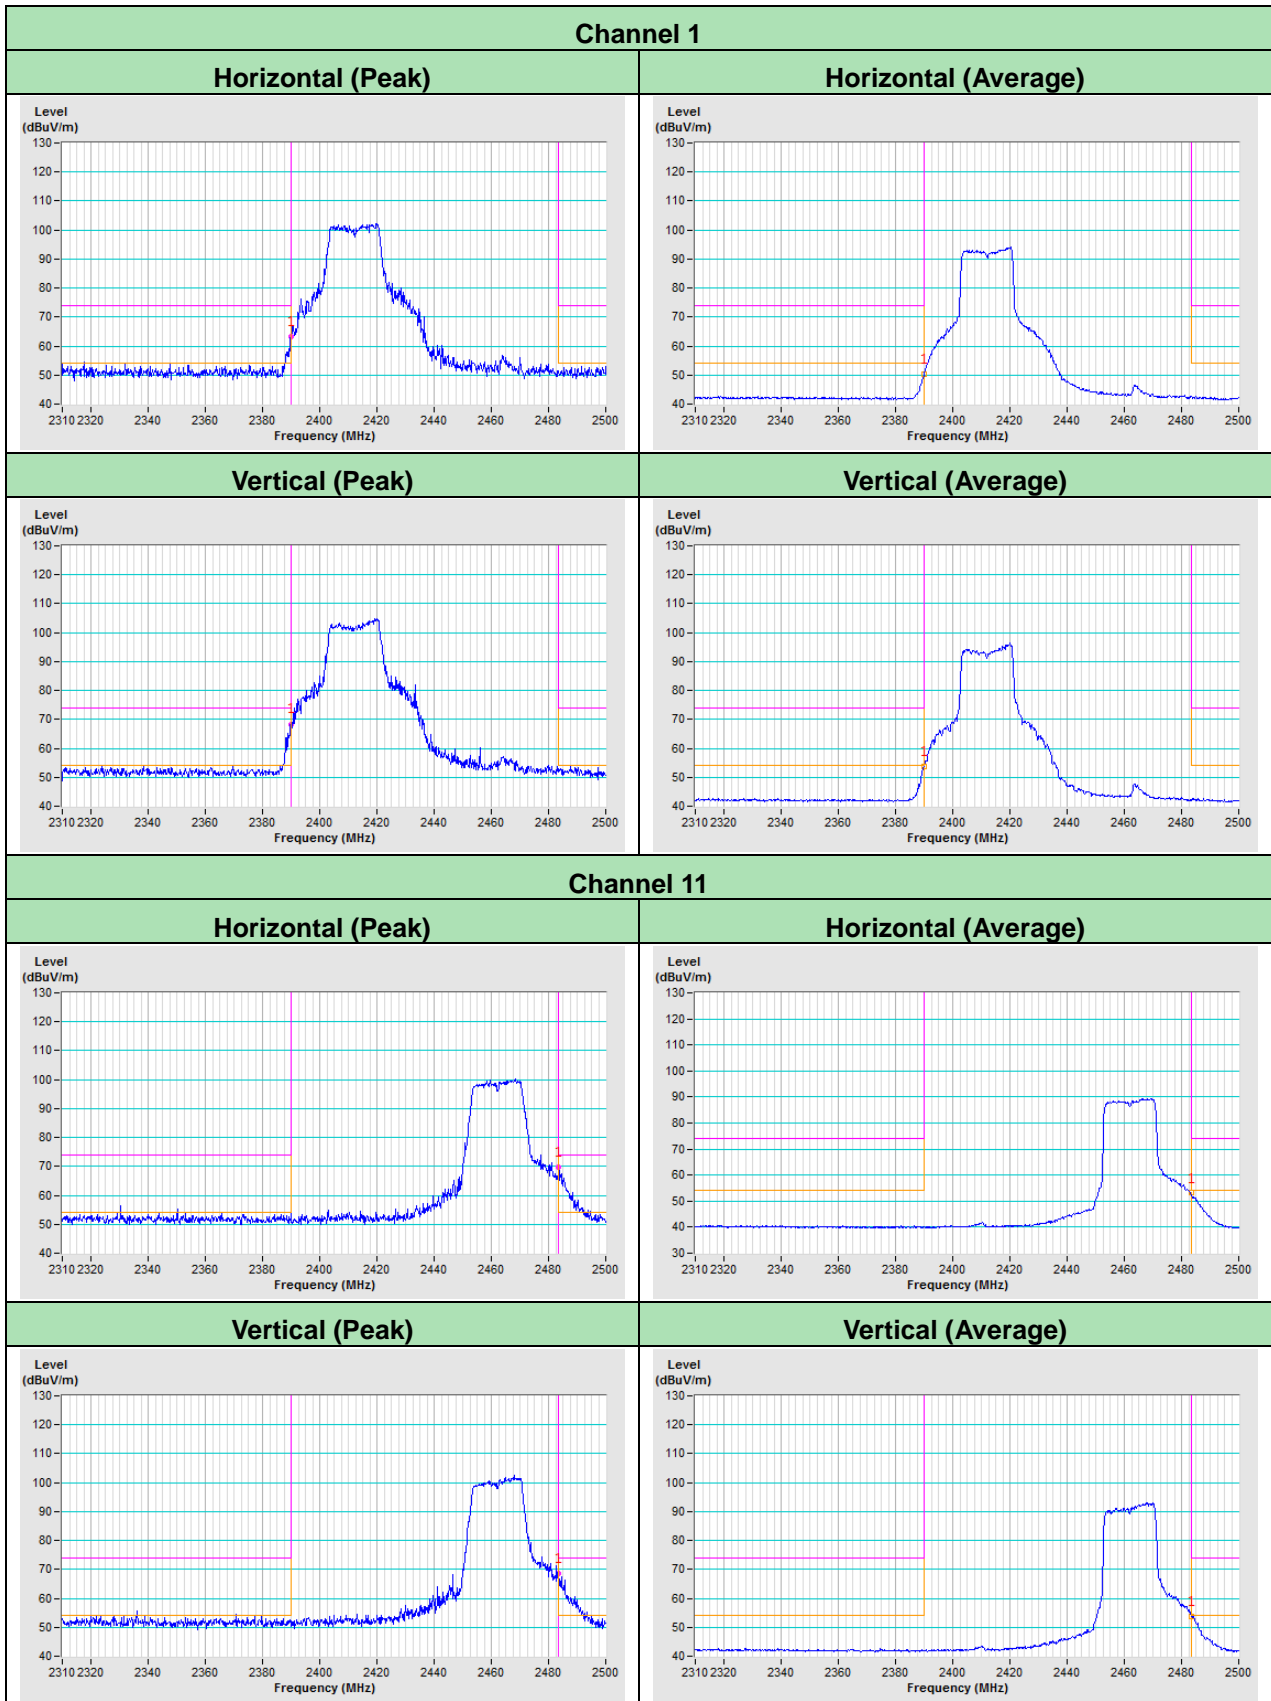

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---