


7.6.5. Test Result

Product	Terminal	Temperature	25°C
Test Engineer	Amy Zhang	Relative Humidity	52%
Test Site	TR3	Test Date	2018/03/05

Test Mode	Channel No.	Frequency (MHz)	Hops Over Occupancy Time(Hops)	Packet Transfer Time (ms)	Time of Occupancy (ms)	Limit (ms)	Result
3DH1	39	2441	320	0.39	124.8	< 400	Pass
3DH3	39	2441	160	1.62	259.2	< 400	Pass
3DH5	39	2441	107	2.87	307.1	< 400	Pass

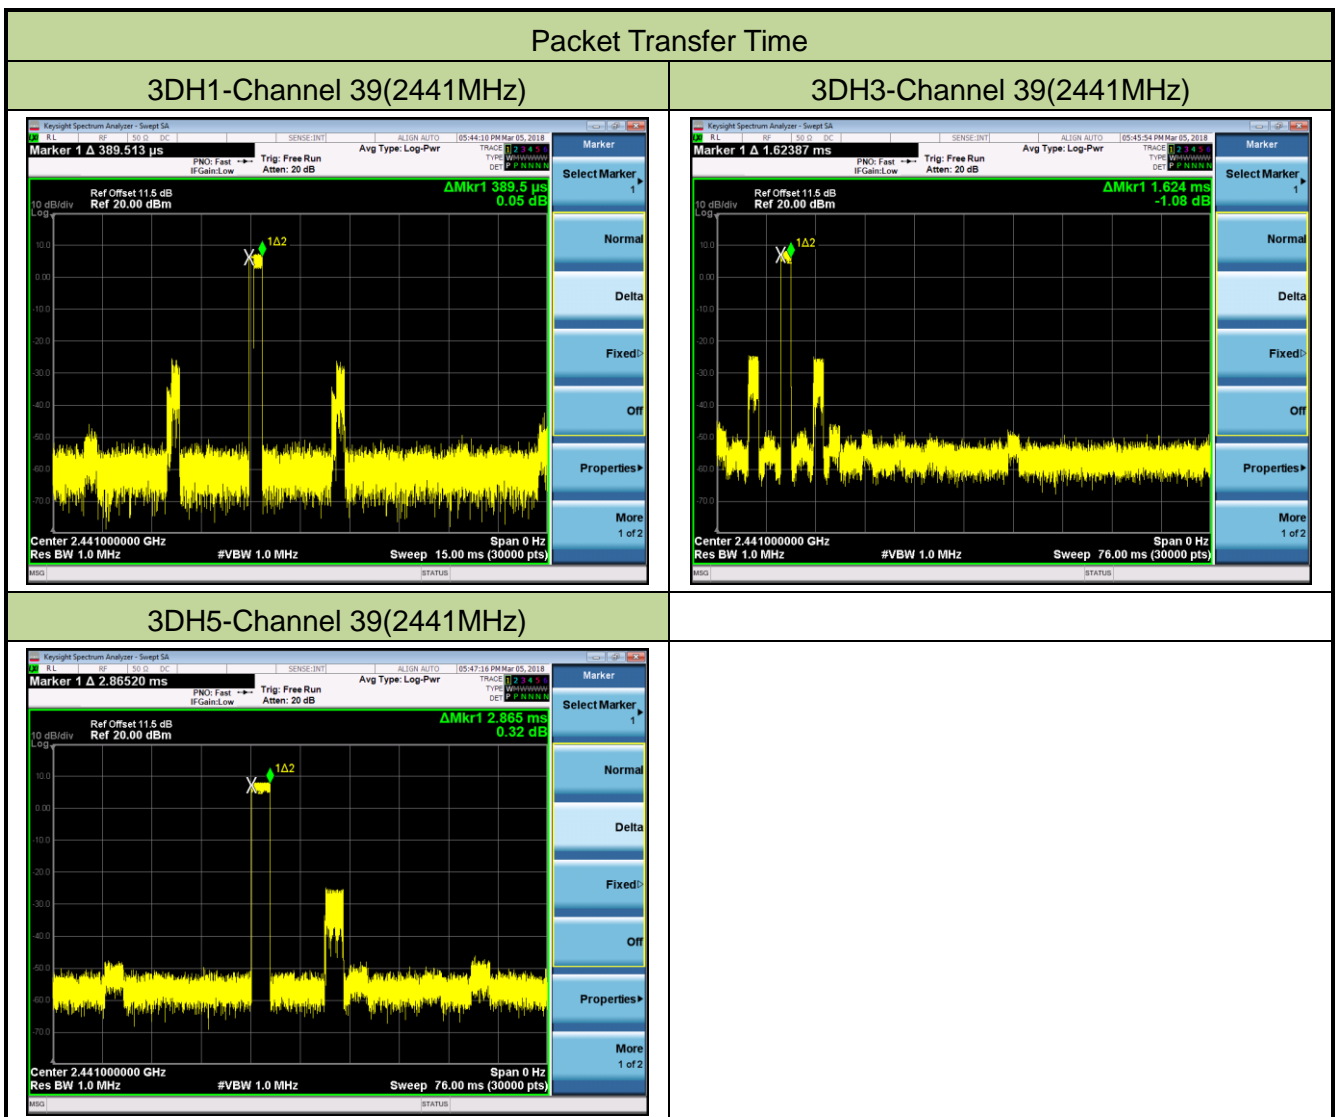

Note 1: According the Bluetooth Standard Specification, the nominal hop rate is 1600 hops/s. All Bluetooth unit participating in the piconet are time and hop synchronized to the channel.

Hops Over Occupancy Time in 31.6s for 3DH1 = $1600 / 2 / 79 * 31.6 = 320$.

Hops Over Occupancy Time in 31.6s for 3DH3 = $1600 / 4 / 79 * 31.6 = 160$.

Hops Over Occupancy Time in 31.6s for 3DH5 = $1600 / 6 / 79 * 31.6 = 107$.

Note 2: Time of Occupancy = Packet Transfer Time * Hops Over Occupancy Time in 31.6s.

7.7. Band-edge Compliance Measurement

7.7.1. Test Limit

The maximum permissible emission level is 20dBc. Any emissions were lying outside of the emission bandwidth and in authorized band edges to a field strength limit specified in Section 15.209 of the Title 47 CFR.


7.7.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.10.4

7.7.3. Test Setting

1. Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
2. RBW \geq 1% of spectrum analyzer display span
3. VBW \geq RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.

7.7.4. Test Setup

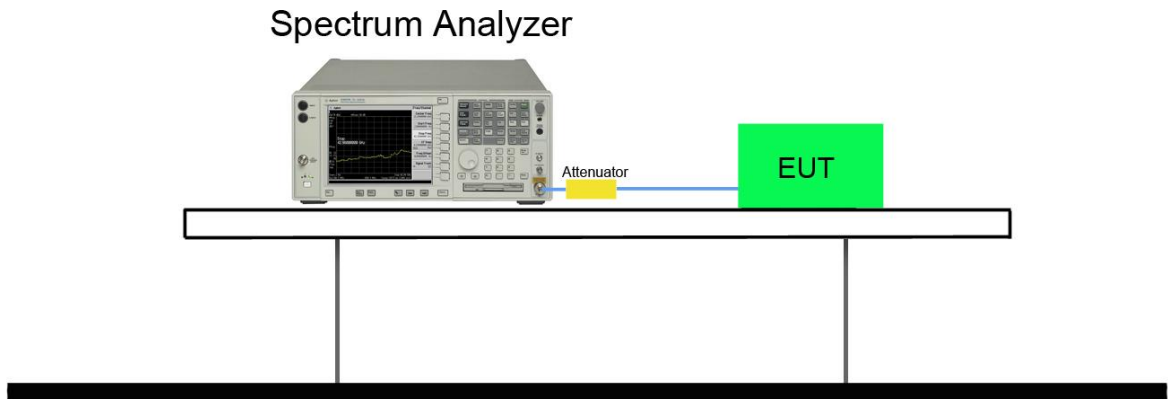


7.7.5. Test Result

Product	Terminal	Temperature	25°C
Test Engineer	Amy Zhang	Relative Humidity	52%
Test Site	TR3	Test Date	2018/03/05


Test Mode	Channel No.	Frequency (MHz)	Limit	Result
DH5	00	2402	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Band-edge Compliance

Channel 00 (2402MHz)

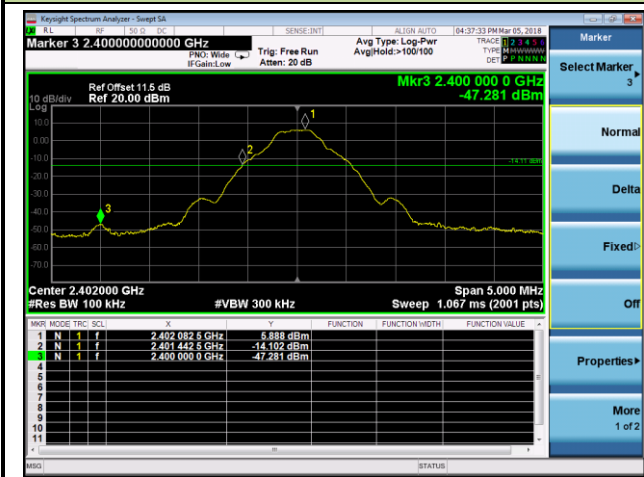


Channel 78 (2480MHz)

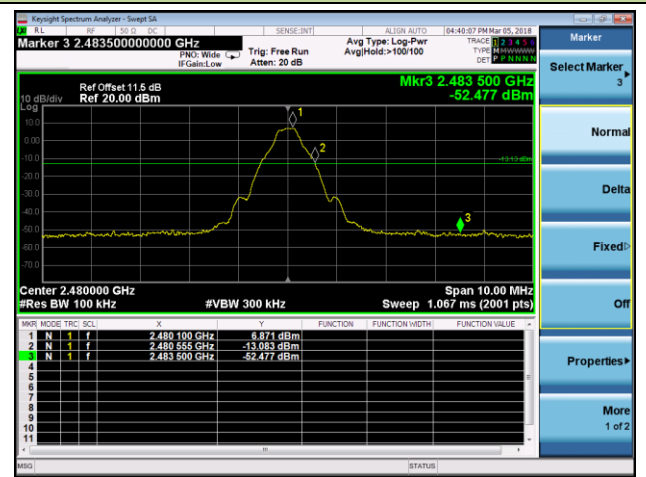


2DH5 Band-edge Compliance

Channel 00 (2402MHz)

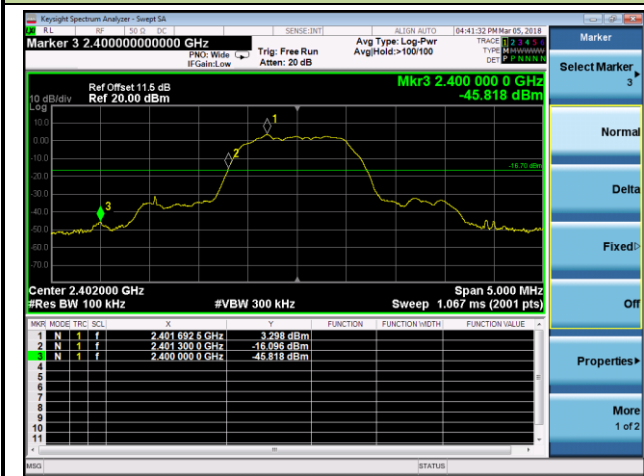

Channel 78 (2480MHz)

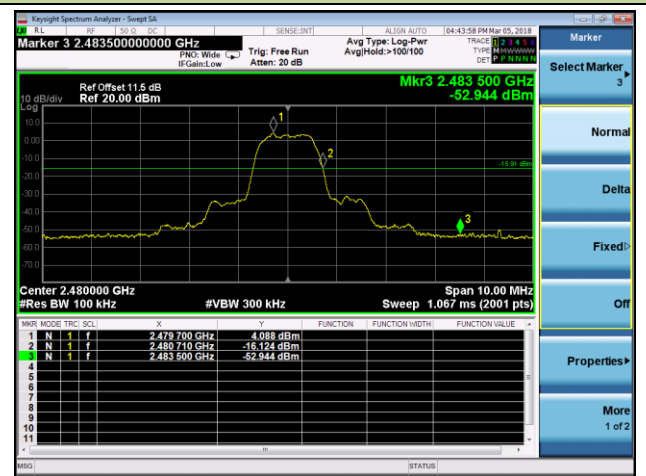

3DH5 Band-edge Compliance

Channel 00 (2402MHz)




Channel 78 (2480MHz)




DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

Channel 00 (2402MHz)

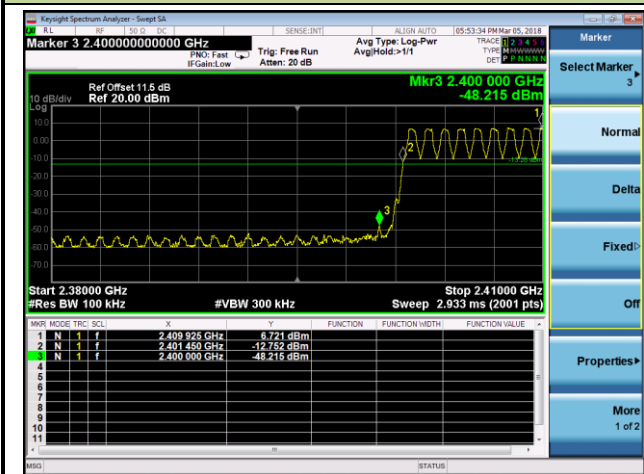


Channel 78 (2480MHz)

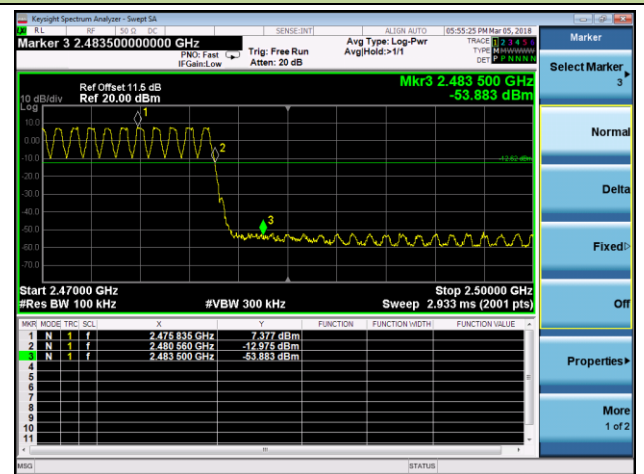


2DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

Channel 00 (2402MHz)

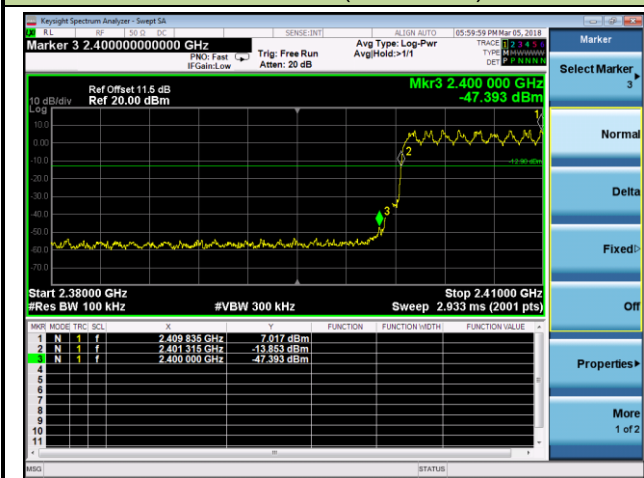


Channel 78 (2480MHz)

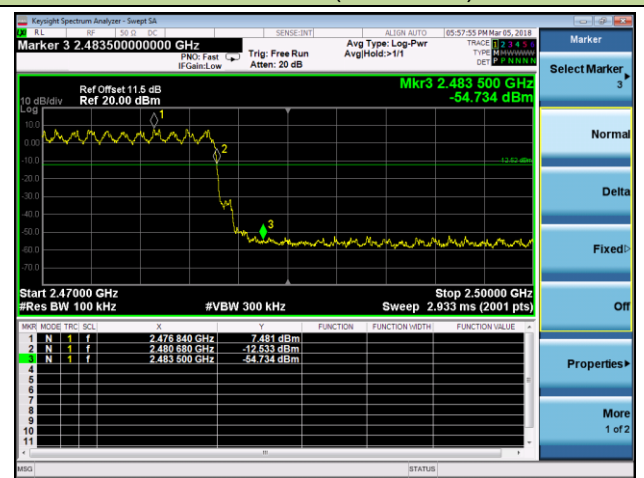


3DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

Channel 00 (2402MHz)

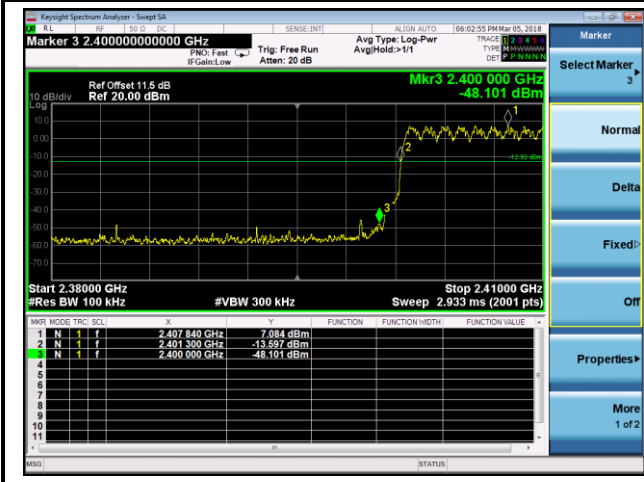

Channel 78 (2480MHz)

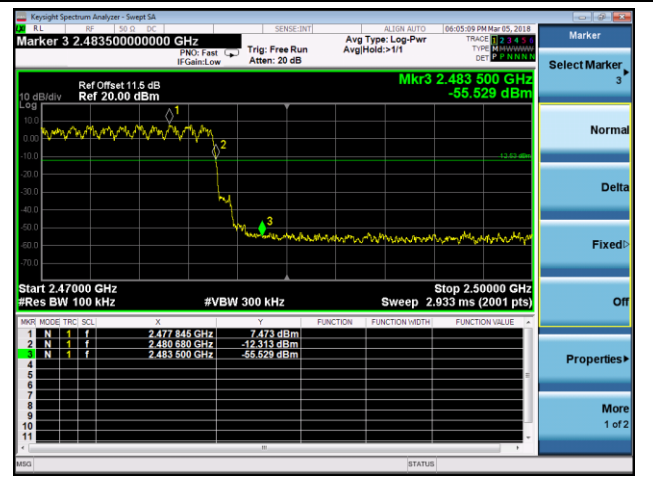

7.8. Conducted Spurious Emissions Measurement

7.8.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


7.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.8

7.8.3. Test Setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
Typically, several plots are required to cover this entire span.
2. RBW = 100 KHz
3. VBW \geq RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

7.8.4. Test Setup

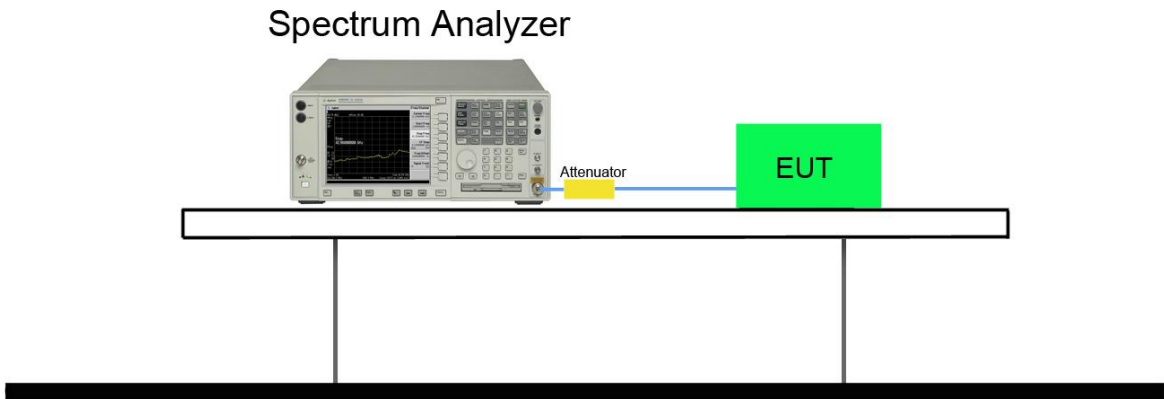


7.8.5. Test Result

Product	Terminal	Temperature	25°C
Test Engineer	Amy Zhang	Relative Humidity	52%
Test Site	TR3	Test Date	2018/03/05


Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

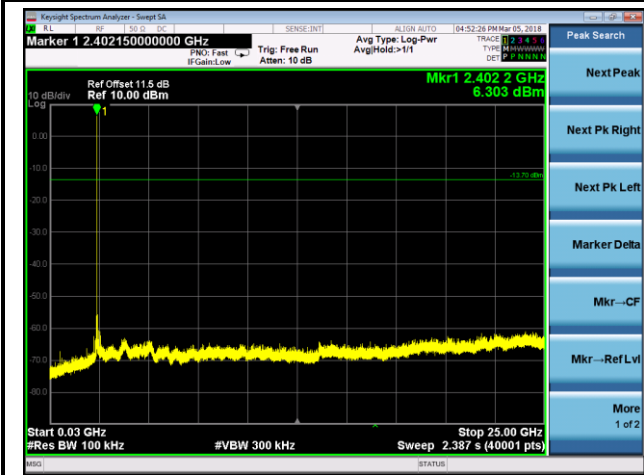

Channel 39 (2441MHz)

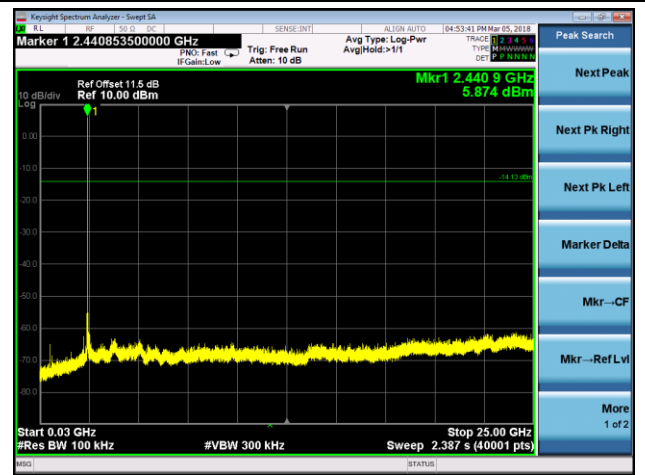


Channel 78 (2480MHz)

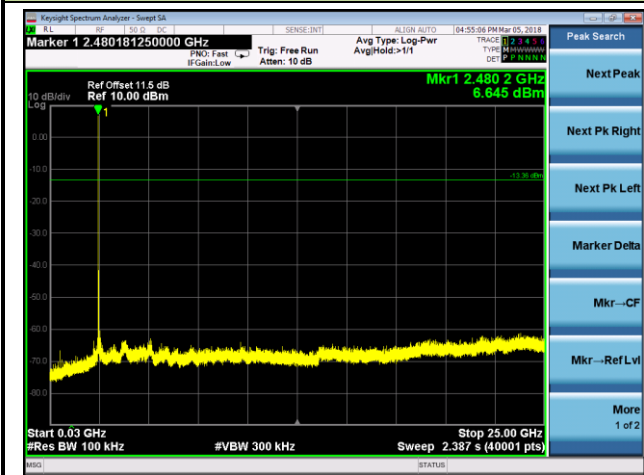


2DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

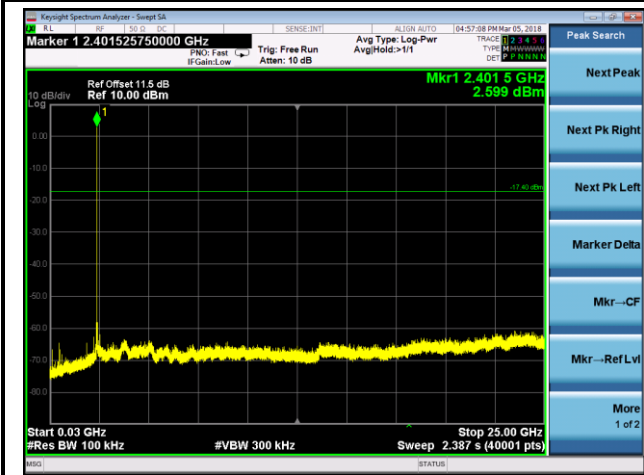

Channel 39 (2441MHz)

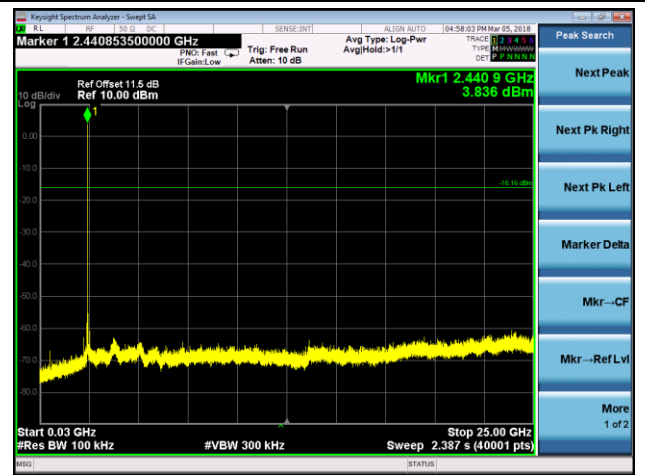


Channel 78 (2480MHz)

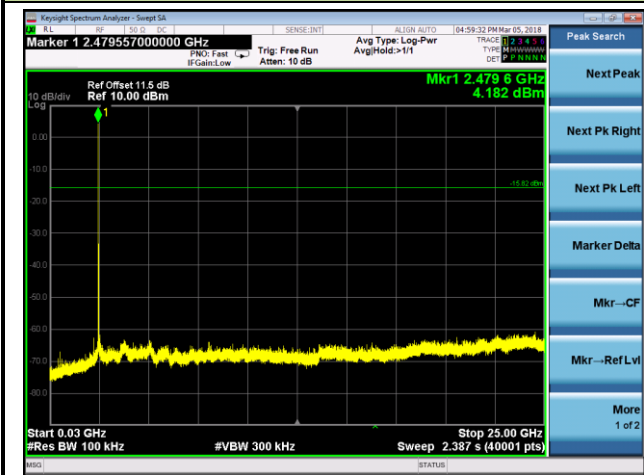


3DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

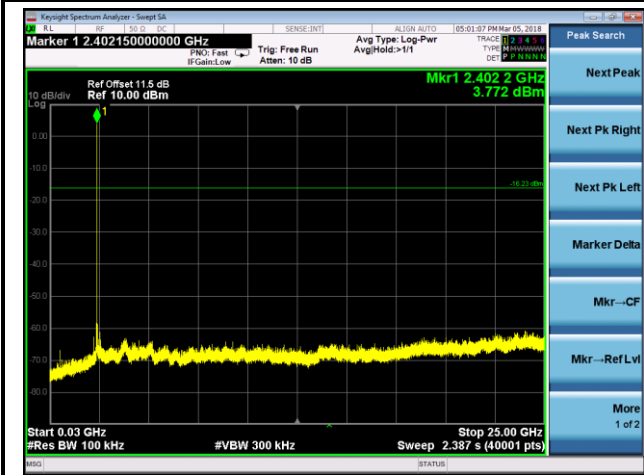

Channel 39 (2441MHz)

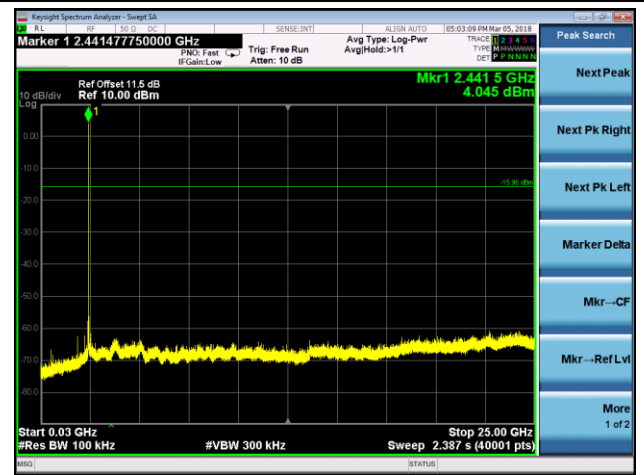

Channel 78 (2480MHz)

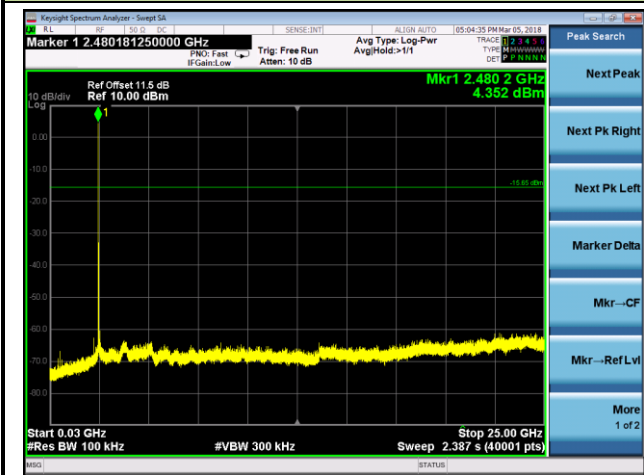

7.9. Radiated Spurious Emission Measurement

7.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V}/\text{m}$]	Measured Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.9.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW \geq 1/T
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.9.4. Test Setup


9kHz ~ 30MHz Test Setup:

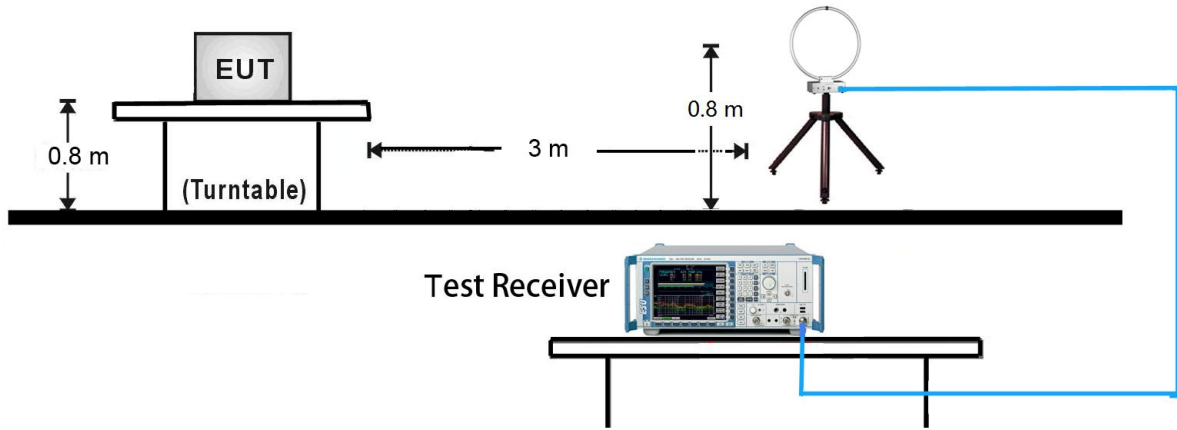


30MHz ~ 1GHz Test Setup:

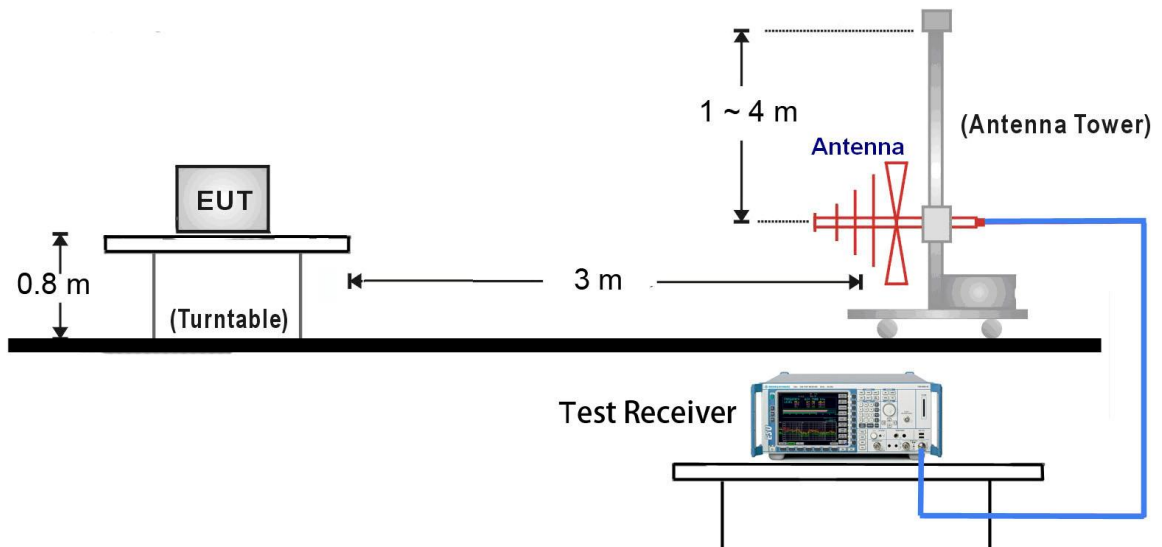

1GHz ~ 18GHz Test Setup:

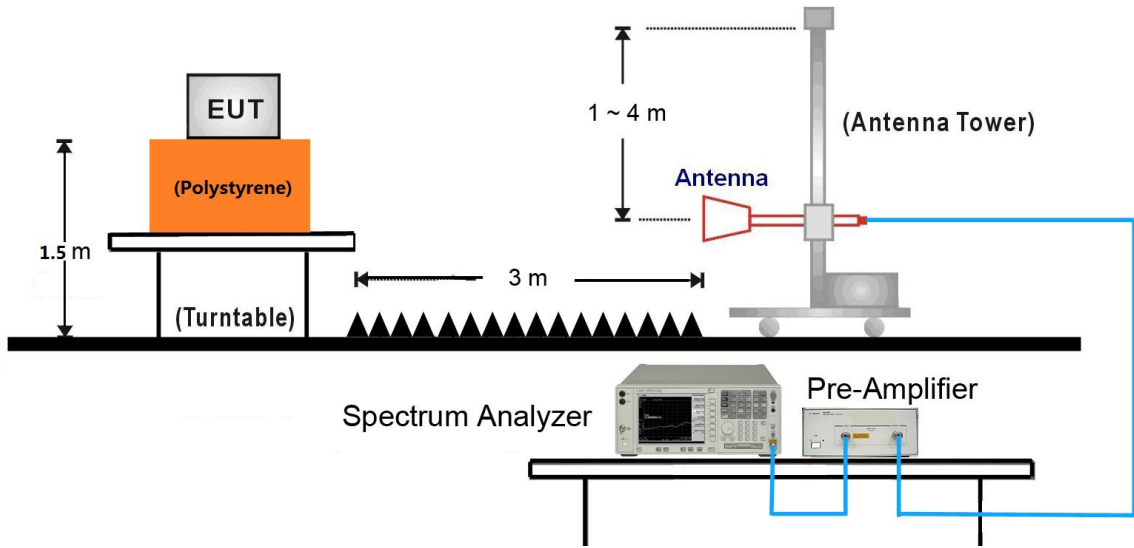

18GHz ~25GHz Test Setup:

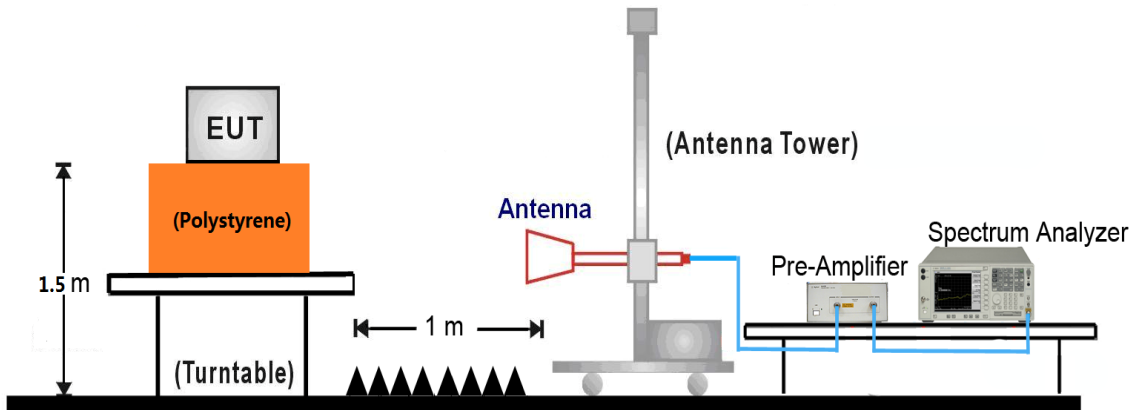

7.9.5. Test Result

Test Mode:	DH5	Test Site:	AC1
Test Channel:	00	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	6329.5	32.4	9.1	41.5	77.2	-35.7	Peak	Horizontal
	7519.5	32.8	14.4	47.2	74.0	-26.8	Peak	Horizontal
*	9814.5	29.6	17.0	46.6	77.2	-30.6	Peak	Horizontal
	12169.0	31.1	20.4	51.5	74.0	-22.5	Peak	Horizontal
*	3193.0	45.2	0.6	45.8	77.2	-31.4	Peak	Vertical
	7485.5	32.2	14.0	46.2	74.0	-27.8	Peak	Vertical
*	10256.5	31.7	18.2	49.9	77.2	-27.3	Peak	Vertical
	11608.0	31.0	20.7	51.7	74.0	-22.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (97.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	DH5	Test Site:	AC1
Test channel:	39	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	6754.5	33.8	10.8	44.6	77.0	-32.4	Peak	Horizontal
	7587.5	33.0	14.0	47.0	74.0	-27.0	Peak	Horizontal
*	9908.0	29.9	17.4	47.3	77.0	-29.7	Peak	Horizontal
	10724.0	32.5	19.4	51.9	74.0	-22.1	Peak	Horizontal
*	6066.0	34.0	8.3	42.3	77.0	-34.7	Peak	Vertical
	7443.0	32.7	14.3	47.0	74.0	-27.0	Peak	Vertical
*	10137.5	31.8	17.9	49.7	77.0	-27.3	Peak	Vertical
	10843.0	30.5	20.0	50.5	74.0	-23.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (97.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	DH5	Test Site:	AC1
Test channel:	78	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	5981.0	34.8	8.1	42.9	76.9	-34.0	Peak	Horizontal
	7528.0	32.7	14.5	47.2	74.0	-26.8	Peak	Horizontal
*	9848.5	32.2	17.3	49.5	76.9	-27.4	Peak	Horizontal
	11565.5	29.9	20.8	50.7	74.0	-23.3	Peak	Horizontal
*	6533.5	33.1	10.6	43.7	76.9	-33.2	Peak	Vertical
	8038.0	32.4	14.9	47.3	74.0	-26.7	Peak	Vertical
*	10554.0	31.6	19.0	50.6	76.9	-26.3	Peak	Vertical
	11633.5	30.5	21.0	51.5	74.0	-22.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (96.9dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test channel:	00	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	6015.0	34.3	8.1	42.4	77.8	-35.4	Peak	Horizontal
	7536.5	33.2	14.4	47.6	74.0	-26.4	Peak	Horizontal
*	9644.5	32.8	16.4	49.2	77.8	-28.6	Peak	Horizontal
	11633.5	30.1	21.0	51.1	74.0	-22.9	Peak	Horizontal
*	6593.0	33.6	10.7	44.3	77.8	-33.5	Peak	Vertical
	7596.0	33.2	14.1	47.3	74.0	-26.7	Peak	Vertical
*	9763.5	32.1	17.0	49.1	77.8	-28.7	Peak	Vertical
	11625.0	31.2	20.9	52.1	74.0	-21.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (97.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test channel:	39	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	7188.0	32.6	13.9	46.5	77.5	-31.0	Peak	Horizontal
	8140.0	31.9	14.5	46.4	74.0	-27.6	Peak	Horizontal
*	10571.0	32.4	19.0	51.4	77.5	-26.1	Peak	Horizontal
	11650.5	29.9	21.0	50.9	74.0	-23.1	Peak	Horizontal
*	6304.0	34.0	8.9	42.9	77.5	-34.6	Peak	Vertical
	8029.5	32.1	14.8	46.9	74.0	-27.1	Peak	Vertical
*	10554.0	32.2	19.0	51.2	77.5	-26.3	Peak	Vertical
	11735.5	30.7	20.7	51.4	74.0	-22.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (97.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test channel:	78	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	6627.0	33.9	10.7	44.6	77.6	-33.0	Peak	Horizontal
	7545.0	33.2	14.4	47.6	74.0	-26.4	Peak	Horizontal
*	10103.5	32.2	17.9	50.1	77.6	-27.5	Peak	Horizontal
	11574.0	30.6	20.8	51.4	74.0	-22.6	Peak	Horizontal
*	6338.0	33.7	9.2	42.9	77.6	-34.7	Peak	Vertical
	7502.5	32.6	14.2	46.8	74.0	-27.2	Peak	Vertical
*	10273.5	31.0	18.3	49.3	77.6	-28.3	Peak	Vertical
	11642.0	29.8	21.0	50.8	74.0	-23.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (97.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC1
Test channel:	00	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	6508.0	33.4	10.4	43.8	77.9	-34.1	Peak	Horizontal
	7426.0	32.1	14.2	46.3	74.0	-27.7	Peak	Horizontal
*	10086.5	31.4	17.7	49.1	77.9	-28.8	Peak	Horizontal
	11608.0	29.9	20.7	50.6	74.0	-23.4	Peak	Horizontal
*	6006.5	34.3	8.1	42.4	77.9	-35.5	Peak	Vertical
	8157.0	32.2	14.5	46.7	74.0	-27.3	Peak	Vertical
*	10120.5	32.2	18.0	50.2	77.9	-27.7	Peak	Vertical
	11565.5	30.6	20.8	51.4	74.0	-22.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (97.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC1
Test channel:	39	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	5675.0	34.8	7.0	41.8	78.0	-36.2	Peak	Horizontal
	7664.0	33.4	13.8	47.2	74.0	-26.8	Peak	Horizontal
*	10333.0	31.8	18.4	50.2	78.0	-27.8	Peak	Horizontal
	11591.0	30.7	20.7	51.4	74.0	-22.6	Peak	Horizontal
*	6525.0	34.0	10.5	44.5	78.0	-33.5	Peak	Vertical
	7638.5	32.2	14.1	46.3	74.0	-27.7	Peak	Vertical
*	10095.0	32.5	17.8	50.3	78.0	-27.7	Peak	Vertical
	12033.0	31.3	20.3	51.6	74.0	-22.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (98.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC1
Test channel:	78	Test Engineer:	Dandy Li
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	6635.5	33.6	10.7	44.3	78.2	-33.9	Peak	Horizontal
	7511.0	32.4	14.3	46.7	74.0	-27.3	Peak	Horizontal
*	9789.0	32.6	16.9	49.5	78.2	-28.7	Peak	Horizontal
	11480.5	30.7	20.6	51.3	74.0	-22.7	Peak	Horizontal
*	3201.5	41.5	0.6	42.1	78.2	-36.1	Peak	Vertical
	7264.5	32.1	14.0	46.1	74.0	-27.9	Peak	Vertical
*	10103.5	31.6	17.9	49.5	78.2	-28.7	Peak	Vertical
	11531.5	31.1	20.8	51.9	74.0	-22.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (98.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/02/25 - 11:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT: Terminal	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2480MHz by 3DH5	

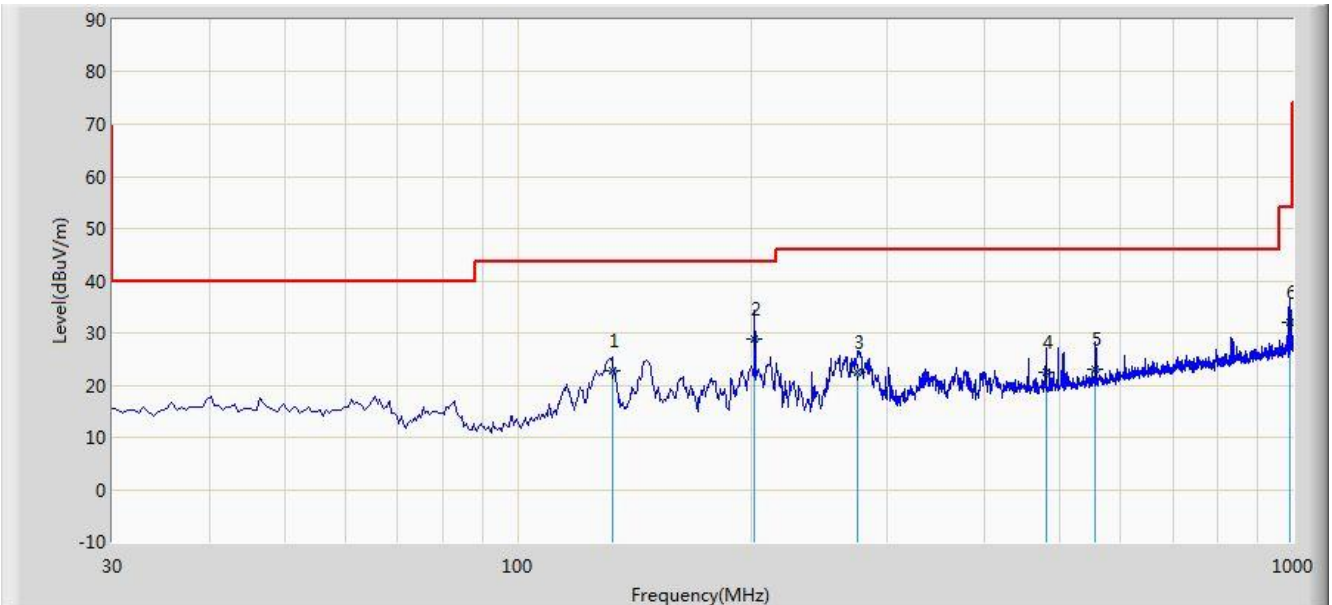


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		132.676	22.868	8.832	-20.632	43.500	14.037	QP
2	*	202.338	28.915	17.672	-14.585	43.500	11.243	QP
3		274.290	22.564	8.832	-23.436	46.000	13.732	QP
4		480.114	22.554	4.271	-23.446	46.000	18.284	QP
5		555.938	22.994	3.331	-23.006	46.000	19.663	QP
6		990.226	32.142	7.004	-21.858	54.000	25.138	QP

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2018/02/25 - 11:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: VULB 9168 _20-2000MHz	Polarity: Vertical
EUT: Terminal	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2480MHz by 3DH5	

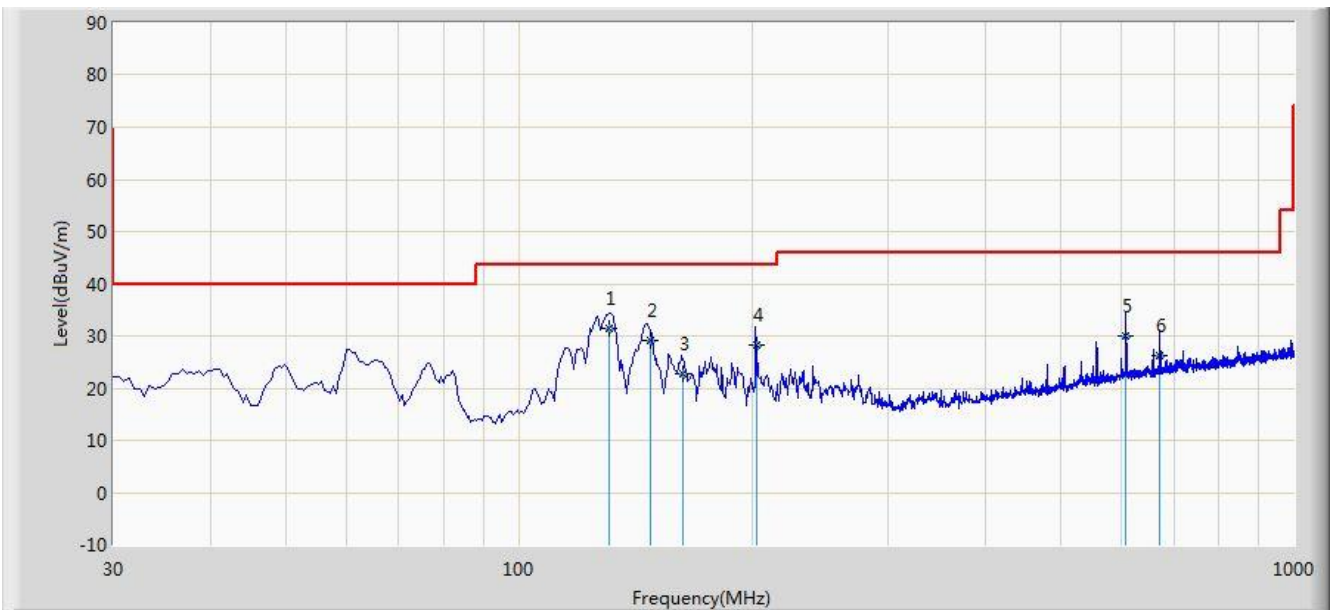

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	130.725	31.592	17.703	-11.908	43.500	13.889	QP
2		147.630	29.125	14.005	-14.375	43.500	15.121	QP
3		162.774	22.832	7.783	-20.668	43.500	15.049	QP
4		202.435	28.175	16.930	-15.325	43.500	11.245	QP
5		607.840	29.858	9.117	-16.142	46.000	20.741	QP
6		672.520	26.209	4.442	-19.791	46.000	21.766	QP

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.10. Radiated Restricted Band Edge Measurement

7.10.1. Test Result

Site: AC1	Time: 2018/03/06 - 04:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

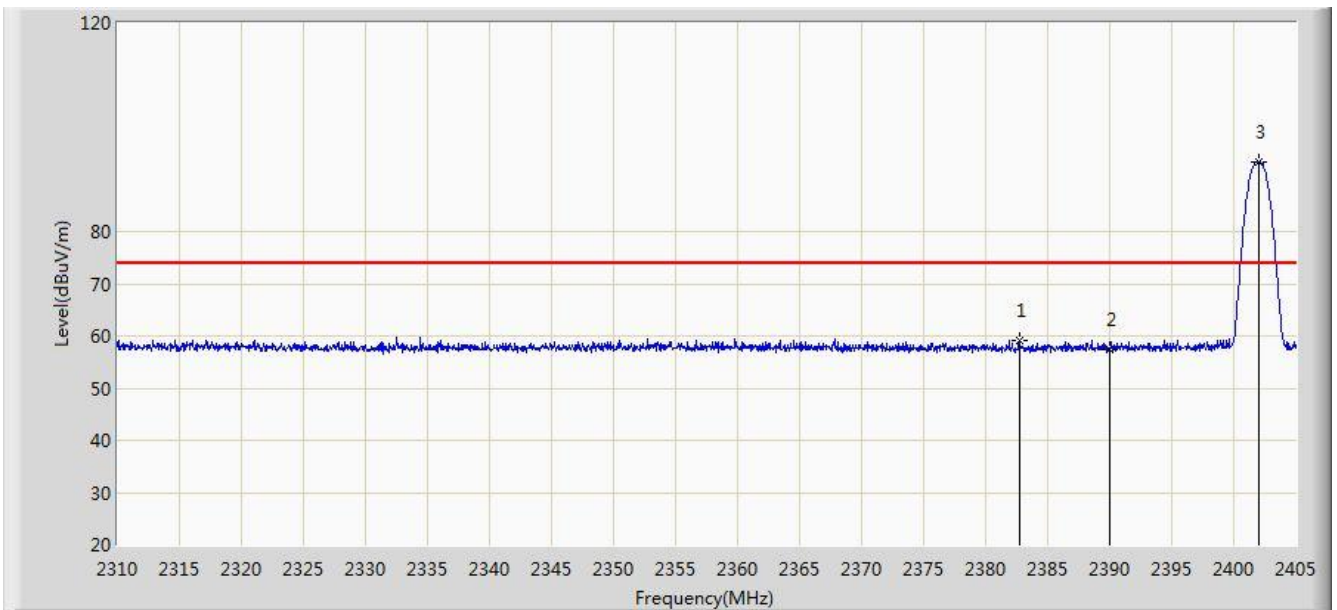


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.722	59.216	26.629	-14.784	74.000	32.588	PK
2			2390.000	57.412	24.837	-16.588	74.000	32.575	PK
3		*	2402.008	93.255	60.696	N/A	N/A	32.559	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 04:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

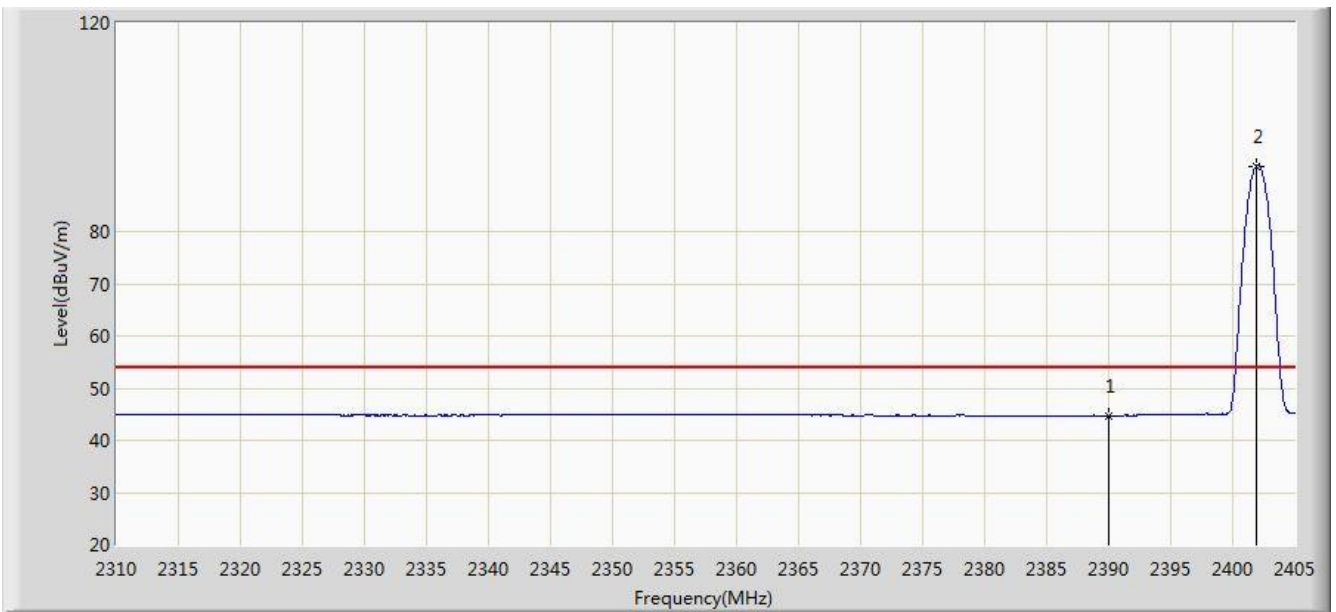


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.775	12.200	-9.225	54.000	32.575	AV
2		*	2401.913	92.596	60.037	N/A	N/A	32.559	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 04:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

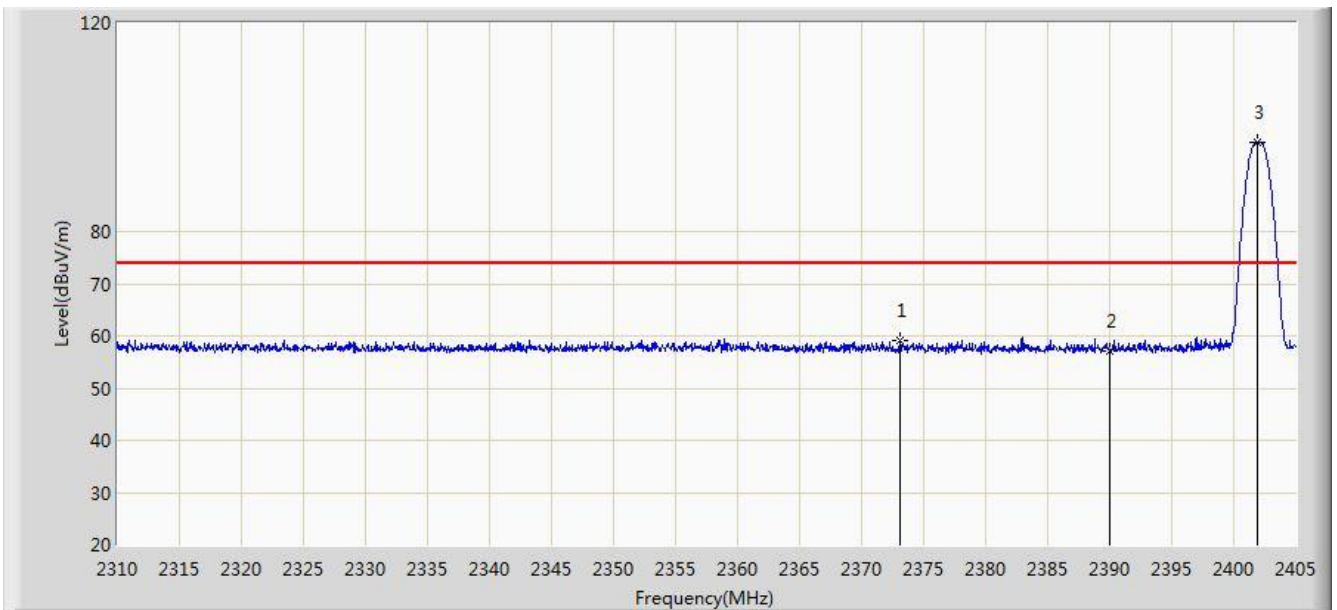


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.080	59.083	26.480	-14.917	74.000	32.604	PK
2			2390.000	57.084	24.509	-16.916	74.000	32.575	PK
3		*	2401.960	97.189	64.630	N/A	N/A	32.559	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

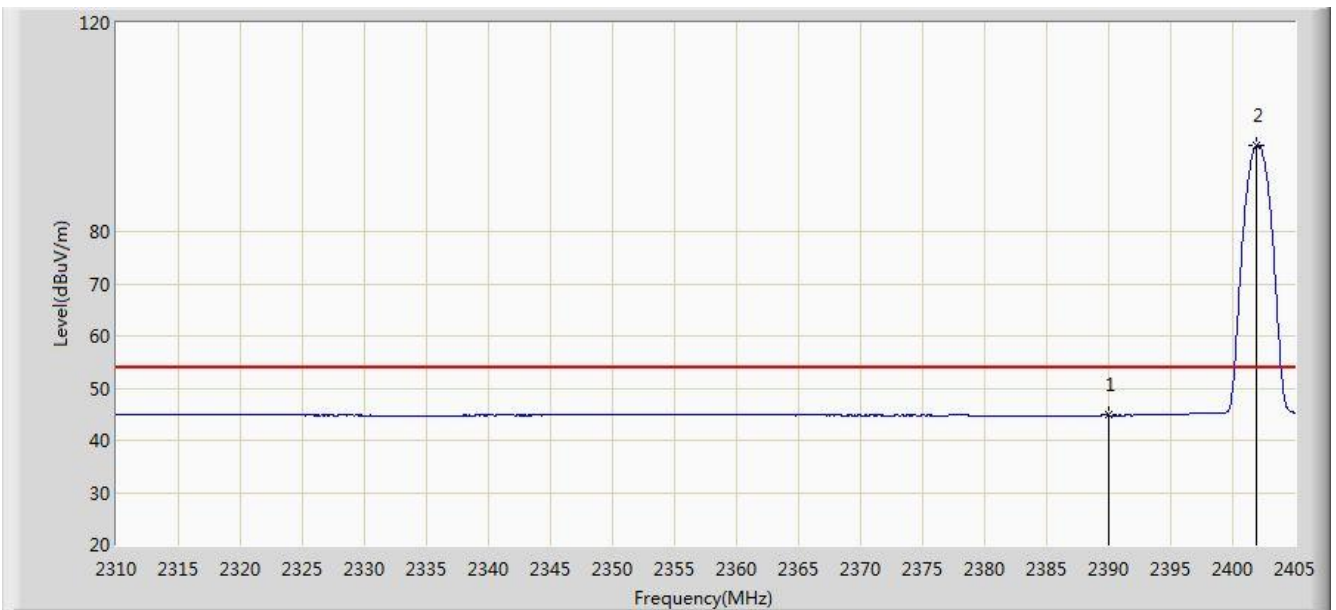


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.806	12.231	-9.194	54.000	32.575	AV
2		*	2401.960	96.618	64.059	N/A	N/A	32.559	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

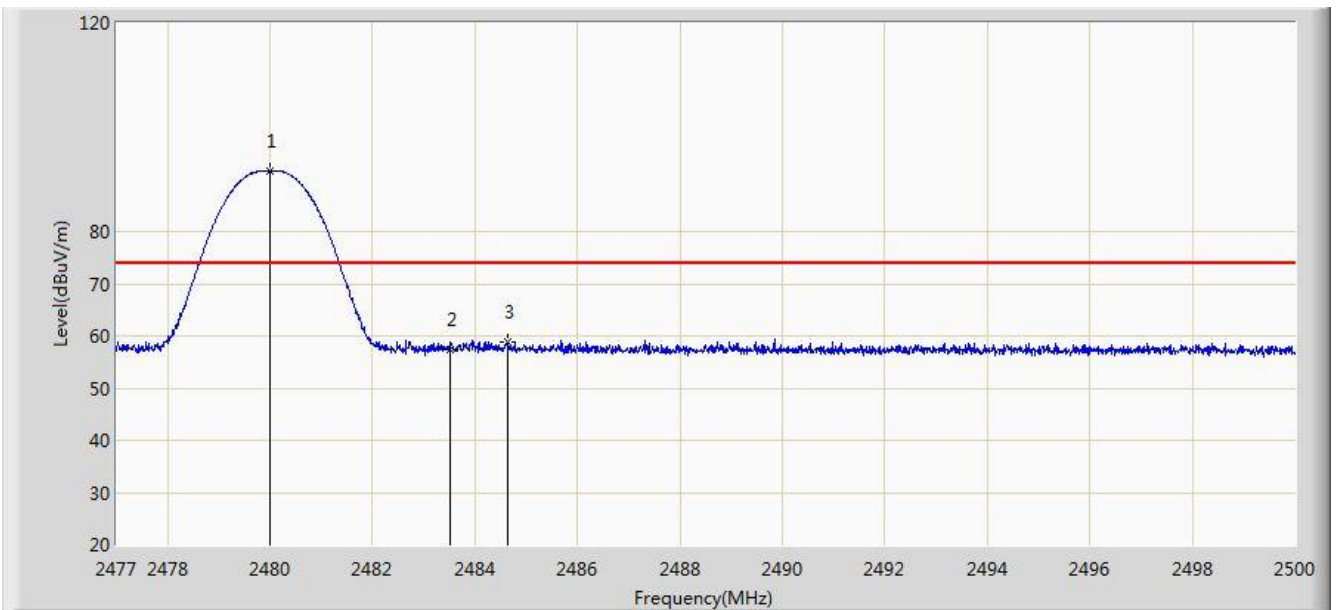


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.990	91.600	59.013	N/A	N/A	32.587	PK
2			2483.500	57.481	24.885	-16.519	74.000	32.596	PK
3			2484.625	58.977	26.378	-15.023	74.000	32.599	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

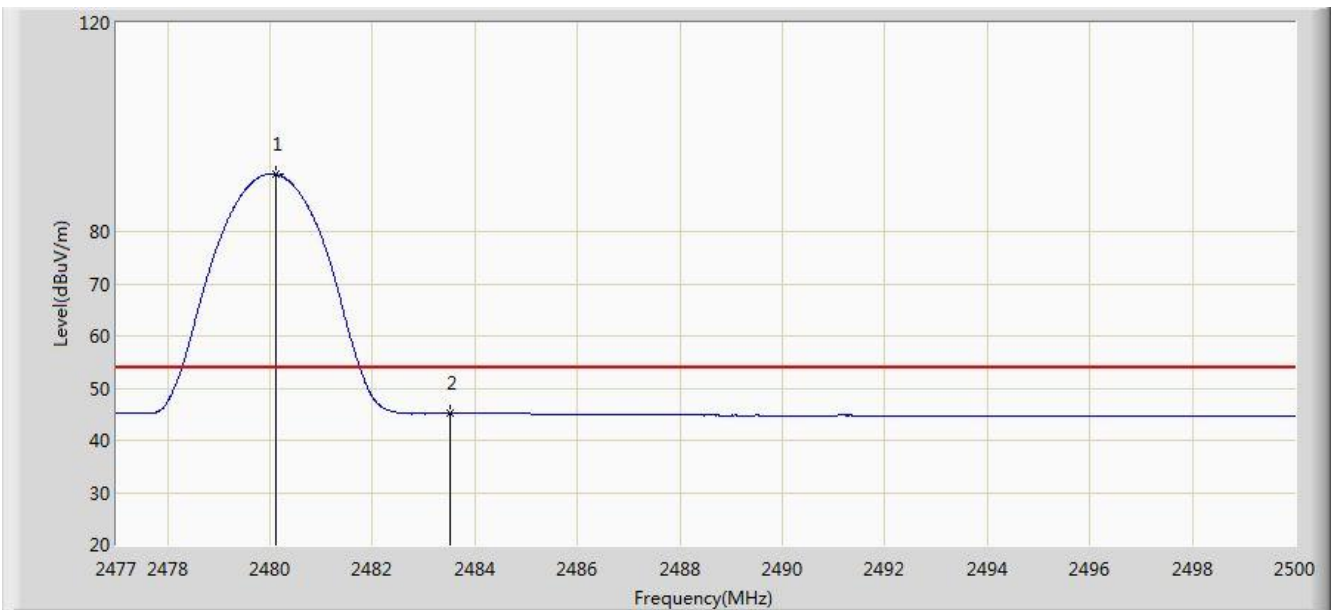


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.105	90.988	58.401	N/A	N/A	32.587	AV
2			2483.500	45.135	12.539	-8.865	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

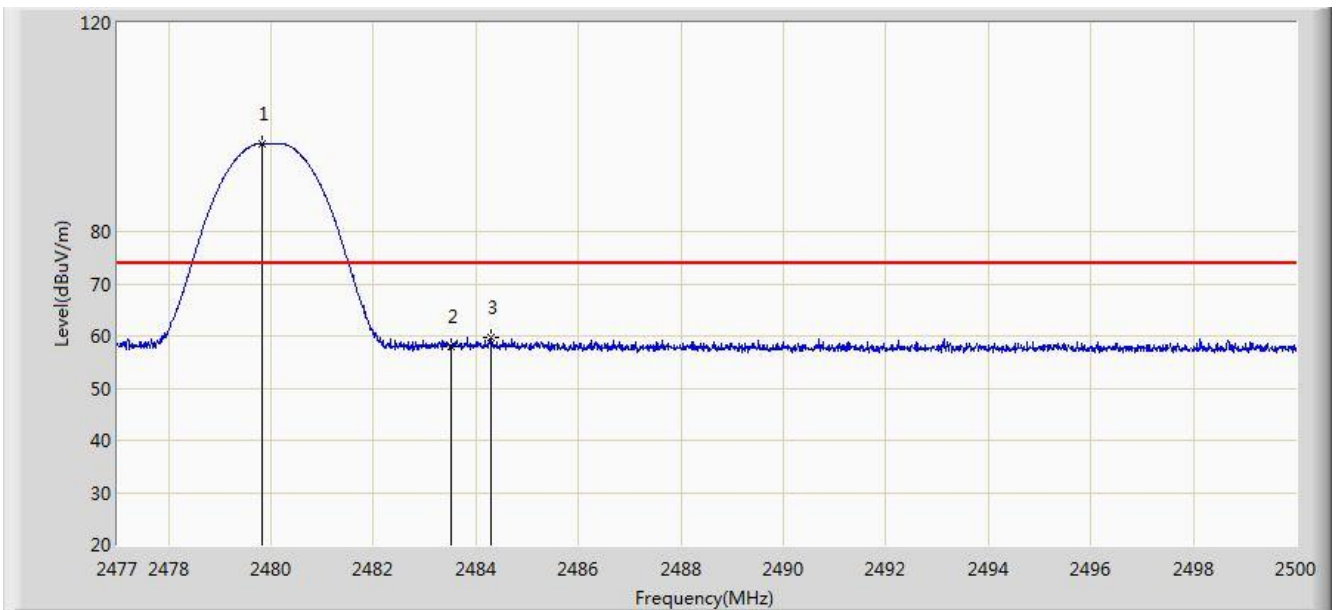


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.817	96.936	64.349	N/A	N/A	32.587	PK
2			2483.500	57.912	25.316	-16.088	74.000	32.596	PK
3			2484.302	59.778	27.180	-14.222	74.000	32.598	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

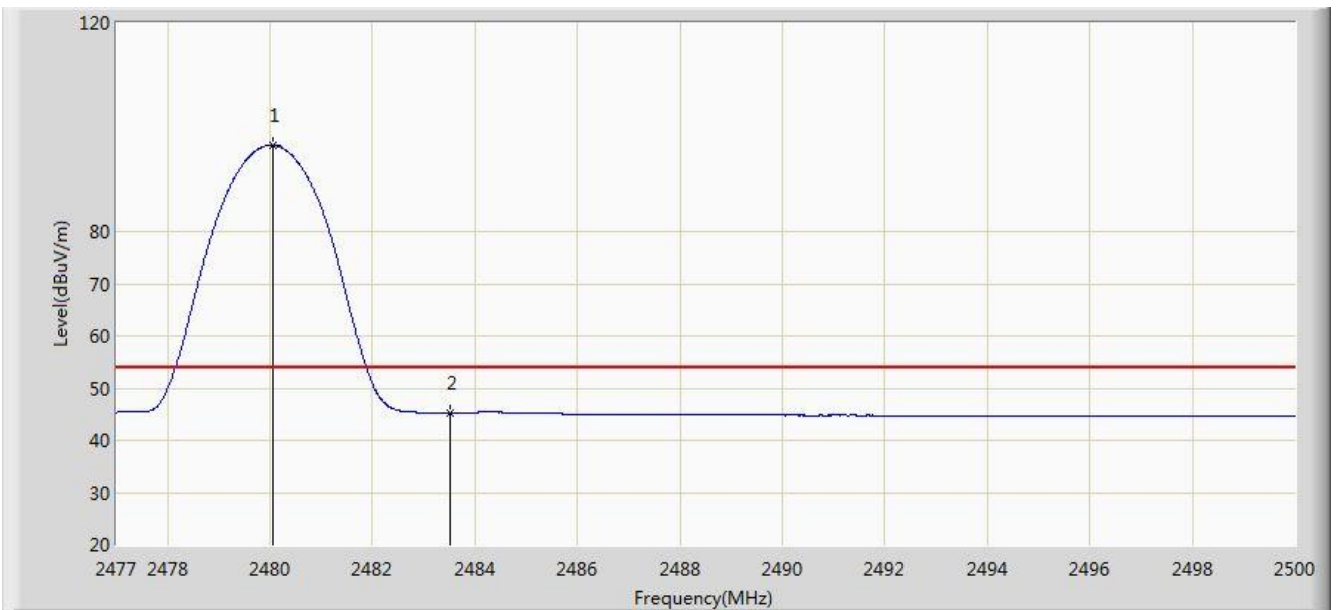


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.059	96.528	63.941	N/A	N/A	32.587	AV
2			2483.500	45.345	12.749	-8.655	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

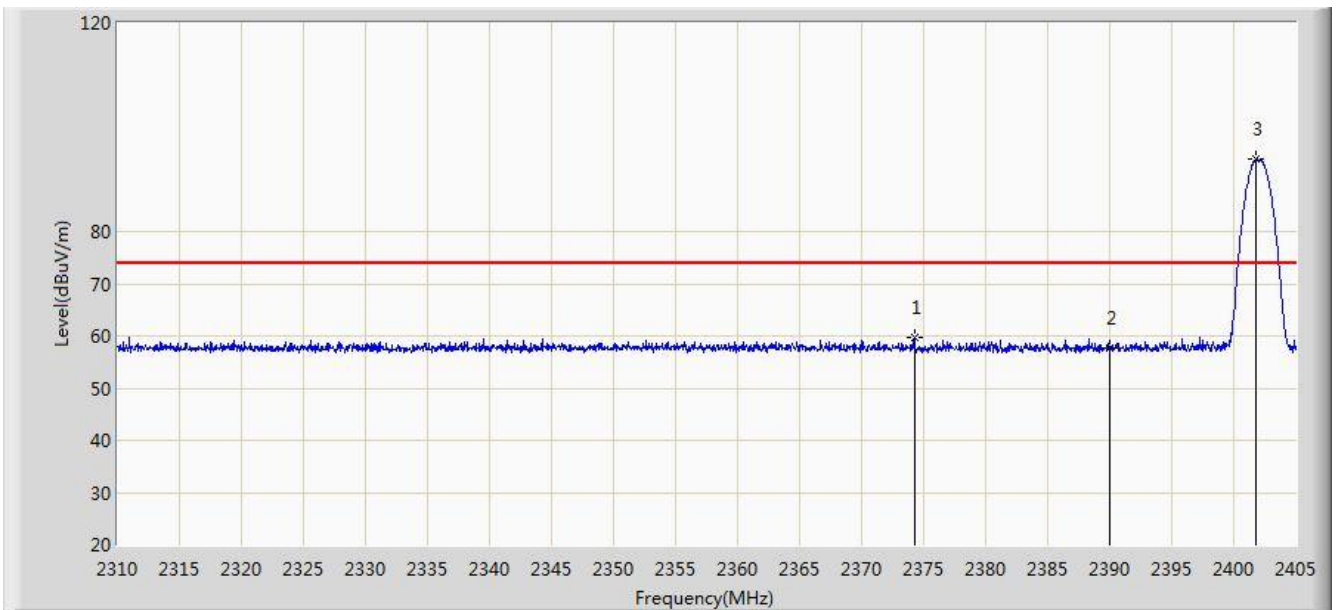


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2374.268	59.632	27.030	-14.368	74.000	32.602	PK
2			2390.000	57.699	25.124	-16.301	74.000	32.575	PK
3		*	2401.770	93.842	61.283	N/A	N/A	32.559	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

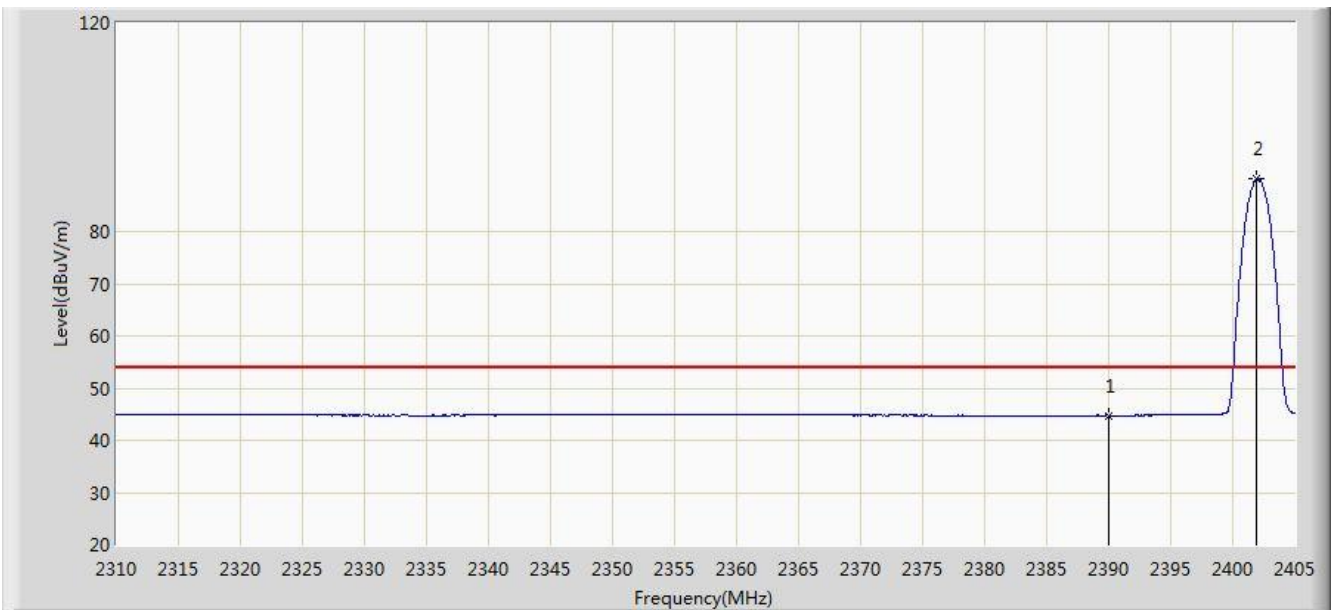


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.754	12.179	-9.246	54.000	32.575	AV
2		*	2401.913	90.131	57.572	N/A	N/A	32.559	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

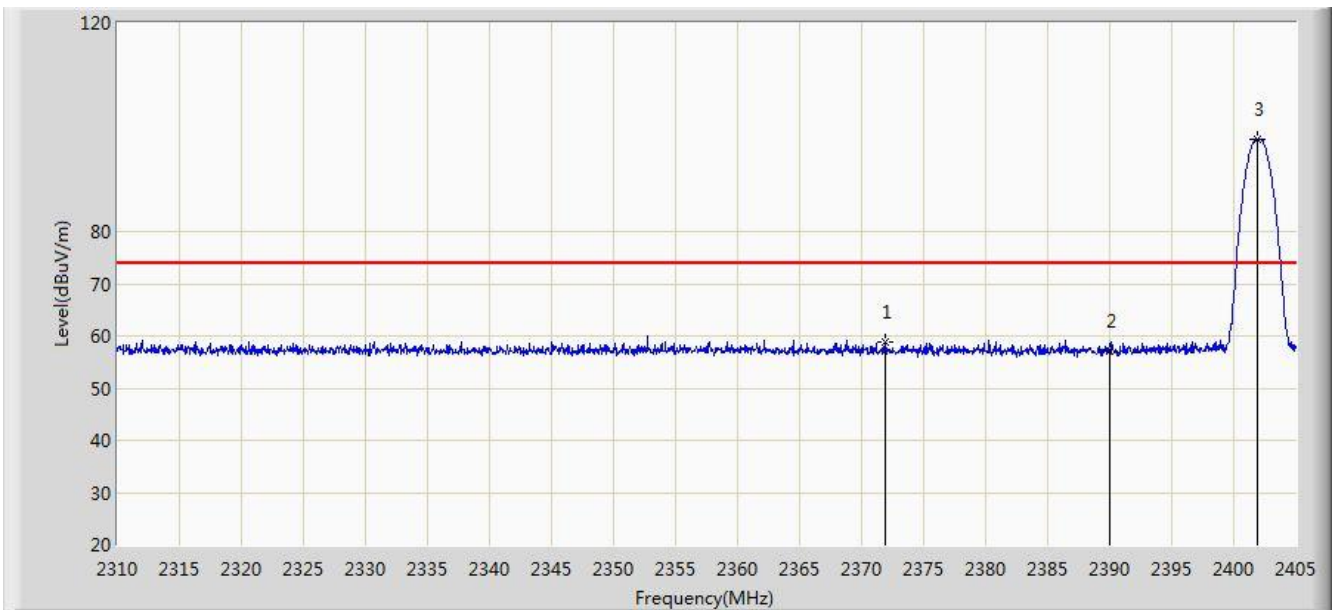


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2371.893	58.976	26.371	-15.024	74.000	32.605	PK
2			2390.000	57.100	24.525	-16.900	74.000	32.575	PK
3		*	2401.865	97.810	65.251	N/A	N/A	32.559	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

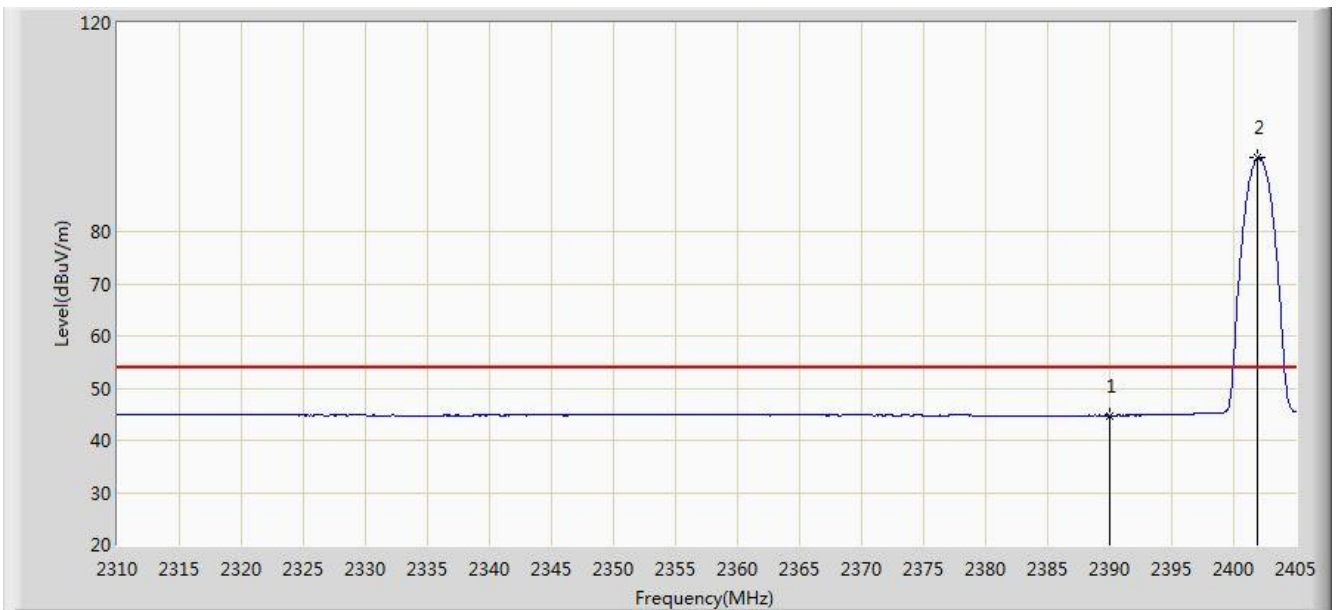


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.763	12.188	-9.237	54.000	32.575	AV
2		*	2401.865	94.074	61.515	N/A	N/A	32.559	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

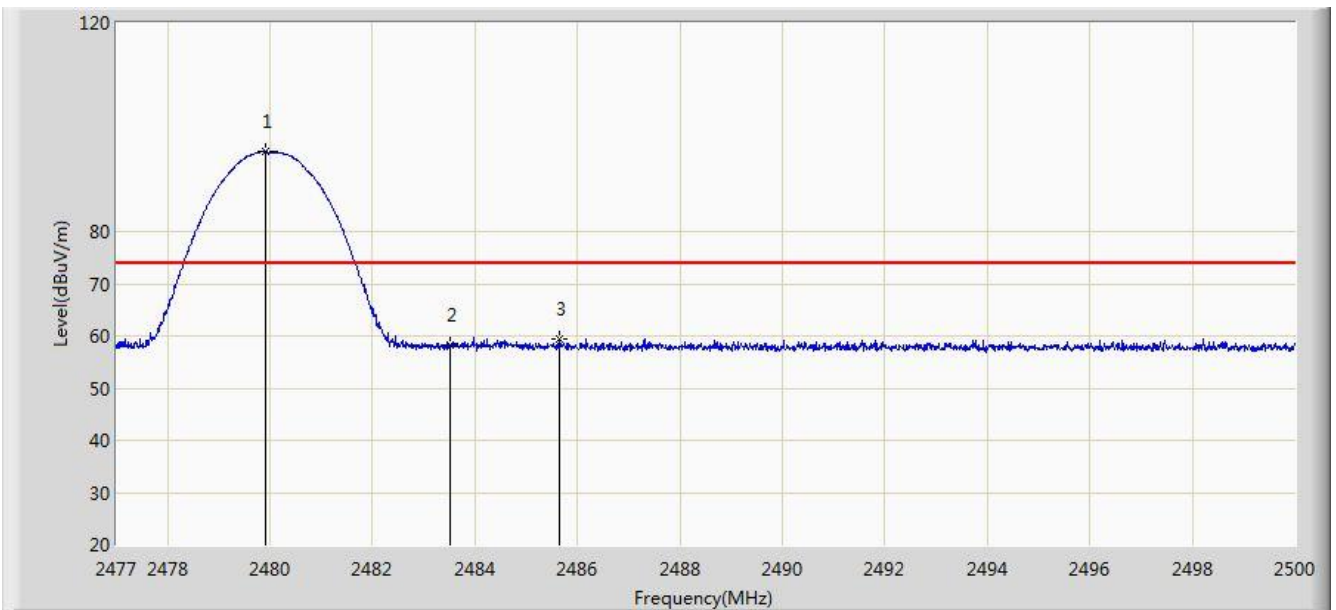


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.909	95.313	62.726	N/A	N/A	32.587	PK
2			2483.500	58.207	25.611	-15.793	74.000	32.596	PK
3			2485.659	59.371	26.770	-14.629	74.000	32.602	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

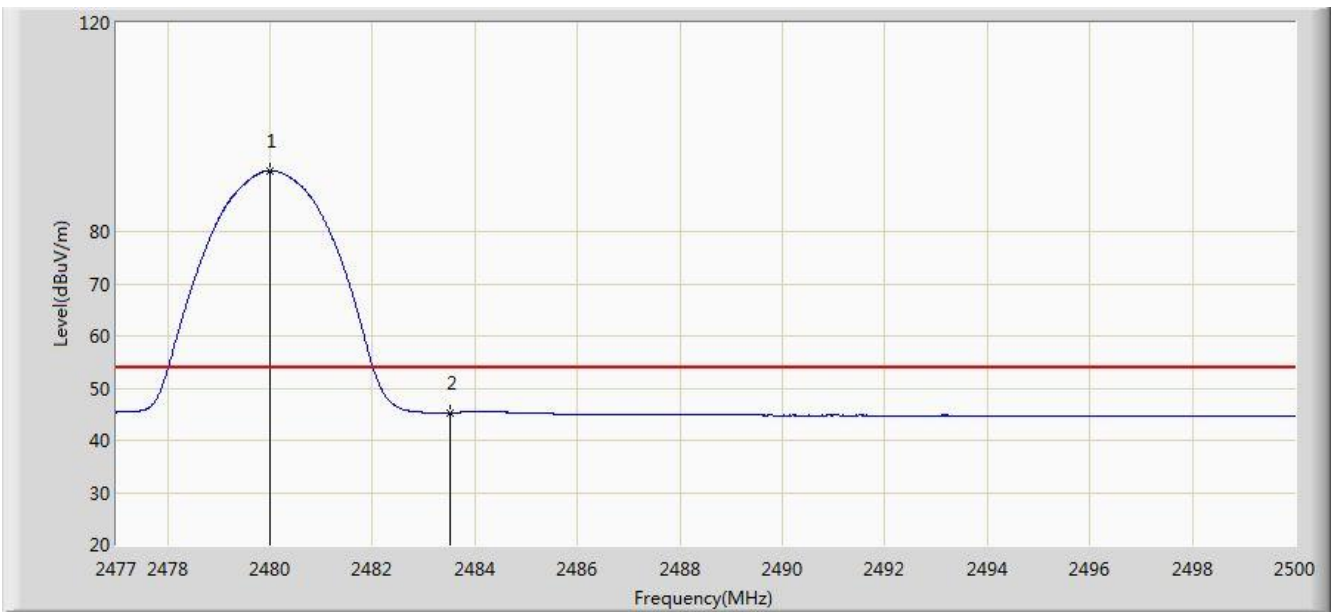


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.990	91.687	59.100	N/A	N/A	32.587	AV
2			2483.500	45.312	12.716	-8.688	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

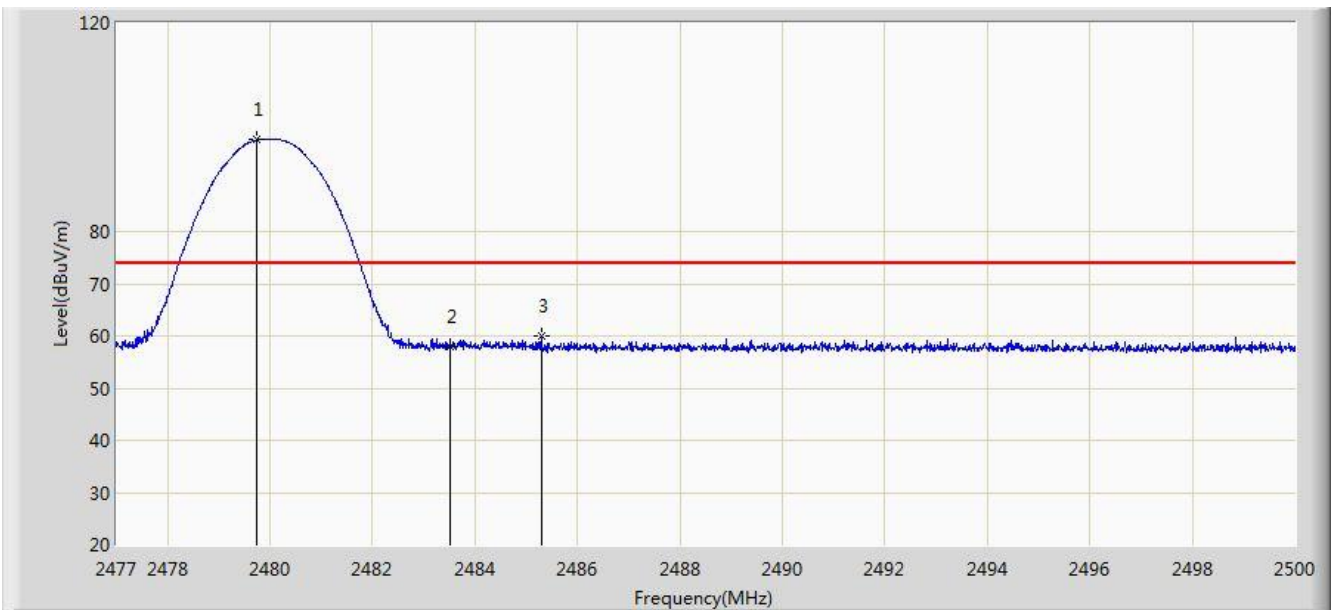


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.737	97.610	65.024	N/A	N/A	32.587	PK
2			2483.500	58.030	25.434	-15.970	74.000	32.596	PK
3			2485.292	60.002	27.402	-13.998	74.000	32.600	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

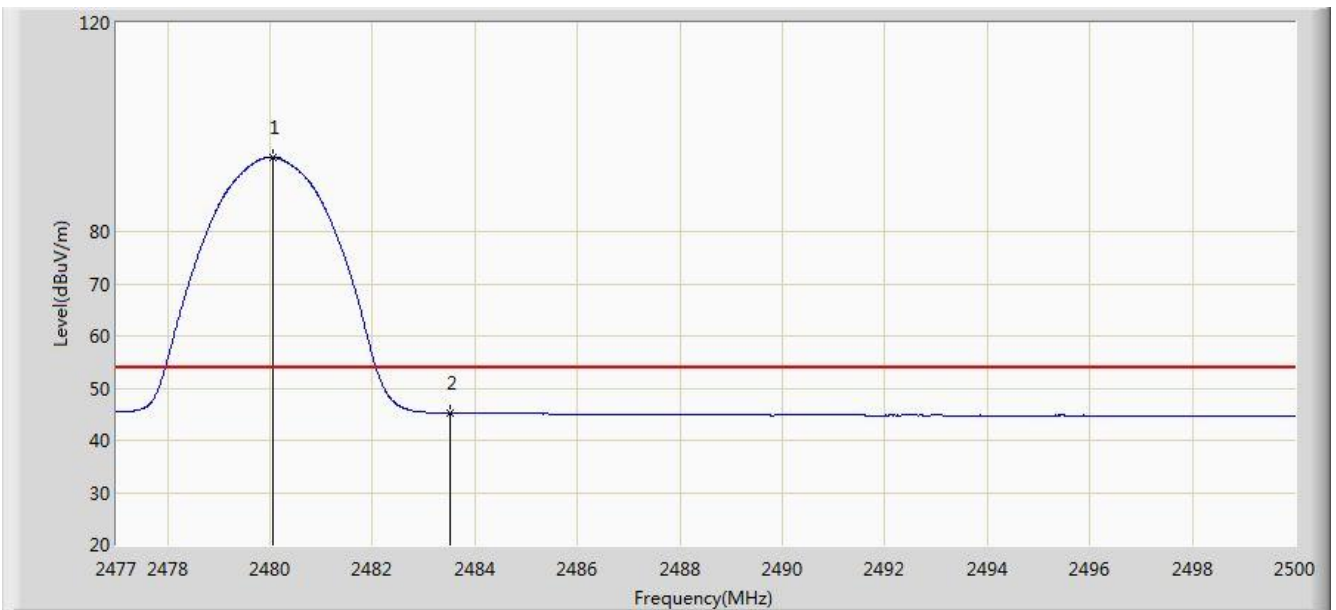


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.059	94.219	61.632	N/A	N/A	32.587	AV
2			2483.500	45.205	12.609	-8.795	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

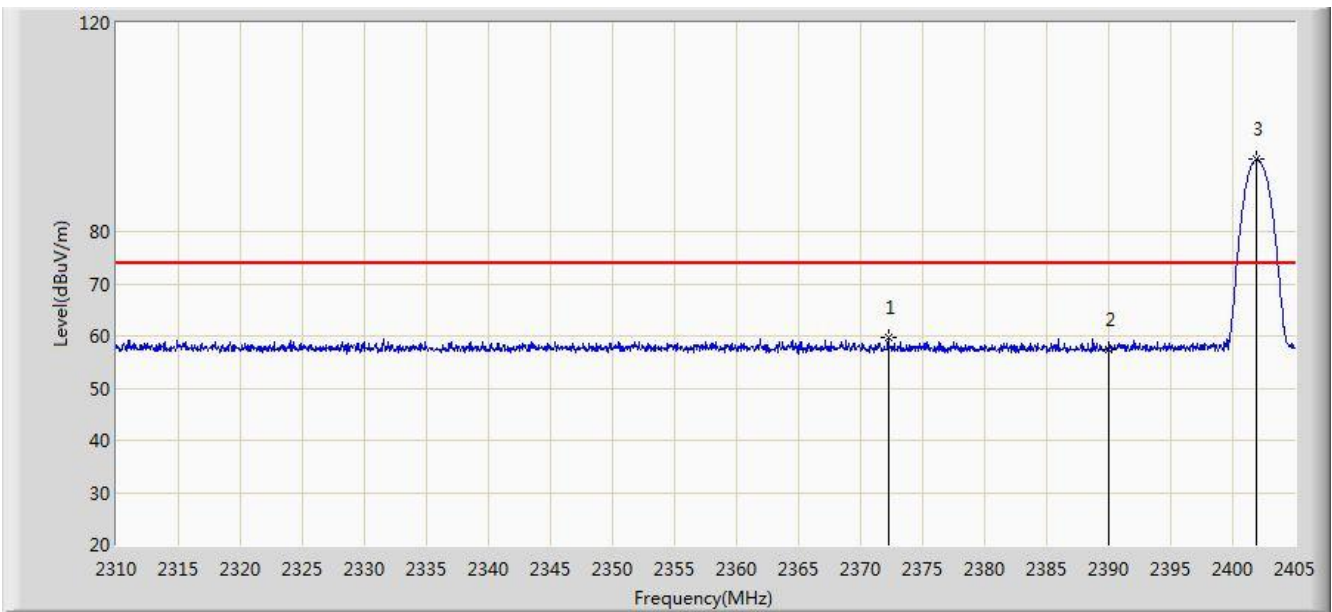


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2372.225	59.614	27.009	-14.386	74.000	32.605	PK
2			2390.000	57.342	24.767	-16.658	74.000	32.575	PK
3		*	2401.865	93.929	61.370	N/A	N/A	32.559	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

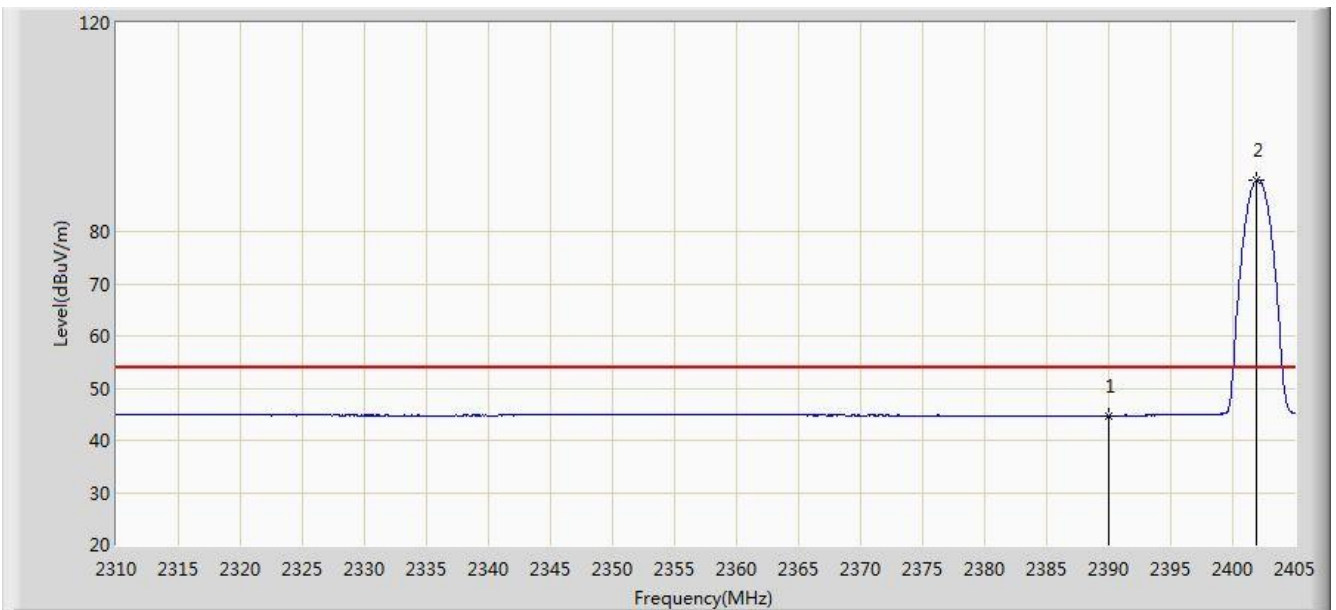


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.702	12.127	-9.298	54.000	32.575	AV
2		*	2401.865	89.728	57.169	N/A	N/A	32.559	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

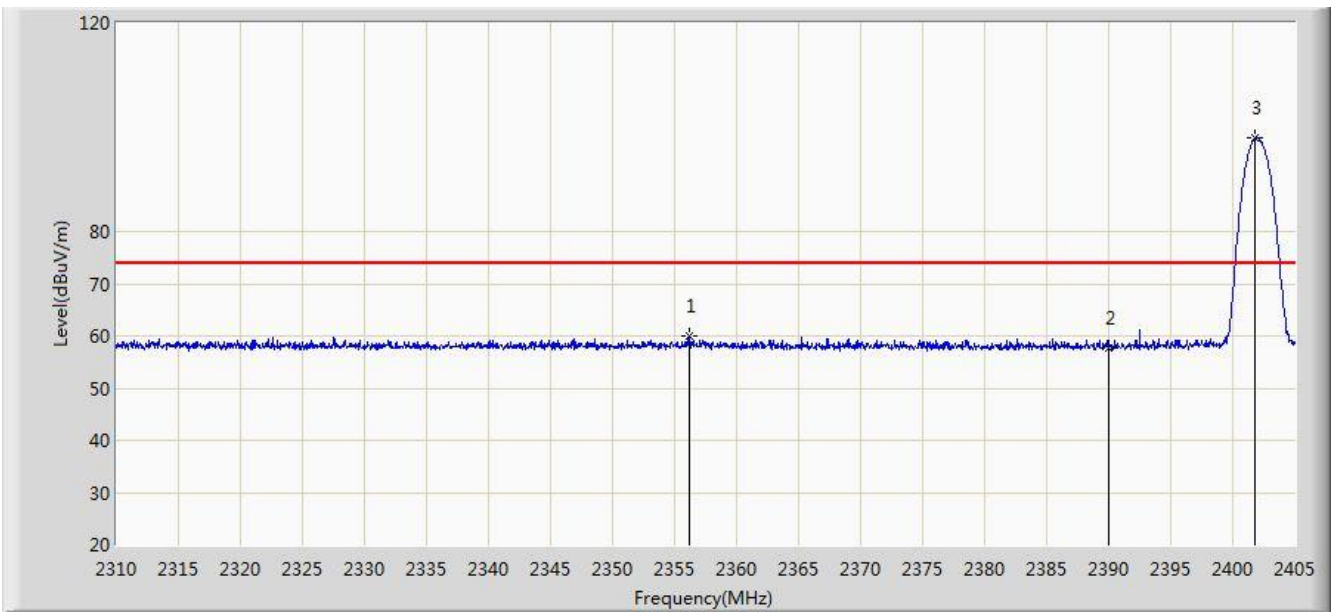


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2356.170	59.877	27.246	-14.123	74.000	32.631	PK
2			2390.000	57.759	25.184	-16.241	74.000	32.575	PK
3		*	2401.817	97.900	65.341	N/A	N/A	32.559	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

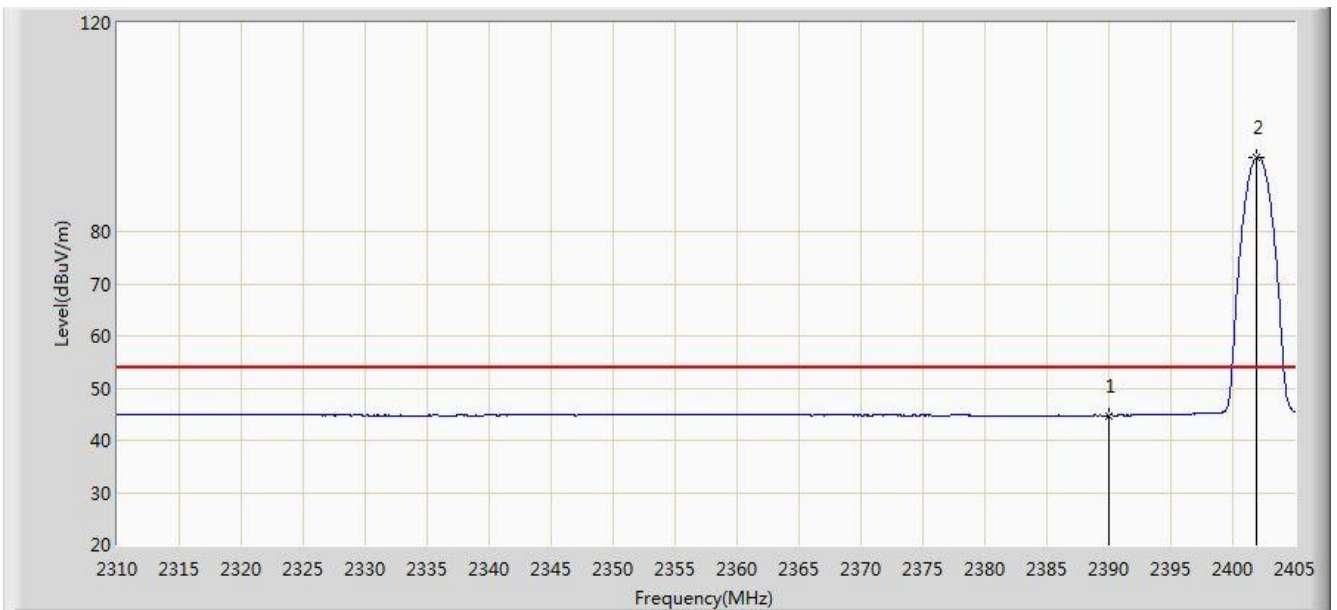


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.767	12.192	-9.233	54.000	32.575	AV
2		*	2401.865	94.130	61.571	N/A	N/A	32.559	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

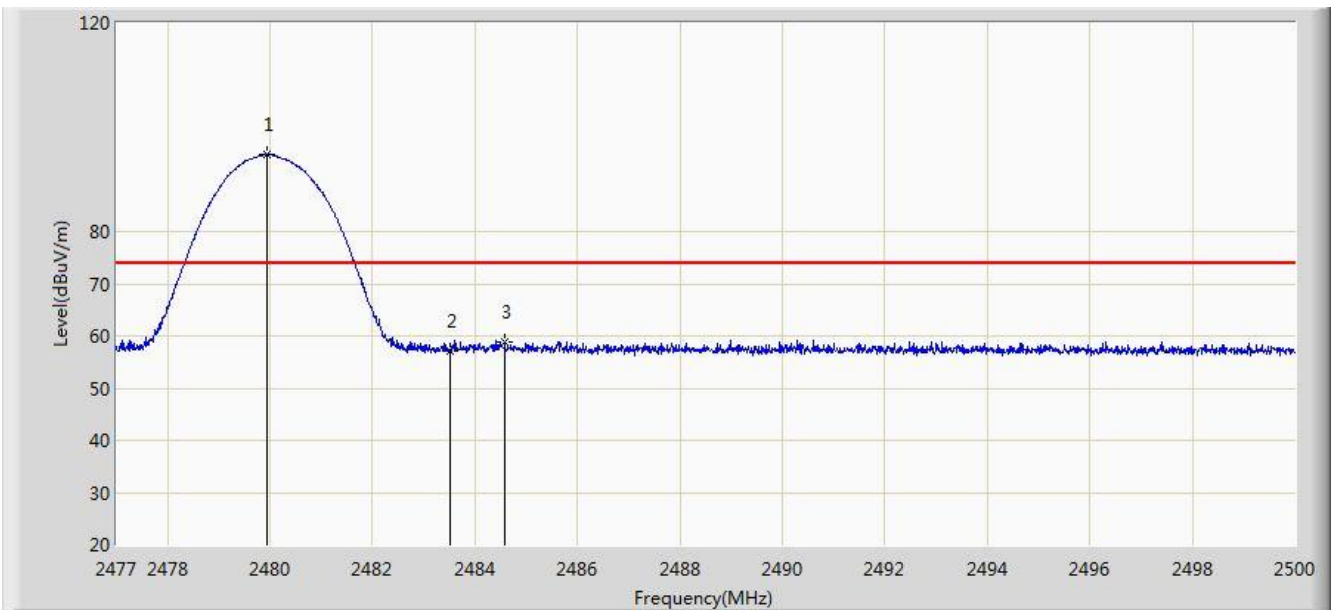


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.933	94.747	62.160	N/A	N/A	32.587	PK
2			2483.500	57.161	24.565	-16.839	74.000	32.596	PK
3			2484.579	58.836	26.237	-15.164	74.000	32.599	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

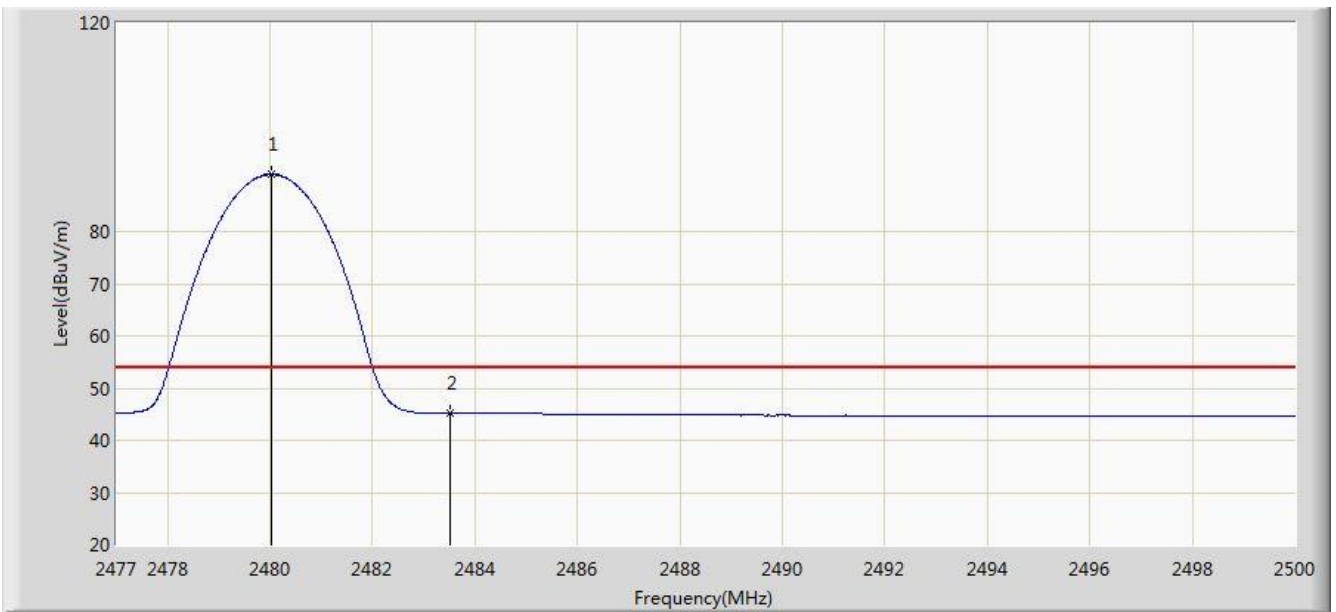


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	90.924	58.337	N/A	N/A	32.587	AV
2			2483.500	45.188	12.592	-8.812	54.000	32.596	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

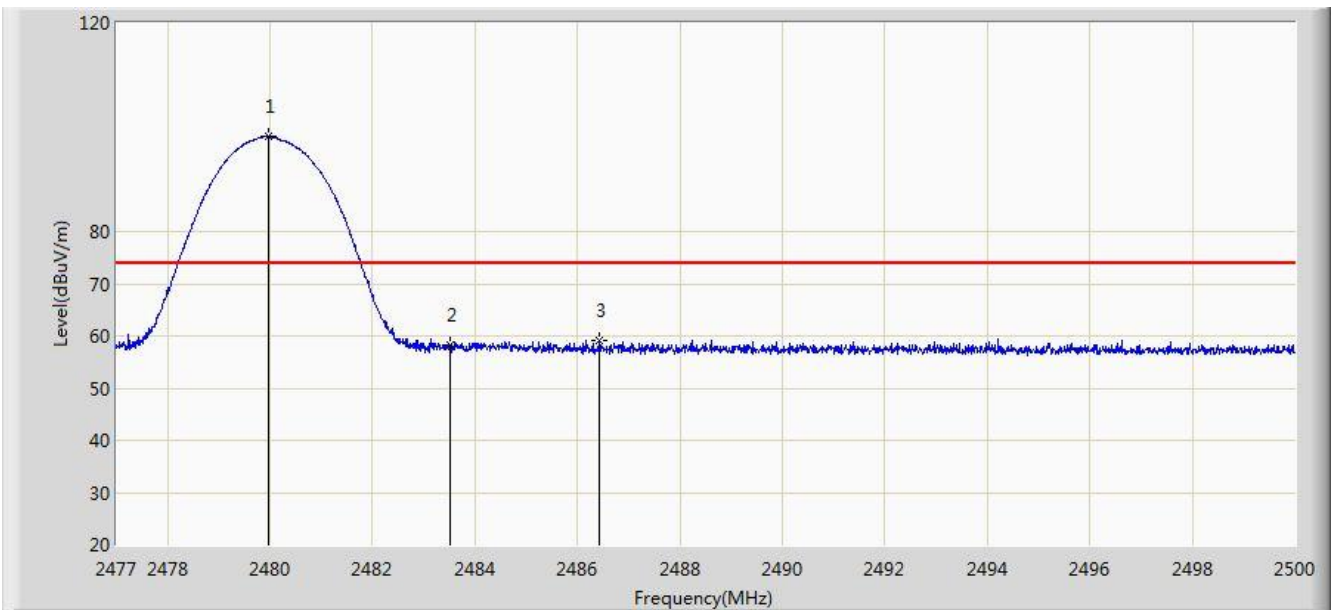


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.979	98.183	65.596	N/A	N/A	32.587	PK
2			2483.500	58.160	25.564	-15.840	74.000	32.596	PK
3			2486.430	59.264	26.661	-14.736	74.000	32.603	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/03/06 - 05:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Terminal	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

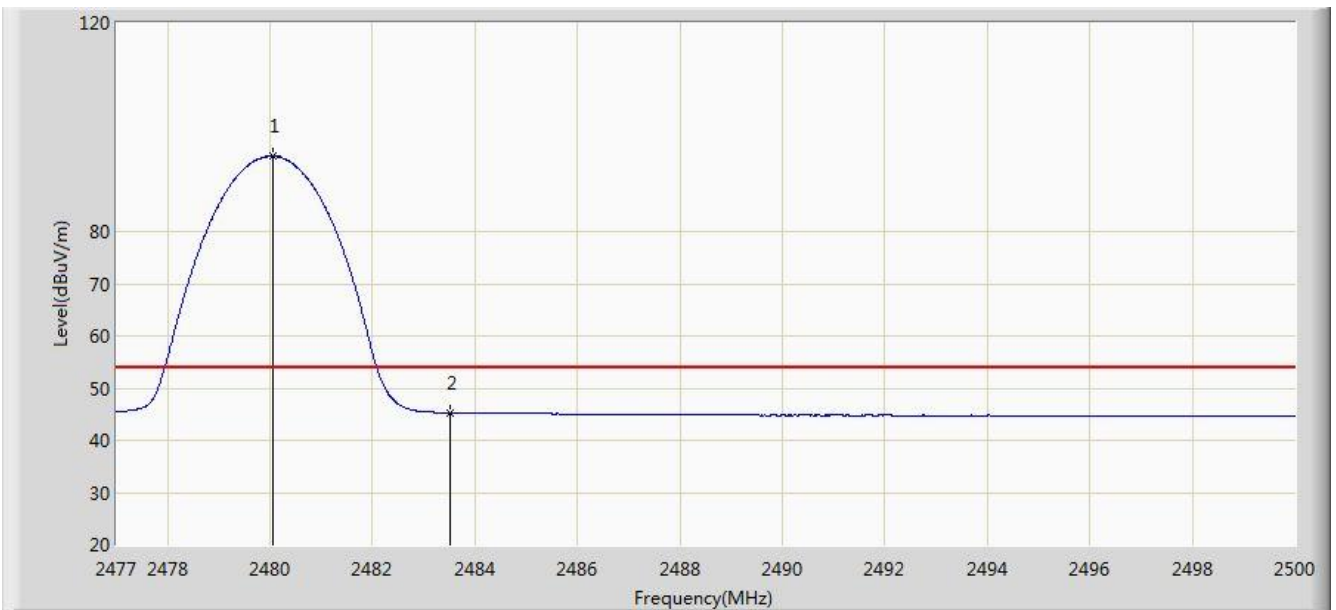

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.059	94.411	61.824	N/A	N/A	32.587	AV
2			2483.500	45.296	12.700	-8.704	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.11. AC Conducted Emissions Measurement


7.11.1. Test Limit

FCC 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.11.2. Test Setup

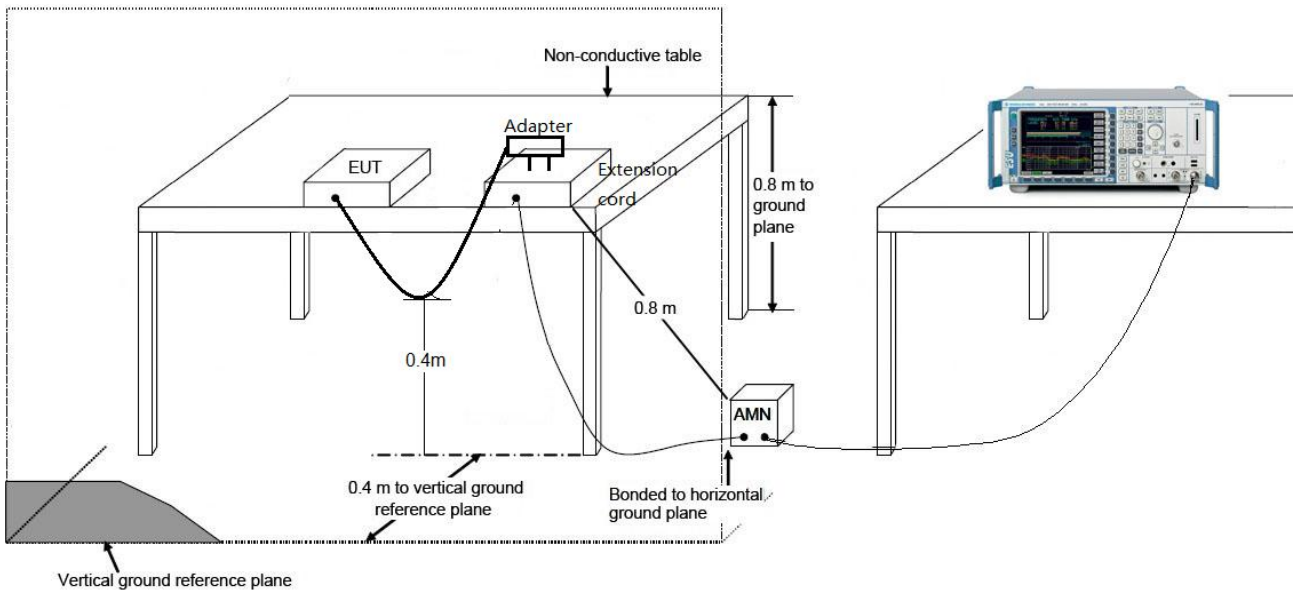

7.11.3. Test Result

Site: SR2	Time: 2018/02/26 - 16:54
Limit: FCC_Part15.207_CE_AC Power	Engineer: Andy Zhu
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Terminal	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2402MHz By 2DH5	

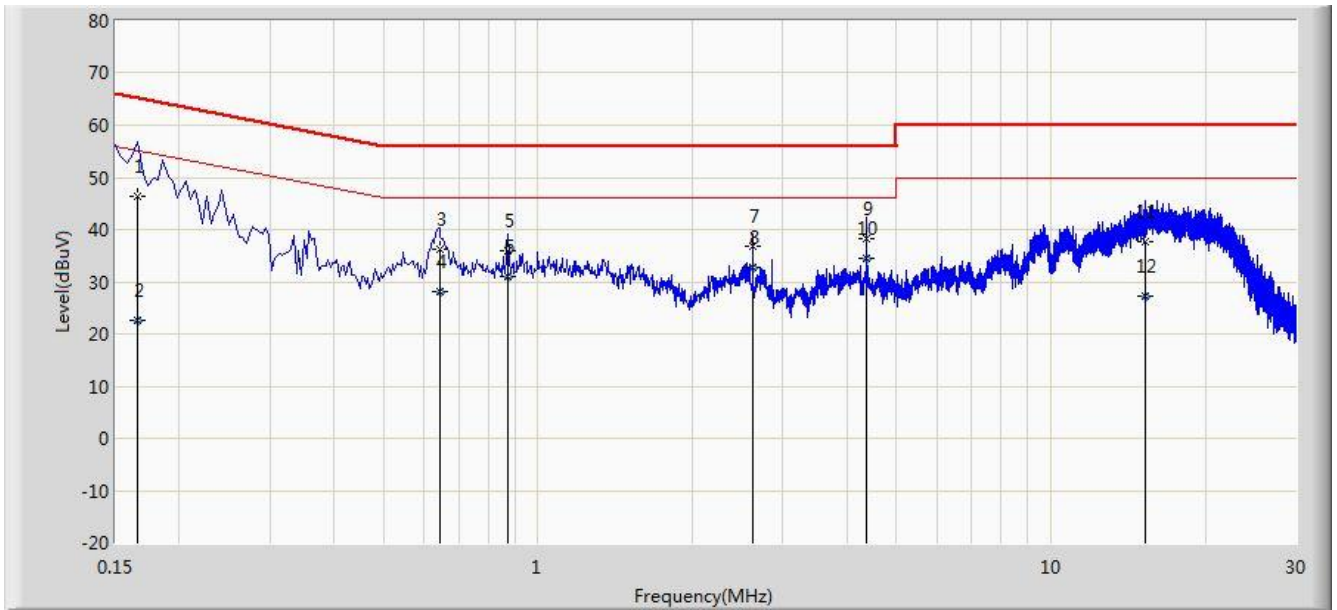


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.166	46.393	36.305	-18.766	65.158	10.087	QP
2			0.166	22.643	12.555	-32.515	55.158	10.087	AV
3			0.642	36.346	26.253	-19.654	56.000	10.093	QP
4			0.642	27.987	17.894	-18.013	46.000	10.093	AV
5			0.874	36.054	26.080	-19.946	56.000	9.974	QP
6			0.874	31.022	21.048	-14.978	46.000	9.974	AV
7			2.622	36.813	26.960	-19.187	56.000	9.853	QP
8			2.622	32.834	22.981	-13.166	46.000	9.853	AV
9			4.370	38.182	28.201	-17.818	56.000	9.981	QP
10		*	4.370	34.536	24.556	-11.464	46.000	9.981	AV
11			15.282	37.668	27.602	-22.332	60.000	10.066	QP
12			15.282	27.321	17.255	-22.679	50.000	10.066	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2018/02/26 - 16:58
Limit: FCC_Part15.207_CE_AC Power	Engineer: Andy Zhu
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Terminal	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2402MHz By 2DH5	

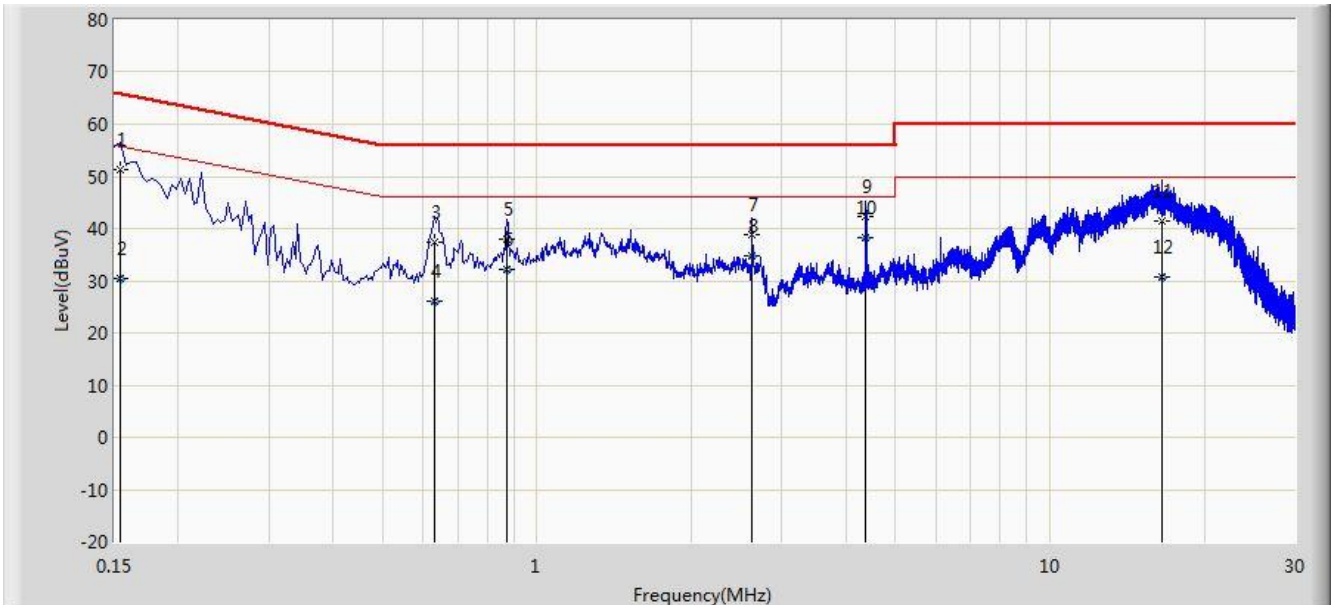

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.154	51.406	40.690	-14.375	65.781	10.716	QP
2			0.154	30.397	19.681	-25.384	55.781	10.716	AV
3			0.630	37.357	27.242	-18.643	56.000	10.115	QP
4			0.630	26.215	16.100	-19.785	46.000	10.115	AV
5			0.874	38.027	28.049	-17.973	56.000	9.978	QP
6			0.874	32.062	22.084	-13.938	46.000	9.978	AV
7			2.626	38.927	29.070	-17.073	56.000	9.857	QP
8			2.626	34.853	24.996	-11.147	46.000	9.857	AV
9			4.378	42.224	32.234	-13.776	56.000	9.990	QP
10		*	4.378	38.358	28.368	-7.642	46.000	9.990	AV
11			16.534	41.453	31.332	-18.547	60.000	10.121	QP
12			16.534	30.834	20.713	-19.166	50.000	10.121	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Terminal** is in compliance with Part 15C of the FCC Rule.

_____ The End _____