



Test report No. : 4789969990-US-R0-V0
Page : 1 of 64
Issued date : 2021/7/30
FCC ID : MQT-AT170R18W

RADIO TEST REPORT

Product : Terminal

Model Name : xCL_AT-170-R-18W

Series Model : Utimaco C3

FCC ID : MQT-AT170R18W

Test Regulation : FCC 47 CFR Part 15 Subpart C (Section 15.247)

Received Date : 2021/6/2

Test Date : 2021/6/2 ~ 2021/6/29

Issued Date : 2021/7/30

Applicant : XAC Automation Corporation
4F., No. 30 Industry E. Road IX, Science-Based Industrial
Park Hsin-Chu, 300, Taiwan, ROC

Issued By : Underwriters Laboratories Taiwan Co., Ltd.
Building B and Building E, No. 372-7, Sec. 4, Zhongxing
Rd., Zhudong Township, Hsinchu County, Taiwan



The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report are responsible of the test sample(s) provided by the client only and are not to be used to indicate applicability to other similar products.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Table of Contents

| | |
|---|-----------|
| 1. Attestation of Test Results | 4 |
| 2. Summary of Test Results | 5 |
| 3. Test Methodology and Reference Procedures..... | 6 |
| 4. Facilities and Accreditation..... | 6 |
| 5. Measurement Uncertainty | 7 |
| 6. Equipment under Test | 8 |
| 6.1. Description of EUT..... | 8 |
| 6.2. Channel List..... | 10 |
| 6.3. Test Condition..... | 10 |
| 6.4. Description of Available Antennas..... | 10 |
| 6.5. Test Mode Applicability and Tested Channel Detail..... | 11 |
| 6.6. Duty cycle | 12 |
| 7. Test Equipment..... | 13 |
| 8. Description of Test Setup..... | 15 |
| 9. Test Results..... | 17 |
| 9.1. 6dB Bandwidth | 17 |
| 9.2. Conducted Output Power | 20 |
| 9.3. Power Spectral Density..... | 23 |
| 9.4. Conducted Out of Band Emission..... | 26 |
| 9.5. Radiated Spurious Emission | 33 |
| 9.6. AC Power Line Conducted Emission | 50 |
| Appendix I Radiated Band Edge Measurement | 56 |
| Appendix II Radiated Spurious Emission Measurement | 62 |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



1. Attestation of Test Results

APPLICANT: XAC Automation Corporation
 4F., No. 30 Industry E. Road IX, Science-Based Industrial Park
 Hsin-Chu, 300, Taiwan, ROC

MANUFACTURER: XAC Automation Corporation
 4F., No. 30 Industry E. Road IX, Science-Based Industrial
 Park Hsin-Chu, 300, Taiwan, ROC

EUT DESCRIPTION: Terminal

BRAND: XAC, Utimaco

MODEL: xCL_AT-170-R-18W

SERIES MODEL: Utimaco C3

SAMPLE STAGE: Engineering Verification Test sample

DATE of TESTED: 2021/6/2 ~ 2021/6/29

| APPLICABLE STANDARDS | |
|---|---------------------|
| STANDARD | Test Results |
| FCC 47 CFR PART 15 Subpart C (Section 15.247) | PASS |

Underwriters Laboratories Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Underwriters Laboratories Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Underwriters Laboratories Taiwan Co., Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Underwriters Laboratories Taiwan Co., Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Prepared By:

Sally Lu
 Project Handler

Date : 2021/7/30

Approved and Authorized By:

Mike Cai
 Engineer Project Associate

Date : 2021/7/30

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
 Telephone : +886-2-7737-3000
 Facsimile (FAX) : +886-3-583-7948



2. Summary of Test Results

| Summary of Test Results | | |
|--------------------------------|---|--------|
| FCC Clause | Test Items | Result |
| 15.247(a)(2) | 6dB Bandwidth | PASS |
| 15.247(b) | Conducted Output Power | PASS |
| 15.247(e) | Power Spectral Density | PASS |
| 15.247(d) | Antenna Port Emission | PASS |
| 15.205 / 15.209 / 15.247(d) | Radiated Emissions and Band Edge Measurement | PASS |
| 15.207 | AC Power Conducted Emission | PASS |
| 15.203 | Antenna Requirement | PASS |

Note:

1. For the Radiated Band Edge test plots were recorded in Appendix I, the Radiated Emissions test plots were recorded in Appendix II.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



3. Test Methodology and Reference Procedures

The tests documented in this report were performed in accordance with 47 CFR FCC Part 2, KDB558074 D01 Meas Guidance v05r02, KDB414788 D01 Radiated Test Site v01r01, ANSI C63.10-2013.

4. Facilities and Accreditation

| | |
|----------------------------------|---|
| Test Location | Underwriters Laboratories Taiwan Co., Ltd. |
| Address | Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan |
| Accreditation Certificate | Underwriters Laboratories Taiwan Co., Ltd. is accredited by TAF, Laboratory Code 3398. The full scope of accreditation can be viewed at http://accreditation.taftw.org.tw/taf/public/basic/viewApplyItems.action?unitNo=3398 |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948



5. Measurement Uncertainty

For statement of conformity, accuracy method (Section 8.2.4 and 8.2.5 of ISO Guide 98-4) was applied as decision rule for measurement in this test report.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

| Measurement | Frequency | Uncertainty |
|--|----------------|--------------|
| Conducted disturbance at mains terminals ports | 150kHz ~ 30MHz | ± 3.1 dB |
| RF Conducted | 9 kHz - 40GHz | ± 1.9 dB |
| Radiated disturbance below 30MHz | 9 kHz - 30 MHz | ± 1.9 dB |
| Radiated disturbance below 1 GHz | 30MHz ~ 1GHz | ± 5.4 dB |
| Radiated disturbance above 1 GHz | 1GHz ~ 40GHz | ± 4.7 dB |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



6. Equipment under Test

6.1. Description of EUT

| | |
|-----------------------------|--|
| Product | Terminal |
| Brand Name | XAC, Utimaco |
| Model Name | xCL_AT-170-R-18W |
| Series Model | Utimaco C3 |
| Operating Frequency | 2412MHz ~ 2462MHz |
| Modulation | CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM |
| Transfer Rate | 802.11b: up to 11 Mbps 802.11g: up to 54 Mbps 802.11n: up to MCS7 |
| Number of Channel | 11 for 802.11b, 802.11g, 802.11n (HT20) |
| Maximum Output Power | 802.11b: 18.31 dBm 802.11g: 21.74 dBm 802.11n (HT20): 22.8 dBm |
| Normal Voltage | 5Vdc from adapter or host 3.8Vdc from battery |
| S/N | Conducted Test: 1740D2103 Radiated Test: 1740D2107 |
| Sample ID | Conducted Test: 3949576 Radiated Test: 3949578 |
| Software Version | Android Version: 8.1.0 Kernel Version: 3.18.71 (gcc version 4.8(GCC)) |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Note:

1. The models difference table as below:

| Main Model Name | | |
|--------------------------|------------------|-------------------------|
| Brand | Model | Difference |
| XAC | xCL_AT-170-R-18W | - |
| Series Model Name | | |
| Brand | Model | Difference |
| Utimaco | Utimaco C3 | For market segmentation |

2. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

| Modulation Mode | Tx,Rx Function |
|------------------------|-----------------------|
| 802.11b | 1TX,1RX |
| 802.11g | 1TX,1RX |
| 802.11n (HT20) | 1TX,1RX |

3. The EUT could be supplied with rechargeable battery as the following table:

| Brand Name | Model | Description |
|--|--------------|--------------------|
| Shenzhen Rishengzhi Electronics Technology Co., Ltd. | J601 | 3.8Vdc, 5200mAh |

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer the manufacturer's or user's manual.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



6.2. Channel List

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 1 | 2412 | 7 | 2442 |
| 2 | 2417 | 8 | 2447 |
| 3 | 2422 | 9 | 2452 |
| 4 | 2427 | 10 | 2457 |
| 5 | 2432 | 11 | 2462 |
| 6 | 2437 | - | - |

6.3. Test Condition

| Test Item | Test Site No. | Environmental Condition | Input Power | Test Date | Tested by |
|------------------------------------|---------------|-------------------------|-------------------|---------------------------|-----------------|
| Antenna Port Conducted Measurement | SR4 | 22~26°C/ 62~68%RH | 5Vdc from host | 2021/06/11~ 2021/06/24 | Patrick Kuan |
| Radiated Spurious Emission | 966-2 | 22~26°C/ 62~68%RH | 5Vdc from host | 2021/06/02~ 2021/06/24 | Patrick Kuan |
| AC power Line Conducted Emission | SR1 | 22~26°C/ 62~68%RH | 5Vdc from host | 2021/06/16~ 2021/06/29 | Patrick Kuan |

FCC Test Firm Registration Number: 498077

6.4. Description of Available Antennas

| Ant. No. | Transmitter Circuit | Brand Name | Model Name | Ant. Type | Maximum Gain (dBi) |
|----------|---------------------|------------|--------------|-----------|---------------------------|
| 1 | Chain (0) | AWAN | AYF6P-100000 | PIFA | 2.4GHz: 1.2 5GHz: 3.71 |

Note: The above antenna information was provided from customer and for more detailed features description, please refer the manufacturer's specification or user's manual.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone :+886-2-7737-3000
Facsimile (FAX) :+886-3-583-7948



6.5. Test Mode Applicability and Tested Channel Detail

- The EUT has three power source types: 3.8Vdc from battery, 5V from host and 5V from adapter. Three types were pre-tested, the worst case was found in the 5Vdc from host. Therefore, only the test data of the 5Vdc from host was recorded in this report.
- The fundamental of the EUT was investigated in three orthogonal axes X-Y/Y-Z/X-Z, it was determined that X-Z axis was worst-case. Therefore, all final radiated testing was performed with the EUT in X-Z axis.
- For Antenna Port Conducted Measurement, this item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel), parallel and perpendicular are the worst orientations, therefore testing was performed on these two orientations only.
- For below 1 GHz radiated emission and AC power line conducted emission have performed all modes of operation were investigated and the worst-case emissions are reported.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

| Test item | Mode | Modulation Technology | Modulation Type | Available Channel | Test Channel | Data Rate |
|-------------------------------------|--------------|-----------------------|-----------------|-------------------|--------------|-----------|
| Radiated Emissions (Above 1GHz) | 802.11b | DSSS | DBPSK | 1 to 11 | 1,6,11 | 1 Mbps |
| | 802.11g | OFDM | BPSK | 1 to 11 | 1,6,11 | 6 Mbps |
| | 802.11n HT20 | OFDM | BPSK | 1 to 11 | 1,6,11 | 6.5 Mbps |
| Radiated Emissions (Below 1GHz) | 802.11b | DSSS | DBPSK | 1 to 11 | 1 | 1 Mbps |
| AC Power Line Conducted Emission | 802.11b | DSSS | DBPSK | 1 to 11 | 1 | 1 Mbps |
| *Antenna Port Conducted Measurement | 802.11b | DSSS | DBPSK | 1 to 11 | 1,6,11 | 1 Mbps |
| | 802.11g | OFDM | BPSK | 1 to 11 | 1,6,11 | 6 Mbps |
| | 802.11n HT20 | OFDM | BPSK | 1 to 11 | 1,6,11 | 6.5 Mbps |

*Note: For Antenna Port Conducted Measurement item, Inner channels only test Power and Conducted Out of Band Emission.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone :+886-2-7737-3000
Facsimile (FAX) :+886-3-583-7948




6.6. Duty cycle

802.11b: Duty cycle = 20/20 = 1 duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11g: Duty cycle = 20/20 = 1 duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11n HT20: Duty cycle = 20/20 = 1 duty cycle of test signal is $\geq 98\%$, duty factor is not required.

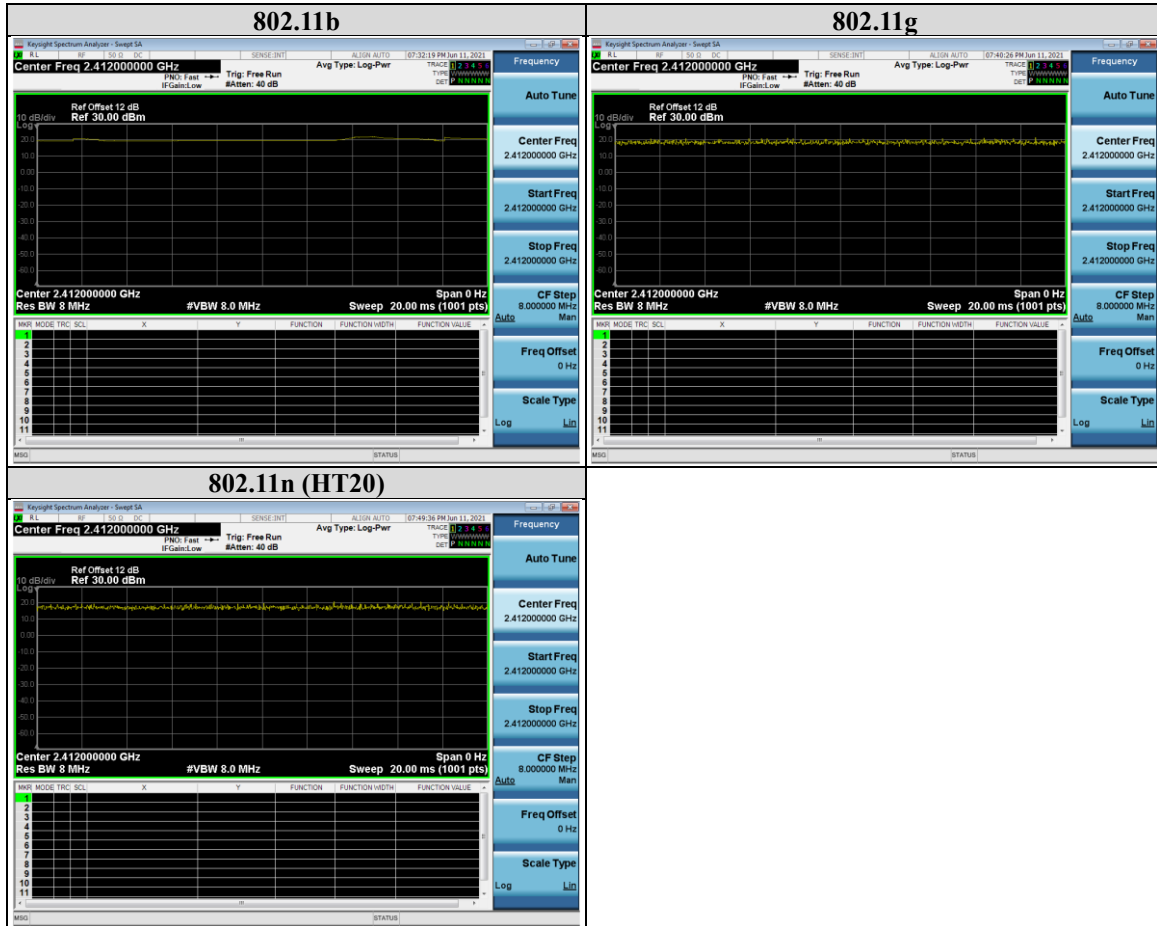



7. Test Equipment

| Test Equipment List | | | | | |
|--|--------------------|-------------------------|---------------------|------------|--------------|
| Equipment | Manufacturer | Model No. | Serial No. | Cal. Date | Expired date |
| Radiated Spurious Emission | | | | | |
| Spectrum Analyzer | Keysight | N9010A | MY56070827 | 2020/11/11 | 2021/11/10 |
| EMI Test Receiver | Rohde & Schwarz | ESR7 | 101754 | 2020/12/11 | 2021/12/10 |
| Loop Antenna | ETS lindgren | 6502 | 00213440 | 2020/12/25 | 2021/12/24 |
| Trilog-Broadband Antenna with 5dB Attenuator | Schwarzbeck & EMCI | VULB 9168 & N-6-05 | 774 & AT-N0538 | 2021/1/13 | 2022/1/12 |
| Horn Antenna (1-18 GHz) | Schwarzbeck | BBHA 9120 D | 01690 | 2020/12/30 | 2021/12/29 |
| Horn Antenna (18-40 GHz) | Schwarzbeck | BBHA 9170 | 781 | 2020/12/30 | 2021/12/29 |
| Preamplifier (30-1000 MHz) | EMCI | EMC330E | 980405 | 2020/6/9 | 2021/6/8 |
| | | | | 2021/6/8 | 2022/6/7 |
| Preamplifier (1-18 GHz) | EMCI | EMC051835BE | 980406 | 2021/2/3 | 2022/2/2 |
| Preamplifier (18-40GHz) | EMCI | EMC184040SEE | 980426 | 2020/5/19 | 2021/5/18 |
| | | | | 2021/5/19 | 2022/5/18 |
| Cables | Hanyitek | K1K50-UP0264-K1K50-2500 | 170214-4 & 170425-2 | 2021/1/22 | 2022/1/21 |
| Cables | Hanyitek | K1K50-UP0264-K1K50-2500 | 170214-1 & 170214-2 | 2021/1/22 | 2022/1/21 |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Test report No. : 4789969990-US-R0-V0
Page : 14 of 64
Issued date : 2021/7/30
FCC ID : MQT-AT170R18W

| Test Equipment List | | | | | |
|------------------------------------|-----------------|-----------|--------------------------|------------|--------------|
| Equipment | Manufacturer | Model No. | Serial No. | Cal. Date | Expired date |
| Antenna Port Conducted Measurement | | | | | |
| Spectrum Analyzer | Keysight | N9010A | MY56070834 | 2020/11/6 | 2021/11/5 |
| Pulse Power Sensor | Anritsu | MA2411B | 1531202 | 2020/12/21 | 2021/12/20 |
| Power Meter | Anritsu | ML2495A | 1645002 | 2020/12/21 | 2021/12/20 |
| AC power Line Conducted Emission | | | | | |
| EMI Test Receiver | Rohde & Schwarz | ESR7 | 101753 | 2020/11/17 | 2021/11/16 |
| Two-Line V-Network | Rohde & Schwarz | ENV216 | 102136 | 2020/8/19 | 2021/8/18 |
| Impuls-Begrenzer Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | 102219-Qt | 2020/8/12 | 2021/8/11 |
| Cables | TITAN | CFD200 | T0732ACFD20 020A300-1 | 2021/3/2 | 2022/3/1 |

| UL Software | | |
|----------------------------------|-------------------------|----------------|
| Description | Name | Version |
| Radiated measurement | e3 | 6.191211 (V6) |
| Conducted measurement | RF Conducted Test Tools | ver 2.4.0.620b |
| AC power Line Conducted Emission | EZ_EMCC | UL-3A1.2 |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



8. Description of Test Setup

Support Equipment

| ID | Equipment | Brand Name | Model Name | S/N | Remark |
|----|-----------|------------|------------|---------|------------------------|
| A | Laptop | Lenovo | T430 | PBE38AK | Mach/Model: 2349CW9 |
| B | Headset | TECO | XYFSE005 | - | Provide by Lab |

I/O Cables

| ID | Equipment | Brand Name | Model Name | Length (m) | Remark |
|----|---------------------|------------|------------|------------|-------------------|
| 1 | USB to Type C Cable | N/A | N/A | 1.2 | Provide by Client |

Test Setup

Controlled using a bespoke application (QRCT (Version: 3.0.124.0)) on a test Notebook. The application was used to enable a continuous transmission mode and to select the test channels, data rates, modulation schemes and power setting as required.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Setup Diagram for Test

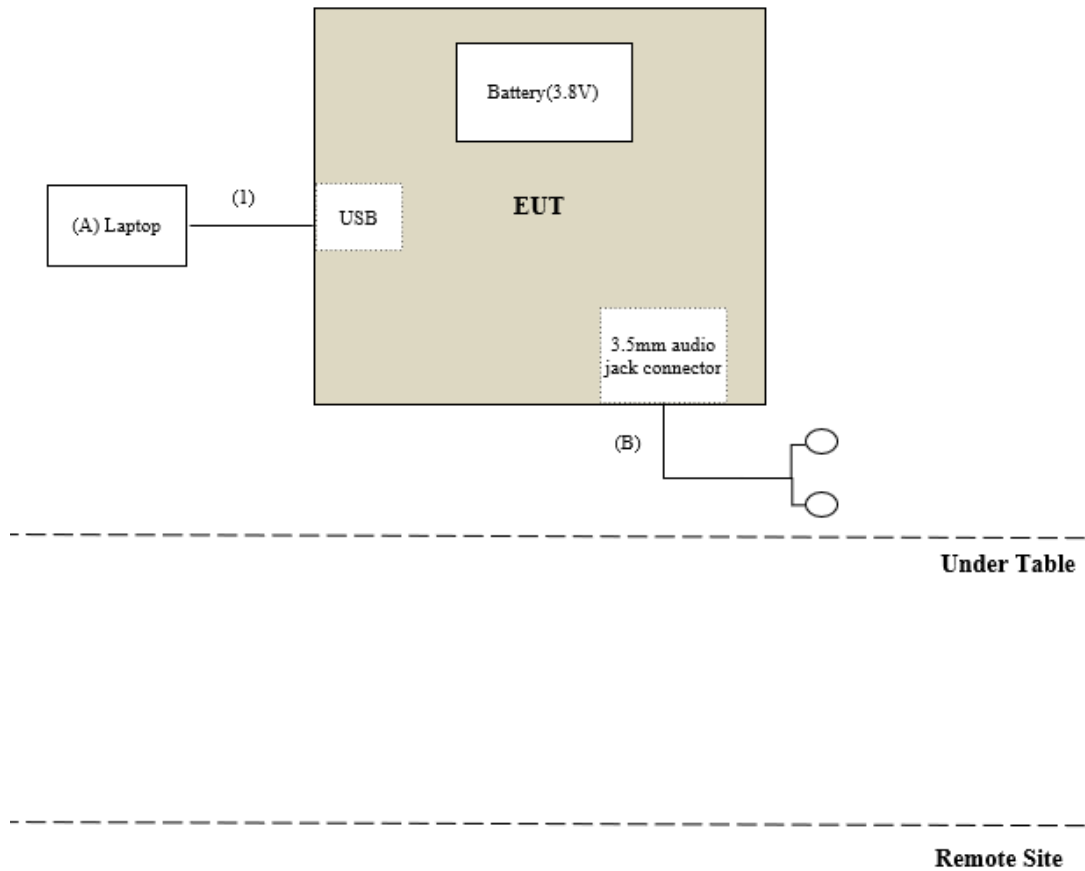

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



9. Test Results

9.1. 6dB Bandwidth


Requirements

The minimum 6 dB bandwidth shall be at least 500 kHz.

Test procedure

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Setup



The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Test Data

802.11b

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|----------------------|---------------------|-------------|
| 1 | 2412 | 8.996 | 0.5 | PASS |
| 6 | 2437 | 8.546 | 0.5 | PASS |
| 11 | 2462 | 8.543 | 0.5 | PASS |

802.11g

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|----------------------|---------------------|-------------|
| 1 | 2412 | 16.376 | 0.5 | PASS |
| 6 | 2437 | 16.354 | 0.5 | PASS |
| 11 | 2462 | 16.403 | 0.5 | PASS |

802.11n (HT20)

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|----------------------|---------------------|-------------|
| 1 | 2412 | 17.599 | 0.5 | PASS |
| 6 | 2437 | 17.333 | 0.5 | PASS |
| 11 | 2462 | 17.588 | 0.5 | PASS |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0

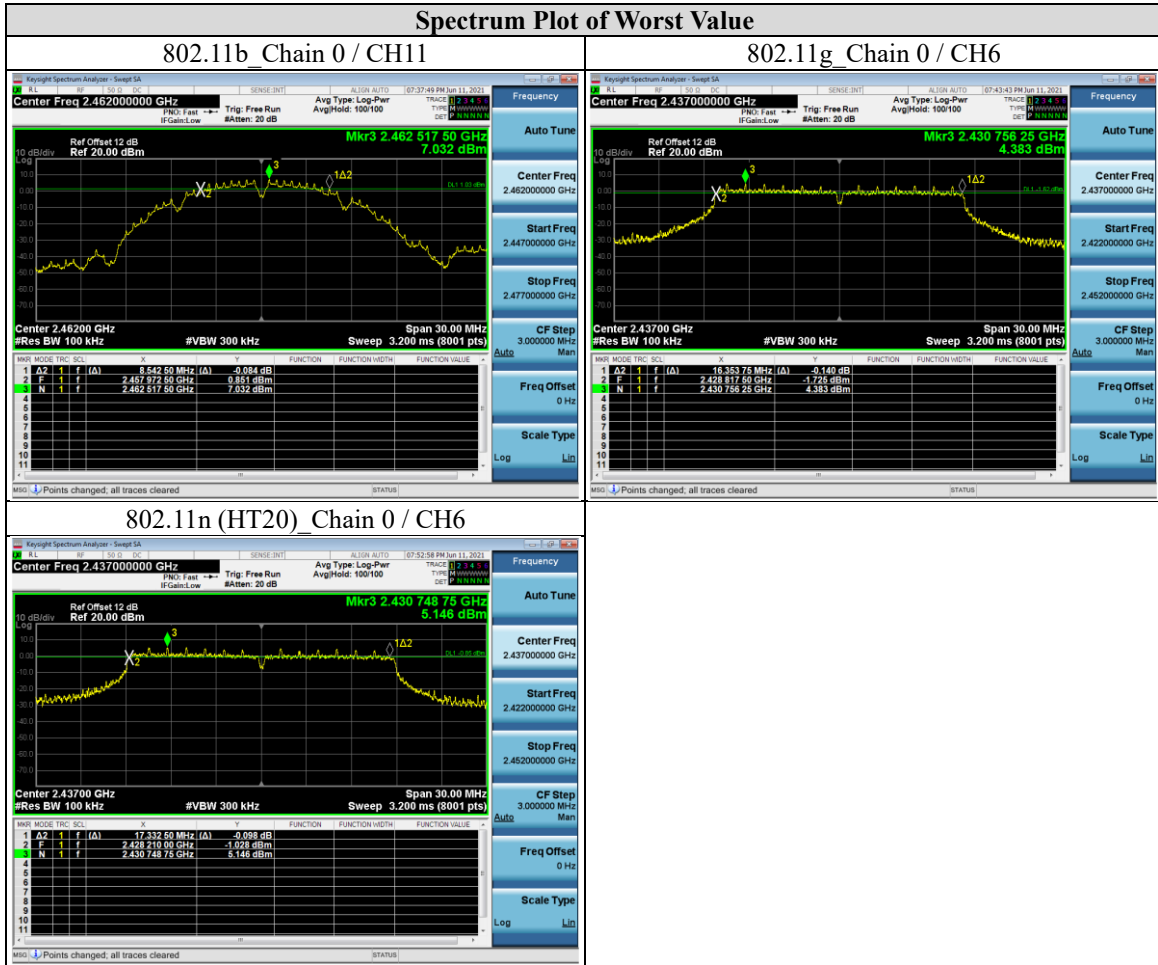

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948



9.2. Conducted Output Power

Requirements


For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.

Test Procedure

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

- a. Set the RBW \geq DTS bandwidth.
- b. Set VBW $\geq 3 \times$ RBW.
- c. Set span $\geq 3 \times$ RBW.
- d. Sweep time = auto couple.
- e. Detector = peak.
- f. Trace mode = max hold.
- g. Allow trace to fully stabilize.
- h. Use peak marker function to determine the peak amplitude level.

Test Setup



The loss between RF output port of the EUT and the input port of the Power Meter has been taken into consideration.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Test Data

Peak Power

802.11b

| Channel | Frequency (MHz) | Peak Power (mW) | Peak Power (dBm) | Limit (dBm) | Pass / Fail |
|---------|-----------------|-----------------|------------------|-------------|-------------|
| 1 | 2412 | 64.417 | 18.09 | 30 | PASS |
| 6 | 2437 | 66.681 | 18.24 | 30 | PASS |
| 11 | 2462 | 67.764 | 18.31 | 30 | PASS |

802.11g

| Channel | Frequency (MHz) | Peak Power (mW) | Peak Power (dBm) | Limit (dBm) | Pass / Fail |
|---------|-----------------|-----------------|------------------|-------------|-------------|
| 1 | 2412 | 121.899 | 20.86 | 30 | PASS |
| 6 | 2437 | 149.279 | 21.74 | 30 | PASS |
| 11 | 2462 | 43.652 | 16.40 | 30 | PASS |

802.11n (HT20)

| Channel | Frequency (MHz) | Peak Power (mW) | Peak Power (dBm) | Limit (dBm) | Pass / Fail |
|---------|-----------------|-----------------|------------------|-------------|-------------|
| 1 | 2412 | 123.595 | 20.92 | 30 | PASS |
| 6 | 2437 | 190.546 | 22.80 | 30 | PASS |
| 11 | 2462 | 47.753 | 16.79 | 30 | PASS |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Average Power (Reference Only)

802.11b

| Channel | Frequency (MHz) | Average Power (mW) | Average Power (dBm) |
|---------|-----------------|--------------------|---------------------|
| 1 | 2412 | 36.559 | 15.63 |
| 6 | 2437 | 36.559 | 15.63 |
| 11 | 2462 | 37.154 | 15.70 |

802.11g

| Channel | Frequency (MHz) | Average Power (mW) | Average Power (dBm) |
|---------|-----------------|--------------------|---------------------|
| 1 | 2412 | 26.73 | 14.27 |
| 6 | 2437 | 32.434 | 15.11 |
| 11 | 2462 | 9.506 | 9.78 |

802.11n (HT20)

| Channel | Frequency (MHz) | Average Power (mW) | Average Power (dBm) |
|---------|-----------------|--------------------|---------------------|
| 1 | 2412 | 23.988 | 13.80 |
| 6 | 2437 | 42.364 | 16.27 |
| 11 | 2462 | 11.246 | 10.51 |

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



9.3. Power Spectral Density

Requirements

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz (If $G_{TX} > 6$ dBi, then $PSD = 8 - (G_{TX} - 6)$).


Note:

1. PSD = power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz.
2. G_{TX} = the maximum transmitting antenna directional gain in dBi.

Test procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times RBW$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Setup



The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Test Data

802.11b

| Channel | Frequency (MHz) | PSD (dBm/3 kHz) | Limit (dBm/3 kHz) | Pass / Fail |
|---------|-----------------|-----------------|-------------------|-------------|
| 1 | 2412 | -6.89 | 8 | PASS |
| 6 | 2437 | -5.85 | 8 | PASS |
| 11 | 2462 | -7.55 | 8 | PASS |

802.11g

| Channel | Frequency (MHz) | PSD (dBm/3 kHz) | Limit (dBm/3 kHz) | Pass / Fail |
|---------|-----------------|-----------------|-------------------|-------------|
| 1 | 2412 | -10.05 | 8 | PASS |
| 6 | 2437 | -10.28 | 8 | PASS |
| 11 | 2462 | -15.37 | 8 | PASS |

802.11n (HT20)

| Channel | Frequency (MHz) | PSD (dBm/3 kHz) | Limit (dBm/3 kHz) | Pass / Fail |
|---------|-----------------|-----------------|-------------------|-------------|
| 1 | 2412 | -10.82 | 8 | PASS |
| 6 | 2437 | -9.19 | 8 | PASS |
| 11 | 2462 | -15.50 | 8 | PASS |


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0

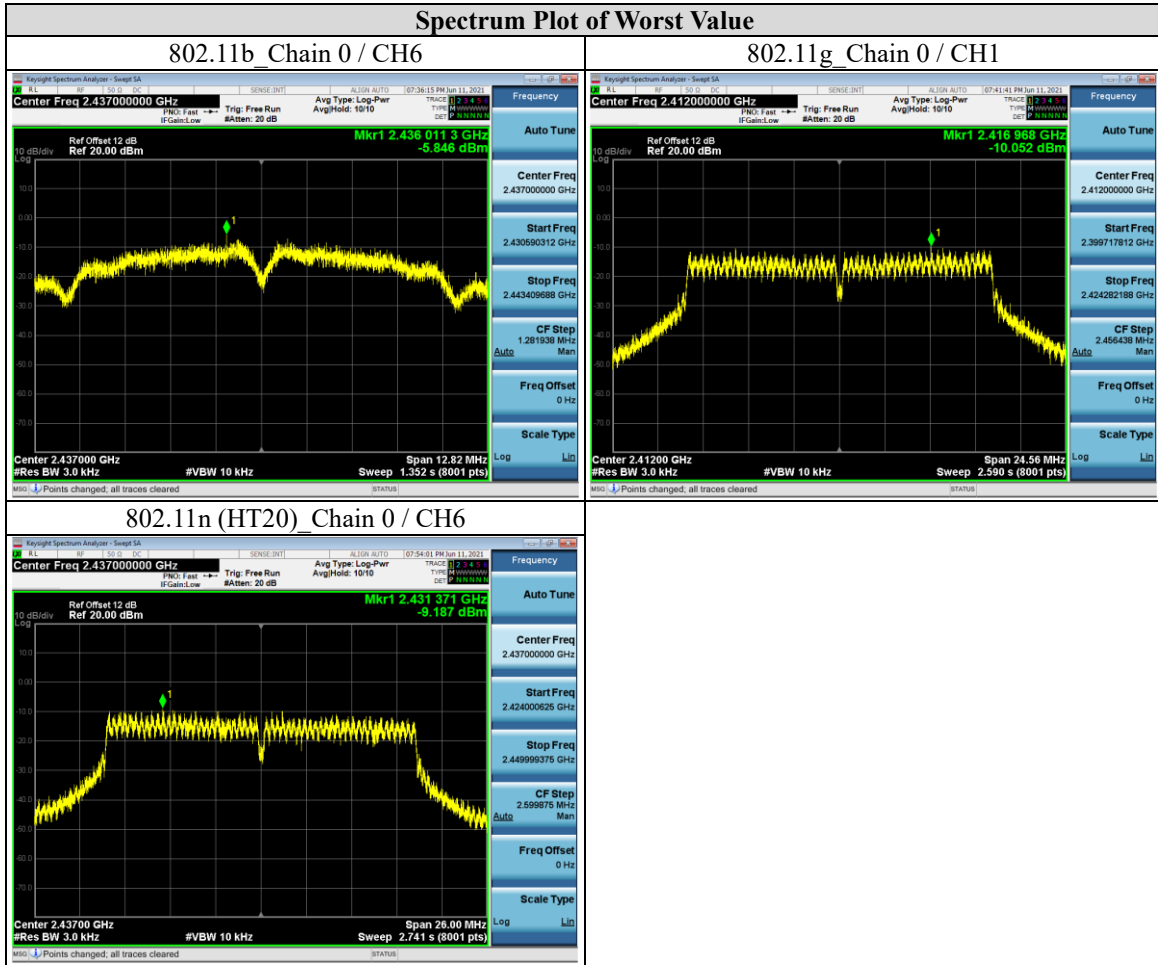

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948



9.4. Conducted Out of Band Emission

Requirements

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b) (3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209 (a) is not required.

Test procedure


Measurement Procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement Procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Setup



The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.


Underwriters Laboratories Taiwan Co., Ltd.


Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948



Test Data

802.11b

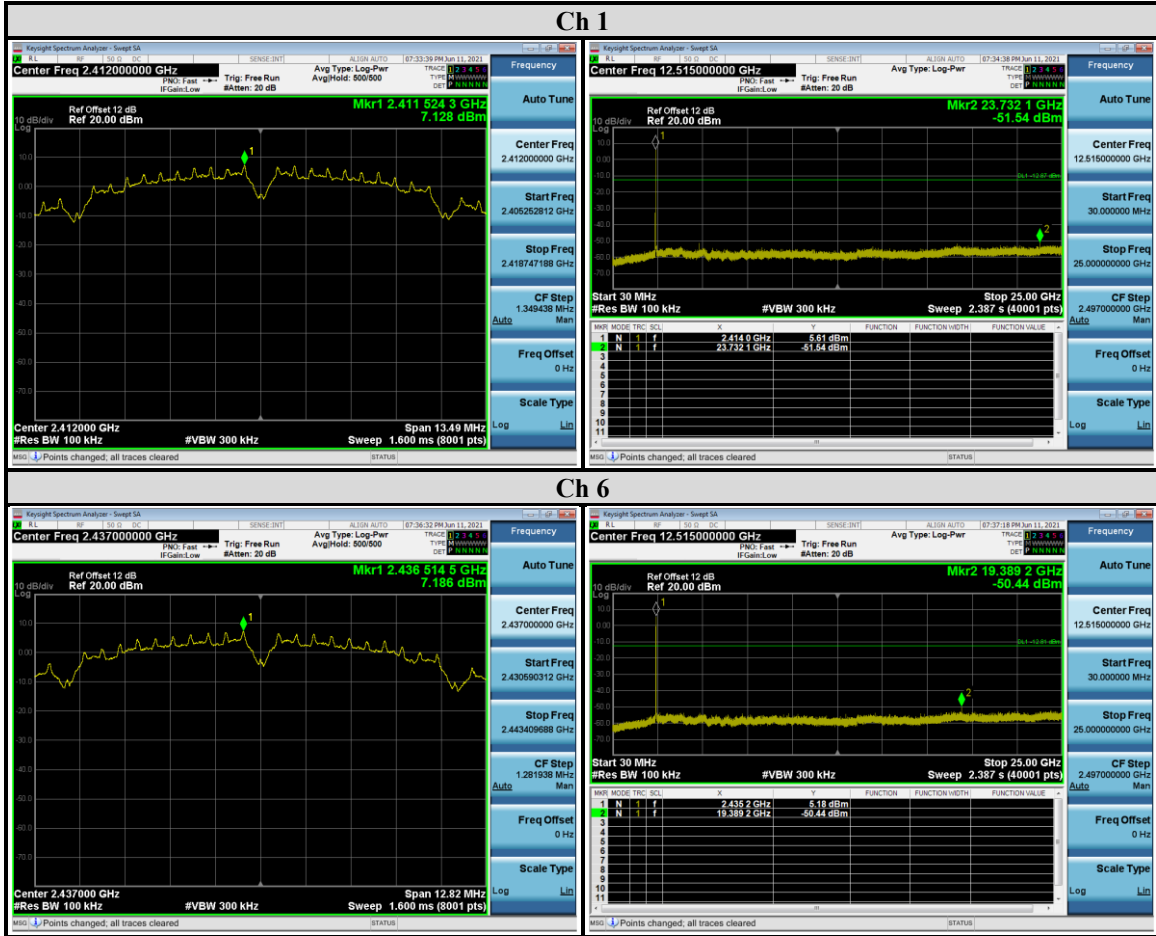

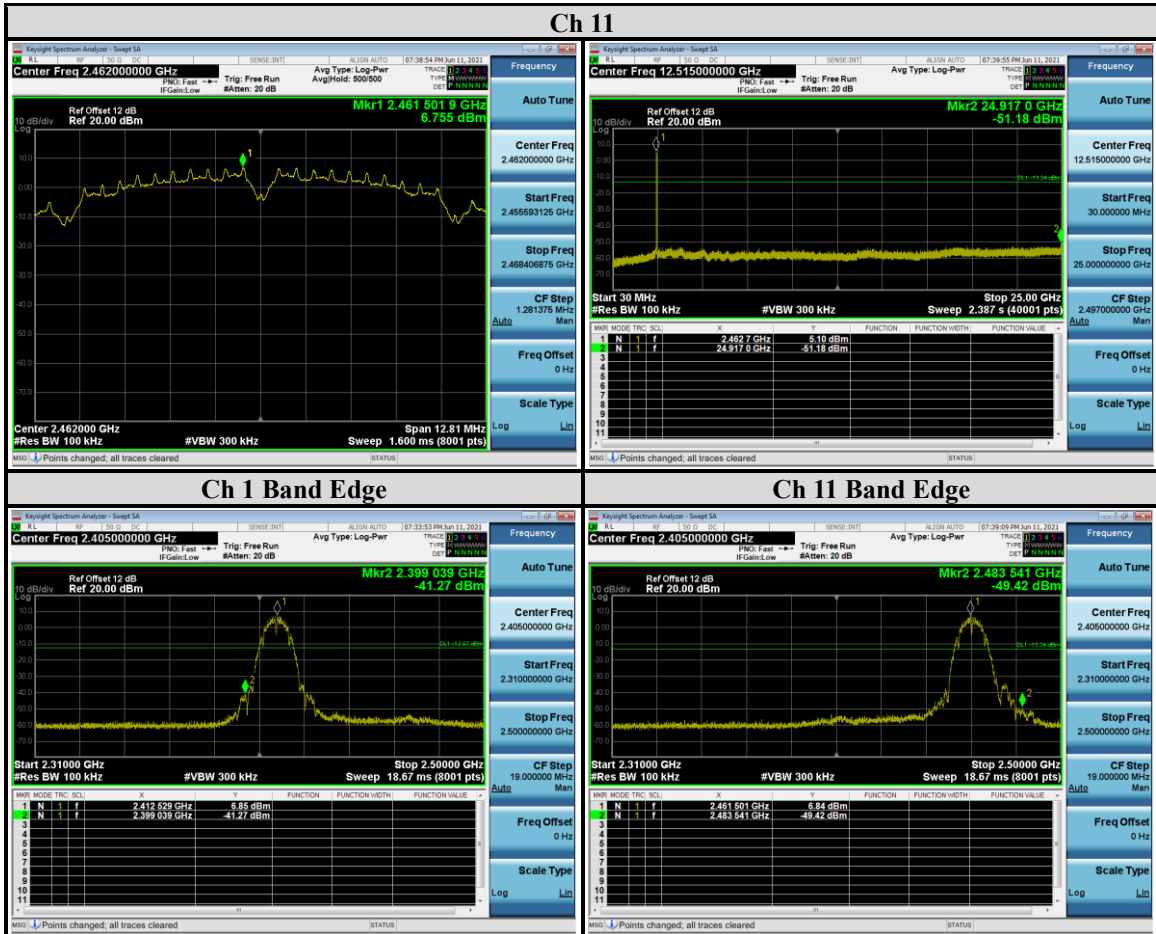

Underwriters Laboratories Taiwan Co., Ltd.



Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948



802.11g

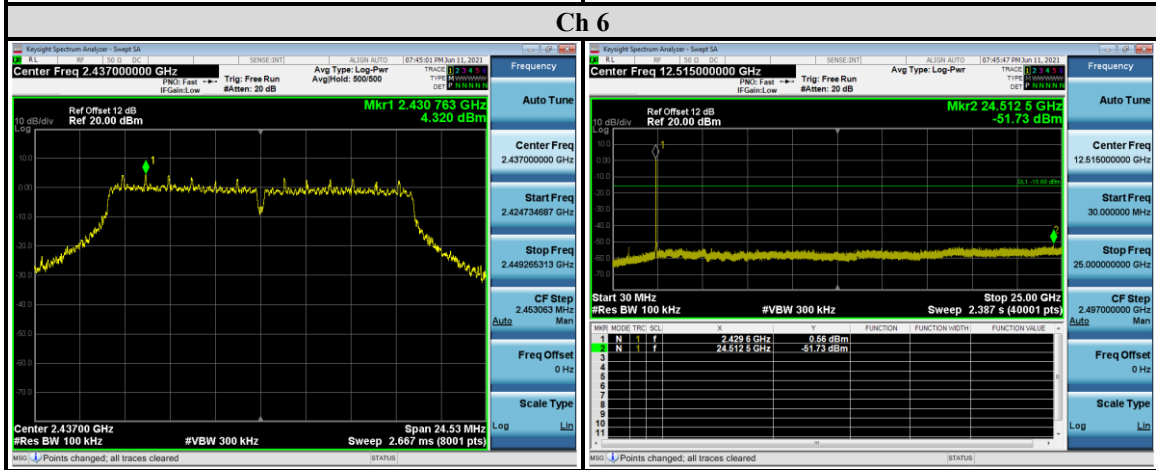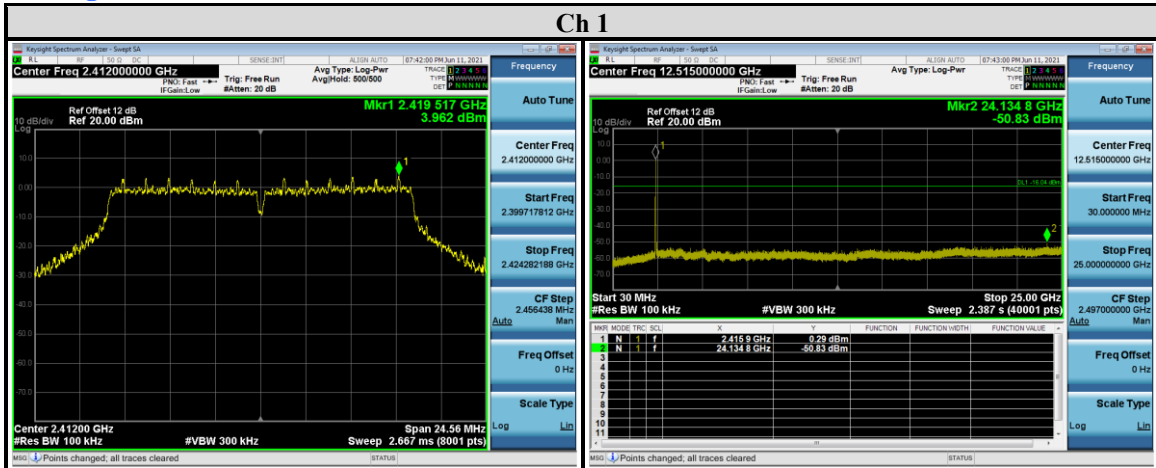


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

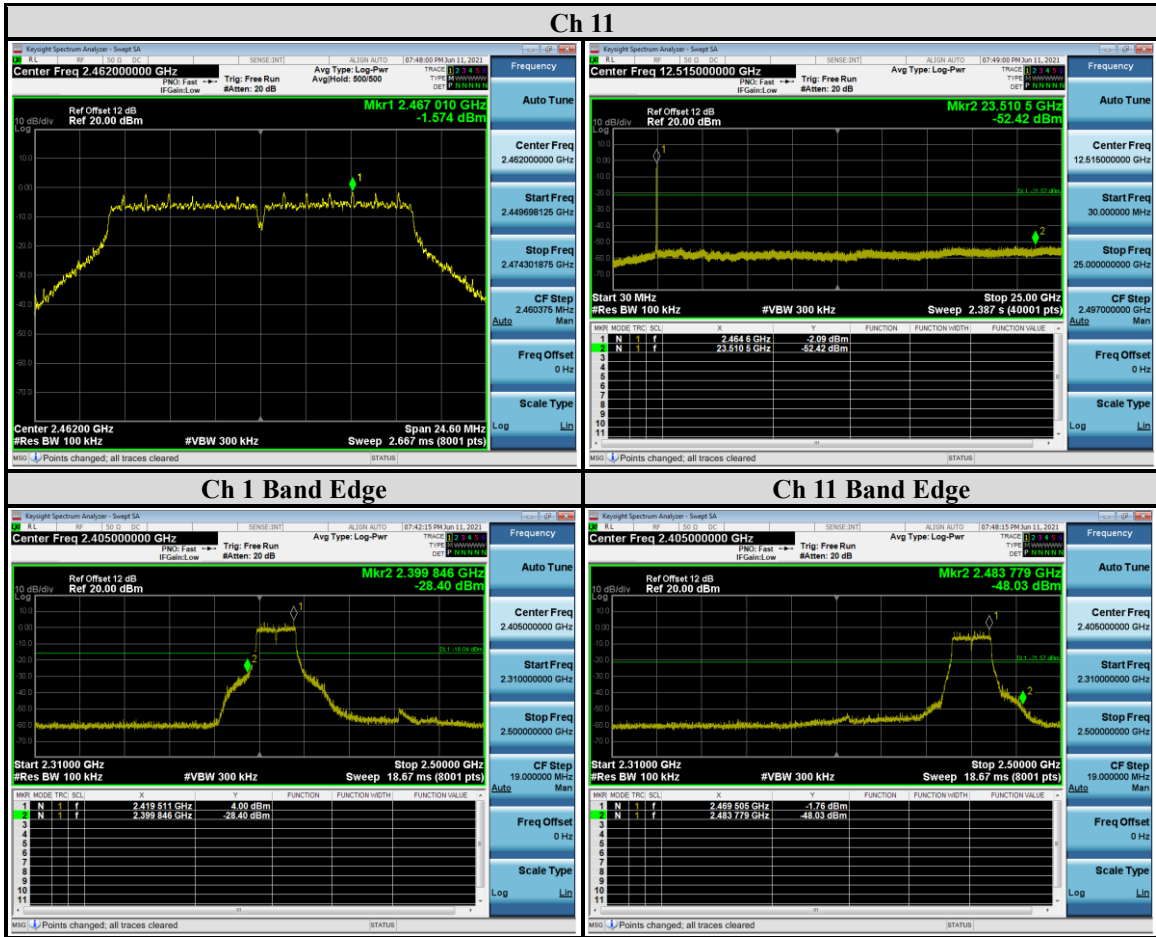

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948



802.11n (HT20)



Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948



Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948



9.5. Radiated Spurious Emission

Requirements

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

| Frequency(MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|----------------|--------------------------------------|----------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Test Procedures

[For 9 kHz ~ 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 30MHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

[For above 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Note:

- a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- b. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

| Configuration | Average | |
|----------------|---------|------|
| | RBW | VBW |
| 802.11b | 1MHz | 10Hz |
| 802.11g | | 10Hz |
| 802.11n (HT20) | | 10Hz |

Note: Refer to section 6.6 for duty cycle.

- d. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000


Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0




Test Setup

<Frequency Range 9 kHz ~ 30 MHz>

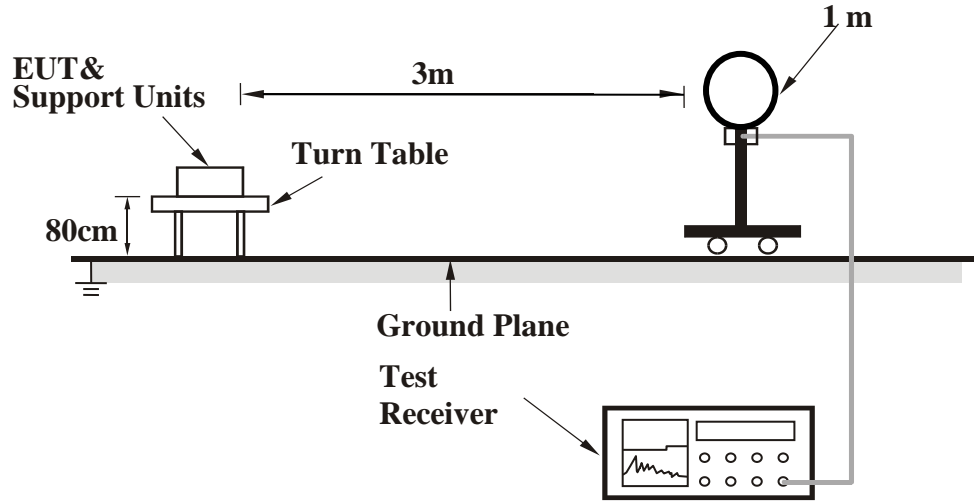

<Frequency Range 30 MHz ~ 1 GHz >

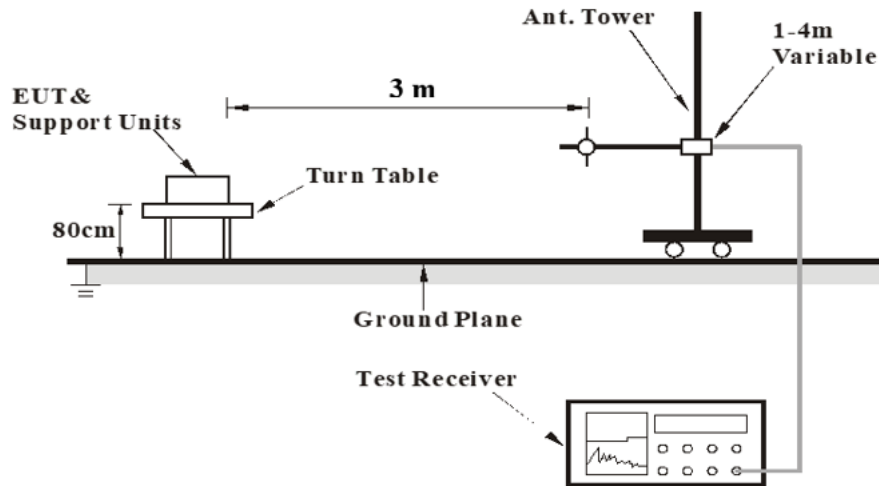

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



<Frequency Range above 1 GHz>

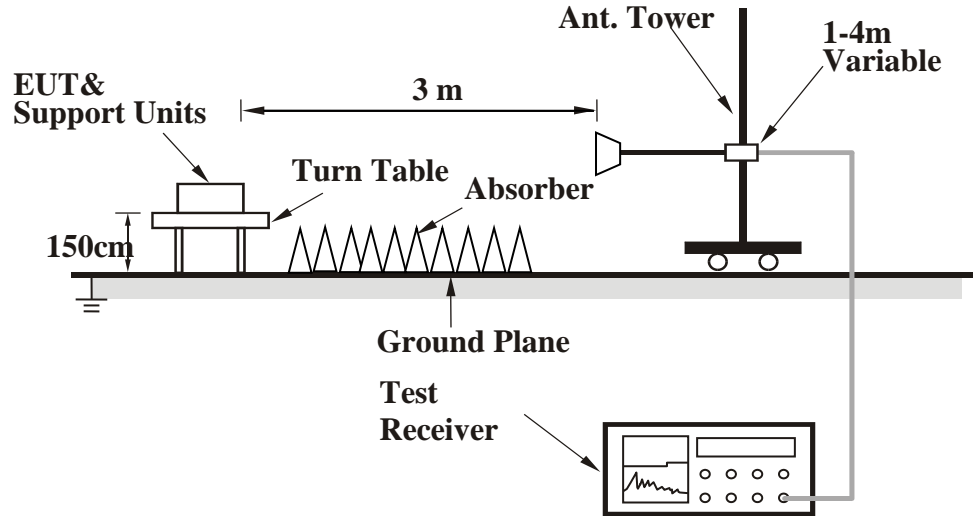

For the actual test configuration, please refer to the Setup Configurations.



Test Data

Above 1GHz Data

802.11b

| EUT Test Condition | | Measurement Detail | |
|--------------------|-----------|--------------------|------------------|
| Channel | Channel 1 | Frequency Range | 1 GHz ~ 26.5 GHz |

| Antenna Polarity & Test Distance: Horizontal at 3 m | | | | | | | |
|---|-----------|----------|---------|----------|----------|--------|---------|
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4824 | 45.28 | 2.55 | 47.83 | 74 | -26.17 | Peak |
| - | 2348.2 | 30.87 | 16.04 | 46.91 | 54 | -7.09 | Average |
| @ | 2412 | 90.42 | 16.13 | 106.55 | - | - | Average |
| - | 2326.6 | 40.7 | 16.12 | 56.82 | 74 | -17.18 | Peak |
| @ | 2412 | 94.55 | 16.13 | 110.68 | - | - | Peak |
| Antenna Polarity & Test Distance: Vertical at 3 m | | | | | | | |
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4824 | 40.48 | 2.55 | 43.03 | 74 | -30.97 | Peak |
| - | 2377 | 30.62 | 16.08 | 46.7 | 54 | -7.3 | Average |
| @ | 2412 | 86.49 | 16.13 | 102.62 | - | - | Average |
| - | 2386.8 | 41.58 | 16.1 | 57.68 | 74 | -16.32 | Peak |
| @ | 2412 | 90.95 | 16.13 | 107.08 | - | - | Peak |

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. " * ": The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



| EUT Test Condition | | Measurement Detail | |
|--------------------|-----------|--------------------|------------------|
| Channel | Channel 6 | Frequency Range | 1 GHz ~ 26.5 GHz |

| Antenna Polarity & Test Distance: Horizontal at 3 m | | | | | | | |
|---|-----------|----------|---------|----------|----------|--------|---------|
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4874 | 43.22 | 2.66 | 45.88 | 74 | -28.12 | Peak |
| - | 2386.4 | 30.85 | 16.09 | 46.94 | 54 | -7.06 | Average |
| @ | 2437 | 91.55 | 16.12 | 107.67 | - | - | Average |
| - | 2485.6 | 30.93 | 16.1 | 47.03 | 54 | -6.97 | Average |
| - | 2382 | 40.86 | 16.09 | 56.95 | 74 | -17.05 | Peak |
| @ | 2437 | 95.33 | 16.12 | 111.45 | - | - | Peak |
| - | 2494.8 | 40.67 | 16.1 | 56.77 | 74 | -17.23 | Peak |
| Antenna Polarity & Test Distance: Vertical at 3 m | | | | | | | |
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4874 | 38.06 | 2.66 | 40.72 | 74 | -33.28 | Peak |
| - | 2357.6 | 31.09 | 16.05 | 47.14 | 54 | -6.86 | Average |
| @ | 2437 | 87.21 | 16.12 | 103.33 | - | - | Average |
| - | 2488.8 | 30.92 | 16.1 | 47.02 | 54 | -6.98 | Average |
| - | 2389.6 | 41.11 | 16.1 | 57.21 | 74 | -16.79 | Peak |
| @ | 2437 | 91.33 | 16.12 | 107.45 | - | - | Peak |
| - | 2501.8 | 40.85 | 16.1 | 56.95 | 74 | -17.05 | Peak |

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "* * ": The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



| EUT Test Condition | | Measurement Detail | |
|--------------------|------------|--------------------|------------------|
| Channel | Channel 11 | Frequency Range | 1 GHz ~ 26.5 GHz |

| Antenna Polarity & Test Distance: Horizontal at 3 m | | | | | | | |
|---|-----------|----------|---------|----------|----------|--------|---------|
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4924 | 40.63 | 2.61 | 43.24 | 74 | -30.76 | Peak |
| @ | 2462 | 88.25 | 16.12 | 104.37 | - | - | Average |
| - | 2487.4 | 36.79 | 16.11 | 52.9 | 54 | -1.1 | Average |
| @ | 2462 | 91.57 | 16.12 | 107.69 | - | - | Peak |
| - | 2486.6 | 42.79 | 16.1 | 58.89 | 74 | -15.11 | Peak |
| Antenna Polarity & Test Distance: Vertical at 3 m | | | | | | | |
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4924 | 36.93 | 2.61 | 39.54 | 74 | -34.46 | Peak |
| @ | 2462 | 84.28 | 16.12 | 100.4 | - | - | Average |
| - | 2487 | 33.35 | 16.1 | 49.45 | 54 | -4.55 | Average |
| @ | 2462 | 87.06 | 16.12 | 103.18 | - | - | Peak |
| - | 2488.6 | 41.15 | 16.1 | 57.25 | 74 | -16.75 | Peak |

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "* * ": The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



802.11g

| EUT Test Condition | | Measurement Detail | |
|--------------------|-----------|--------------------|------------------|
| Channel | Channel 1 | Frequency Range | 1 GHz ~ 26.5 GHz |

| Antenna Polarity & Test Distance: Horizontal at 3 m | | | | | | | |
|---|-----------|----------|---------|----------|----------|--------|---------|
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4824 | 41.26 | 2.55 | 43.81 | 74 | -30.19 | Peak |
| - | 2390 | 35.46 | 16.1 | 51.56 | 54 | -2.44 | Average |
| @ | 2412 | 83.67 | 16.13 | 99.8 | - | - | Average |
| - | 2389.8 | 42.96 | 16.1 | 59.06 | 74 | -14.94 | Peak |
| @ | 2412 | 90.68 | 16.13 | 106.81 | - | - | Peak |
| Antenna Polarity & Test Distance: Vertical at 3 m | | | | | | | |
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4824 | 37.31 | 2.55 | 39.86 | 74 | -34.14 | Peak |
| - | 2390 | 32.61 | 16.1 | 48.71 | 54 | -5.29 | Average |
| @ | 2412 | 79.38 | 16.13 | 95.51 | - | - | Average |
| - | 2389.8 | 43.73 | 16.1 | 59.83 | 74 | -14.17 | Peak |
| @ | 2412 | 87.43 | 16.13 | 103.56 | - | - | Peak |

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. " * ": The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



| EUT Test Condition | | Measurement Detail | |
|--------------------|-----------|--------------------|------------------|
| Channel | Channel 6 | Frequency Range | 1 GHz ~ 26.5 GHz |

| Antenna Polarity & Test Distance: Horizontal at 3 m | | | | | | | |
|---|-----------|----------|---------|----------|----------|--------|---------|
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4874 | 42.29 | 2.66 | 44.95 | 74 | -29.05 | Peak |
| - | 2390 | 30.86 | 16.1 | 46.96 | 54 | -7.04 | Average |
| @ | 2437 | 88.31 | 16.12 | 104.43 | - | - | Average |
| - | 2489 | 33.13 | 16.1 | 49.23 | 54 | -4.77 | Average |
| - | 2333.4 | 42.04 | 16.1 | 58.14 | 74 | -15.86 | Peak |
| @ | 2437 | 95.44 | 16.12 | 111.56 | - | - | Peak |
| - | 2503.6 | 41.34 | 16.1 | 57.44 | 74 | -16.56 | Peak |
| Antenna Polarity & Test Distance: Vertical at 3 m | | | | | | | |
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4874 | 38.5 | 2.66 | 41.16 | 74 | -32.84 | Peak |
| - | 2363 | 30.68 | 16.06 | 46.74 | 54 | -7.26 | Average |
| @ | 2437 | 84.1 | 16.12 | 100.22 | - | - | Average |
| - | 2489 | 30.99 | 16.1 | 47.09 | 54 | -6.91 | Average |
| - | 2381.6 | 41.03 | 16.09 | 57.12 | 74 | -16.88 | Peak |
| @ | 2437 | 92.36 | 16.12 | 108.48 | - | - | Peak |
| - | 2509.2 | 40.93 | 16.1 | 57.03 | 74 | -16.97 | Peak |

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "* * ": The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



| EUT Test Condition | | Measurement Detail | |
|--------------------|------------|--------------------|------------------|
| Channel | Channel 11 | Frequency Range | 1 GHz ~ 26.5 GHz |

| Antenna Polarity & Test Distance: Horizontal at 3 m | | | | | | | |
|---|-----------|----------|---------|----------|----------|--------|---------|
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4924 | 40.66 | 2.61 | 43.27 | 74 | -30.73 | Peak |
| @ | 2462 | 77.78 | 16.12 | 93.9 | - | - | Average |
| - | 2483.6 | 34.5 | 16.1 | 50.6 | 54 | -3.4 | Average |
| @ | 2462 | 85.23 | 16.12 | 101.35 | - | - | Peak |
| - | 2484.4 | 43.8 | 16.1 | 59.9 | 74 | -14.1 | Peak |
| Antenna Polarity & Test Distance: Vertical at 3 m | | | | | | | |
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4924 | 37.38 | 2.61 | 39.99 | 74 | -34.01 | Peak |
| @ | 2462 | 72.66 | 16.12 | 88.78 | - | - | Average |
| - | 2484 | 31.44 | 16.1 | 47.54 | 54 | -6.46 | Average |
| @ | 2462 | 80.62 | 16.12 | 96.74 | - | - | Peak |
| - | 2483.6 | 40.57 | 16.1 | 56.67 | 74 | -17.33 | Peak |

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "* * ": The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



802.11n (HT20)

| EUT Test Condition | | Measurement Detail | |
|--------------------|-----------|--------------------|------------------|
| Channel | Channel 1 | Frequency Range | 1 GHz ~ 26.5 GHz |

| Antenna Polarity & Test Distance: Horizontal at 3 m | | | | | | | |
|---|-----------|----------|---------|----------|----------|--------|---------|
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4824 | 42.15 | 2.55 | 44.7 | 74 | -29.3 | Peak |
| - | 2389.8 | 34.71 | 16.1 | 50.81 | 54 | -3.19 | Average |
| @ | 2412 | 82.69 | 16.13 | 98.82 | - | - | Average |
| - | 2390 | 44.54 | 16.1 | 60.64 | 74 | -13.36 | Peak |
| @ | 2412 | 91.26 | 16.13 | 107.39 | - | - | Peak |
| Antenna Polarity & Test Distance: Vertical at 3 m | | | | | | | |
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4824 | 38.24 | 2.55 | 40.79 | 74 | -33.21 | Peak |
| - | 2390 | 32.68 | 16.1 | 48.78 | 54 | -5.22 | Average |
| @ | 2412 | 78.93 | 16.13 | 95.06 | - | - | Average |
| - | 2390 | 43.82 | 16.1 | 59.92 | 74 | -14.08 | Peak |
| @ | 2412 | 86.18 | 16.13 | 102.31 | - | - | Peak |

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "* * ": The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone :+886-2-7737-3000
Facsimile (FAX) :+886-3-583-7948



| EUT Test Condition | | Measurement Detail | |
|--------------------|-----------|--------------------|------------------|
| Channel | Channel 6 | Frequency Range | 1 GHz ~ 26.5 GHz |

| Antenna Polarity & Test Distance: Horizontal at 3 m | | | | | | | |
|---|-----------|----------|---------|----------|----------|--------|---------|
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4874 | 39.16 | 2.66 | 41.82 | 74 | -32.18 | Peak |
| - | 2389.8 | 31.17 | 16.1 | 47.27 | 54 | -6.73 | Average |
| @ | 2437 | 88.02 | 16.12 | 104.14 | - | - | Average |
| - | 2489 | 34.08 | 16.1 | 50.18 | 54 | -3.82 | Average |
| - | 2377 | 40.89 | 16.08 | 56.97 | 74 | -17.03 | Peak |
| @ | 2437 | 95.64 | 16.12 | 111.76 | - | - | Peak |
| - | 2485.6 | 42.11 | 16.1 | 58.21 | 74 | -15.79 | Peak |
| Antenna Polarity & Test Distance: Vertical at 3 m | | | | | | | |
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4874 | 37.22 | 2.66 | 39.88 | 74 | -34.12 | Peak |
| - | 2389.8 | 30.72 | 16.1 | 46.82 | 54 | -7.18 | Average |
| @ | 2437 | 84.16 | 16.12 | 100.28 | - | - | Average |
| - | 2488.8 | 31.83 | 16.1 | 47.93 | 54 | -6.07 | Average |
| - | 2372 | 41.13 | 16.08 | 57.21 | 74 | -16.79 | Peak |
| @ | 2437 | 92.22 | 16.12 | 108.34 | - | - | Peak |
| - | 2483.8 | 41.33 | 16.1 | 57.43 | 74 | -16.57 | Peak |

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "*": The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



| EUT Test Condition | | Measurement Detail | |
|--------------------|------------|--------------------|------------------|
| Channel | Channel 11 | Frequency Range | 1 GHz ~ 26.5 GHz |

| Antenna Polarity & Test Distance: Horizontal at 3 m | | | | | | | |
|---|-----------|----------|---------|----------|----------|--------|---------|
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4924 | 39.68 | 2.61 | 42.29 | 74 | -31.71 | Peak |
| @ | 2462 | 77.69 | 16.12 | 93.81 | - | - | Average |
| - | 2483.6 | 36.36 | 16.1 | 52.46 | 54 | -1.54 | Average |
| @ | 2462 | 85.64 | 16.12 | 101.76 | - | - | Peak |
| - | 2484.4 | 45.56 | 16.1 | 61.66 | 74 | -12.34 | Peak |
| Antenna Polarity & Test Distance: Vertical at 3 m | | | | | | | |
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| * | 4924 | 36.45 | 2.61 | 39.06 | 74 | -34.94 | Peak |
| @ | 2462 | 74.23 | 16.12 | 90.35 | - | - | Average |
| - | 2483.6 | 32.78 | 16.1 | 48.88 | 54 | -5.12 | Average |
| @ | 2462 | 81.84 | 16.12 | 97.96 | - | - | Peak |
| - | 2485 | 42.28 | 16.1 | 58.38 | 74 | -15.62 | Peak |

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. "@": Fundamental Frequency.
5. "* * ": The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.
6. The other emission levels were very low against the limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



9 kHz ~ 30 MHz Data:

For 9 kHz to 30 MHz radiated emission have performed all modes of operation were investigated. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

No non-compliance noted:

KDB 414788 D01 OATS and Chamber Correlation Justification

- Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

- OATs and chamber correlation testing had been performed and chamber measured test results is the worst case test result.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948




30 MHz ~ 1 GHz Data


802.11b

| EUT Test Condition | | Measurement Detail | |
|--------------------|-----------|--------------------|----------------|
| Channel | Channel 1 | Frequency Range | 30 MHz ~ 1 GHz |

Horizontal

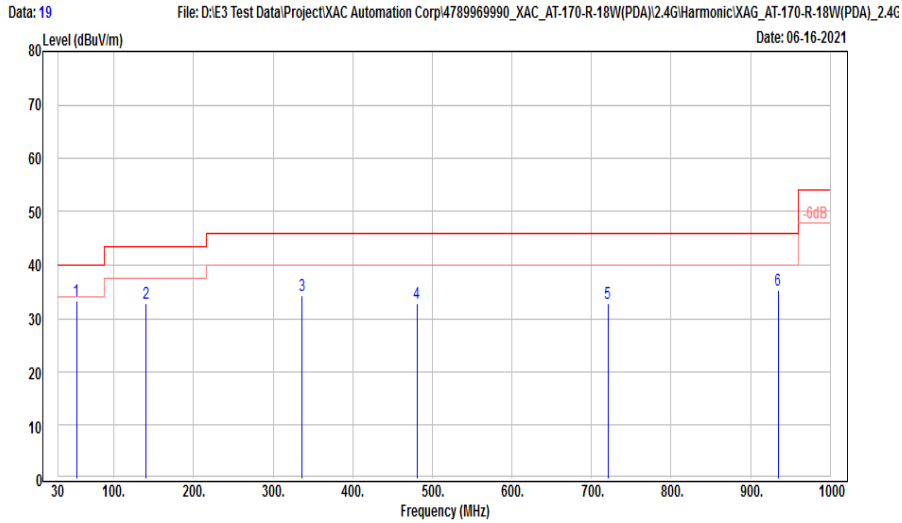

Vertical

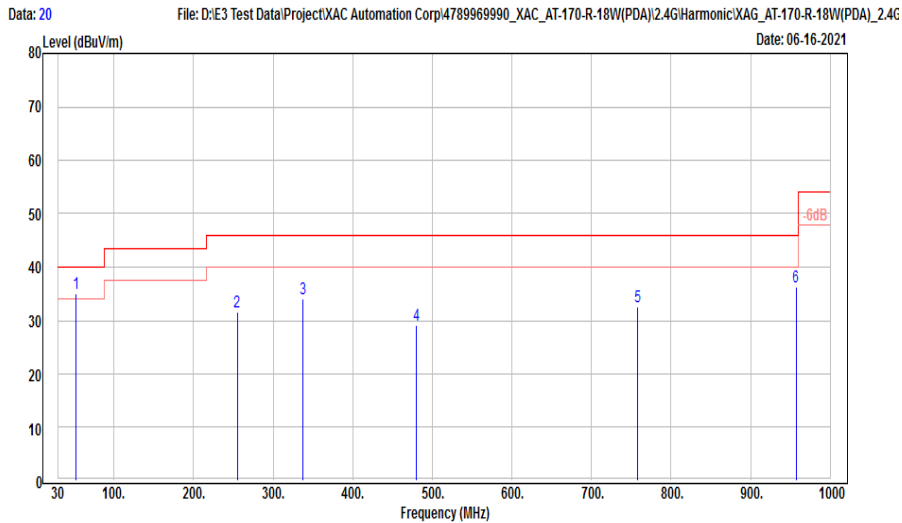

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948



| Antenna Polarity & Test Distance: Horizontal at 3 m | | | | | | | |
|---|-----------|----------|---------|----------|----------|--------|--------|
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| - | 53.28 | 44.38 | -11.11 | 33.27 | 40 | -6.73 | Peak |
| - | 140.58 | 44.98 | -12.07 | 32.91 | 43.5 | -10.59 | Peak |
| - | 336.52 | 42.97 | -8.77 | 34.2 | 46 | -11.8 | Peak |
| - | 481.05 | 37.98 | -5.13 | 32.85 | 46 | -13.15 | Peak |
| - | 720.64 | 32.73 | 0.14 | 32.87 | 46 | -13.13 | Peak |
| - | 935.01 | 31.76 | 3.52 | 35.28 | 46 | -10.72 | Peak |
| Antenna Polarity & Test Distance: Vertical at 3 m | | | | | | | |
| Notation | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
| | (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | |
| - | 52.31 | 46.15 | -11.2 | 34.95 | 40 | -5.05 | Peak |
| - | 255.04 | 43.2 | -11.6 | 31.6 | 46 | -14.4 | Peak |
| - | 337.49 | 42.85 | -8.77 | 34.08 | 46 | -11.92 | Peak |
| - | 480.08 | 34.42 | -5.18 | 29.24 | 46 | -16.76 | Peak |
| - | 758.47 | 31.89 | 0.69 | 32.58 | 46 | -13.42 | Peak |
| - | 957.32 | 32.31 | 3.86 | 36.17 | 46 | -9.83 | Peak |

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. The peak result complies with QP limit, QP result is deemed to comply with QP limit.
5. The other emission levels were very low against the limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



9.6. AC Power Line Conducted Emission

Requirements

| Frequency (MHz) | Conducted limit (dB μ V) | |
|-----------------|------------------------------|---------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30 | 60 | 50 |

Note:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Test Setup

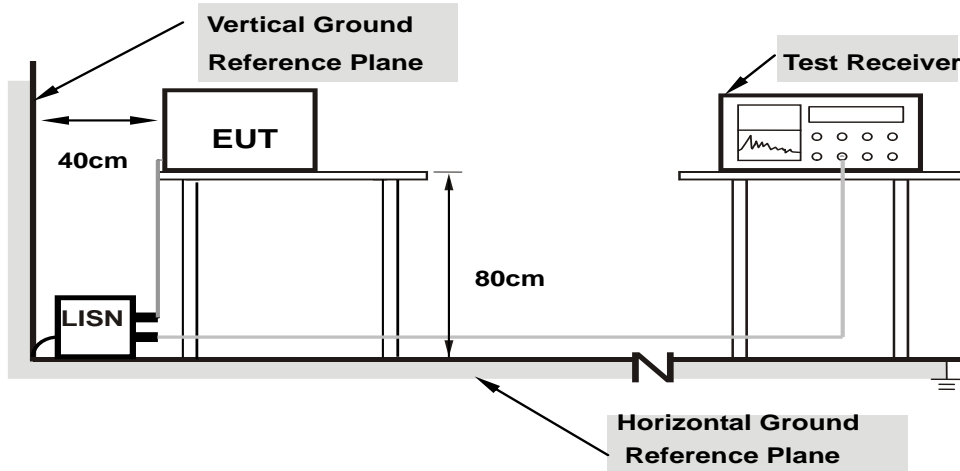

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the Setup Configurations.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0




Test Data

802.11b

| EUT Test Condition | | Measurement Detail | |
|--------------------|-----------|--------------------|------------------|
| Channel | Channel 1 | Frequency Range | 150 kHz ~ 30 MHz |

Phase of Power : Line (L)

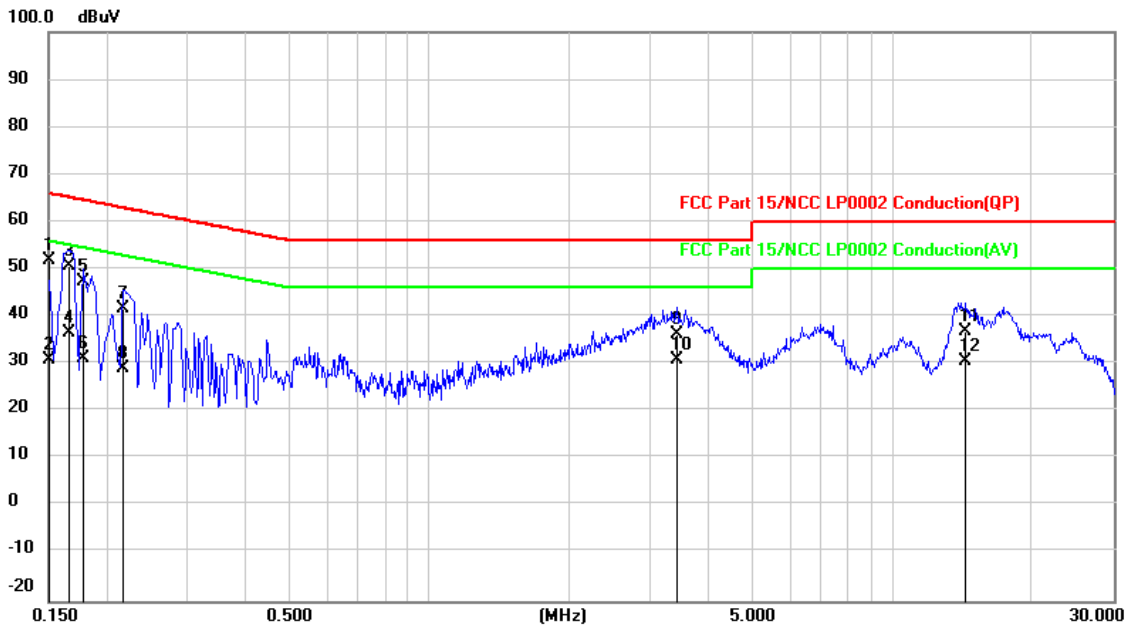

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



| No. | Frequency | Reading | Correct | Result | Limit | Margin | Remark |
|-----|-----------|---------|---------|--------|--------|--------|--------|
| | (MHz) | (dBuV) | dB | (dBuV) | (dBuV) | (dB) | |
| 1 | 0.1500 | 32.48 | 19.50 | 51.98 | 66.00 | -14.02 | QP |
| 2 | 0.1500 | 11.45 | 19.50 | 30.95 | 56.00 | -25.05 | AVG |
| 3 | 0.1660 | 31.23 | 19.50 | 50.73 | 65.16 | -14.43 | QP |
| 4 | 0.1660 | 17.07 | 19.50 | 36.57 | 55.16 | -18.59 | AVG |
| 5 | 0.1780 | 27.75 | 19.49 | 47.24 | 64.58 | -17.34 | QP |
| 6 | 0.1780 | 11.70 | 19.49 | 31.19 | 54.58 | -23.39 | AVG |
| 7 | 0.2180 | 22.30 | 19.49 | 41.79 | 62.89 | -21.10 | QP |
| 8 | 0.2180 | 9.58 | 19.49 | 29.07 | 52.89 | -23.82 | AVG |
| 9 | 3.4300 | 16.55 | 19.56 | 36.11 | 56.00 | -19.89 | QP |
| 10 | 3.4300 | 11.35 | 19.56 | 30.91 | 46.00 | -15.09 | AVG |
| 11 | 14.3780 | 17.17 | 19.73 | 36.90 | 60.00 | -23.10 | QP |
| 12 | 14.3780 | 10.85 | 19.73 | 30.58 | 50.00 | -19.42 | AVG |

Remarks:

1. Result value (dBuV) = Reading value (dBuV) + Correction Factor (dB)
2. Margin(dB) = Result value (dBuV) - Limit value (dBuV)
3. Correction Factor(dB) = Insertion loss(dB) + Cable loss(dB)
4. The other emission levels were very low against the limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Phase of Power : Neutral (N)

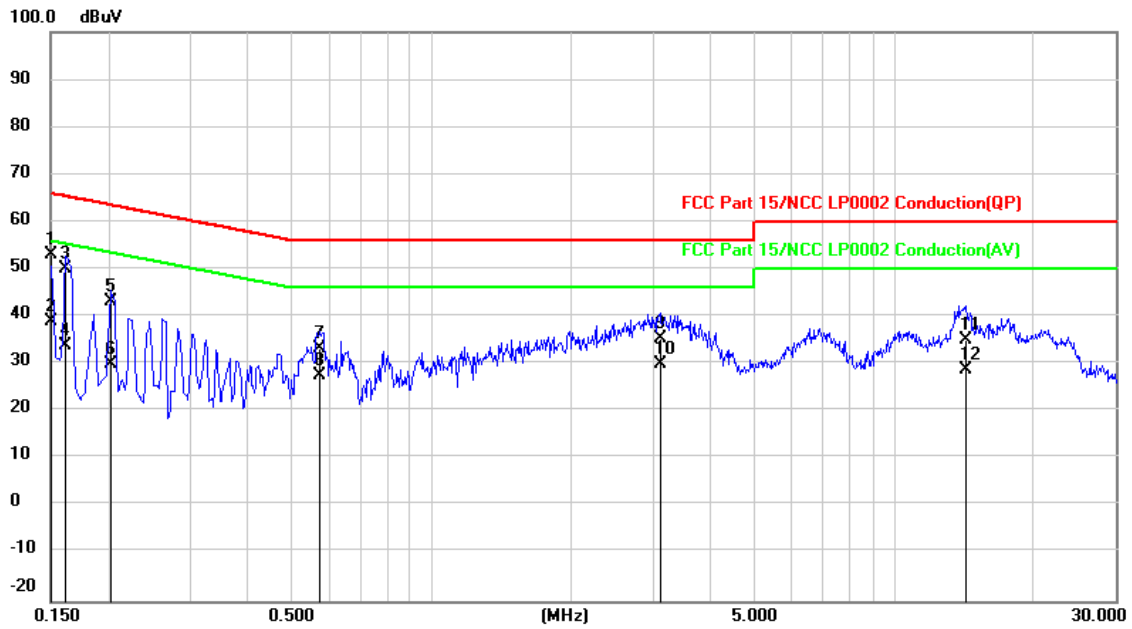

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Test report No. : 4789969990-US-R0-V0
Page : 55 of 64
Issued date : 2021/7/30
FCC ID : MQT-AT170R18W

| No. | Frequency (MHz) | Reading (dBuV) | Correct dB | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|---------------|------------------|-----------------|----------------|--------|
| 1 | 0.1500 | 33.54 | 19.50 | 53.04 | 66.00 | -12.96 | QP |
| 2 | 0.1500 | 19.57 | 19.50 | 39.07 | 56.00 | -16.93 | AVG |
| 3 | 0.1620 | 30.41 | 19.50 | 49.91 | 65.36 | -15.45 | QP |
| 4 | 0.1620 | 14.49 | 19.50 | 33.99 | 55.36 | -21.37 | AVG |
| 5 | 0.2020 | 23.53 | 19.49 | 43.02 | 63.53 | -20.51 | QP |
| 6 | 0.2020 | 10.49 | 19.49 | 29.98 | 53.53 | -23.55 | AVG |
| 7 | 0.5740 | 13.78 | 19.49 | 33.27 | 56.00 | -22.73 | QP |
| 8 | 0.5740 | 8.04 | 19.49 | 27.53 | 46.00 | -18.47 | AVG |
| 9 | 3.1220 | 15.81 | 19.55 | 35.36 | 56.00 | -20.64 | QP |
| 10 | 3.1220 | 10.44 | 19.55 | 29.99 | 46.00 | -16.01 | AVG |
| 11 | 14.2860 | 15.14 | 19.77 | 34.91 | 60.00 | -25.09 | QP |
| 12 | 14.2860 | 9.10 | 19.77 | 28.87 | 50.00 | -21.13 | AVG |

Remarks:

1. Result value (dBuV) = Reading value (dBuV) + Correction Factor (dB)
2. Margin(dB) = Result value (dBuV) - Limit value (dBuV)
3. Correction Factor(dB) = Insertion loss(dB) + Cable loss(dB)
4. The other emission levels were very low against the limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948


Doc No: 17-EM-F0876 / 6.0



Appendix I Radiated Band Edge Measurement

802.11b

Peak

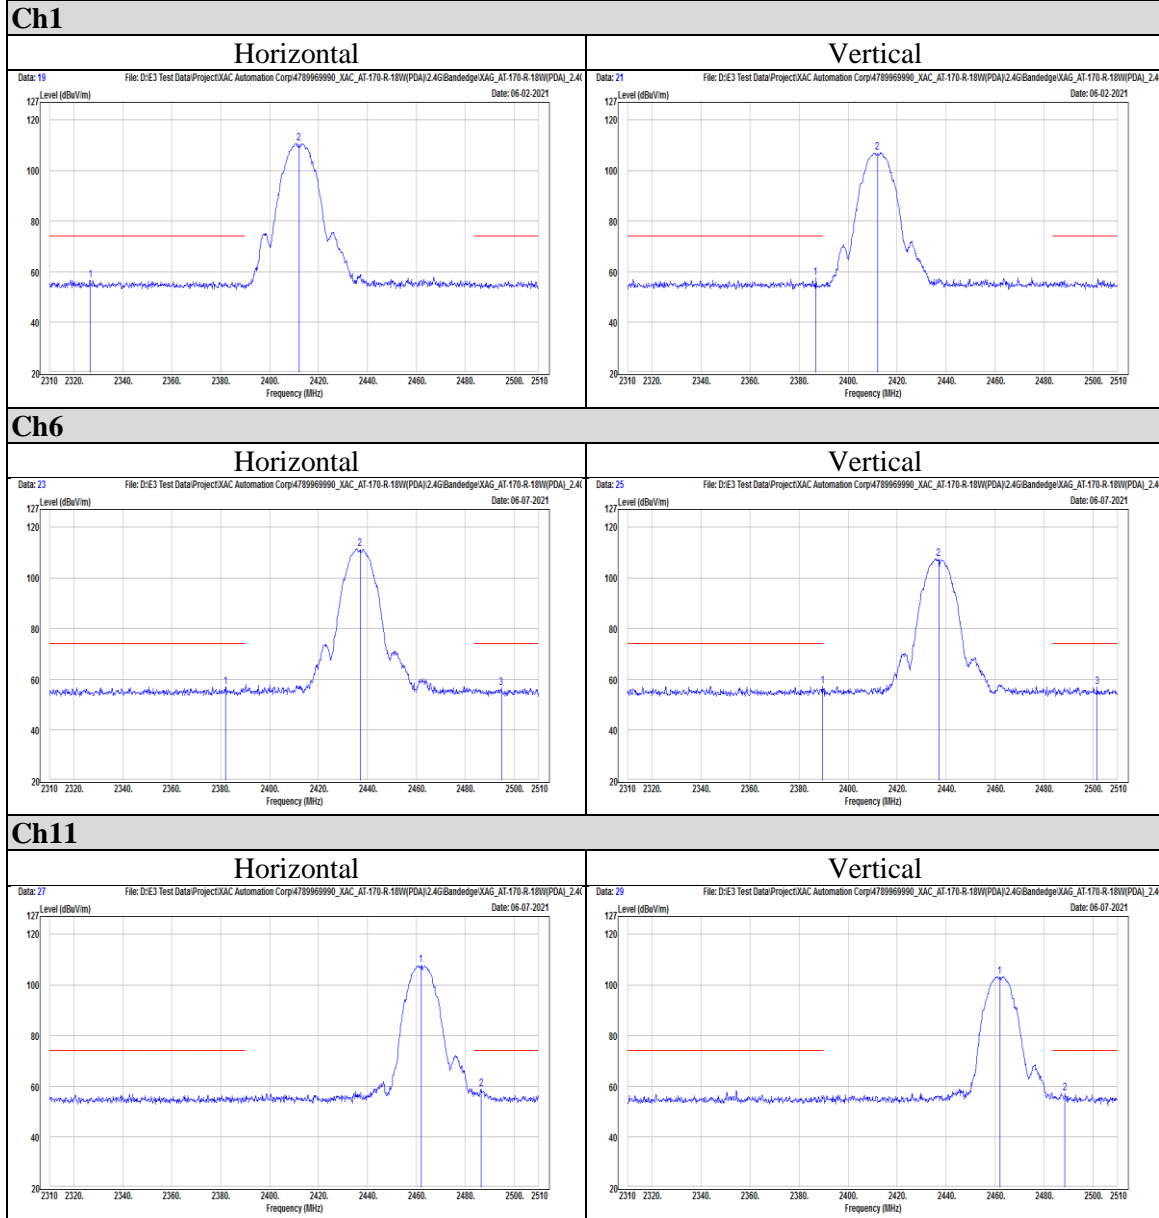

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Average

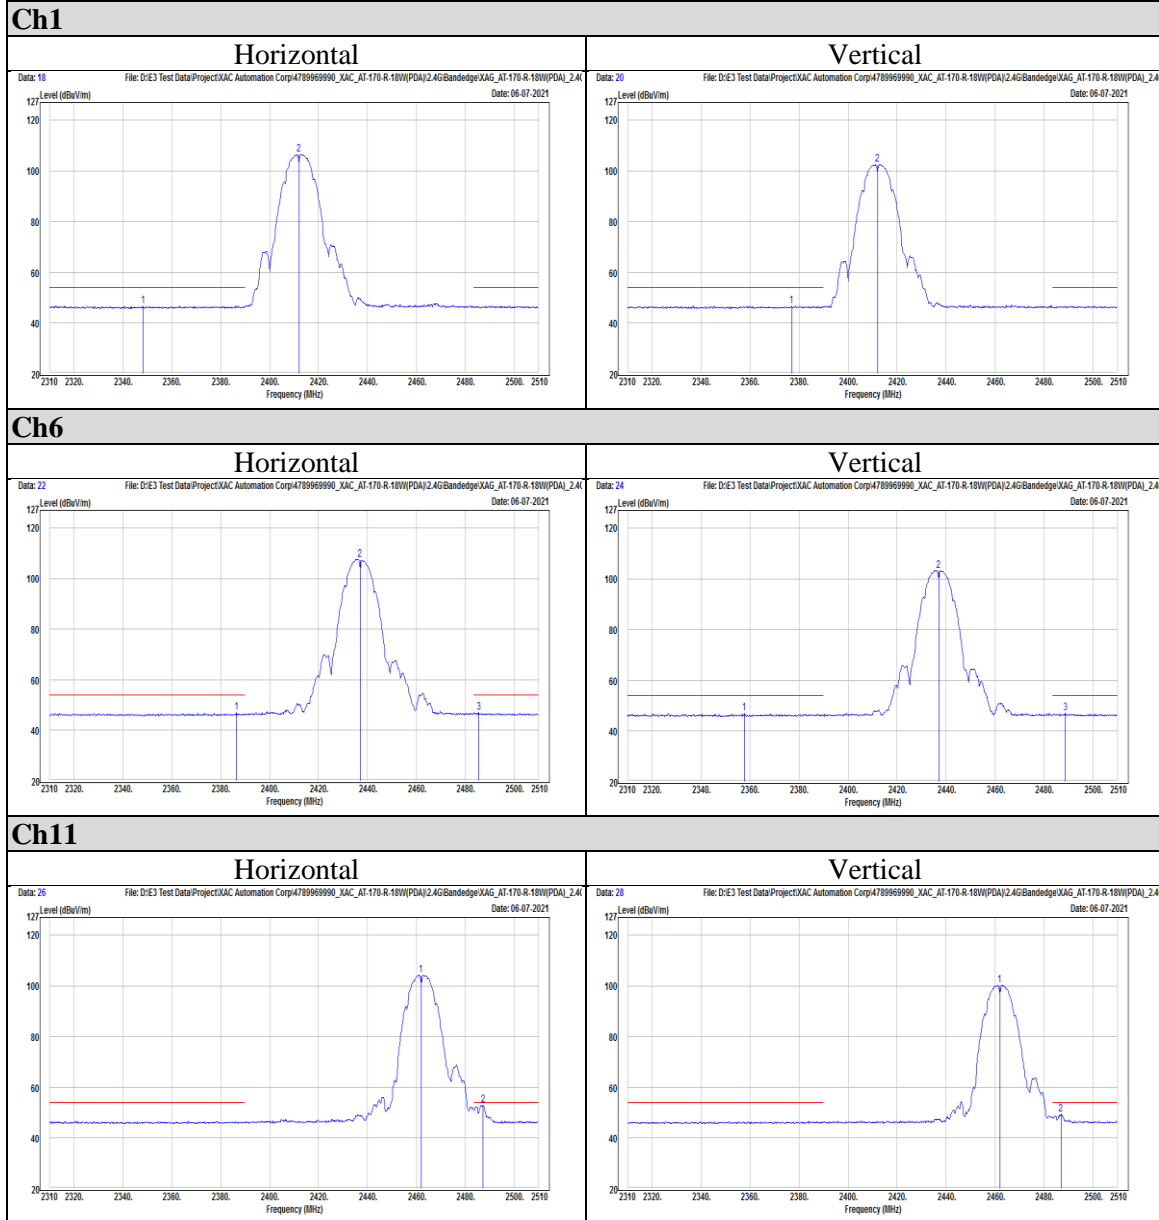

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000


Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



802.11g

Peak

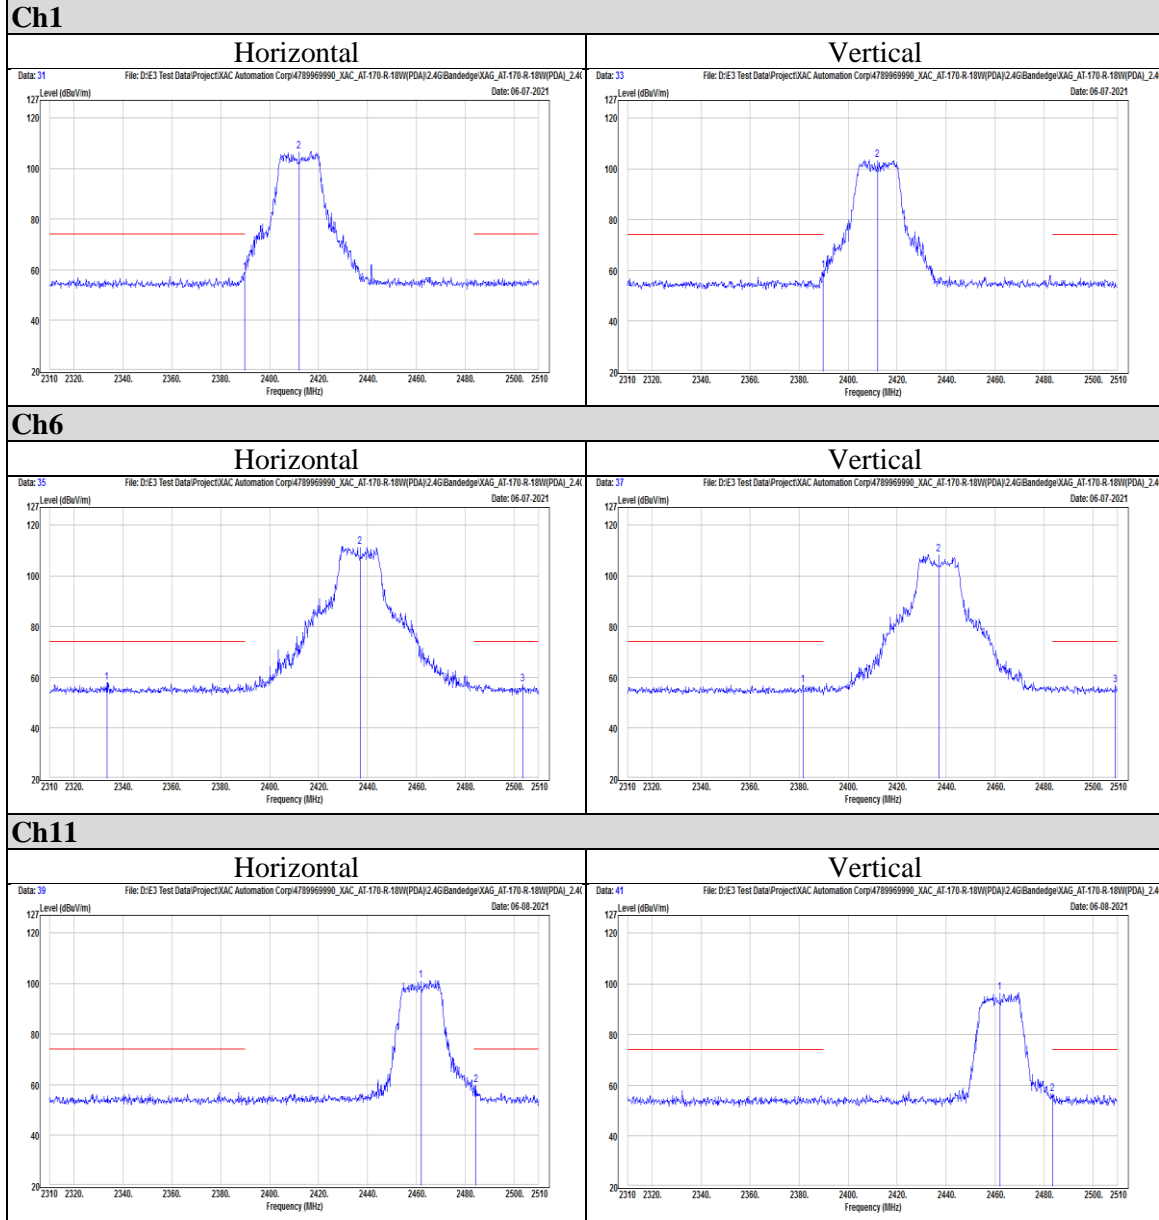

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Average

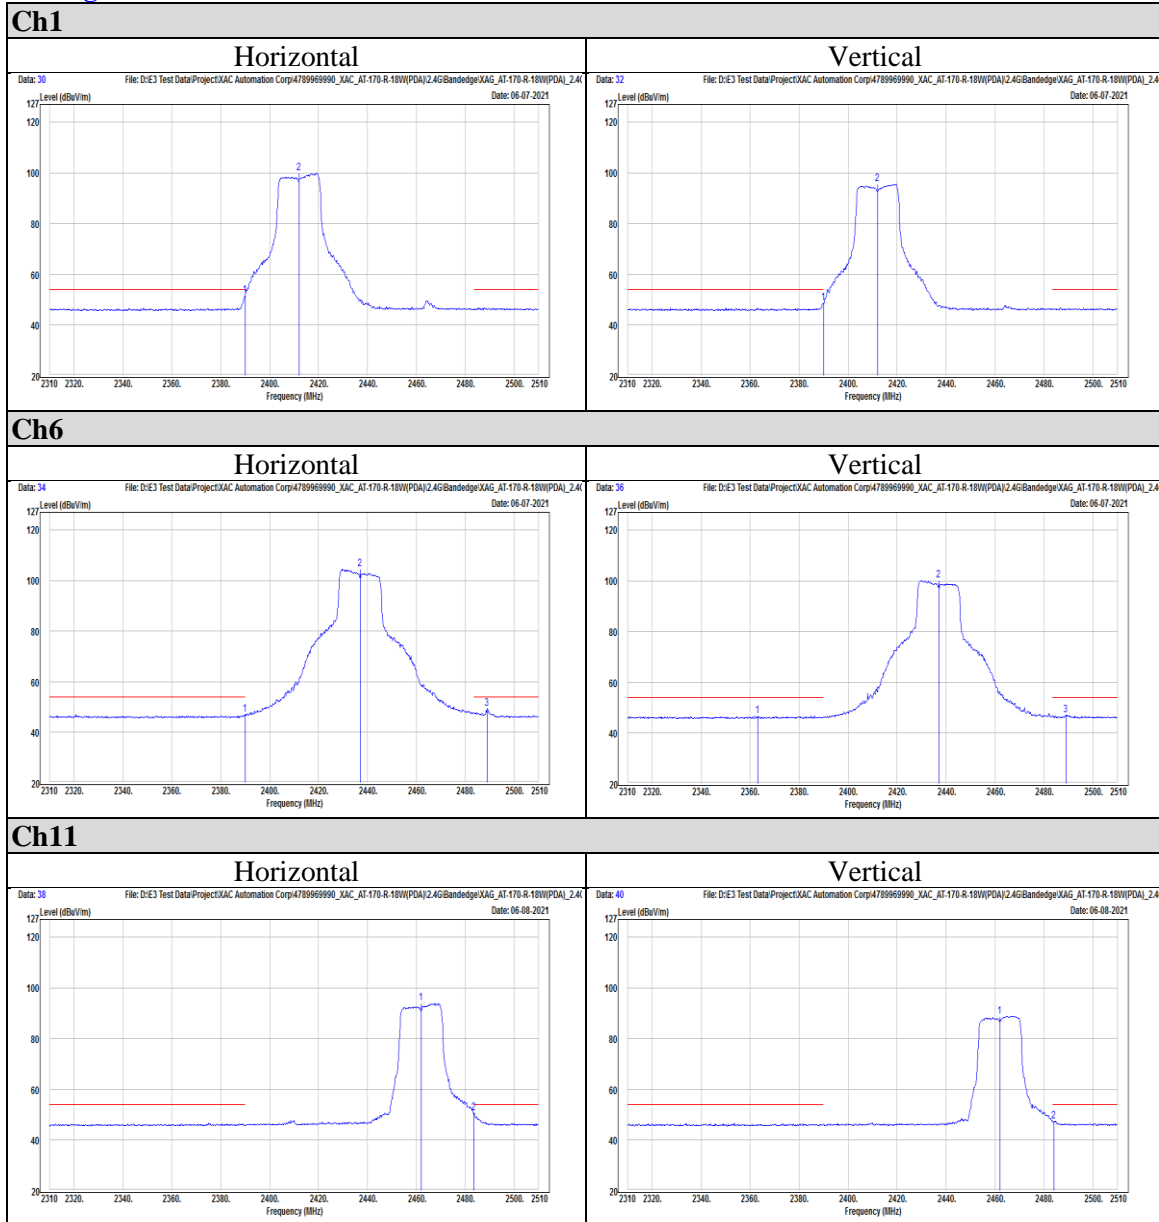

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000


Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



802.11n (HT20)

Peak

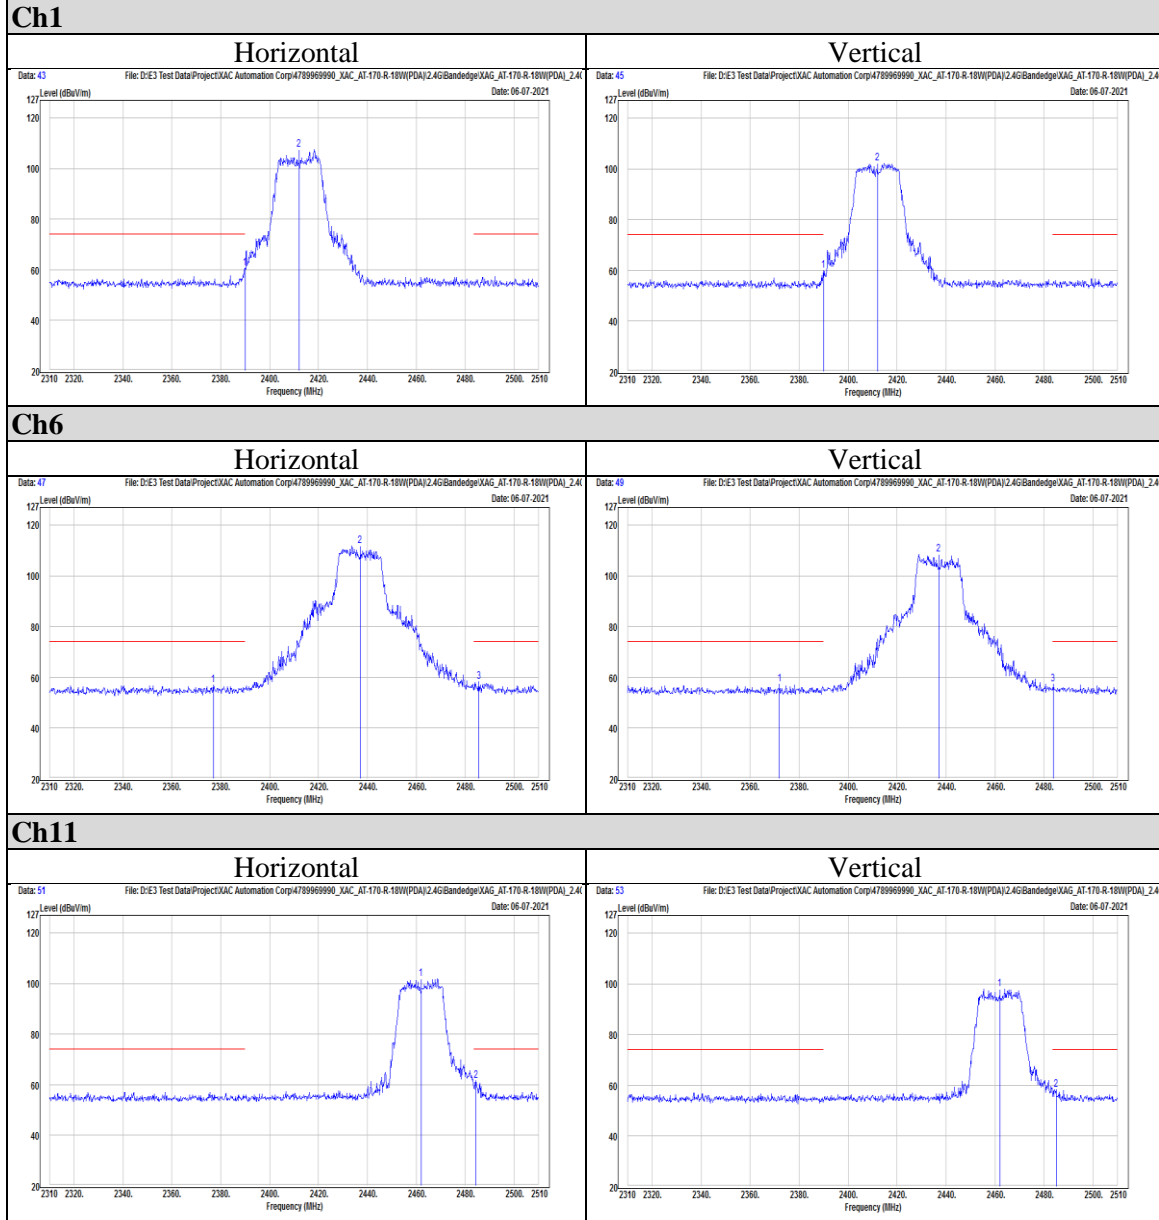

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



Average

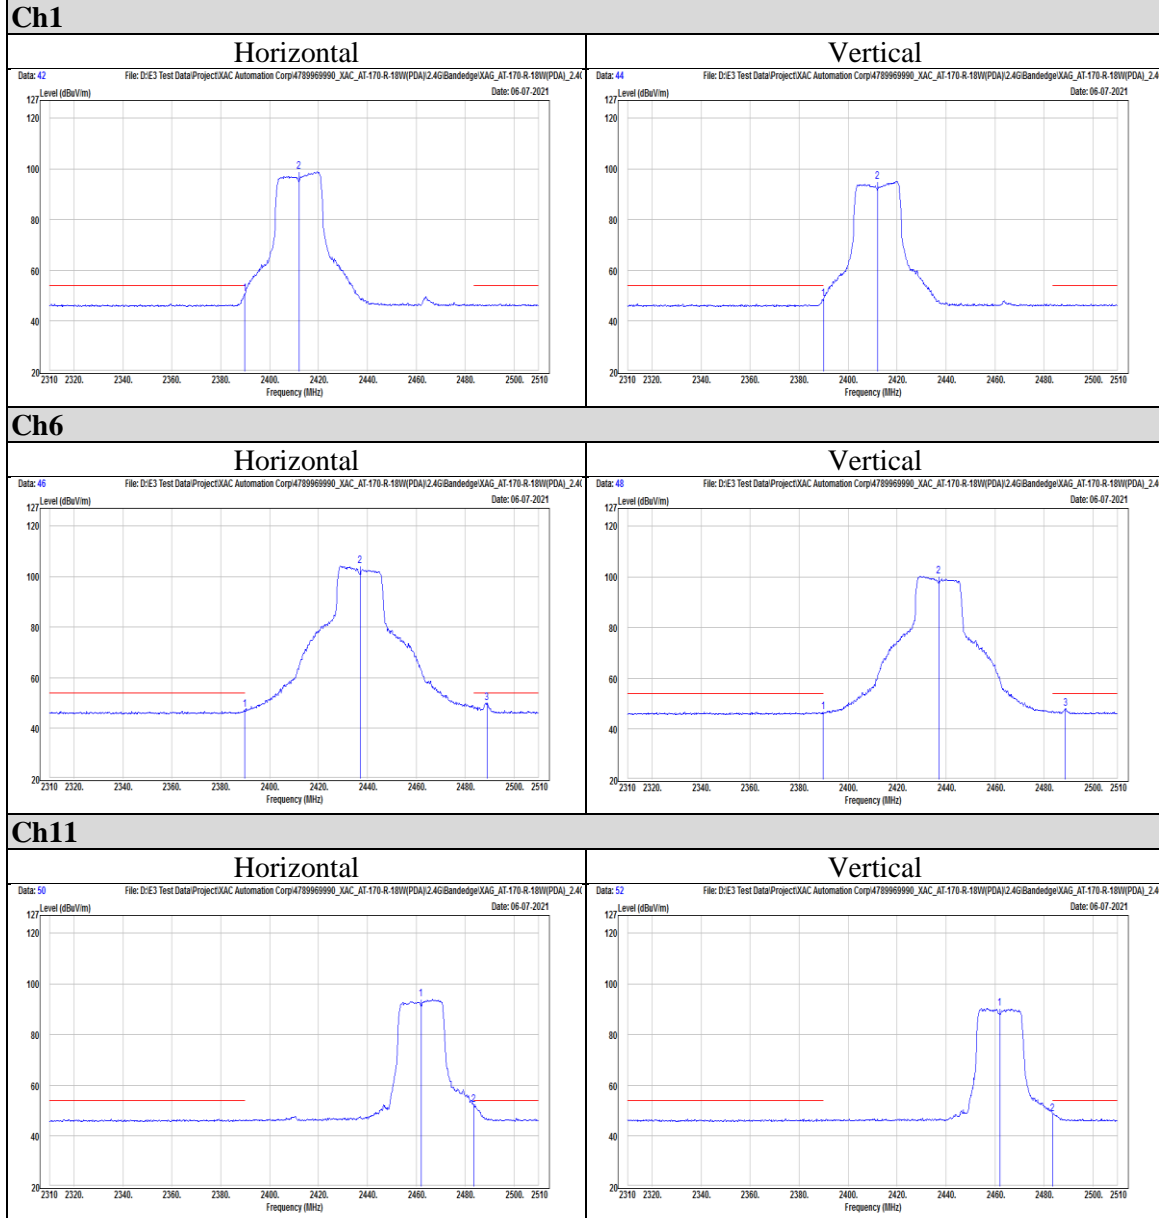

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000


Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0876 / 6.0




Appendix II Radiated Spurious Emission Measurement

802.11b

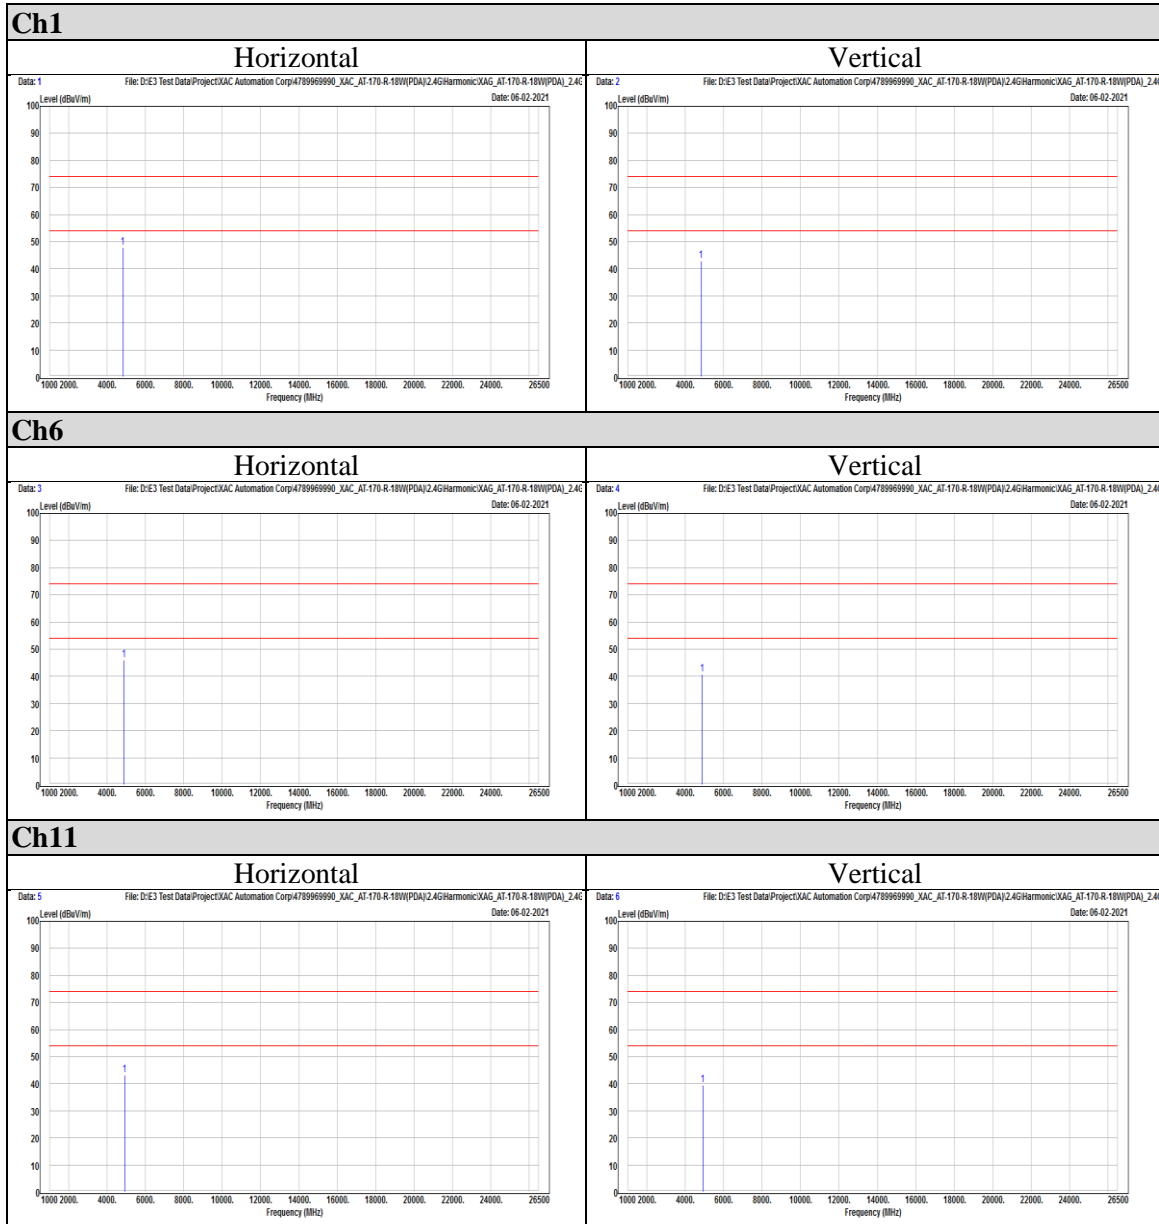



802.11g

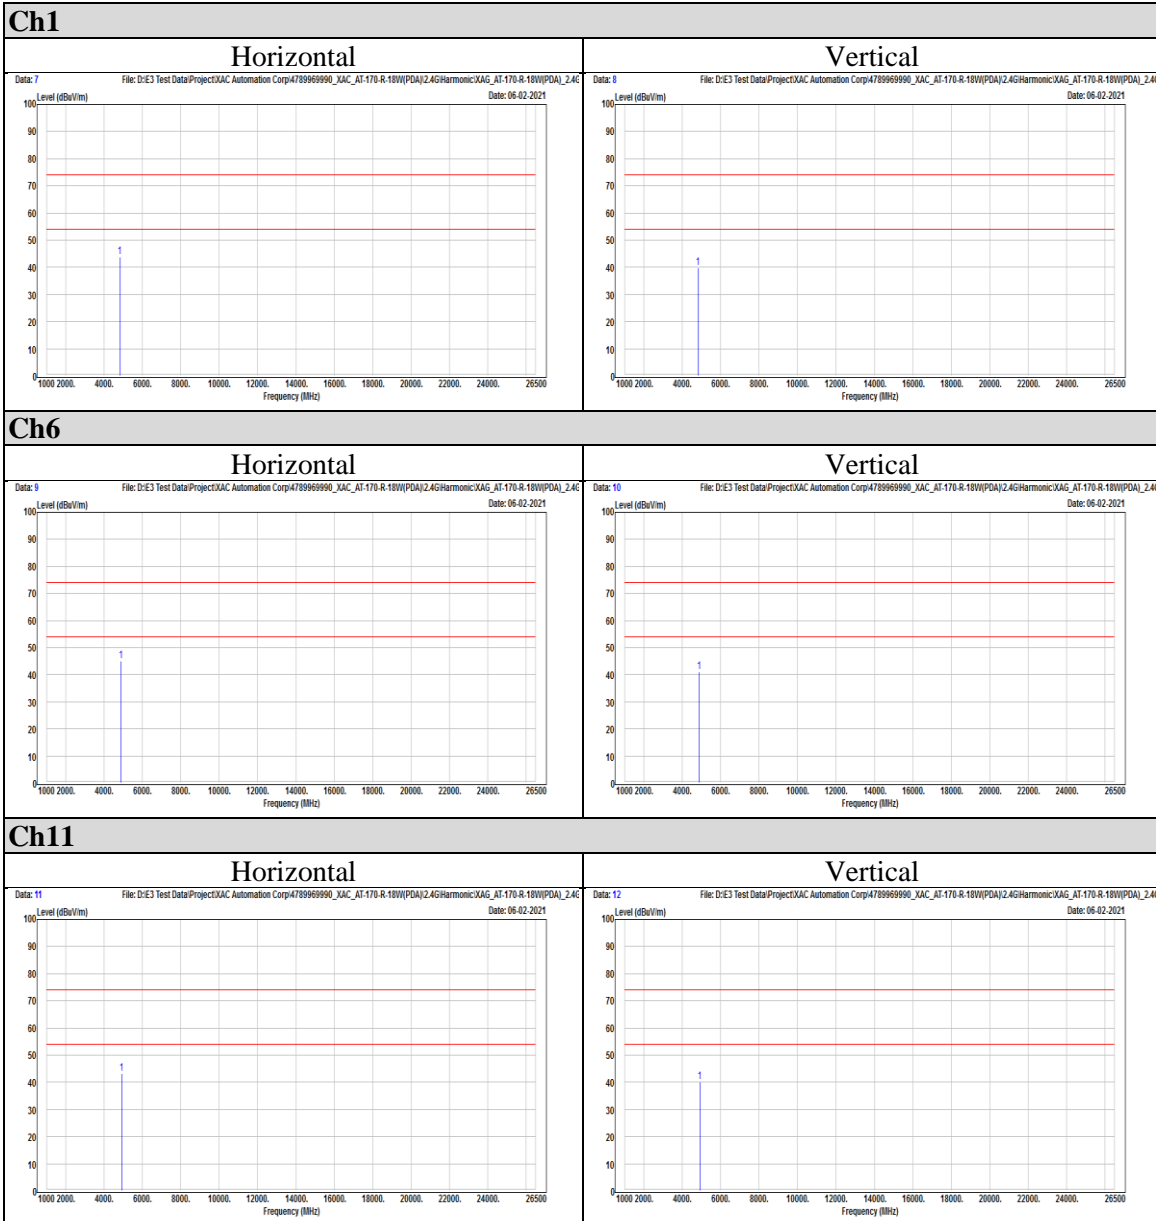

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0



802.11n (HT20)

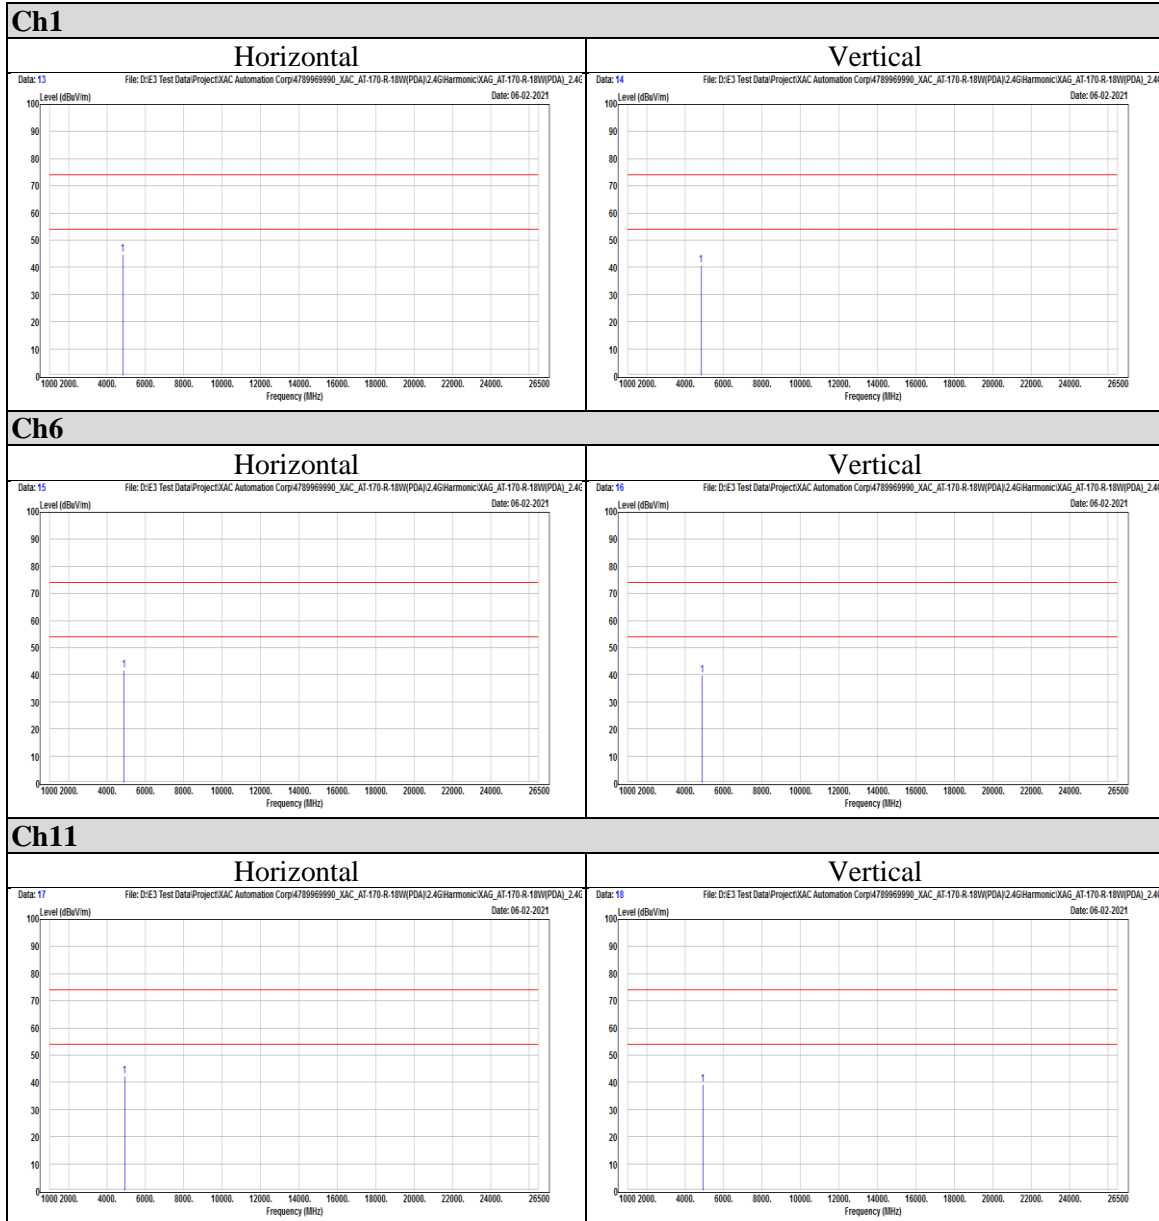

END OF REPORT

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0876 / 6.0