

## FCC Test Report (WLAN)

**Report No.:** RF170906E02

**FCC ID:** MQT-XC50

**Test Model:** XC50

**Received Date:** Sep. 06, 2017

**Test Date:** Sep. 21 to Oct. 24, 2017

**Issued Date:** Sep. 29, 2017

**Applicant:** XAC AUTOMATION CORP.

**Address:** 4F, No. 30, INDUSTRY E. RD. IX, SCIENCE-BASED INDUSTRIAL  
PARK,HSINCHU,TAIWAN

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Modification Record .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes .....	8
3.2.1 Test Mode Applicability and Tested Channel Detail .....	9
3.3 Duty Cycle of Test Signal .....	11
3.4 Description of Support Units .....	12
3.4.1 Configuration of System under Test .....	13
3.5 General Description of Applied Standards .....	14
<b>4 Test Types and Results</b> .....	<b>15</b>
4.1 Radiated Emission and Bandedge Measurement .....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	15
4.1.2 Test Instruments .....	16
4.1.3 Test Procedures .....	18
4.1.4 Deviation from Test Standard .....	18
4.1.5 Test Setup .....	19
4.1.6 EUT Operating Conditions .....	20
4.1.7 Test Results .....	21
4.2 Conducted Emission Measurement .....	34
4.2.1 Limits of Conducted Emission Measurement .....	34
4.2.2 Test Instruments .....	34
4.2.3 Test Procedures .....	35
4.2.4 Deviation from Test Standard .....	35
4.2.5 Test Setup .....	35
4.2.6 EUT Operating Conditions .....	35
4.2.7 Test Results .....	36
4.3 6dB Bandwidth Measurement .....	38
4.3.1 Limits of 6dB Bandwidth Measurement .....	38
4.3.2 Test Setup .....	38
4.3.3 Test Instruments .....	38
4.3.4 Test Procedure .....	38
4.3.5 Deviation from Test Standard .....	38
4.3.6 EUT Operating Conditions .....	38
4.3.7 Test Result .....	39
4.4 Conducted Output Power Measurement .....	41
4.4.1 Limits of Conducted Output Power Measurement .....	41
4.4.2 Test Setup .....	41
4.4.3 Test Instruments .....	41
4.4.4 Test Procedures .....	41
4.4.5 Deviation from Test Standard .....	41
4.4.6 EUT Operating Conditions .....	41
4.4.7 Test Results .....	42
4.5 Power Spectral Density Measurement .....	43
4.5.1 Limits of Power Spectral Density Measurement .....	43
4.5.2 Test Setup .....	43
4.5.3 Test Instruments .....	43
4.5.4 Test Procedure .....	43
4.5.5 Deviation from Test Standard .....	43
4.5.6 EUT Operating Condition .....	43

4.5.7 Test Results .....	44
4.6 Conducted Out of Band Emission Measurement .....	46
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	46
4.6.2 Test Setup.....	46
4.6.3 Test Instruments .....	46
4.6.4 Test Procedure .....	46
4.6.5 Deviation from Test Standard .....	46
4.6.6 EUT Operating Condition .....	46
4.6.7 Test Results .....	46
<b>5 Pictures of Test Arrangements.....</b>	<b>51</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>52</b>

### Release Control Record

Issue No.	Description	Date Issued
RF170906E02	Original release.	Sep. 29, 2017

## 1 Certificate of Conformity

**Product:** Cradle  
**Brand:** XAC  
**Test Model:** XC50  
**Sample Status:** ENGINEERING SAMPLE  
**Applicant:** XAC AUTOMATION CORP.  
**Test Date:** Sep. 21 to Oct. 24, 2017  
**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Cindy Hsin , **Date:** Sep. 29, 2017  
Cindy Hsin / Specialist

**Approved by :** May Chen , **Date:** Sep. 29, 2017  
May Chen / Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.84dB at 0.15391MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2483.50MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.30 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.16 dB
	6GHz ~ 18GHz	4.91 dB
	18GHz ~ 40GHz	5.30 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Cradle
Brand	XAC
Test Model	XC50
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 12V from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 150Mbps
Operating Frequency	2.412 ~ 2.462GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7
Output Power	48.417mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. The EUT must be supplied with a power adapter (only for test) as following table:

Brand	Model No.	Spec.
DELTA	ADP-36PH BW	AC Input: 100-240Vac, 50/60Hz, 1A AC input cable: Unshielded, 1.0m DC Output: 12V, 3A DC output cable :unshielded, 1.8m

2. The antenna provided to the EUT, please refer to the following table:

Brand	Model	Antenna Gain (dBi)	Frequency rang (GHz)	Antenna type	Connector type
ACX	AT3216-T2R4PAA	1.5	2.4~2.4835	Chip	NA

3. The EUT incorporates a SISO function.

MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	1TX	1RX
802.11g	6 ~ 54Mbps	1TX	1RX
802.11n (HT20)	MCS 0~7	1TX	1RX
802.11n (HT40)	MCS 0~7	1TX	1RX

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE<1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

#### Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

#### Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	1	OFDM	BPSK	6.5

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	1	OFDM	BPSK	6.5

### Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

### Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	24deg. C, 65%RH	120Vac, 60Hz	Jyunchun Lin
RE $<$ 1G	23deg. C, 63%RH	120Vac, 60Hz	Jyunchun Lin
PLC	25deg. C, 75%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng


### 3.3 Duty Cycle of Test Signal

If duty cycle of test signal is 100 %, duty factor is not required.


If duty cycle of test signal is < 98%, duty factor shall be considered.

**802.11n (HT40):** Duty cycle =  $0.646/0.775 = 0.834$ , Duty factor =  $10 * \log( 1/0.834) = 0.79$


**802.11b**

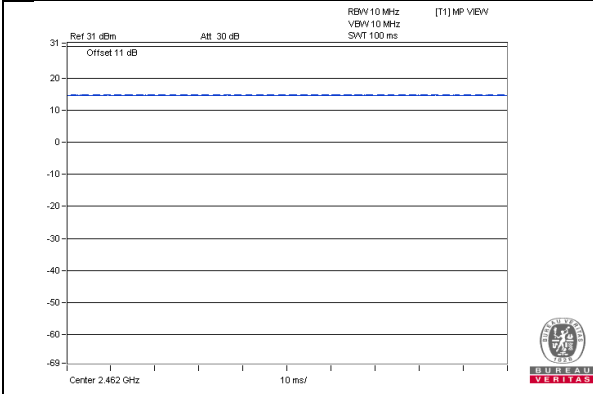


**802.11g**

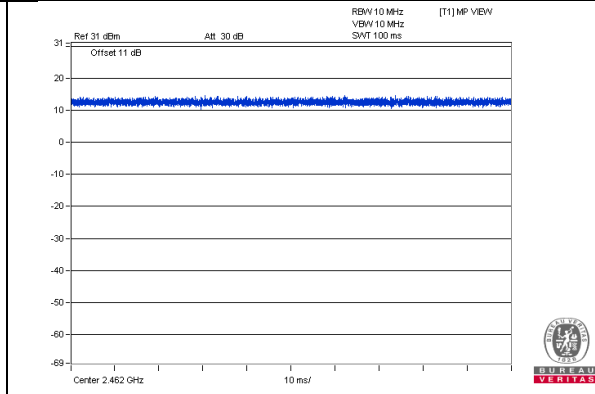

**802.11n (HT20)**

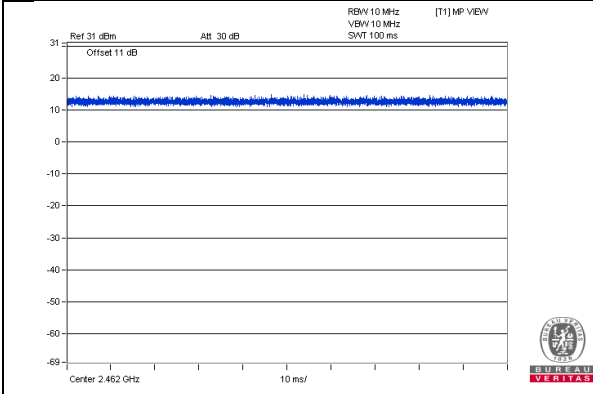

**802.11n (HT40)**

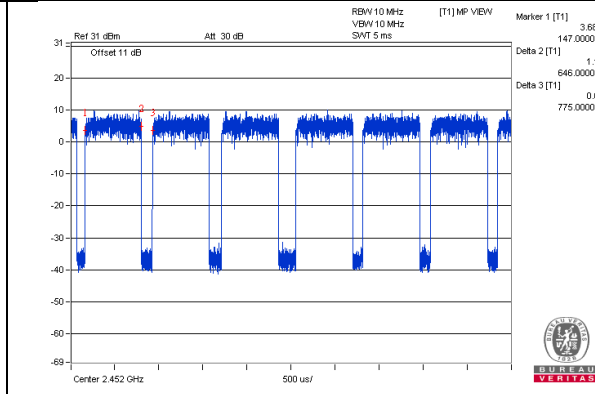

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	iPod	Apple	MD778TA/A	CC4JMH7LF4T1	NA	Provided by Lab
B.	Laptop	DELL	PP32LA	GSLB32S	FCC DoC	Provided by Lab
C.	Adapter	DELTA	ADP-36PH BW	NA	NA	Supplied by client

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.8	No	0	Supplied by client
2.	AC Cable	1	1	No	0	Supplied by client
3.	USB Cable	1	0.1	Yes	0	Provided by Lab
4.	RJ-45 Cable	1	10	No	0	Provided by Lab
5.	RJ12 Com Cable	1	1.5	No	0	Supplied by client

### 3.4.1 Configuration of System under Test

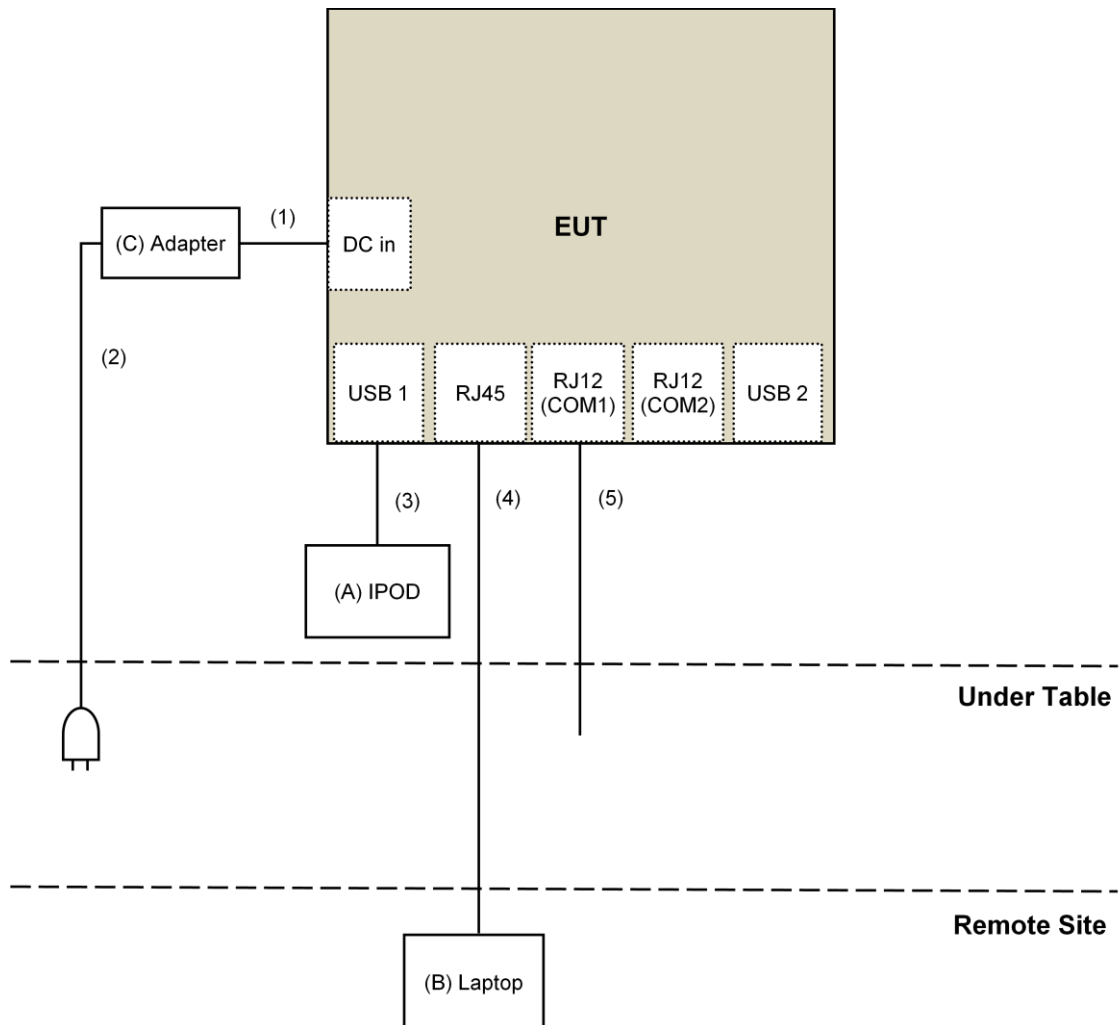

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**  
**KDB 558074 D01 DTS Meas Guidance v04**  
**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

For Above 1GHz :

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 08, 2017	July 07, 2018
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 27, 2016	Dec. 26, 2017
Pre-Amplifier EMCI	EMC12630SE	980385	Feb. 02, 2017	Feb. 01, 2018
RF Cable	EMC104-SM-SM-1200 EMC104-SM-SM-2000 EMC104-SM-SM-5000	160923 150318 150321	Feb. 02, 2017 Mar. 29, 2017 Mar. 29, 2017	Feb. 01, 2018 Mar. 28, 2018 Mar. 28, 2018
Pre-Amplifier EMCI	EMC184045SE	980387	Feb. 02, 2017	Feb. 01, 2018
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 15, 2016	Dec. 14, 2017
RF Cable	SUCOFLEX 102	36432/2 36433/2	Jan. 15, 2017	Jan. 14, 2018
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Spectrum Analyzer R&S	FSv40	100964	July 1, 2017	June 30, 2018
Power meter Anritsu	ML2495A	1014008	May 11, 2017	May 10, 2018
Power sensor Anritsu	MA2411B	0917122	May 11, 2017	May 10, 2018

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. The FCC Designation Number is TW2022.
- 4 The CANADA Site Registration No. is 20331-2
- 5 Tested Date: Sep. 21, 2017



For Below 1GHz :

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 08, 2017	July 07, 2018
Pre-Amplifier <sup>(*)</sup> EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna <sup>(*)</sup> Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 17, 2017	Jan. 16, 2018
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Nov. 10, 2016	Nov. 09, 2017
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Dec. 13, 2016	Dec. 12, 2017
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 01, 2017	Mar. 31, 2018
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 03, 2017	Oct. 02, 2018
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \*The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. Loop antenna was used for all emissions below 30 MHz.
5. The FCC Designation Number is TW2022.
6. The CANADA Site Registration No. is 20331-2
7. Tested Date: Oct. 24, 2017

#### 4.1.3 Test Procedures

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

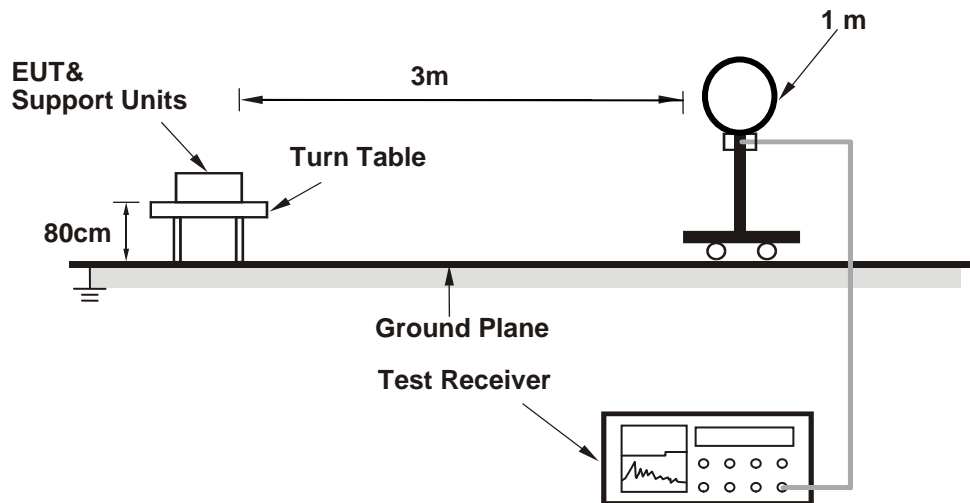

##### For Radiated emission 30MHz to 1GHz

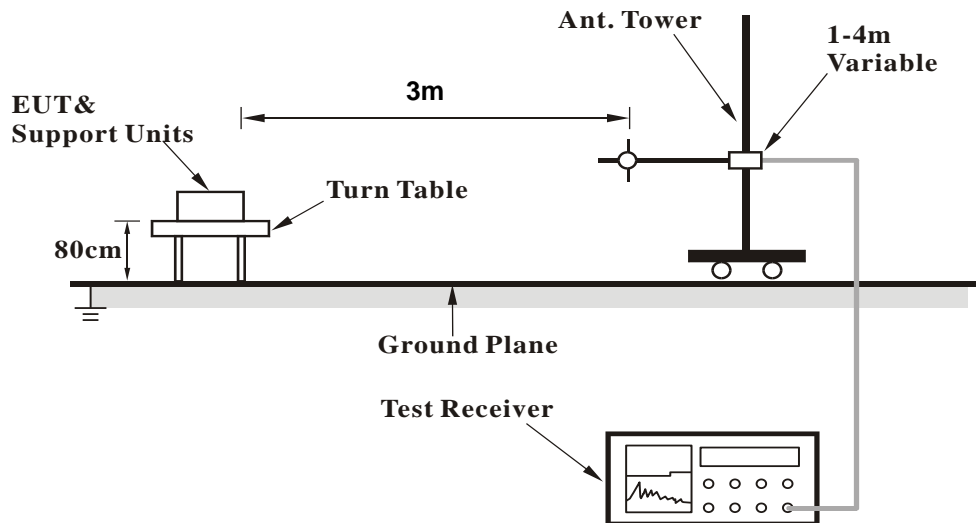

### For Radiated emission above 1GHz

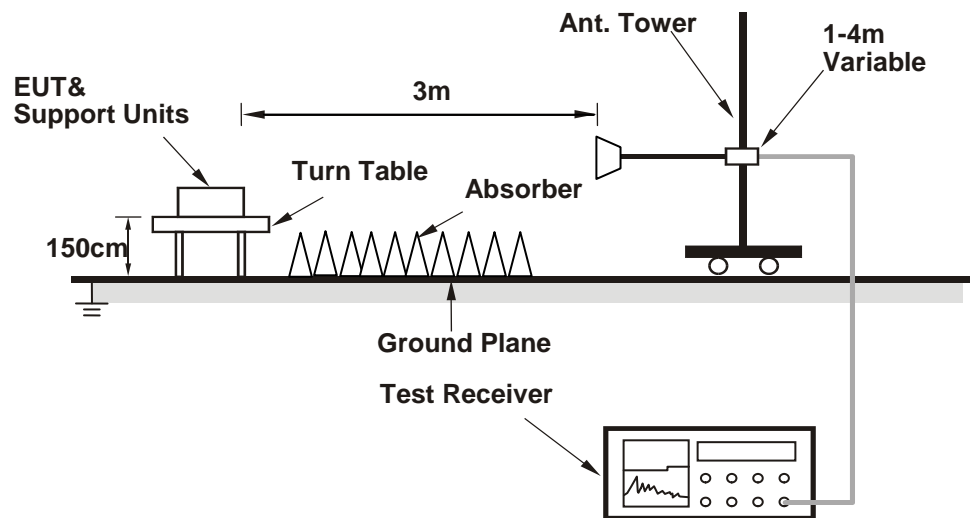

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Controlling software (Putty. exe paste "XC50 RF mode command . txt") has been activated to set the EUT on specific status.

#### 4.1.7 Test Results

#### Above 1GHz Data:

#### 802.11b

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.6 PK	74.0	-14.4	4.00 H	63	60.9	-1.3
2	2390.00	51.3 AV	54.0	-2.7	4.00 H	63	52.6	-1.3
3	*2412.00	99.9 PK			4.00 H	63	101.0	-1.1
4	*2412.00	97.6 AV			4.00 H	63	98.7	-1.1
5	4824.00	43.8 PK	74.0	-30.2	2.32 H	115	40.6	3.2
6	4824.00	40.4 AV	54.0	-13.6	2.32 H	115	37.2	3.2

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.5 PK	74.0	-18.5	1.12 V	45	56.8	-1.3
2	2390.00	44.5 AV	54.0	-9.5	1.12 V	45	45.8	-1.3
3	*2412.00	93.1 PK			1.12 V	45	94.2	-1.1
4	*2412.00	90.5 AV			1.12 V	45	91.6	-1.1
5	4824.00	46.5 PK	74.0	-27.5	2.30 V	306	43.3	3.2
6	4824.00	44.0 AV	54.0	-10.0	2.30 V	306	40.8	3.2

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.4 PK			4.00 H	42	100.6	-1.2
2	*2437.00	97.1 AV			4.00 H	42	98.3	-1.2
3	4874.00	44.2 PK	74.0	-29.8	2.30 H	125	40.9	3.3
4	4874.00	40.8 AV	54.0	-13.2	2.30 H	125	37.5	3.3
5	7311.00	44.8 PK	74.0	-29.2	4.00 H	75	35.0	9.8
6	7311.00	31.4 AV	54.0	-22.6	4.00 H	75	21.6	9.8

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	92.5 PK			1.13 V	47	93.7	-1.2
2	*2437.00	90.0 AV			1.13 V	47	91.2	-1.2
3	4874.00	46.9 PK	74.0	-27.1	2.31 V	315	43.6	3.3
4	4874.00	44.3 AV	54.0	-9.7	2.31 V	315	41.0	3.3
5	7311.00	44.6 PK	74.0	-29.4	1.50 V	325	34.8	9.8
6	7311.00	31.2 AV	54.0	-22.8	1.50 V	325	21.4	9.8

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.6 PK			4.00 H	44	100.7	-1.1
2	*2462.00	97.3 AV			4.00 H	44	98.4	-1.1
3	2483.50	60.0 PK	74.0	-14.0	4.00 H	44	61.0	-1.0
4	2483.50	50.1 AV	54.0	-3.9	4.00 H	44	51.1	-1.0
5	4924.00	44.8 PK	74.0	-29.2	2.28 H	132	41.3	3.5
6	4924.00	41.2 AV	54.0	-12.8	2.28 H	132	37.7	3.5
7	7386.00	45.0 PK	74.0	-29.0	3.98 H	85	35.1	9.9
8	7386.00	31.4 AV	54.0	-22.6	3.98 H	85	21.5	9.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	92.8 PK			1.13 V	21	93.9	-1.1
2	*2462.00	90.2 AV			1.13 V	21	91.3	-1.1
3	2483.50	55.8 PK	74.0	-18.2	1.13 V	21	56.8	-1.0
4	2483.50	43.3 AV	54.0	-10.7	1.13 V	21	44.3	-1.0
5	4924.00	46.6 PK	74.0	-27.4	2.33 V	303	43.1	3.5
6	4924.00	44.3 AV	54.0	-9.7	2.33 V	303	40.8	3.5
7	7386.00	44.7 PK	74.0	-29.3	1.48 V	330	34.8	9.9
8	7386.00	31.1 AV	54.0	-22.9	1.48 V	330	21.2	9.9

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11g**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	4.00 H	63	69.1	-1.3
2	2390.00	48.8 AV	54.0	-5.2	4.00 H	63	50.1	-1.3
3	*2412.00	102.4 PK			4.00 H	63	103.5	-1.1
4	*2412.00	91.7 AV			4.00 H	63	92.8	-1.1
5	4824.00	40.4 PK	74.0	-33.6	2.27 H	114	37.2	3.2
6	4824.00	28.4 AV	54.0	-25.6	2.27 H	114	25.2	3.2

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.1 PK	74.0	-9.9	1.18 V	34	65.4	-1.3
2	2390.00	42.1 AV	54.0	-11.9	1.18 V	34	43.4	-1.3
3	*2412.00	94.9 PK			1.18 V	34	96.0	-1.1
4	*2412.00	84.5 AV			1.18 V	34	85.6	-1.1
5	4824.00	41.0 PK	74.0	-33.0	2.42 V	300	37.8	3.2
6	4824.00	29.2 AV	54.0	-24.8	2.42 V	300	26.0	3.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.0 PK			4.00 H	44	102.2	-1.2
2	*2437.00	90.2 AV			4.00 H	44	91.4	-1.2
3	4874.00	40.1 PK	74.0	-33.9	2.26 H	118	36.8	3.3
4	4874.00	28.3 AV	54.0	-25.7	2.26 H	118	25.0	3.3
5	7311.00	44.9 PK	74.0	-29.1	4.00 H	78	35.1	9.8
6	7311.00	31.0 AV	54.0	-23.0	4.00 H	78	21.2	9.8

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	93.5 PK			1.17 V	44	94.7	-1.2
2	*2437.00	83.2 AV			1.17 V	44	84.4	-1.2
3	4874.00	40.6 PK	74.0	-33.4	2.36 V	309	37.3	3.3
4	4874.00	28.8 AV	54.0	-25.2	2.36 V	309	25.5	3.3
5	7311.00	44.5 PK	74.0	-29.5	1.52 V	318	34.7	9.8
6	7311.00	31.1 AV	54.0	-22.9	1.52 V	318	21.3	9.8

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.9 PK			4.00 H	44	102.0	-1.1
2	*2462.00	90.1 AV			4.00 H	44	91.2	-1.1
3	2483.50	62.0 PK	74.0	-12.0	4.00 H	44	63.0	-1.0
4	2483.50	47.1 AV	54.0	-6.9	4.00 H	44	48.1	-1.0
5	4924.00	40.5 PK	74.0	-33.5	2.28 H	120	37.0	3.5
6	4924.00	28.5 AV	54.0	-25.5	2.28 H	120	25.0	3.5
7	7386.00	45.2 PK	74.0	-28.8	4.00 H	65	35.3	9.9
8	7386.00	31.4 AV	54.0	-22.6	4.00 H	65	21.5	9.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	93.1 PK			1.17 V	47	94.2	-1.1
2	*2462.00	83.0 AV			1.17 V	47	84.1	-1.1
3	2483.50	59.2 PK	74.0	-14.8	1.17 V	47	60.2	-1.0
4	2483.50	41.8 AV	54.0	-12.2	1.17 V	47	42.8	-1.0
5	4924.00	40.5 PK	74.0	-33.5	2.36 V	324	37.0	3.5
6	4924.00	28.8 AV	54.0	-25.2	2.36 V	324	25.3	3.5
7	7386.00	44.1 PK	74.0	-29.9	1.47 V	315	34.2	9.9
8	7386.00	30.8 AV	54.0	-23.2	1.47 V	315	20.9	9.9

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11n (HT20)**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.2 PK	74.0	-4.8	4.00 H	62	70.5	-1.3
2	2390.00	51.5 AV	54.0	-2.5	4.00 H	62	52.8	-1.3
3	*2412.00	101.5 PK			4.00 H	62	102.6	-1.1
4	*2412.00	91.2 AV			4.00 H	62	92.3	-1.1
5	4824.00	41.0 PK	74.0	-33.0	2.35 H	115	37.8	3.2
6	4824.00	28.7 AV	54.0	-25.3	2.35 H	115	25.5	3.2

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	1.19 V	40	66.8	-1.3
2	2390.00	44.7 AV	54.0	-9.3	1.19 V	40	46.0	-1.3
3	*2412.00	94.2 PK			1.19 V	40	95.3	-1.1
4	*2412.00	83.9 AV			1.19 V	40	85.0	-1.1
5	4824.00	41.4 PK	74.0	-32.6	2.41 V	332	38.2	3.2
6	4824.00	29.5 AV	54.0	-24.5	2.41 V	332	26.3	3.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.5 PK			4.00 H	44	101.7	-1.2
2	*2437.00	90.5 AV			4.00 H	44	91.7	-1.2
3	4874.00	40.6 PK	74.0	-33.4	2.31 H	130	37.3	3.3
4	4874.00	28.4 AV	54.0	-25.6	2.31 H	130	25.1	3.3
5	7311.00	44.8 PK	74.0	-29.2	4.00 H	65	35.0	9.8
6	7311.00	31.0 AV	54.0	-23.0	4.00 H	65	21.2	9.8

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	93.3 PK			1.17 V	32	94.5	-1.2
2	*2437.00	83.3 AV			1.17 V	32	84.5	-1.2
3	4874.00	41.1 PK	74.0	-32.9	2.35 V	333	37.8	3.3
4	4874.00	29.2 AV	54.0	-24.8	2.35 V	333	25.9	3.3
5	7311.00	44.6 PK	74.0	-29.4	1.45 V	310	34.8	9.8
6	7311.00	31.3 AV	54.0	-22.7	1.45 V	310	21.5	9.8

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.4 PK			4.00 H	44	101.5	-1.1
2	*2462.00	90.4 AV			4.00 H	44	91.5	-1.1
3	2483.50	67.6 PK	74.0	-6.4	4.00 H	44	68.6	-1.0
4	2483.50	49.8 AV	54.0	-4.2	4.00 H	44	50.8	-1.0
5	4924.00	41.1 PK	74.0	-32.9	2.32 H	117	37.6	3.5
6	4924.00	28.8 AV	54.0	-25.2	2.32 H	117	25.3	3.5
7	7386.00	45.5 PK	74.0	-28.5	3.98 H	61	35.6	9.9
8	7386.00	31.5 AV	54.0	-22.5	3.98 H	61	21.6	9.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	93.2 PK			1.19 V	38	94.3	-1.1
2	*2462.00	83.4 AV			1.19 V	38	84.5	-1.1
3	2483.50	63.2 PK	74.0	-10.8	1.19 V	38	64.2	-1.0
4	2483.50	43.0 AV	54.0	-11.0	1.19 V	38	44.0	-1.0
5	4924.00	40.6 PK	74.0	-33.4	2.36 V	314	37.1	3.5
6	4924.00	29.1 AV	54.0	-24.9	2.36 V	314	25.6	3.5
7	7386.00	43.9 PK	74.0	-30.1	1.47 V	307	34.0	9.9
8	7386.00	30.9 AV	54.0	-23.1	1.47 V	307	21.0	9.9

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11n (HT40)**

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.3 PK	74.0	-7.7	3.53 H	237	67.6	-1.3
2	2390.00	53.7 AV	54.0	-0.3	3.53 H	237	55.0	-1.3
3	*2422.00	95.6 PK			3.53 H	237	96.9	-1.3
4	*2422.00	85.7 AV			3.53 H	237	87.0	-1.3
5	4844.00	40.7 PK	74.0	-33.3	2.31 H	124	37.4	3.3
6	4844.00	28.7 AV	54.0	-25.3	2.31 H	124	25.4	3.3
7	7266.00	45.4 PK	74.0	-28.6	4.00 H	50	35.6	9.8
8	7266.00	31.5 AV	54.0	-22.5	4.00 H	50	21.7	9.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.0 PK	74.0	-12.0	1.17 V	51	63.3	-1.3
2	2390.00	46.7 AV	54.0	-7.3	1.17 V	51	48.0	-1.3
3	*2422.00	88.7 PK			1.17 V	51	90.0	-1.3
4	*2422.00	78.7 AV			1.17 V	51	80.0	-1.3
5	4844.00	40.4 PK	74.0	-33.6	2.34 V	303	37.1	3.3
6	4844.00	28.8 AV	54.0	-25.2	2.34 V	303	25.5	3.3
7	7266.00	43.8 PK	74.0	-30.2	1.53 V	302	34.0	9.8
8	7266.00	30.9 AV	54.0	-23.1	1.53 V	302	21.1	9.8

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.0 PK	74.0	-9.0	3.57 H	226	66.3	-1.3
2	2390.00	51.8 AV	54.0	-2.2	3.57 H	226	53.1	-1.3
3	*2437.00	98.8 PK			3.57 H	226	100.0	-1.2
4	*2437.00	89.1 AV			3.57 H	226	90.3	-1.2
5	2483.50	64.9 PK	74.0	-9.1	3.57 H	226	65.9	-1.0
6	2483.50	48.2 AV	54.0	-5.8	3.57 H	226	49.2	-1.0
7	4874.00	40.0 PK	74.0	-34.0	2.32 H	119	36.7	3.3
8	4874.00	28.1 AV	54.0	-25.9	2.32 H	119	24.8	3.3
9	7311.00	45.4 PK	74.0	-28.6	4.00 H	53	35.6	9.8
10	7311.00	31.4 AV	54.0	-22.6	4.00 H	53	21.6	9.8

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	1.20 V	67	62.0	-1.3
2	2390.00	44.7 AV	54.0	-9.3	1.20 V	67	46.0	-1.3
3	*2437.00	92.0 PK			1.20 V	67	93.2	-1.2
4	*2437.00	82.1 AV			1.20 V	67	83.3	-1.2
5	2483.50	60.1 PK	74.0	-13.9	1.20 V	67	61.1	-1.0
6	2483.50	41.5 AV	54.0	-12.5	1.20 V	67	42.5	-1.0
7	4874.00	40.8 PK	74.0	-33.2	2.35 V	322	37.5	3.3
8	4874.00	29.1 AV	54.0	-24.9	2.35 V	322	25.8	3.3
9	7311.00	43.6 PK	74.0	-30.4	1.46 V	303	33.8	9.8
10	7311.00	30.8 AV	54.0	-23.2	1.46 V	303	21.0	9.8

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 9	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	96.8 PK			3.49 H	229	97.9	-1.1
2	*2452.00	87.0 AV			3.49 H	229	88.1	-1.1
3	2483.50	69.2 PK	74.0	-4.8	3.49 H	229	70.2	-1.0
<b>4</b>	<b>2483.50</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>3.49 H</b>	<b>229</b>	<b>54.9</b>	<b>-1.0</b>
5	4904.00	40.4 PK	74.0	-33.6	2.27 H	106	36.9	3.5
6	4904.00	28.6 AV	54.0	-25.4	2.27 H	106	25.1	3.5
7	7356.00	44.8 PK	74.0	-29.2	3.97 H	54	34.9	9.9
8	7356.00	31.2 AV	54.0	-22.8	3.97 H	54	21.3	9.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	90.0 PK			1.17 V	56	91.1	-1.1
2	*2452.00	80.1 AV			1.17 V	56	81.2	-1.1
3	2483.50	65.5 PK	74.0	-8.5	1.17 V	56	66.5	-1.0
4	2483.50	47.1 AV	54.0	-6.9	1.17 V	56	48.1	-1.0
5	4904.00	40.9 PK	74.0	-33.1	2.32 V	323	37.4	3.5
6	4904.00	29.3 AV	54.0	-24.7	2.32 V	323	25.8	3.5
7	7356.00	43.5 PK	74.0	-30.5	1.44 V	315	33.6	9.9
8	7356.00	30.6 AV	54.0	-23.4	1.44 V	315	20.7	9.9

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



**Below 1GHz Data:**

**802.11n (HT20)**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	86.67	25.8 QP	40.0	-14.2	2.00 H	100	39.7	-13.9
2	108.04	27.8 QP	43.5	-15.7	3.00 H	248	38.9	-11.1
3	180.03	28.8 QP	43.5	-14.7	2.00 H	289	38.3	-9.5
4	199.65	29.0 QP	43.5	-14.5	2.00 H	285	40.4	-11.4
5	336.20	38.9 QP	46.0	-7.1	1.00 H	36	45.6	-6.7
6	479.98	28.9 QP	46.0	-17.1	2.00 H	59	31.9	-3.0

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.54	30.3 QP	40.0	-9.7	1.00 V	171	38.4	-8.1
2	87.08	29.3 QP	40.0	-10.7	2.00 V	360	43.3	-14.0
3	203.97	29.2 QP	43.5	-14.3	1.00 V	0	40.6	-11.4
4	240.00	28.4 QP	46.0	-17.6	1.00 V	145	38.4	-10.0
5	331.28	32.7 QP	46.0	-13.3	1.00 V	0	39.4	-6.7
6	479.98	30.1 QP	46.0	-15.9	1.00 V	3	33.1	-3.0

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	100287	Apr. 19, 2017	Apr. 18, 2018
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 26, 2016	Oct. 25, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 03, 2017	June 02, 2018
50 ohms Terminator	N/A	EMC-02	Sep. 22, 2017	Sep. 21, 2018
RF Cable	5D-FB	COCCAB-001	Sep. 29, 2017	Sep. 28, 2018
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	June 18, 2017	June 17, 2018
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
3. Tested Date: Oct. 24, 2017

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

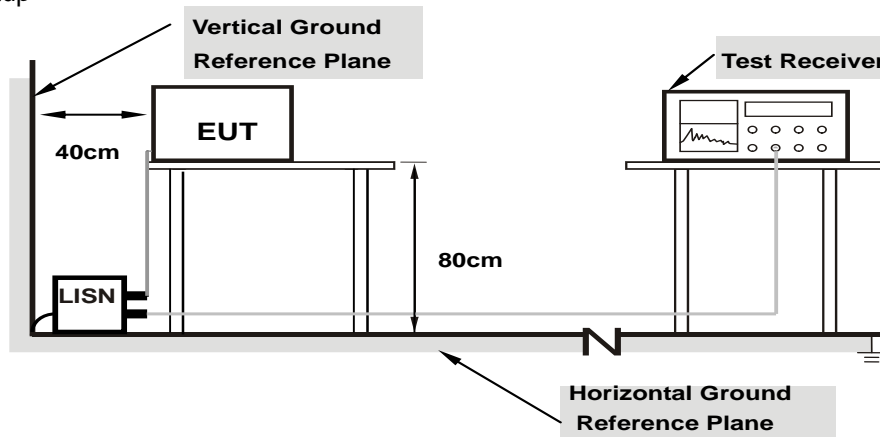

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


#### 4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15391	10.04	41.72	24.04	51.76	34.08	65.79	55.79	-14.03
2	0.17344	10.03	38.64	20.90	48.67	30.93	64.79	54.79	-16.12	-23.86
3	0.20078	10.02	33.68	16.85	43.70	26.87	63.58	53.58	-19.88	-26.71
4	0.39219	10.04	22.75	11.33	32.79	21.37	58.02	48.02	-25.23	-26.65
5	4.36719	10.19	13.46	1.51	23.65	11.70	56.00	46.00	-32.35	-34.30
6	23.12891	11.03	22.72	20.39	33.75	31.42	60.00	50.00	-26.25	-18.58

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

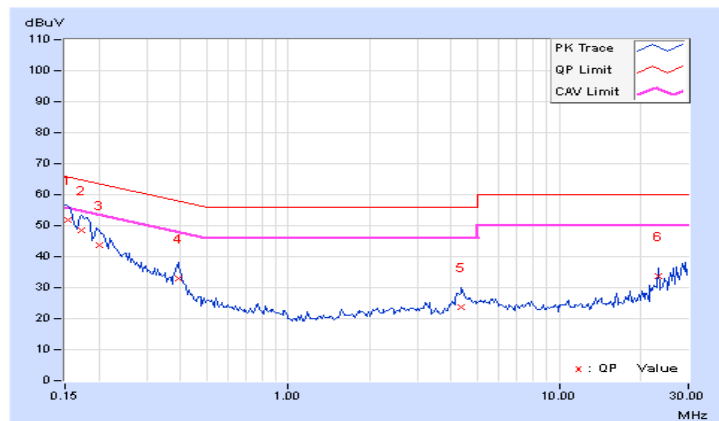


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15391	10.03	41.92	24.40	51.95	34.43	65.79	55.79	-13.84	-21.36
2	0.16953	10.02	37.76	20.34	47.78	30.36	64.98	54.98	-17.20	-24.62
3	0.19687	9.99	34.81	17.65	44.80	27.64	63.74	53.74	-18.94	-26.10
4	0.39219	10.03	22.79	13.33	32.82	23.36	58.02	48.02	-25.20	-24.66
5	4.44922	10.11	11.02	4.60	21.13	14.71	56.00	46.00	-34.87	-31.29
6	26.60938	10.67	25.07	23.08	35.74	33.75	60.00	50.00	-24.26	-16.25

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

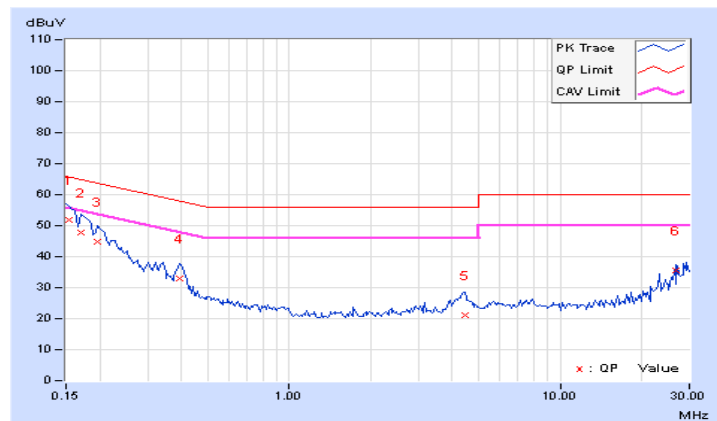


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	10.10	0.5	PASS
6	2437	10.11	0.5	PASS
11	2462	10.10	0.5	PASS

##### 802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.43	0.5	PASS
6	2437	16.29	0.5	PASS
11	2462	16.11	0.5	PASS

##### 802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	17.61	0.5	Pass
6	2437	17.61	0.5	Pass
11	2462	17.62	0.5	Pass

##### 802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
3	2422	35.12	0.5	Pass
6	2437	35.16	0.5	Pass
9	2452	35.22	0.5	Pass

### Spectrum Plot of Worst Value


#### 802.11b: CH 1

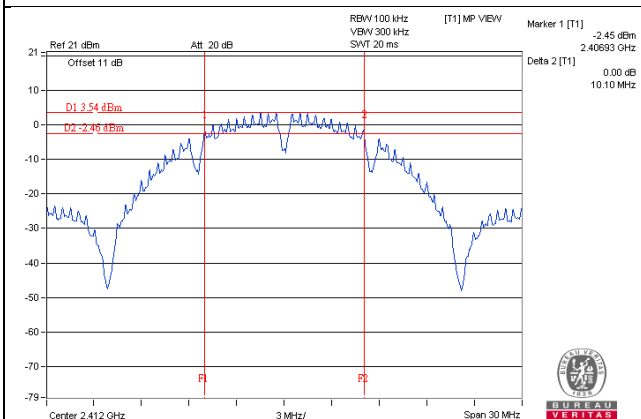


#### 802.11g: CH11

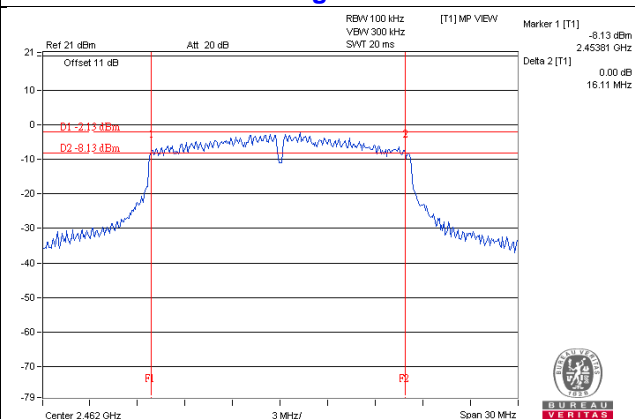

#### 802.11n (HT20): CH 1

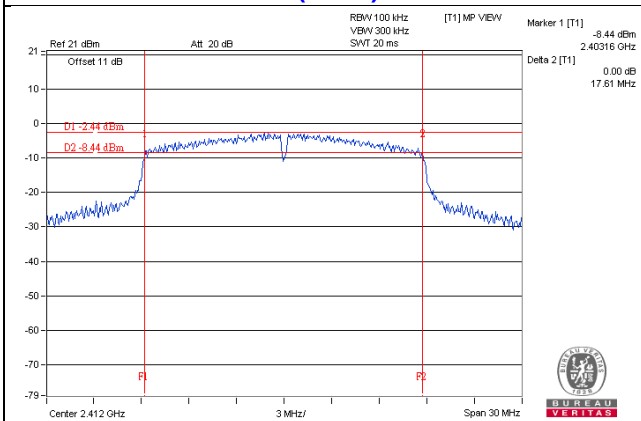

#### 802.11n (HT40): CH 3

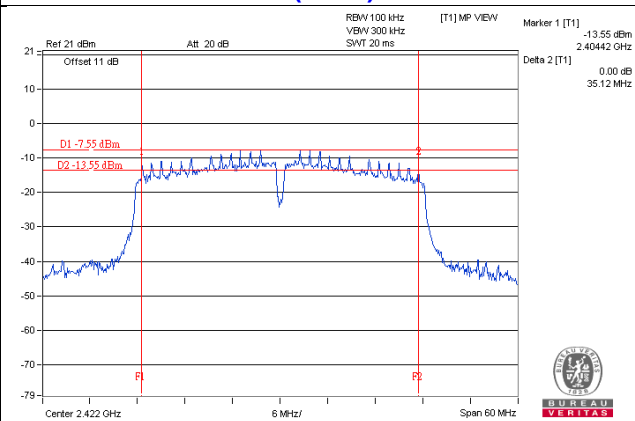




## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

### 4.4.2 Test Setup



### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

The peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

#### 4.4.7 Test Results

#### FOR PEAK POWER

##### 802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	38.905	15.90	30	Pass
6	2437	36.308	15.60	30	Pass
11	2462	35.727	15.53	30	Pass

##### 802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	47.315	16.75	30	Pass
6	2437	46.238	16.65	30	Pass
11	2462	44.259	16.46	30	Pass

##### 802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	48.417	16.85	30	Pass
6	2437	45.499	16.58	30	Pass
11	2462	42.073	16.24	30	Pass

##### 802.11n (HT40)


Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
3	2422	28.642	14.57	30	Pass
6	2437	46.026	16.63	30	Pass
9	2452	37.325	15.72	30	Pass

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set the VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as Item 4.3.6

#### 4.5.7 Test Results

##### 802.11b

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-9.42	8	Pass
6	2437	-11.27	8	Pass
11	2462	-10.34	8	Pass

##### 802.11g

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-14.96	8	Pass
6	2437	-15.92	8	Pass
11	2462	-15.64	8	Pass

##### 802.11n (HT20)


Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-15.12	8	Pass
6	2437	-14.44	8	Pass
11	2462	-14.73	8	Pass

##### 802.11n (HT40)


Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
3	2422	-24.05	8	Pass
6	2437	-20.20	8	Pass
9	2452	-23.25	8	Pass

### Spectrum Plot of Worst Value


#### 802.11b: CH 1

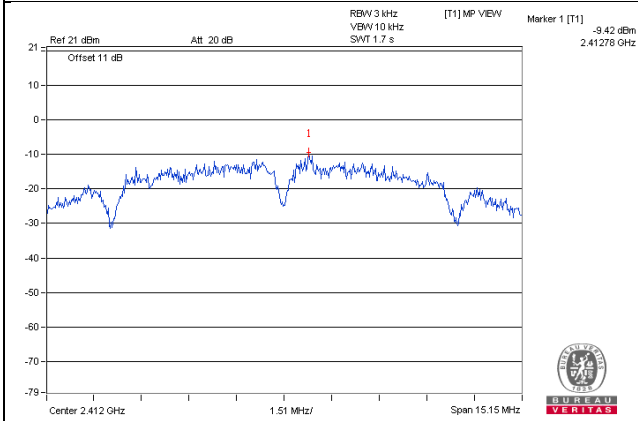


#### 802.11g: CH 1

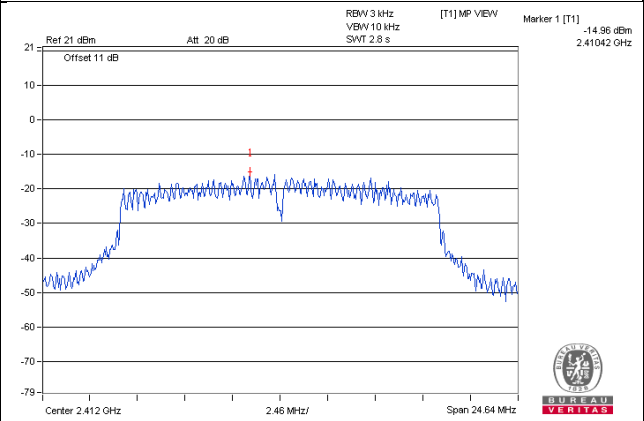

#### 802.11n (HT20): CH 6

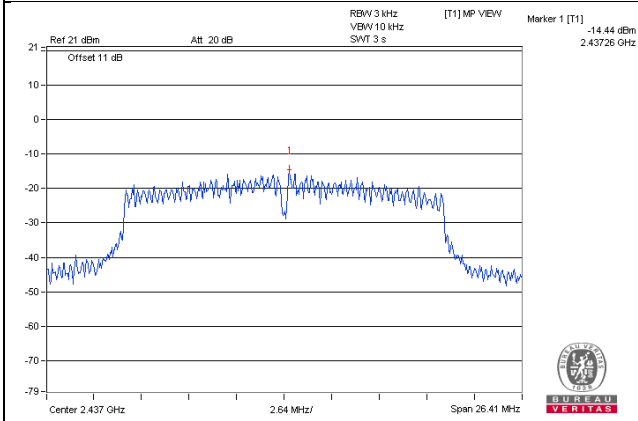

#### 802.11n (HT40): CH 6

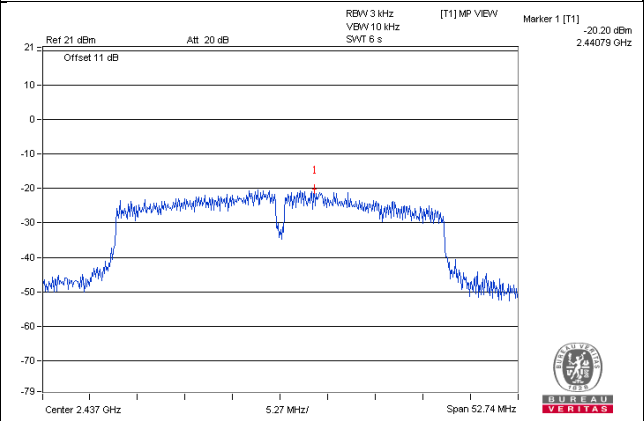


## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition



Same as Item 4.3.6

### 4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

# 802.11b



## CH 1

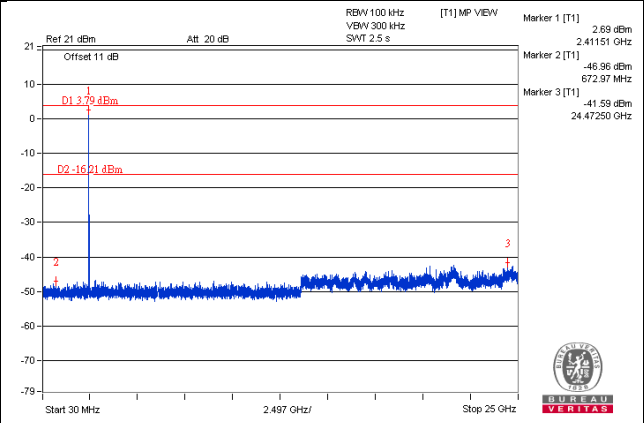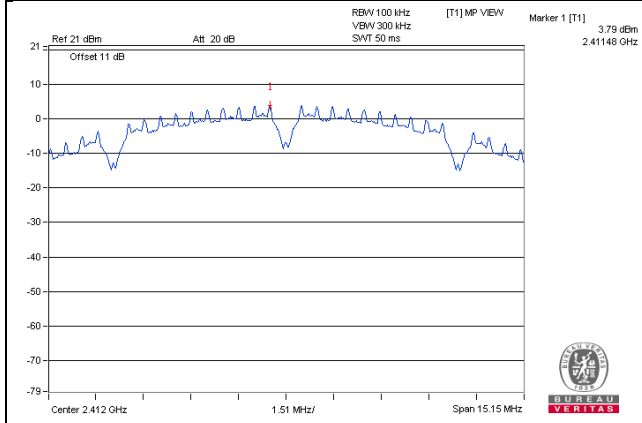


## CH 6

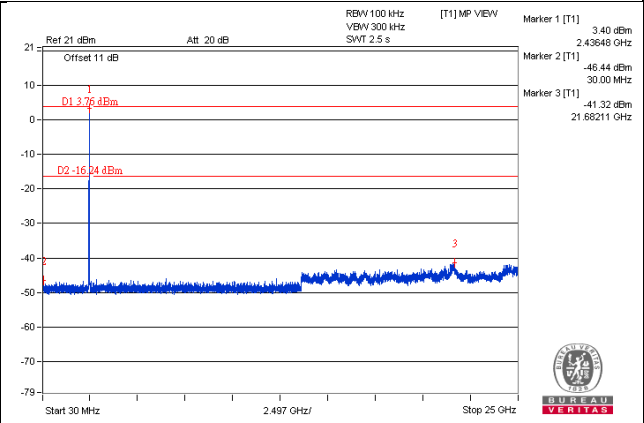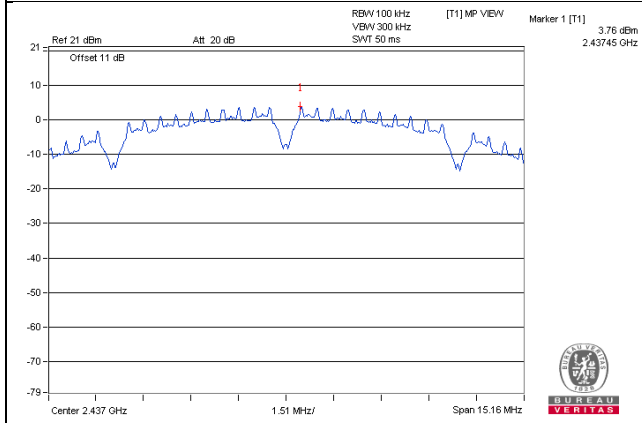


## CH 11

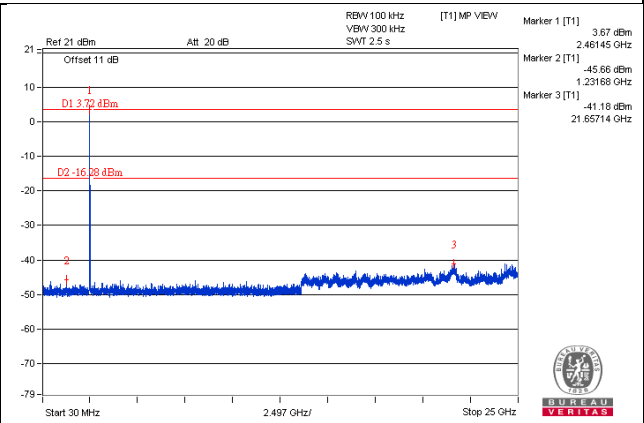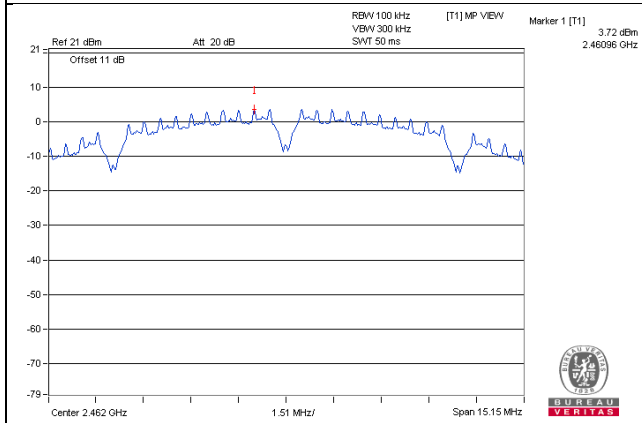

## CH 1 Band edge


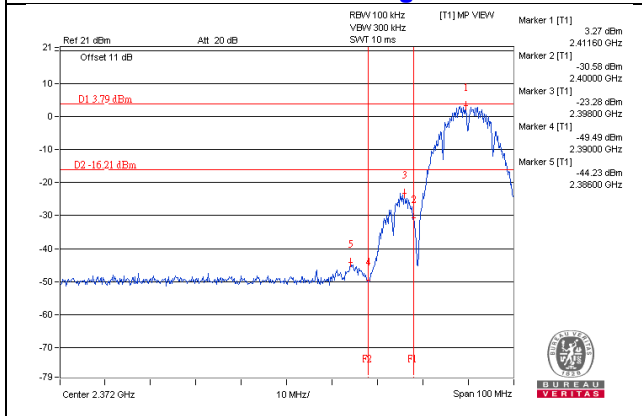


## CH 11 Band edge


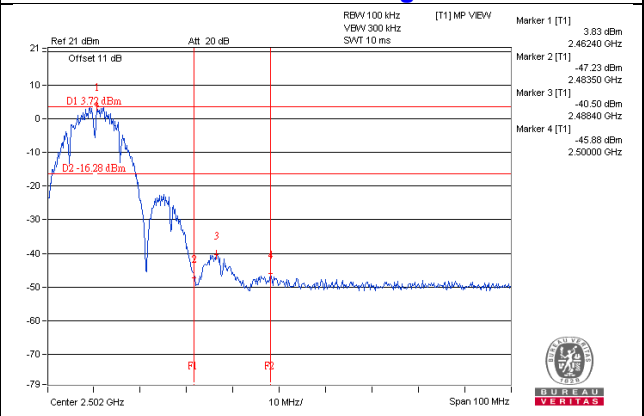


# 802.11g



## CH 1

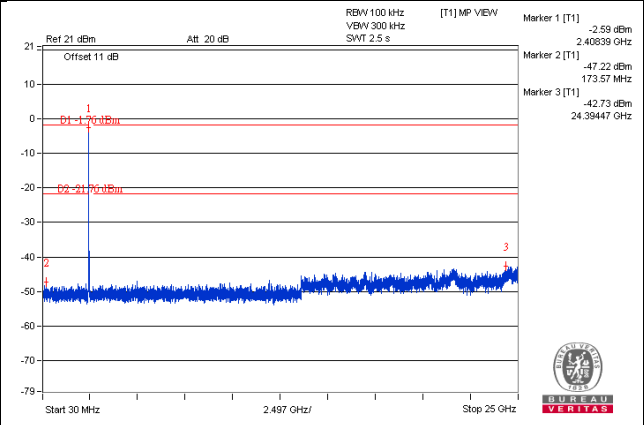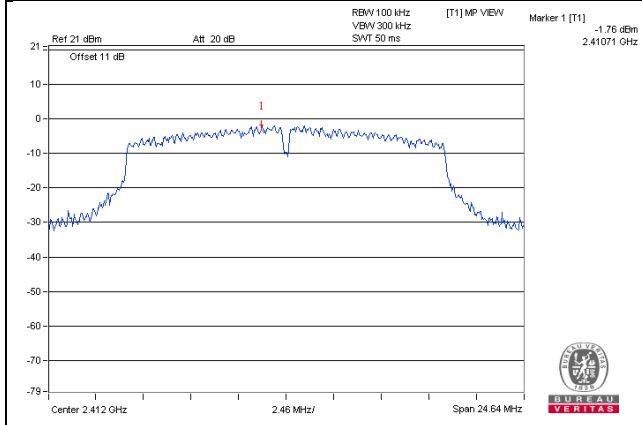


## CH 6

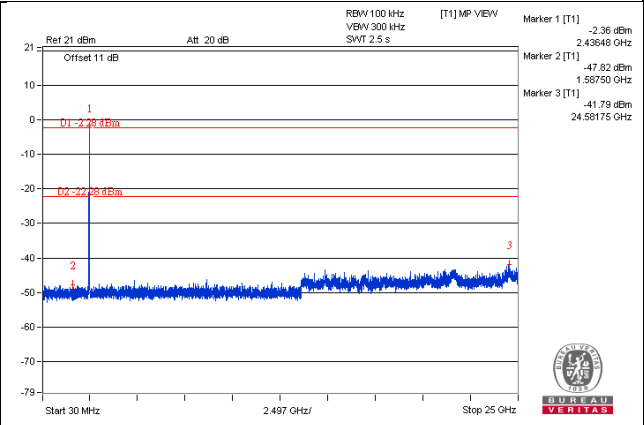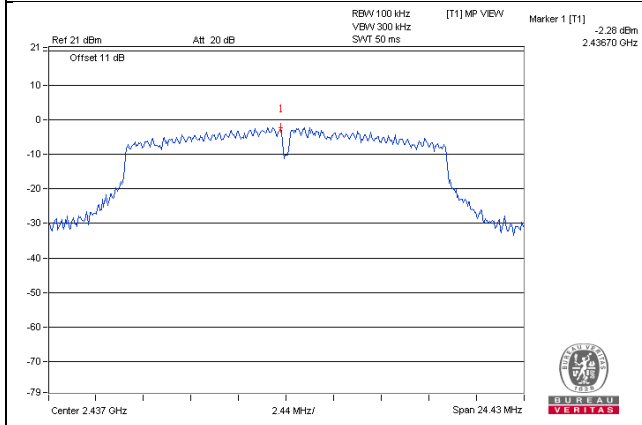


## CH 11

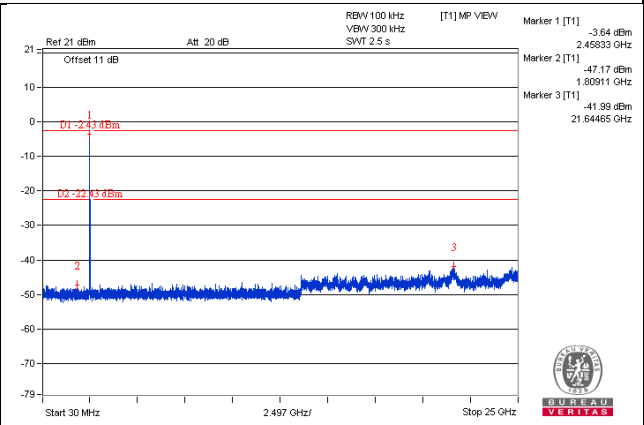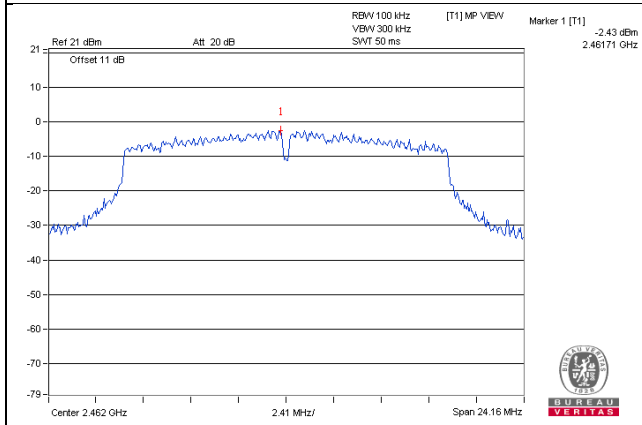

## CH 1 Band edge

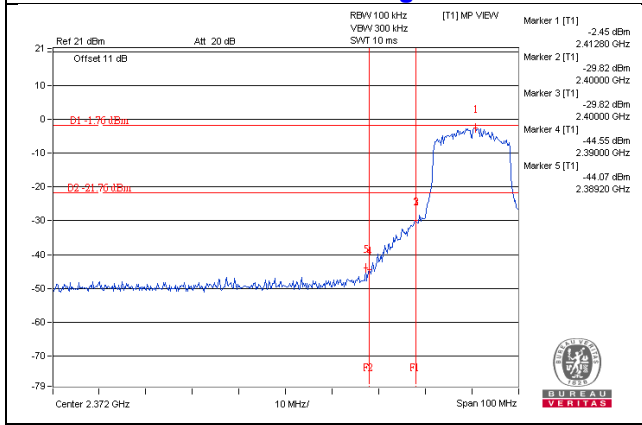



## CH 11 Band edge

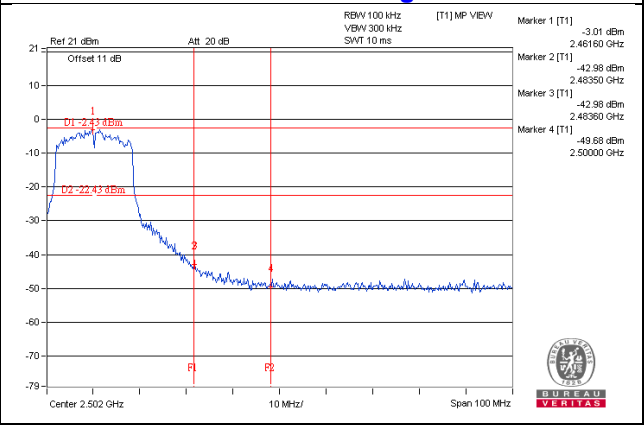





# 802.11n (HT20)



## CH 1

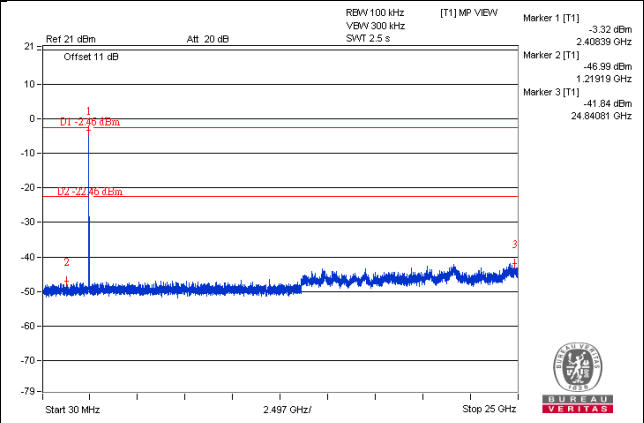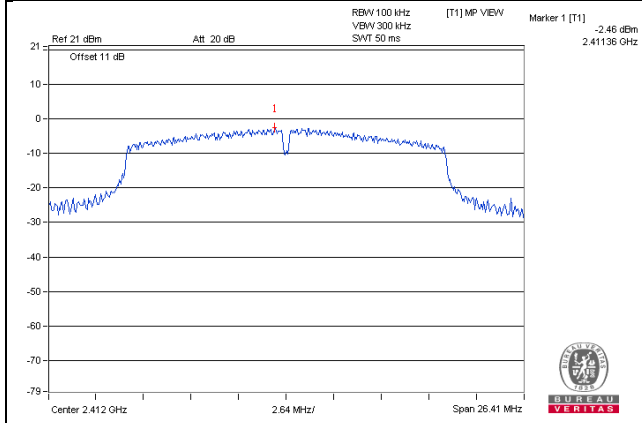


## CH 6

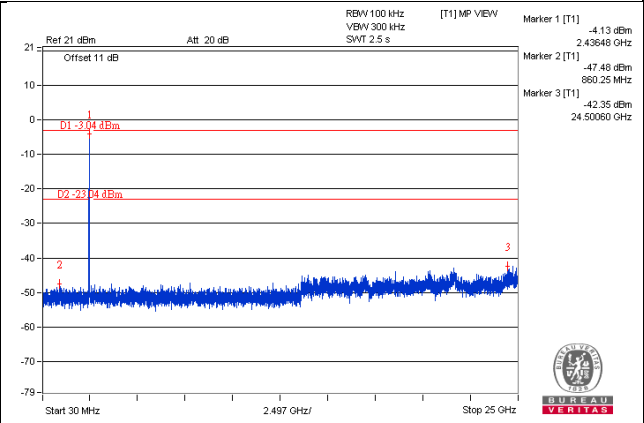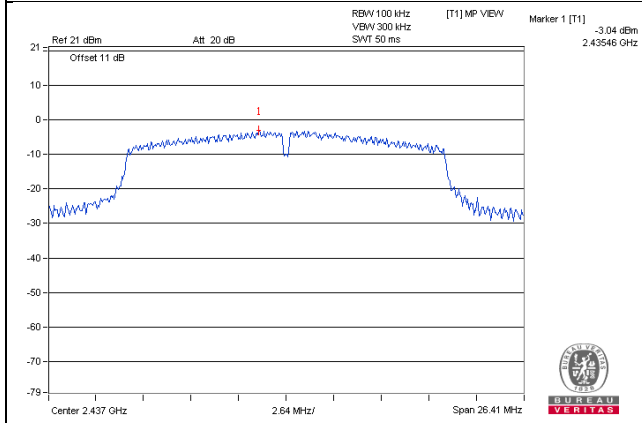


## CH 11

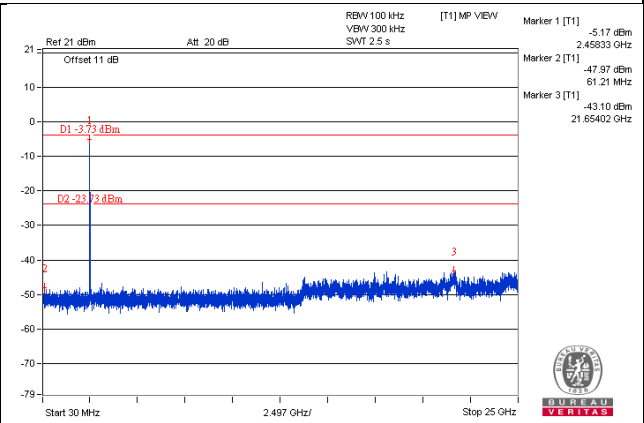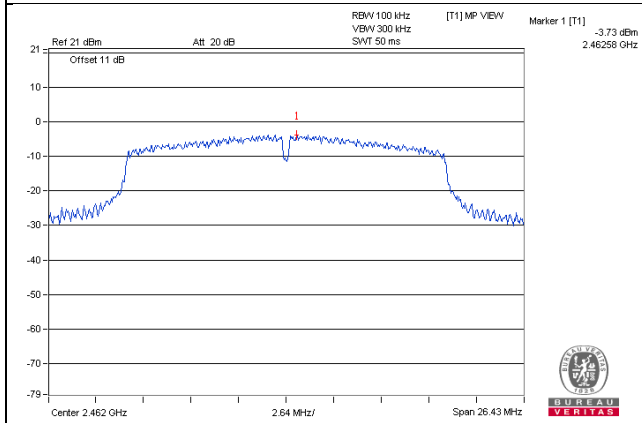

## CH 1 Band edge


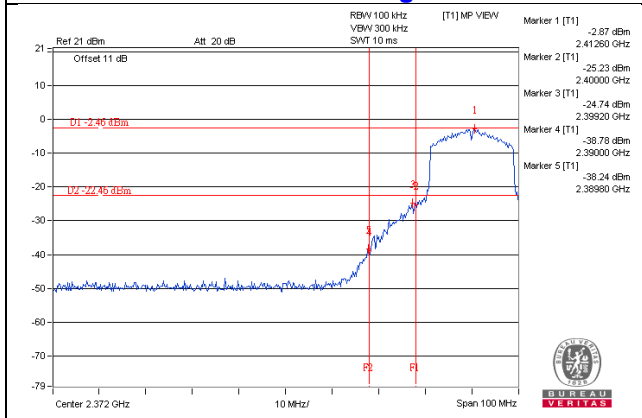


## CH 11 Band edge


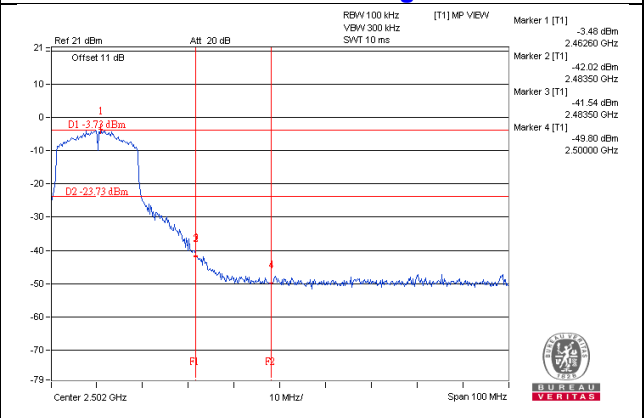


### 802.11n (HT40)



#### CH 3

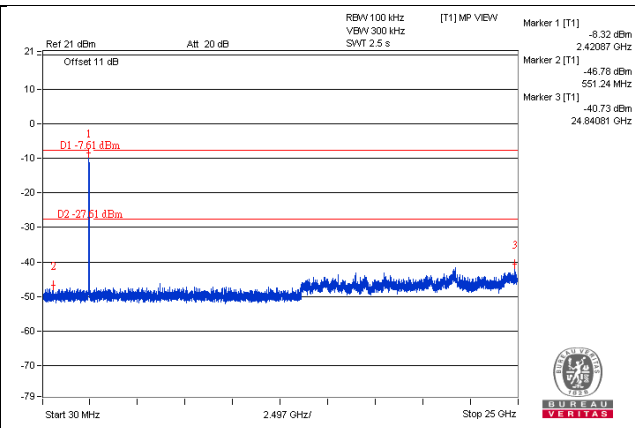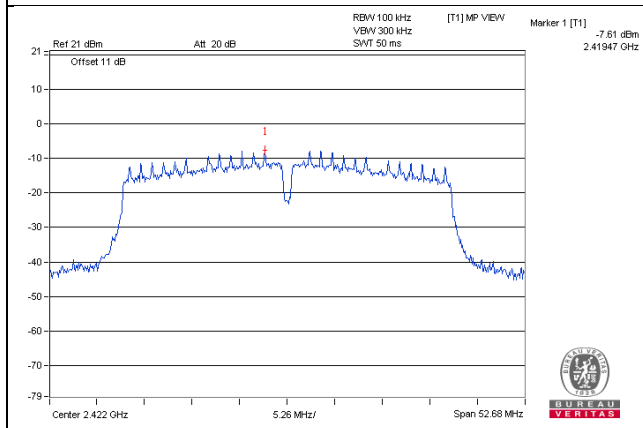


#### CH 6

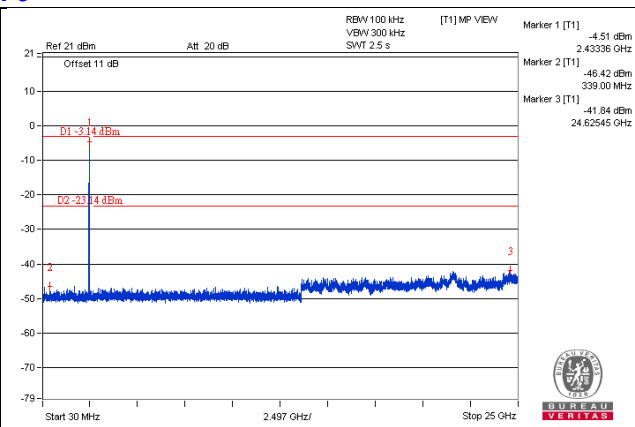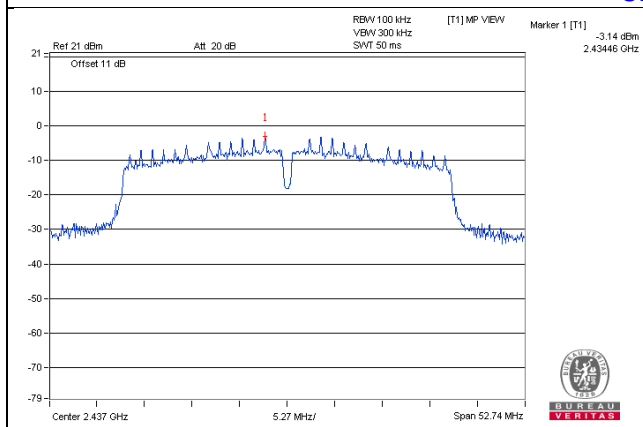


#### CH 9

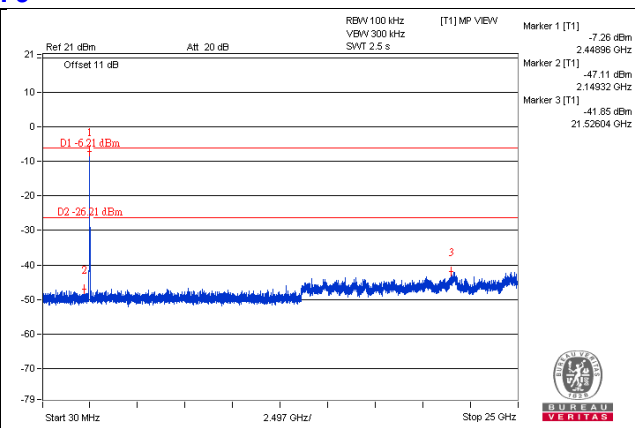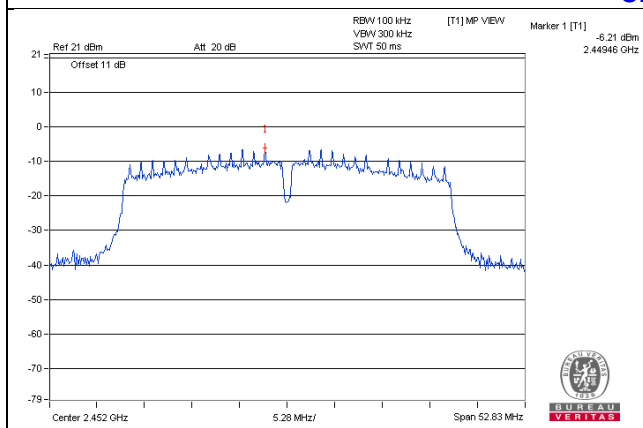

#### CH 3 Band edge

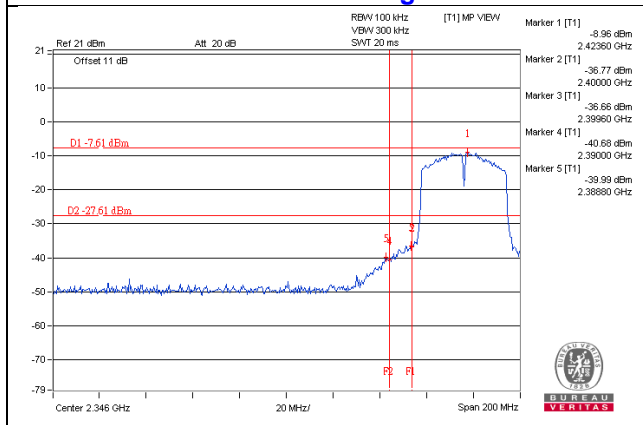

#### CH 9 Band edge

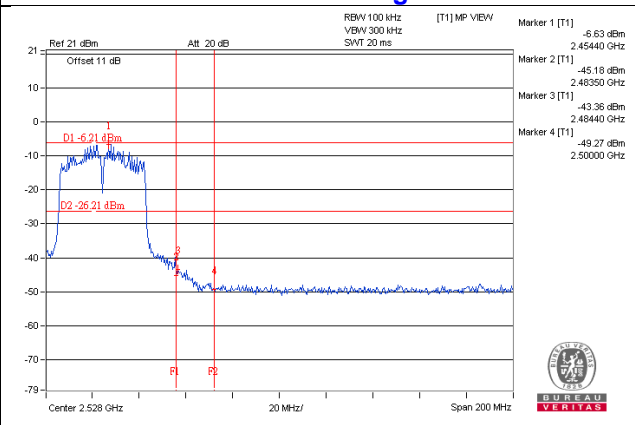

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---