

Supplemental “Transmit Simultaneously” Test Report

Report No.: RF141112E01A-5 R1

FCC ID: MQT-XCE200WU

Test Model: xCE-200WU-UH

Series Model: xCE-200WU-U

Received Date: Dec. 29, 2014

Test Date: Dec. 29, 2014 to Jan. 29, 2015

Issued Date: Apr. 10, 2015

Applicant: XAC AUTOMATION CORP.

Address: 4F, No. 30, INDUSTRY E. RD. IX, SCIENCE-BASED INDUSTRIAL PARK, HSINCHU, TAIWAN

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

Lab Address: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.

Test Location (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty.....	5
2.2 Modification Record.....	5
3 General Information	6
3.1 General Description of EUT.....	6
3.1.1 Test Mode Applicability and Tested Channel Detail.....	8
3.2 Description of Support Units.....	10
3.2.1 Configuration of System under Test.....	11
4 Test Types and Results	12
4.1 Radiated Emission and Bandedge Measurement.....	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	12
4.1.2 Test Instruments.....	13
4.1.3 Test Procedures.....	15
4.1.4 Deviation from Test Standard.....	15
4.1.5 Test Setup.....	16
4.1.6 EUT Operating Conditions.....	16
4.1.7 Test Results.....	17
4.2 Conducted Emission Measurement.....	19
4.2.1 Limits of Conducted Emission Measurement.....	19
4.2.2 Test Instruments.....	19
4.2.3 Test Procedures.....	20
4.2.4 Deviation from Test Standard.....	20
4.2.5 Test Setup.....	20
4.2.6 EUT Operating Conditions.....	20
4.2.7 Test Results.....	21
4.3 Conducted Out of Band Emission Measurement.....	23
4.3.1 Limits of Conducted Out of Band Emission Measurement.....	23
4.3.2 Test Setup.....	23
4.3.3 Test Instruments.....	23
4.3.4 Test Procedures.....	23
4.3.5 Deviation from Test Standard.....	23
4.3.6 EUT Operating Conditions.....	23
4.3.7 Test Results.....	24
5 Pictures of Test Arrangements	25
Appendix – Information on the Testing Laboratories	26



A D T

Release Control Record

Issue No.	Description	Date Issued
RF141112E01A-5	Original release.	Feb. 16, 2015
RF141112E01A-5 R1	1. Added the model names. 2. Modified the antenna model name and gain.	Apr. 10, 2015



1 Certificate of Conformity

Product: Terminal

Brand: XAC

Test Model: xCE-200WU-UH

Series Model: xCE-200WU-U

Sample Status: ENGINEERING SAMPLE

Applicant: XAC AUTOMATION CORP.

Test Date: Dec. 29, 2014 to Jan. 29, 2015

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2009

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Phoenix Huang , **Date:** Apr. 10, 2015
Phoenix Huang / Specialist

Approved by : May Chen , **Date:** Apr. 10, 2015
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -7.7dB at 0.58563MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -3.0dB at 62.74MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.86 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.37 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.65 dB
	6GHz ~ 18GHz	3.88 dB
	18GHz ~ 40GHz	4.11 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Terminal
Brand	XAC
Test Model	xCE-200WU-UH
Series Model	xCE-200WU-U
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	<p>For WLAN: CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM</p> <p>For Bluetooth: GFSK, $\pi/4$-DQPSK, 8DPSK for FHSS GFSK for DTS</p> <p>For WWAN(2G/3G): GMSK for GPRS GMSK, 8PSK for EDGE BPSK for WCDMA, HSDPA, HSUPA</p>
Modulation Technology	<p>For WLAN: DSSS, OFDM For Bluetooth: FHSS, DTS For WWAN(2G/3G): GPRS, EDGE, WCDMA, HSDPA, HSUPA</p>
Transfer Rate	<p>For WLAN: 802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 72.2Mbps</p> <p>For Bluetooth: up to 3Mbps</p>
Operating Frequency	<p>For WLAN: 2.412 ~ 2.462GHz For Bluetooth: 2.402 ~ 2.480GHz For WWAN(2G/3G): GPRS, EDGE: 824.2MHz ~ 848.8MHz WCDMA, HSDPA, HSUPA: 826.4MHz ~ 846.6MHz</p>
Number of Channel	<p>For WLAN: 11 for 802.11b, 802.11g, 802.11n (HT20)</p> <p>For Bluetooth: BT-EDR mode: 79 BT-LE mode: 40</p>
Output Power	<p>For WLAN: 802.11b: 84.723mW 802.11g: 220.293mW 802.11n (HT20): 224.388mW</p> <p>For Bluetooth: BT-EDR mode: 5.689mW BT-LE mode: 5.794mW</p>

Max. ERP Power	For WWAN(2G/3G): GPRS 850: 891.25mW EDGE 850: 309.03mW WCDMA Band V: 241.5mW
Max. EIRP Power	For WWAN(2G/3G): GPRS 1900: 1380.4mW EDGE 1900: 631.0mW WCDMA Band II: 829.9mW
Antenna Type	Please see NOTE
Antenna Connector	Please see NOTE
Accessory Device	Adapter × 1 Handset × 1
Data Cable Supplied	NA

Note:

1. The EUT has below model names, which are identical to each other in all aspects except for the following table:

Brand Name	Model No.	Description
XAC	xCE-200WU-UH	With 3G (Voice+Data) function and has Handset.
	xCE-200WU-U	With 3G (Data) function.

From the above models, model: **xCE-200WU-UH** was selected as representative model for the test and its data was recorded in this report.

2. WLAN, Bluetooth, GSM and WCDMA technology can transmit at same time.

3. The EUT could be supplied with a power adapter as the following table:

Brand	Model No.	Spec.
LITEON	PA-1061-71	AC I/P: 100-240V, 50-60Hz, 1.5A AC input cable (Unshielded, 1.8m) DC O/P: 12V, 5A DC output cable(Unshielded, 1.05m, with one core)

4. The antennas provided to the EUT, please refer to the following table:

GSM / WCDMA Antenna Spec.

Brand	Model No.	Antenna Type	Antenna Connector	Gain(dBi)	Frequency (MHz)
Ethertronics Inc.	T-000084-01	FPCB	NA	0.14	850
				2.57	1900

WLAN / Bluetooth Antenna Spec.

Brand	Model No.	Antenna Type	Antenna Connector	Gain(dBi)	Frequency (MHz)
ACX	AT8010-E2R9HAA	Chip	NA	2.5	2400-2500

5. The EUT incorporates a SISO function.

MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	1TX	1RX
802.11g	6 ~ 54Mbps	1TX	1RX
802.11n (HT20)	MCS 0~7	1TX	1RX

6. When EUT is under LAN mode, the EUT wireless function will be disabled.

7. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.1.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	OB	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
OB: Conducted Out-Band Emission Measurement

Radiated Emission Test (Above 1GHz):

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20) +	1 to 11	6	OFDM	BPSK	6
Bluetooth LE-GFSK +	0 to 39	0	DTS	GFSK	1
WWAN(2G/3G)	128 to 251	189	GPRS	GMSK	-

Radiated Emission Test (Below 1GHz):

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20) +	1 to 11	6	OFDM	BPSK	6
Bluetooth LE-GFSK +	0 to 39	0	DTS	GFSK	1
WWAN(2G/3G)	128 to 251	189	GPRS	GMSK	-

Power Line Conducted Emission Test:

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20) +	1 to 11	6	OFDM	BPSK	6
Bluetooth LE-GFSK +	0 to 39	0, 19, 39	DTS	GFSK	1
WWAN(2G/3G)	128 to 251	189	GPRS	GMSK	-

Conducted Out-Band Emission Measurement:

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20) +	1 to 11	6	OFDM	BPSK	6
Bluetooth LE-GFSK +	0 to 39	0	DTS	GFSK	1
WWAN(2G/3G)	128 to 251	189	GPRS	GMSK	-



Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	22deg. C, 68%RH	120Vac, 60Hz	Tim Ho
RE≥1G	22deg. C, 67%RH	120Vac, 60Hz	Andy Ho
PLC	24deg. C, 55%RH	120Vac, 60Hz	Wythe Lin
OB	25deg. C, 60%RH	120Vac, 60Hz	Tim Ho

3.2 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID	Remark
A	iPod shuffle	Apple	MC749TA/A	CC4DMFKUDF DM	NA	Provided by Lab
B	iPod shuffle	Apple	MD778TA/A	CC4JMA9KF4T 1	NA	Provided by Lab
C	iPod shuffle	Apple	MC749TA/A	CC4DN25WDF DM	NA	Provided by Lab
D	iPod shuffle	Apple	MC749TA/A	CC4DN29UDFD M	NA	Provided by Lab
E	Micro SD Card	Sandisk	2GB	NA	NA	Provided by Lab
F	SIM Card	NA	NA	NA	NA	Provided by Lab
G	Telephone Line Simulator	TELTONE	TLS-5C-01	250-00193-07	NA	Provided by Lab
H	ANTENNA	NI	Labview ver5.1	G11X54250	NA	Provided by Lab
I	Universal Radio Communication Tester	R&S	CMU200	121040	NA	Provided by Lab

NOTE:


1. All power cords of the above support units are non-shielded (1.8 m).

No.	Cable	Qty.	Length (m)	Shielded (Yes/ No)	Cores (Number)	Remark
1	DC	1	1.05	No	1	Supplied by Client
2	USB	1	0.1	Yes	0	Provided by Lab
3	RS232	1	1.5	Yes	0	Supplied by Client
4	RJ-45	1	10	No	0	Provided by Lab
5	RJ-11	1	1.5	No	0	Provided by Lab
6	Micro USB	1	1.5	No	0	Provided by Lab
7	RS232	1	1.5	Yes	0	Supplied by Client
8	AC	1	1.8	No	0	Supplied by Client
9	RF	1	10	Yes	0	Provided by Lab

NOTE:

1. The core(s) is(are) originally attached to the cable(s).

3.2.1 Configuration of System under Test

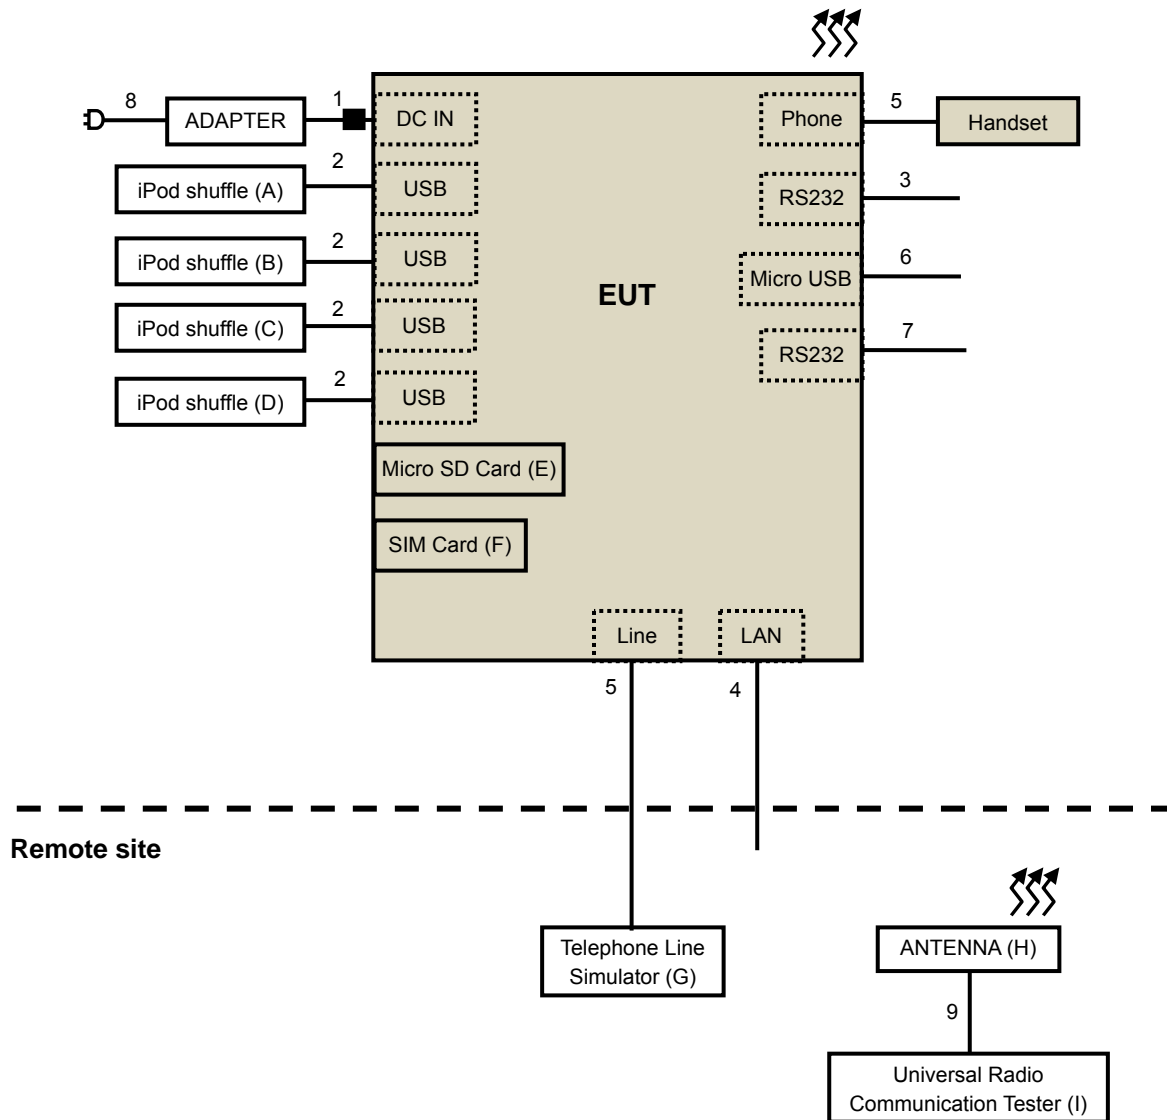

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Below 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	July 21,2014	July 20,2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 04, 2014	Oct. 03, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Aug. 27, 2014	Aug. 26, 2015
Pre-Amplifier Agilent	8449B	3008A02578	June 24, 2014	June 23, 2015
RF Cable	NA	131205 131214 SNMY23684/4	Jan. 17, 2014	Jan. 16, 2015
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Pre-Amplifier EMCI	EMC184045	980143	Jan. 17, 2014	Jan. 16, 2015
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Aug. 26, 2014	Aug. 25, 2015
RF Cable	NA	RF104-121 RF104-204	Dec. 11, 2014	Dec. 10, 2015
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Dec. 29, 2014

For Above 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	July 21, 2014	July 20, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 04, 2014	Oct. 03, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Aug. 27, 2014	Aug. 26, 2015
Pre-Amplifier Agilent	8449B	3008A02578	June 24, 2014	June 23, 2015
RF Cable	NA	131205 131214 SNMY23684/4	Jan. 16, 2015	Jan. 15, 2016
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Pre-Amplifier EMCI	EMC184045	980143	Jan. 15, 2015	Jan. 14, 2016
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Aug. 26, 2014	Aug. 25, 2015
RF Cable	NA	RF104-121 RF104-204	Dec. 11, 2014	Dec. 10, 2015
Antenna Tower & Turn Table CT	NA	NA	NA	NA
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2014	May 07, 2015
Power meter Anritsu	ML2495A	1014008	Apr. 30, 2014	Apr. 29, 2015
Power sensor Anritsu	MA2411B	0917122	Apr. 30, 2014	Apr. 29, 2015
Temperature & Humidity Chamber GIANTFORCE	GTH-150-40-S P-AR	MAA0812-008	Jan. 12, 2015	Jan. 11, 2016

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Jan. 19, 2015

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

<Frequency Range below 1GHz>

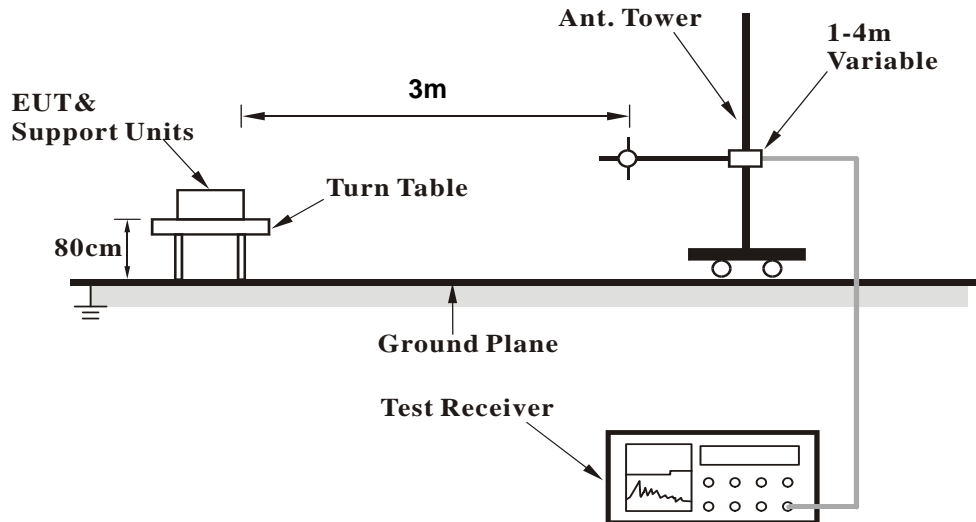

<Frequency Range above 1GHz>

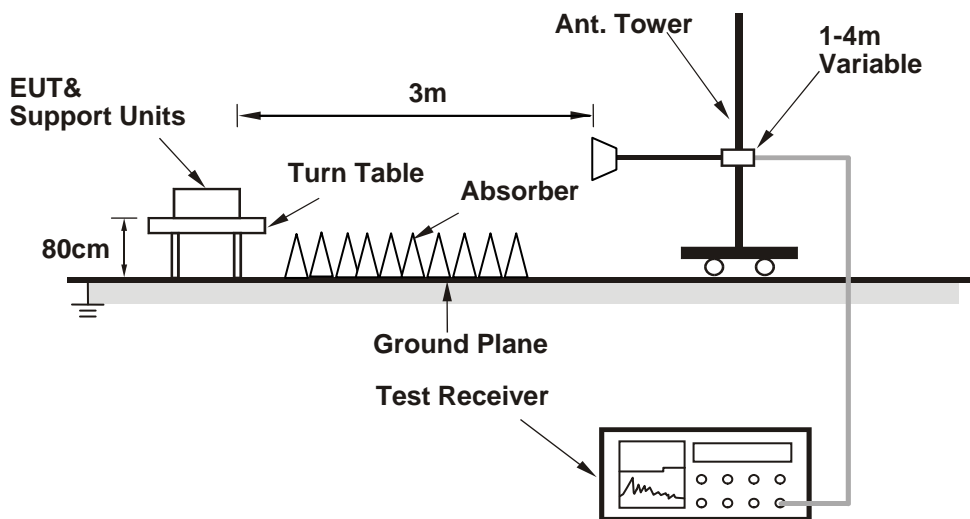

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

1. The EUT which is placed on table.
2. The communication partner run test program "Hyper Terminal paste WiFi.txt" to enable EUT under transmission/receiving condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data:

FREQUENCY RANGE	1GHz ~ 25GHz	DETECTOR FUNCTION	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4804.00	47.1 PK	74.0	-26.9	1.06 H	150	43.66	3.44
2	4804.00	37.9 AV	54.0	-16.1	1.06 H	150	34.46	3.44
3	4874.00	49.0 PK	74.0	-25.0	1.34 H	136	45.60	3.40
4	4874.00	40.5 AV	54.0	-13.5	1.34 H	136	37.10	3.40
5	7311.00	53.0 PK	74.0	-21.0	1.13 H	148	45.24	7.76
6	7311.00	39.9 AV	54.0	-14.1	1.13 H	148	32.14	7.76

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4804.00	47.2 PK	74.0	-26.8	1.00 V	357	43.76	3.44
2	4804.00	38.3 AV	54.0	-15.7	1.00 V	357	34.86	3.44
3	4874.00	49.0 PK	74.0	-25.0	1.42 V	316	45.60	3.40
4	4874.00	37.9 AV	54.0	-16.1	1.42 V	316	34.50	3.40
5	7311.00	53.7 PK	74.0	-20.3	1.24 V	48	45.94	7.76
6	7311.00	41.7 AV	54.0	-12.3	1.24 V	48	33.94	7.76

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Below 1GHz Data:

FREQUENCY RANGE	Below 1GHz	DETECTOR FUNCTION	Quasi-Peak (QP)
------------------------	------------	--------------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.93	35.2 QP	40.0	-4.8	2.00 H	360	49.31	-14.13
2	214.35	40.4 QP	43.5	-3.1	1.00 H	100	56.27	-15.83
3	250.00	40.1 QP	46.0	-6.0	1.00 H	83	53.97	-13.92
4	374.98	38.4 QP	46.0	-7.6	1.00 H	315	48.16	-9.78
5	749.98	32.7 QP	46.0	-13.4	1.00 H	328	33.86	-1.21
6	875.02	39.4 QP	46.0	-6.7	1.00 H	145	39.04	0.31

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.74	37.0 QP	40.0	-3.0	1.00 V	279	51.07	-14.10
2	101.89	40.4 QP	43.5	-3.1	1.50 V	270	57.47	-17.07
3	142.91	35.8 QP	43.5	-7.7	1.50 V	350	48.86	-13.09
4	214.40	37.4 QP	43.5	-6.1	1.00 V	249	53.23	-15.83
5	375.03	34.7 QP	46.0	-11.4	1.00 V	360	44.43	-9.78
6	875.02	34.6 QP	46.0	-11.4	1.50 V	246	34.31	0.31

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Apr. 29, 2014	Apr. 28, 2015
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Sep. 15, 2014	Sep. 14, 2015
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ENV216	100071	Nov. 10, 2014	Nov. 09, 2015
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 10, 2014	Mar. 09, 2015
50 ohms Terminator	N/A	EMC-03	Sep. 22, 2014	Sep. 21, 2015
50 ohms Terminator	N/A	EMC-02	Sep. 30, 2014	Sep. 29, 2015
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Dec. 30, 2014

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

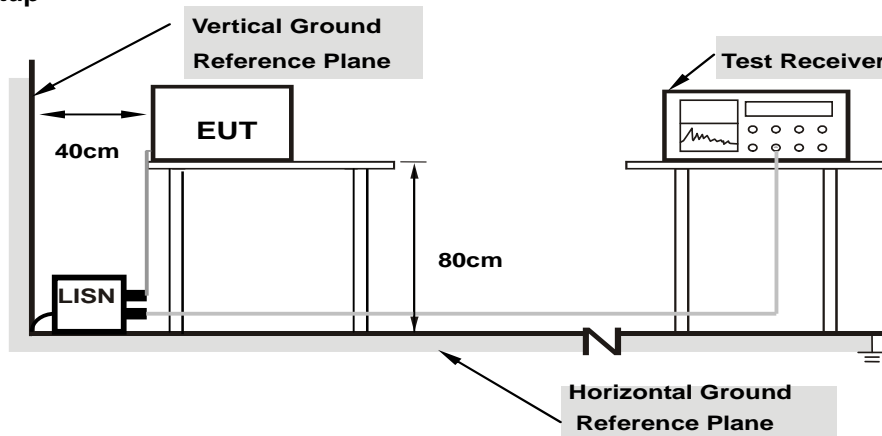

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15420	0.07	53.47	45.20	53.54	45.27	65.77	55.77	-12.24	-10.51
2	0.19845	0.07	47.20	36.04	47.27	36.11	63.68	53.68	-16.41	-17.57
3	0.58563	0.10	43.25	38.20	43.35	38.30	56.00	46.00	-12.65	-7.70
4	0.82284	0.12	31.04	26.44	31.16	26.56	56.00	46.00	-24.84	-19.44
5	2.74593	0.21	29.04	24.19	29.25	24.40	56.00	46.00	-26.75	-21.60
6	14.70561	0.58	29.20	24.54	29.78	25.12	60.00	50.00	-30.22	-24.88

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

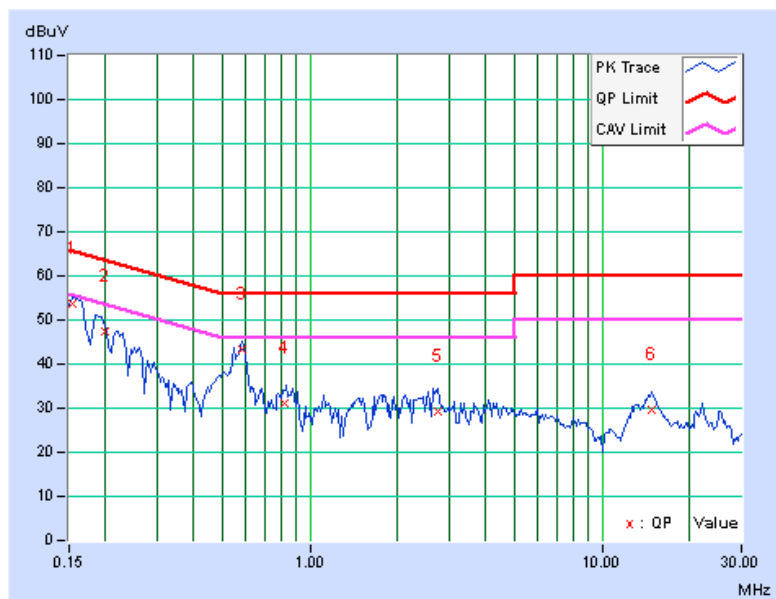


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15746	0.06	53.63	44.01	53.69	44.07	65.60	55.60	-11.90	-11.52
2	0.19625	0.06	47.50	35.71	47.56	35.77	63.77	53.77	-16.21	-18.00
3	0.58563	0.10	42.46	37.50	42.56	37.60	56.00	46.00	-13.44	-8.40
4	0.82284	0.12	30.10	25.60	30.22	25.72	56.00	46.00	-25.78	-20.28
5	2.74593	0.21	29.62	24.46	29.83	24.67	56.00	46.00	-26.17	-21.33
6	14.70561	0.60	29.80	24.20	30.40	24.80	60.00	50.00	-29.60	-25.20

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

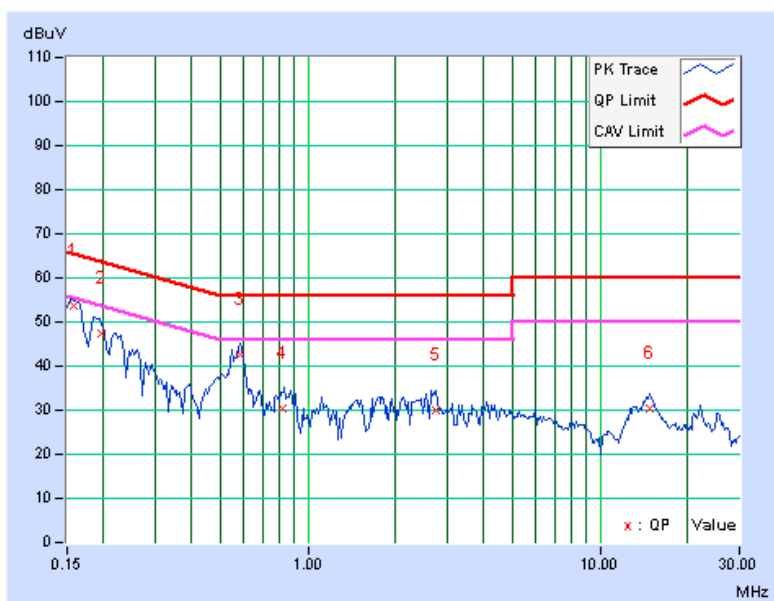


4.3 Conducted Out of Band Emission Measurement

4.3.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedures

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.3.5 Deviation from Test Standard

No deviation.


4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11n (HT20)_CH6 + Bluetooth LE-GFSK_CH0 + WWAN(2G/3G)_CH189

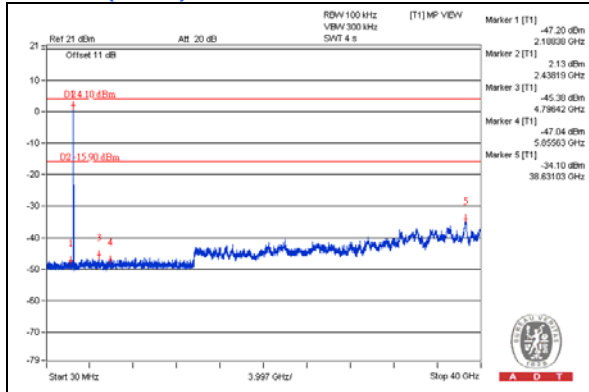

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



A D T

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---