

TABLE OF CONTENTS LIST

APPLICANT: ADCON TELEMETRY, INC.

FCC ID: MQXA720

TEST REPORT CONTAINING:

PAGE 1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCRIPTIVE
PAGE 2.....TECHNICAL DESCRIPTION CONTD. AND RF POWER OUTPUT
PAGE 3.....RF POWER OUTPUT CONTD. & MODULATION CHARACTERISTICS
PAGE 4.....OCCUPIED BANDWIDTH
PAGE 5.....SPURIOUS EMISSIONS AT ANTENNA TERMINALS AND
FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE 6.....FREQUENCY STABILITY
PAGE 7.....CERTIFICATION OF TECHNICAL DATA
PAGE 8.....LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT 1.....POWER OF ATTORNEY LETTER
EXHIBIT 2.....FCC ID LABEL SAMPLE
EXHIBIT 3.....SKETCH OF FCC ID LABEL LOCATION
EXHIBIT 4.....SCHEMATIC
EXHIBIT 5A.....EXTERNAL FRONT VIEW PHOTO
EXHIBIT 5B.....EXTERNAL REAR VIEW PHOTO
EXHIBIT 5C.....EXTERNAL SIDE VIEW PHOTO
EXHIBIT 5D.....INTERNAL COMPONENT SIDE - SMALL BOARD
EXHIBIT 5E.....INTERNAL COMPONENT SIDE - MAIN BOARD
EXHIBIT 5F.....INTERNAL SOLDER SIDE - MAIN BOARD
EXHIBIT 6.....OCCUPIED BANDWIDTH - CW - 12.5KHz
EXHIBIT 7.....OCCUPIED BANDWIDTH - "0" MODULATION 12.5KHz
EXHIBIT 8.....OCCUPIED BANDWIDTH - "1'S" MODULATION 12.5KHz
EXHIBIT 9.....OCCUPIED BANDWIDTH - ALTERNATELY "0" & "1" 12.5KHz
EXHIBIT 10.....OCCUPIED BANDWIDTH - CW - 25KHz
EXHIBIT 11.....OCCUPIED BANDWIDTH - "0" MODULATION 25KHz
EXHIBIT 12.....OCCUPIED BANDWIDTH - "1'S" MODULATION 25KHz
EXHIBIT 13.....OCCUPIED BANDWIDTH - ALTERNATELY "0" & "1" 25KHz

TECHNICAL MANUAL CONTAINING:

BLOCK DIAGRAM.....PAGE 6
TUNING PROCEDURE.....PAGES 12-13
CIRCUIT DESCRIPTIONS.....PAGES 20-21
PARTS LIST.....PAGES 24-27
CRYSTAL SPECIFICATION.....PAGE 28
ADDITIONAL PHOTOGRAPHS...PAGE 29-33
INSTRUCTIONS.....PAGES 34-51

APPLICANT: ADCON TELEMETRY, INC.

FCC ID: MQXA720

REPORT #: F:\CUS\A\ADCON\ADC302U8.RPT

PAGE: TABLE OF CONTENTS

GENERAL_INFORMATION_REQUIRED
FOR_TYPE_ACCEPTANCE

2.983 (a,b,c) ADCON TELEMETRY, INC. will sell the MQXA720, in quantity, for use under FCC RULES PART 90.217(a).

2.983 (d) TECHNICAL_DESCRIPTION

(1) ALLOWED AUTHORIZED BANDWIDTH = 11.25KHz.
90.209(b)(5)

Bn = 2M + 2DK
M = 1500/2 = 750
D = 3.0KHz (Peak Deviation)
K = 1
Bn = 2(.75K) + 2(3.0K)(1) = 1.5K + 6.0K = 7.5K
This transmitter uses MSK(MINIMUM SHIFT KEYING).

Type of Emission: 7K5F1D

(2) ALLOWED AUTHORIZED BANDWIDTH = 20.0KHz.
90.209(b)(5)

Bn = 2M + 2DK
M = 1500/2 = 750
D = 3.2KHz (Peak Deviation)
K = 1
Bn = 2(.75K) + 2(3.2K)(1) = 1.5K + 6.4K = 7.9K
This transmitter is frequency modulated F2d using two(2) different tones, 1900Hz & 3000Hz.

Type of Emission: 7K9F1D

ALLOWED AUTHORIZED BANDWIDTH = 40KHz

(2) Frequency Range: Part 90: 432-470MHz
(3) Power Range and Controls: Power is has no controls.
(4) Maximum Output Power Rating: 120 Milli-Watts into a 50 ohm resistive load.
(5) DC Voltages and Current into Final Amplifier:
Not Applicable.
(6) Function of each electron tube or semiconductor device or other active circuit device:

APPLICANT: ADCON TELEMETRY, INC.
FCC ID: MQXA720
REPORT #: F:\CUS\A\ADCON\ADC302U8.RPT
PAGE #: 1

2.983(d) (7) Complete Circuit Diagrams: The circuit diagram is in 7. The block diagram is in 5. The part list is in PAGES 24-27 OF TECHNICAL MANUAL.

(8) Instruction book. The instruction manual is included as PAGES 34-51 OF TECHNICAL MANUAL

(9) Tune-up procedure. The tune-up procedure is given in PAGES 12-13 IN TECHNICAL MANUAL.

(10) Description of all circuitry and devices provided for determining and stabilizing frequency.
The transmitter frequency is controlled by a crystal, the crystal specifications are included in PAGE 28 OF TECHNICAL MANUAL.


(11) Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power.
This circuitry is described in &cirdes&.
Limiting Modulation:
The transmitter audio circuitry is described in the Technical documentation.
Limiting Power:
There is no provision for limiting power.

(12) Digital modulation. This unit does use digital modulation.

2.983(e) The data required by 2.985 through 2.997 is submitted below.

2.985(a) RF_power_output.
ERP was measured by connecting a signal generator to a dipole antenna and adjusting the level to produce the same field strength at the UUT.

APPLICANT: ADCON TELEMETRY, INC.
FCC ID: MQXA720
REPORT #: F:\CUS\A\ADCON\ADC302U8.RPT
PAGE #: 2

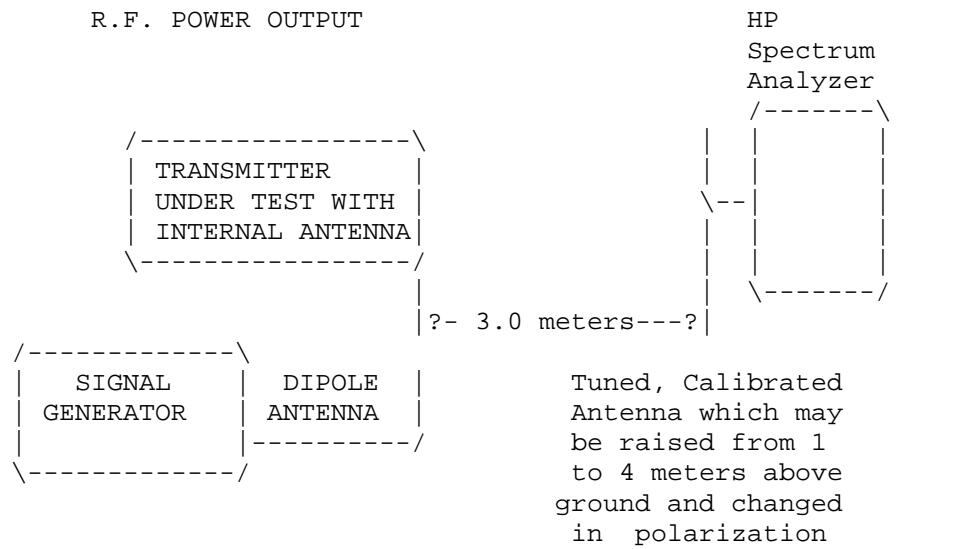

Equipment placed 1 meter above ground
on a rotatable platform. The center of the Dipole antenna at the
center of the platform and the output of the signal generator adjusted
to produce the same meter reading as measured for the fundamental in
the radiated emissions test.

2.987(a)(b) Modulation_characteristics:

AUDIO_FREQUENCY_RESPONSE
Not required.

AUDIO_LOW_PASS_FILTER
Not required this part.

2.987(b) Audio_input_versus_modulation
Not applicable because there is no I/O port.


APPLICANT: ADCON TELEMETRY, INC.
FCC ID: MQXA720
REPORT #: F:\CUS\A\ADCON\ADC302U8.RPT
PAGE #: 3

2.989(c) Occupied_bandwidth:

Data in the plots show that the 30 dB occupied bandwidth is less than 20KHz. The plots show the transmitter modulated with the worst(greatest bandwidth) case combination of controls.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

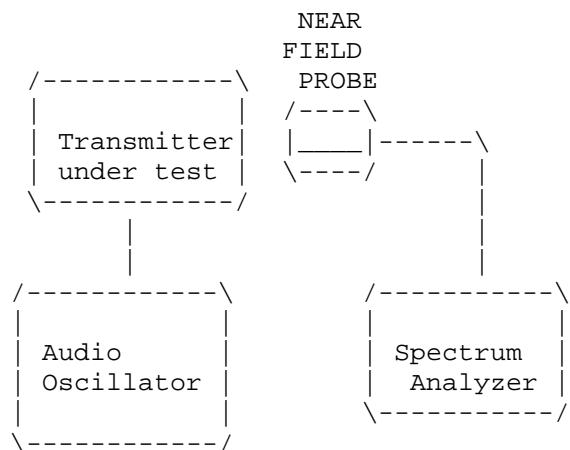

REQUIREMENT: PART 90.217 EMISSION BANDWIDTH PLUS FREQUENCY STABILITY <40KHz AT 30dB.

APPLICANT: ADCON TELEMETRY, INC.
FCC ID: MQXA720
REPORT #: F:\CUS\A\ADCON\ADC302U8.RPT
PAGE #: 4

2.991 Spurious_emissions_at_antenna_terminals(conducted):
 Not required because this unit does not have a
 connector.

2.993(a)(b) Field_strength_of_spurious_emissions:
S90.217(a)

REQUIREMENTS: Emissions must be 30dB below the mean power output
 of the transmitter.

30 dB below the unmodulated carrier

TEST DATA:

EMISSION FREQUENCY MHz	METER READING @ 3m dBuV	COAX LOSS dB	ACF dB	FIELD STRENGTH dBuV/m	ATT. LEVEL dB	MARGIN dB	ANT.
450.00	88.10	1.60	18.15	107.85	0.0	0.0	V
900.00	20.10	2.90	24.20	47.20	60.65	30.65	V
1350.00	8.50	1.00	25.40	34.90	72.95	42.95	V
1800.00	3.40	1.00	27.20	31.60	76.25	46.25	H

METHOD OF MEASUREMENT: The procedure used was C63.4-1992 operated into its own built-in antenna at a height of 1.5 meters above the ground plane. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer, an Eaton model 94455-1 Biconical Antenna, ElectroMetrics antennas models TDA, TDS-25-1, TDS-25-2 RGA 180. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th LANE, GAINESVILLE, FL. 32605.

APPLICANT: ADCON TELEMETRY, INC.
FCC ID: MQXA720
REPORT #: F:\CUS\A\ADCON\ADC302U8.RPT
PAGE #: 5

2.995(a)(b)(d) Frequency_stability:

Temperature and voltage tests were performed to verify that the frequency remains within the .0005%,(5 ppm), manufacturer's specification limit.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 450.000 150 MHz

TEMPERATURE_C	FREQUENCY_MHz	PPM
-30	449.999 250	-2.00
-20	449.999 400	-1.66
-10	449.999 640	+0.90
0	450.000 880	+1.95
10	450.000 730	+1.62
20	450.000 340	+0.76
30	450.000 100	+0.23
40	449.999 840	-0.35
50	449.999 270	-1.62

BATTERY END-POINT

25c END BATT. Volt(6.7)= 5.00VDC 450.000 040 + 0.10

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -2.00 to +1.95 ppm. The maximum frequency variation over the voltage range was +0.10 ppm.

APPLICANT: ADCON TELEMETRY, INC.
FCC ID: MQXA720
REPORT #: F:\CUS\A\ADCON\ADC302U8.RPT
PAGE #: 6

2.983(f) Photo_or_Drawing_of_Label:
See EXHIBIT 2.

2.983(g) Photos_of_Equipment:
See EXHIBITS 5A-5D.

2.997 Frequency Spectrum Investigated The Spectrum was investigated from 0.400 to 4.7GHz.

2.999 Measurement_Procedures_for_Type_Acceptance:
Measurement techniques have been in accordance with ANSI & EIA specifications and the FCC requirements.

2.909 Certification_of_Technical_Data_by_Engineers
We, the undersigned, certify that the enclosed measurements and enclosed data are true and correct.

S.S. SANDERS
S.S. Sanders
Engineer

APPLICANT: ADCON TELEMETRY, INC.
FCC ID: MQXA720
REPORT #: F:\CUS\A\ADCON\ADC302U8.RPT
PAGE #: 7

LIST_OF_TEST_EQUIPMENT

1. Spectrum Analyzer: Hewlett Packard 8566B - Opt 462, w/ preselector 85685A, & Quasi-Peak Adapter HP 85650A, & HP 8449B - OPT H02 Cal. 6/26/98
2. Signal Generator, Hewlett Packard 8640B, cal. 10/1/98
3. Eaton Biconnical Antenna Model 94455-1
20-200 MHz Serial No. 0997 Cal. 5/15/98
4. Electro-Metric Dipole Kit, 20-1000 MHz, Model TDA-30 10/15/98
5. Electro-Metric Horn 1-18 GHz, Model RGA-180, Cal. 8/15/98
6. Electro-Metric Antennas Model TDS-25-1, TDS-25-2, 5/15/97
7. Electro-Metric Line Impedance Stabilization Network Model No. EM-7821, Serial No. 101; 100KHz-30MHz 50uH. 12/3/97
8. Electro-Metric Line Impedance Stabilization Network Model No. EM-7820, Serial No. 2682; 10KHz-30MHz 50uH. 12/3/97
9. Special low loss cable was used above 1 GHz
10. Tenney Temperature Chamber

APPLICANT: ADCON TELEMETRY, INC.
FCC ID: MQXA720
REPORT #: F:\CUS\A\ADCON\ADC302U8.RPT
PAGE #: 8