

TEST REPORT

REPORT NO: SATEL-TR-TiM
TEST PERIOD: 27.10.2009
TEST SITE: Satel / R&D Dept., Salo

DEVICE UNDER TEST: SATEL-TA13

TESTS PERFORMED:

- Occupied bandwidth at 12.5 kHz channel spacing (page 2, figure 1)
- Occupied bandwidth at 25 kHz channel spacing (page 3, figure 2)

LIST OF MEASURING EQUIPMENT:


- Power supply Thurlby Thandar Instruments EX354T Serial nro. 140816
 - Spectrum analyzer Rohde & Schwarz FSP Serial nro. 100428
-

TESTS PERFORMED BY:

Timoteus Marttila

TEST RESULTS


#1 Test at 12.5 kHz channel spacing

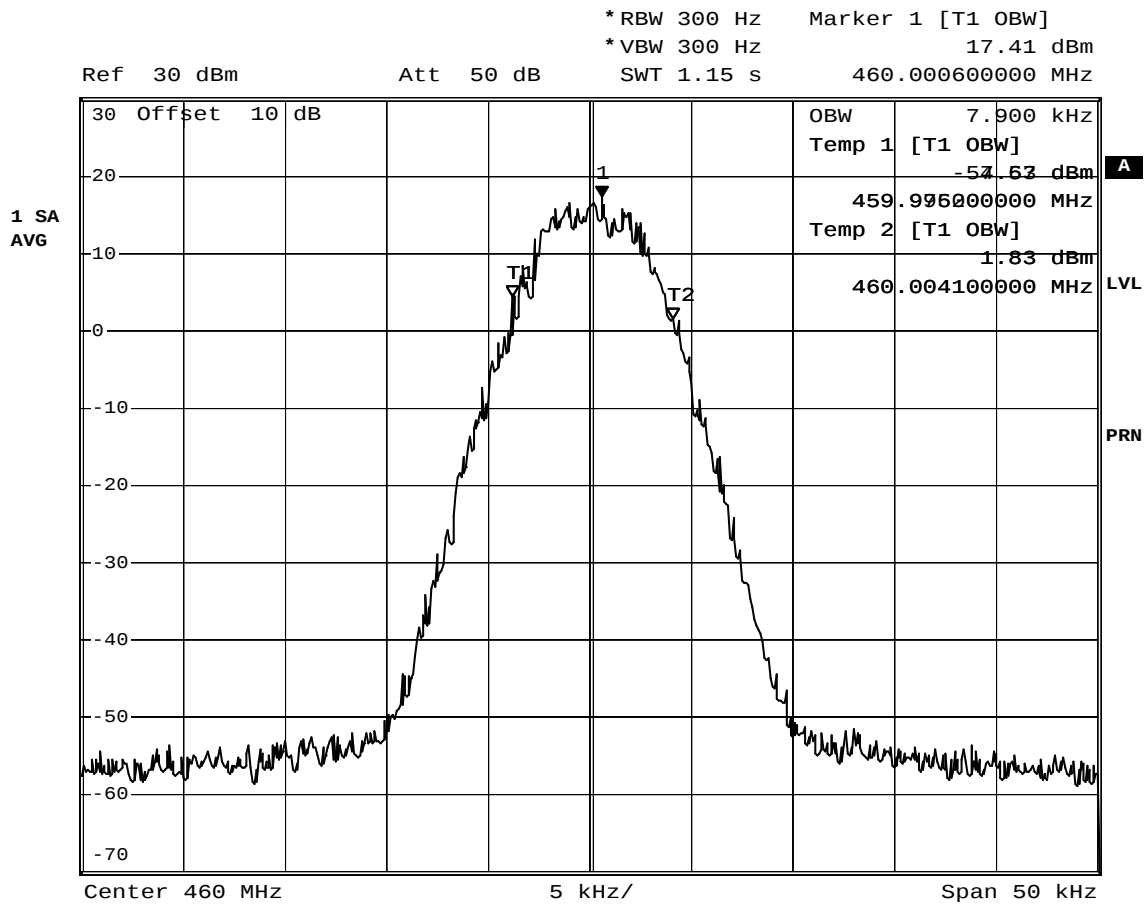

Date: 27.OCT.2009 09:57:57

Figure 1. Occupied bandwidth at 12.5 kHz. OBW = 7.9 kHz.

#2 Test at 25 kHz channel spacing

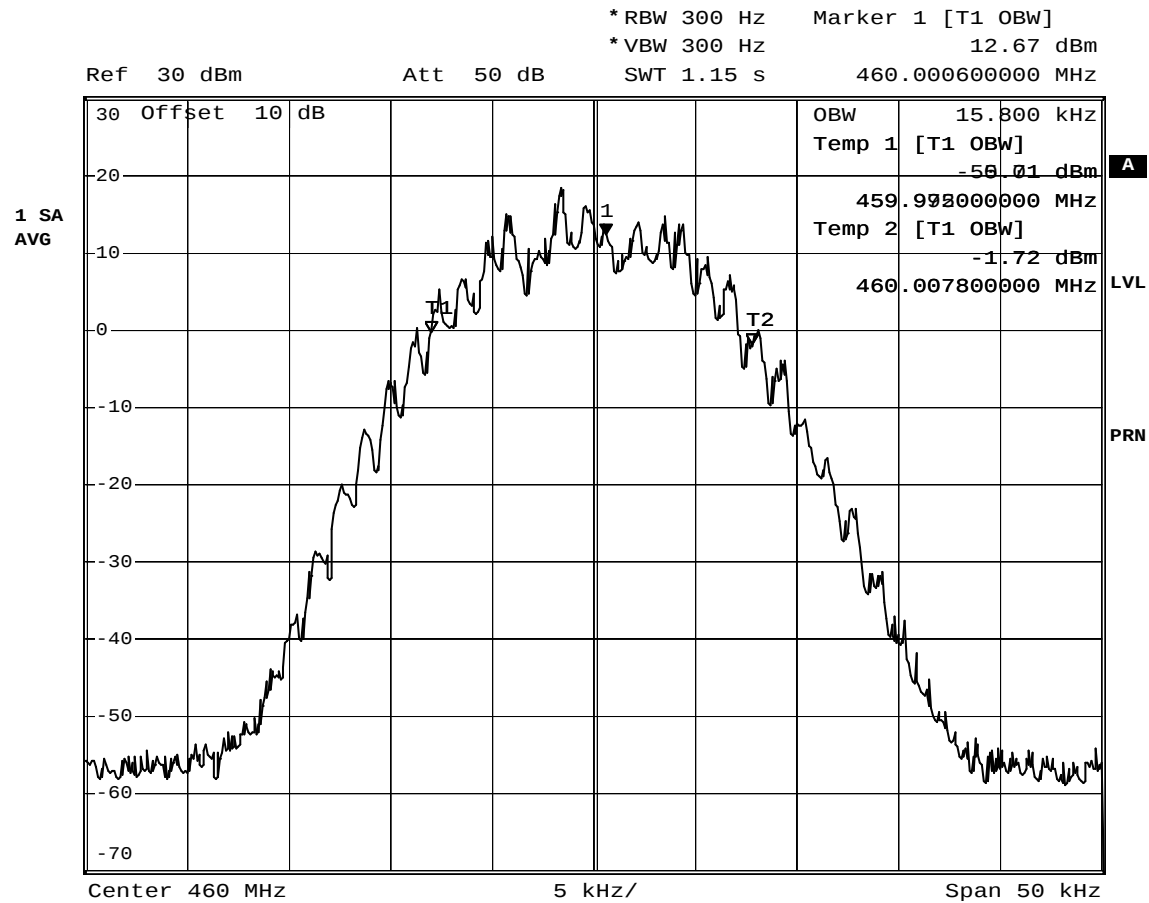

Date: 27.OCT.2009 09:59:43

Figure 2. Occupied bandwidth at 25 kHz. OBW = 15.8 kHz.