



Deutsche
Akkreditierungsstelle
D-PL-21375-01-02
D-PL-21375-01-03



BNetzA-CAB-21/21-21

Test Report

Test report no.: 22128206-31128-4

Date of issue: 2023-06-21

Test result: The test item - **passed** - and complies with the listed standards.

Applicant

Schrader Electronics Ltd

Manufacturer

Schrader Electronics Ltd

Test Item

BG6FD4

Radio Frequency Testing according to:

Title 47

FCC Regulations Subpart 15C

§15.231

Tested by
(name, function, signature)

Piotr Sardyko
Deputy Head of Laboratory RF


signature

Approved by
(name, function, signature)

Andreas Bender
Deputy Managing Director


signature

Applicant and Test item details	
Applicant	Schrader Electronics Ltd. 11 Technology Park, Belfast Road, BT41 1QS Antrim, Northern Ireland, UK
Manufacturer	Schrader Electronics Ltd. 11 Technology Park, Belfast Road, BT41 1QS Antrim, Northern Ireland, UK + Sensata Technologies China Co., Ltd. 18 Chuangxin Avenue, Xinbei District, Changzhou 213031, China + Sensata Technologies de Mexico S de RL de CV Av. Aguascalientes Sur # 401, Ex Ejido Salto de Ojocaliente, CP. 20290 Aguascalientes, Mexico
Test item description	TPMS sensor 433 MHz
Model/Type reference	BG6FD4
FCC ID	MRXBG6FD4

Disclaimer and Notes

The content of this test report relates to the mentioned test sample(s) only.
Without a written permit of IBL-Lab GmbH, this test report shall not be reproduced, except in full.

Copyright ©: All rights reserved by IBL-Lab GmbH

Within this test report, a point / comma is used as a decimal separator.
If otherwise, a detailed note is added adjoined to its use.

Decision rule: Binary Statement for Simple Acceptance Rule according ILAC-G8:09/2019

1 TABLE OF CONTENTS

.....	1
1 TABLE OF CONTENTS	3
2 GENERAL INFORMATION	4
2.1 ADMINISTRATIVE DETAILS.....	4
2.2 POSSIBLE VERDICTS OF THE RESULTS	4
2.3 OBSERVATIONS	4
2.4 OPINIONS AND INTERPRETATIONS.....	4
2.5 REVISION HISTORY.....	5
2.6 FURTHER DOCUMENTS	5
2.7 FORMULA FOR DETERMINATION OF CORRECTION VALUES (E_c)	5
2.8 SOFTWARE/FIRMWARE USED FOR MEASUREMENTS.....	5
2.9 BLOCK DIAGRAMS.....	6
3 ENVIRONMENTAL & TEST CONDITIONS	7
3.1 ENVIRONMENTAL CONDITIONS.....	7
4 TEST STANDARDS AND REFERENCES	7
5 EQUIPMENT UNDER TEST (EUT)	8
5.1 PRODUCT DESCRIPTION*	8
5.2 TECHNICAL DATA OF EQUIPMENT*	8
5.3 TEST ITEM (EQUIPMENT UNDER TEST) DESCRIPTION*	8
5.4 AUXILIARY EQUIPMENT (AE) DESCRIPTION*	9
5.5 TEST ITEM OPERATING MODES DESCRIPTION*	9
5.6 TEST ITEM SET-UPS DESCRIPTION	9
5.7 NORMAL EST CONDITIONS	9
5.8 ADDITIONAL INFORMATION	10
6 SUMMARY OF TEST RESULTS	11
7 TEST RESULTS	12
7.1 FUNDAMENTAL FIELD STRENGTH.....	12
7.2 RADIATED FIELD STRENGTH MEASUREMENTS.....	13
7.3 TRANSMIT TIME	15
7.4 OCCUPIED BANDWIDTH.....	16
8 MEASUREMENT EQUIPMENT	17
9 MEASUREMENT UNCERTAINTIES	20

2 GENERAL INFORMATION

2.1 Administrative details

Testing laboratory	IBL-Lab GmbH Heinrich-Hertz-Allee 7 66386 Sankt Ingbert / Germany Fon: +49 6894 38938-0 Fax: +49 6894 38938-99 URL: www.ib-lenhardt.de E-Mail: info@ib-lenhardt.de
Accreditation	<p>The testing laboratory is accredited by Deutsche Akkreditierungsstelle GmbH (DAkKS) in compliance with DIN EN ISO/IEC 17025:2018.</p> <p>Scope of testing and registration number:</p> <ul style="list-style-type: none"> • Electronics, EMC, Radio D-PL-21375-01-01 • Electromagnetic Compatibility and Telecommunication (FCC requirements) Testing Laboratory Designation Number D-PL-21375-01-02 DE0024 • Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards ISED Company Number D-PL-21375-01-03 27156 Testing Laboratory CAB Identifier DE0020 <p>Website DAkKS: https://www.dakks.de/</p> <p>The Deutsche Akkreditierungsstelle GmbH (DAkKS) is also a signatory to the ILAC Mutual Recognition Arrangement</p>
Date of receipt of test samples	2023-03-06
Start – End of tests	2023-03-06 – 2023-05-05

2.2 Possible verdicts of the results

Test sample meets the requirements	P (PASS) – the measured value is below the acceptance limit, AL = TL
Test sample does not meet the requirements	F (FAIL) – the measured value is above the acceptance limit, AL = TL
Test case does not apply to the test sample	N/A (Not applicable)
Test case not performed	N/P (Not performed)

2.3 Observations

No additional observations other than the reported observations within this test report have been made.

2.4 Opinions and Interpretations

No appropriate opinions or interpretations according ISO/IEC 17025:2017 clause 7.8.7 are within this test report.

2.5 Revision History	
-0 Initial Version	
-1:	<ul style="list-style-type: none"> - highest duty cycle was measured for time Transmit time test. A new sample with the mode with the highest duty cycle was used for it. So, chapter 7.3. was correspondingly corrected. - additional plots for Transmit time test were placed in Annex A - photos of the additional sample for Transmit time test were placed in Annex B
-2:	<ul style="list-style-type: none"> - Transmit time test / Duty cycle measurement was remade with a new sample with "long protocol mode" ("worst case" duty cyle). So, chapter 7.3. was correspondingly corrected. - OBW measurement was remade with a new sample with "FSK+ASK" mode. So, chapter 7.4 was correspondingly corrected. - Fundamental field strength measurement was remade with a sample without using external power supply (3 V internal battery was used). So, chapter 7.1 was correspondingly corrected. - Annexes A, B and C were accordingly corrected.
-3:	<ul style="list-style-type: none"> - Test Item Operating Modes Description is corrected
-4:	<ul style="list-style-type: none"> - Page 2: Applicant address is changed
This test report 22128206-31128-4 replaces the previous test report 22128206-31128-3 .	


2.6 Further documents	
List of further applicable documents belonging to the present test report:	
Measurement plots:	22128206-31128-4_Annex A
EUT photographs:	22128206-31128-4_Annex B
Test setup photographs:	22128206-31128-4_Annex C

2.7 Formula for determination of correction values (E _C)	
$E_C = E_R + AF + C_L + D_F - G_A$ (1)	<ul style="list-style-type: none"> E_C = Electrical field – corrected value E_R = Receiver reading M = Margin L_T = Limit AF = Antenna factor C_L = Cable loss D_F = Distance correction factor (if used) G_A = Gain of pre-amplifier (if used)
$M = L_T - E_C$ (2)	
All units are dB-units, positive margin means value is below limit.	

2.8 Software/Firmware used for measurements	
All measurements were done directly with spectrum analyzer or SW R&S EMC32.	
In some measurements (please see test equipment list for each test) R&S ESW 26 was used (please see chapter 8).	
(Instrument) Firmware Version: 1.70	
In some measurements (please see test equipment list for each test) R&S FSW 50 was used (please see chapter 8).	
(Instrument) Firmware Version: 4.61	
In some measurements SW R&S EMC32 was used.	
Version: 11.10.00	

2.9 Block diagrams

Block diagram 1:

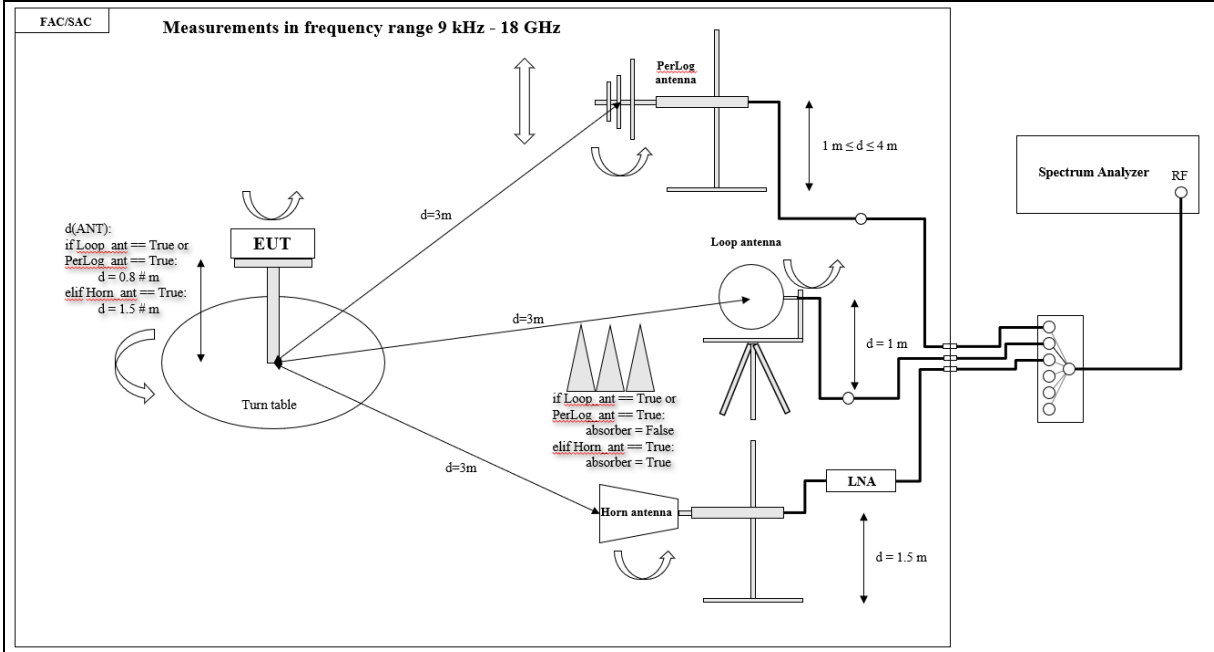

3 ENVIRONMENTAL & TEST CONDITIONS

3.1 Environmental conditions

Temperature	20°C ± 5°C
Relative humidity	25-75 % R.H.
Barometric Pressure	860-1060 mbar
Power supply	3V battery

4 TEST STANDARDS AND REFERENCES

Test standard (accredited)

FCC CFR Title 47 Part 15 Subpart C:2016	---
ANSI C63.10: 2013	---

Test standard (not accredited)

None

Reference	Description
none	---

5 EQUIPMENT UNDER TEST (EUT)

5.1 Product Description*

Low Power Short Range Device sensor 433.92 MHz fitted to vehicle tyre to transmit Frequency 433.92 MHz signal.

*: declared by the applicant

5.2 Technical Data of Equipment*

Number of channel:	1
Channel tested:	f_{cent} : 433.92 MHz
Modulation:	ASK / FSK
Duty cycle (%):	< 0.1 %
Spectrum Access Mechanism:	Duty Cycle
Adaptive Frequency Agility:	No
DSSS:	No
RF mode:	TX
Antenna Type:	Internal
Antenna gain:	-26.8 dBm
Antenna connector:	None
Equipment type:	Production model
Temperature range:	Tmin: -40 °C, Tmax: 120 °C
Type of power source:	DC power supply
Test source voltage:	Vnom: 3 VDC

*: declared by the applicant

5.3 Test Item (Equipment Under Test) Description*

Short designation	EUT Model	EUT Description	ID	Hardware status	Software status
EUT A	BG6FD4	TPMS (external DC power supply), housing A, CW	8194EF19	V:04	V: 0X100D 0X00700103
EUT B	BG6FD4	TPMS (external DC power supply), housing B, CW	8194EEF4	V:04	V: 0X100D 0X00700103
EUT C	BG6FD4	TPMS (internal 3 V battery), housing A, CW	8194EED3	V:04	V: 0X100D 0X00700103
EUT D	BG6FD4	TPMS (internal 3 V battery), housing B, CW	8194EF5C	V:04	V: 0X100D 0X00700103
EUT E	BG6FD4	TPMS (internal 3 V battery), housing A, CW	8194EEB8	V:04	V: 0X100D 0X00700103

EUT F	BG6FD4	TPMS (internal 3 V battery), housing B, modulated mode (op. 2)	N/A	V:04	V: 0X100D 0X00700103
EUT G	BG6FD4	TPMS (internal 3 V battery), housing A, modulated mode (op. 3)	8194EE0D	V:04	V: 0X100D 0X00700103

*: declared by the applicant

5.4 Auxiliary Equipment (AE) Description*

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE1	-	LF trigger tool	-	-

*: declared by the applicant

5.5 Test Item Operating Modes Description*

EUT operating mode no.	Description of operating modes	Additional information
op. 1	CW	Continuous wave mode.
op. 2	ASK+FSK	The sensor will transmit 4 burst of 4 frames: 1 ASK frame and 3 FSK frames.
op. 3	Long Protocol	The sensor will transmit 1 burst of 4 FSK frames every 16 seconds. Each FSK frame is around 45ms. Each Burst (4 FSK frames) is 500ms. Sensor will transmit for 10 minutes. This is the mode with the highest possible duty cycle.



*: declared by the applicant

5.6 Test Item Set-ups Description

set. 1	EUT A
set. 2	EUT B
set. 3	EUT C
set. 4	EUT D
set. 5	EUT E
set. 6	EUT F
set. 7	EUT G

5.7 Normal test conditions

Temperatur, [°C]		Voltage, [V]	
Tnom	20 ± 5	Vnom	3

5.8 Additional Information	
Test items differences	<p>Two samples with different housing are tested in scope of this report (housing A und housing B). According to customers information only housing is different. In all other parts, except housing, both samples are identical.</p> <p>EUT A and EUT B are supplied with external cables to connect it to external power supply. EUT C - G are using internal 3 V battery. EUT A-E are using CW signal. EUT E and G are using modulated signal.</p> <p>Example housing A:</p>  <p>Example housing B:</p> 
Additional application considerations to test a component or sub-assembly	<p>According to customers's information operational mode No 3 (long protocol) is the mode with the highest duty cycle.</p>

6 SUMMARY OF TEST RESULTS

Test specification

FCC 15.231

Requirement / Test Case	Test Conditions	Set-up	Operating mode	Result / Remark	Verdict
Fundamental field strength	Nominal	4, 5	1	None	Pass
Radiated field strength measurements	Nominal	1,2,3,4	1	Frequency range 9 kHz – 30 MHz and from 1 GHz: two samples were tested at the same time (set-up 1 + set-up 2). Frequency range 30 MHz – 1 GHz: set-up 3 and set-up 4 were tested separately.	Pass
Transmit time	Nominal	7	3	None	Pass
Occupied Bandwidth	Nominal	6	2	None	Pass

Notes

None

Comments and observations

None

7 TEST RESULTS

7.1 Fundamental field strength

Test equipment (Please see Chapter 8 for exact information of test equipment)

Radiated: C1, R1, A2, SW2

Description

The measurement test set-up and test procedure are in accordance with the provisions described in ANSI 63.10: 2013.

The measurement antenna was situated in 3 m distance to the EUT.

RBW for frequency range 30 MHz- 1 GHz: 120 kHz.

See photos in Annex C for test Set-up and block diagram in Chapter 2.9.

Limits

According to FCC 15.231(e) Field strength of fundamental:

Frequency [MHz]	Frequency [MHz]		Frequency [MHz]	Frequency [MHz]
	[µV/m]	[dBµV/m]		
40.66-40.70	40.66-40.70	40.66-40.70	40.66-40.70	40.66-40.70
70-130	70-130	70-130	70-130	70-130
130-174	130-174	130-174	130-174	130-174
174-260	174-260	174-260	174-260	174-260
260-470	260-470	260-470	260-470	260-470
Above 470	Above 470	Above 470	Above 470	Above 470

Measurement Level = Reading Level + Correction Factor.

Limit(uV/m@433.9MHz):

$X_{11}=260, Y_{11}=1500, X_{12}=470, Y_{12}=5000$

$f(x)=mx+b, m=(5000-1500)/(470-260)=3500/210=16.66, b=f(x)-mx=5000-16.66*470=-2833.33$

$\Rightarrow f(x)=16.66*x-2833.33 \Rightarrow f(433.9)=16.66*433.9-2833.33=4398.33$

Limit dBµV/m RMS/Peak:

Average/RMS Limit = $20\text{LOG}(4398.33) = 72.86 \text{ dB}\mu\text{V/m}$. Peak Limit = RMS Limit + 20 dB=92.86 dBµV/m.

Results Peak Detector*

Set./ Op.	Peak field strength, [dBµV/m]	Limit Peak, [dBµV/m]	Margin [dB]	DC CorFac**, [dB]	AV field strength, [dBµV/m]	Limit AV, [dBµV/m]	Margin [dB]	Verdict
Set.4, Op. 1	74.74	92.86	18.12	-6.951	67.789	72.86	5.07	Pass
Set.5, Op. 1	75.86	92.86	17	-6.951	68.909	72.86	3.95	Pass

* Please see measurement plots in Annex A.

** Please see Plot 3.2 in Annex A.

7.2 Radiated field strength measurements

Test equipment

Frequency range 9 kHz – 30 MHz

Measurement in a semianechoic room with the distance between the EUT and the reference point of the antenna 3 m (see photos in Annex B). The measurement was done with software R&S EMC 32 V11.00.

Radiated: A1, C1, R1, SW2

Frequency range 30 MHz – 1 GHz

Measurement in a semianechoic room with the distance between the EUT and the reference point of the antenna 3 m (see photos in Annex B). The measurement was done with software R&S EMC 32 V11.00.

Radiated: A2, C1, R1, SW2

Frequency range 1 GHz – 5 GHz

Measurement in a fully anechoic room with the distance between the EUT and the reference point of the antenna 3 m (see photos in Annex B). The measurement was done directly with spectrum analyzer.

Radiated: A3, Amp2, C1, R1, F4

Description

The measurement test set-up and test procedure are in accordance with the provisions described in ANSI 63.10: 2013.

The measurement antenna was situated in 3 m distance to the EUT.

RBW for frequency range 9 kHz- 30 MHz: 200 Hz, 9 kHz.

RBW for frequency range 30 MHz- 1 GHz: 120 kHz.

RBW for frequency range 1 GHz- 5 GHz: 1 MHz.

See photos in Annex C for test Set-up and block diagram in Chapter 2.9.

Limits

According to FCC 15.209(a):

Frequency (MHz)	Magnetic field strength (HField) ($\mu\text{A/m}$)**	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490*	6.37/F (F in kHz)	2400/F(kHz)	300
0.490-1.705*	63.7/F (F in kHz)	24000/F(kHz)	30
1.705-30.0*	0.08	30	30

* Limit line was corrected due to measurement distance of 3 m

** the measurement was done with dBuV/m units. Please see the appropriate dBuV/m limits in the same table

Limits

According to FCC 15.231(e) Field strength of spurious emission:

Frequency [MHz]	Field strength@3m		Measurement distance [meters]	Remarks
	[$\mu\text{V/m}$]	[dBuV/m]		
40.66-40.70	100	40	3	Linear interpolation
70-130	50	33.98		
130-174	50 to 150	33.98 to 43.52		
174-260	150	43.52		
260-470	150 to 500	43.52 to 53.98		
Above 470	500	53.98		

Results*

Op./ Set.	Frequency	Detector	Test distance [m]	Level [dB $\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Margin [dB]	Verdict
-----------	-----------	----------	-------------------	-----------------------------	-----------------------------	-------------	---------

Op.2, Set.1+2	9 kHz – 30 MHz	Peak	3	32 ¹⁾	50.04 ^{**}	18.04	Pass
Op.2, Set.3	30 MHz – 1 GHz	Quasi-Peak	3	43.41	51.6	8.19	Pass
Op.2, Set.4	30 MHz – 1 GHz	Quasi-Peak	3	43.66	51.6	7.94	Pass
Op.2, Set.1+2	960 MHz – 5 GHz	Peak	3	55.62	74	18.38	Pass
Op.5, Set.1+2	960 MHz – 5 GHz	RMS	3	47.71	54	6.29	Pass
All Readings below 1 GHz are Quasi-Peak or Peak detector, above 1 GHz with Peak and RMS detector.							

* Please see measurement plots in Annex A.

** Limit line was corrected due to measurement distance of 3 m

1) Noise level

7.3 Transmit time					
Test equipment (Please see Chapter 8 for exact information of test equipment)					
Radiated: R4, A4					
Description					
Please see test set-up photos in Annex C. Measurement was done radiated.					
Limits					
FCC 15.231(e): Devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.					
FCC 15.231(a)(4): Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.					
Results*					
Plot No	Set./ Op.	Frequency, [MHz]	Measured value, [ms]	Limit**, [sec]	Result
3.3	7,3	433.92	496	1	Pass
3.1	7,3	433.92	16000	10	Pass

* Please see measurement plots in Annex A.

** The manufacturer is responsible for not exceeding this requirement.

7.4 Occupied Bandwidth

Test equipment (Please see Chapter 8 for exact information of test equipment)

Radiated: R4, A4

Description

The measurement test set-up and test procedure are in accordance with the provisions described in ANSI 63.10: 2013.

Please see test set-up photos in Annex C and block diagram in Chapter 2.9.

Please see Plots in Annex A for spectrum analyzer settings.

Measurement was done radiated.

Limits

The bandwidth of the emission shall be not wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be not wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Results*

Set./ Op.	Frequency, [MHz]	Measured value (99% BW), [kHz]	Limit, [MHz]	Result
Set.6, Op. 2	433.92	224.228	1.0848	Pass
Set./ Op.	Frequency, [MHz]	Measured value (20dB BW), [kHz]	Limit, [MHz]	Result
Set.6, Op. 2	433.92	120	1.0848	Pass

* Please see measurement plots in Annex A.

8 MEASUREMENT EQUIPMENT

No	Equipment	Type	Manufacturer	Serial No.	Int. No.	Last Calibration	Next Calibration
Antennas (A):							
1.	Active Loop Antenna	HFH2-Z2E	Rohde & Schwarz	100108	LAB000108	2023-05-05	2026-05-05
2.	Ultrabroadband antenna	HL562E	Rohde & Schwarz	102005	LAB000150	2020-07-05	2023-07-05
3.	Double-Ridged Waveguide Horn Antenna	HF-907	Rohde & Schwarz	102899	LAB000151	2023-05-05	2026-05-05
4.	Rod Antenna	-	-	-	LAB000290	-	-
5.	Horn Antenna (2.6 GHz – 3.95 GHz)	PE9863/SF-10	Pasternack	-	LAB000312	2021-01-13	-
6.	Horn Antenna (3.95 GHz – 5.85 GHz)	PE9861/SF-10	Pasternack	-	LAB000264	2020-09-29	-
7.	Horn Antenna (10 GHz – 15 GHz)	PE9855 SF-20	Pasternack	-	LAB000263	2020-09-29	-
8.	Horn Antenna (12.4 GHz – 18 GHz)	62-HA20-A-SMF	TTE Europe	-	LAB000282	2020-09-29	-
9.	Horn Antenna (17.6 GHz – 26.7 GHz)	20240-20	Flann Microwave Ltd	266402	LAB000127	2020-06-29	-
10.	Horn Antenna (26.4 GHz – 40.1 GHz)	22240-20	Flann Microwave Ltd	270447	LAB000129	2020-06-29	-
11.	Horn Antenna (33 GHz – 50.1 GHz)	23240-20	Flann Microwave Ltd	273430	LAB000132	2020-07-01	-
12.	Horn Antenna (49.9 GHz – 75.8 GHz)	25240-20	Flann Microwave Ltd	272860	LAB000133	2020-07-01	-
13.	Horn Antenna (60.5 GHz – 91.5 GHz)	26240-20	Flann Microwave Ltd	273417	LAB000135	2020-07-01	-
14.	Horn Antenna (73.8 GHz – 114 GHz)	27240-20	Flann Microwave Ltd	273368	LAB000138	2020-07-01	-
15.	Horn Antenna (114 GHz – 173 GHz)	29240-20	Flann Microwave Ltd	273382	LAB000139	2020-07-01	-
16.	Horn Antenna (145 GHz – 220 GHz)	30240-20	Flann Microwave Ltd	273390	LAB000178	2020-08-01	-
17.	Horn Antenna (217 GHz – 330 GHz)	32240-20	Flann Microwave Ltd	273469	LAB000152	2020-08-01	-
18.	Horn Antenna (49.9 GHz – 75.8 GHz)	25240-20	Flann Microwave Ltd	272861	LAB000134	2020-07-01	-
19.	Horn Antenna (60.5 GHz – 91.5 GHz)	26240-20	Flann Microwave Ltd	273418	LAB000136	2020-08-01	-
Amplifiers (Amp)*:							
1.	Pre-Amplifier	BBV 9718 C	Schwarzbeck Mess-Elektronik OHG	84	LAB000169	-	-
2.	Low noise amplifier	BZ-01000900-111550-202320	B&Z Technologies	24336	LAB000296	-	-
3.	Low noise amplifier	BZ-08001800-180855-202020	B&Z Technologies	22105	LAB000297	-	-
4.	Low noise amplifier	BZ-18004000-270845-252525	B&Z Technologies	22449	LAB000298	-	-
Attenuator (Att)*:							
1.	Attenuator	25081-20 (49.9 GHz - 75.8 GHz)	Flann Microwave Ltd	234411	LAB000229	-	-
2.	Attenuator	27081-20 (73.8 GHz – 112 GHz)	Flann Microwave Ltd	270004	LAB000230	-	-
RF Cables (Cab)*:							
1.	Coaxial cable	LU7-022-1000	Rosenberger	33	LAB000153	-	-
2.	Coaxial cable	LU7-022-1000	Rosenberger	34	LAB000153	-	-

3.	Coaxial cable	SF101/1.5m	Huber & Suhner	503987/1	LAB000165	-	-
Chambers (C):							
1.	Semi/Fully Anecoic Chamber	SAC5	Albatross Projects GmbH	20168.PRB	LAB000235	2020-07-23	2023-07-23
2.	Climatic chamber	T-65/50	CTS GmbH	204002	LAB000110	2022-05-11	2023-05-11
3.	Shielding Cover	CMU-Z11	Rohde & Schwarz	100876	LAB000039	-	-
4.	Climatic chamber	T-70/350	CTS GmbH	194027	LAB000066	2021-06-30	2023-06-30
Corner Reflector (CR):							
1.	Trihedral Corner Reflector	SAJ-080-S1	ERAVANT	04756-01	LAB000201	-	-
Directional coupler (DC):							
1.	Directional coupler	CPL-5230-10-SMA-79	Midwest Microwave	-	LAB000672	-	-
Distance meter (DM):							
1.	Laser distance meter	GLM 50 C	Bosch	-	-	-	-
2.	Laser distance meter	GLM 120 C	Bosch	-	-	-	-
Filter (F)*:							
1.	High-pass filter (84 GHz – 110 GHz)	10-WHPF-84.5-UG387	TTE	-	LAB000299	-	-
2.	High-pass filter (7 GHz – 23 GHz)	HPF 7-23	AtlantRF	-	LAB000444	-	-
3.	High-pass filter (3.3 GHz – 12.75 GHz)	HPF 3.3-11	AtlantRF	-	LAB000382	-	-
4.	High-pass filter (1.3 GHz – 12.75 GHz)	H1G713G1	Microwave Circuits Inc	46291	LAB000443	-	-
5.	High-pass filter (1.3 GHz – 12.75 GHz)	H1G713G1	Microwave Circuits Inc	1896-01	LAB000670	-	-
6.	Bandstop filter (30MHz – 3GHz for 900 MHz Band)	WRCG876/960-847/989-50/8SS	Wainwright Instruments GmbH	-	LAB000671	-	-
Harmonic mixers (H):							
1.	Harmonic Mixer	FS-Z60	Rohde & Schwarz	101350	LAB000375	2023-04-13	2024-04-13
2.	Harmonic Mixer	FS-Z75	Rohde & Schwarz	102015	LAB000112	2023-05-03	2024-05-03
3.	Harmonic Mixer	FS-Z90	Rohde & Schwarz	102020	LAB000113	2023-04-06	2024-04-06
4.	Harmonic Mixer	FS-Z110	Rohde & Schwarz	102000	LAB000114	2023-05-02	2024-05-02
5.	Harmonic Mixer	FS-Z170	Rohde & Schwarz	100996	LAB000126	2023-04-26	2024-04-26
6.	Harmonic Mixer	FS-Z220	Rohde & Schwarz	101039	LAB000116	2023-04-16	2024-04-06
7.	Harmonic Mixer	FS-Z325	Rohde & Schwarz	101015	LAB000117	2023-04-11	2024-04-11
Multimeters (M):							
1.	Multimeter	U1242B	Keysight	MY59240021	LAB000187	2022-06-20	2024-06-20
2.	Multimeter	U1242B	Keysight	MY59160026	LAB000018	2021-08-30	2023-08-30
Multipliers (Mp):							
1.	Multiplier	SMZ75	Rohde & Schwarz	101307	-	2018-03-15	-
2.	Multiplier	SMZ110	Rohde & Schwarz	100001	-	2020-05-09	-
Power Supply (P):							
1.	Power Supply	PS 2042-10 B	Elektro-Automatic GmbH	2878350263	LAB000190	-	-
2.	Power Supply	PS 2042-10 B	Elektro-Automatic GmbH	2878350322	LAB000192	-	-
3.	Power Supply	E3640A	Agilent	MY40005693	LAB000036	-	-
Power meters (PM):							
1.	Power meter	NRP-Z81	Rohde & Schwarz	106194	LAB000120	2022-05-11	2023-05-11
2.	Power meter	NRP110T	Rohde & Schwarz	101151	LAB000119	2022-07-06	2023-07-06
Receivers and Spectrumanalyzers (R):							
1.	Test Receiver, SAC5	ESW-26	Rohde & Schwarz	101517	LAB000363	2023-01-31	2024-01-30
2.	Test Receiver	ESW-26	Rohde & Schwarz	101481	LAB000236	2022-07-07	2023-07-07
3.	Spectrum Analyzer 1 Hz – 50 GHz	FSW-50	Rohde & Schwarz	101450	LAB000111	2022-07-28	2023-07-28
4.	Spectrum Analyzer 2 Hz – 43 GHz	FSW-43	Rohde & Schwarz	101391	LAB000289	2022-06-10	2023-06-10
Signal Generators (SG):							

1.	Signal generator 8 kHz – 50 GHz	SMA100B	Rohde & Schwarz	103838	LAB000118	2021-06-30	2024-06-30
2.	Vector Signal Generator	SMW200A	Rohde & Schwarz	108822	LAB000288	-	-
Software (SW):							
No	Type	Name	Manufacturer	Version	Int. No.	Build	Rev
1.	Software	R&S Power Viewer	Rohde & Schwarz	11.3, 3.2.2020	-	7338	3230
2.	Software	R&S EMC32	Rohde & Schwarz	11.20	-	-	-

* The gain values of Amp and attenuation values of Cab and Att are remeasured annually internal.

9 MEASUREMENT UNCERTAINTIES

Test case	Measurement uncertainty*
Radiated field strength	$\leq \pm 6$ dB
Occupied bandwidth	± 100 kHz
Time domain measurement	± 2.32 ms
DC and low frequency voltages	± 3 %
Temperature	± 1 °C
Humidity	± 3 %

*) The indicated expanded measurement uncertainty corresponds to the standard measurement uncertainty for the measurement results multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %.

END OF THE REPORT

Annex A

Measurement plots

part of / in addition to


Test report no.: 22128206-31128-4

Table of contents:

1	Fundamental field strength.....	3
1.1	Set-up 5, Op. 1, lying	3
1.2	Set-up 5, Op. 1, staying	4
1.3	Set-up 4, Op. 1, lying	5
1.4	Set-up 4, Op. 1, staying	6
2	General Limit - Radiated field strength emissions, 9 kHz - 5 GHz.....	7
2.1	Radiated field strength measurements ($f < 30$ MHz).....	7
2.1.1	Set-up 1 + Set-up 2, 9 kHz – 30 MHz, Op. 1, EUTs lying	7
2.1.2	Set-up 1 + Set-up 2, 9 kHz – 30 MHz, Op. 1, EUTs lying	8
2.2	Radiated field strength measurements ($30 \text{ MHz} < f < 1000$ MHz)	9
2.2.1	Lying, Set-up 3, Op. 1	9
2.2.2	Staying, Set-up 3, Op. 1	10
2.2.3	Lying, Set-up 4, Op. 1	11
2.2.4	Staying, Set-up 4, Op. 1	12
2.3	Radiated field strength measurements ($1 \text{ GHz} < f < 5 \text{ GHz}$).....	13
2.3.1	960 MHz – 1400 MHz, Set-up 1 + Set-up 2, Op. 1, lying	13
2.3.2	1400 MHz – 5000 MHz, Set-up 1 + Set-up 2, Op. 1, lying	13
2.3.3	960 MHz – 1400 MHz, Set-up 1 + Set-up 2, Op. 1, staying	14
2.3.4	1400 MHz – 5000 MHz, Set-up 1 + Set-up 2, Op. 1, staying	14
3	Transmit time	15
3.1	Set-up 7, Op. mode 3, Measurement time 100 s.....	15
3.2	Set-up 7, Op. mode 3, Measurement time 100 ms, 0 s – Marker 1	15
3.3	Set-up 7, Op. mode 3, Measurement time 1 s, 0 s - Marker 1	16
4	Occupied Bandwidth	17
4.1	20 dB bandwidth, set-up 6, op. 2	17
4.2	99 % occupied bandwidth, set-up 6, op. 2.....	17

1 Fundamental field strength

1.1 Set-up 5, Op. 1, lying

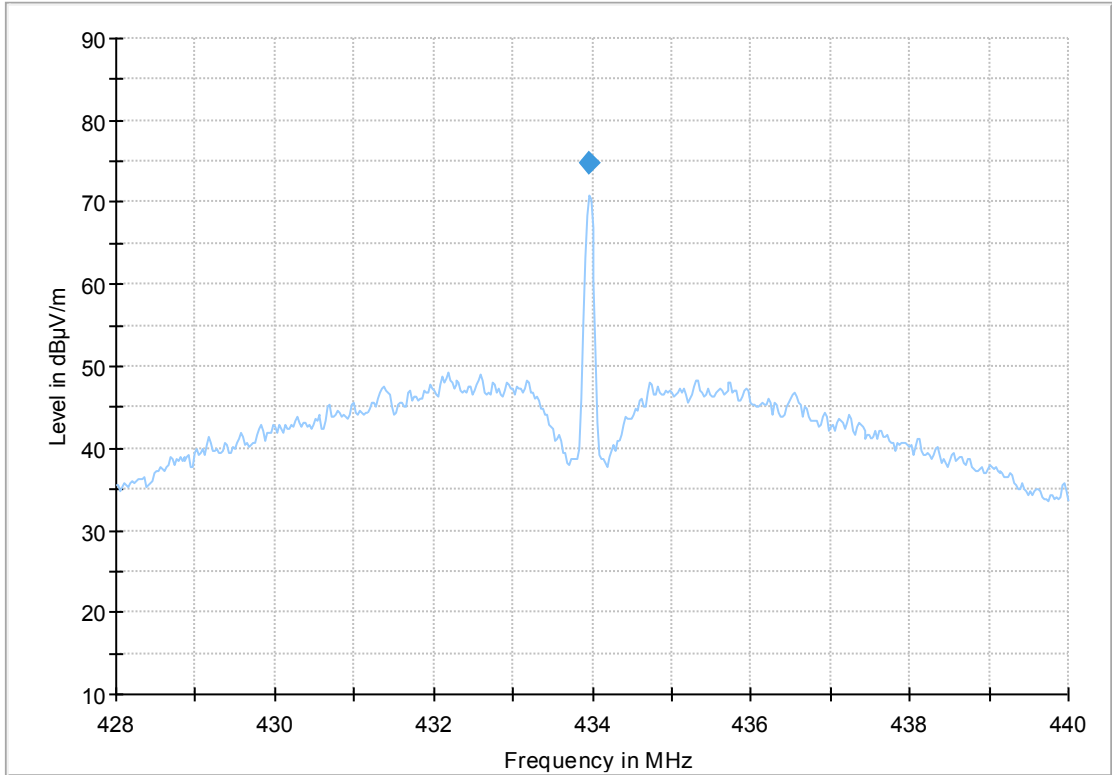


— Preview Result 1-PK+ * Critical_Freqs PK+ ◆ Final_Result QPK
× MaxPeak-PK+ (Single) + QuasiPeak-QPK (Single)

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
433.950000	74.74	---	---	100.0	120.000	143.0	V	334.0

Annex A of TR no.: 22128206-31128-4

1.2 Set-up 5, Op. 1, staying

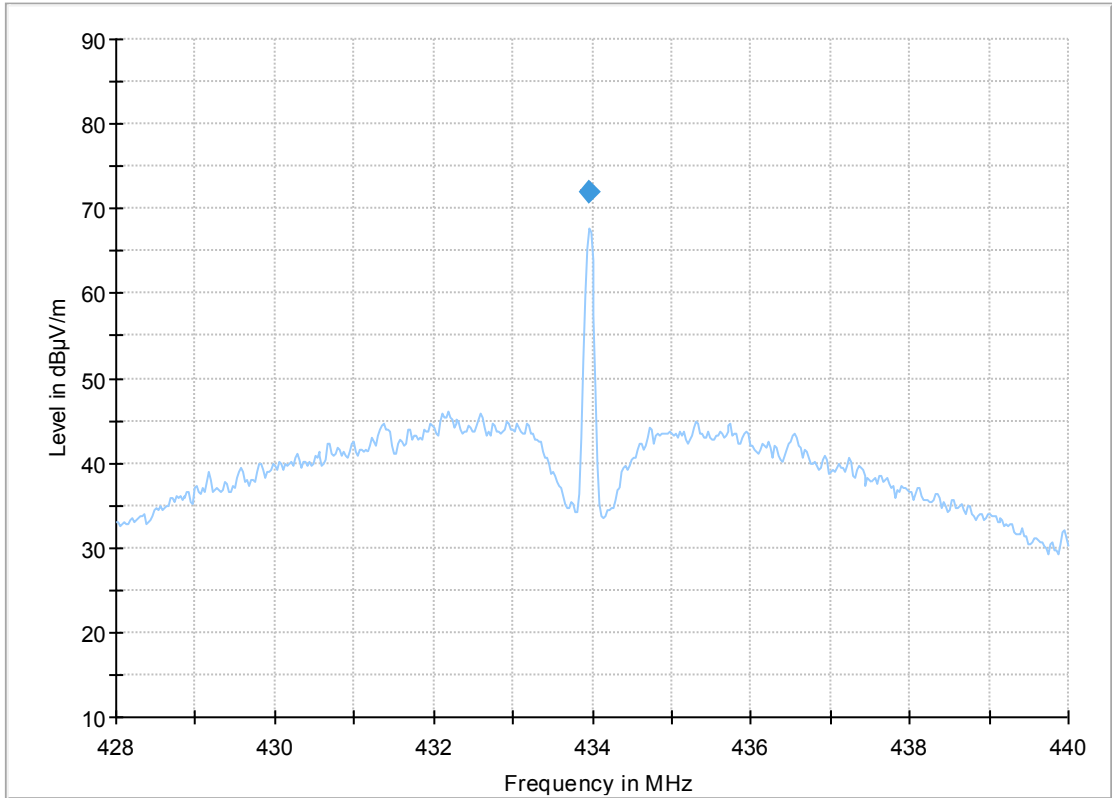


— Preview Result 1-PK+ * Critical_Freqs PK+ ◆ Final_Result QPK

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
433.950000	72.05	---	---	100.0	120.000	211.0	H	131.0

1.3 Set-up 4, Op. 1, lying

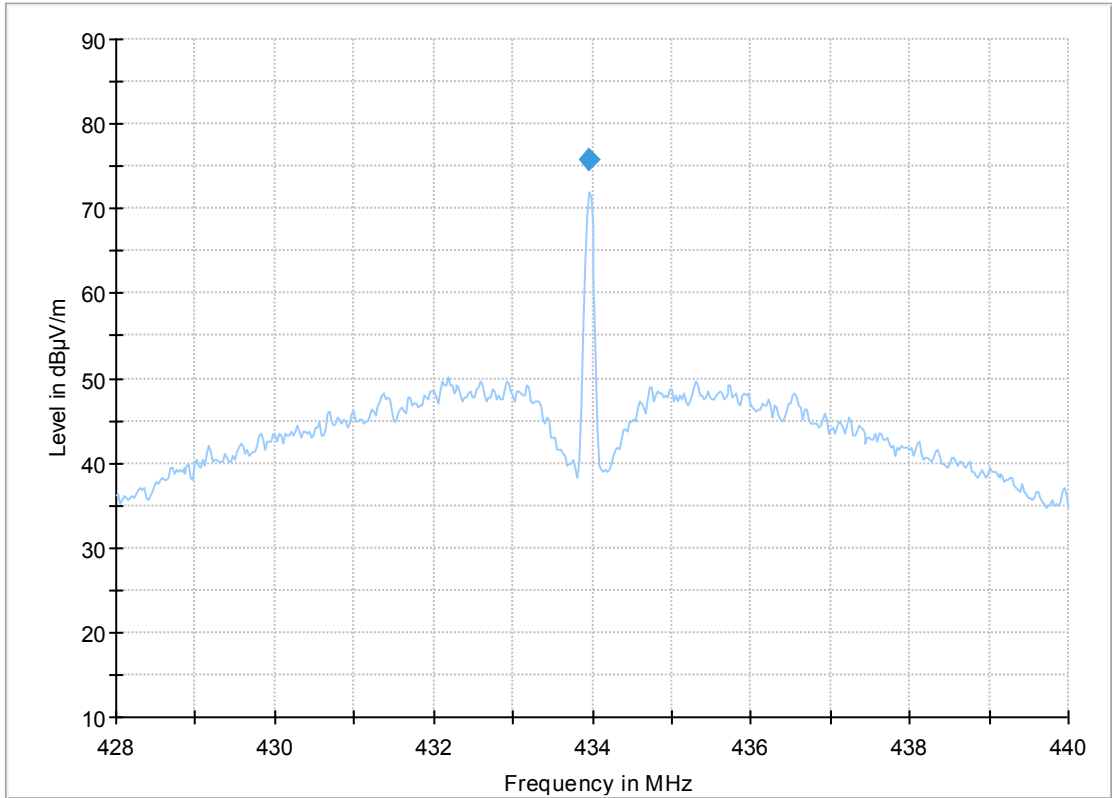


— Preview Result 1-PK+
 * Critical_Freqs PK+
 ◆ Final_Result QPK

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
433.950000	75.86	---	---	100.0	120.000	141.0	V	338.0

Annex A of TR no.: 22128206-31128-4

1.4 Set-up 4, Op. 1, staying

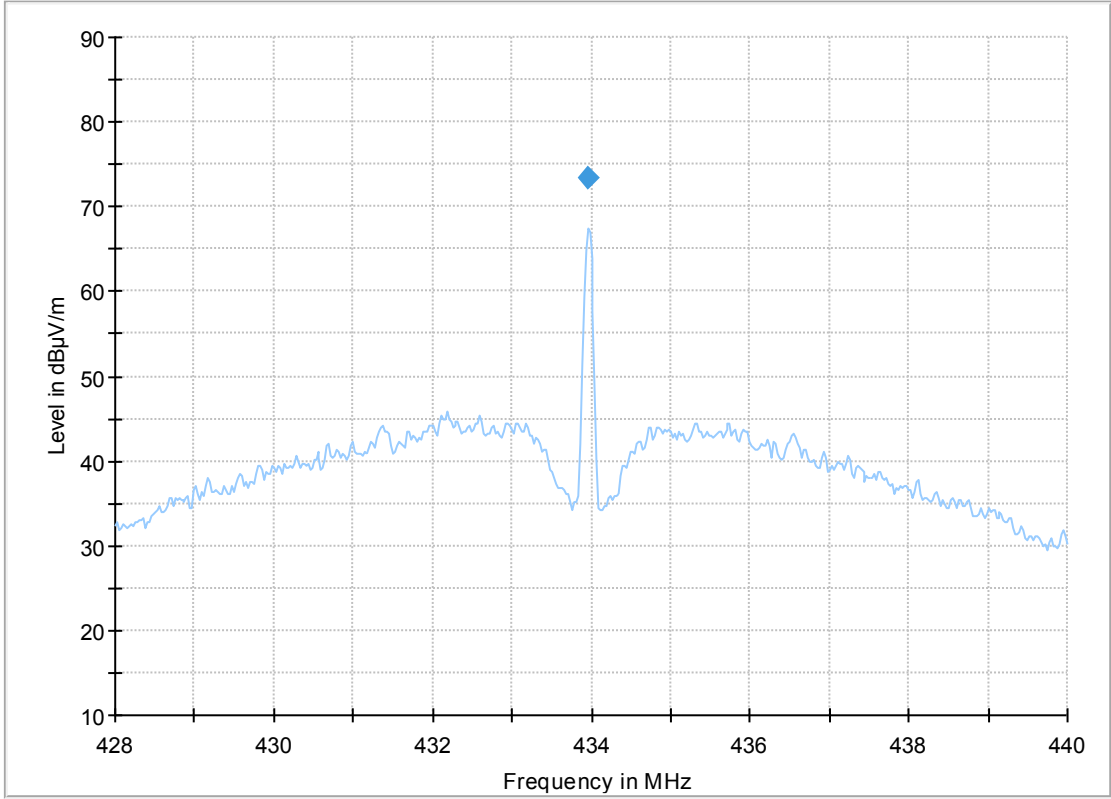

— Preview Result 1-PK+ * Critical_Freqs PK+ ◆ Final_Result QPK

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
433.950000	73.28	---	---	100.0	120.000	209.0	H	239.0

Annex A of TR no.: 22128206-31128-4

2 General Limit - Radiated field strength emissions, 9 kHz - 5 GHz

2.1 Radiated field strength measurements (f < 30 MHz)


2.1.1 Set-up 1 + Set-up 2, 9 kHz – 30 MHz, Op. 1, EUTs lying

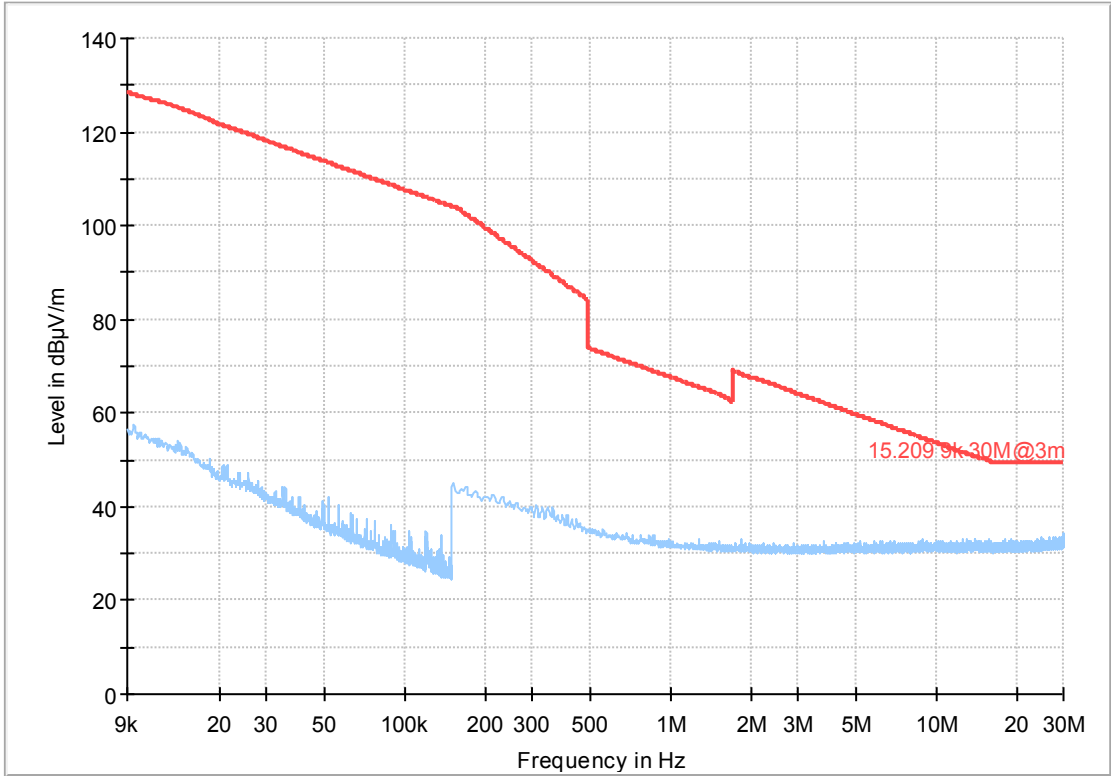

— Preview Result 1-PK+
— 15.209 9k-30M@3m
* Critical_Freqs PK+
◆ Final_Result QPK

Annex A of TR no.: 22128206-31128-4


2.1.2 Set-up 1 + Set-up 2, 9 kHz – 30 MHz, Op. 1, EUTs lying

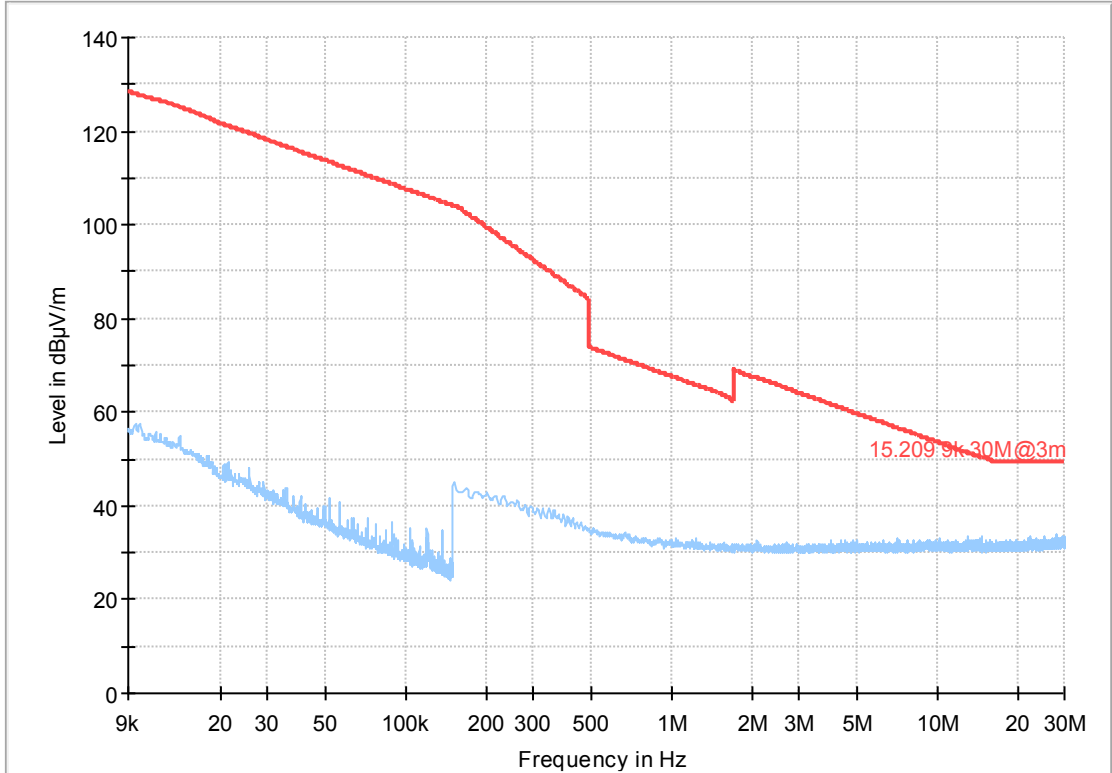

- Preview Result 1-PK+
- * Critical_Freqs PK+
- 15.209 9k-30M@3m
- ◆ Final_Result QPK

2.2 Radiated field strength measurements (30 MHz < f < 1000 MHz)

2.2.1 Lying, Set-up 3, Op. 1

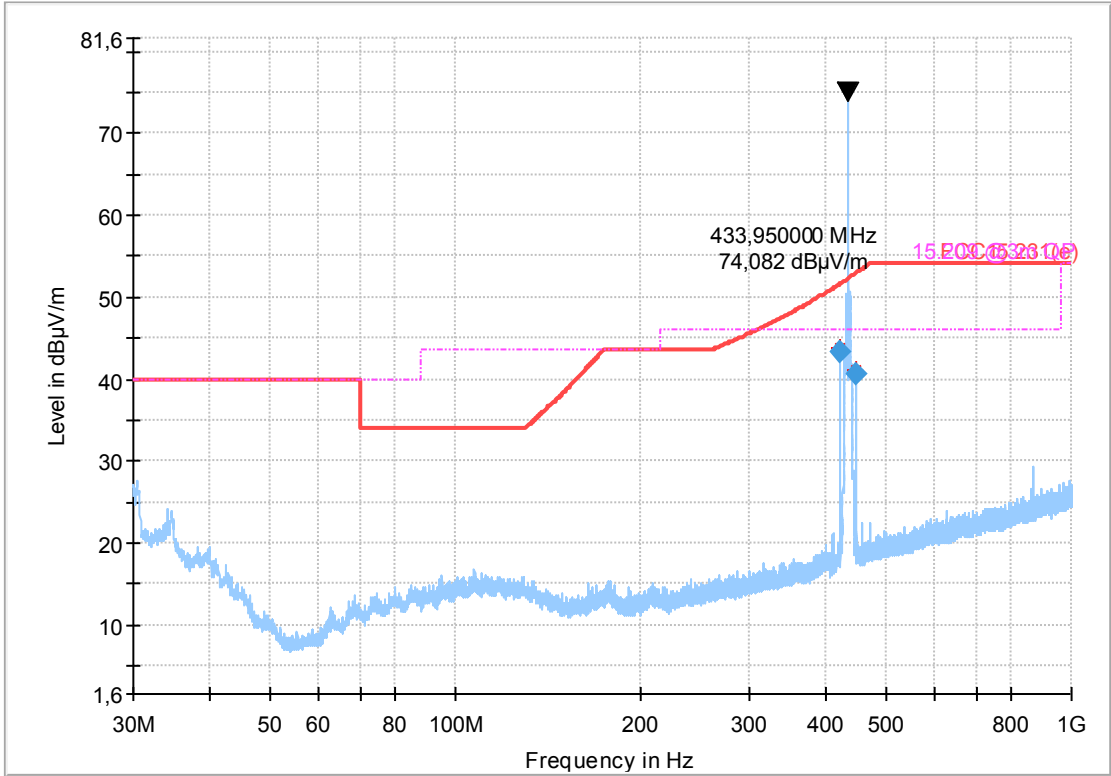


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
421.950000	43.41	51.60	8.19	100.0	120.000	138.0	V	65.0
445.950000	40.64	52.80	12.16	100.0	120.000	117.0	V	68.0

Annex A of TR no.: 22128206-31128-4

2.2.2 Staying, Set-up 3, Op. 1

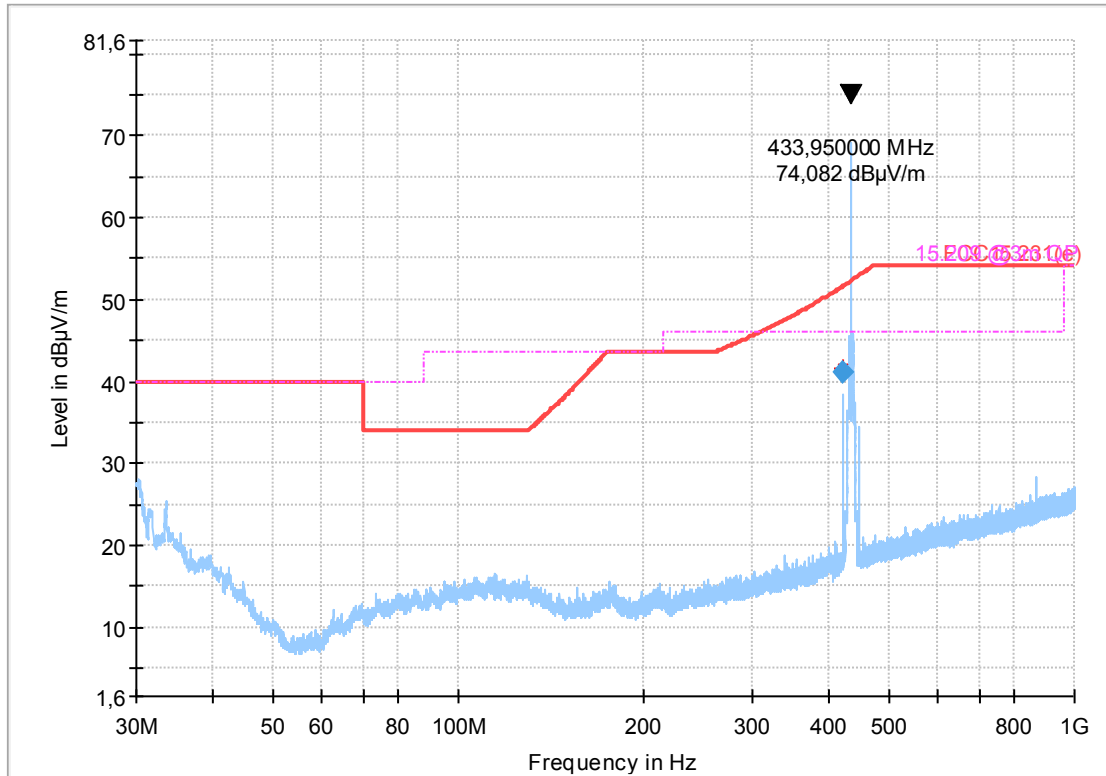


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
421.950000	41.05	51.60	10.55	100.0	120.000	212.0	H	322.0

Annex A of TR no.: 22128206-31128-4

2.2.3 Lying, Set-up 4, Op. 1

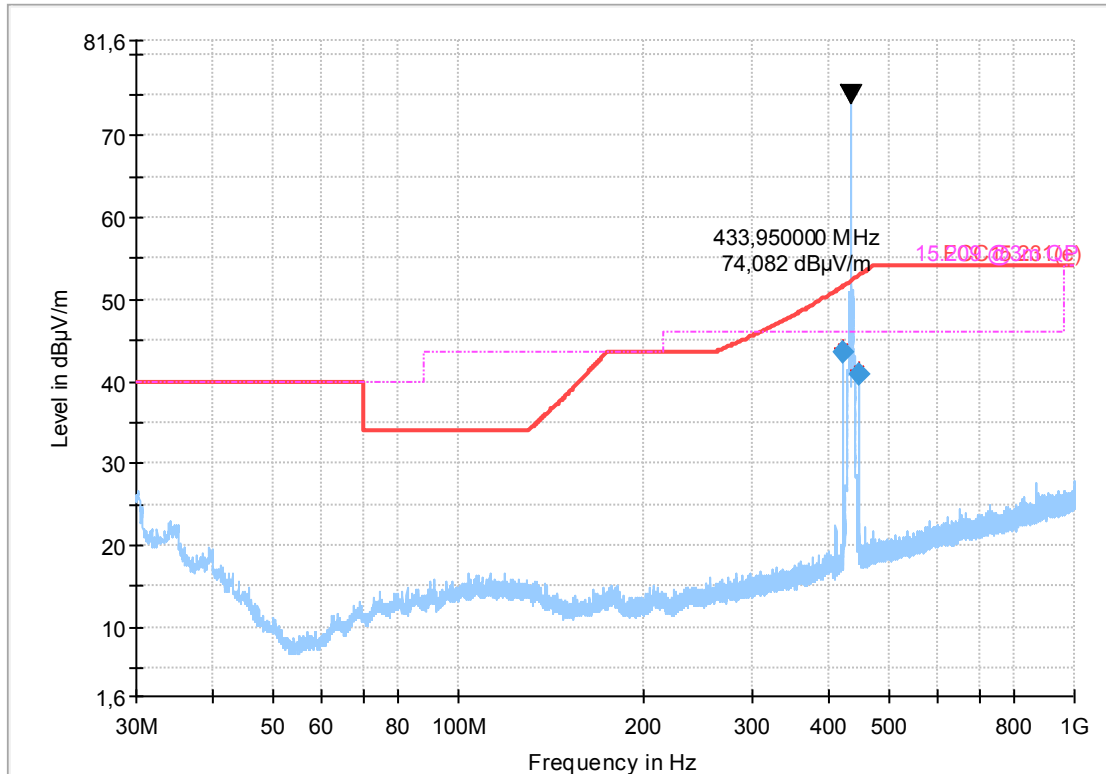


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
421.950000	43.66	51.60	7.94	100.0	120.000	126.0	V	68.0
445.950000	40.85	52.80	11.95	100.0	120.000	126.0	V	60.0

Annex A of TR no.: 22128206-31128-4

2.2.4 Staying, Set-up 4, Op. 1

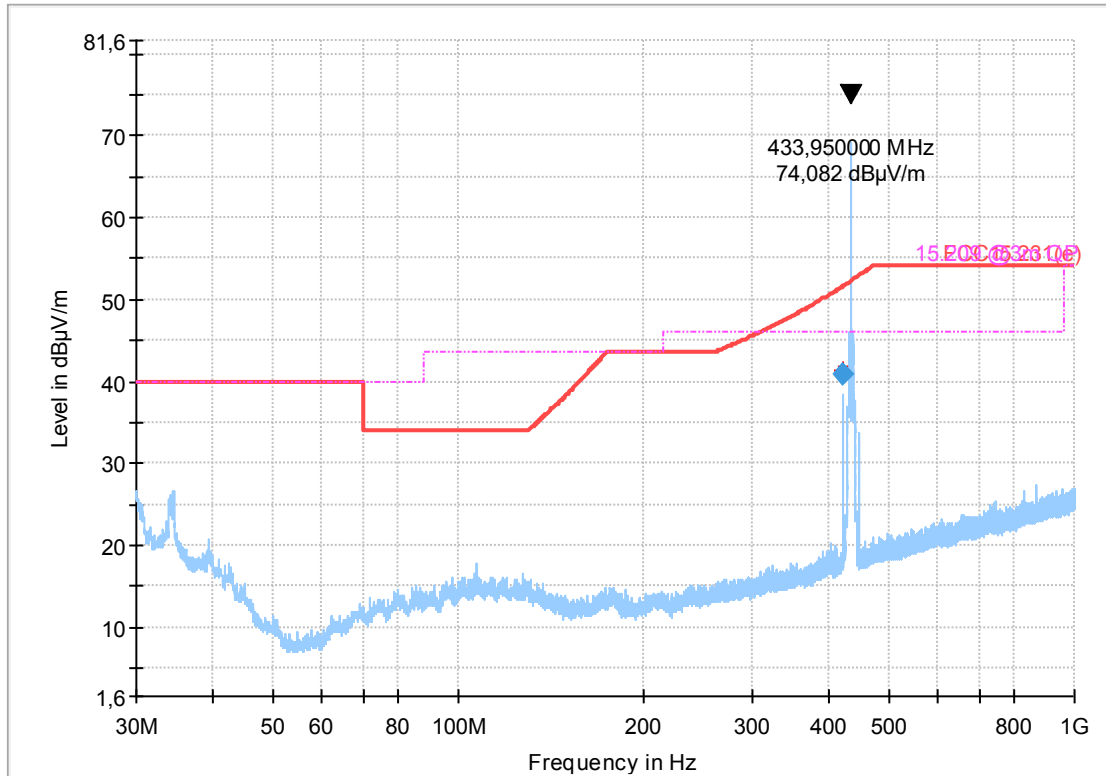

— Preview Result 1-PK+ * Critical_Freqs PK+ — FCC15.231(e)
— 15.209 @3m QP ◆ Final_Result QPK


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
421.950000	40.94	51.60	10.66	100.0	120.000	235.0	H	199.0

Annex A of TR no.: 22128206-31128-4


2.3 Radiated field strength measurements (1 GHz < f < 5 GHz)

2.3.1 960 MHz – 1400 MHz, Set-up 1 + Set-up 2, Op. 1, lying

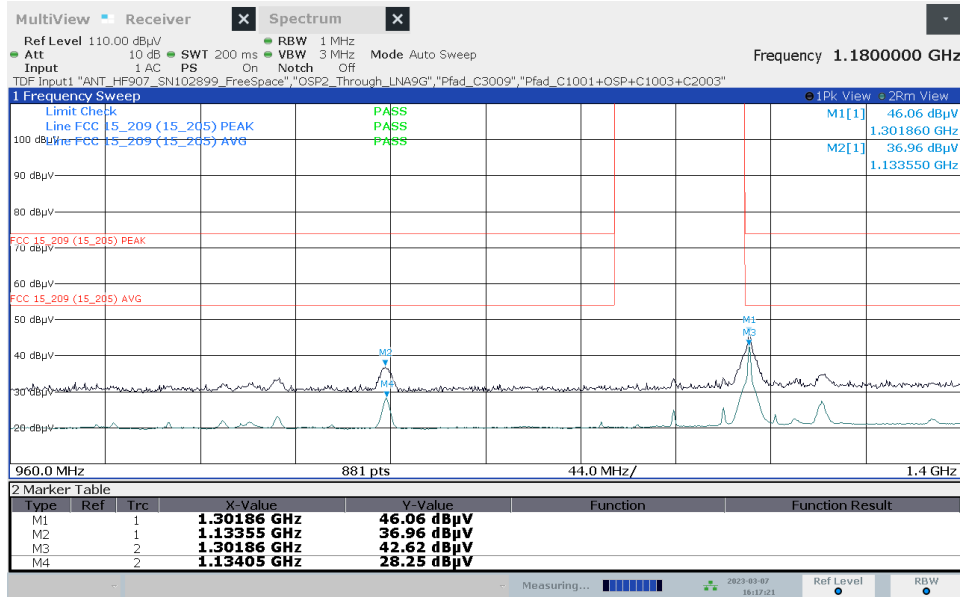

04:17:22 PM 03/07/2023


2.3.2 1400 MHz – 5000 MHz, Set-up 1 + Set-up 2, Op. 1, lying

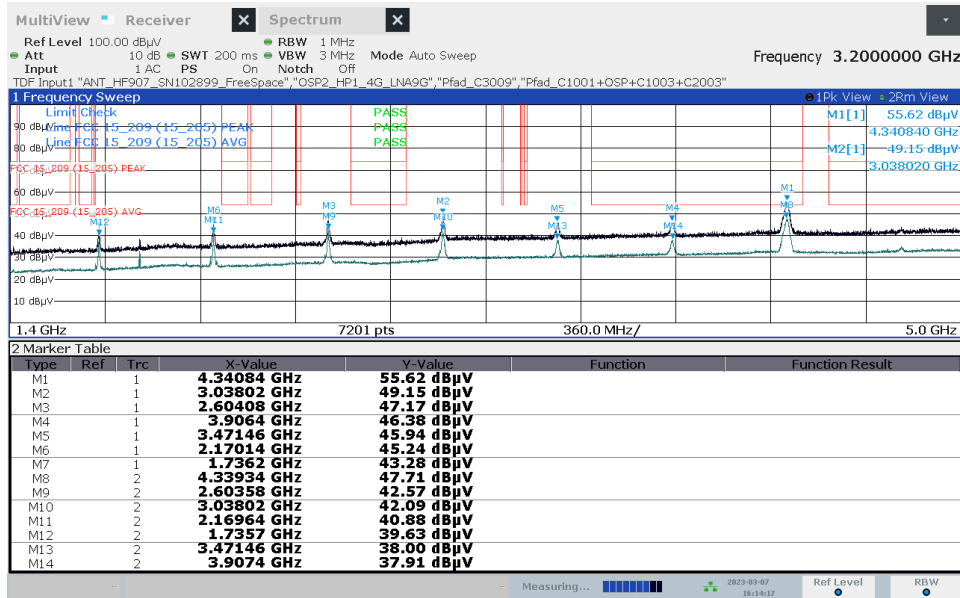


04:14:17 PM 03/07/2023

Annex A of TR no.: 22128206-31128-4

2.3.3 960 MHz – 1400 MHz, Set-up 1 + Set-up 2, Op. 1, staying

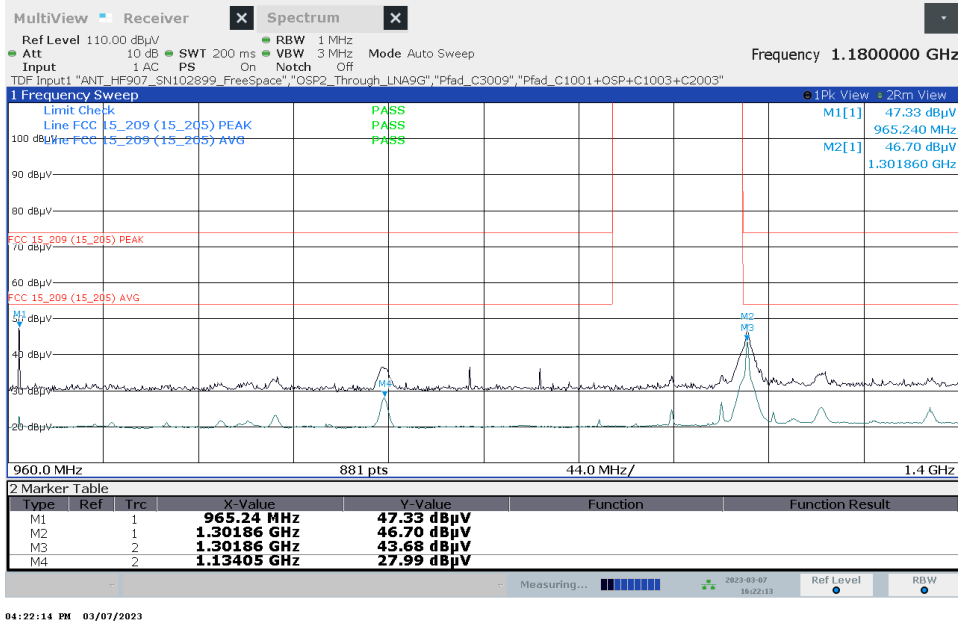


2.3.4 1400 MHz – 5000 MHz, Set-up 1 + Set-up 2, Op. 1, staying

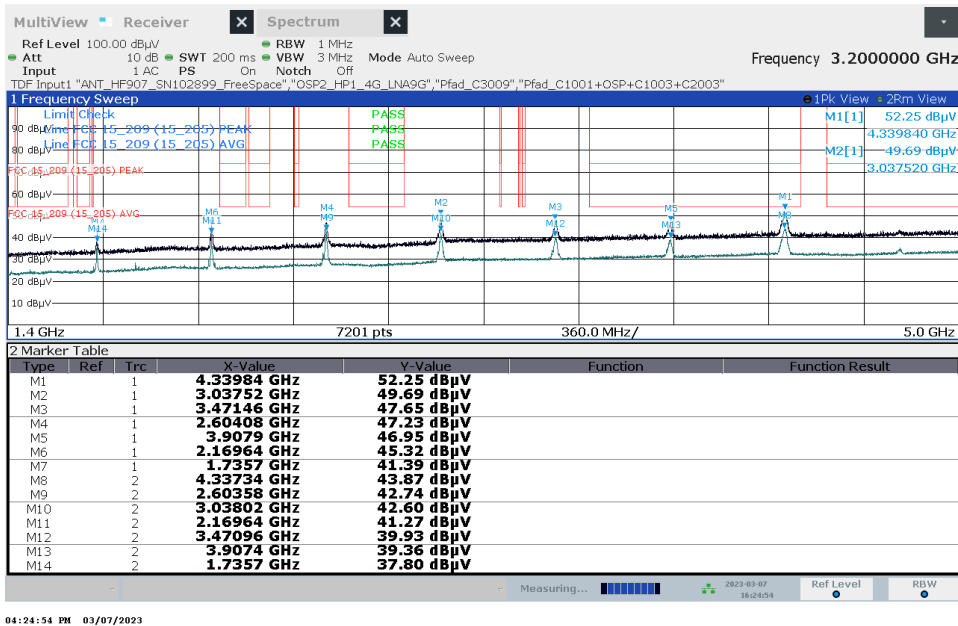

Annex A of TR no.: 22128206-31128-4


3 Transmit time

3.1 Set-up 7, Op. mode 3, Measurement time 100 s

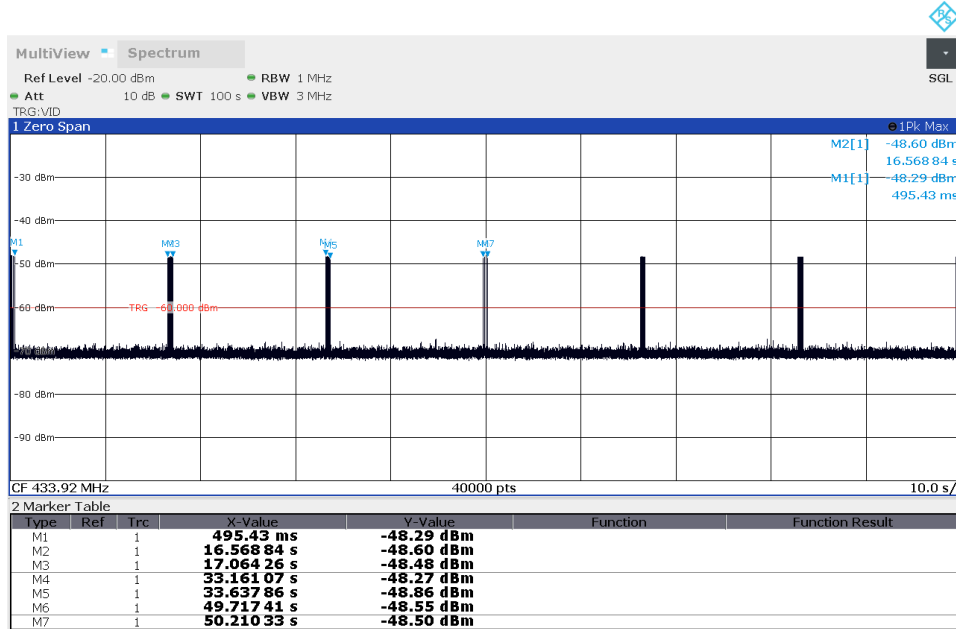

02:55:24 05/03/2023

3.2 Set-up 7, Op. mode 3, Measurement time 100 ms, 0 s – Marker 1

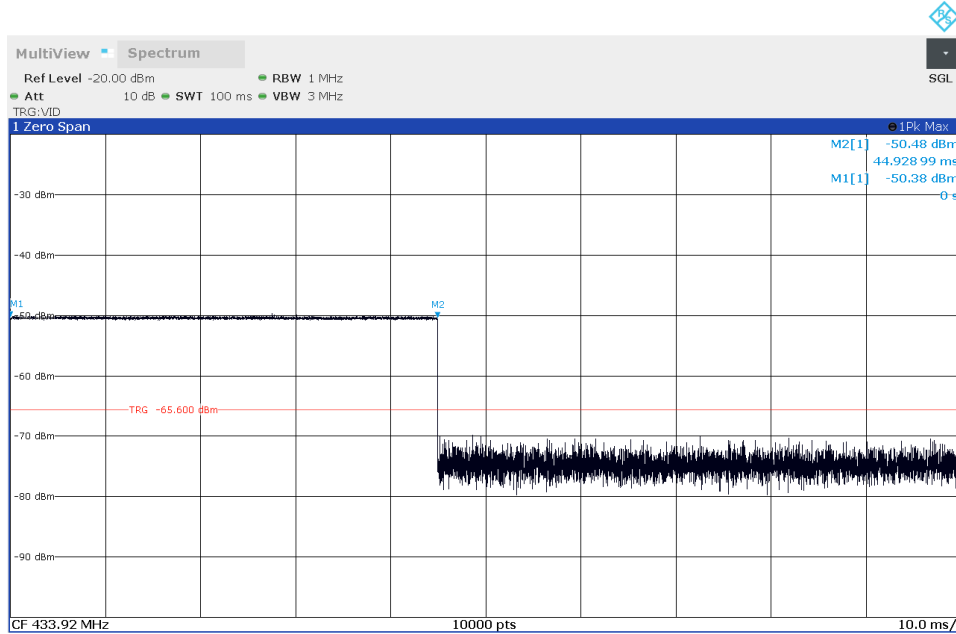


02:48:16 05/03/2023

DC=44.92 %

Annex A of TR no.: 22128206-31128-4

3.3 Set-up 7, Op. mode 3, Measurement time 1 s, 0 s - Marker 1

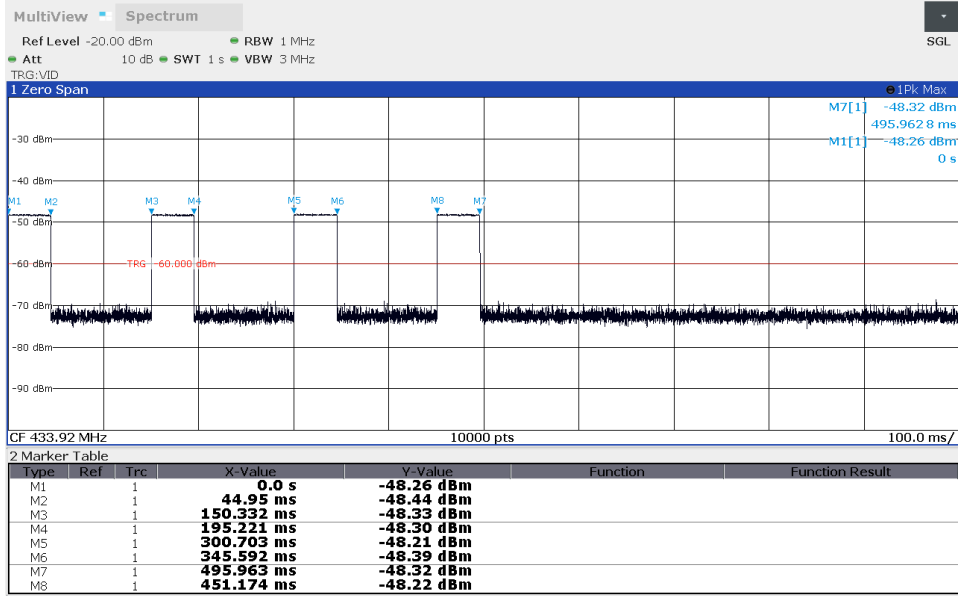


02:50:19 05/03/2023

Annex A of TR no.: 22128206-31128-4


4 Occupied Bandwidth

4.1 20 dB bandwidth, set-up 6, op. 2

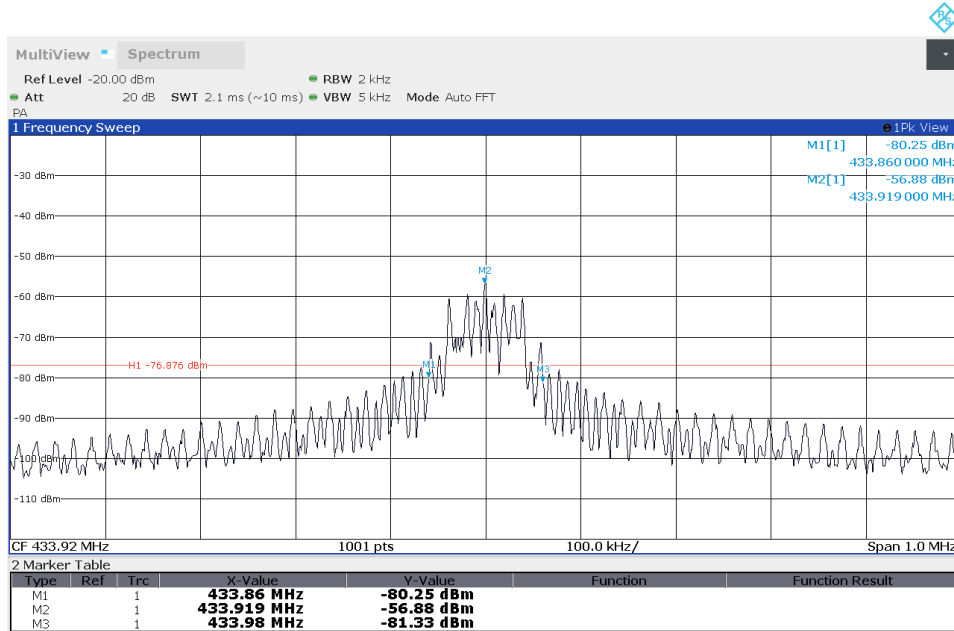

03:09:22 05/03/2023

4.2 99 % occupied bandwidth, set-up 6, op. 2

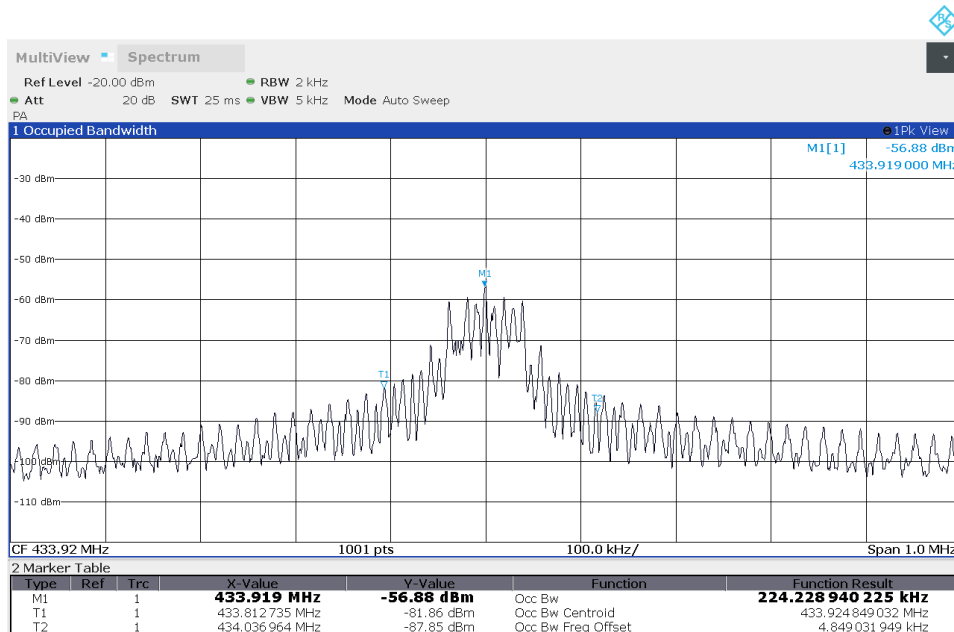

03:10:19 05/03/2023