

The University of Michigan  
Radiation Laboratory  
3228 EECS Building  
Ann Arbor, MI 48109-2122  
Tel: (734) 647-1792

Measured Radio Frequency Emissions  
From

**Schrader 433 MHz TPM Transmitter  
Part: PA66-GF35**

Report No. 415031-140  
October 7, 2002

Copyright © 2002


For:  
Schrader Electronics Limited  
11 Technology Park, Belfast Road  
Antrim BT41 1QS  
Northern Ireland  
PO: 11653

Contact:  
Dirk Vollstedt  
E-mail: [dvollstedt@schrader.co.uk](mailto:dvollstedt@schrader.co.uk)  
Tel: 011-44-2894-48-2008  
Fax: 011-44-1849-46-8440

Measurements made by:

Valdis V. Liepa

Tests supervised by:  
Report approved by:

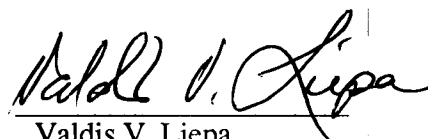  
Valdis V. Liepa  
Research Scientist

---

**Summary**

Tests for compliance with FCC Regulations, subject to Part 15, Subpart C, and with RSS-210 of Industry Canada were performed on Schrader Remote Tire Pressure Monitoring Transmitter. This device is subject to Rules and Regulations as a low power (data) transmitter. As a Digital Device it is exempt, but such measurements we routinely perform to assess the transmitters's overall emissions.

The Sensor was tested " in free space", i.e., without a tire and off the rim. In testing performed on September 9 and 11, 2002, the device tested in the worst case met the limits for radiated emissions by 6.0 dB at fundamental and by 8.9 dB (2169 MHz, 5th harmonic; see p. 6). Besides harmonics there were no other significant spurious emissions found.

No conductive emission tests were made, since the transmitter is powered by a 3 V internal lithium battery.

## 1. Introduction

Schrader Remote Tire Pressure Monitoring Transmitter, Part: PA66-GF35, was tested for compliance with FCC Regulations, Part 15, adopted under Docket 87-389, April 18, 1989, and with Industry Canada RSS-210, Issue 2, dated February 14, 1998. The tests were performed at the University of Michigan Radiation Laboratory Willow Run Test Range following the procedures described in ANSI C63.4-1992 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The Site description and attenuation characteristics of the Open Site facility are on file with FCC Laboratory, Columbia, Maryland (FCC Reg. No: 91050) and with Industry Canada, Ottawa, ON (File Ref. No: IC 2057).

## 2. Test Procedure and Equipment Used

The test equipment commonly used in our facility is listed in Table 2.1 below. The second column identifies the specific equipment used in these tests. The HP 8593E spectrum analyzer is used for primary amplitude and frequency reference.

Table 2.1. Test Equipment.

<u>Test Instrument</u>	<u>Eqpt Used</u>	<u>Manufacturer/Model</u>
Spectrum Analyzer (9kHz-22GHz)	X	Hewlett-Packard 8593A SN: 3107A01358
Spectrum Analyzer (9kHz-26GHz)	X	Hewlett-Packard 8593E, SN: 3412A01131
Spectrum Analyzer (9kHz-26GHz)		Hewlett-Packard 8563E, SN: 3310A01174
Spectrum Analyzer (9kHz-40GHz)		Hewlett-Packard 8564E, SN: 3745A01031
Power Meter		Hewlett-Packard, 432A
Power Meter		Anritsu, ML4803A/MP
Harmonic Mixer (26-40 GHz)		Hewlett-Packard 11970A, SN: 3003A08327
Harmonic Mixer (40-60 GHz)		Hewlett-Packard 11970U, SN: 2332A00500
Harmonic Mixer (75-110 GHz)		Hewlett-Packard 11970W, SN: 2521A00179
Harmonic Mixer (140-220 GHz)		Pacific Millimeter Prod., GMA, SN: 26
S-Band Std. Gain Horn		S/A, Model SGH-2.6
C-Band Std. Gain Horn		University of Michigan, NRL design
XN-Band Std. Gain Horn		University of Michigan, NRL design
X-Band Std. Gain Horn		S/A, Model 12-8.2
X-band horn (8.2- 12.4 GHz)		Narda 640
X-band horn (8.2- 12.4 GHz)		Scientific Atlanta , 12-8.2, SN: 730
K-band horn (18-26.5 GHz)		FXR, Inc., K638KF
Ka-band horn (26.5-40 GHz)		FXR, Inc., U638A
U-band horn (40-60 GHz)		Custom Microwave, HO19
W-band horn(75-110 GHz)		Custom Microwave, HO10
G-band horn (140-220 GHz)		Custom Microwave, HO5R
Bicone Antenna (30-250 MHz)	X	University of Michigan, RLBC-1
Bicone Antenna (200-1000 MHz)	X	University of Michigan, RLBC-2
Dipole Antenna Set (30-1000 MHz)	X	University of Michigan, RLDP-1,-2,-3
Dipole Antenna Set (30-1000 MHz)		EMCO 2131C, SN: 992
Active Rod Antenna (30 Hz-50 MHz)		EMCO 3301B, SN: 3223
Active Loop Antenna (30 Hz-50 MHz)		EMCO 6502, SN: 2855
Ridge-horn Antenna (300-5000 MHz)	X	University of Michigan
Amplifier (5-1000 MHz)	X	Avantak, A11-1, A25-1S
Amplifier (5-4500 MHz)	X	Avantak
Amplifier (4.5-13 GHz)		Avantek, AFT-12665
Amplifier (6-16 GHz)		Trek
Amplifier (16-26 GHz)		Avantek
LISN (50 µH)		University of Michigan
Signal Generator (0.1-2060 MHz)		Hewlett-Packard, 8657B
Signal Generator (0.01-20 GHz )		Hewlett-Packard

**3. Configuration and Identification of Device Under Test**

The DUT is a 3.5 x 7.0 x 1.5 cm size (including valve stem) potted tire pressure sensor/transmitter that mounts on a rim inside the tire. When the vehicle is in motion it transmits the tire pressure information to the receiver in the vehicle. The transmission consists of eight ASK words repeated typically every 60 seconds. The 433.92 MHz carrier is generated by a SAW stabilized oscillator. The coding is performed by an ASIC timed by a 32.768 kHz crystal oscillator.

The DUT was designed and manufactured by Schrader Electronics Limited, 11 Technology Park, Belfast Road, Antrim BT41 1QS, Northern Ireland. It is identified as:

Schrader Remote Tire Pressure Monitoring Transmitter  
 Part: PA66-GF35,  
 SNs: none  
 -----  
 FCC ID: MRXGME433TX1  
 IC: 2546A-GMETX1

Five devices were provided. These were: (1) standard, but with access to control pads; used for emission and other measurements (total three) (2) a standard for outside photographs and (3) an unpotted for inside photographs.

**3.1 EMI Relevant Modifications**

There were no modifications made to the DUTs by this laboratory.

**4. Emission Limits**

**4.1 Radiated Emission Limits**

The DUT tested falls under the category of an Intentional Radiators and the Digital Devices. For FCC it is subject to Subpart C, Section 15.231; Subpart B, Section 15.109; and Subpart A, Section 15.33. For Industry Canada it is subject to RSS-210, Sections 6.1 and 6.3. The applicable testing frequencies with corresponding emission limits are given in Tables 4.1 and 4.2 below. As a digital device, the DUT is considered a Class B device.

Table 4.1 Radiated Emission Limits (FCC: 15.231(e); IC: RSS-210; 6.1, 6.3, Table 4).  
 Data transmission.

Frequency (MHz)	Fundamental Ave. E <sub>lim</sub> (3m)		Spurious** Ave. E <sub>lim</sub> (3m)	
	(µV/m)	dB (µV/m)	(µV/m)	dB (µV/m)
260-470	1500-5000*		150-500	
315	2418	67.7	241.8	47.7

\* Linear interpolation, formula: E = -2833.2 + 16.67\*f (MHz)  
 \*\* Measure up to tenth harmonic; 120 kHz RBW up to 1 GHz, 1 MHz RBW above 1 GHz

Table 4.2. Radiated Emission Limits (FCC: 15.33, 15.35, 15.109; IC: RSS-210, 6.2.2(r)). Digital (Class B).

Freq. (MHz)	$E_{lim}$ (3m) $\mu\text{V/m}$	$E_{lim}$ dB( $\mu\text{V/m}$ )
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
960-2000	500	54.0

Note: Quasi-Peak readings apply to 1000 MHz (120 kHz RBW)  
Average readings apply above 1000 MHz (1 MHz RBW)

#### 4.2 Conductive Emission Limits

The conductive emission limits and tests do not apply here, since the DUT is powered by a 3 V internal lithium battery.

### 5. Radiated Emission Tests and Results

#### 5.1 Anechoic Chamber Measurements

NOTE: It was a challenge to perform the emission measurements. For the tests the device was put in a driving mode (by jumping 3V and roll test pads), in which case the device transmits one second data stream every 60 seconds. This meant that the turntable had to be rotated very, slowly to collect data at sufficiently small angular increments.

To familiarize with the radiated emission behavior of the DUT, the DUT was first studied and measured in a semi-shielded anechoic chamber. In the chamber there is a set-up similar to that of an outdoor 3-meter site, with a turntable, an antenna mast, and a ground plane. Instrumentation includes spectrum analyzers and other equipment as needed.

In the chamber we studied and recorded all the emissions using a ridged horn antenna up to 4.5 GHz. The measurements made in the chamber below 1 GHz are used for pre-test evaluation only. The measurements made above 1 GHz are also used in pre-test evaluation and in final compliance assessment. We note that for the horn antenna, the antenna pattern is more directive and hence the measurement is essentially that of free space (no ground reflection). In the chamber we also recorded the spectrum and modulation characteristics of the carrier. These data are presented in subsequent sections. We also note that in scanning from 30 MHz to 4.5 GHz, there were no other significant spurious emissions observed.

#### 5.2 Outdoor Measurements

After the chamber measurements, the emissions were re-measured on the outdoor 3-meter site at 434 and 868 MHz using tuned dipoles and/or the high frequency bicone.

Appendix shows the DUT on the open-site table.

#### 5.3 Computations and Results

To convert the dBm measured on the spectrum analyzer to dB( $\mu\text{V/m}$ ), we use expression

$$E_3(\text{dB}\mu\text{V/m}) = 107 + P_R + K_A - K_G + K_E$$

where  $P_R$  = power recorded on spectrum analyzer, dB, measured at 3m  
 $K_A$  = antenna factor, dB/m  
 $K_G$  = pre-amplifier gain, including cable loss, dB  
 $K_E$  = pulse operation correction factor, dB (see 6.1)

When presenting the data, at each frequency the highest measured emission under all of the possible orientations is given. Computations and results are given in Table 5.1. There we see that the DUT meets the limits by 6.0 dB at fundamental and by 8.9 dB at harmonics.

## 6. Other Measurements and Computations

### 6.1 Correction For Pulse Operation

The transmitter is activated by rotation of the wheel and transmits about every 60 seconds. The transmission consists of eight repeated words of (minimum) 105 ms period. In a word there are two 480 $\mu$ s timing pulses and 50 Manchester format encoded data pulses 115 $\mu$ s wide. Note, Manchester encoding uses low-high, high-low transition logic and when the highs are back-to-back, that appears as a wide pulse that actually are two pulses. See Figure 6.1. In this case, the averaging factor is

$$K_E = (2 \times .480 + 50 \times 0.115) \text{ ms} / 100 \text{ ms} = 0.0671 \text{ or } -23.4 \text{ dB} \quad (\text{Use } -20.0 \text{ dB})$$

### 6.2 Emission Spectrum

Using the ridge-horn antenna and DUT placed in its aperture, emission spectrum was recorded and is shown in Figure 6.2.

### 6.3 Bandwidth of the Emission Spectrum

The measured spectrum of the signal is shown in Figure 6.3. The allowed (-20 dB) bandwidth is 0.25% of 434.0 MHz, or 1085 kHz, and from the plot we see that the -20 dB bandwidth is 65.0 kHz (actually this represents the RBW of the spectrum analyzer), and the center frequency is 433.94 MHz.

### 6.4 Effect of Supply Voltage Variation

The DUT has been designed to be powered by a single 3 V battery. For this test, the battery was paralleled by a laboratory variable power supply and relative power radiated was measured at the fundamental as the voltage was varied from 2.80 to 3.58 volts. The emission variation is shown in Figure 6.4.

### 6.5 Input Voltage and Current at Battery Terminals

$$V_{\text{start}} = 3.20 \text{ V}$$

$$V_{\text{end}} = 3.19 \text{ V}$$

$$I = \text{pulsed, could not easily measure}$$

The University of Michigan  
Radiation Laboratory  
3228 EECS Building  
Ann Arbor, Michigan 48109-2122  
(734) 764-0500

**Table 5.1 Highest Emissions Measured**

Radiated Emission - RF											Schrader/Dirk Tx 433 MHz, FCC/IC
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr dBm	Det. Used	Ka dB/m	Kg dB	E3* dBμV/m	E3lim dBμV/m	Pass dB	Comments
1	433.9	Dip	H	-24.1	Pk	21.8	17.9	66.8	72.8	6.0	flat
2	433.9	Dip	V	-24.5	Pk	21.8	17.9	66.4	72.8	6.4	end
3	867.8	Dip	H	-77.3	Pk	28.1	14.2	23.6	52.8	29.2	flat, noise
4	867.8	Dip	V	-70.1	Pk	28.1	14.2	30.8	52.8	22.0	end, noise
5	1301.7	Horn	H	-48.9	Pk	21.0	28.1	31.0	54.0	23.0	end
7	1735.6	Horn	H	-39.4	Pk	21.8	28.0	41.4	54.0	12.6	side
8	2169.5	Horn	H	-37.5	Pk	22.6	27.0	45.1	54.0	8.9	flat
9	2603.4	Horn	H	-43.2	Pk	24.1	26.1	41.8	54.0	12.2	side
10	3037.3	Horn	H	-48.1	Pk	25.5	25.0	39.4	54.0	14.6	end
11	3471.2	Horn	H	-49.3	Pk	26.8	24.6	39.9	54.0	14.1	flat
12	3905.1	Horn	H	-64.0	Pk	28.2	23.5	27.7	54.0	26.3	side
13	4339.0	Horn	H	-73.3	Pk	29.5	19.0	24.2	54.0	29.8	side, noise
14											
15											
16											
17											
18											
19											
20											
21											

\*includes -20.0 dB duty factor

Digital Emissions											
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr dBm	Det. Used	Ka dB/m	Kg dB	E3* dBμV/m	E3lim dBμV/m	Pass dB	Comments
1											
2											
3											Digital emissions are more than 20 dB below FCC Class B limit
4											

Conducted Emissions							
#	Freq. MHz	Line Side	Det. Used	Vtest dBμV	Vlim dBμV	Pass dB	Comments
1							
2							Not applicable
3							
4							

Meas. 09/02/02; U of Mich.

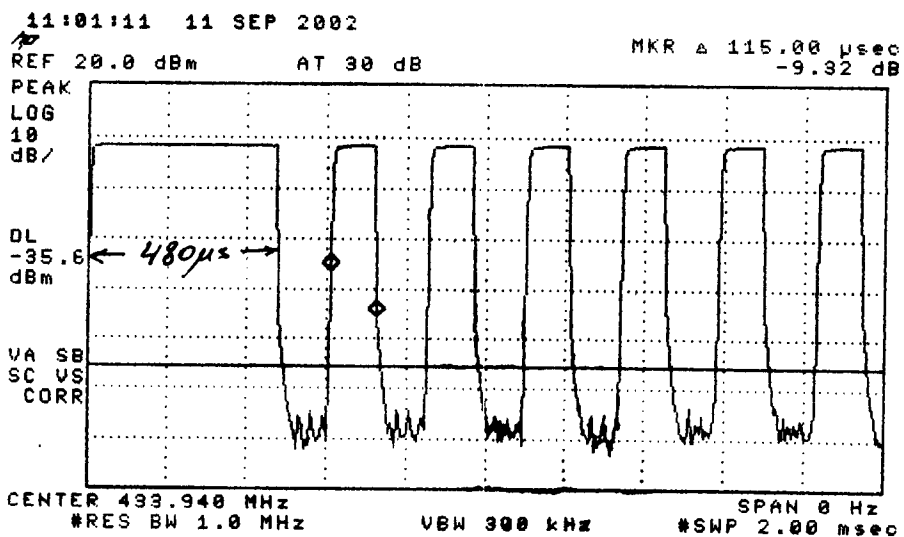
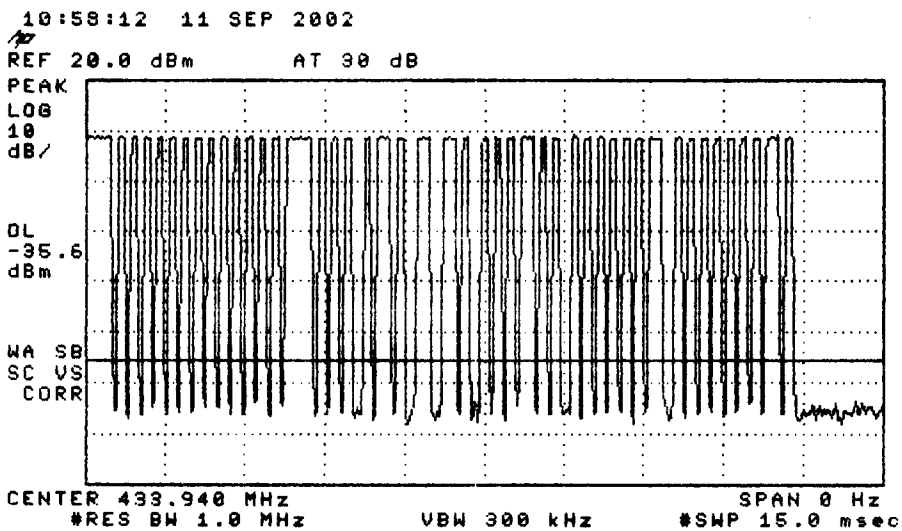
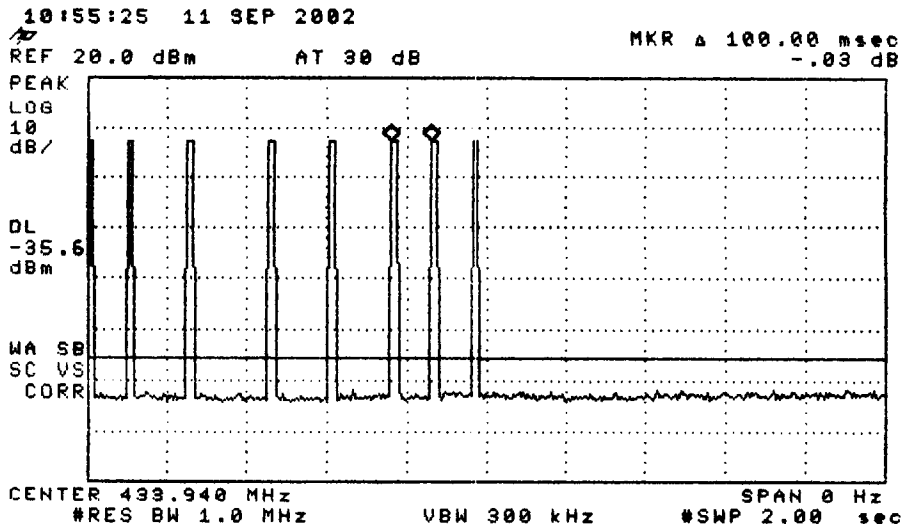


Figure 6.1. Transmissions modulation characteristics: (top) transmission repetition, (center) transmission pulses, (bottom) pulse widths.

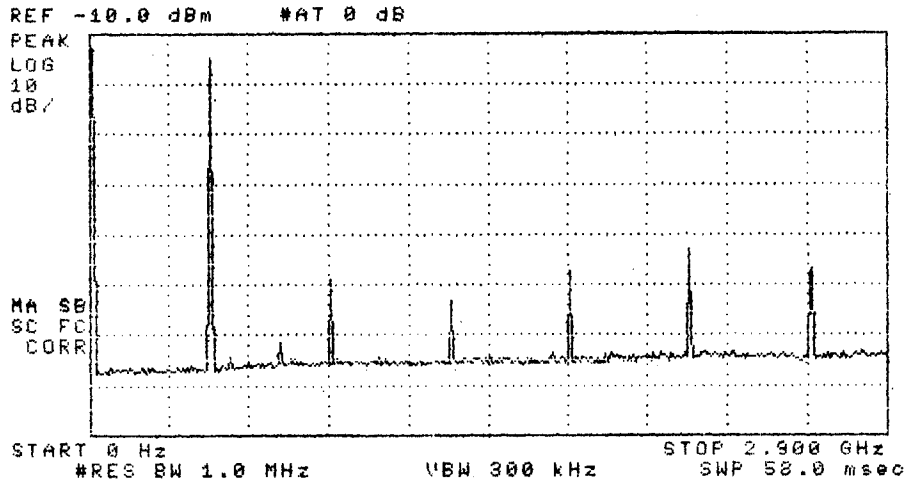


Figure 6.2. Emission spectrum of the DUT in free space (pulsed emission). The amplitudes are only indicative (not calibrated).

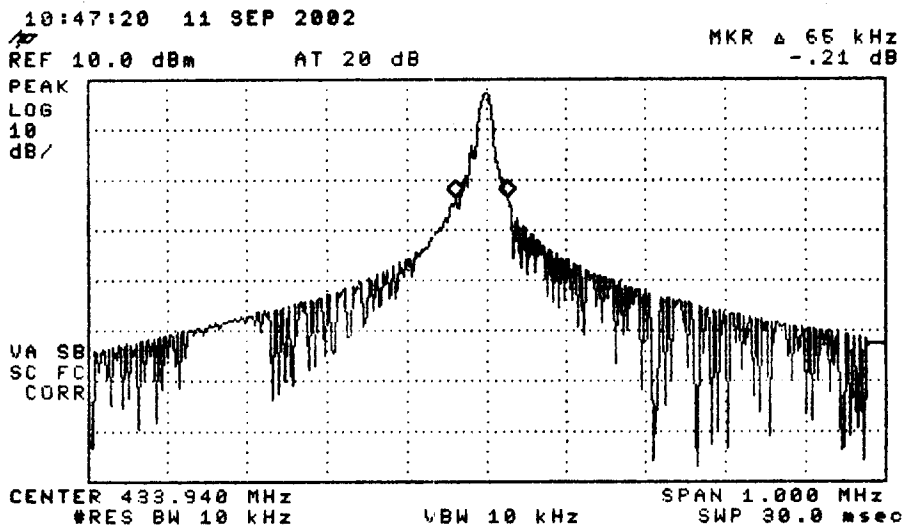


Figure 6.3. Measured bandwidth of the DUT (repeated pulsed emission).



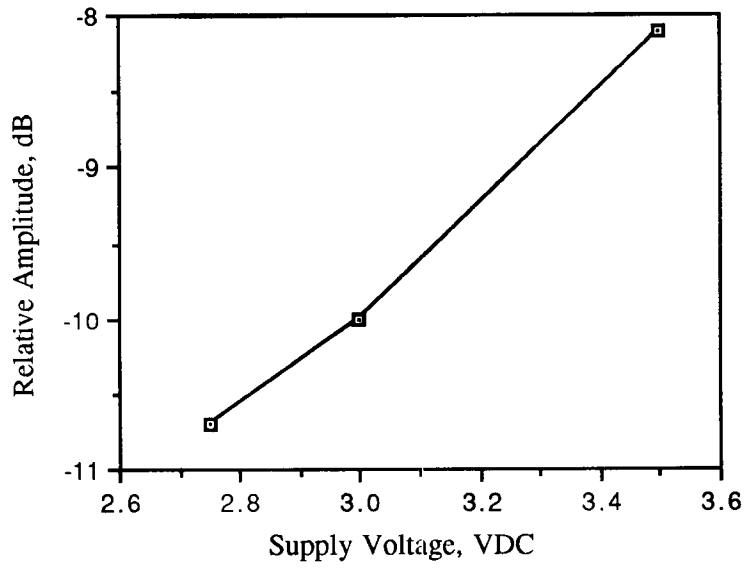


Figure 6.4. Relative emission at 434 MHz vs. supply voltage. (pulsed emission)