

Nemko Korea Co., Ltd.

300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

TEL:+82 31 322 2333

FAX:+82 31 322 2332

FCC EVALUATION REPORT FOR CERTIFICATION

Applicant :**Hansol LCD Inc.****#27-29, Hancheon-Ri, Ducksan-Myun,****Jincheon-Gun, Choongbuk, Korea****Attn : Mr. W. S. Lee****Dates of Issue :July 07, 2003****Test Report No. : NK2DE422****Test Site : Nemko Korea Co., Ltd.****EMC site, Korea****Manufacturer :****Hansol Electronics (Thailand) Co., Ltd.****168 Moo 1 Tambon Banbung, Amphoe Banbung,****Chonburi Province 20170 Thailand****FCC ID*****MSAB15HF*****Brand Name*****Hansol*****Contact Person****Hansol LCD Inc.****#27-29, Hancheon-Ri, Ducksan-Myun, Jincheon-Gun,****Choongbuk, Korea****Mr. W. S. Lee****Telephone No. : +82 +43 530 8554**

FCC Rule Part(s):

Part 15 & 2

Classification :

FCC Class B Device

EUT Type:


15" LCD Monitor

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Tested By : T. H. Ryu
Engineer



Reviewed By : H.H. Kim
Manager & Chief Engineer

TABLE OF CONTENTS

SCOPE	3
INTRODUCTION (Site Description)	4
GENERAL TEST CONDITIONS	5
DESCRIPTION OF TEST (Conducted Emissions)	7
DESCRIPTION OF TEST (Radiated Emissions)	8
TEST DATA (Conducted Emissions)	9
TEST DATA (Radiated Emissions)	14
PLOTS OF EMISSIONS	19
SAMPLE CALCULATIONS	29
ACCURACY of MEASUREMENT	30
TEST EQUIPMENT	31
RECOMMENDATION/CONCLUSION	32
APPENDIX A - LABELLING REQUIREMENTS	33
APPENDIX B - CIRCUIT DIAGRAM	34
APPENDIX C - PHOTOGRAPHS of TEST SET-UP	35
APPENDIX D - EUT PHOTOGRAPHS	37
APPENDIX E - USER'S MANUAL	63
APPENDIX F - SCHEMATIC DIAGRAM	64

SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15.

Responsible Party* :	Hansol LCD Inc.
Contact Person :	Mr. W. S. Lee Tel No.: +82 +43 530 8554
Manufacturer :	Hansol LCD Inc. #27-29, Hancheon-ri, Ducksan-Myun, Jincheon-Gun, Choongbuk, Korea Tel No.: +82 +43 530 8554
Factory :	168 Moo 1 Tambon Banbung, Amphoe Banbung, Chonburi Province 20170 Thailand

- FCC ID: MSAB15HF
- Brand Name: Hansol
- EUT Type: 15" LCD Monitor
- Electric Rating: 100-240V AC, 50/60Hz, 0.45A
- Classification: FCC Class B
- Rule Part(s): FCC Part 15 & Part 2
- Test Procedure(s): ANSI C63.4 (1992)
- Dates of Test: June 24, 2003 to July 4, 2003
- Place of Tests: Nemko Korea Co., Ltd. EMC Site
- Test Report No.: NK2DE422

INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated and conducted emissions emanating from **Hansol LCD Inc.**

FCC ID : **MSAB15HF, 15" LCD Monitor.**

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory**.

The site address is 300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

The area of Nemko Korea Corporation LTD. EMC Test Site is located in a mountain area at 80 kilometers (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 kilometers (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.



Nemko Korea Co., Ltd.
OPEN AREA TEST SITE
300-2, Osan-Ri, Mohyun-Myun, Yongin-
City Kyungki-Do, KOREA 449-852
Tel)+82-31-322-2333
Fax)+82-31-322-2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab and Incheon Airport.

TEST CONDITIONS & EUT INFORMATION

Operating During Test

The EUT was operated by the software. The PC sent “H” pattern to monitor(EUT) and The monitor displayed “H” pattern on screen. It also sent “H” pattern to printer, then the printer printed it out. This software had above all functions conduct in order.

And a sinusoidal signal of 1kHz from HDD was played continuously.

The emissions test were performed with five kinds of combo board and two kinds of LCD panel of EUT (monitor) were applied to the tests.

Support Equipment

PC	DELL ,Model: Precision 340 1.8m unshielded AC power cable	S/N: DK6481S
Monitor(EUT)	Hansol, FCC ID: MSAB15HF 1.8m shielded D-sub cable	S/N: N/A
Keyboard	BTC, Model: 5900 1.8m unshielded Din cable	S/N: KI508177
PS/2 Mouse	Logitech, Model: M-S48 1.8m unshielded Din cable	S/N: LZA82186807
USB Mouse	Logitech, Model: M-UB48 1.5m shielded USB cable	S/N: LZA71148729
Serial Mouse	IO.TEC., Model: LASER MOUSE 1.8m unshielded Dsub cable	S/N: N/A
Printer	H.P., Model: C4562K 1.8m unshielded AC power cable 1.8m Shield D-sub cable	S/N: SG74T1C206
Adapter	NMB, Model: C2182A 1.8m unshielded AC power cable 1.5m unshielded DC power cable	S/N: 230597
Headphone	J-TECH, Model: SBC6660 1.8m unshielded Stereo Jack cable	S/N: N/A

EUT Information

Clock	24.576MHz(Y1)
Chipset(s)	RTD2010(U3)
Horizontal Frequency	60kHz(Max)
Vertical Frequency	75Hz(Max)
LCD panel	1) LTM150XH-L01 / Samsung Electronics Co., Ltd.
	2) LTM150X06 / LG Philips LCD
Combo Board	1) IPHS4L 15 / IPT Research Co., Ltd.
	2) IPHS4L-S / IPT Research Co., Ltd.
	3) AI-0017 / Lien Chang Electronic Enterprise Co., Ltd.
	4) AI-0036 / Lien Chang Electronic Enterprise Co., Ltd.
	5) FLF1521-01A / Frontek
Port(s)	VGA, Audio Input, Headphone or Speaker Output

Description of Test Modes

The EUT was pre-tested under the following resolutions mode:

For Analogue video interface port(Dsub)

1. 1024 X 768 (75Hz/ 60.023kHz), clock frequency 78.75MHz
2. 800 X 600 (75Hz/ 46.875kHz), clock frequency 49.5MHz
3. 640 X 480 (75Hz/ 37.5kHz), clock frequency 31.5MHz

The worst emission level was found when the EUT was tested under 1024 X 768 resolution, therefore, the test data this mode was recorded in the report.

DESCRIPTION OF TESTS

Conducted Emissions

The Line conducted emission test facility is located inside a 4 X 7 X 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1mX 1.5M wooden table 0.8m height is placed 0.4m away from the vertical wall and 1.5m away from the side of wall of the shielded room

Rohde & Schwarz LISN ESH3-Z5 and Kyoritsu LISN KNW-407 50ohm/50uH line impedance stabilization network are bonded to the shielded room.

The EUT is powered from the Rohde & Schwarz LISN and the support equipment is powered from the Kyoritsu LISN. Power to the LISN s are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1/2".

If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentine fashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150KHz to 30MHz with 20msec sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCS30).

The detector function was set to CISPR quasi-peak mode & average mode.

The bandwidth of receiver was set to 9KHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

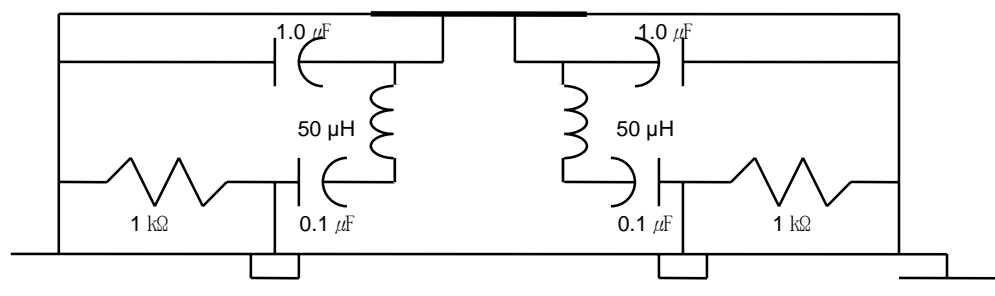


Fig. 2. LISN Schematic Diagram

DESCRIPTION OF TESTS

Radiated Emissions

Preliminary measurement were made indoors at 1 meter using broad band antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found. The spectrum was scanned from 30 to 1000MHz using Biconical log Antenna(ARA, LPB-2520/A). Above 1GHz, log periodic antenna (Rohde Schwarz HL025:upto 18GHz) was used.

Final Measurements were made outdoors at 3 or 10m test range using Logbicon Super Antenna(Schwarzbeck, VULB9166) or log periodic antenna.(Rohde Schwarz HL025)

The test equipment was placed on a wooden table.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was reexamined and investigated using EMI test receiver.(ESCS30)

The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120KHz or 1MHz depending on the frequency or type of signal.

The half wave dipole antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non- metallic 1.0X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The turn table containing the Technology was rotated; the antenna height was varied 1 to 4meter and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by : switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R/S signal generator.

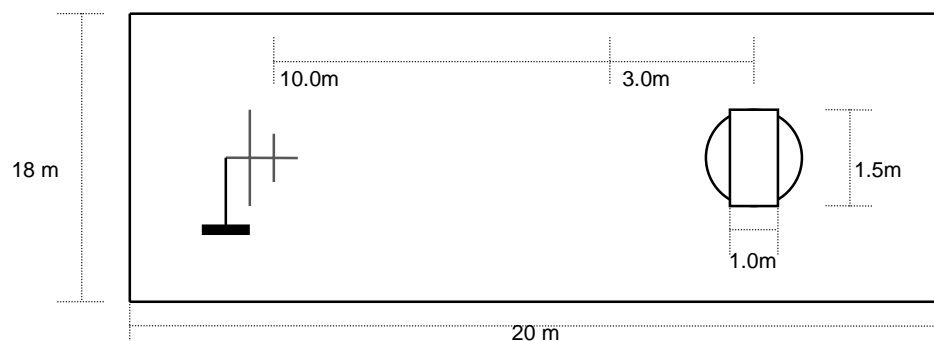


Fig. 3. Dimensions of Outdoor Test Site

TEST DATA

Conducted Emissions

FCC ID : MSAB15HF

LCD Panel : LTM150XH-L01 / Samsung Electronics Co., Ltd.

Combo Board : IPHS4L 15 / IPT Research Co., Ltd.

Video Interface Port : Analogue

Frequency (MHz)	Level(dB μ V)		Line	Limit(dB μ V)		Margin(dBuV)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.20	49.6	42.2	L	63.6	53.6	14.0	11.4
0.30	35.2	28.7	N	60.2	50.2	25.0	21.5
2.31	31.7	28.5	N	56.0	46.0	24.3	17.5
10.66	34.0	28.4	N	60.0	50.0	26.0	21.6
11.96	40.6	34.6	L	60.0	50.0	19.4	15.4
23.65	33.9	30.3	L	60.0	50.0	26.1	19.7

Table 1. Line Conducted Emissions Tabulated Data

NOTES:

1. Measurements using CISPR quasi-peak mode & average mode.
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is on the FCC part section 15.107 (a).
- 4.LINE : L =Line , N = Neutral



Tested by : T. H. Ryu

TEST DATA

Conducted Emissions

FCC ID : MSAB15HF

LCD Panel : LTM150XH-L01 / Samsung Electronics Co., Ltd.

Combo Board : IPHS4L-S / IPT Research Co., Ltd.

Video Interface Port : Analogue

Frequency (MHz)	Level(dB μ V)		Line	Limit(dB μ V)		Margin(dBuV)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.19	55.2	47.5	N	64.0	54.0	8.8	6.5
0.29	41.5	34.6	N	60.5	50.5	19.0	15.9
0.89	27.2	26.9	L	56.0	46.0	28.8	19.1
14.62	34.4	33.9	N	60.0	50.0	25.6	16.1
15.42	38.0	31.4	L	60.0	50.0	22.0	18.6
17.10	38.2	33.5	L	60.0	50.0	21.8	16.5

Table 1. Line Conducted Emissions Tabulated Data

NOTES:

1. Measurements using CISPR quasi-peak mode & average mode.
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is on the FCC part section 15.107 (a).
- 4.LINE : L =Line , N = Neutral



Tested by : T. H. Ryu

TEST DATA

Conducted Emissions

FCC ID : MSAB15HF

LCD Panel : LTM150XH-L01 / Samsung Electronics Co., Ltd.

Combo Board : AI-0017 / Lien Chang Electronics Enterprise Co., Ltd.

Video Interface Port : Analogue

Frequency (MHz)	Level(dB μ V)		Line	Limit(dB μ V)		Margin(dBuV)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.19	46.3	38.3	L	64.0	54.0	17.7	15.7
0.32	35.8	33.7	N	59.7	49.7	23.9	16.0
0.58	28.5	27.1	N	56.0	46.0	27.5	18.9
1.67	26.4	24.4	N	56.0	46.0	29.6	21.6
6.55	36.9	35.1	N	60.0	50.0	23.1	14.9
8.03	31.4	29.9	N	60.0	50.0	28.6	20.1

Table 1. Line Conducted Emissions Tabulated Data

NOTES:

1. Measurements using CISPR quasi-peak mode & average mode.
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is on the FCC part section 15.107 (a).
- 4.LINE : L =Line , N = Neutral



Tested by : T. H. Ryu

TEST DATA

Conducted Emissions

FCC ID : MSAB15HF

LCD Panel : LM150X06 / LG Philips LCD

Combo Board : FLF1521-01A / Frontek

Video Interface Port : Analogue

Frequency (MHz)	Level(dB μ V)		Line	Limit(dB μ V)		Margin(dBuV)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.18	45.9	36.7	N	64.5	54.5	18.6	17.8
1.07	34.0	30.3	N	56.0	46.0	22.0	15.7
1.78	35.0	31.5	N	56.0	46.0	21.0	14.5
2.44	35.3	31.1	N	56.0	46.0	20.7	14.9
15.43	37.3	32.1	L	60.0	50.0	22.7	17.9
16.88	46.2	44.1	N	60.0	50.0	13.8	5.9

Table 1. Line Conducted Emissions Tabulated Data

NOTES:

1. Measurements using CISPR quasi-peak mode & average mode.
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is on the FCC part section 15.107 (a).
- 4.LINE : L =Line , N = Neutral



Tested by : T. H. Ryu

TEST DATA

Conducted Emissions

FCC ID : MSAB15HF

LCD Panel : LM150X06 / LG Philips LCD

Combo Board : AI-0036 / Lien Chang Electronics Enterprise Co., Ltd.

Video Interface Port : Analogue

Frequency (MHz)	Level(dB μ V)		Line	Limit(dB μ V)		Margin(dBuV)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.19	38.1	29.8	N	64.0	54.0	25.9	24.2
0.25	29.5	24.6	N	61.8	51.8	32.3	27.2
12.66	33.6	32.2	N	60.0	50.0	26.4	17.8
16.89	45.3	43.2	N	60.0	50.0	14.7	6.8
19.72	30.7	27.3	N	60.0	50.0	29.3	22.7
25.33	28.8	24.2	N	60.0	50.0	31.2	25.8

Table 1. Line Conducted Emissions Tabulated Data

NOTES:

1. Measurements using CISPR quasi-peak mode & average mode.
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is on the FCC part section 15.107 (a).
- 4.LINE : L =Line , N = Neutral



Tested by : T. H. Ryu

TEST DATA

Radiated Emissions

FCC ID : MSAB15HF

LCD Panel : LTM150XH-L01 / Samsung Electronics Co., Ltd.

Combo Board : IPHS4L 15 / IPT Research Co., Ltd.

Video Interface Port : Analogue

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
63.00	49.8	V	-21.5	28.3	40.0	11.7
157.50	40.4	V	-12.8	27.6	43.5	15.9
214.99	42.1	H	-13.3	28.8	43.5	14.7
220.49	42.6	H	-13.2	29.4	46.0	16.6
355.83	38.6	V	-9.9	28.7	46.0	17.3
364.50	43.2	H	-9.6	33.6	46.0	12.4

Table 5. Radiated Measurements at 3meters

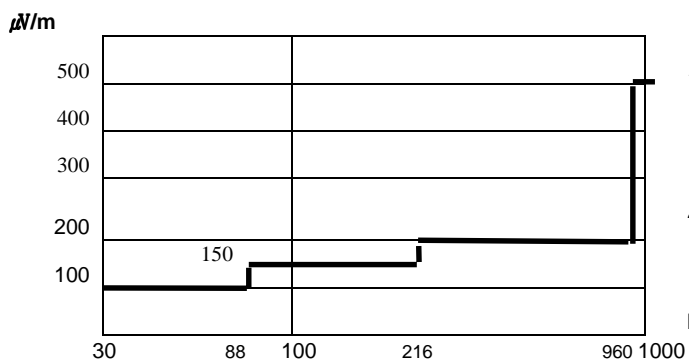


Fig. 5. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
 2. The radiated limits are shown on Figure 5.
- Above 1GHz the limit is 500 μ V/m.

NOTES:

1. *Pol. H =Horizontal V=Vertical
2. **AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode.

T. H. Ryu

Tested by : T. H. Ryu

TEST DATA

Radiated Emissions

FCC ID : MSAB15HF

LCD Panel : LTM150XH-L01 / Samsung Electronics Co., Ltd.

Combo Board : IPHS4L-S / IPT Research Co., Ltd.

Video Interface Port : Analogue

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
63.00	50.2	V	-21.5	28.7	40.0	11.3
157.50	42.2	V	-12.8	29.4	43.5	14.1
202.71	46.0	V	-13.6	32.4	43.5	11.1
213.83	41.2	V	-13.4	27.8	43.5	15.7
364.50	44.4	H	-9.6	34.8	46.0	11.2
675.27	37.8	H	-1.6	36.2	46.0	9.8

Table 5. Radiated Measurements at 3meters

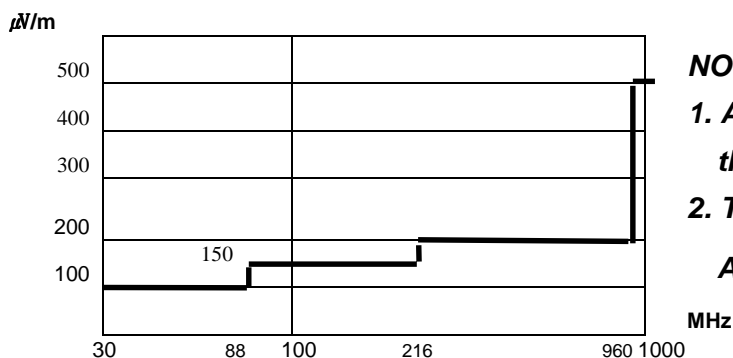


Fig. 5. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 5.

Above 1GHz the limit is 500 μ V/m.

NOTES:

1. *Pol. H=Horizontal V=Vertical
2. **AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode.

T. H. Ryu

Tested by : T. H. Ryu

TEST DATA

Radiated Emissions

FCC ID : MSAB15HF

LCD Panel : LTM150XH-L01 / Samsung Electronics Co., Ltd.

Combo Board : AI-0017 / Lien Chang Electronics Enterprise Co., Ltd.

Video Interface Port : Analogue

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
63.02	51.9	V	-21.5	30.4	40.0	9.6
152.90	41.1	V	-12.7	28.4	43.5	15.1
157.50	44.2	V	-12.8	31.4	43.5	12.1
216.65	41.2	V	-13.3	27.9	46.0	18.1
299.86	41.0	V	-11.3	29.7	46.0	16.3
364.50	44.8	V	-9.6	35.2	46.0	10.8

Table 5. Radiated Measurements at 3meters

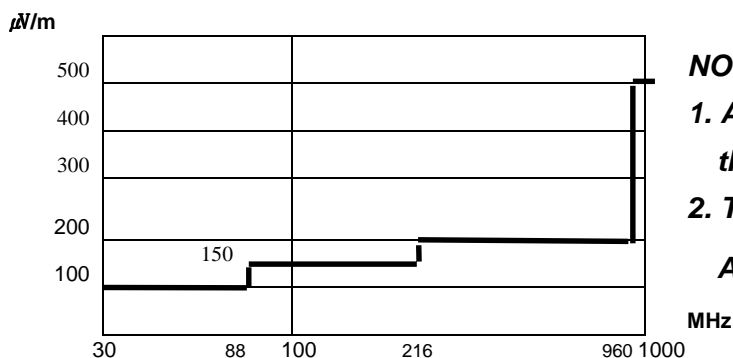


Fig. 5. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 5.

Above 1GHz the limit is 500 μ V/m.

NOTES:

1. *Pol. H=Horizontal V=Vertical
2. **AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode.

T. H. Ryu

Tested by : T. H. Ryu

TEST DATA

Radiated Emissions

FCC ID : MSAB15HF

LCD Panel : LM150X06 / LG Philips LCD

Combo Board : FLF1521-01A / Frontek

Video Interface Port : Analogue

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
81.30	53.9	H	-20.5	33.4	40.0	6.6
85.90	55.8	V	-19.7	36.1	40.0	3.9
157.00	47.8	V	-12.8	35.0	43.5	8.5
196.40	50.9	V	-13.6	37.3	43.5	6.2
202.40	50.1	V	-13.6	36.5	43.5	7.0
809.40	38.3	V	1.8	40.1	46.0	5.9

Table 5. Radiated Measurements at 3meters

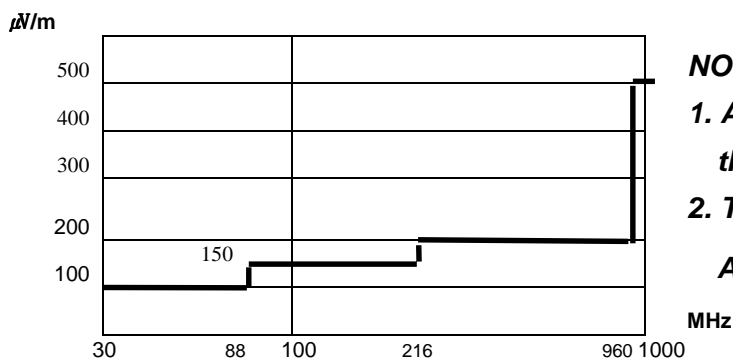


Fig. 5. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 5.

Above 1GHz the limit is 500 μ V/m.

NOTES:

1. *Pol. H=Horizontal V=Vertical
2. **AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode.

T. H. Ryu

Tested by : T. H. Ryu

TEST DATA

Radiated Emissions

FCC ID : MSAB15HF

LCD Panel : LM150X06 / LG Philips LCD

Combo Board : AI-0036 / Lien Chang Electronics Enterprise Co., Ltd.

Video Interface Port : Analogue

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
78.80	54.6	H	-20.8	33.8	40.0	6.2
85.80	55.6	H	-19.7	35.9	40.0	4.1
157.60	44.2	H	-12.8	31.4	43.5	12.1
569.90	38.4	H	-4.4	34.0	46.0	12.0
743.60	37.5	H	0.2	37.7	46.0	8.3
863.90	38.0	H	3.1	41.1	46.0	4.9

Table 5. Radiated Measurements at 3meters

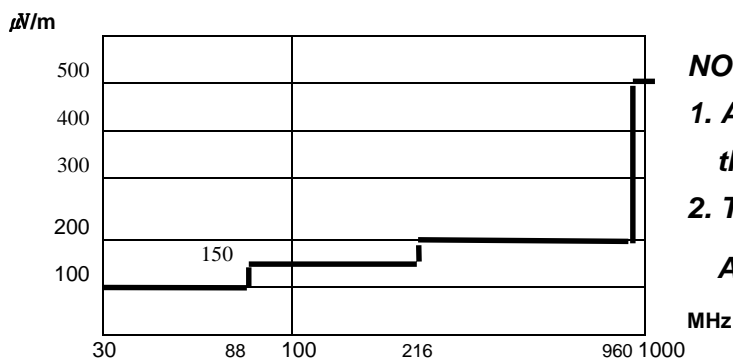


Fig. 5. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 5.

Above 1GHz the limit is 500 μ V/m.

NOTES:

1. *Pol. H =Horizontal V=Vertical
2. **AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode.

T. H. Ryu


Tested by : T. H. Ryu

PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (Line)**


▶ LCD Panel : LTM150XH-L01 / Samsung Electronics Co., Ltd.

▶ Combo Board : IPHS4L 15 / IPT Research Co., Ltd.

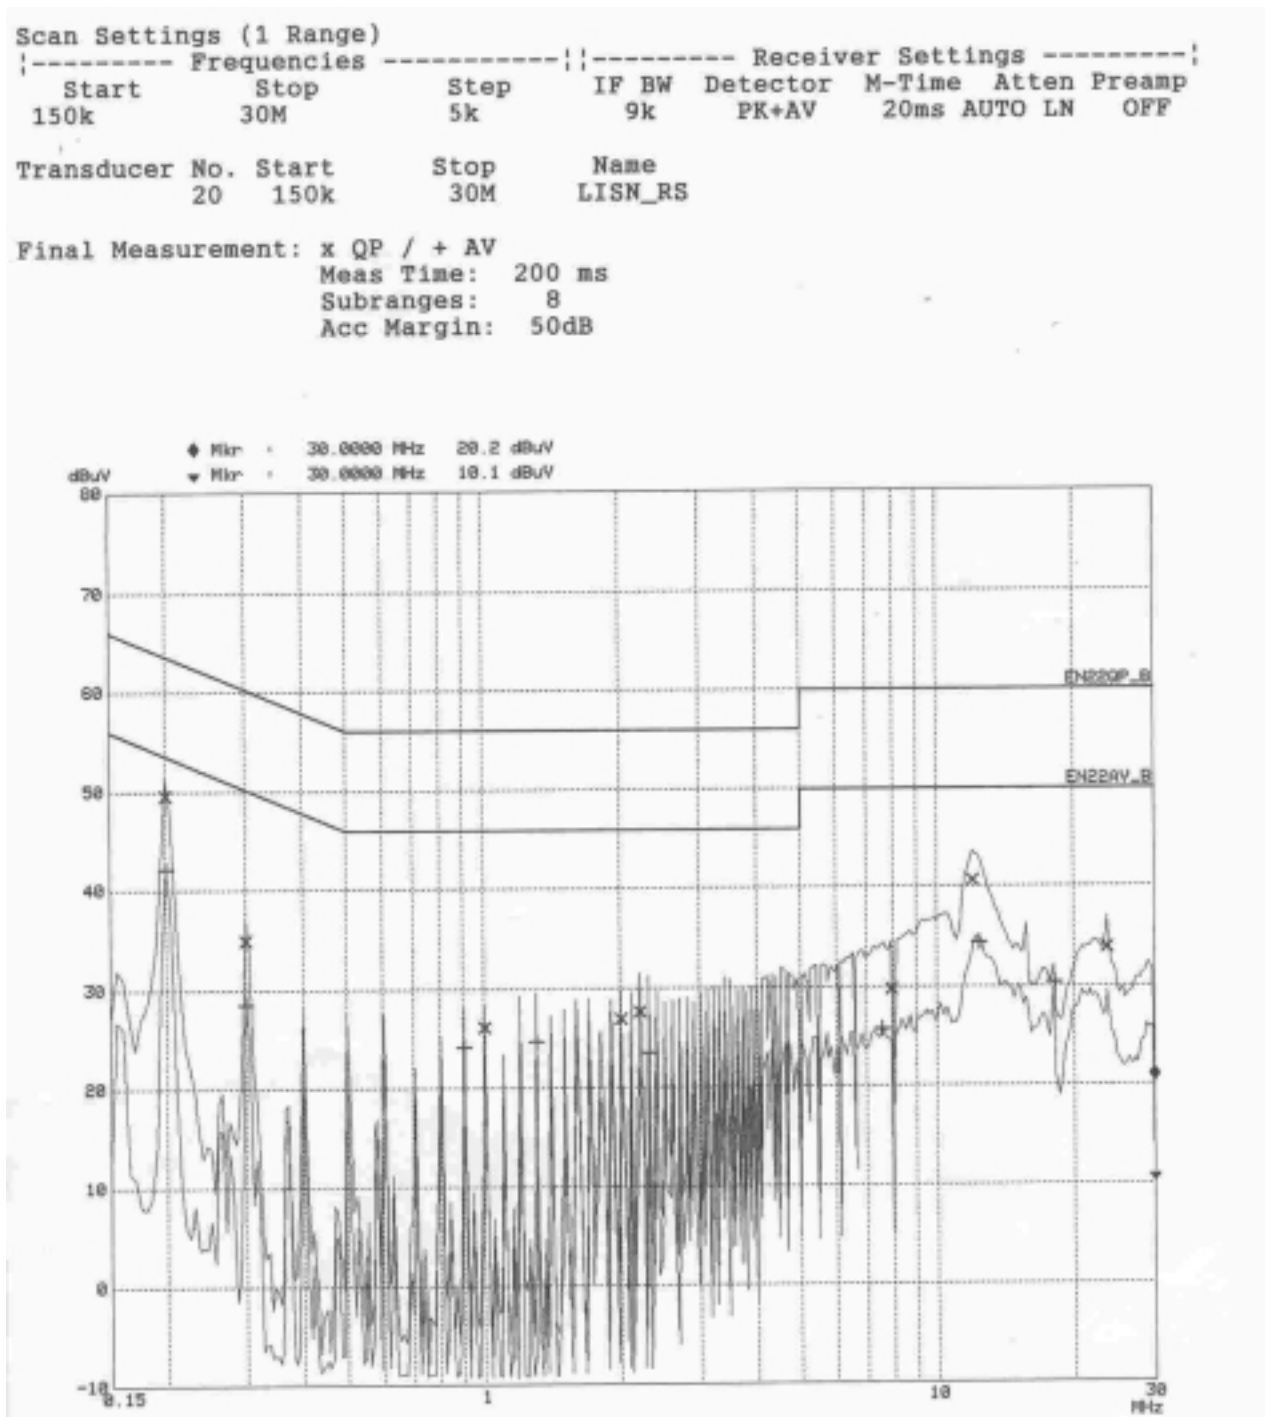

PLOTS OF EMISSIONS


- Conducted Emission at the Mains port (Neutral)**
 - LCD Panel : LTM150XH-L01 / Samsung Electronics Co., Ltd.**
 - Combo Board : IPHS4L 15 / IPT Research Co., Ltd.**

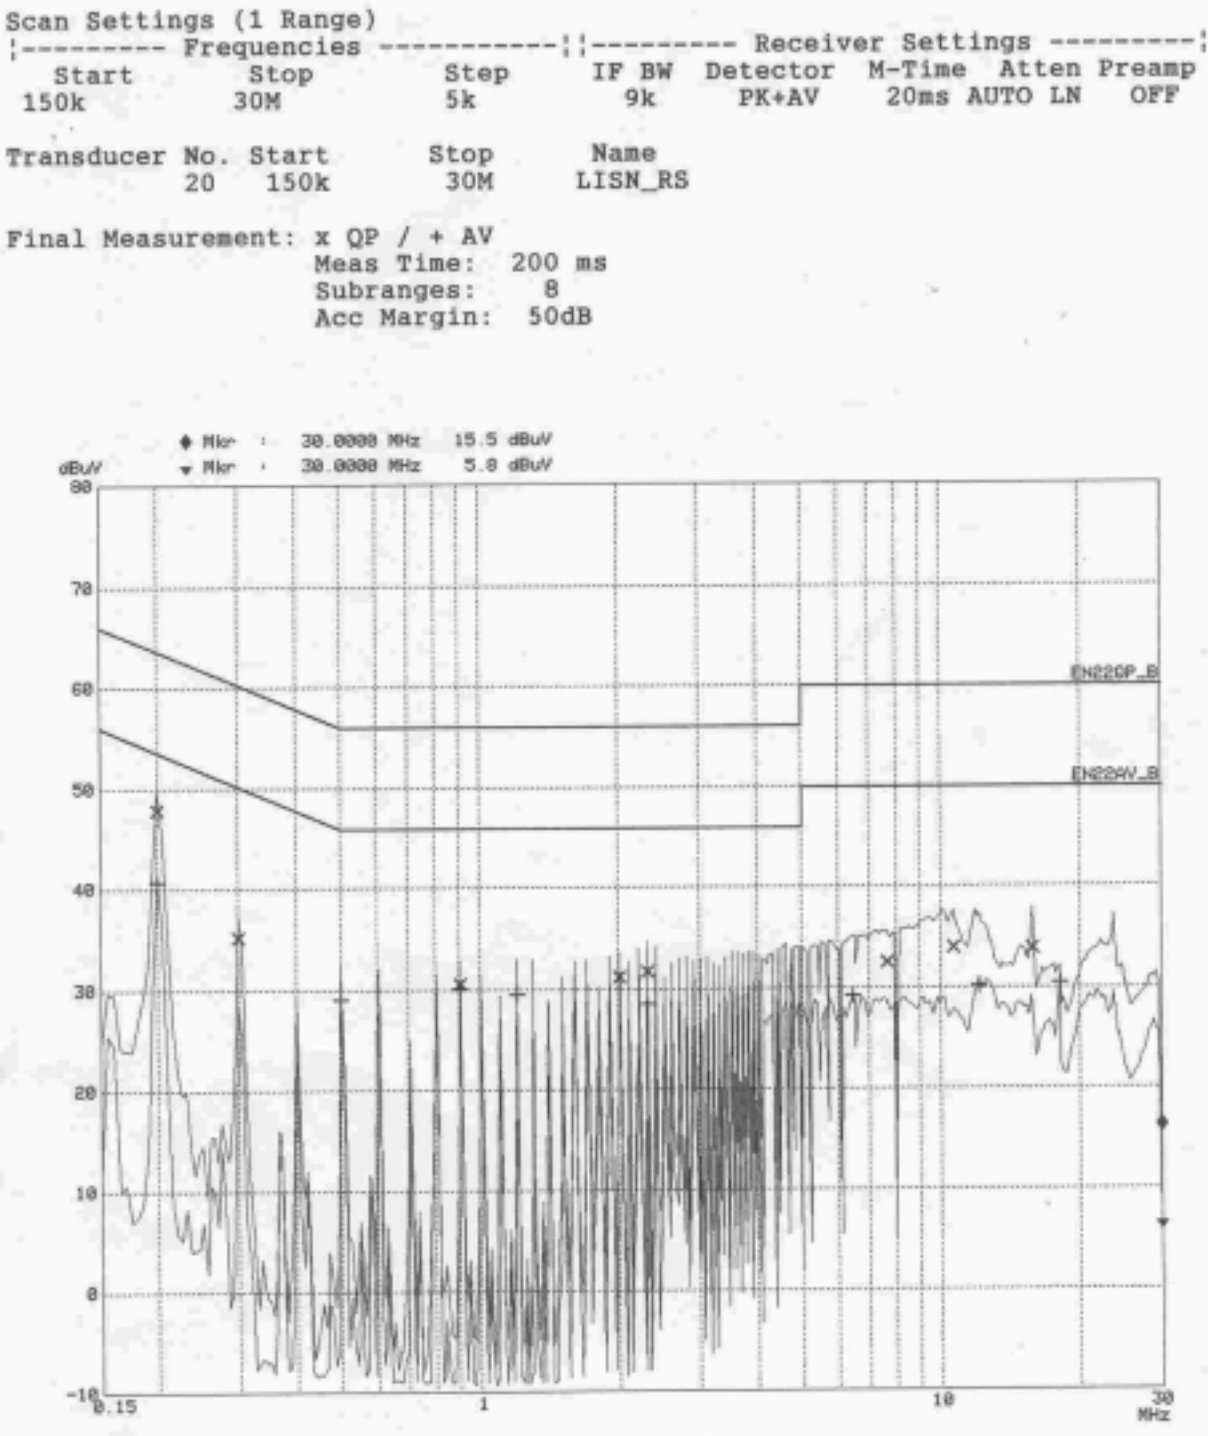

PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (Line)**

- ▶ LCD Panel : LTM150XH-L01 / Samsung Electronics Co., Ltd.
▶ Combo Board : IPHS4L-S / IPT Research Co., Ltd.

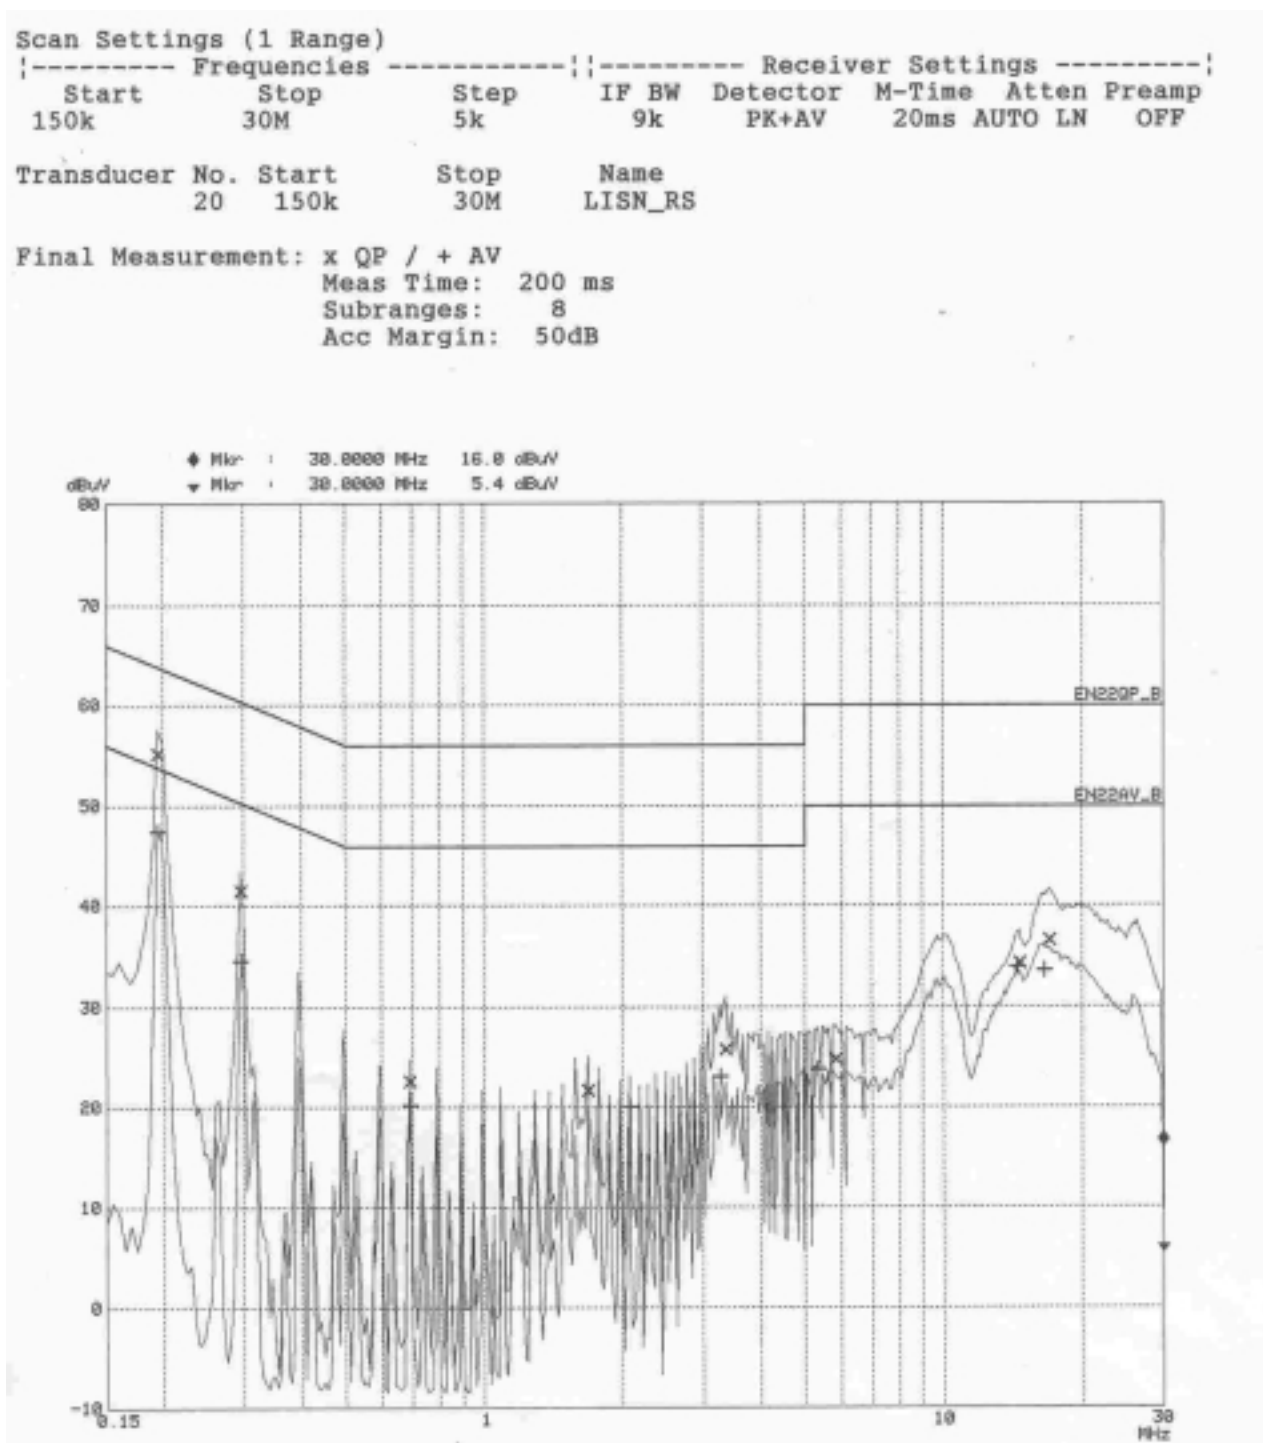


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (Neutral)**


▶ LCD Panel : LTM150XH-L01 / Samsung Electronics Co., Ltd.

▶ Combo Board : IPHS4L-S / IPT Research Co., Ltd.

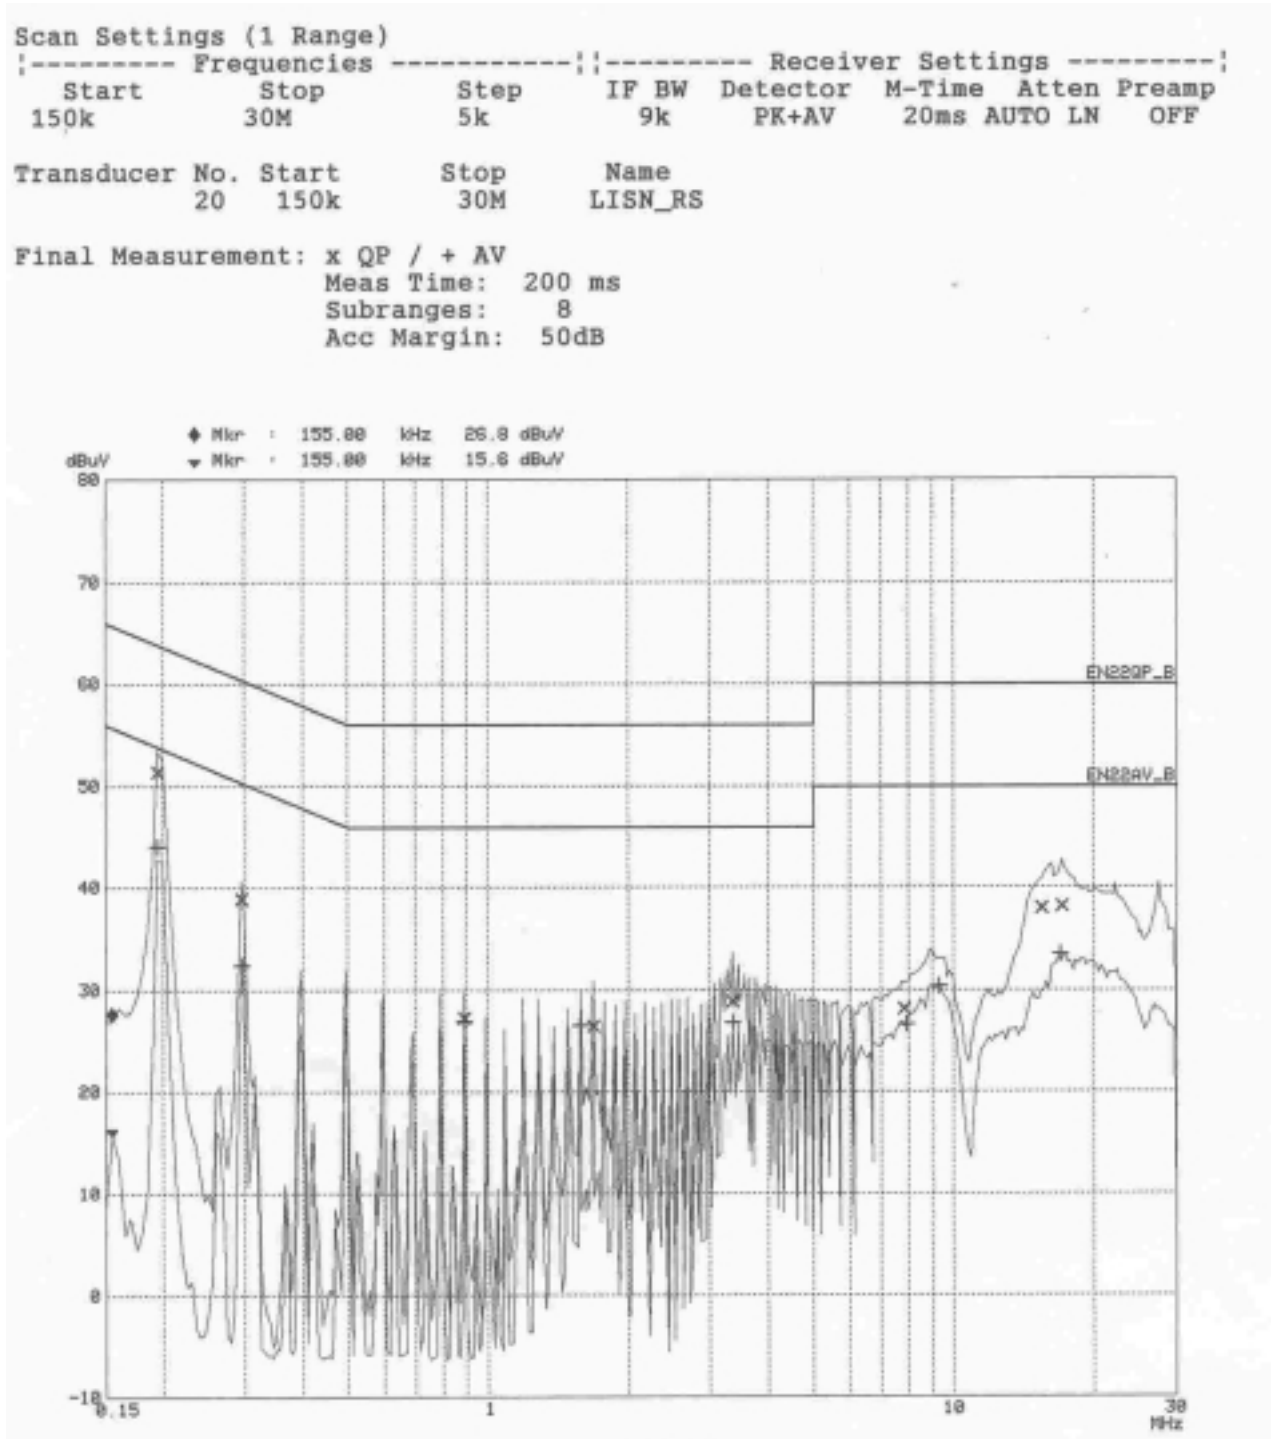

PLOTS OF EMISSIONS


- Conducted Emission at the Mains port (Line)**
 - LCD Panel : LTM150XH-L01 / Samsung Electronics Co., Ltd.**
 - Combo Board : AI-0017 / Lien Chang Electronics Enterprise Co., Ltd.**

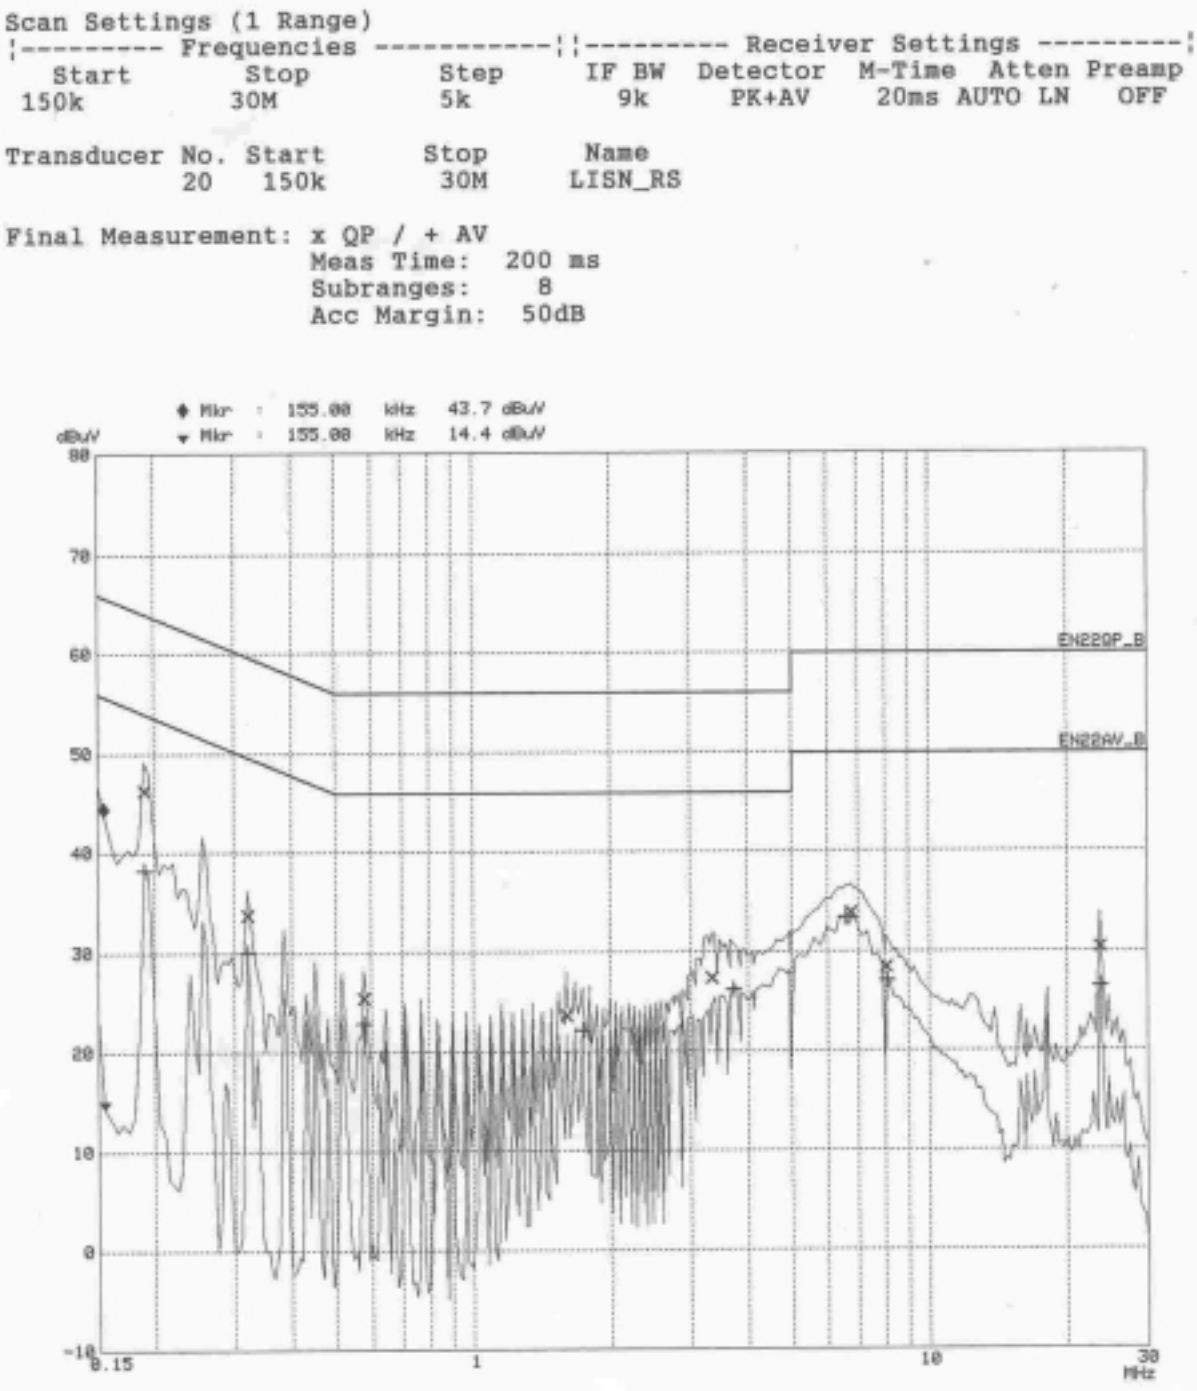

PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (Neutral)**

- LCD Panel : LTM150XH-L01 / Samsung Electronics Co., Ltd.
► Combo Board : AI-0017 / Lien Chang Electronics Enterprise Co., Ltd.

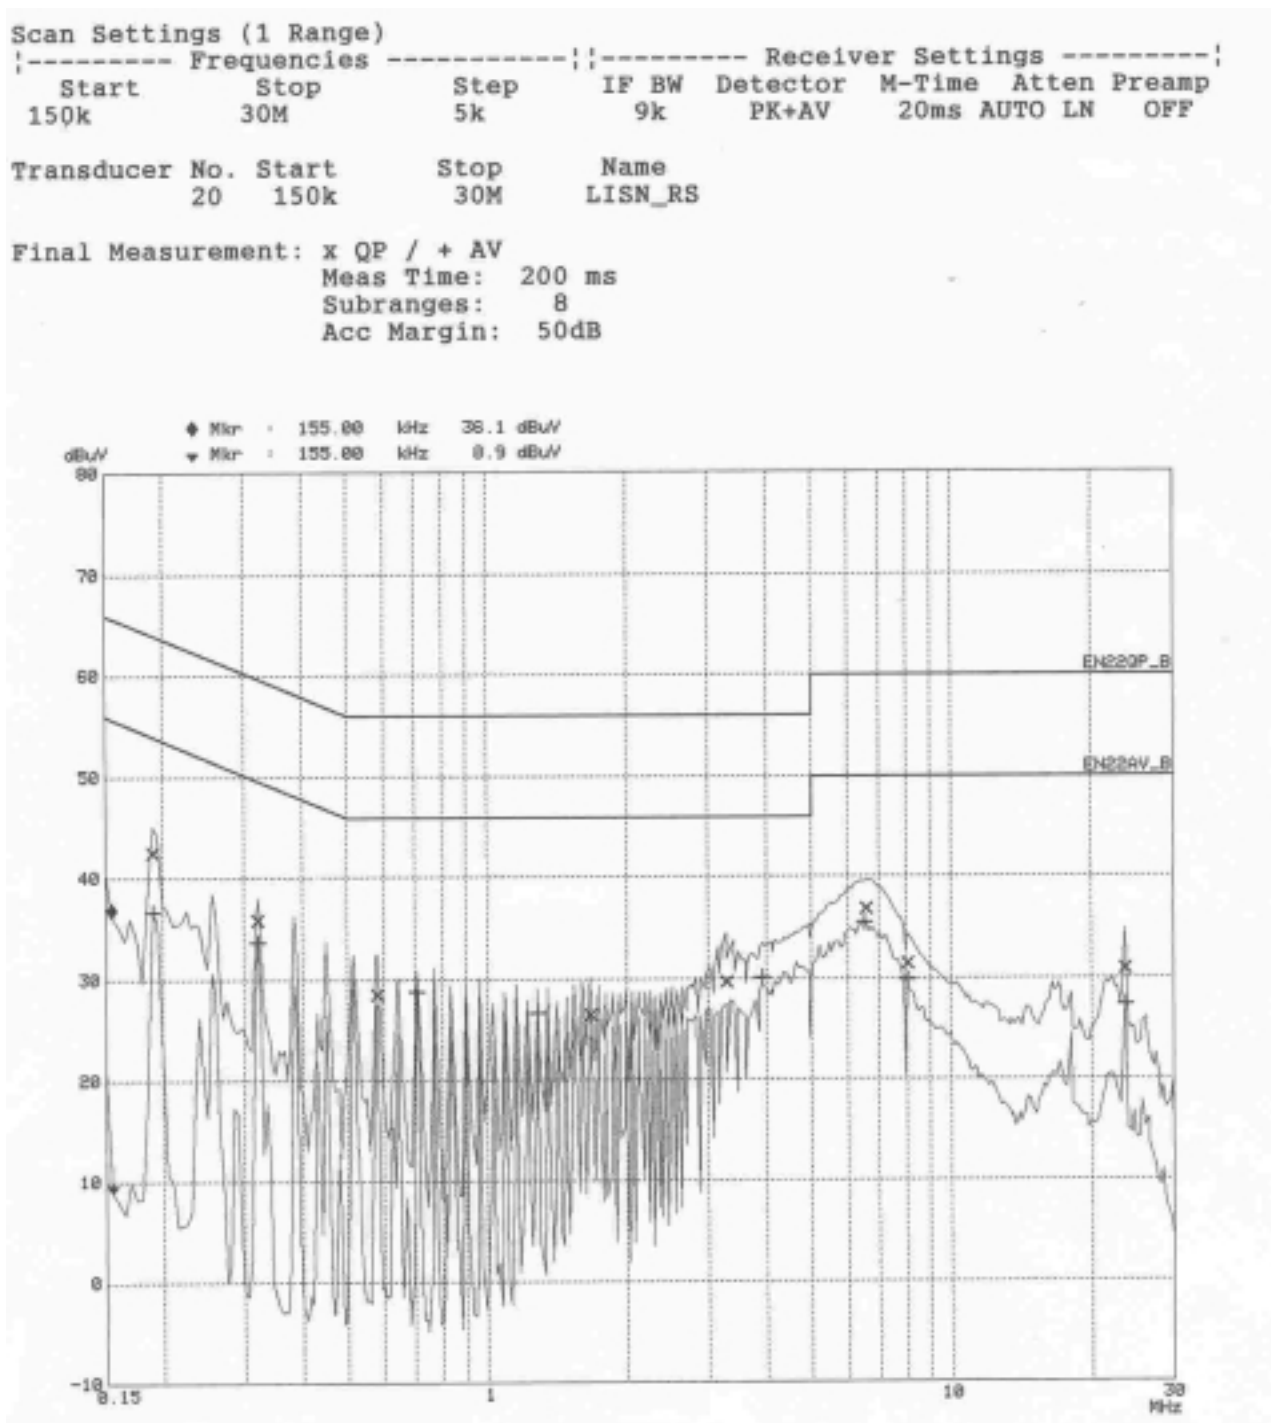


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (Line)**

▶ LCD Panel : LM150X06 / LG Philips LCD

▶ Combo Board : FLF1521-01A / Frontek

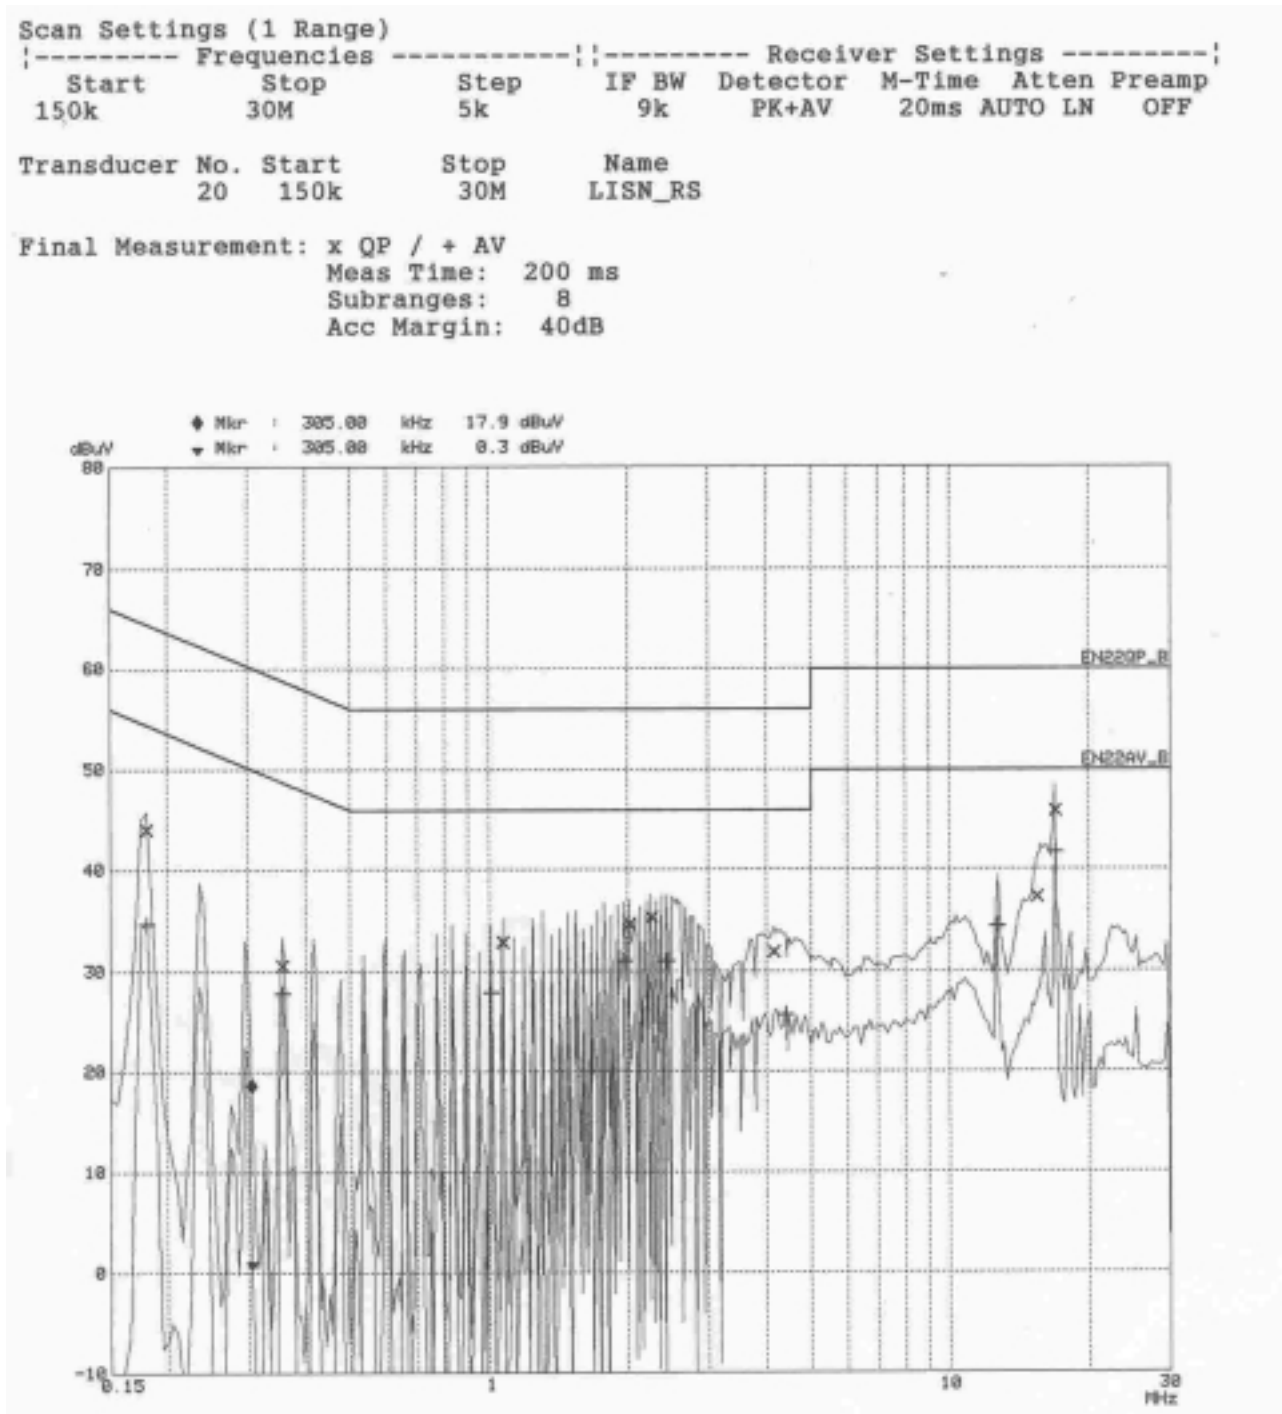


PLOTS OF EMISSIONS

- Conducted Emission at the Mains port (Neutral)

► LCD Panel : LM150X06 / LG Philips LCD

► Combo Board : FLF1521-01A / Frontek

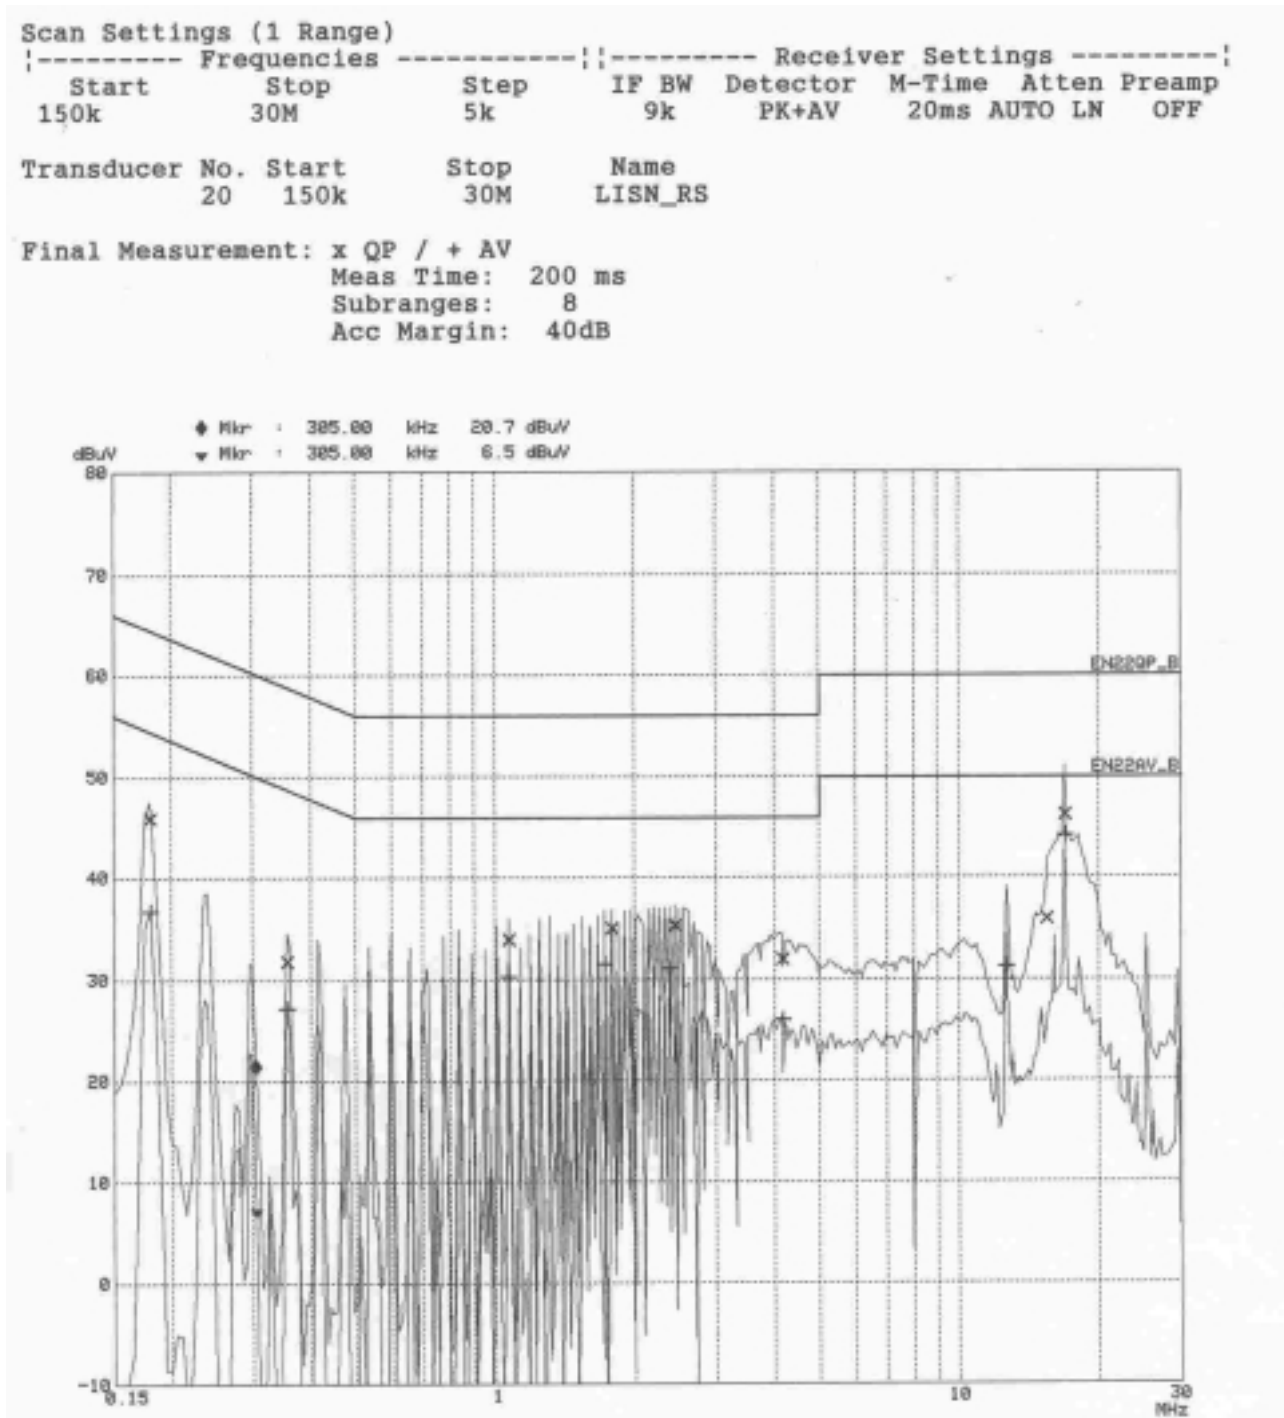


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (Line)**

▶ LCD Panel : LM150X06 / LG Philips LCD

▶ Combo Board : AI-0036 / Lien Chang Electronics Enterprise Co., Ltd.

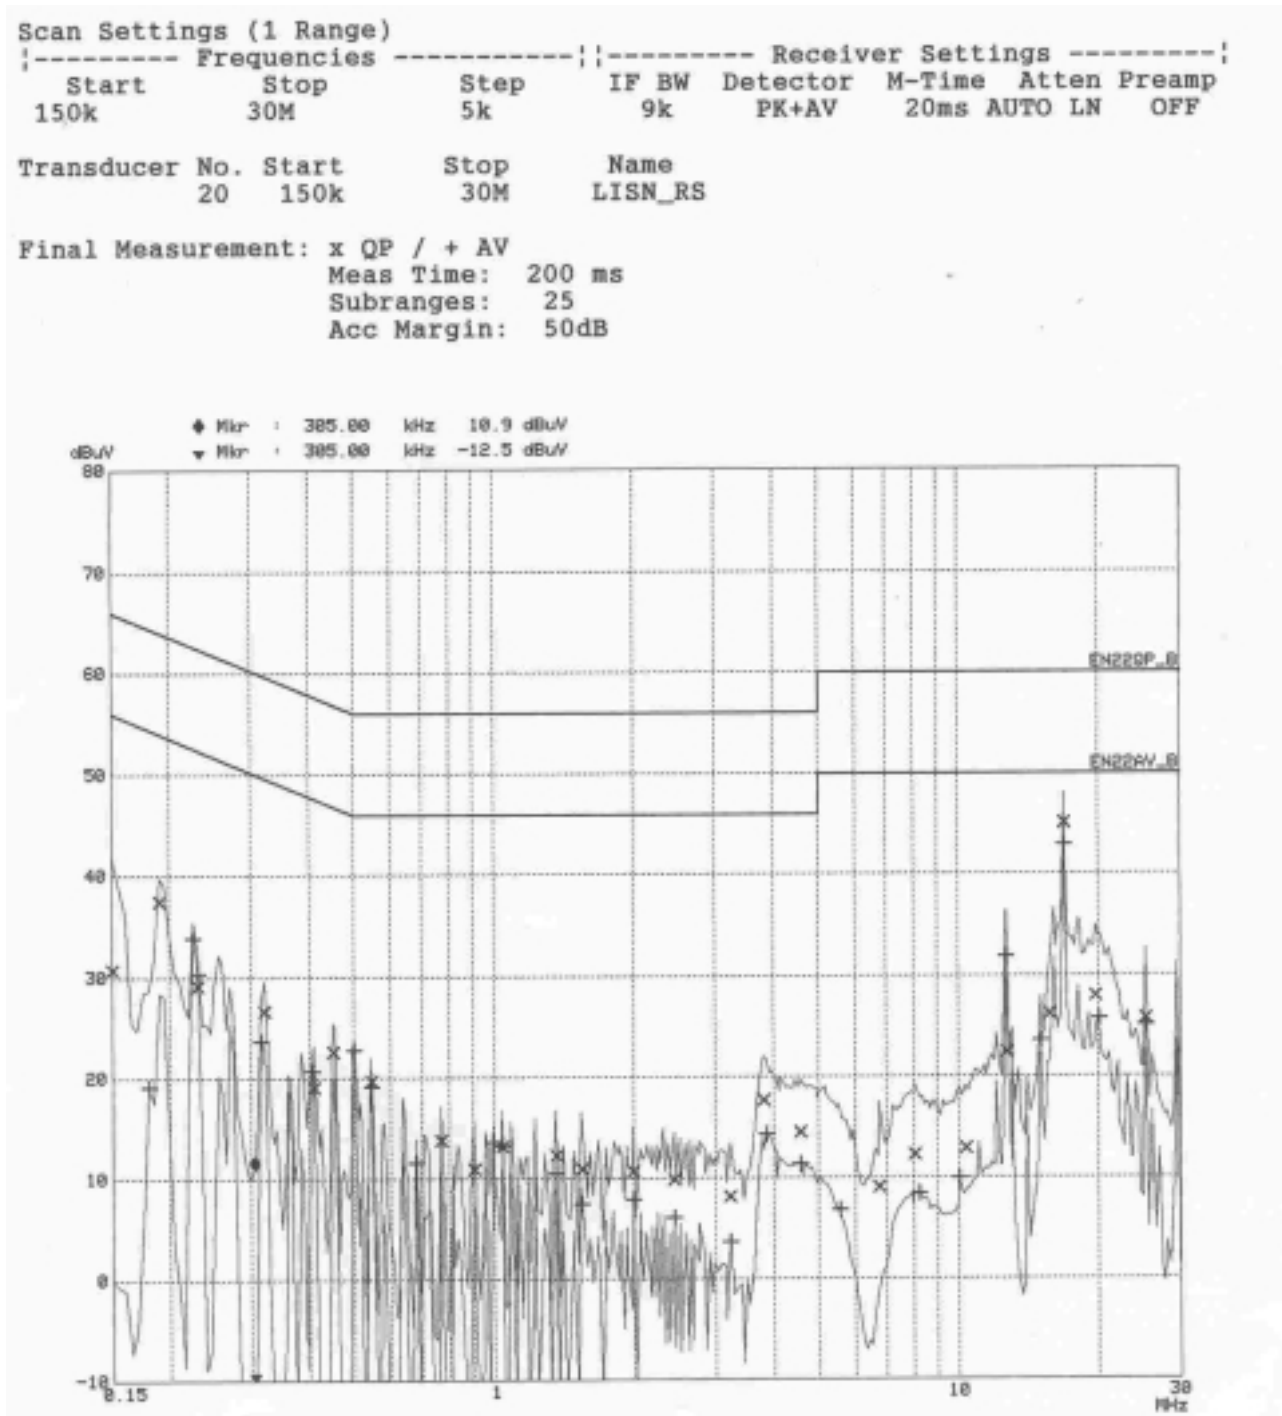


PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port (Neutral)**

► LCD Panel : LM150X06 / LG Philips LCD

► Combo Board : AI-0036 / Lien Chang Electronics Enterprise Co., Ltd.

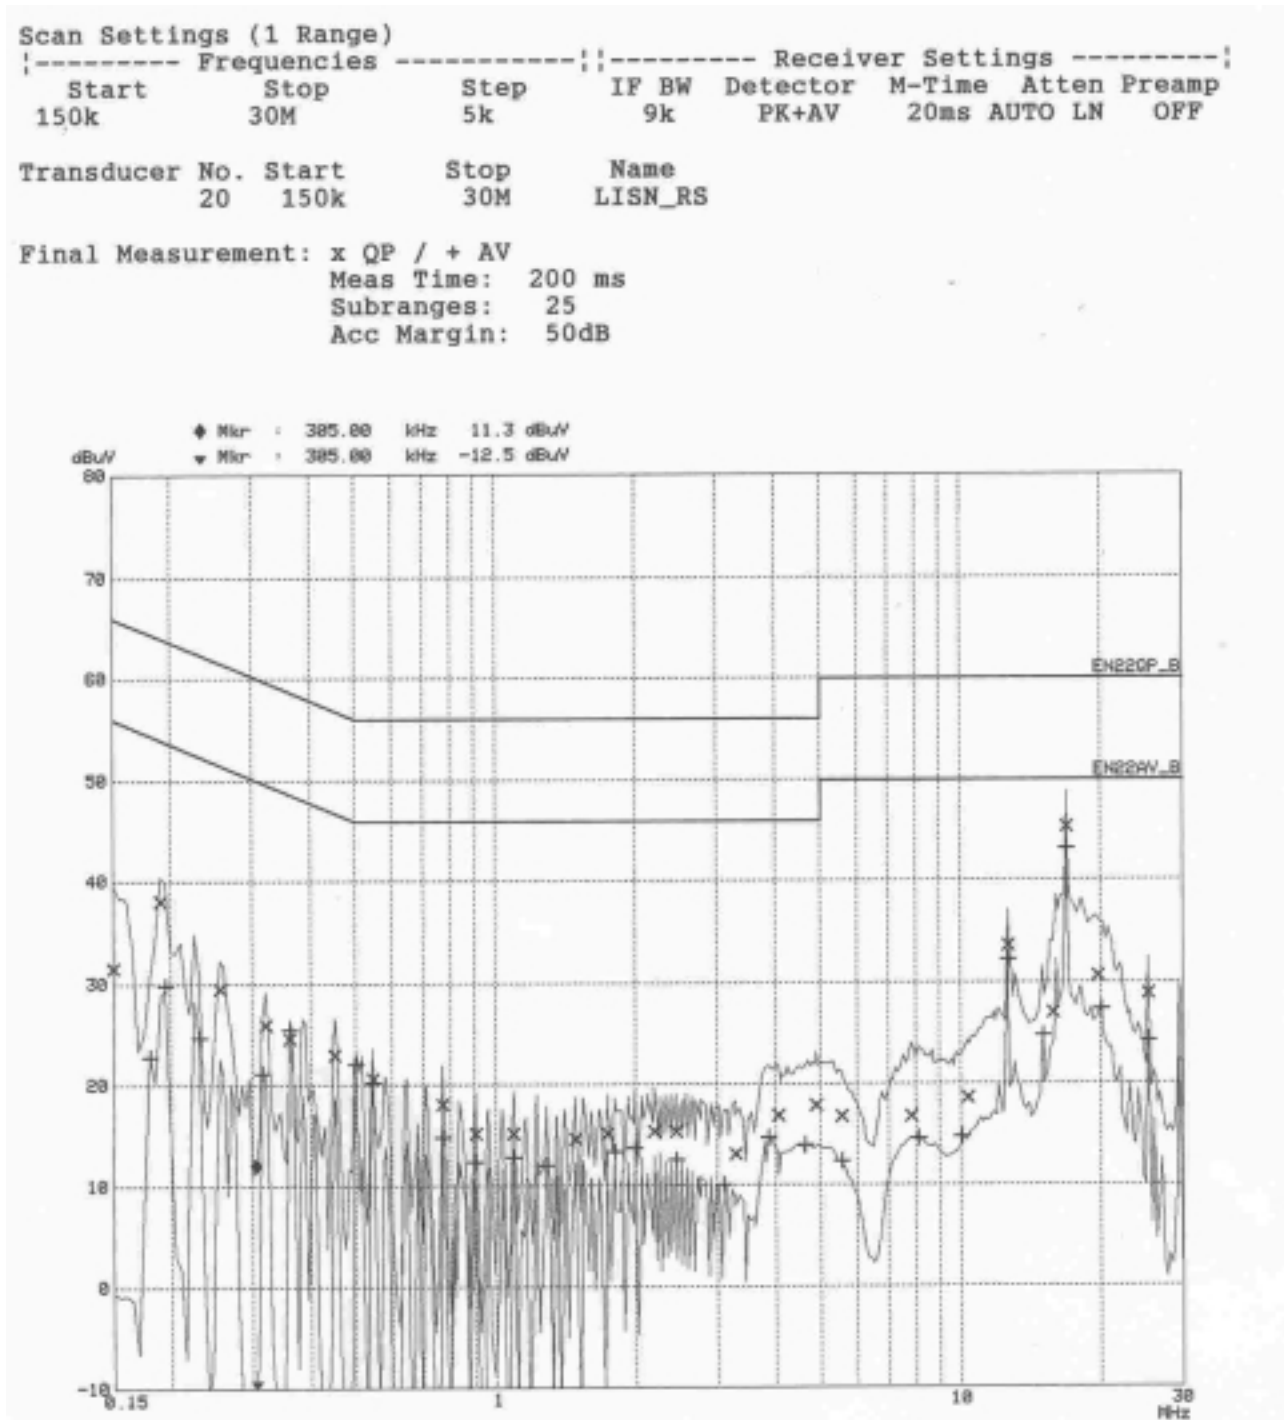

SAMPLE CALCULATIONS

$$\text{dB } \mu\text{V} = 20 \log_{10} (\mu\text{V}/\text{m})$$

$$\mu\text{V} = 10^{(\text{dB } \mu\text{V}/20)}$$

EX. 1.

@57.7 MHz

Class B limit = 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$

Reading = 19.1 dB μV (calibrated level)

Antenna factor + Cable Loss = 10.12 dB

Total = 29.22 dB $\mu\text{V}/\text{m}$

Margin = 40.0 - 29.22 = 10.78

10.78 dB below the limit

ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 with the confidence level of 95%

1. Radiation Uncertainty Calculation

<i>Contribution</i>	<i>Probability Distribution</i>	<i>Uncertainty(+/-dB)</i>
Antenna Factor	Normal (k=2)	± 0.5
Cable Loss	Normal (k=2)	± 0.04
Receiver Specification	Rectangular	± 2.0
Antenna directivity	Rectangular	± 1.0
Antenna Factor variation with Height		
Antenna Phase Center Variation		
Antenna Factor Frequency Interpolation		
Measurement Distance Variation		
Site Imperfections	Rectangular	± 2.0
Mismatch:Receiver VRC $r_i=0.3$ Antenna VRC $r_R=0.1(B_i)0.4(L_p)$ Uncertainty Limits $20\log(1+/-r_i r_R)$	U-Shaped	$+ 0.25 / - 0.26$
System Repeatibility	Std.deviation	± 0.05
Repeatability of EUT	-	-
Combined Standard Uncertainty	Normal	± 1.77
Expended Uncertainty U	Normal (k=2)	± 3.5

2. Conducted Uncertainty Calculation

<i>Contribution</i>	<i>Probability Distribution</i>	<i>Uncertainty(+/-dB)</i>
Receiver Specification	Normal (k=2)	± 2.0
LISN coupling spec.	Normal (k=2)	± 0.4
Cable and input attenuator cal.	Rectangular	± 0.4
Mismatch:Receiver VRC $r_i=0.3$ LISN vrc $r_g=0.1$ Uncertainty Limits $20\log(1+/-r_i r_R)$	U-Shaped	± 0.26
System Repeatibility	Std.deviation	± 0.68
Repeatability of EUT	-	-
Combined Standard Uncertainty	Normal	± 1.18
Expended Uncertainty U	Normal (k=2)	± 2.4

TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Calibration Date
1	*Test Receiver	R & S	ESCS 30	2002.09
2	Test Receiver	PMM	PMM9000	2003.06
3	*Amplifier	HP	8447F	2002.09
4	*Amplifier	Agilent	8447F	2002.07
5	*Spectrum Analyzer	Advantest	R3265A	2003.03
6	*Logbicon Super Antenna	Schwarzbeck	VULB9166	2003.05
7	Log-Periodic Antenna	R & S	HL025	2003.01
8	Dipole Antenna	R & S	VHA9103	2003.05
9	Dipole Antenna	R & S	UHA9105	2003.05
11	*Biconical Log Antenna	ARA	LPB-2520/A	2003.05
12	Absorbing Clamp	R & S	MDS21	2003.03
13	High Voltage Probe	R & S	ESH2-Z3	2002.09
14	Signal Generator	R & S	SMP02	2002.12
15	Matching Pad	R & S	RAM358.5414.02	2003.05
16	*LISN	R & S	ESH3-Z5	2002.10
17	*LISN	Kyoritsu	KNW-407	2003.04
18	LISN	Kyoritsu	KNW-408	2002.12
19	*Position Controller	EM Eng.	N/A	N/A
20	*Turn Table	EM Eng.	N/A	N/A
21	*Antenna Mast	EM Eng.	N/A	N/A
22	*Anechoic Chamber	EM Eng.	N/A	N/A
23	*Shielded Room	EM Eng.	N/A	N/A

*) Test equipment used during the test

RECOMMENDATION/CONCLUSION

The data collected shows that the **Hansol Electronics Inc.**

FCC ID : **MSAB15HF, 15" LCD Monitor.** complies with § 15.107 ,15.109 of the FCC Rules.

The highest emission observed was at **0.19 MHz** for conducted emissions with a margin of **8.8 dB**, at **85.90 MHz** for radiated emissions with a margin of **3.9 dB**.

Labelling Requirements

Hansol
Hansol Electronics Inc.
27-03 Heonchon-RO Dukso-gu
Seoul-shi Korea (Seoul), KOREA

MODEL Name : H550
MODEL No. : S15 HF
ELECTRICAL RATING
AC 100-240V
50/60 Hz, 0.45A

CE ID : MSA S15HF
This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
1) This device may not cause harmful interference, and
2) This device must accept any interference received,
including interference that may cause undesired
operation.

CAUTION
DO NOT REMOVE SLICING EDGE. DO NOT REMOVE COVER. NO
OPEN ACCESSIBLE PARTS. READ, HEED, STRICTLY MANUALLY TO
QUALIFIED SERVICEPERSONNEL.

ATTENTION
NE PAS ENLEVER L'ARÊTE D'ÉCLAUCISSAGE. NE PAS
ENLEVER L'ÉCRAN. VIGILANCE EXIGÉE DES RÉPARATEURS PAR
UN VÉRIFIÉ À L'ÉCRAN. POUR RÉPARATIONS, APPeler UN
TECHNICIEN QUALIFIÉ.

  **CB CE**   

LIMITED
175, 80W
ET-07078

Made in KOREA. J/L

MS Manufactured:

The photograph shows the back of a Sharp LCD monitor. A white rectangular box highlights the regulatory labels on the left side of the back panel. A yellow sticky note is attached to the right side of the back panel. A black arrow points from the top of the image down to the regulatory labels. A blue cable is plugged into a port on the right side of the back panel. A measuring tape is visible at the bottom of the image.

APPENDIX B – CIRCUIT DIAGRAM

APPENDIX E – USER’S MANUAL

APPENDIX F – SCHEMATIC DIAGRAM
