

Nemko Korea Co., Ltd.

300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

TEL:+82 31 322 2333 FAX:+82 31 322 2332

FCC EVALUATION REPORT FOR CERTIFICATION**Manufacturer:****Hansol Electronics Inc.****#27-29, Hanchun-ri, Ducksan-Myun,****Jinchun-Kun, Choongbuk, Korea****Attn : Mr. S. P. Yang****Dates of Issue :January 20, 2003****Test Report No. : NK2CE730****Test Site : Nemko Korea Co., Ltd.****EMC site, Korea****FCC ID****MSAB17BF-2****Brand Name*****Hansol*****Contact Person****Hansol Electronics Inc.****#27-29, Hanchun-ri, Ducksan-Myun, Jinchun-Kun,****Choongbuk, Korea****Mr. S. P. Yang****Telephone No. : +82 43 530 8503**

FCC Rule Part(s):

Part 15 & 2

Classification :

FCC Class B Device

EUT Type:

LCD Monitor

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested By : S. K. Lee
Engineer

Reviewed By : H.H. Kim
Manager & Chief Engineer

TABLE OF CONTENTS

SCOPE	3
INTRODUCTION (Site Description)	4
GENERAL TEST CONDITION	5
DESCRIPTION OF TEST (Conducted Emissions)	7
DESCRIPTION OF TEST (Radiated Emissions)	8
DESCRIPTION OF TEST (Antenna-conducted Power Emissions)	9
TEST DATA (Conducted Emissions)	10
TEST DATA (Radiated Emissions)	14
TEST DATA (Antenna-conducted Power Emissions)	18
PLOT OF EMISSION	20
SAMPLE CALCULATIONS	21
ACCURACY of MEASUREMENT	22
TEST EQUIPMENT	23
RECOMMENDATION/CONCLUSION	24
APPENDIX A - LABELLING REQUIREMENTS	25
APPENDIX B - CIRCUIT DIAGRAM	26
APPENDIX C - PHOTOGRAPHS of TEST SET-UP	27
APPENDIX D - EUT PHOTOGRAPHS	30
APPENDIX E - USER'S MANUAL	51
APPENDIX F - SCHEMATIC DIAGRAM	52

SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15.

Responsible Party* :	Hansol Electronics Inc.
Contact Person :	Mr. S. P. Yang
	Tel No.: +82 43 530 8503
Manufacturer :	Hansol Electronics Inc. #27-29, Hanchun-ri, Ducksan-Myun, Jinchun-Kun, Choongbuk, Korea Tel No.: +82 43 530 8503

- FCC ID: MSAB17BF-2
- Brand Name: Hansol
- EUT Type: LCD Monitor
- Adapter Voltage: 85/265V AC 560Hz
12V DC 4.5A, 54W
- Classification: FCC Class B
- Rule Part(s): FCC Part 15 & Part 2
- Test Procedure(s): ANSI C63.4 (1992)
- Dates of Test: December 4, 2002 to January 14, 2003
- Place of Tests: Nemko Korea Co., Ltd. EMC Site
- Test Report No.: NK2CE730

** NOTE: Please refer to the duties and responsibilities of the Responsible Party attached.*

INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated and conducted emissions emanating from **Hansol Electronics Inc.**

FCC ID : **MSAB17BF-2, LCD Monitor.**


These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory**.

The site address is 300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

The area of Nemko Korea Corporation LTD. EMC Test Site is located in a mountain area at 50 kilometers (30 miles) southeast and Seoul International Airport (Kimpo Airport), 30 kilometers (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

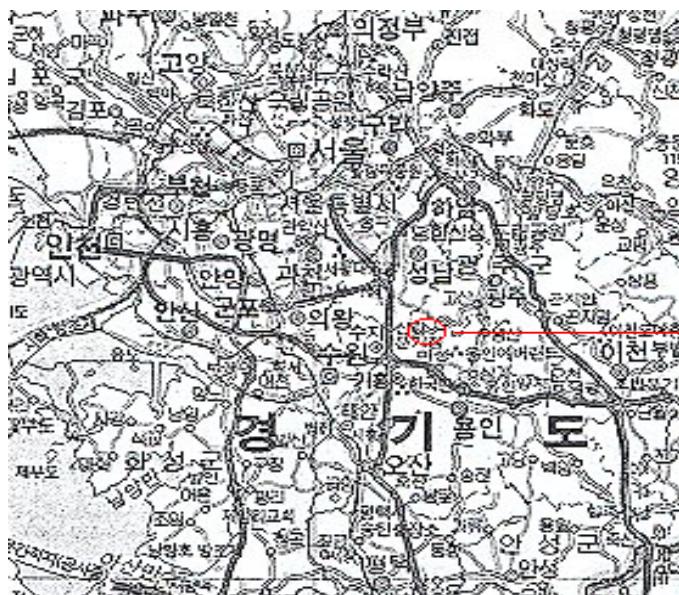

Nemko Korea Co., Ltd.
OPEN AREA TEST SITE
300-2, Osan-Ri, Mohyun-Myun, Yongin-City Kyungki-Do, KOREA 449-852
Tel)+82-31-322-2333
Fax)+82-31-322-2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab and Kimpo Airport.

TEST CONDITIONS & EUT INFORMATION

Operating During Test

The EUT was operated by the software. The PC sent "H" pattern to monitor(EUT) and The monitor displayed "H" pattern on screen. It also sent "H" pattern to printer, then the printer printed it out. This software had above all functions conduct in order.

The emissions test were performed with two kinds of inverter board and the two video interface ports of EUT (monitor) were applied to the tests.

For Antenna conducted power test, the tuner of EUT was tuned to the output frequency of color bar signal generator, with a pattern defined as 100/0/75/0 in the CCIR recommendation 471.

Support Equipment

PC	DELL ,Model: Precision 340 1.8m unshielded AC power cable	S/N: 7XGG61S
Monitor(EUT)	Hansol, FCC ID: MSAB17BF-2 1.8m shielded D-sub cable	S/N: N/A
Adapter	Hua jung Comp. Co., Ltd. Model: HASU05F 1.8m unshielded AC power cable 1.5m unshielded DC power cable with ferrite core	S/N: 206040A0047
Keyboard	Silitek Yet Foundate, Model: SK-8110 1.8m unshielded Din cable	S/N: N04N729
PS/2 Mouse	Microsoft Corporation , Model: X06-08477 1.8m unshielded Din cable	S/N: 2508454-9
Printer	HP, Model: C5870K 1.8m unshielded AC power cable 1.8m Shield D-sub cable	S/N: SG88R131GW

EUT Information

Clock	14.318MHz(Y1), 27.25MHz(Y2), 18.432MHz(Y3)
Chipset(s)	PW131-ES(U12), VPX3226E(U18), MSP34406(U26), TE28F800(U31)
Horizontal Frequency	80kHz(Max)
Vertical Frequency	75Hz(Max)
LCD panel	LTM170EH/L01 / Samsung
Tuner	TCPN908DA27C /Samsung
Inverter	FIF1742-03A / Frontek
	GH059A / Green C&C tech
Port(s)	VGA, S-video, Audio/Video Input, Audio stereo Input, Headphone, Tuner

Description of Test Modes

The EUT was pre-tested under the following resolutions mode:

For Analogue video interface port(Dsub)

1. 1280 X 1024 (75Hz/ 80kHz), clock frequency 135MHz
2. 1024 X 768 (75Hz/ 60kHz), clock frequency 78.75MHz
3. 800 X 600 (75Hz/ 46.875kHz), clock frequency 49.5MHz
4. 640 X 480 (75Hz/ 37.5kHz), clock frequency 31.5MHz

For Digital video interface port(DVI)

1. 1280 X 1024 (60Hz/ 63.981kHz), clock frequency 108MHz
2. 1024 X 768 (75Hz/ 60kHz), clock frequency 78.75MHz
3. 800 X 600 (75Hz/ 46.875kHz), clock frequency 49.5MHz
4. 640 X 480 (75Hz/ 37.5kHz), clock frequency 31.5MHz

The worst emission level was found when the EUT was tested under 1280 X 1024 resolution, therefore, the test data this mode was recorded in the report.

DESCRIPTION OF TESTS

Conducted Emissions

The Line conducted emission test facility is located inside a 4 X 7 X 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1mX 1.5M wooden table 0.8m height is placed 0.4m away from the vertical wall and 1.5m away from the side of wall of the shielded room

Rohde & Schwarz LISN and Kyoritsu LISN KNW-408 50ohm/50uH line impedance stabilization network are bonded to the shielded room.

The EUT is powered from the Rohde & Schwarz LISN and the support equipment is powered from the Kyoritsu LISN. Power to the LISN s are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1/2".

If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentine fashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 450KHz to 30MHz with 20msec sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCS30).

The detector function was set to CISPR quasi-peak mode.

The bandwidth of receiver was set to 9KHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

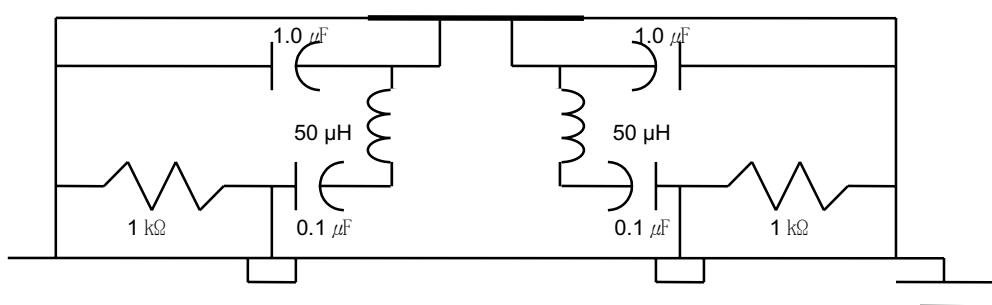


Fig. 2. LISN Schematic Diagram

DESCRIPTION OF TESTS

Radiated Emissions

Preliminary measurement were made indoors at 1 meter using broad band antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found. The spectrum was scanned from 30 to 1000MHz using Biconical log Antenna(ARA, LPB-2520/A). Above 1GHz, log periodic antenna (Rohde Schwarz HL025:upto 18GHz) was used.

Final Measurements were made outdoors at 3 or 10m test range using Logbicon Super Antenna(Schwarzbeck, VULB9166) or log periodic antenna.(Rohde Schwarz HL025) The test equipment was placed on a wooden table.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was reexamined and investigated using EMI test receiver.(ESCS30)

The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120KHz or 1MHz depending on the frequency or type of signal.

The half wave dipole antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non- metallic 1.0X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The turn table containing the Technology was rotated; the antenna height was varied 1 to 4meter and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by : switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R/S signal generator.

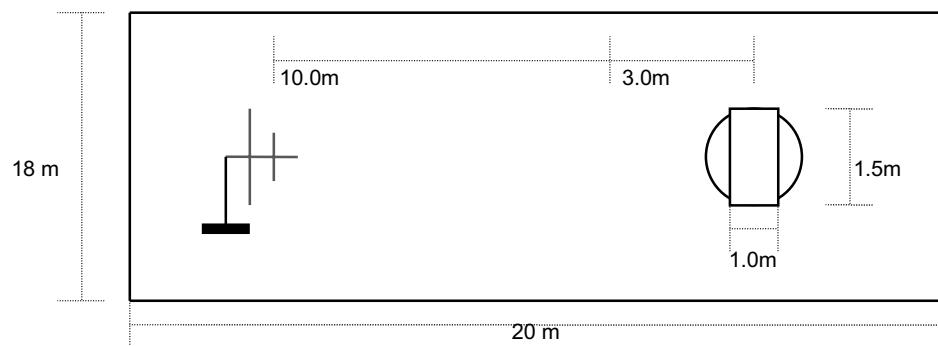


Fig. 3. Dimensions of Outdoor Test Site

DESCRIPTION OF TESTS

Antenna-Conducted Power Measurements

Power on the receive antenna terminals was to be determined by measurement of the voltage present at these terminals.

Antenna –conducted power measurements was performed with the EUT antenna terminals connected directly to measuring instrument (Rohde&Schwarz, ESCS 30) using a impedance-matching network(Rohde&Schwarz, RAM358.5414.02) to connect the measurement instrument to the antenna terminals of the EUT. Losses in decibels in impedance-matching network used was added to the measured values in dBuV.

With the receiver tuned to one of the number of frequency and voltage present at the antenna input terminals over the frequency range specified in the individual equipment requirements.

The measurements was repeated with the receiver tuned to another frequency until the number of frequencies had been successively measured.

Power on the receive antenna terminals in the ratio of V^2/R , where V is the loss-corrected voltage measured at the antenna terminals, and R is the impedance of the measuring instrument.

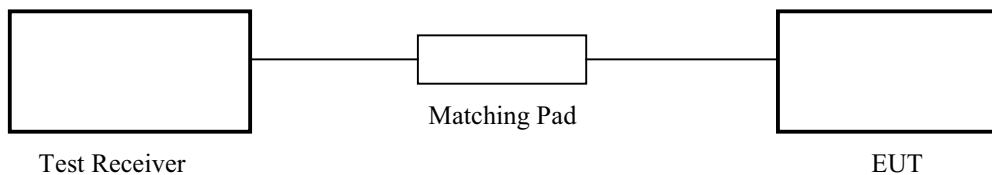


Fig. 4. Description of Test

TEST DATA**Conducted Emissions****FCC ID : MSAB17BF-2****Inverter : GH059A / Green C&C tech****Video Interface Port : DVI**

Frequency (MHz)	Level(dB μ V)		Line	Limit(dB μ V)		Margin(dBuV)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.41	38.8	37.9	N	57.6	47.6	18.8	9.7
0.62	38.5	37.2	N	56.0	46.0	17.5	8.8
0.89	38.9	37.9	N	56.0	46.0	17.1	8.1
1.30	39.8	38.8	N	56.0	46.0	16.2	7.2
2.95	42.0	41.2	L	56.0	46.0	14.0	4.8
4.52	44.1	42.8	L	56.0	46.0	11.9	3.2

Table 1. Line Conducted Emissions Tabulated Data**NOTES:**

1. Measurements using CISPR quasi-peak mode
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is on the FCC part section 15.107 (a).
4. LINE : L =Line , N = Neutral



Tested by S. K. Lee

TEST DATA

Conducted Emissions

FCC ID : MSAB17BF-2

Inverter : GH059A / Green C&C tech

Video Interface Port : Analogue

Frequency (MHz)	Level(dB μ V)		Line	Limit(dB μ V)		Margin(dBuV)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.21	41.6	40.3	L	63.2	53.2	21.6	12.9
0.42	38.2	37.3	N	57.4	47.4	19.2	10.1
0.76	37.8	36.1	L	56.0	46.0	18.2	9.9
0.96	37.5	36.2	L	56.0	46.0	18.5	9.8
2.82	38.2	36.5	L	56.0	46.0	17.8	9.5
4.05	39.0	37.2	L	56.0	46.0	17.0	8.8

Table 2. Line Conducted Emissions Tabulated Data

NOTES:

1. Measurements using CISPR quasi-peak mode
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is on the FCC part section 15.107 (a).
4. LINE : L =Line , N = Neutral

occt.

Tested by S. K. Lee

TEST DATA**Conducted Emissions****FCC ID : MSAB17BF-2****Inverter : FIF1742-03A / Frontek****Video Interface Port : DVI**

Frequency (MHz)	Level(dB μ V)		Line	Limit(dB μ V)		Margin(dBuV)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.76	40.5	38.3	N	56.0	46.0	15.5	7.7
0.96	40.2	38.1	N	56.0	46.0	15.8	7.9
1.24	41.3	38.6	N	56.0	46.0	14.7	7.4
2.95	44.2	41.5	L	56.0	46.0	11.8	4.5
3.92	45.3	42.8	N	56.0	46.0	10.7	3.2
4.59	47.2	43.5	L	56.0	46.0	8.8	2.5

Table 3. Line Conducted Emissions Tabulated Data**NOTES:**

1. Measurements using CISPR quasi-peak mode
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is on the FCC part section 15.107 (a).
4. LINE : L =Line , N = Neutral

**Tested by S. K. Lee**

TEST DATA**Conducted Emissions****FCC ID : MSAB17BF-2****Inverter : FIF1742-03A / Frontek****Video Interface Port : Analogue**

Frequency (MHz)	Level(dB μ V)		Line	Limit(dB μ V)		Margin(dBuV)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.62	38.9	36.6	N	56.0	46.0	17.1	9.4
0.89	38.5	36.4	N	56.0	46.0	17.5	9.6
1.09	39.2	36.8	N	56.0	46.0	16.8	9.2
2.87	41.2	37.0	L	56.0	46.0	14.8	9.0
3.76	41.8	37.4	L	56.0	46.0	14.2	8.6
4.25	41.5	37.3	L	56.0	46.0	14.5	8.7

Table 4. Line Conducted Emissions Tabulated Data**NOTES:**

1. Measurements using CISPR quasi-peak mode
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is on the FCC part section 15.107 (a).
4. LINE : L =Line , N = Neutral



Tested by S. K. Lee

TEST DATA

Radiated Emissions

FCC ID : MSAB17BF-2

Inverter : GH059A / Green C&C tech

Video Interface Port : DVI

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
209.91	47.3	H	-13.5	33.8	43.5	9.7
359.80	53.8	H	-9.8	44.0	46.0	2.0
419.77	49.8	H	-8.2	41.6	46.0	4.4
539.73	49.2	H	-5.2	44.0	46.0	2.0
755.98	41.3	H	0.5	41.8	46.0	4.2
839.57	40.4	H	2.5	42.9	46.0	3.1

*) No values (above 1GHz) higher than 20dB below the limit was detected during radiated emissions test.

Table 5. Radiated Measurements at 3meters

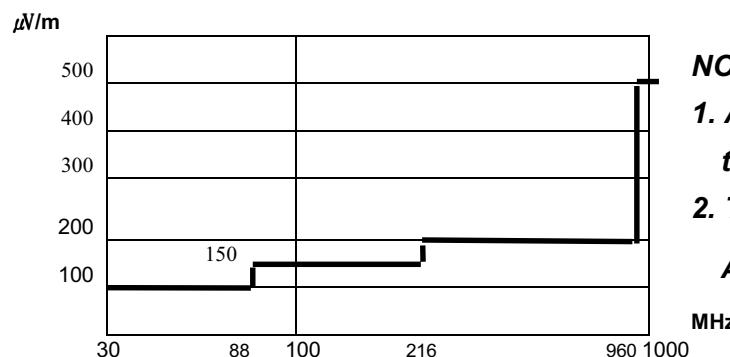


Fig. 5. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
 2. The radiated limits are shown on Figure 5.
- Above 1GHz the limit is 500 μ V/m.

NOTES:

1. *Pol. H =Horizontal V=Vertical
2. **AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

accst.

Tested by S. K. Lee

TEST DATA

Radiated Emissions

FCC ID : MSAB17BF-2

Inverter : GH059A / Green C&C tech

Video Interface Port : Analogue

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
119.93	51.2	V	-17.3	33.9	43.5	9.6
179.89	47.9	H	-13.3	34.6	43.5	8.9
359.79	52.5	V	-9.8	42.7	46.0	3.3
389.78	51.5	H	-9.0	42.5	46.0	3.5
419.77	50.4	H	-8.2	42.2	46.0	3.8
839.57	39.6	H	2.5	42.1	46.0	3.9

*) No values (above 1GHz) higher than 20dB below the limit was detected during radiated emissions test.

Table 6. Radiated Measurements at 3meters

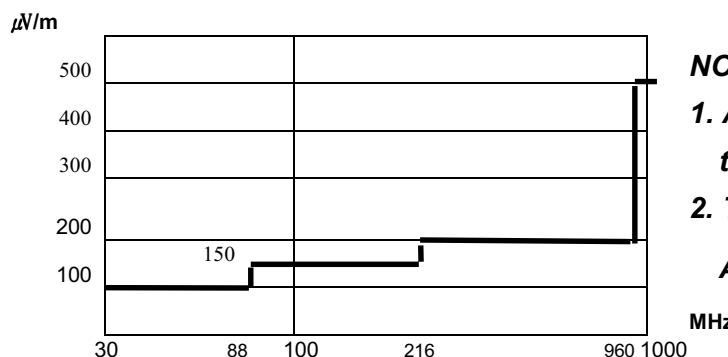


Fig. 5. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 5.
- Above 1GHz the limit is 500 μ V/m.

NOTES:

1. *Pol. H =Horizontal V=Vertical
2. **AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

accst.

Tested by S. K. Lee

TEST DATA

Radiated Emissions

FCC ID : MSAB17BF-2

Inverter : FIF1742-03A / Frontek

Video Interface Port : DVI

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
209.89	49.0	V	-13.5	35.5	43.5	8.0
359.79	51.8	V	-9.8	42.0	46.0	4.0
539.98	49.0	H	-5.2	43.8	46.0	2.2
755.98	41.0	H	0.5	41.5	46.0	4.5
839.53	38.9	H	2.5	41.4	46.0	4.6
863.94	40.6	H	3.1	43.7	46.0	2.3

*) No values (above 1GHz)higher than 20dB below the limit was detected during radiated emissions test.

Table 7. Radiated Measurements at 3meters

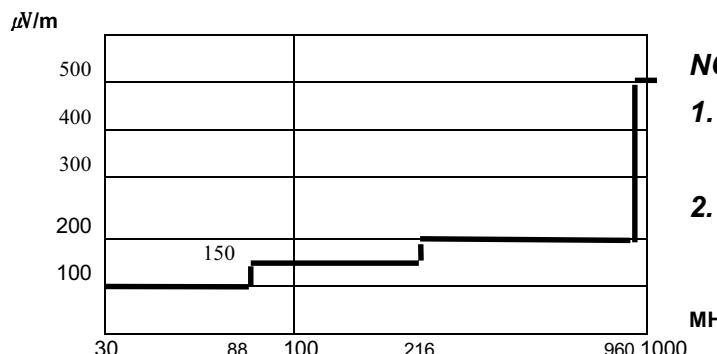


Fig. 5. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 5. Above 1GHz the limit is 500 μ V/m.

NOTES:

1. *Pol. H =Horizontal V=Vertical
2. **AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

accst.

Tested by S. K. Lee

TEST DATA

Radiated Emissions

FCC ID : MSAB17BF-2

Inverter : FIF1742-03A / Frontek

Video Interface Port : Analogue

Frequency (MHz)	Reading (dB μ V)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
119.92	50.9	V	-17.3	33.6	43.5	9.9
179.89	48.3	H	-13.3	35.0	43.5	8.5
359.79	51.5	V	-9.8	41.7	46.0	4.3
389.78	50.3	H	-9.0	41.3	46.0	4.7
674.98	43.7	V	-1.6	42.1	46.0	3.9
839.57	39.5	H	2.5	42.0	46.0	4.0

*) No values (above 1GHz)higher than 20dB below the limit was detected during radiated emissions test.

Table 8. Radiated Measurements at 3meters

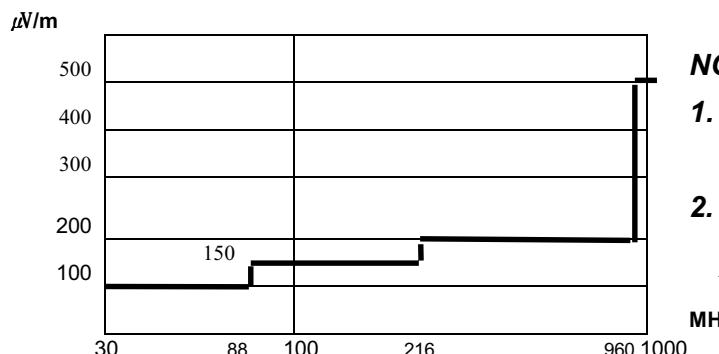


Fig. 5. Limits at 3 meters

NOTES:

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 5. Above 1GHz the limit is 500 μ V/m.

NOTES:

1. *Pol. H =Horizontal V=Vertical
2. **AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

accept.

Tested by S. K. Lee

TEST DATA**Antenna-Conducted Power Measurements****FCC ID : MSAB17BF-2**

CHANNEL	Frequency (MHz)	Reading (dB μ V)	MPL ** (dB)	Result (dB μ V)	Limit		Margin (dB)
					(nW)	(dB μ V)	
2	101.00		7.8		2.0	50.0	
	202.00		7.8		2.0	50.0	
3	107.00		7.8		2.0	50.0	
	214.00		7.8		2.0	50.0	
4	113.00		7.8		2.0	50.0	
	226.00		7.8		2.0	50.0	
5	123.00		7.8		2.0	50.0	
	246.00		7.8		2.0	50.0	
6	129.00		7.8		2.0	50.0	
	258.00		7.8		2.0	50.0	
7	221.00		7.8		2.0	50.0	
	442.00		7.8		2.0	50.0	
8	227.00		7.8		2.0	50.0	
	454.00		7.8		2.0	50.0	
9	233.00		7.8		2.0	50.0	
	466.00		7.8		2.0	50.0	
10	239.00		7.8		2.0	50.0	
	478.00	10.7	7.8	18.5	2.0	50.0	31.5
11	245.00		7.8		2.0	50.0	
	490.00	12.2	7.8	20.0	2.0	50.0	30.0
12	251.00		7.8		2.0	50.0	
	502.00	11.2	7.8	19.0	2.0	50.0	31.0
13	257.00		7.8		2.0	50.0	
	514.00	9.5	7.8	17.3	2.0	50.0	32.7
14	517.00		7.8		2.0	50.0	
	1034.00	28.2	7.8	36.0	2.0	50.0	14.0
19	547.00		7.8		2.0	50.0	
	1094.00	22.2	7.8	30.0	2.0	50.0	20.0
28	601.00		7.8		2.0	50.0	
	1202.00	17.6	7.8	25.4	2.0	50.0	24.6
36	649.00	9.2	7.8	17.0	2.0	50.0	33.0
	1298.00	21.4	7.8	29.2	2.0	50.0	20.8
44	697.00		7.8		2.0	50.0	
	1394.00	30.8	7.8	38.6	2.0	50.0	11.4
53	751.00		7.8		2.0	50.0	
	1502.00	24.4	7.8	32.2	2.0	50.0	17.8
61	799.00	16.4	7.8	24.2	2.0	50.0	25.8
	1598.00	30.4	7.8	38.2	2.0	50.0	11.8
69	847.00	17.0	7.8	24.8	2.0	50.0	25.2
	1694.00	34.2	7.8	42.0	2.0	50.0	8.0

*) No values higher than 30dB below the limit was measured during Antenna-Conducted Power testing.

Table 3. Antenna-Conducted Power Measurements

NOTES:

1. **T. Freq. = Tuned Frequency*
2. ***MPL = Impedance Matching Network Loss*
3. *Measurements using CISPR quasi-peak mode. The limits is 2.0 nanowatts from 30MHz to 960MHz.*
4. *The Antenna-conducted power test data isn't related to application for Certification, only this data was recorded as manufacturer request*

occt.

Tested by **S. K. Lee**

PLOTS OF EMISSIONS

NEMKOKOREA

EUT: LCD MONITOR
Manuf: HANSOL Electronics
Op Cond: 1280*1024, 60Hz(GreenC&C Inverter)
Test Spec: FCC PART 15
Comment: MODEL : B17BF
LINE : LINE-PE(DVI)
Date: 10. Jan 03 23:33


Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	9k	PK+AV	20ms	AUTO	LN OFF

Transducer No. Start Stop Name
1 150k 30M CE_LINE

Final Measurement: x QP / + AV

Meas Time: 1 ms
Subranges: 16
Acc Margin: 50dB

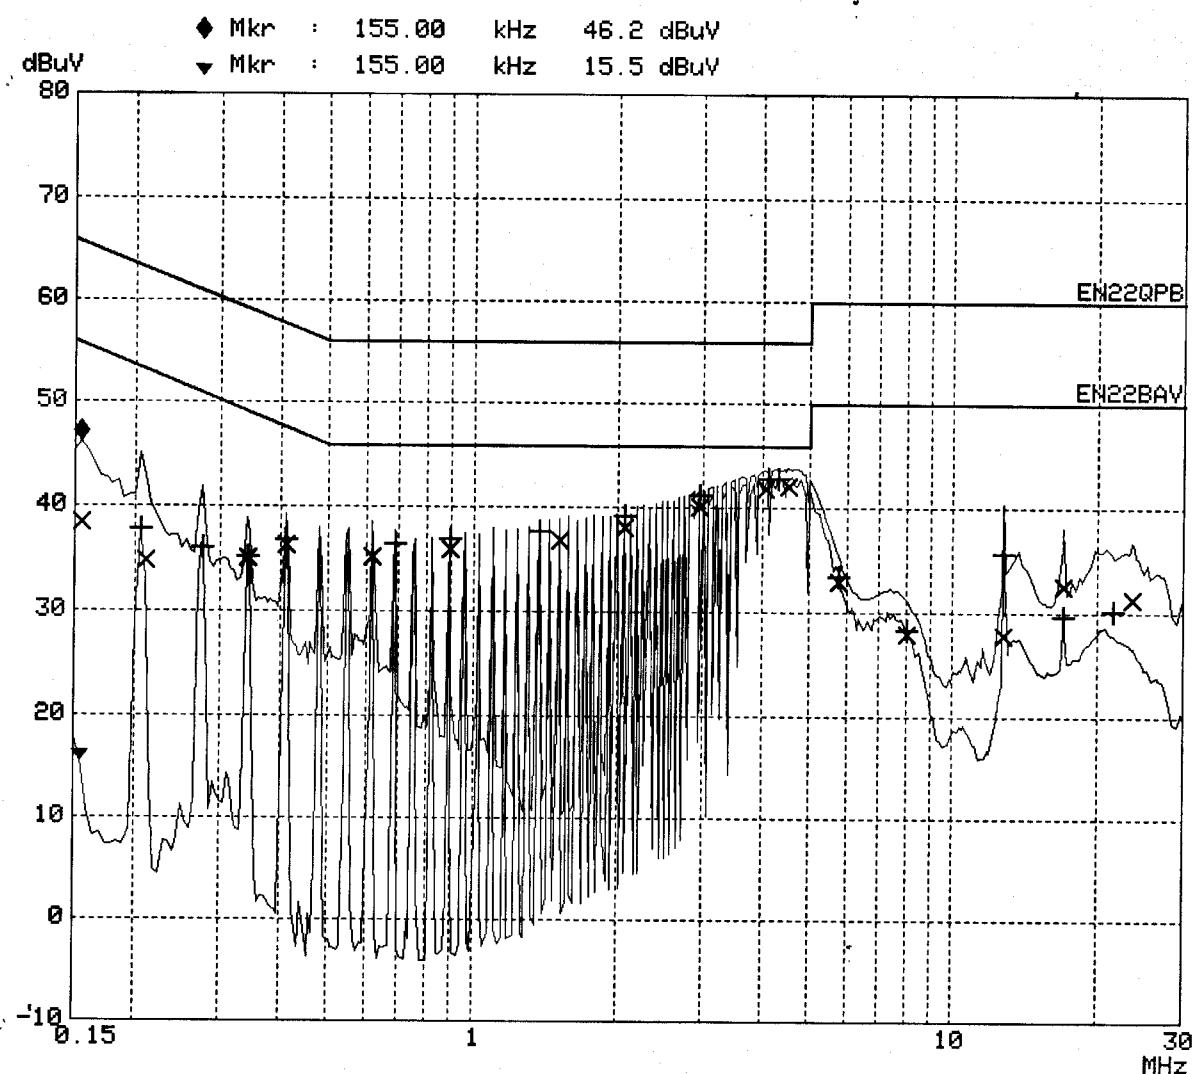

NEMKOKOREA

EUT: LCD MONITOR
Manuf: HANSOL Electronics
Op Cond: 1280*1024, 60Hz(GreenC&C Inverter)
Test Spec: FCC PART 15
Comment: MODEL : B17BF
LINE : NEUTRAL-PE(DVI)
Date: 10. Jan 03 23:52

Scan Settings (1 Range)

|----- Frequencies -----| |----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	9k	PK+AV	20ms	AUTO LN	OFF


Transducer No. Start Stop Name
1 150k 30M CE_LINE

Final Measurement: x QP / + AV

Meas Time: 1 ms

Subranges: 16

Acc Margin: 50dB

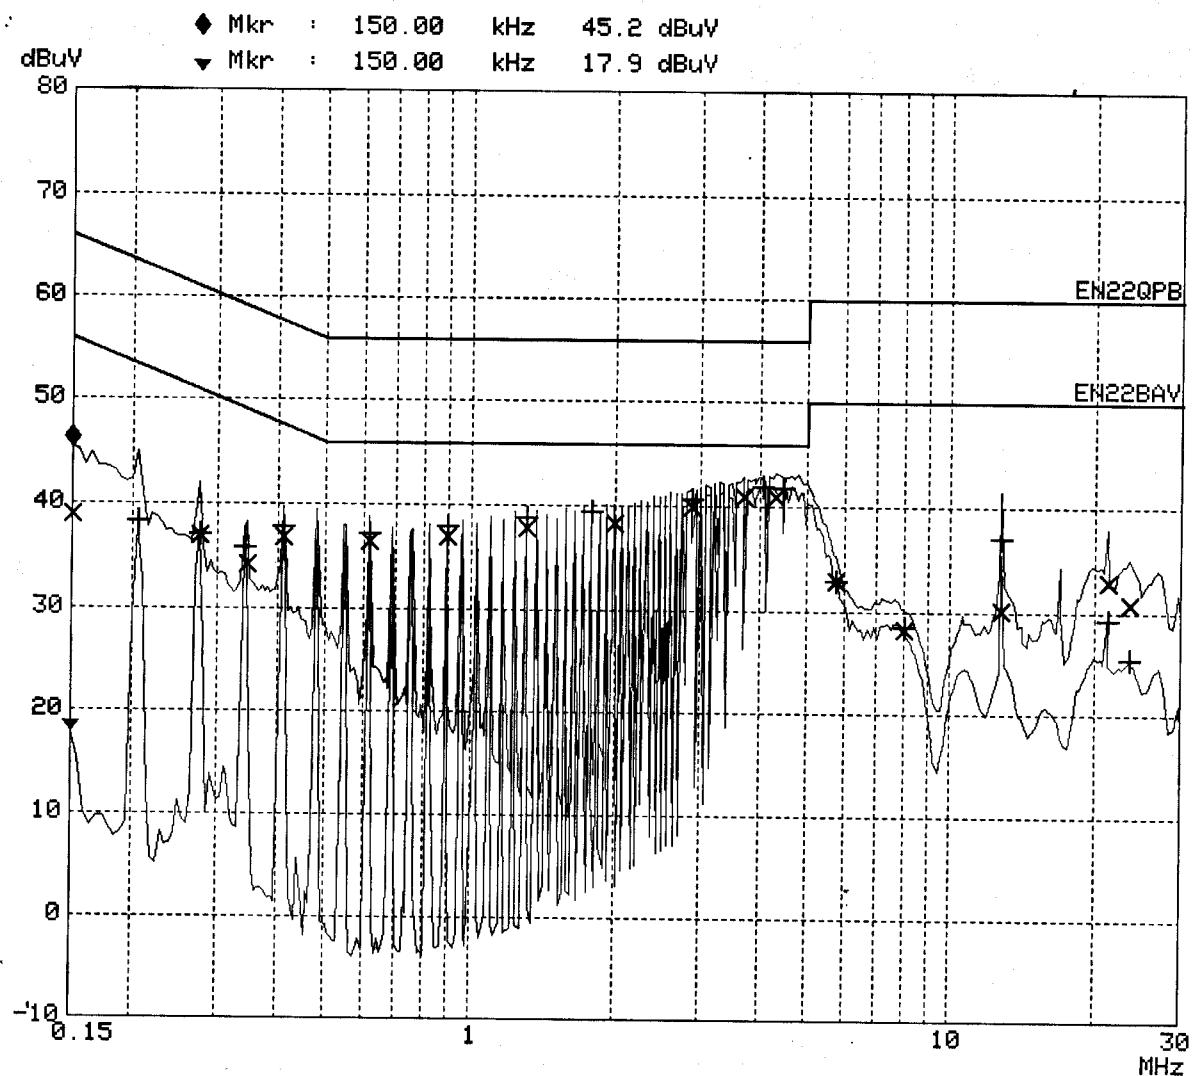

NEMKOKOREA

EUT: LCD MONITOR
Manuf: HANSOL Electronics
Op Cond: 1280*1024, 75Hz(GreenC&C Inverter)
Test Spec: FCC PART 15
Comment: MODEL : B17BF
LINE : LINE-PE(DSUB)
Date: 10. Jan 03 23:07

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	9k	PK+AV	20ms	AUTO	LN OFF


Transducer No.	Start	Stop	Name
1	150k	30M	CE_LINE

Final Measurement: x QP / + AV

Meas Time: 1 ms

Subranges: 16

Acc Margin: 50dB

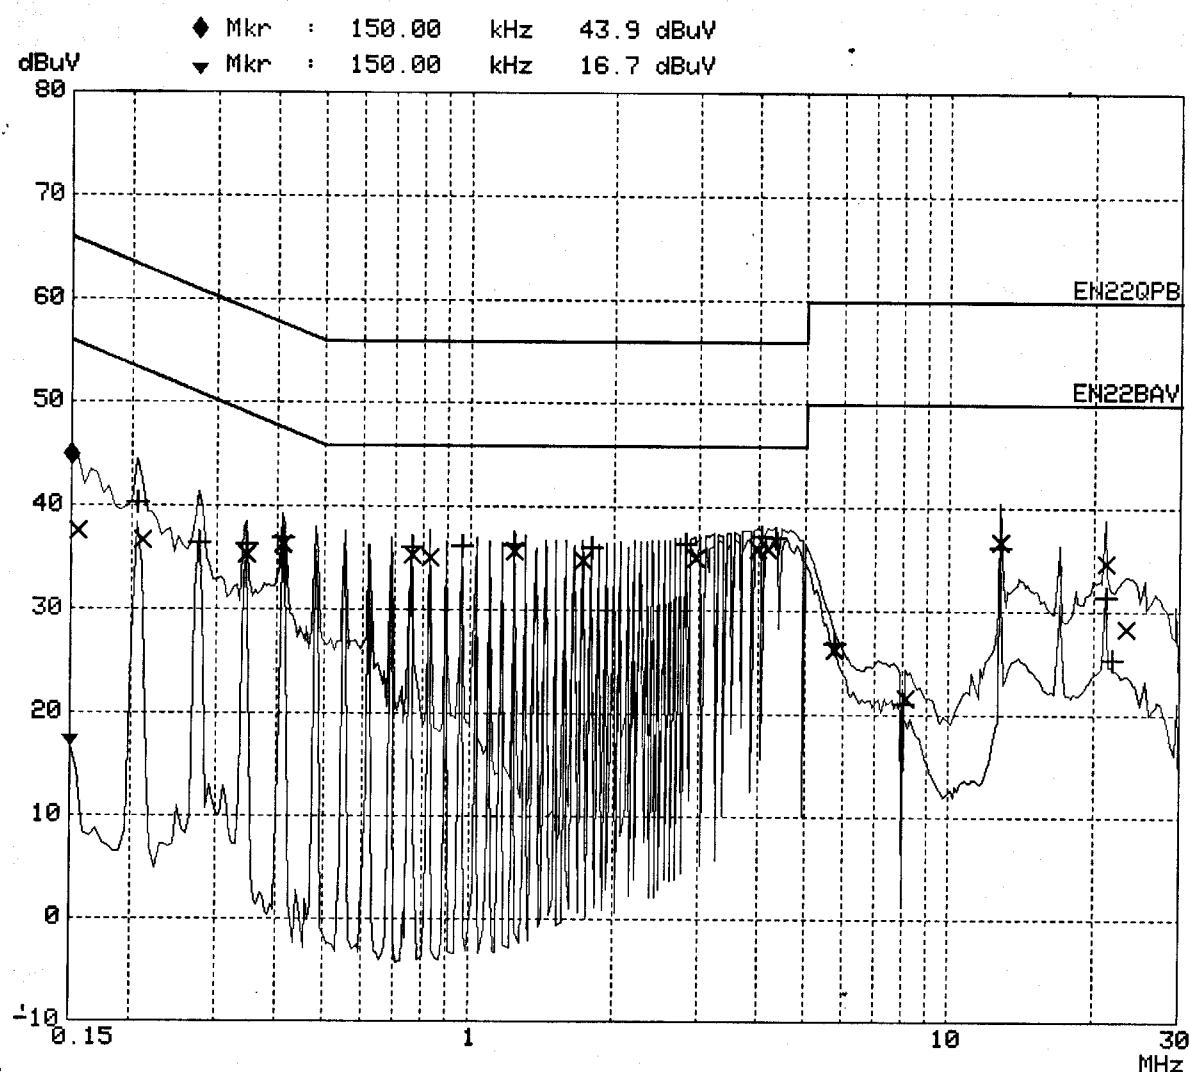

NEMKOKOREA

EUT: LCD MONITOR
Manuf: HANSOL Electronics
Op Cond: 1280*1024, 75Hz(GreenC&C Inverter)
Test Spec: FCC PART 15
Comment: MODEL : B17BF
LINE : NEUTRAL-PE
Date: 10. Jan 03 22:45

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	9k	PK+AV	20ms	AUTO	LN OFF


Transducer No. Start Stop Name
1 150k 30M CE_LINE

Final Measurement: x QP / + AV

Meas Time: 1 ms

Subranges: 16

Acc Margin: 50dB

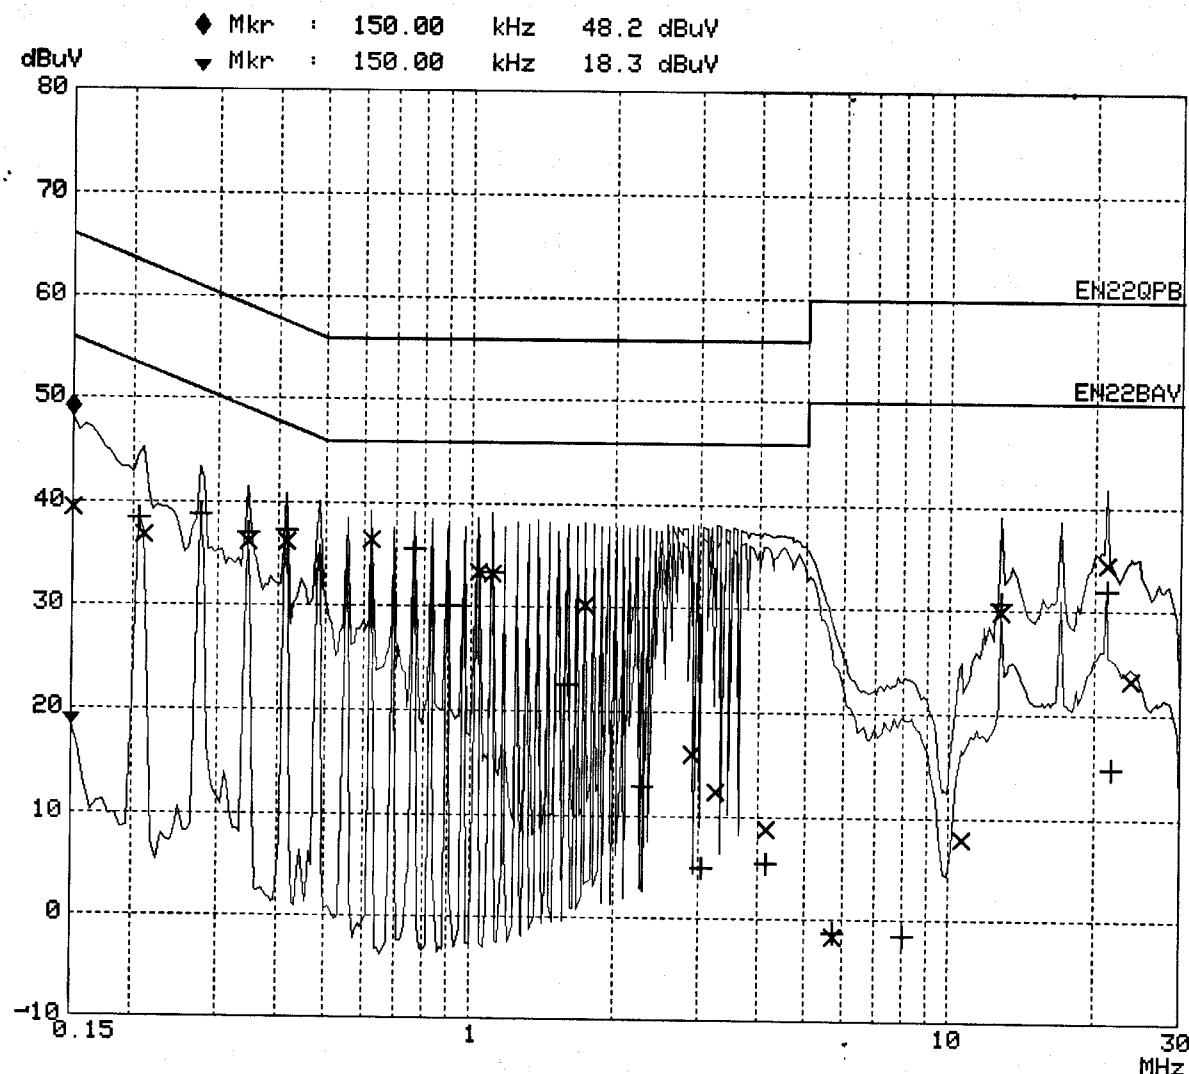

NEMKOKOREA

EUT: LCD MONITOR
Manuf: HANSOL Electronics
Op Cond: 1280*1024, 60Hz(FRONTEK Inverter)
Test Spec: FCC PART 15
Comment: MODEL : B17BF
LINE : LINE-PE(DVI)
Date: 11. Jan 03 01:58

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp

150k	30M	5k	9k	PK+AV	20ms	AUTO	LN
							OFF


Transducer No. Start Stop Name
1 150k 30M CE_LINE

Final Measurement: x QP / + AV

Meas Time: 1 ms

Subranges: 16

Acc Margin: 50dB

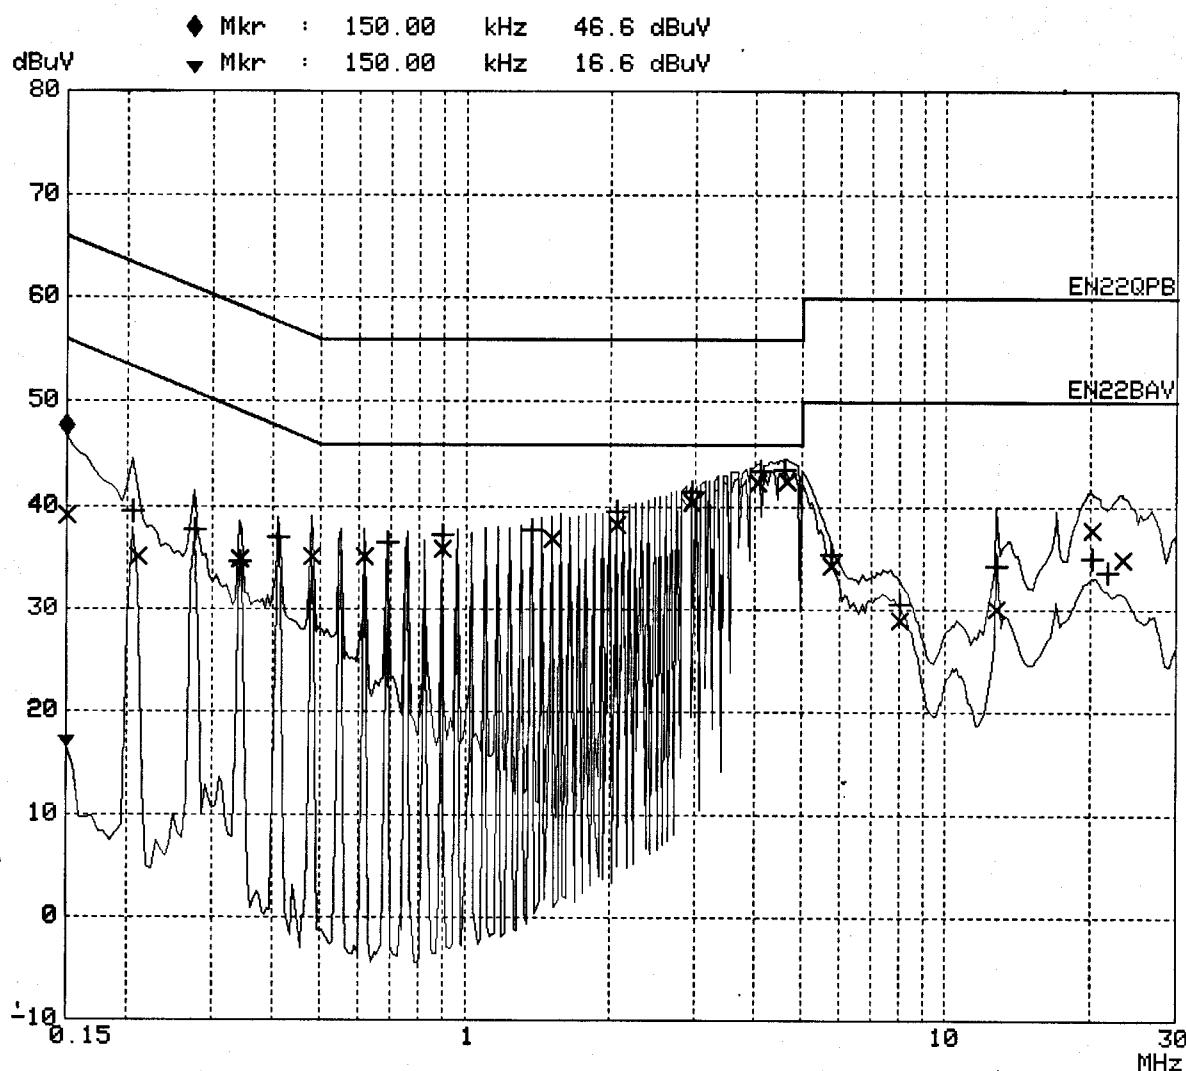

NEMKOKOREA

EUT: LCD MONITOR
Manuf: HANSOL Electronics
Op Cond: 1280*1024, 60Hz(FRONTEK Inverter)
Test Spec: FCC PART 15
Comment: MODEL : B17BF
LINE : NEUTRAL-PE(DVI)
Date: 11. Jan 03 01:11


Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	9k	PK+AV	20ms AUTO	LN	OFF

Transducer No.	Start	Stop	Name
1	150k	30M	CE_LINE

Final Measurement: x QP / + AV

Meas Time: 1 ms
Subranges: 16
Acc Margin: 50dB

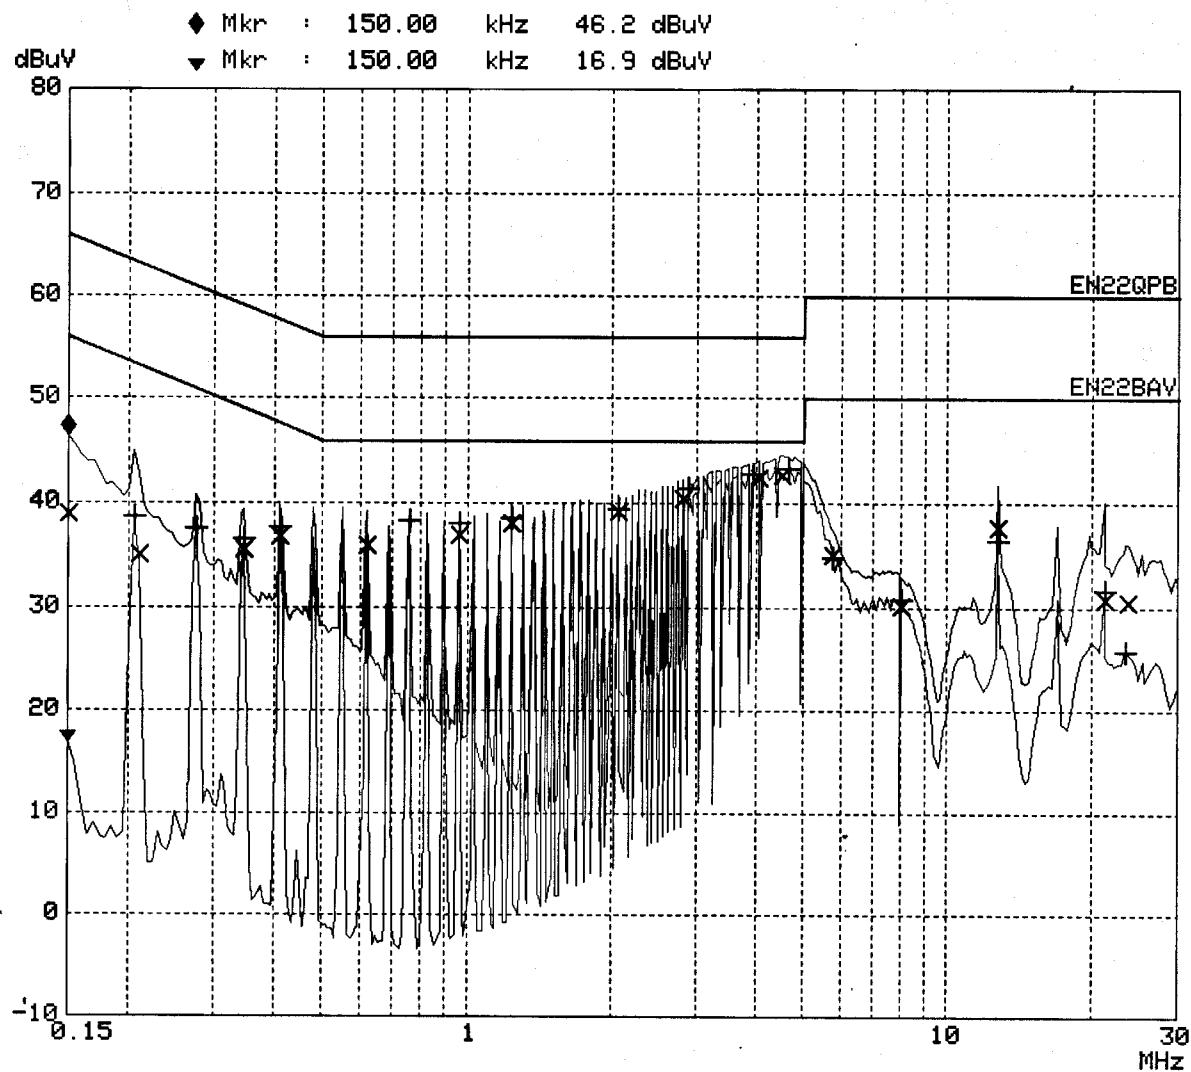

NEMKOKOREA

EUT: LCD MONITOR
Manuf: HANSOL Electronics
Op Cond: 1280*1024, 75Hz(FRONTEK Inverter)
Test Spec: FCC PART 15
Comment: MODEL : B17BF
LINE : LINE-PE(DSUB)
Date: 11. Jan 03 03:14


Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	9k	PK+AV	20ms	AUTO	LN OFF

Transducer No. Start Stop Name
1 150k 30M CE_LINE

Final Measurement: x QP / + AV

Meas Time: 1 ms
Subranges: 16
Acc Margin: 50dB

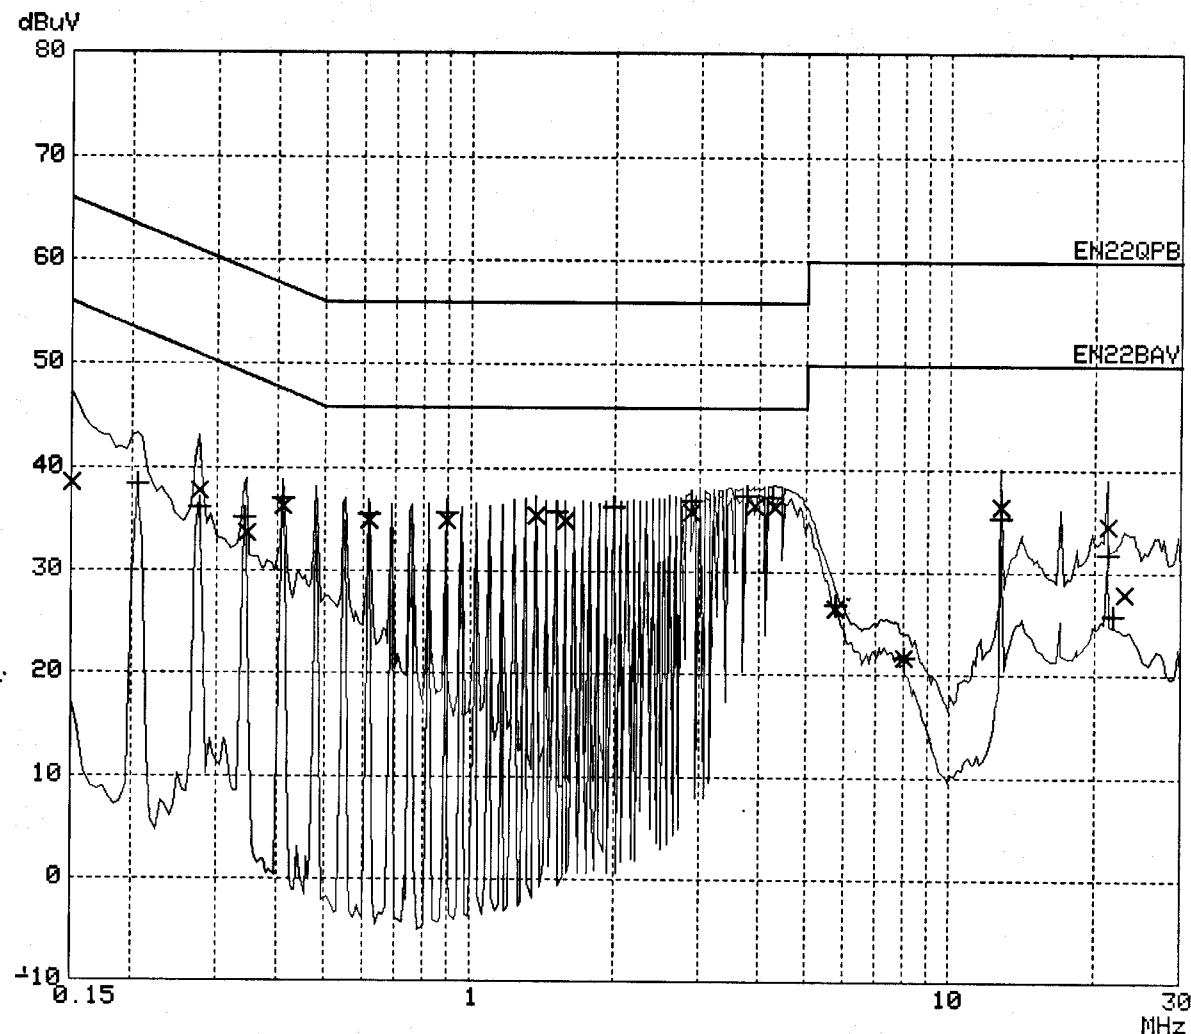

NEMKOKOREA

EUT: LCD MONITOR
Manuf: HANSOL Electronics
Op Cond: 1280*1024, 75Hz(FRONTEK Inverter)
Test Spec: FCC PART 15
Comment: MODEL : B17BF
LINE : NEUTRAL-PE(DSUB)
Date: 11. Jan 03 02:55


Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	9k	PK+AV	20ms	AUTO LN	OFF

Transducer No.	Start	Stop	Name
1	150k	30M	CE_LINE

Final Measurement: x QP / + AV

Meas Time: 1 ms
Subranges: 16
Acc Margin: 50dB

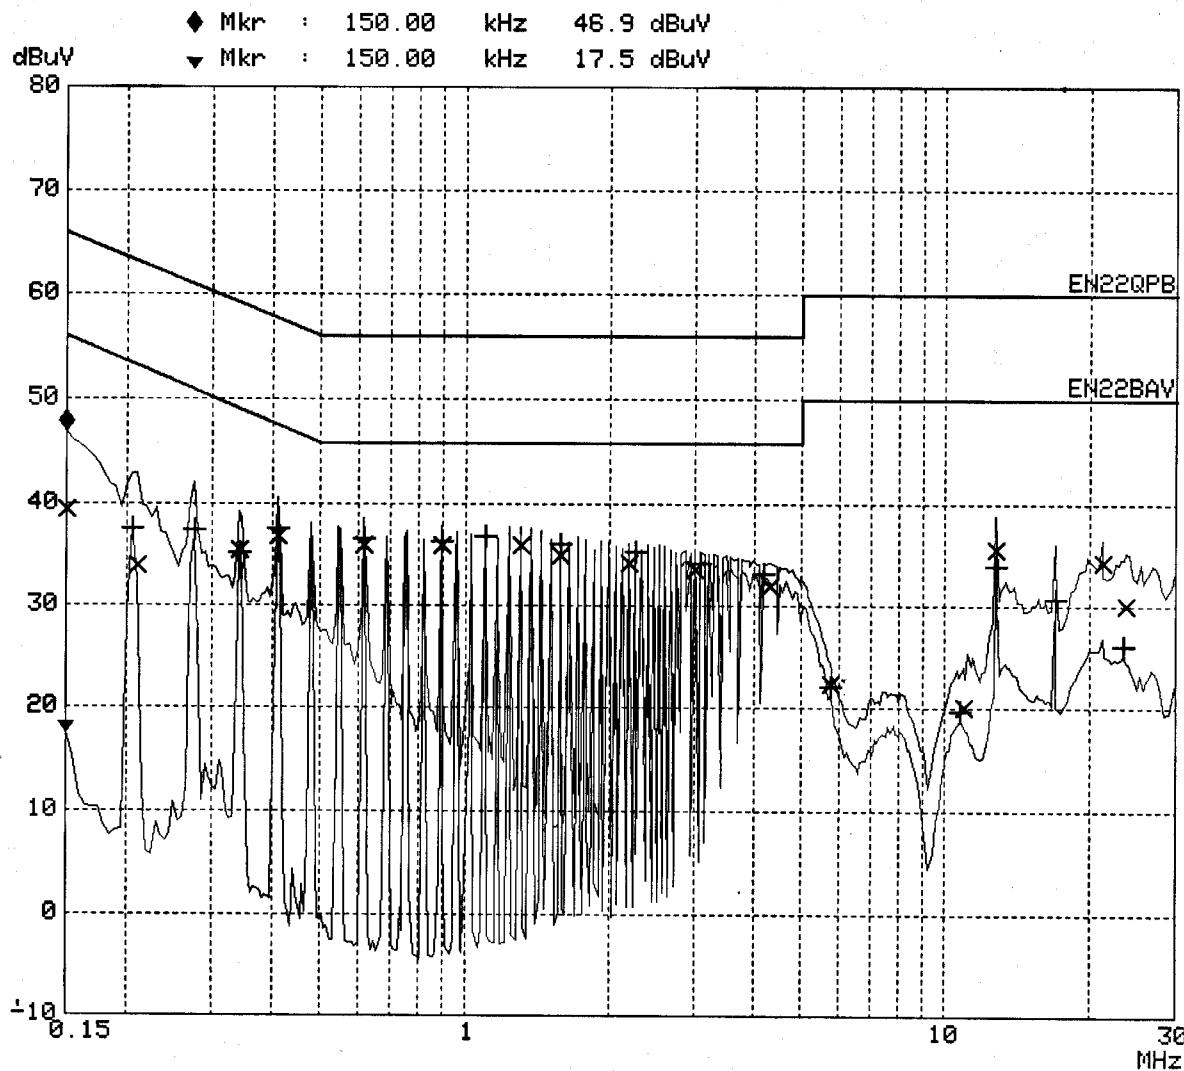

SAMPLE CALCULATIONS

$$\text{dB } \mu\text{V} = 20 \log_{10} (\mu\text{V}/\text{m})$$

$$\mu\text{V} = 10^{(\text{dB } \mu\text{V}/20)}$$

EX. 1.

@57.7 MHz

Class B limit = 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$ Reading = 19.1 dB μV (calibrated level)

Antenna factor + Cable Loss = 10.12 dB

Total = 29.22 dB $\mu\text{V}/\text{m}$

Margin = 40.0 - 29.22 = 10.78

10.78 dB below the limit**EX. 2.**

@98.20 MHz

Class B limit = 2 nW = 50.0 dB μV Reading = 19.1 dB μV (calibrated level)

Impedance matching Network Loss = 7.5 dB

Total = 26.6 dB μV

Margin = 50.0 - 26.6 = 23.4

23.4 dB below the limit

ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 with the confidence level of 95%

1. Radiation Uncertainty Calculation

Contribution	Probability Distribution	Uncertainty(+/-dB)
Antenna Factor	Normal (k=2)	± 0.5
Cable Loss	Normal (k=2)	± 0.04
Receiver Specification	Rectangular	± 2.0
Antenna directivity	Rectangular	± 1.0
Antenna Factor variation with Height		
Antenna Phase Center Variation		
Antenna Factor Frequency Interpolation		
Measurement Distance Variation		
Site Imperfections	Rectangular	± 2.0
Mismatch:Receiver VRC $r_i=0.3$	U-Shaped	+ 0.25 / - 0.26
Antenna VRC $r_R=0.1(B_i)0.4(L_p)$		
Uncertainty Limits $20\log(1+/-r_i r_R)$		
System Repeatability	Std.deviation	± 0.05
Repeatability of EUT	-	-
Combined Standard Uncertainty	Normal	± 1.77
Expended Uncertainty U	Normal (k=2)	± 3.5

2. Conducted Uncertainty Calculation

Contribution	Probability Distribution	Uncertainty(+/-dB)
Receiver Specification	Normal (k=2)	± 2.0
LISN coupling spec.	Normal (k=2)	± 0.4
Cable and input attenuator cal.	Rectangular	± 0.4
Mismatch:Receiver VRC $r_i=0.3$	U-Shaped	± 0.26
LISN vrc $r_g=0.1$		
Uncertainty Limits $20\log(1+/-r_i r_R)$		
System Repeatability	Std.deviation	± 0.68
Repeatability of EUT	-	-
Combined Standard Uncertainty	Normal	± 1.18
Expended Uncertainty U	Normal (k=2)	± 2.4

TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Calibration Date
1	*Test Receiver	R & S	ESCS 30	2002.02
2	Test Receiver	PMM	PMM9000	2002.06
3	*Amplifier	HP	8447F	2002.09
4	*Amplifier	Agilent	8447F	2002.07
5	*Spectrum Analyzer	Advantest	R3265A	2002.03
6	*Logbicon Super Antenna	Schwarzbeck	VULB9166	2002.05
7	Log-Periodic Antenna	R & S	HL025	2002.01
8	Dipole Antenna	R & S	VHA9103	2002.05
9	Dipole Antenna	R & S	UHA9105	2002.05
11	Biconical Log Antenna	ARA	LPB-2520/A	2002.01
12	Asorbing Clamp	R & S	MDS21	2002.03
13	High Voltage Probe	R & S	ESH2-Z3	2002.09
14	Signal Generater	R & S	SMP02	2002.12
15	Matching Pad	R & S	RAM358.5414.02	2002.05
16	*LISN	R & S	ESH3-Z5	2002.10
17	*LISN	Kyoritsu	KNW-407	2002.04
18	LISN	Kyoritsu	KNW-408	2002.04
19	*Position Controller	EM Eng.	N/A	N/A
20	*Turn Table	EM Eng.	N/A	N/A
21	*Antenna Mast	EM Eng.	N/A	N/A
22	*Anechoic Chamber	EM Eng.	N/A	N/A
23	*Shielded Room	EM Eng.	N/A	N/A

*) Test equipment used during the test

RECOMMENDATION/CONCLUSION

The data collected shows that the **Hansol Electronics Inc.**

FCC ID : **MSAB17BF-2, LCD Monitor.** complies with § 15.107 ,15.109, 15.111 of the FCC Rules.

The highest emission observed was at **4.52 MHz** for conducted emissions with a margin of **3.2 dB**, at **359.80 MHz** for radiated emissions with a margin of **2.0 dB** and at **1694.00 MHz** for antenna power conducted emissions with a margin of **8.0 dB**.

APPENDIX A – SAMPLE LABEL

Labelling Requirements

The sample label shown shall be *permanently affixed* at a conspicuous location on the device and be readily visible to the user at the time of purchase.



● FCC ID Location of EUT



APPENDIX B – CIRCUIT DIAGRAM

APPENDIX E – USER'S MANUAL

APPENDIX F – SCHEMATIC DIAGRAM
