

## FCC Test Report

**Report No.:** RF200511E11

**FCC ID:** MSQ-CMAXI800

**Test Model:** CMAX6000

**Series Model:** CMAX6000V

**Received Date:** May 11, 2020

**Test Date:** May 16 to June 01, 2020

**Issued Date:** Sep. 14, 2020

**Applicant:** ASUSTeK Computer Inc.

**Address:** 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**FCC Registration /  
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Modification Record .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes .....	10
3.2.1 Test Mode Applicability and Tested Channel Detail .....	11
3.3 Duty Cycle of Test Signal .....	13
3.4 Description of Support Units .....	14
3.4.1 Configuration of System under Test .....	15
3.5 General Description of Applied Standards and References .....	16
<b>4 Test Types and Results</b> .....	<b>17</b>
4.1 Radiated Emission and Bandedge Measurement .....	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	17
4.1.2 Test Instruments .....	18
4.1.3 Test Procedures .....	21
4.1.4 Deviation from Test Standard .....	22
4.1.5 Test Setup .....	22
4.1.6 EUT Operating Conditions .....	23
4.1.7 Test Results .....	24
4.2 Conducted Emission Measurement .....	38
4.2.1 Limits of Conducted Emission Measurement .....	38
4.2.2 Test Instruments .....	38
4.2.3 Test Procedures .....	39
4.2.4 Deviation from Test Standard .....	39
4.2.5 Test Setup .....	39
4.2.6 EUT Operating Conditions .....	39
4.2.7 Test Results .....	40
4.3 6dB Bandwidth Measurement .....	42
4.3.1 Limits of 6dB Bandwidth Measurement .....	42
4.3.2 Test Setup .....	42
4.3.3 Test Instruments .....	42
4.3.4 Test Procedure .....	42
4.3.5 Deviation from Test Standard .....	42
4.3.6 EUT Operating Conditions .....	42
4.3.7 Test Result .....	43
4.4 Conducted Output Power Measurement .....	45
4.4.1 Limits of Conducted Output Power Measurement .....	45
4.4.2 Test Setup .....	45
4.4.3 Test Instruments .....	45
4.4.4 Test Procedures .....	45
4.4.5 Deviation from Test Standard .....	45
4.4.6 EUT Operating Conditions .....	45
4.4.7 Test Results .....	46
4.5 Power Spectral Density Measurement .....	50
4.5.1 Limits of Power Spectral Density Measurement .....	50
4.5.2 Test Setup .....	50
4.5.3 Test Instruments .....	50
4.5.4 Test Procedure .....	50
4.5.5 Deviation from Test Standard .....	50
4.5.6 EUT Operating Condition .....	50

4.5.7 Test Results .....	51
4.6 Conducted Out of Band Emission Measurement .....	53
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	53
4.6.2 Test Setup.....	53
4.6.3 Test Instruments .....	53
4.6.4 Test Procedure .....	53
4.6.5 Deviation from Test Standard .....	53
4.6.6 EUT Operating Condition .....	53
4.6.7 Test Results .....	53
<b>5 Pictures of Test Arrangements.....</b>	<b>70</b>
<b>Annex A - Band-Edge Measurement.....</b>	<b>71</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>75</b>

### Release Control Record

Issue No.	Description	Date Issued
RF200511E11	Original release.	Sep. 14, 2020

## 1 Certificate of Conformity

**Product:** AX6000 Dual Band DOCSIS 3.1 Cable Modem Router ,  
AX6000 Dual Band DOCSIS 3.1 Cable Modem Voice Router

**Brand:** ASUS

**Test Model:** CMAX6000

**Series Model:** CMAX6000V

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** ASUSTeK Computer Inc.

**Test Date:** May 16 to June 01, 2020

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Vivian Huang , **Date:** Sep. 14, 2020  
Vivian Hunag / Specialist

**Approved by :** [Signature] , **Date:** Sep. 14, 2020  
Clark Lin / Technical Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.48dB at 0.32188MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.2dB at 2390.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

### Note:

- For 2.4GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.4 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	AX6000 Dual Band DOCSIS 3.1 Cable Modem Router , AX6000 Dual Band DOCSIS 3.1 Cable Modem Voice Router
Brand	ASUS
Test Model	CMAX6000
Series Model	CMAX6000V
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 600 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2401.9 Mbps
Operating Frequency	<b>2.4GHz:</b> 2.412GHz ~ 2.462GHz <b>5GHz:</b> 5.18 ~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	<b>2.4GHz:</b> 802.11b, 802.11g, 802.11n (HT20), VHT20, 80211ax (HE20): 11 802.11n (HT40), VHT40, 80211ax (HE40): 7 <b>5GHz:</b> 802.11a, 802.11n (HT20), 802.11ac (VHT20), 80211ax (HE20): 9 802.11n (HT40), 802.11ac (VHT40), 80211ax (HE40): 4 802.11ac (VHT80), 80211ax (HE80): 2
Output Power	<b>CDD Mode:</b> <b>2.412 ~ 2.462 GHz:</b> 984.387 mW <b>5.18 ~ 5.24 GHz:</b> 901.087 mW <b>5.745 ~ 5.825 GHz:</b> 862.325 mW <b>Beamforming Mode:</b> <b>2.412 ~ 2.462 GHz:</b> 618.439 mW <b>5.18 ~ 5.24 GHz:</b> 686.722 mW <b>5.745 ~ 5.825 GHz:</b> 694.634 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x1
Data Cable Supplied	RJ-45 Cable x 1(Unshielded, 1m)

Note:

1. The EUT has two model names which are identical to each other in all aspects except for the followings:

Brand Name	Product Name	Model Name	Description
ASUS	AX6000 Dual Band DOCSIS 3.1 Cable Modem Voice Router	CMAX6000V	Main board has FXS RJ11 port X2, RF board has battery status port X1.
	AX6000 Dual Band DOCSIS 3.1 Cable Modem Router	CMAX6000	Main board hasn't FXS RJ11 port, RF board hasn't battery status port.

Note: From the above models, the radiated emission and conducted emission worse case was found in Model: **CMAX6000**. Therefore only the test data of the mode was recorded in this report.

2. The EUT has two radios as following table:

Radio 1	Radio 2
WLAN 2.4GHz	WLAN 5GHz

3. Simultaneously transmission condition.

Condition	Technology	
1	WLAN 2.4GHz	WLAN 5GHz

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The EUT must be supplied with a power adapter and following different models could be chosen:

No.	Brand	Model No.	Spec.
1	Asian Power Devices Inc	WA-36A12FU	Input: 100-240Vac, 0.9A, 50/60Hz Output: 12Vdc, 3.0A DC Output cable: Unshielded, 1.5m
2	HONOR	ADS-36FKJ-12 12036EPCU	Input: 100-240Vac, 1A, 50/60Hz Output: 12Vdc, 3.0A DC Output cable: Unshielded, 1.5m

Note: From the above models, the worst radiated emission test and conducted emission test were found in **Adapter 2**. Therefore only the test data of the models were recorded in this report.

5. The antennas provided to the EUT, please refer to the following table:

Antenna NO.	Chain No.	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	Cable Length (mm)
1	0	2.42	2.4~2.4835GHz	PIFA	i-pex(MHF)	227
		0.49	5.15~5.85GHz			
2	1	0.09	2.4~2.4835GHz	PIFA	i-pex(MHF)	171
		1.42	5.15~5.85GHz			
3	2	1.38	2.4~2.4835GHz	PIFA	i-pex(MHF)	145
		1.44	5.15~5.85GHz			
4	3	3.69	2.4~2.4835GHz	PIFA	i-pex(MHF)	73
		2.46	5.15~5.85GHz			



6. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	4TX	4RX
802.11g	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
VHT20	4TX	4RX
VHT40	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), VHT mode for 20MHz (40MHz) and 802.11ax mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n/ VHT mode is the same as the 802.11ax mode or more lower than it and investigated worst case to representative mode in test report. (Final test mode refer to section 3.2.1)

7. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20 and 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40 and 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement  
**RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission  
**APCM**: Antenna Port Conducted Measurement

#### Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

#### Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1	DSSS	DBPSK	1Mb/s

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1	DSSS	DBPSK	1Mb/s

### Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>CDD Mode</b>					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
VHT20 (Output power only)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40 (Output power only)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0
<b>Beamforming Mode (output power only)</b>					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

### Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	24deg. C, 68%RH	120Vac, 60Hz	Nelson Teng
RE<1G	22deg. C, 67%RH	120Vac, 60Hz	Kevin Ko
PLC	22deg. C, 68%RH	120Vac, 60Hz	Nick Lo
APCM	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin

### 3.3 Duty Cycle of Test Signal

If duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.


If duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.

**802.11b:** Duty cycle = 12.4 ms /12.457 ms=0.995

**802.11g:** Duty cycle = 2.065 ms /2.102 ms=0.982

**802.11ax (HE20):** Duty cycle = 1.477 ms /1.53 ms=0.965, Duty factor =  $10 * \log (1/\text{Duty cycle}) = 0.15 \text{ dB}$

**802.11ax (HE40):** Duty cycle = 0.77 ms /0.804 ms=0.958, Duty factor =  $10 * \log (1/\text{Duty cycle}) = 0.19 \text{ dB}$

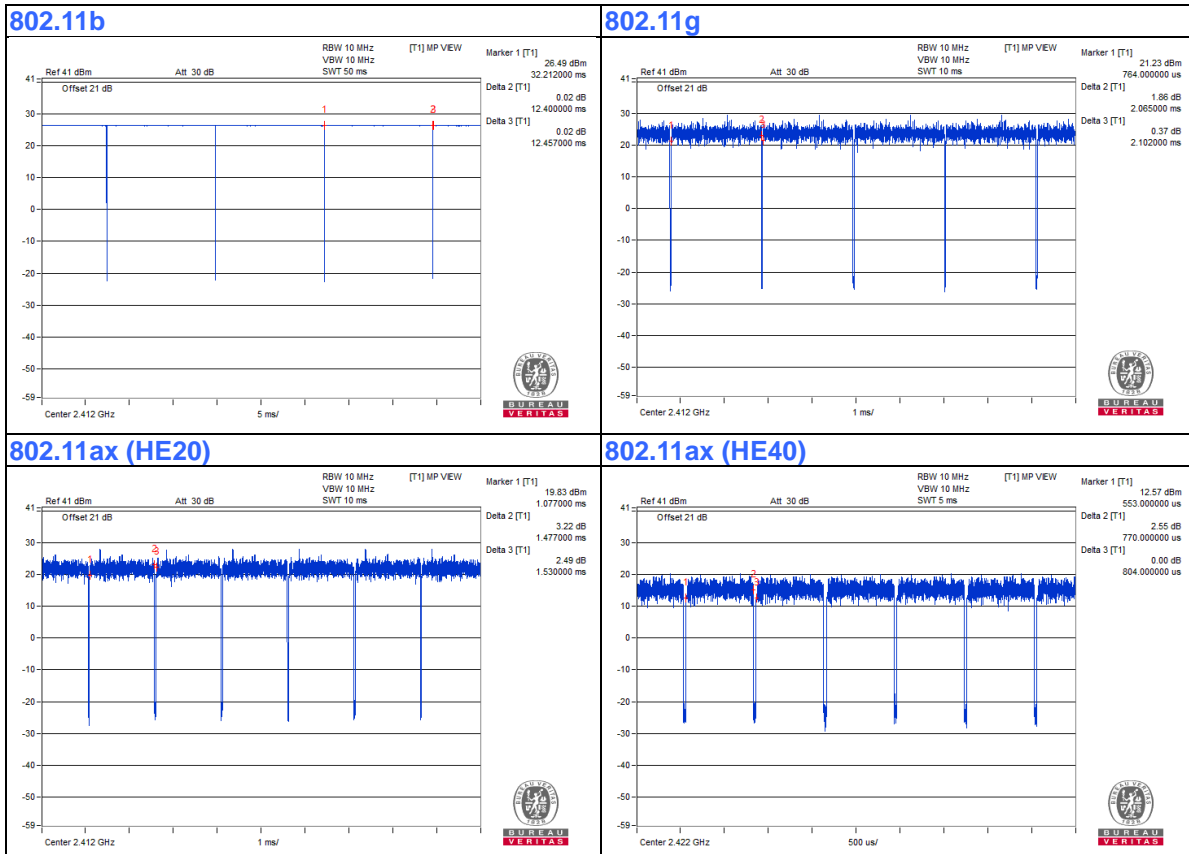

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
B.	HUB	D-Link	DGS-1005D	DR8WC92000968	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Coaxial Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	1	1	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	RJ-45 Cable	3	10	No	0	Provided by Lab
5.	DC Cable	1	1.5	No	0	Supplied by client

### 3.4.1 Configuration of System under Test

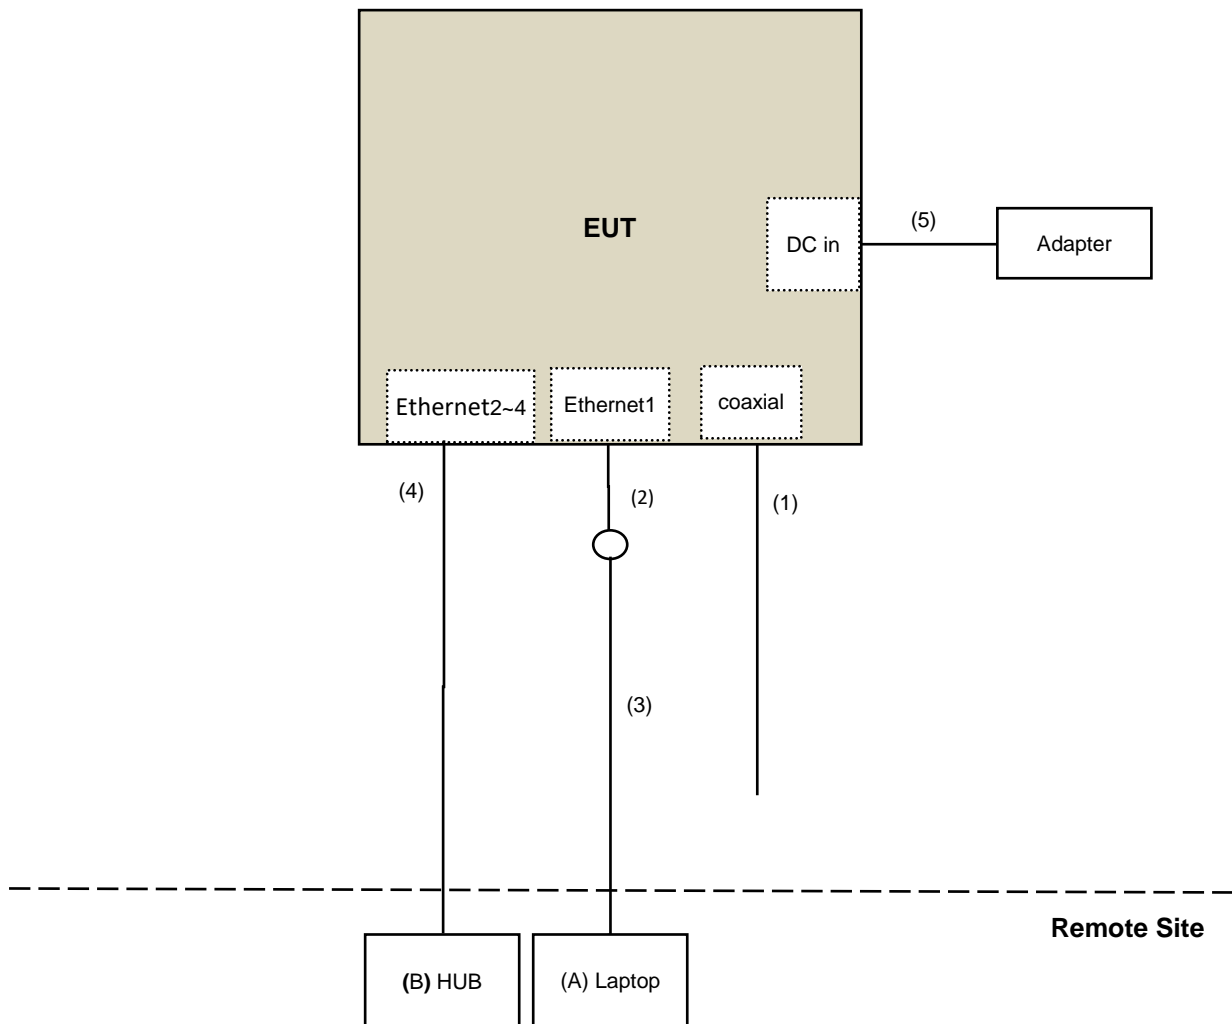

### **3.5 General Description of Applied Standards and References**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test Standard:**

**FCC Part 15, Subpart C (15.247)**

**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

All test items have been performed as a reference to the above KDB test guidance.



## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

## 4.1.2 Test Instruments

**For Radiated emission test**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	Apr. 28, 2020	Apr. 27, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-3-1	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-2	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-3	Mar. 17, 2020	Mar. 16, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 26, 2019	Sep. 25, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1200	160922	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 10, 2019	June 09, 2020
RF Cable	EMC104-SM-SM-6000	180602	June 10, 2019	June 09, 2020
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: May 30 to June 01, 2020

**For Bandedge test**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1200	160922	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 10, 2019	June 09, 2020
RF Cable	EMC104-SM-SM-6000	180602	June 10, 2019	June 09, 2020
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: May 16, 2020

**For other test**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	June 04, 2019	June 03, 2020
Power meter Anritsu	ML2495A	1529002	July 26, 2019	July 25, 2020
Power sensor Anritsu	MA2411B	1339443	July 26, 2019	July 25, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. Tested Date: May 30, 2020

#### 4.1.3 Test Procedures

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


**For Radiated emission below 30MHz**

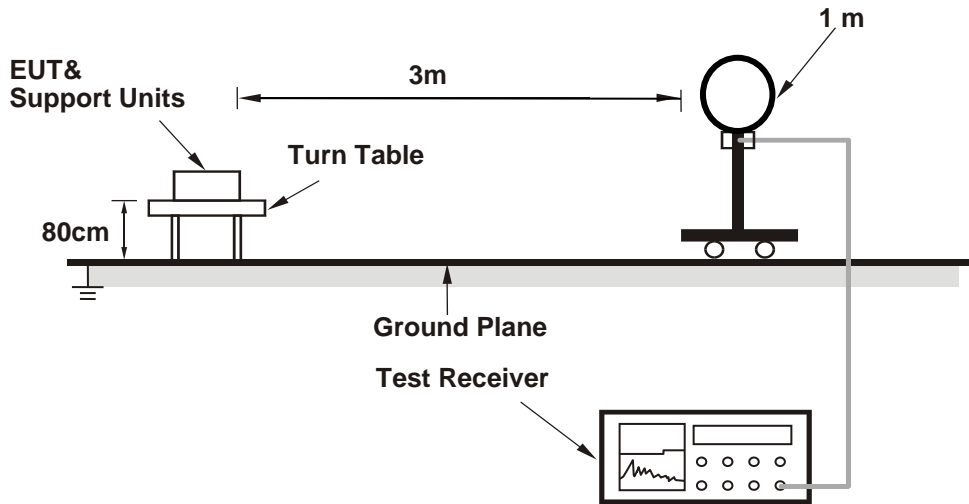

**For Radiated emission 30MHz to 1GHz**

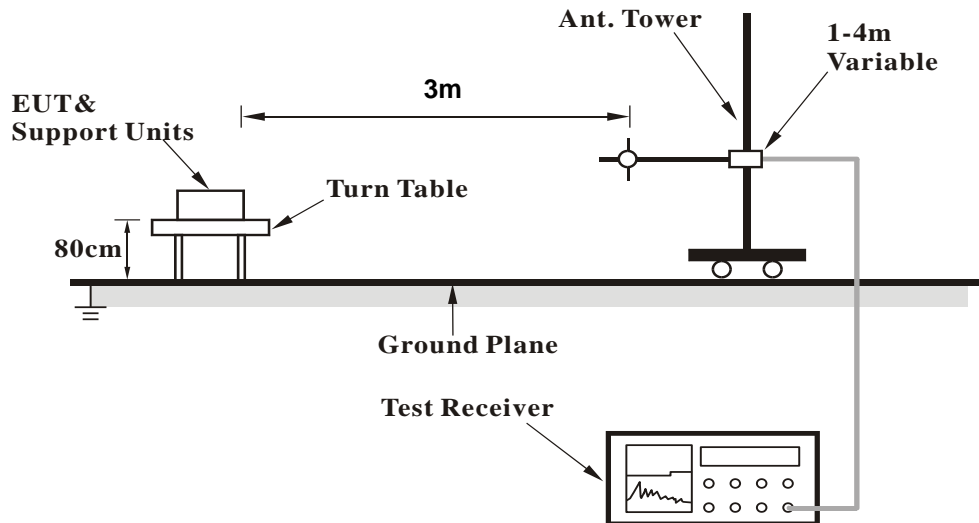

### For Radiated emission above 1GHz

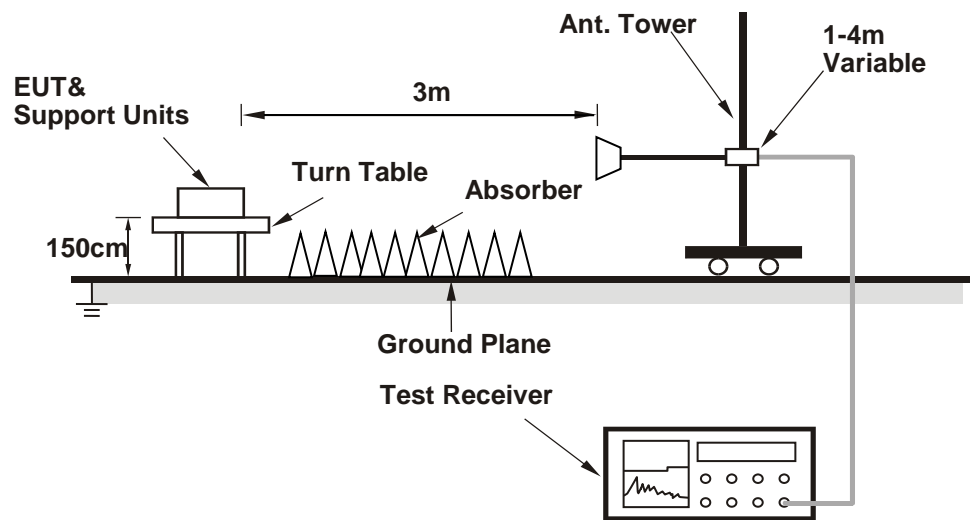

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Laptop which is placed on remote site.
- b. Controlling software (accessMtool v3.1.01) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

## 4.1.7 Test Results

## Above 1GHz Data :

## 802.11b

<b>Channel</b>	TX Channel 1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	1.91 H	40	59.4	-1.9
2	2390.00	45.4 AV	54.0	-8.6	1.91 H	40	47.3	-1.9
3	*2412.00	121.6 PK			1.91 H	40	123.5	-1.9
4	*2412.00	118.6 AV			1.91 H	40	120.5	-1.9
5	4824.00	51.9 PK	74.0	-22.1	2.33 H	40	49.0	2.9
6	4824.00	50.6 AV	54.0	-3.4	2.33 H	40	47.7	2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.4 PK	74.0	-14.6	2.15 V	276	61.3	-1.9
2	2390.00	48.2 AV	54.0	-5.8	2.15 V	276	50.1	-1.9
3	*2412.00	121.3 PK			2.15 V	276	123.2	-1.9
4	*2412.00	118.3 AV			2.15 V	276	120.2	-1.9
5	4824.00	48.8 PK	74.0	-25.2	1.10 V	98	45.9	2.9
6	4824.00	45.9 AV	54.0	-8.1	1.10 V	98	43.0	2.9

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.



<b>Channel</b>	TX Channel 6	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.9 PK	74.0	-18.1	1.90 H	258	57.8	-1.9
2	2390.00	43.3 AV	54.0	-10.7	1.90 H	258	45.2	-1.9
3	*2437.00	119.2 PK			1.90 H	258	121.2	-2.0
4	*2437.00	116.6 AV			1.90 H	258	118.6	-2.0
5	2483.50	57.2 PK	74.0	-16.8	1.90 H	258	59.1	-1.9
6	2483.50	45.8 AV	54.0	-8.2	1.90 H	258	47.7	-1.9
7	4874.00	54.9 PK	74.0	-19.1	2.25 H	81	52.1	2.8
8	4874.00	53.1 AV	54.0	-0.9	2.25 H	81	50.3	2.8
9	7311.00	45.4 PK	74.0	-28.6	1.00 H	135	36.5	8.9
10	7311.00	35.0 AV	54.0	-19.0	1.00 H	135	26.1	8.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.6 PK	74.0	-16.4	2.07 V	289	59.5	-1.9
2	2390.00	45.3 AV	54.0	-8.7	2.07 V	289	47.2	-1.9
3	*2437.00	119.4 PK			2.07 V	289	121.4	-2.0
4	*2437.00	116.5 AV			2.07 V	289	118.5	-2.0
5	2483.50	57.9 PK	74.0	-16.1	2.07 V	289	59.8	-1.9
6	2483.50	46.8 AV	54.0	-7.2	2.07 V	289	48.7	-1.9
7	4874.00	49.6 PK	74.0	-24.4	1.10 V	89	46.8	2.8
8	4874.00	47.8 AV	54.0	-6.2	1.10 V	89	45.0	2.8
9	7311.00	44.5 PK	74.0	-29.5	2.01 V	133	35.6	8.9
10	7311.00	33.5 AV	54.0	-20.5	2.01 V	133	24.6	8.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>Channel</b>	TX Channel 11	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	119.4 PK			1.94 H	263	121.3	-1.9
2	*2462.00	116.4 AV			1.94 H	263	118.3	-1.9
3	2483.50	60.7 PK	74.0	-13.3	1.94 H	263	62.6	-1.9
4	2483.50	48.4 AV	54.0	-5.6	1.94 H	263	50.3	-1.9
5	4924.00	55.2 PK	74.0	-18.8	2.23 H	83	52.5	2.7
6	4924.00	53.4 AV	54.0	-0.6	2.23 H	83	50.7	2.7
7	7386.00	45.0 PK	74.0	-29.0	1.04 H	129	36.0	9.0
8	7386.00	34.7 AV	54.0	-19.3	1.04 H	129	25.7	9.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	119.7 PK			2.10 V	285	121.6	-1.9
2	*2462.00	116.7 AV			2.10 V	285	118.6	-1.9
3	2483.50	61.4 PK	74.0	-12.6	2.10 V	285	63.3	-1.9
4	2483.50	49.8 AV	54.0	-4.2	2.10 V	285	51.7	-1.9
5	4924.00	49.1 PK	74.0	-24.9	1.05 V	81	46.4	2.7
6	4924.00	47.3 AV	54.0	-6.7	1.05 V	81	44.6	2.7
7	7386.00	44.5 PK	74.0	-29.5	2.06 V	124	35.5	9.0
8	7386.00	33.7 AV	54.0	-20.3	2.06 V	124	24.7	9.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

## 802.11g

<b>Channel</b>	TX Channel 1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.4 PK	74.0	-3.6	1.51 H	227	72.3	-1.9
2	2390.00	52.8 AV	54.0	-1.2	1.51 H	227	54.7	-1.9
3	*2412.00	117.6 PK			1.51 H	227	119.5	-1.9
4	*2412.00	107.3 AV			1.51 H	227	109.2	-1.9
5	4824.00	49.8 PK	74.0	-24.2	2.31 H	38	46.9	2.9
6	4824.00	46.3 AV	54.0	-7.7	2.31 H	38	43.4	2.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.2 PK	74.0	-1.8	1.79 V	100	74.1	-1.9
2	2390.00	53.0 AV	54.0	-1.0	1.79 V	100	54.9	-1.9
3	*2412.00	115.8 PK			1.79 V	100	117.7	-1.9
4	*2412.00	105.8 AV			1.79 V	100	107.7	-1.9
5	4824.00	45.6 PK	74.0	-28.4	1.06 V	119	42.7	2.9
6	4824.00	42.3 AV	54.0	-11.7	1.06 V	119	39.4	2.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>Channel</b>	TX Channel 6	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	2390.00	67.7 PK	74.0	-6.3	1.23 H	222	69.6	-1.9
2	2390.00	45.9 AV	54.0	-8.1	1.23 H	222	47.8	-1.9
3	*2437.00	119.6 PK			1.23 H	222	121.6	-2.0
4	*2437.00	109.1 AV			1.23 H	222	111.1	-2.0
5	2483.50	62.9 PK	74.0	-11.1	1.23 H	222	64.8	-1.9
6	2483.50	47.6 AV	54.0	-6.4	1.23 H	222	49.5	-1.9
7	4874.00	48.1 PK	74.0	-25.9	2.29 H	89	45.3	2.8
8	4874.00	46.9 AV	54.0	-7.1	2.29 H	89	44.1	2.8
9	7311.00	45.0 PK	74.0	-29.0	1.00 H	122	36.1	8.9
10	7311.00	34.9 AV	54.0	-19.1	1.00 H	122	26.0	8.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.77 V	112	70.1	-1.9
2	2390.00	46.1 AV	54.0	-7.9	1.77 V	112	48.0	-1.9
3	*2437.00	120.1 PK			1.77 V	112	122.1	-2.0
4	*2437.00	108.6 AV			1.77 V	112	110.6	-2.0
5	2483.50	62.1 PK	74.0	-11.9	1.77 V	112	64.0	-1.9
6	2483.50	42.9 AV	54.0	-11.1	1.77 V	112	44.8	-1.9
7	4874.00	46.2 PK	74.0	-27.8	1.11 V	104	43.4	2.8
8	4874.00	43.6 AV	54.0	-10.4	1.11 V	104	40.8	2.8
9	7311.00	45.1 PK	74.0	-28.9	1.96 V	148	36.2	8.9
10	7311.00	34.0 AV	54.0	-20.0	1.96 V	148	25.1	8.9

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>Channel</b>	TX Channel 11	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	119.6 PK			1.69 H	316	121.5	-1.9
2	*2462.00	108.9 AV			1.69 H	316	110.8	-1.9
3	2483.50	73.1 PK	74.0	-0.9	1.69 H	316	75.0	-1.9
4	2483.50	52.2 AV	54.0	-1.8	1.69 H	316	54.1	-1.9
5	4924.00	48.0 PK	74.0	-26.0	2.20 H	74	45.3	2.7
6	4924.00	46.6 AV	54.0	-7.4	2.20 H	74	43.9	2.7
7	7386.00	45.2 PK	74.0	-28.8	1.10 H	125	36.2	9.0
8	7386.00	34.8 AV	54.0	-19.2	1.10 H	125	25.8	9.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	119.1 PK			2.73 V	35	121.0	-1.9
2	*2462.00	108.3 AV			2.73 V	35	110.2	-1.9
3	2483.50	61.3 PK	74.0	-12.7	2.73 V	35	63.2	-1.9
4	2483.50	46.5 AV	54.0	-7.5	2.73 V	35	48.4	-1.9
5	4924.00	46.7 PK	74.0	-27.3	1.01 V	96	44.0	2.7
6	4924.00	44.0 AV	54.0	-10.0	1.01 V	96	41.3	2.7
7	7386.00	45.3 PK	74.0	-28.7	2.10 V	124	36.3	9.0
8	7386.00	34.1 AV	54.0	-19.9	2.10 V	124	25.1	9.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

**802.11n (HT20)**

<b>Channel</b>	TX Channel 1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	2.02 H	236	67.2	-1.9
2	<b>2390.00</b>	<b>53.8 AV</b>	<b>54.0</b>	<b>-0.2</b>	<b>2.02 H</b>	<b>236</b>	<b>55.7</b>	<b>-1.9</b>
3	*2412.00	116.7 PK			2.02 H	236	118.6	-1.9
4	*2412.00	107.3 AV			2.02 H	236	109.2	-1.9
5	4824.00	48.3 PK	74.0	-25.7	2.25 H	84	45.4	2.9
6	4824.00	47.0 AV	54.0	-7.0	2.25 H	84	44.1	2.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.2 PK	74.0	-8.8	2.77 V	36	67.1	-1.9
2	2390.00	52.1 AV	54.0	-1.9	2.77 V	36	54.0	-1.9
3	*2412.00	117.3 PK			2.77 V	36	119.2	-1.9
4	*2412.00	106.5 AV			2.77 V	36	108.4	-1.9
5	4824.00	47.3 PK	74.0	-26.7	1.08 V	120	44.4	2.9
6	4824.00	44.4 AV	54.0	-9.6	1.08 V	120	41.5	2.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>Channel</b>	TX Channel 6	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.4 PK	74.0	-8.6	2.04 H	253	67.3	-1.9
2	2390.00	48.3 AV	54.0	-5.7	2.04 H	253	50.2	-1.9
3	*2437.00	122.2 PK			2.04 H	253	124.2	-2.0
4	*2437.00	111.6 AV			2.04 H	253	113.6	-2.0
5	2483.50	66.5 PK	74.0	-7.5	2.04 H	253	68.4	-1.9
6	2483.50	47.6 AV	54.0	-6.4	2.04 H	253	49.5	-1.9
7	4874.00	48.7 PK	74.0	-25.3	2.20 H	70	45.9	2.8
8	4874.00	47.2 AV	54.0	-6.8	2.20 H	70	44.4	2.8
9	7311.00	45.6 PK	74.0	-28.4	1.08 H	115	36.7	8.9
10	7311.00	35.1 AV	54.0	-18.9	1.08 H	115	26.2	8.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.0 PK	74.0	-13.0	2.76 V	51	62.9	-1.9
2	2390.00	45.8 AV	54.0	-8.2	2.76 V	51	47.7	-1.9
3	*2437.00	122.7 PK			2.76 V	51	124.7	-2.0
4	*2437.00	111.1 AV			2.76 V	51	113.1	-2.0
5	2483.50	61.5 PK	74.0	-12.5	2.76 V	51	63.4	-1.9
6	2483.50	45.3 AV	54.0	-8.7	2.76 V	51	47.2	-1.9
7	4874.00	46.7 PK	74.0	-27.3	1.12 V	97	43.9	2.8
8	4874.00	43.8 AV	54.0	-10.2	1.12 V	97	41.0	2.8
9	7311.00	45.3 PK	74.0	-28.7	1.93 V	151	36.4	8.9
10	7311.00	34.1 AV	54.0	-19.9	1.93 V	151	25.2	8.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>Channel</b>	TX Channel 11	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.3 PK			2.67 H	258	119.2	-1.9
2	*2462.00	106.9 AV			2.67 H	258	108.8	-1.9
3	2483.50	66.8 PK	74.0	-7.2	2.67 H	258	68.7	-1.9
4	2483.50	53.4 AV	54.0	-0.6	2.67 H	258	55.3	-1.9
5	4924.00	47.8 PK	74.0	-26.2	2.31 H	90	45.1	2.7
6	4924.00	46.8 AV	54.0	-7.2	2.31 H	90	44.1	2.7
7	7386.00	45.4 PK	74.0	-28.6	1.00 H	119	36.4	9.0
8	7386.00	35.1 AV	54.0	-18.9	1.00 H	119	26.1	9.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.9 PK			2.80 V	31	118.8	-1.9
2	*2462.00	106.1 AV			2.80 V	31	108.0	-1.9
3	2483.50	66.9 PK	74.0	-7.1	2.80 V	31	68.8	-1.9
4	2483.50	51.3 AV	54.0	-2.7	2.80 V	31	53.2	-1.9
5	4924.00	46.9 PK	74.0	-27.1	1.11 V	105	44.2	2.7
6	4924.00	44.4 AV	54.0	-9.6	1.11 V	105	41.7	2.7
7	7386.00	45.9 PK	74.0	-28.1	1.98 V	140	36.9	9.0
8	7386.00	34.5 AV	54.0	-19.5	1.98 V	140	25.5	9.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.



**802.11n (HT40)**

<b>Channel</b>	TX Channel 3	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.9 PK	74.0	-7.1	2.72 H	259	68.8	-1.9
2	2390.00	53.6 AV	54.0	-0.4	2.72 H	259	55.5	-1.9
3	*2422.00	115.6 PK			2.72 H	259	117.5	-1.9
4	*2422.00	103.7 AV			2.72 H	259	105.6	-1.9
5	4844.00	47.7 PK	74.0	-26.3	2.16 H	77	44.8	2.9
6	4844.00	46.1 AV	54.0	-7.9	2.16 H	77	43.2	2.9
7	7266.00	45.1 PK	74.0	-28.9	1.09 H	126	36.3	8.8
8	7266.00	34.5 AV	54.0	-19.5	1.09 H	126	25.7	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.9 PK	74.0	-8.1	2.79 V	34	67.8	-1.9
2	2390.00	53.0 AV	54.0	-1.0	2.79 V	34	54.9	-1.9
3	*2422.00	113.2 PK			2.79 V	34	115.1	-1.9
4	*2422.00	102.0 AV			2.79 V	34	103.9	-1.9
5	4844.00	46.7 PK	74.0	-27.3	1.17 V	97	43.8	2.9
6	4844.00	43.9 AV	54.0	-10.1	1.17 V	97	41.0	2.9
7	7266.00	45.5 PK	74.0	-28.5	2.01 V	148	36.7	8.8
8	7266.00	34.5 AV	54.0	-19.5	2.01 V	148	25.7	8.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>Channel</b>	TX Channel 6	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.3 PK	74.0	-2.7	2.23 H	251	73.2	-1.9
2	2390.00	53.6 AV	54.0	-0.4	2.23 H	251	55.5	-1.9
3	*2437.00	118.6 PK			2.23 H	251	120.6	-2.0
4	*2437.00	106.3 AV			2.23 H	251	108.3	-2.0
5	2483.50	71.0 PK	74.0	-3.0	2.23 H	251	72.9	-1.9
6	2483.50	50.1 AV	54.0	-3.9	2.23 H	251	52.0	-1.9
7	4874.00	48.8 PK	74.0	-25.2	2.17 H	78	46.0	2.8
8	4874.00	47.1 AV	54.0	-6.9	2.17 H	78	44.3	2.8
9	7311.00	45.1 PK	74.0	-28.9	1.14 H	122	36.2	8.9
10	7311.00	34.4 AV	54.0	-19.6	1.14 H	122	25.5	8.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.5 PK	74.0	-6.5	2.81 V	21	69.4	-1.9
2	2390.00	52.8 AV	54.0	-1.2	2.81 V	21	54.7	-1.9
3	*2437.00	118.8 PK			2.81 V	21	120.8	-2.0
4	*2437.00	106.0 AV			2.81 V	21	108.0	-2.0
5	2483.50	64.3 PK	74.0	-9.7	2.81 V	21	66.2	-1.9
6	2483.50	49.6 AV	54.0	-4.4	2.81 V	21	51.5	-1.9
7	4874.00	46.8 PK	74.0	-27.2	1.23 V	87	44.0	2.8
8	4874.00	44.1 AV	54.0	-9.9	1.23 V	87	41.3	2.8
9	7311.00	45.7 PK	74.0	-28.3	2.05 V	151	36.8	8.9
10	7311.00	34.6 AV	54.0	-19.4	2.05 V	151	25.7	8.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>Channel</b>	TX Channel 9	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	114.6 PK			2.70 H	263	116.5	-1.9
2	*2452.00	103.1 AV			2.70 H	263	105.0	-1.9
3	2483.50	71.0 PK	74.0	-3.0	2.70 H	263	72.9	-1.9
4	2483.50	53.3 AV	54.0	-0.7	2.70 H	263	55.2	-1.9
5	4904.00	48.3 PK	74.0	-25.7	2.17 H	70	45.6	2.7
6	4904.00	46.9 AV	54.0	-7.1	2.17 H	70	44.2	2.7
7	7356.00	45.2 PK	74.0	-28.8	1.07 H	117	36.3	8.9
8	7356.00	34.7 AV	54.0	-19.3	1.07 H	117	25.8	8.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	115.0 PK			2.48 V	35	116.9	-1.9
2	*2452.00	103.8 AV			2.48 V	35	105.7	-1.9
3	2483.50	69.4 PK	74.0	-4.6	2.48 V	35	71.3	-1.9
4	2483.50	52.6 AV	54.0	-1.4	2.48 V	35	54.5	-1.9
5	4904.00	46.8 PK	74.0	-27.2	1.14 V	84	44.1	2.7
6	4904.00	44.3 AV	54.0	-9.7	1.14 V	84	41.6	2.7
7	7356.00	45.7 PK	74.0	-28.3	2.03 V	154	36.8	8.9
8	7356.00	34.4 AV	54.0	-19.6	2.03 V	154	25.5	8.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

Below 1GHz Data:

802.11b


<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	93.66	31.3 QP	43.5	-12.2	2.00 H	275	44.1	-12.8
2	124.99	34.3 QP	43.5	-9.2	3.00 H	90	42.9	-8.6
3	169.44	30.7 QP	43.5	-12.8	1.50 H	298	38.0	-7.3
4	378.84	32.7 QP	46.0	-13.3	1.00 H	59	36.3	-3.6
5	531.17	38.3 QP	46.0	-7.7	1.50 H	320	38.1	0.2
6	897.23	37.3 QP	46.0	-8.7	2.00 H	74	30.0	7.3

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

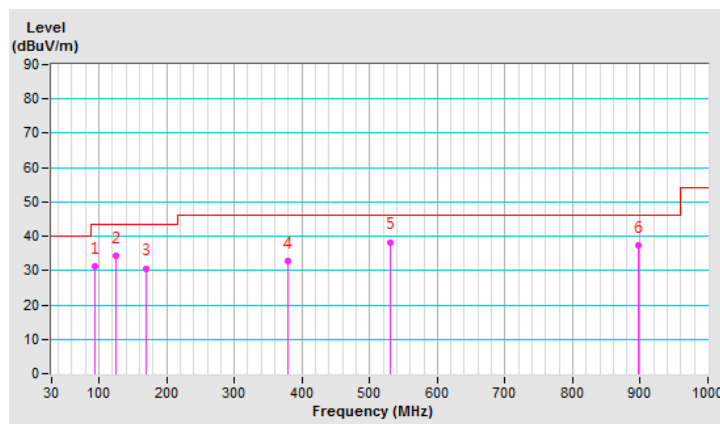


<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.01	33.9 QP	40.0	-6.1	1.00 V	112	42.7	-8.8
2	44.02	36.1 QP	40.0	-3.9	1.50 V	344	43.9	-7.8
3	125.01	35.9 QP	43.5	-7.6	1.00 V	345	44.5	-8.6
4	377.82	29.6 QP	46.0	-16.4	1.00 V	320	33.2	-3.6
5	531.25	35.2 QP	46.0	-10.8	1.00 V	173	35.0	0.2
6	954.82	38.3 QP	46.0	-7.7	3.00 V	96	30.2	8.1

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

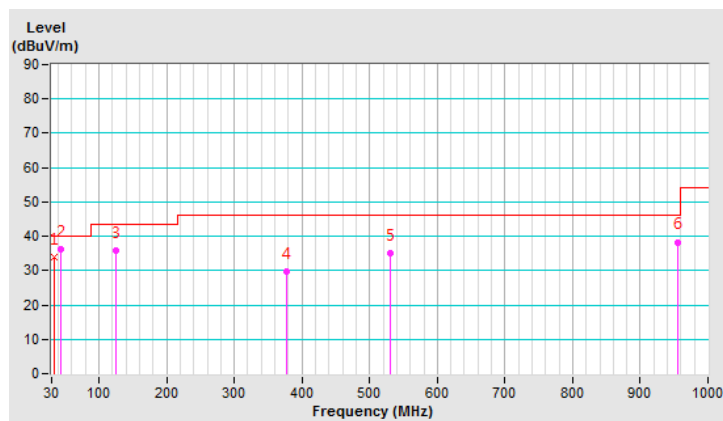

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 30, 2019	Aug. 29, 2020
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
3. Tested Date: June 01, 2020

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

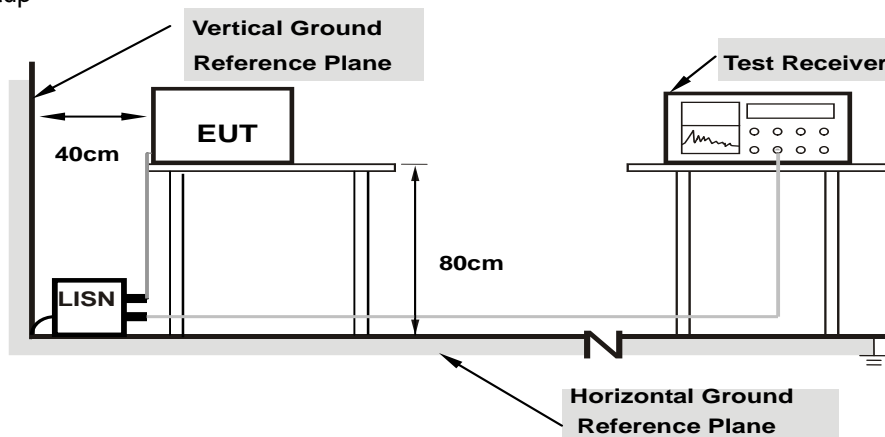

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


#### 4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15781	10.03	29.92	21.50	39.95	31.53	65.58	55.58	-25.63	-24.05
2	0.20859	10.04	30.88	24.76	40.92	34.80	63.26	53.26	-22.34	-18.46
3	0.32188	10.05	34.14	25.98	44.19	36.03	59.66	49.66	-15.47	-13.63
4	0.98594	10.10	24.56	17.60	34.66	27.70	56.00	46.00	-21.34	-18.30
5	7.37500	10.58	25.78	21.10	36.36	31.68	60.00	50.00	-23.64	-18.32
6	15.89453	11.18	20.17	15.71	31.35	26.89	60.00	50.00	-28.65	-23.11

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

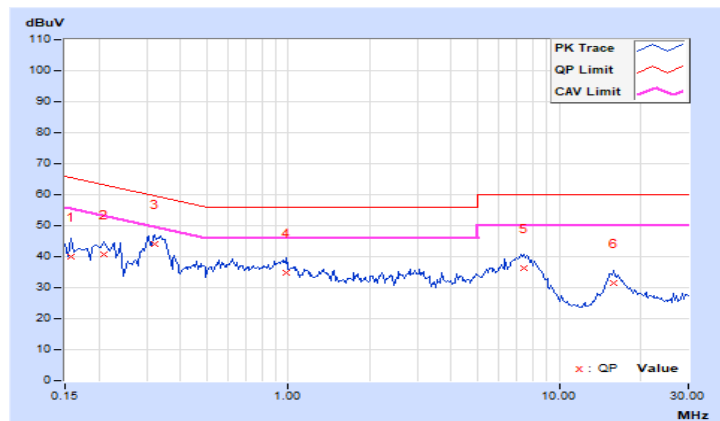




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15781	10.02	31.06	23.32	41.08	33.34	65.58	55.58	-24.50
2	0.24375	10.03	22.57	13.23	32.60	23.26	61.97	51.97	-29.37	-28.71
<b>3</b>	<b>0.32188</b>	<b>10.04</b>	<b>33.84</b>	<b>26.14</b>	<b>43.88</b>	<b>36.18</b>	<b>59.66</b>	<b>49.66</b>	<b>-15.78</b>	<b>-13.48</b>
4	2.88672	10.22	21.76	14.28	31.98	24.50	56.00	46.00	-24.02	-21.50
5	7.42969	10.50	26.24	21.48	36.74	31.98	60.00	50.00	-23.26	-18.02
6	15.50000	10.96	20.25	16.24	31.21	27.20	60.00	50.00	-28.79	-22.80

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

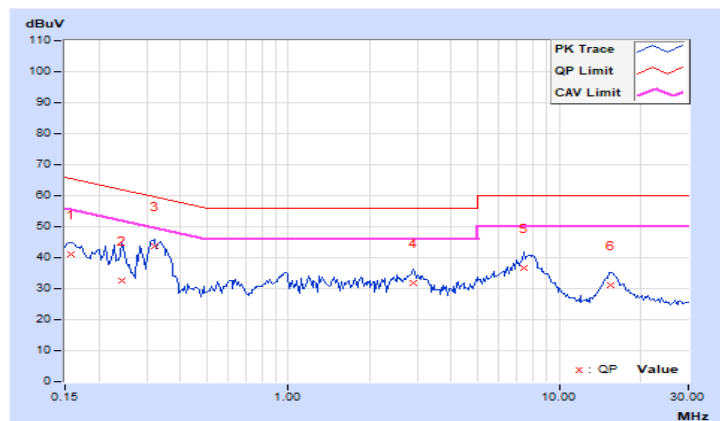


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup

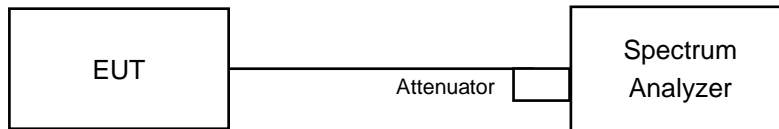

#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	7.09	7.09	7.11	7.03	0.5	PASS
6	2437	7.07	7.1	7.58	7.11	0.5	PASS
11	2462	7.11	7.11	6.61	7.11	0.5	PASS

##### 802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	16.42	16.42	16.43	16.38	0.5	PASS
6	2437	16.42	16.03	16.14	16.46	0.5	PASS
11	2462	16.45	16.43	16.42	16.4	0.5	PASS

##### 802.11ax (HE20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	19.07	18.93	19.01	19.04	0.5	PASS
6	2437	18.86	19.12	18.64	19.12	0.5	PASS
11	2462	19.1	19.06	18.95	19.01	0.5	PASS

##### 802.11ax (HE40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
3	2422	37.65	36.54	37.76	36.16	0.5	PASS
6	2437	37.38	36.01	36.64	37.88	0.5	PASS
9	2452	37.49	37.55	35.61	36.55	0.5	PASS

### Spectrum Plot of Worst Value


#### 802.11b / Chain 2 : CH11

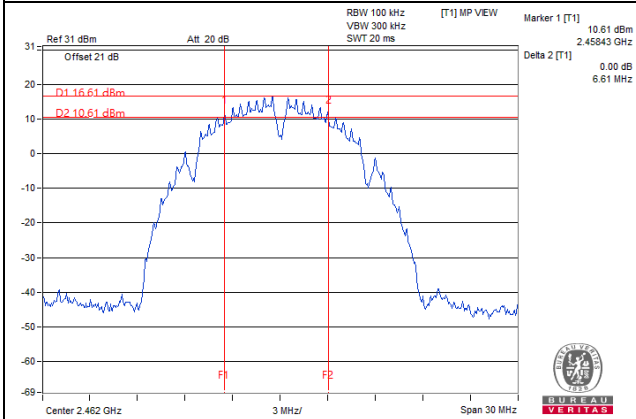


#### 802.11g / Chain 1 : CH6

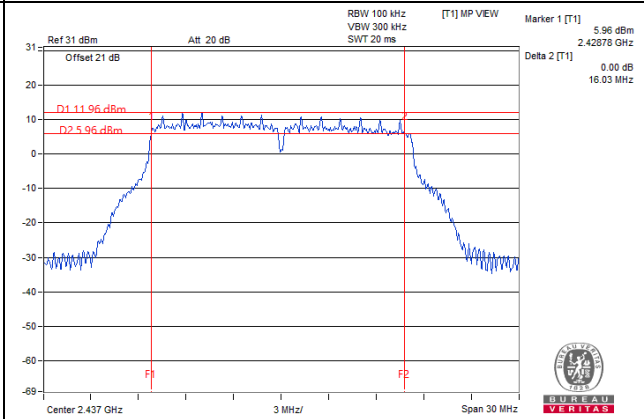

#### 802.11ax (HE20) / Chain 2 : CH6

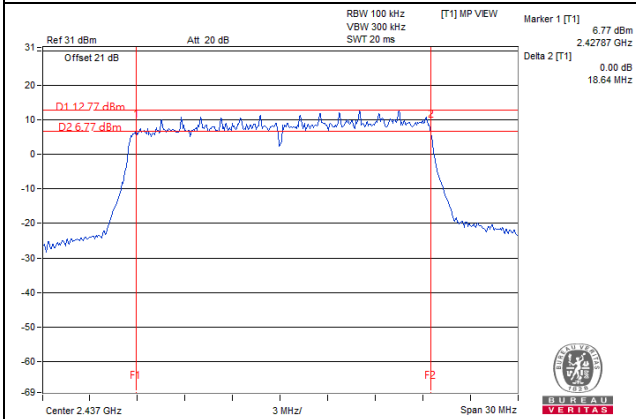

#### 802.11ax (HE40) / Chain 2 : CH9

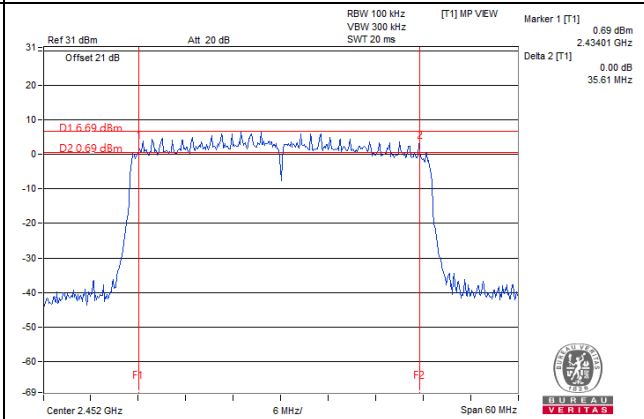

## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

### 4.4.2 Test Setup



### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

#### 4.4.7 Test Results

#### CDD Mode

##### 802.11b

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	23.68	23.98	24.15	23.82	984.387	29.93	30	Pass
6	2437	23.57	23.73	24.07	23.36	935.598	29.71	30	Pass
11	2462	23.06	23.65	24.02	23.52	911.295	29.60	30	Pass

##### 802.11g

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	20.72	20.86	21.35	21.04	503.447	27.02	30	Pass
6	2437	22.94	23.01	23.47	22.97	817.259	29.12	30	Pass
11	2462	21.19	21.21	21.82	21.25	549.059	27.40	30	Pass

##### VHT20

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	18.86	19.01	19.72	19.23	334.038	25.24	30	Pass
6	2437	22.41	22.58	22.99	22.91	749.816	28.75	30	Pass
11	2462	18.71	18.90	19.67	19.11	326.08	25.13	30	Pass

##### VHT40

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	18.01	18.32	18.44	17.52	257.478	24.11	30	Pass
6	2437	20.87	21.08	21.76	21.04	527.439	27.22	30	Pass
9	2452	19.76	19.59	19.90	18.92	361.322	25.58	30	Pass

**802.11ax (HE20)**

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	19.07	19.15	19.91	19.47	349.408	25.43	30	Pass
6	2437	23.07	23.23	23.66	23.38	863.191	29.36	30	Pass
11	2462	19.16	19.45	20.11	19.46	361.392	25.58	30	Pass

**802.11ax (HE40)**

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	18.48	18.74	18.97	17.97	286.834	24.58	30	Pass
6	2437	21.66	21.75	22.38	21.74	618.439	27.91	30	Pass
9	2452	20.08	19.93	20.39	19.46	397.964	26.00	30	Pass

## Beamforming Mode

### VHT20

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	18.86	19.01	19.72	19.23	334.038	25.24	27.98	Pass
6	2437	21.31	21.69	22.02	21.78	592.659	27.73	27.98	Pass
11	2462	18.71	18.90	19.67	19.11	326.08	25.13	27.98	Pass

**Note:** Directional gain=  $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 8.02\text{dBi} > 6\text{dBi}$ , so the power limit shall be reduced to  $30 - (8.02 - 6) = 27.98\text{dBm}$ .

### VHT40

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	18.01	18.32	18.44	17.52	257.478	24.11	27.98	Pass
6	2437	20.87	21.08	21.76	21.04	527.439	27.22	27.98	Pass
9	2452	19.76	19.59	19.90	18.92	361.322	25.58	27.98	Pass

**Note:** Directional gain=  $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 8.02\text{dBi} > 6\text{dBi}$ , so the power limit shall be reduced to  $30 - (8.02 - 6) = 27.98\text{dBm}$ .

### 802.11ax (HE20)

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	19.07	19.15	19.91	19.47	349.408	25.43	27.98	Pass
6	2437	21.69	21.76	22.11	21.63	605.64	27.82	27.98	Pass
11	2462	19.16	19.45	20.11	19.46	361.392	25.58	27.98	Pass

**Note:** Directional gain=  $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 8.02\text{dBi} > 6\text{dBi}$ , so the power limit shall be reduced to  $30 - (8.02 - 6) = 27.98\text{dBm}$ .



### 802.11ax (HE40)

Chan.	Frequency (MHz)	Avg. Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	18.48	18.74	18.97	17.97	286.834	24.58	27.98	Pass
6	2437	21.66	21.75	22.38	21.74	618.439	27.91	27.98	Pass
9	2452	20.08	19.93	20.39	19.46	397.964	26.00	27.98	Pass


**Note:** Directional gain=  $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 8.02\text{dBi} > 6\text{dBi}$  , so the power limit shall be reduced to  $30-(8.02-6) = 27.98\text{dBm}$ .

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

- a) Set instrument center frequency to DTS channel center frequency.
  - b) Set span to at least 1.5 times the OBW.
  - c) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
  - d) Set VBW  $\geq 3 \times \text{RBW}$ .
  - e) Detector = power averaging (RMS) or sample detector (when RMS not available).
  - f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
  - g) Sweep time = auto couple.
  - h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
  - i) Use the peak marker function to determine the maximum amplitude level.
- 
- a) Measure the duty cycle (x).
  - b) Set instrument center frequency to DTS channel center frequency.
  - c) Set span to at least 1.5 times the OBW.
  - d) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
  - e) Set VBW  $\geq 3 \times \text{RBW}$ .
  - f) Detector = power averaging (RMS) or sample detector (when RMS not available).
  - g) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
  - h) Sweep time = auto couple.
  - i) Do not use sweep triggering. Allow sweep to "free run".
  - j) Employ trace averaging (RMS) mode over a minimum of 100 traces.
  - k) Use the peak marker function to determine the maximum amplitude level.
  - l) Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as Item 4.3.6

#### 4.5.7 Test Results

##### 802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	-8.67	-8.20	-8.23	-8.63	0.5741	-2.41	5.98	PASS
6	2437	-7.73	-8.15	-8.55	-8.52	0.6026	-2.20	5.98	PASS
11	2462	-8.92	-8.46	-8.35	-8.74	0.5508	-2.59	5.98	PASS

**Note:** 1. Directional gain =  $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 8.02\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8-(8.02-6) = 5.98\text{dBm}$ .

##### 802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	-11.00	-12.28	-11.27	-10.30	0.3069	-5.13	5.98	PASS
6	2437	-10.52	-9.48	-8.63	-9.63	0.44771	-3.49	5.98	PASS
11	2462	-11.30	-11.62	-10.42	-9.74	0.33963	-4.69	5.98	PASS

**Note:** 1. Directional gain =  $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 8.02\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8-(8.02-6) = 5.98\text{dBm}$ .

##### 802.11ax (HE20)


Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Duty Factor (dB)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3					
1	2412	-14.37	-14.99	-13.84	-13.73	0.15	0.1574	-8.03	5.98	PASS
6	2437	-10.45	-10.88	-9.53	-10.30	0.15	0.38994	-4.09	5.98	PASS
11	2462	-15.28	-13.36	-14.29	-14.00	0.15	0.15812	-8.01	5.98	PASS

**Note:** 1. Directional gain =  $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 8.02\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8-(8.02-6) = 5.98\text{dBm}$ .  
 2. Refer to section 3.3 for duty cycle spectrum plot.

### 802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Duty Factor (dB)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3					
3	2422	-17.45	-17.14	-16.56	-16.93	0.19	0.08318	-10.80	5.98	PASS
6	2437	-14.17	-13.49	-13.67	-14.32	0.19	0.17022	-7.69	5.98	PASS
9	2452	-15.19	-15.75	-15.55	-15.41	0.19	0.11858	-9.26	5.98	PASS

- Note:**
1. Directional gain =  $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 8.02\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8 - (8.02 - 6) = 5.98\text{dBm}$ .
  2. Refer to section 3.3 for duty cycle spectrum plot.

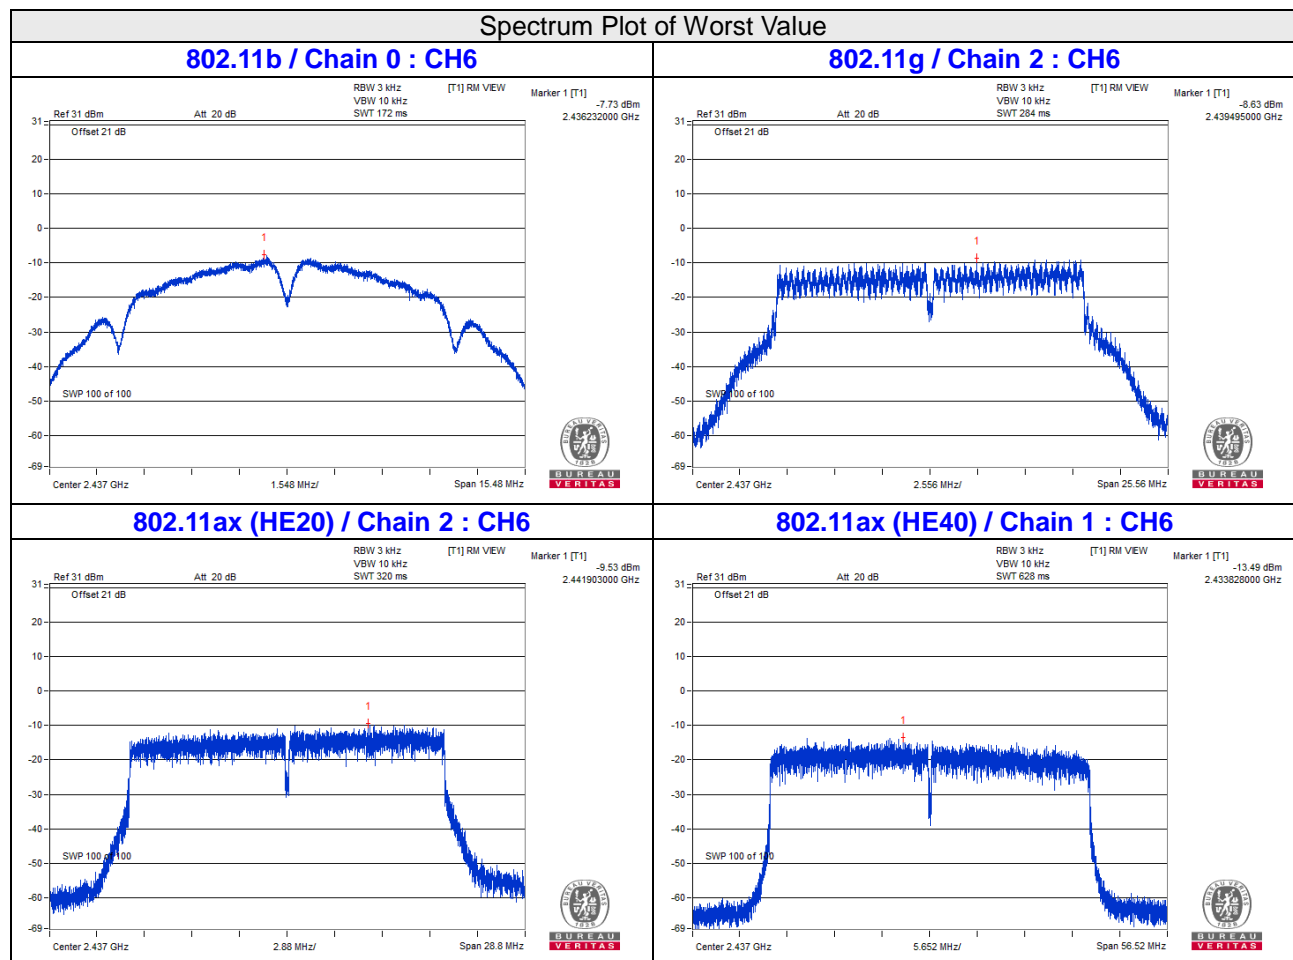


## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.


### 4.6.6 EUT Operating Condition

Same as Item 4.3.6

### 4.6.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b

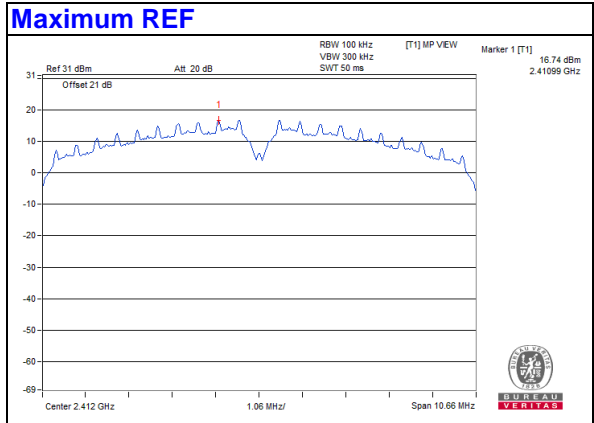


Chain 0


CH 1

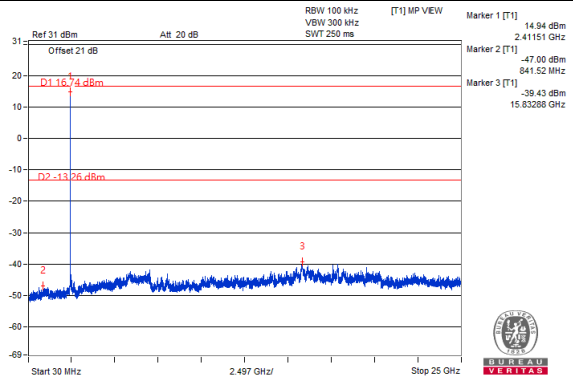


CH 6

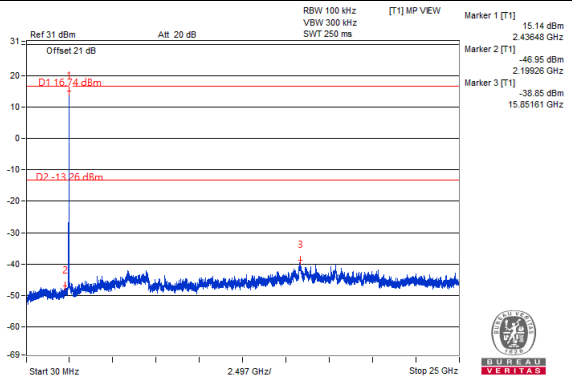


CH 11

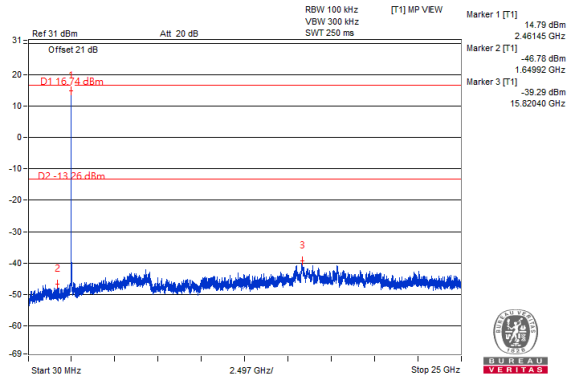

CH 1 Band edge

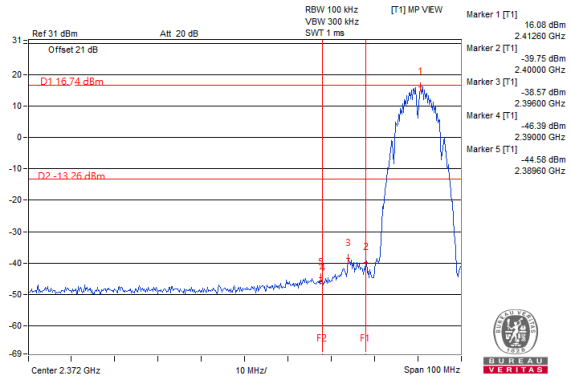


CH 11 Band edge

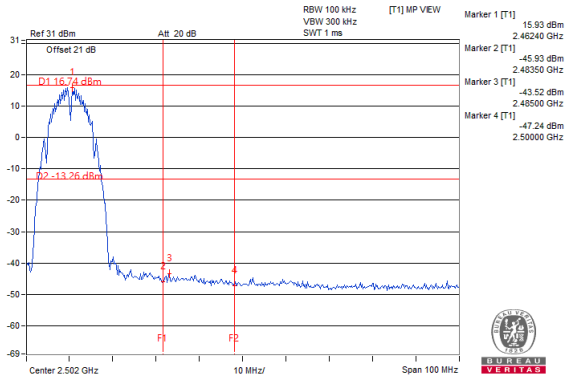


### Chain 1



#### CH 1

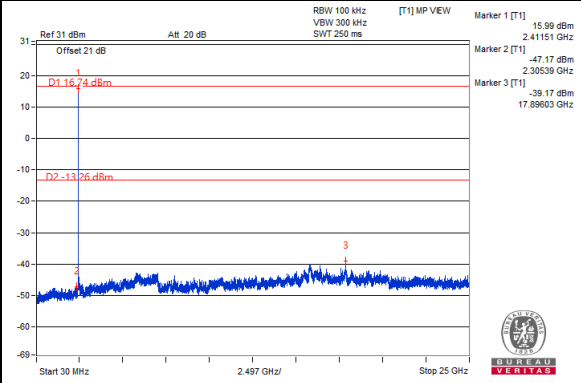


#### CH 6

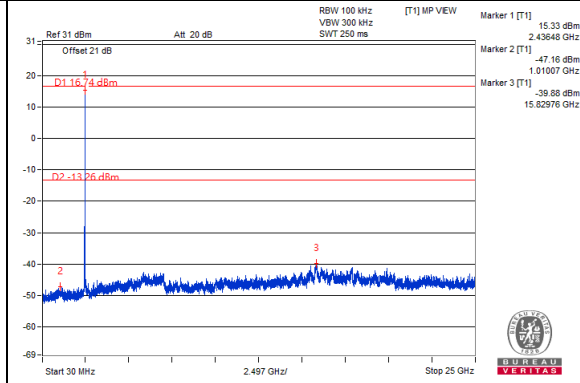


#### CH 11

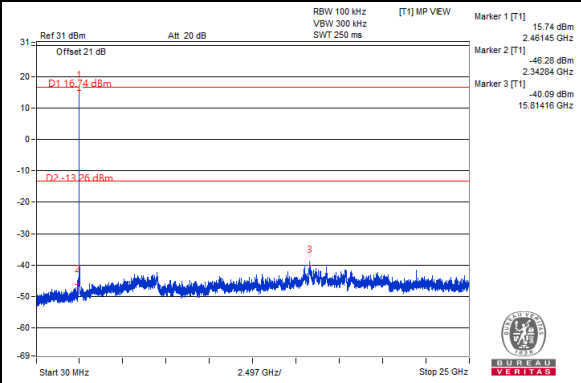

#### CH 1 Band edge

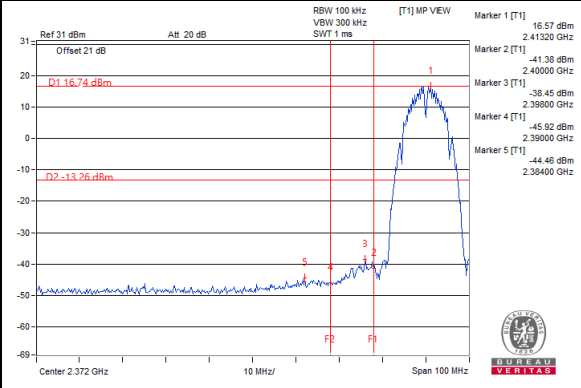


#### CH 11 Band edge

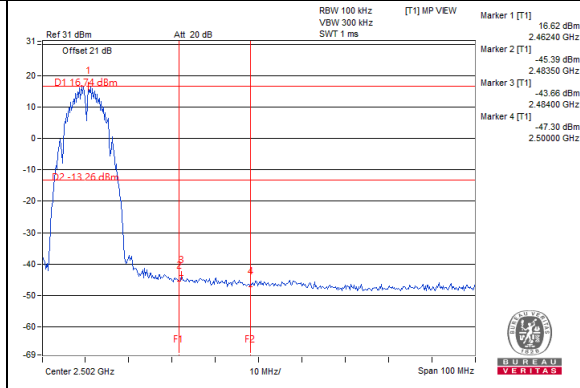


## Chain 2


### CH 1

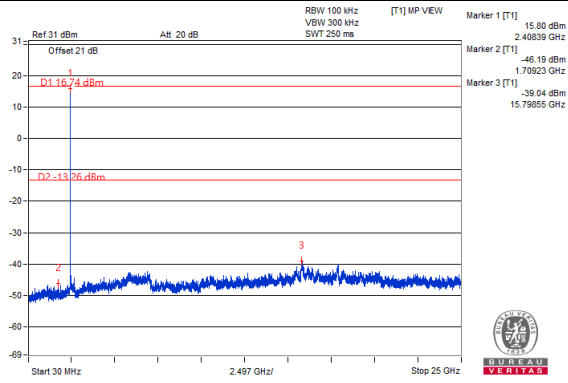

### CH 6

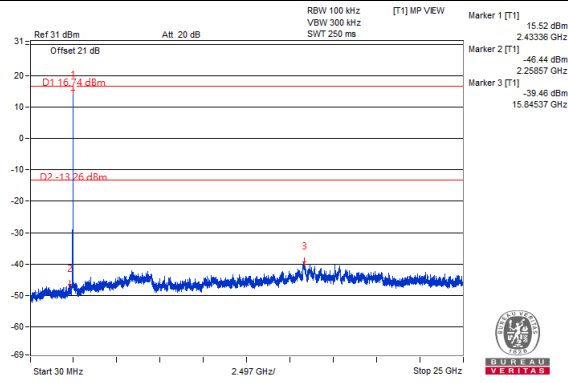


### CH 11

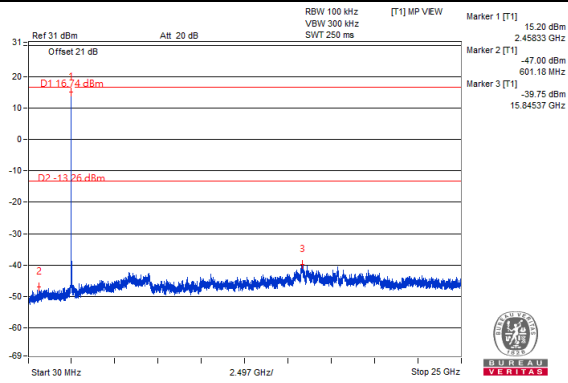


### CH 11 Band edge



### CH 1 Band edge

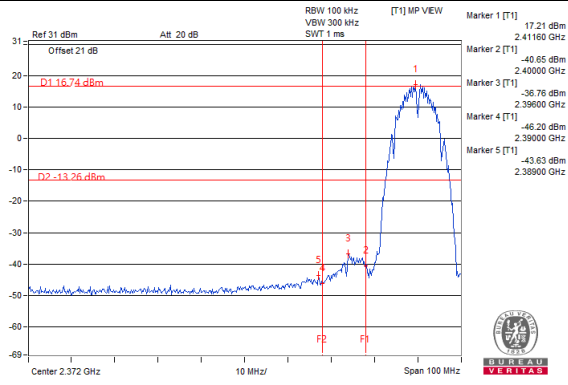


### CH 11 Band edge

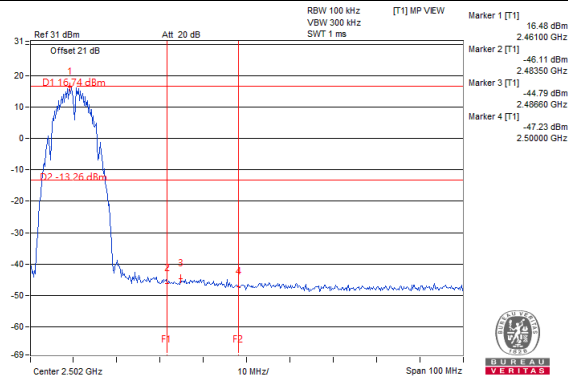




### Chain 3



#### CH 1

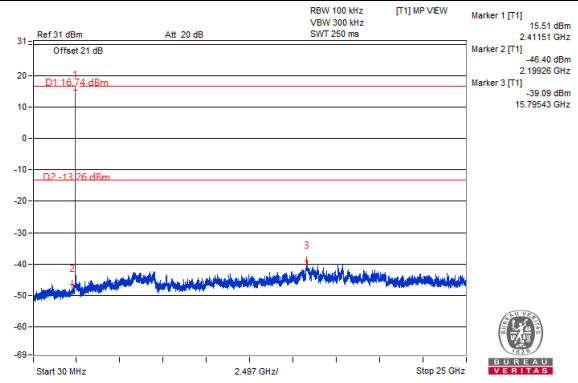


#### CH 6

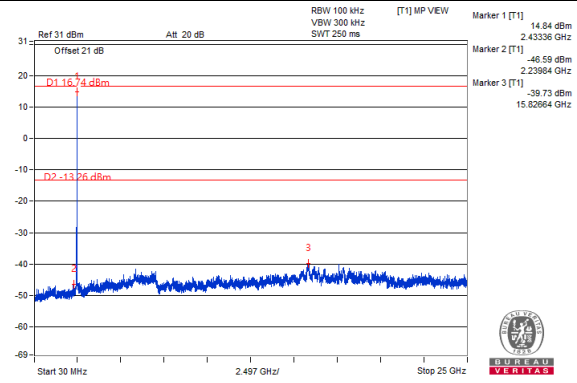


#### CH 11

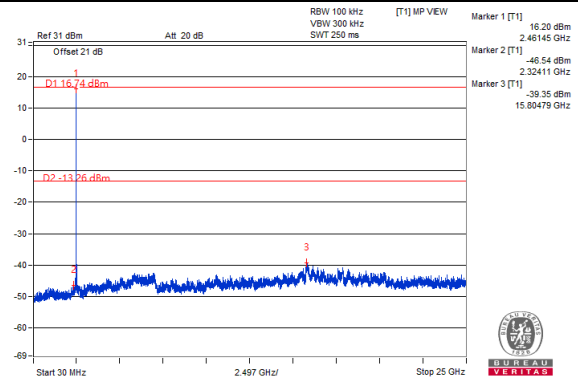


#### CH 1 Band edge

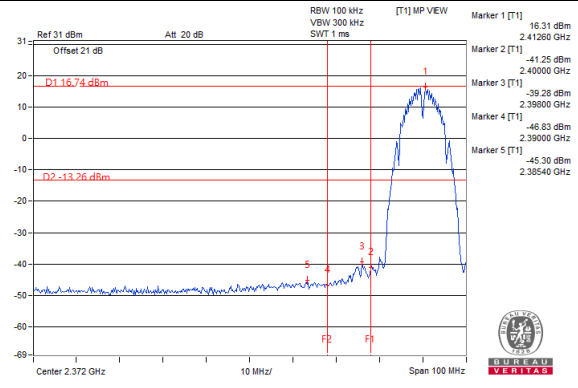

#### CH 11 Band edge

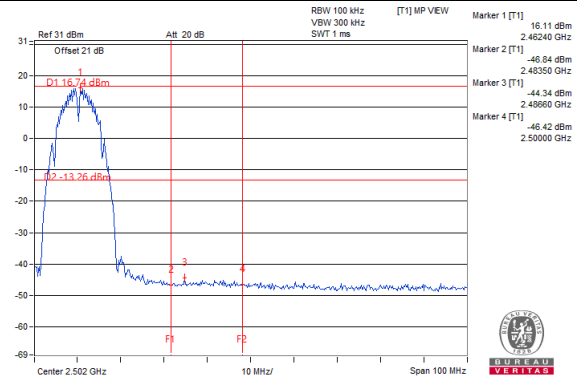


802.11g

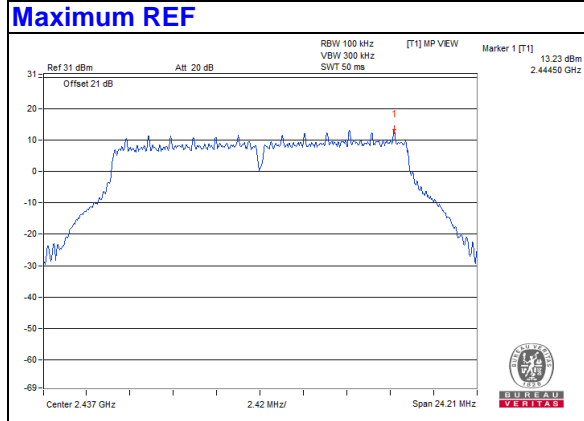


Chain 0


CH 1

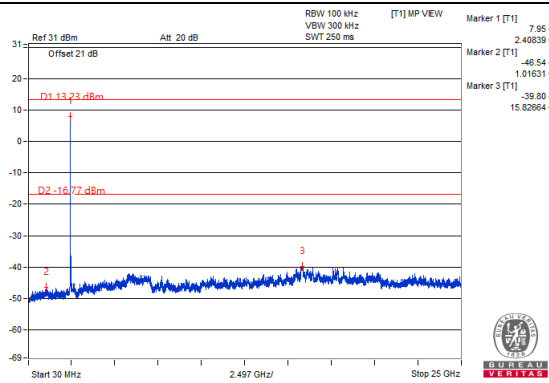


CH 6

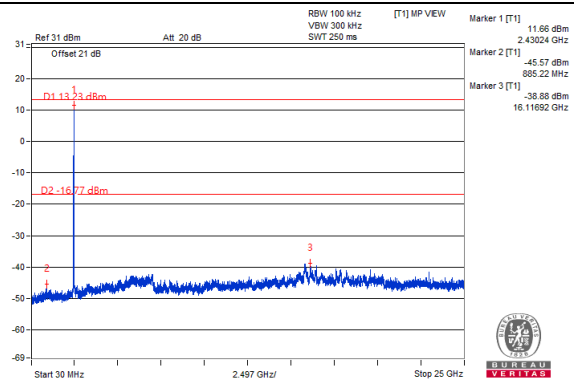


CH 11

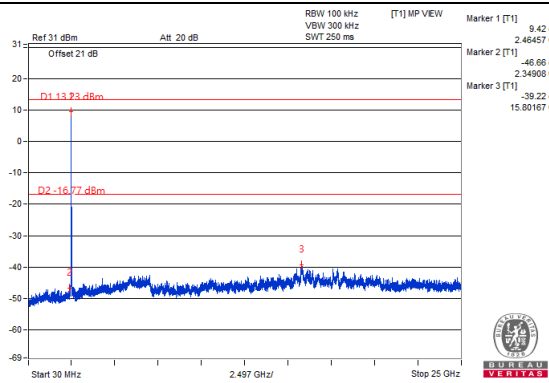







CH 1 Band edge

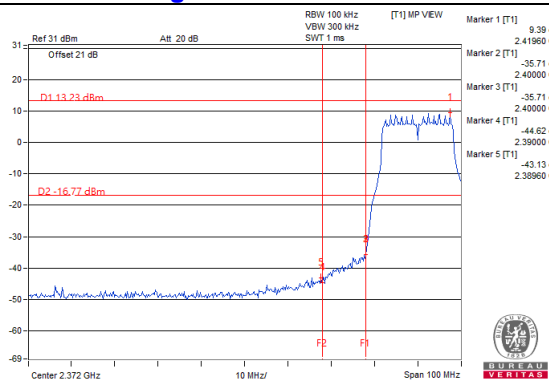

CH 11 Band edge

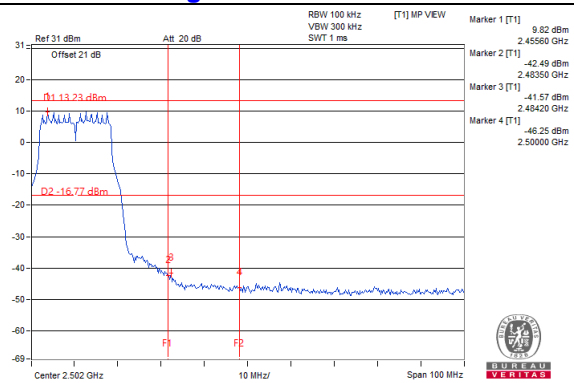


### Chain 1

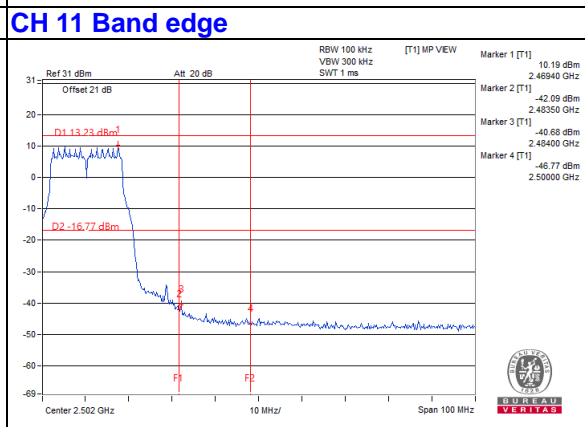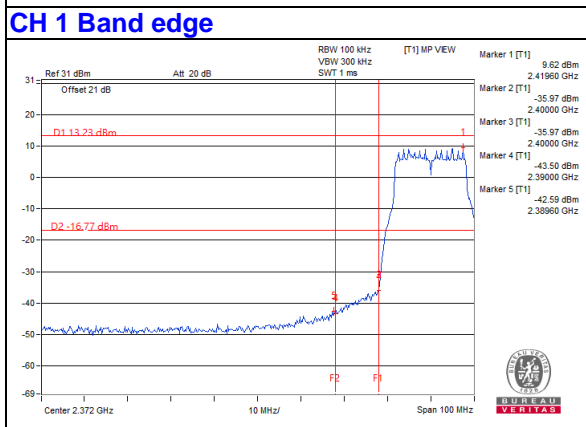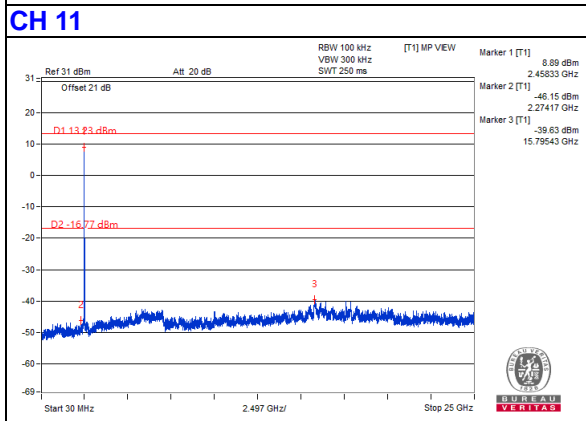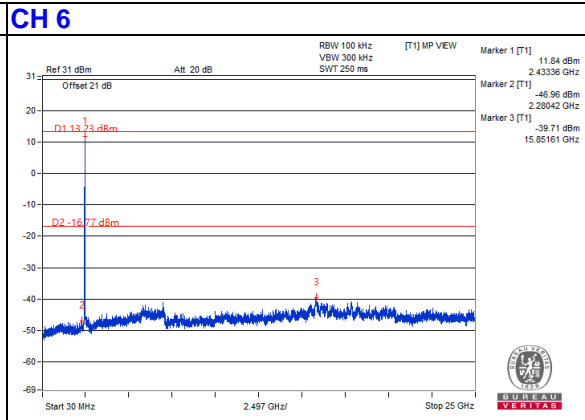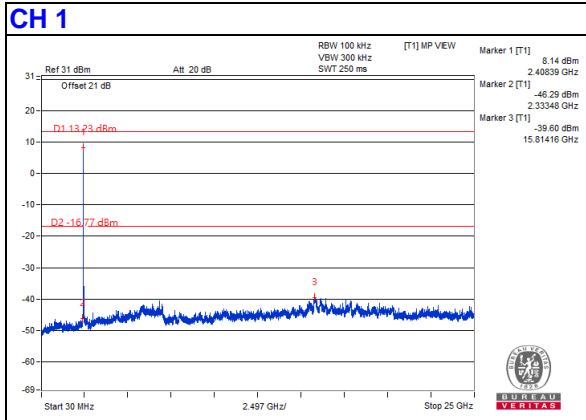


## Chain 2



### CH 1

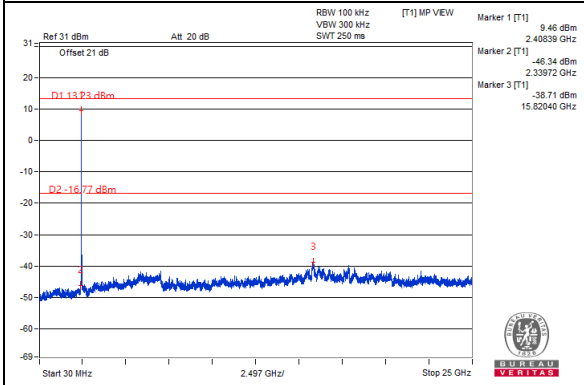


### CH 6

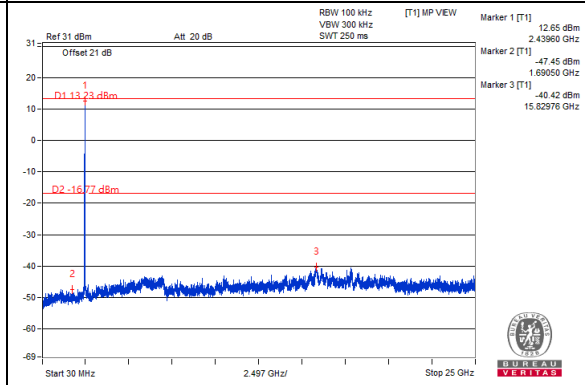


### CH 11

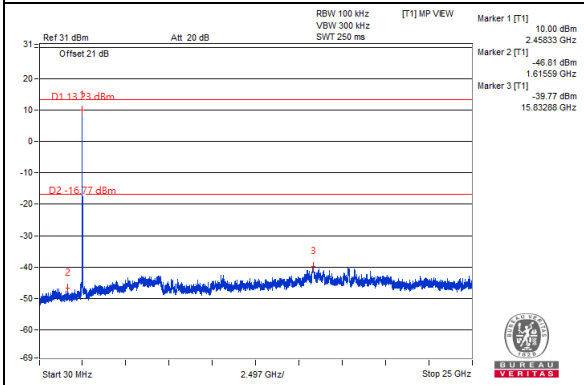

### CH 1 Band edge

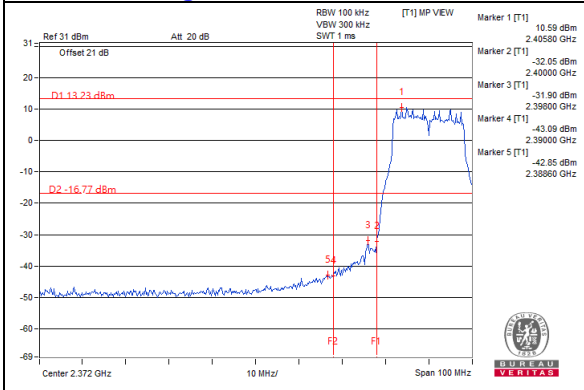


### CH 11 Band edge

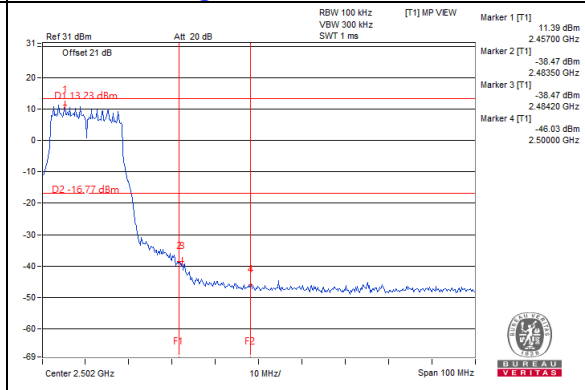


### Chain 3



#### CH 1

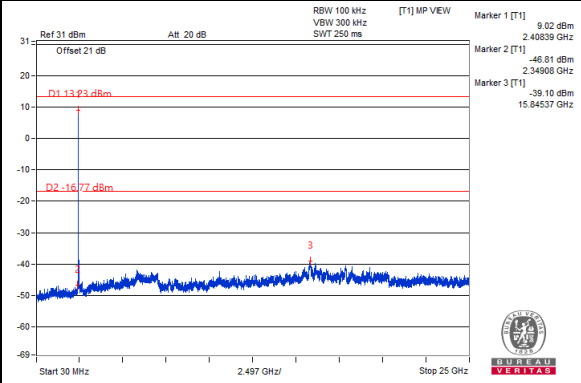


#### CH 6

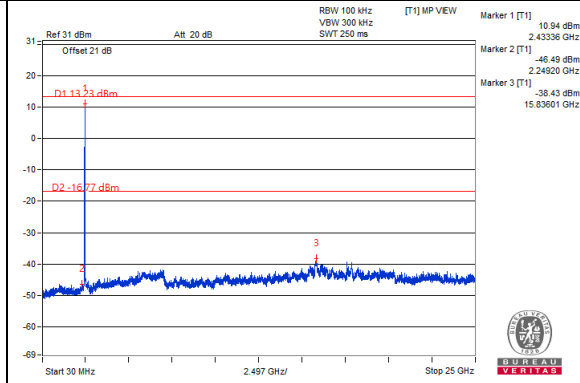


#### CH 11

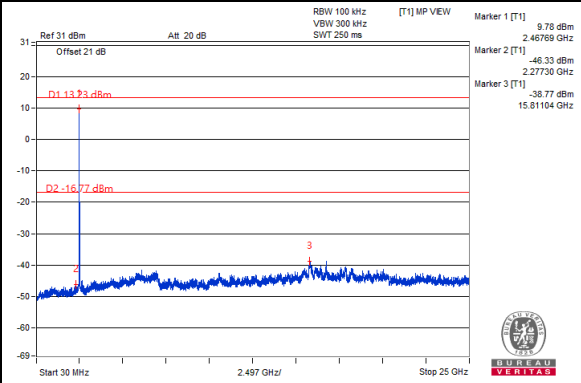


#### CH 1 Band edge

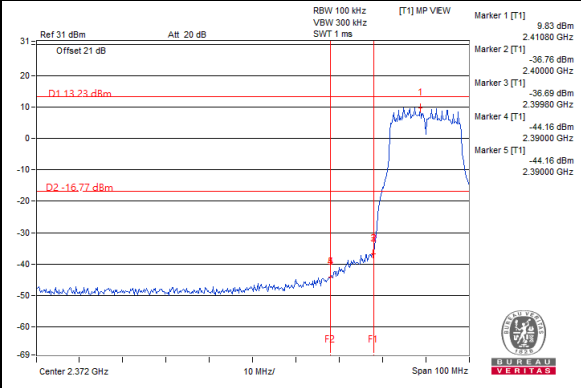

#### CH 11 Band edge

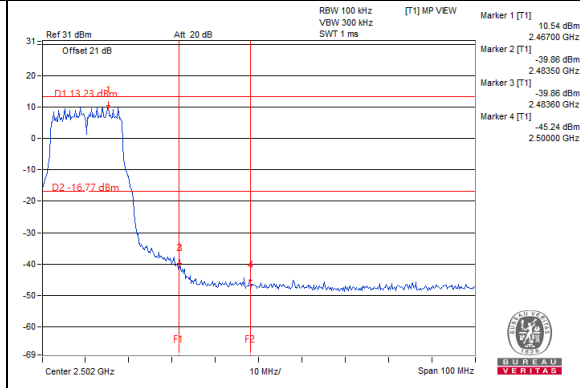


# 802.11ax (HE20)

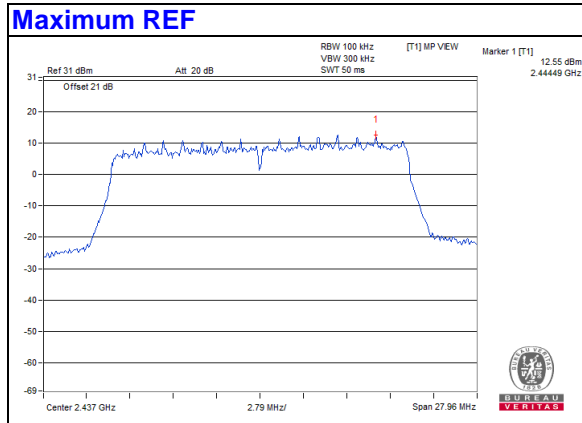


## Chain 0


### CH 1

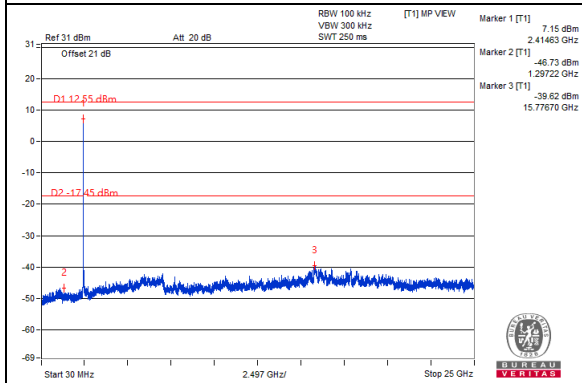

### CH 6

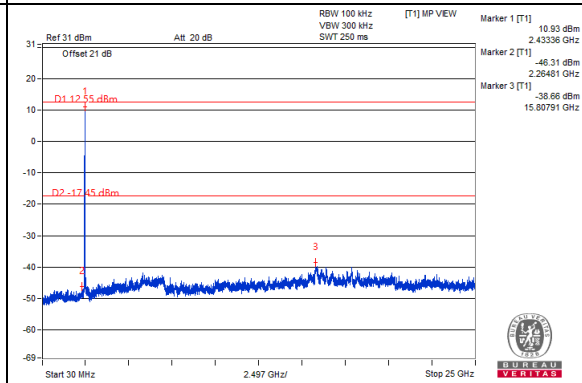


### CH 11

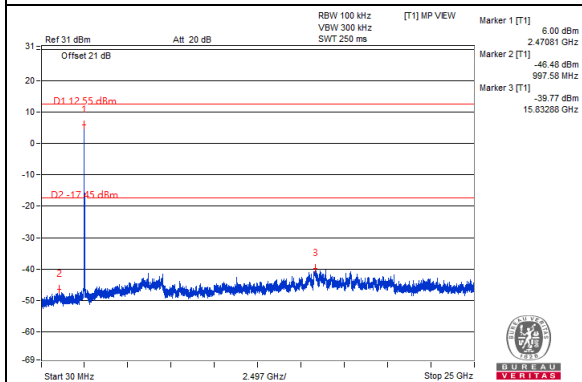


### CH 11 Band edge



### CH 1 Band edge

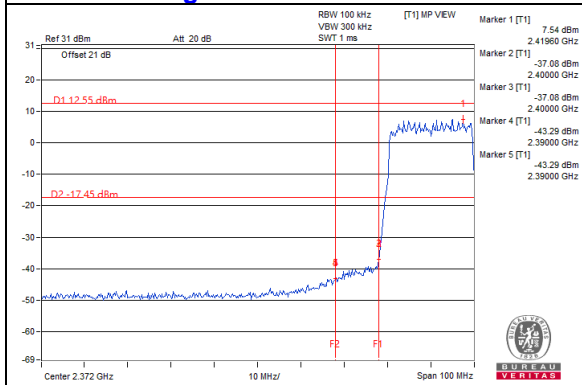


### CH 11 Band edge

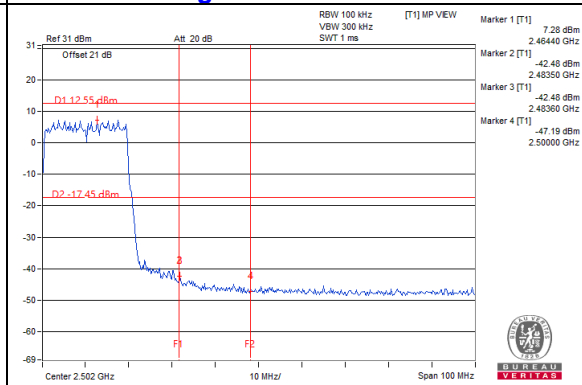


Chain 1



CH 1

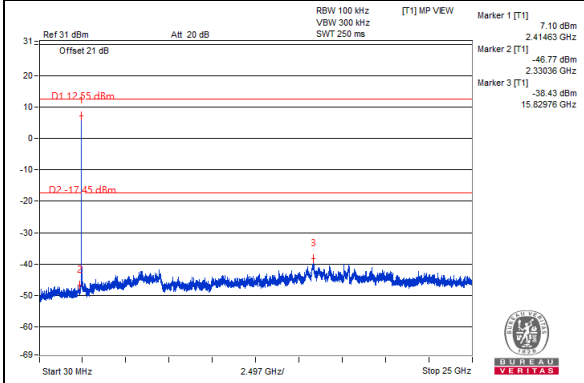


CH 6

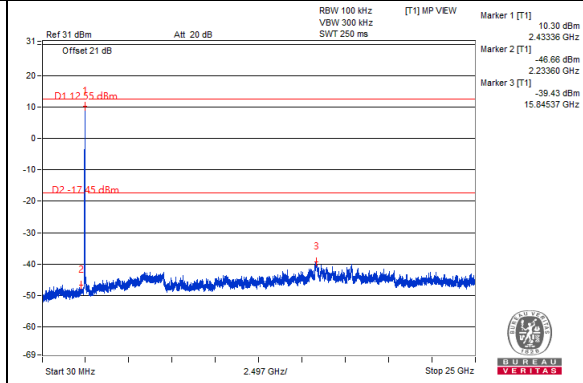


CH 11

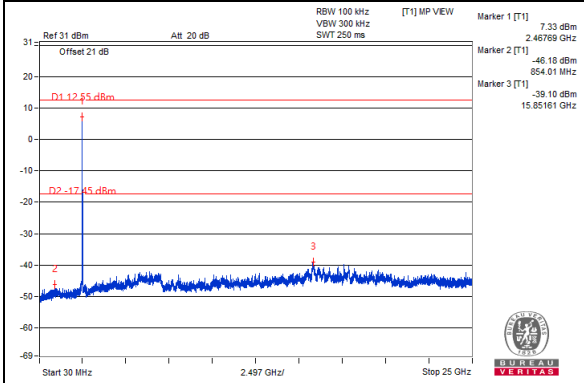

CH 1 Band edge

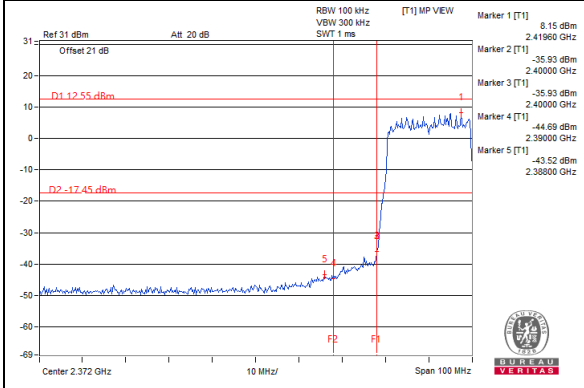


CH 11 Band edge

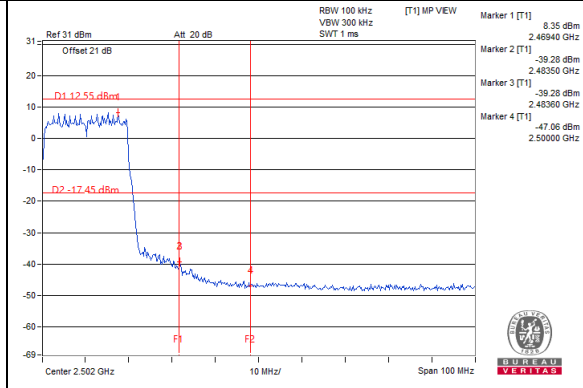


## Chain 2



### CH 1

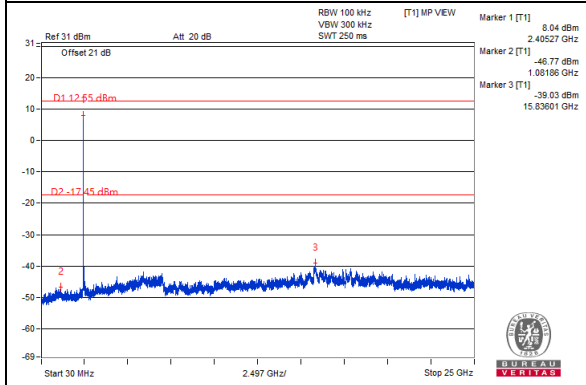


### CH 6

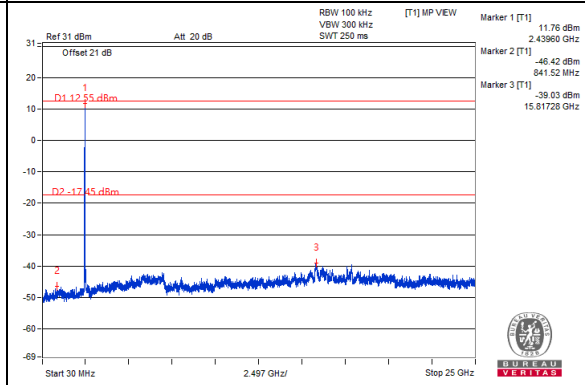


### CH 11

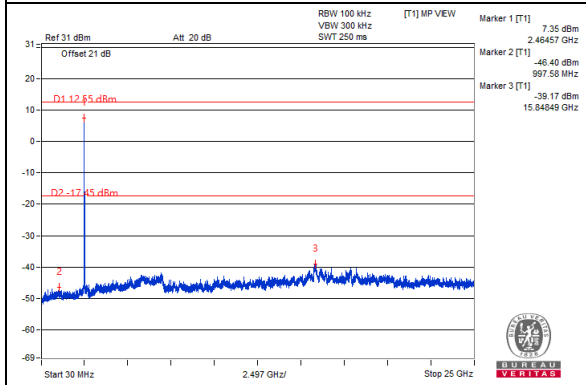

### CH 1 Band edge

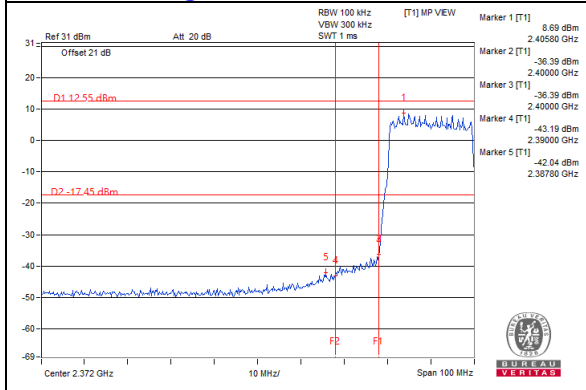


### CH 11 Band edge

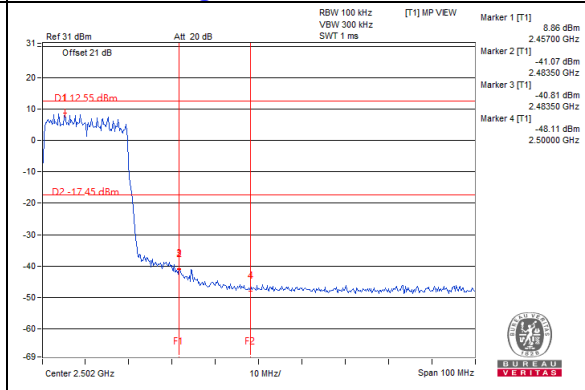




### Chain 3



#### CH 1

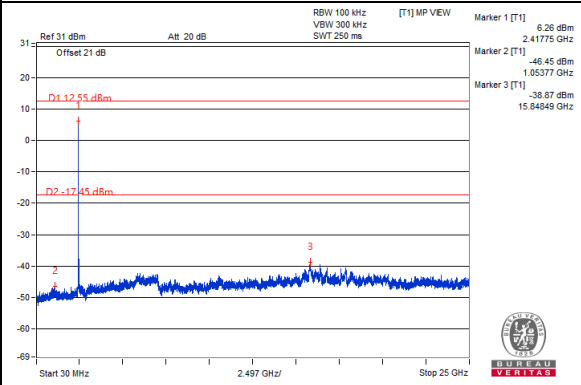


#### CH 6

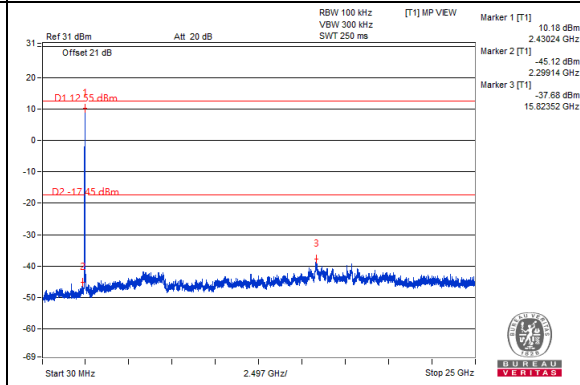


#### CH 11

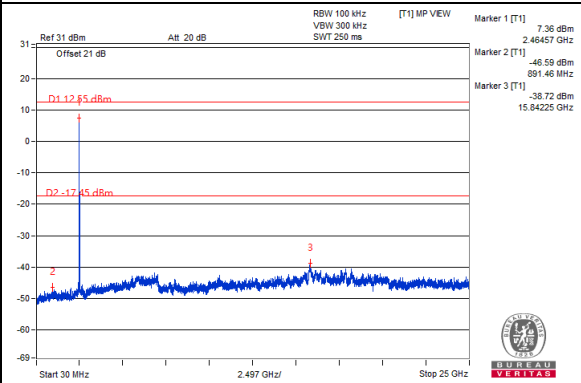


#### CH 1 Band edge

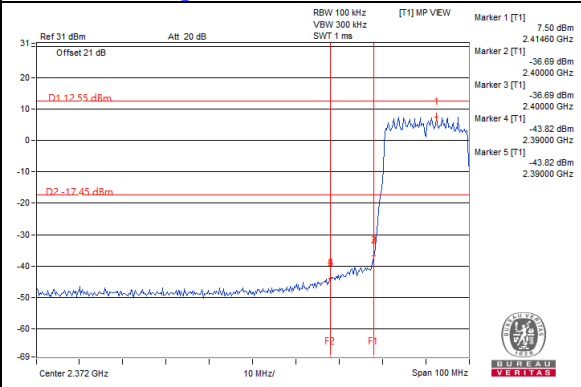

#### CH 11 Band edge

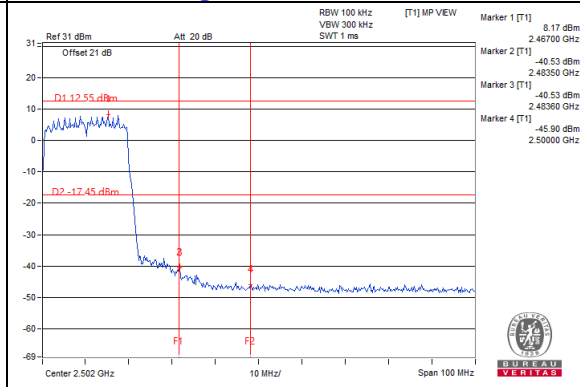


# 802.11ax (HE40)

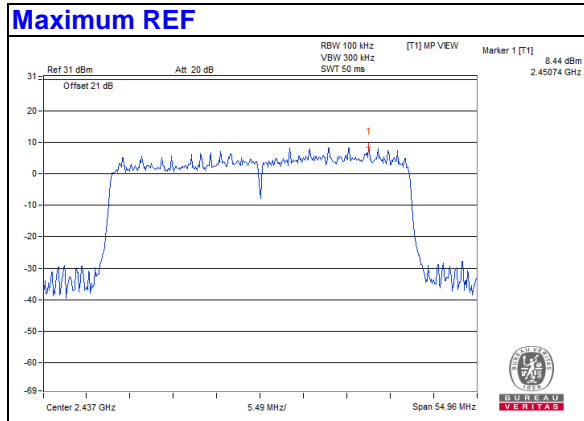


## Chain 0


### CH 3

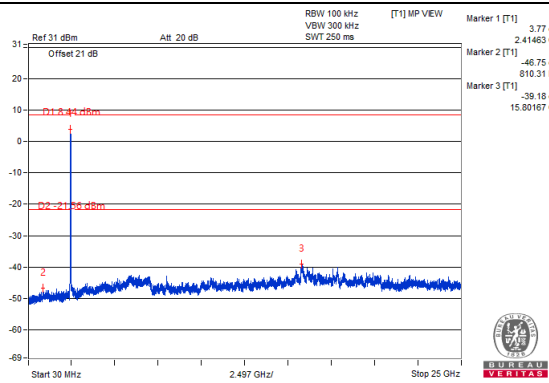


### CH 6

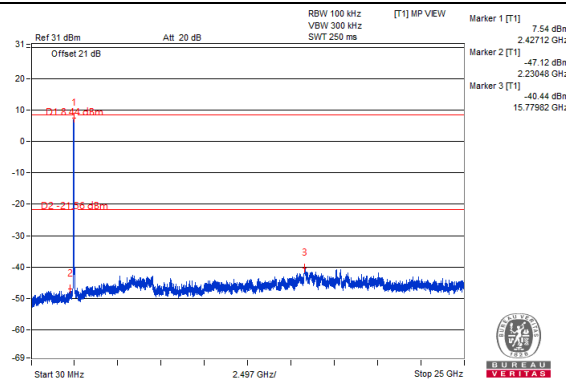


### CH 9

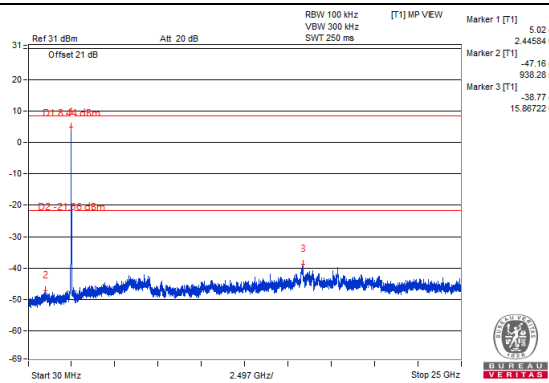







### CH 3 Band edge

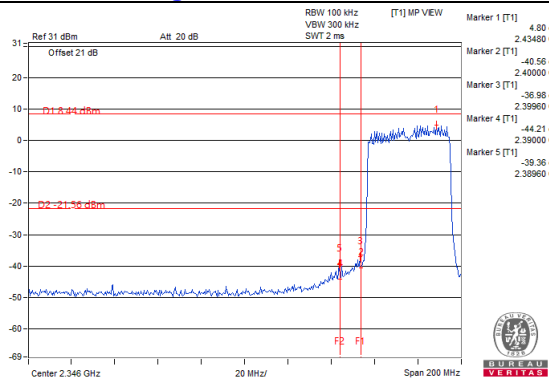

### CH 9 Band edge

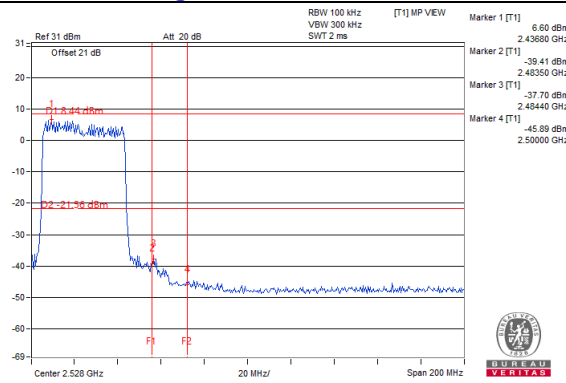


### Chain 1

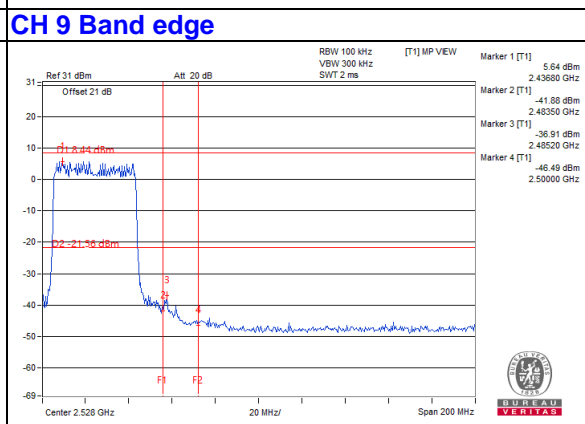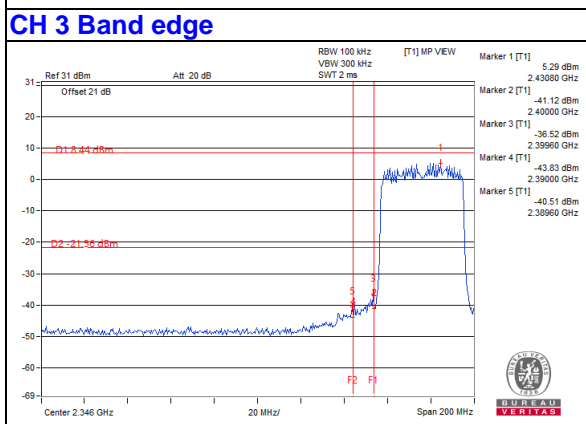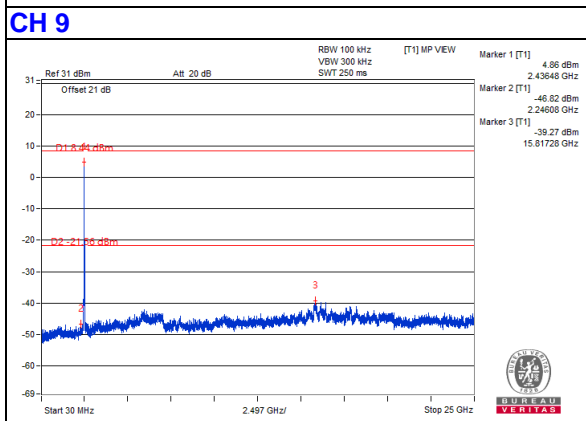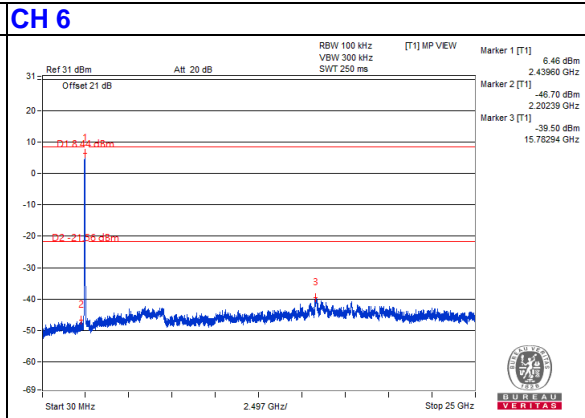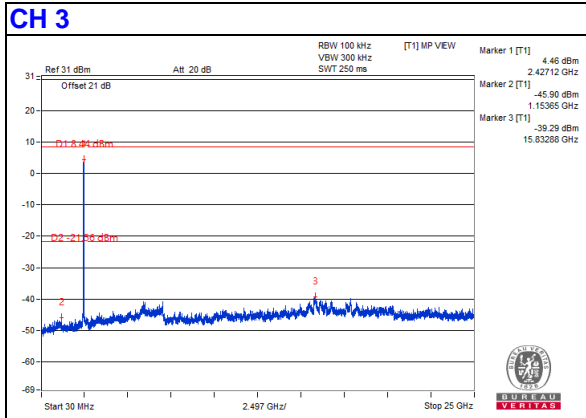


## Chain 2



### CH 3

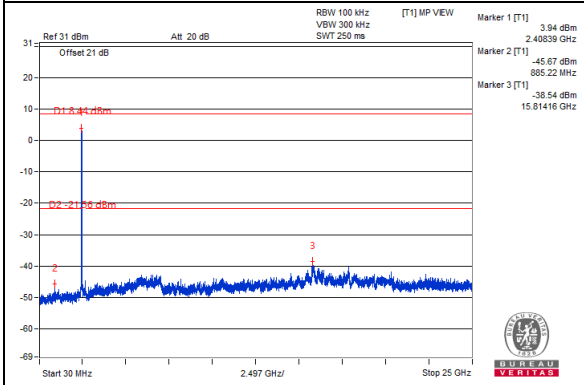


### CH 6

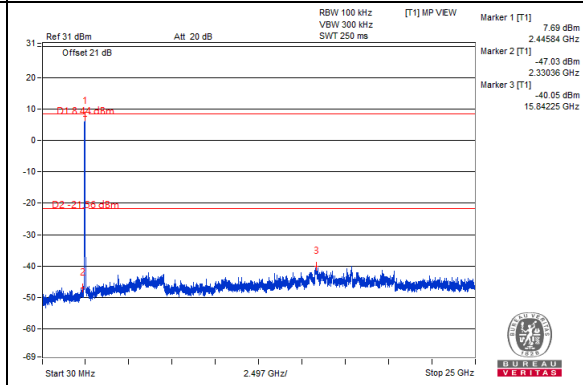


### CH 9

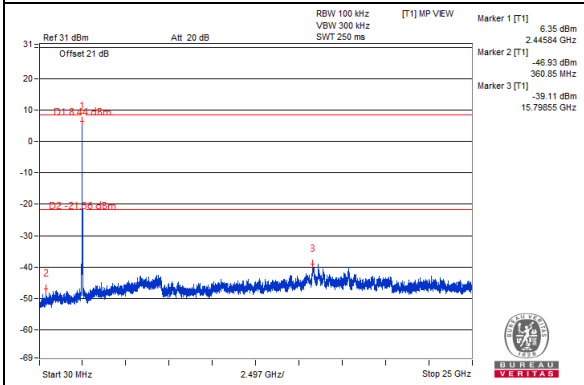

### CH 3 Band edge

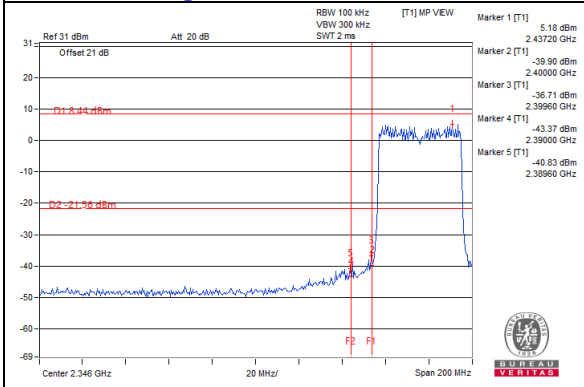


### CH 9 Band edge

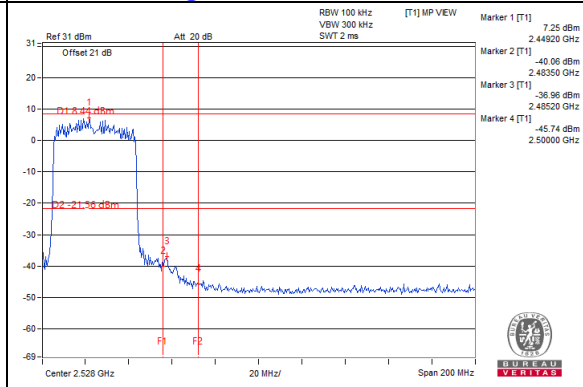


### Chain 3


#### CH 3

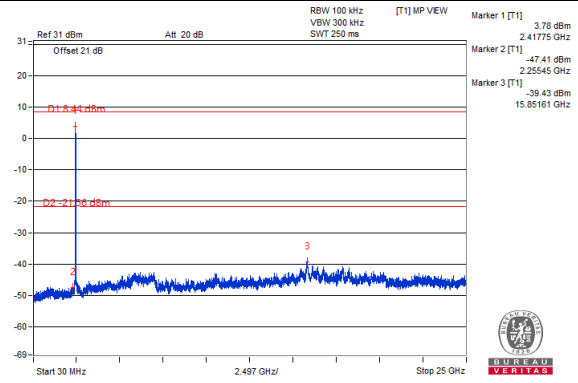

#### CH 6

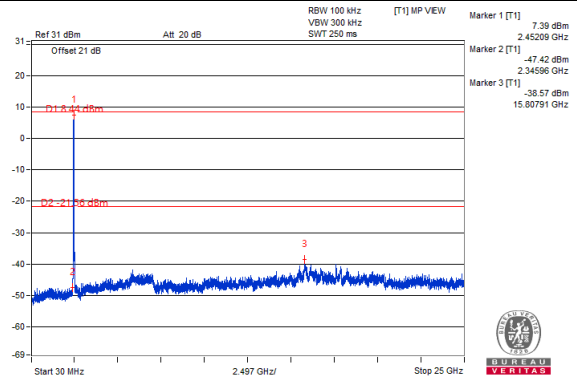


#### CH 9

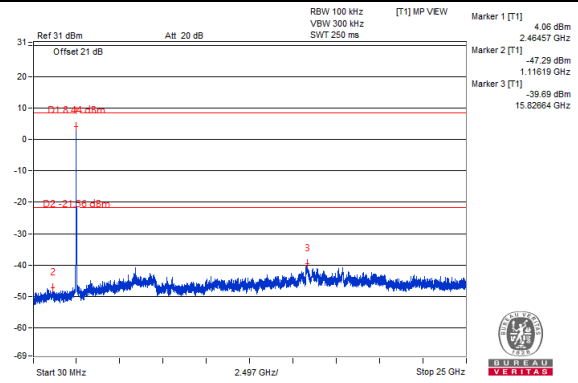


#### CH 9



#### CH 3 Band edge

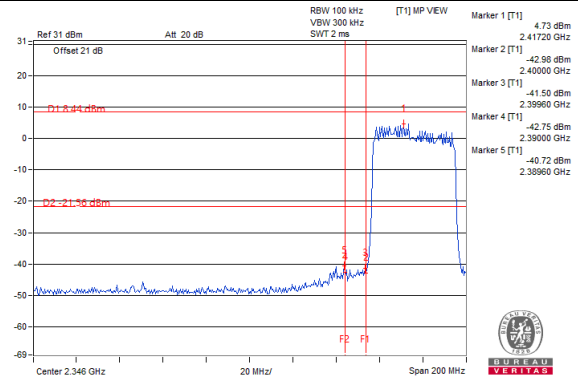

#### CH 9 Band edge

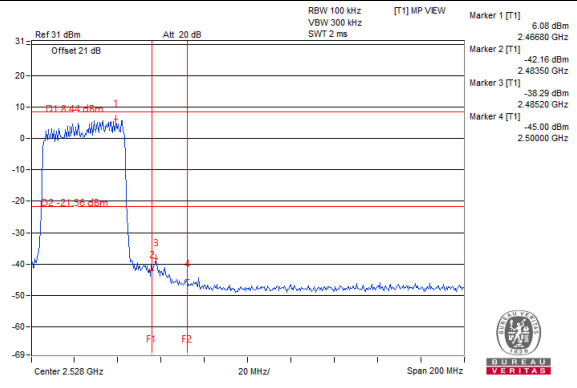


## 5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

# Annex A - Band-Edge Measurement

## 802.11b

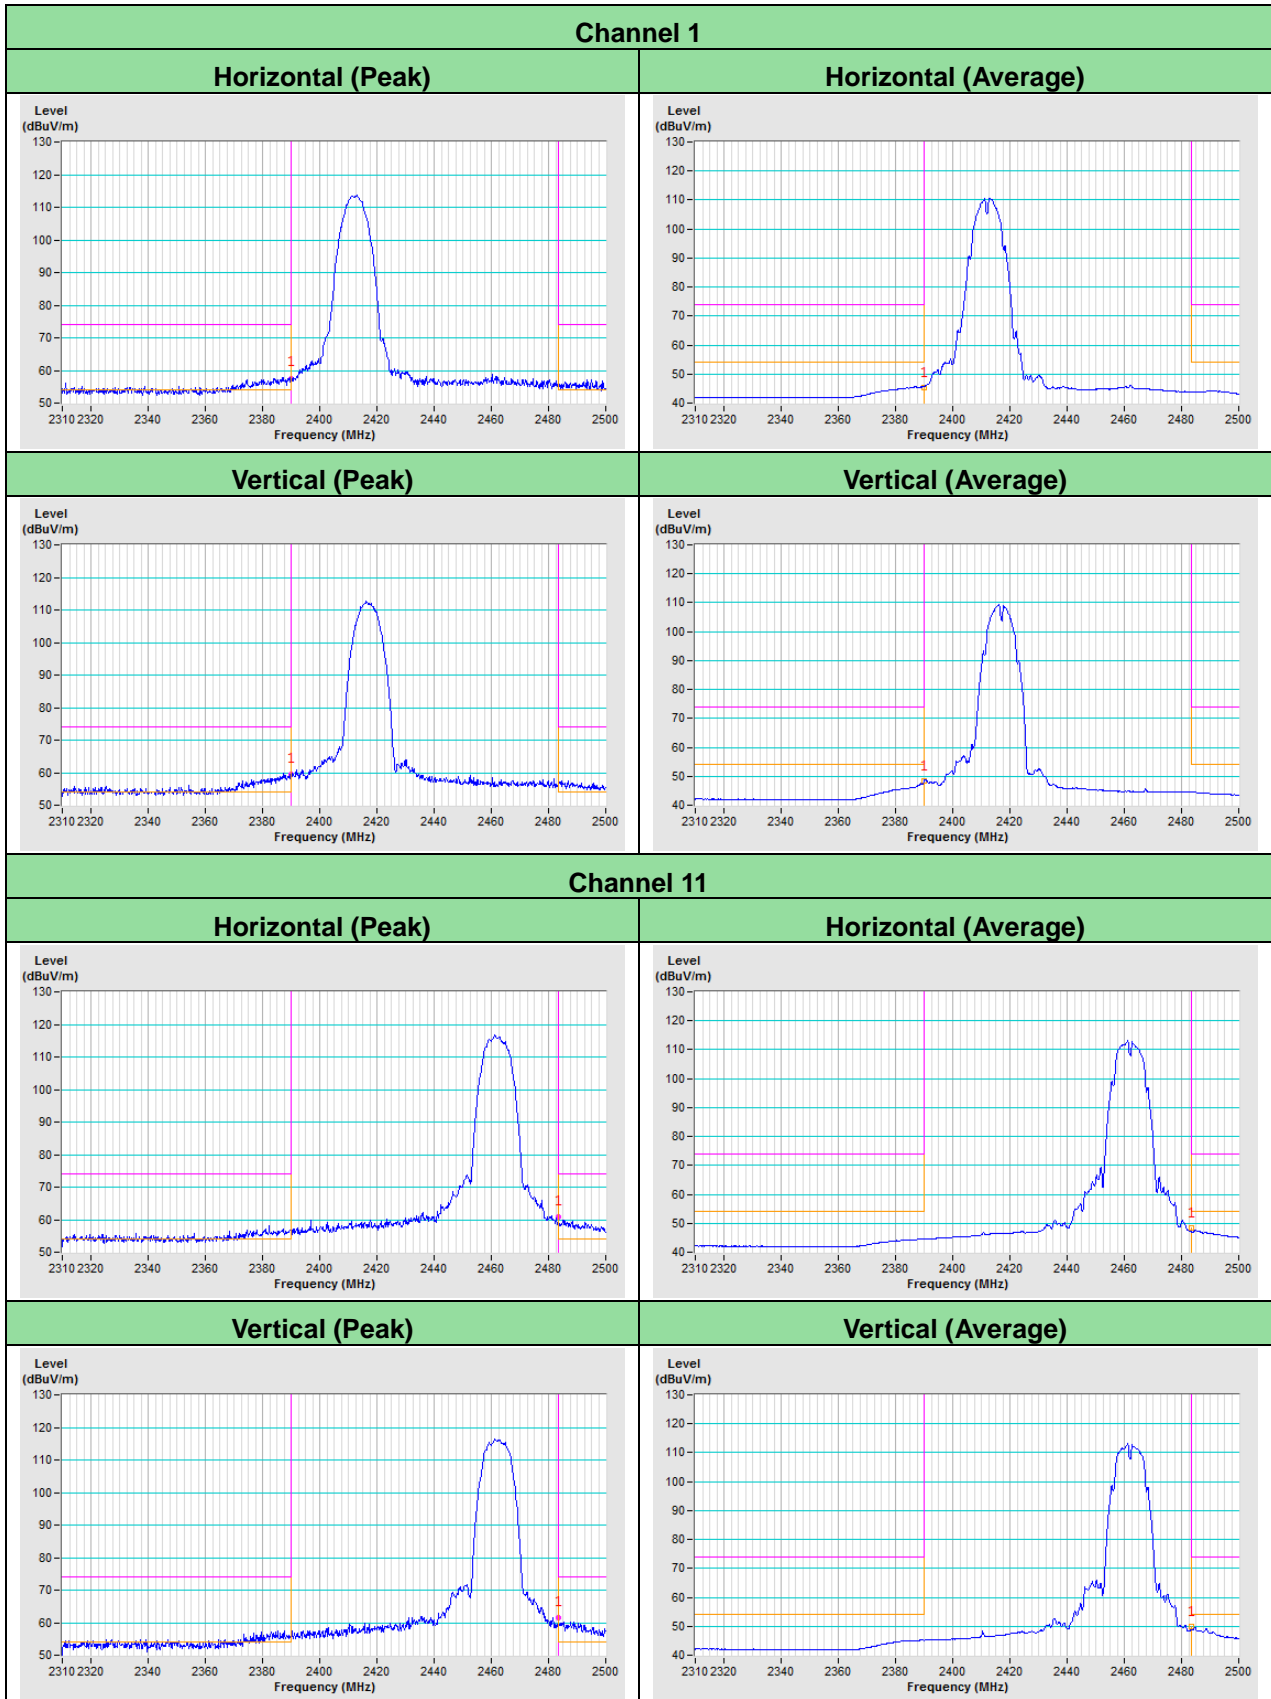


802.11g

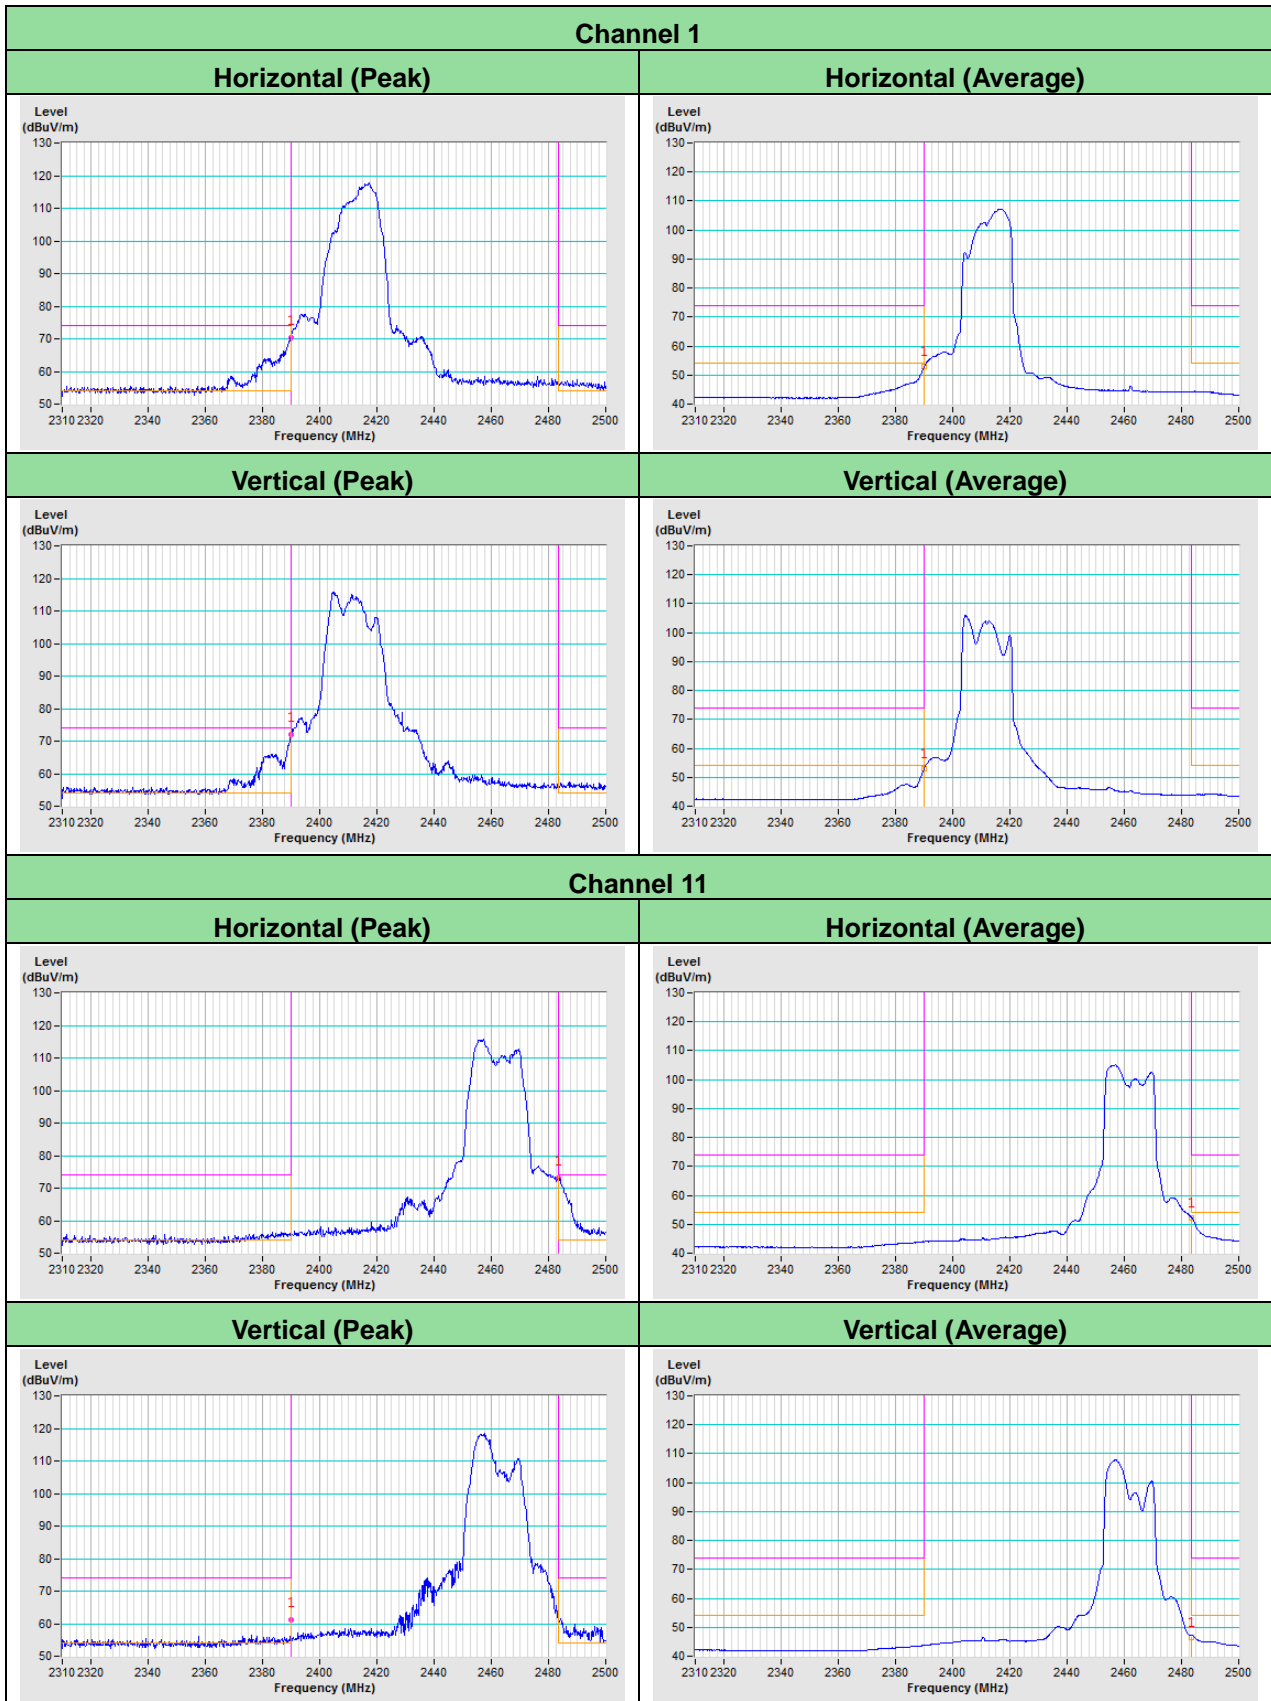




### 802.11ax (HE20)

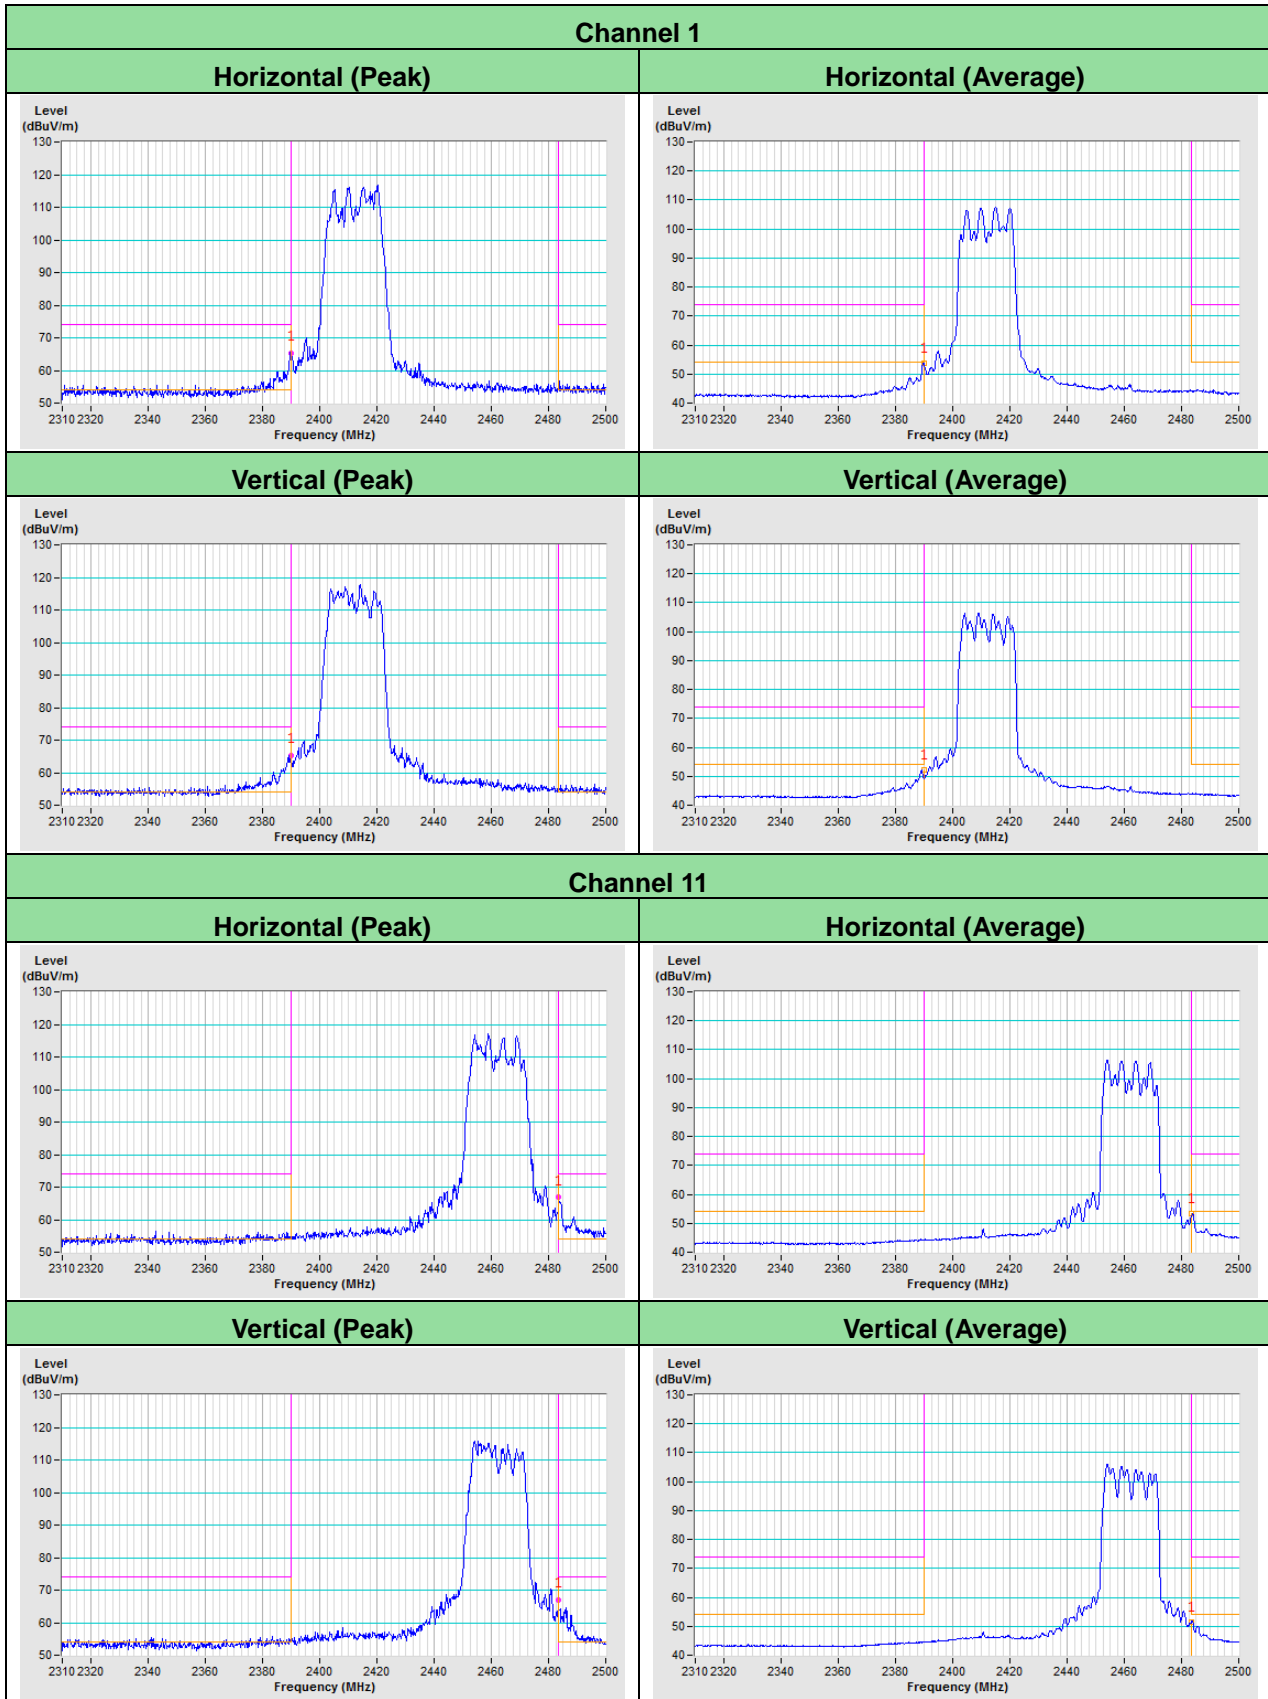

802.11ax (HE40)

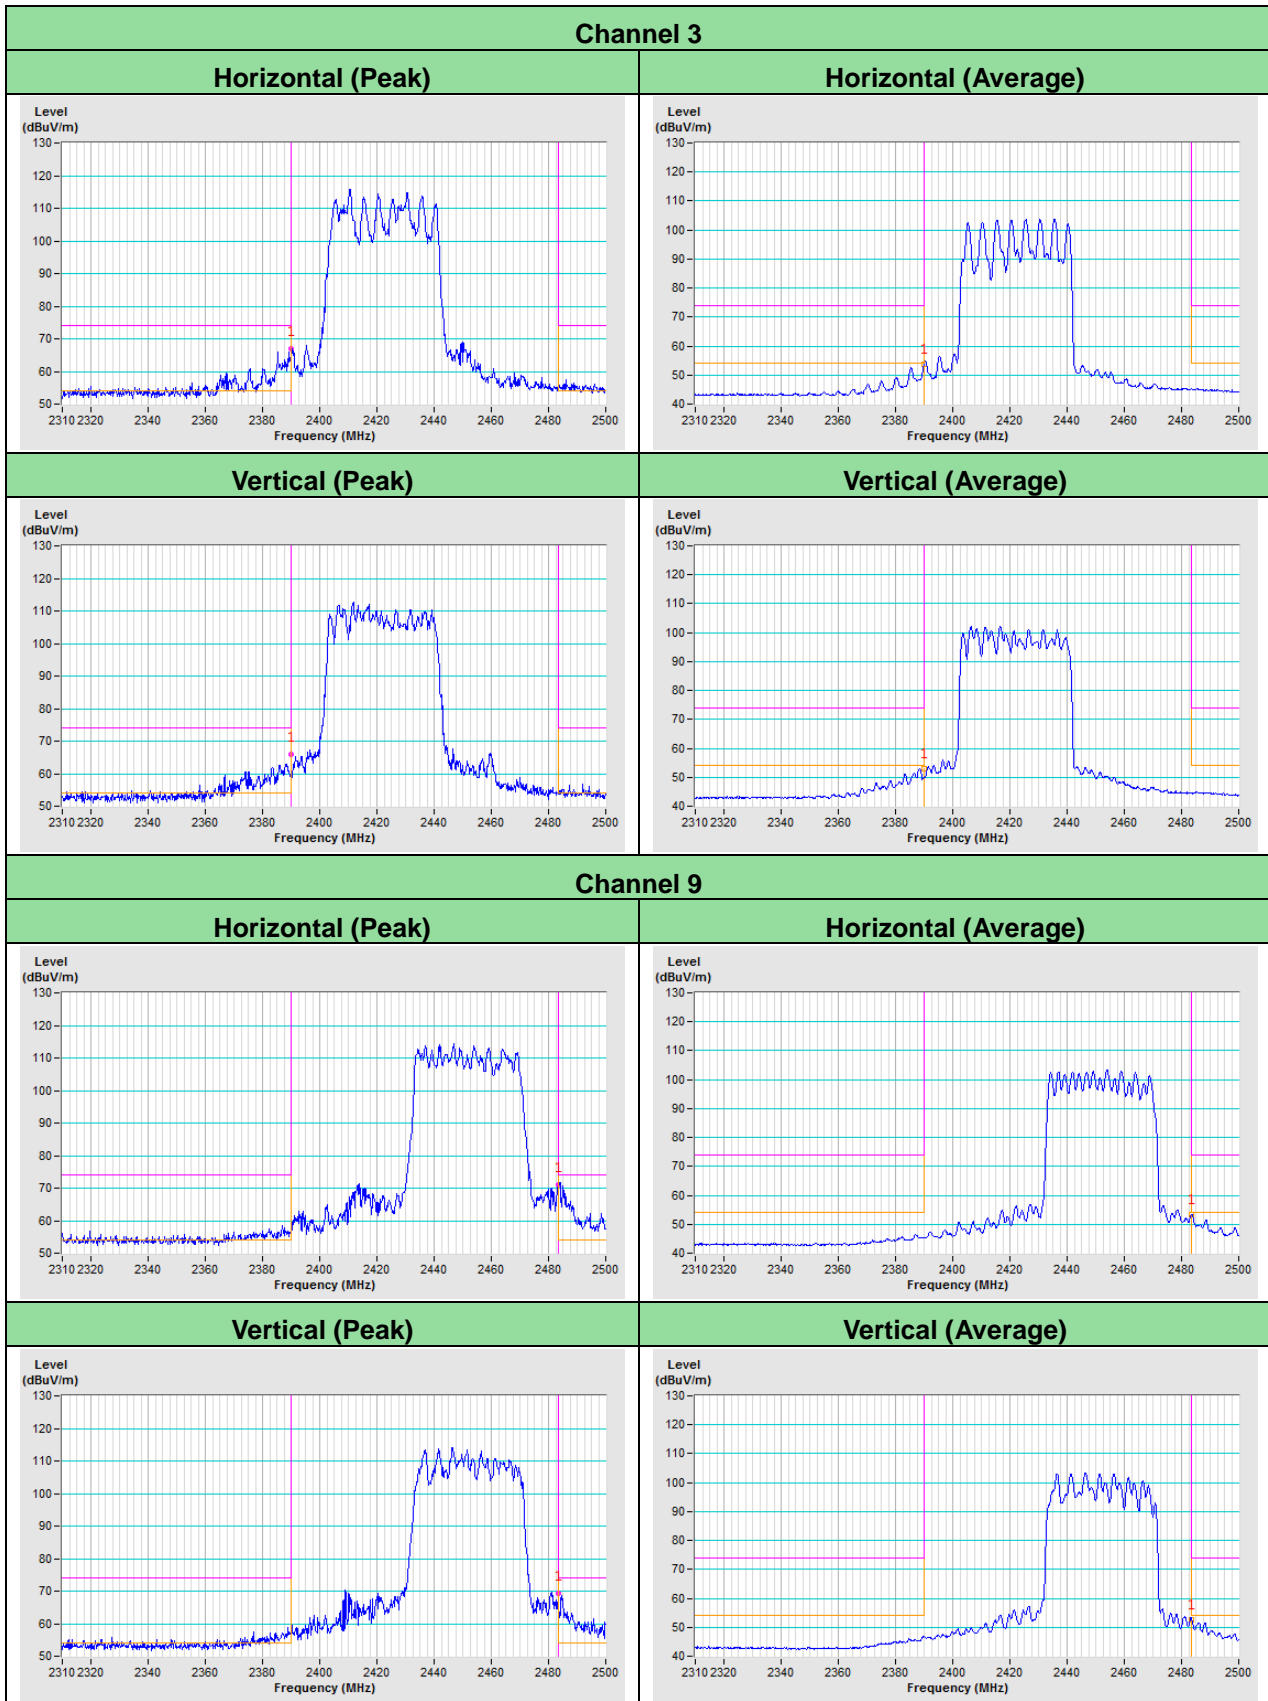

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---