

客戶名稱 : **ASUSTEK**
CUSTOMER

Document No.: ENS000196230

Approval Sheet Rev.: A1

Spec. Rev. : A1

承認書

APPROVAL SHEET

產品品名/Product Model No. : **WA-C2-LA-00-003**

客戶料號/Customer No. : **14008-05860200**

專案名稱/Project Name: **GUSTO**

發行日期/ Issue Date : **2024/10/17**

承認日期/ Approved Date :

Approved by customer: (signing or stamping here)



Embedded Single-Band Antenna for WA-C2-LA-00-003


1. Explanation of part number :

WA	C2	LA	00	003
(1)	(2)	(3)	(4)	(5)

- (1) Product type : Wireless Antenna
- (2) Material : Combo-Holder+FPCB+Chip
- (3) Frequency : 2.4G
- (4) Coaxial Cable Color : No Coaxial Cable
- (5) Suffix : 003

2. Mechanical Specification :

The appearance of the antenna is according to drawing Figure 2-1-1.

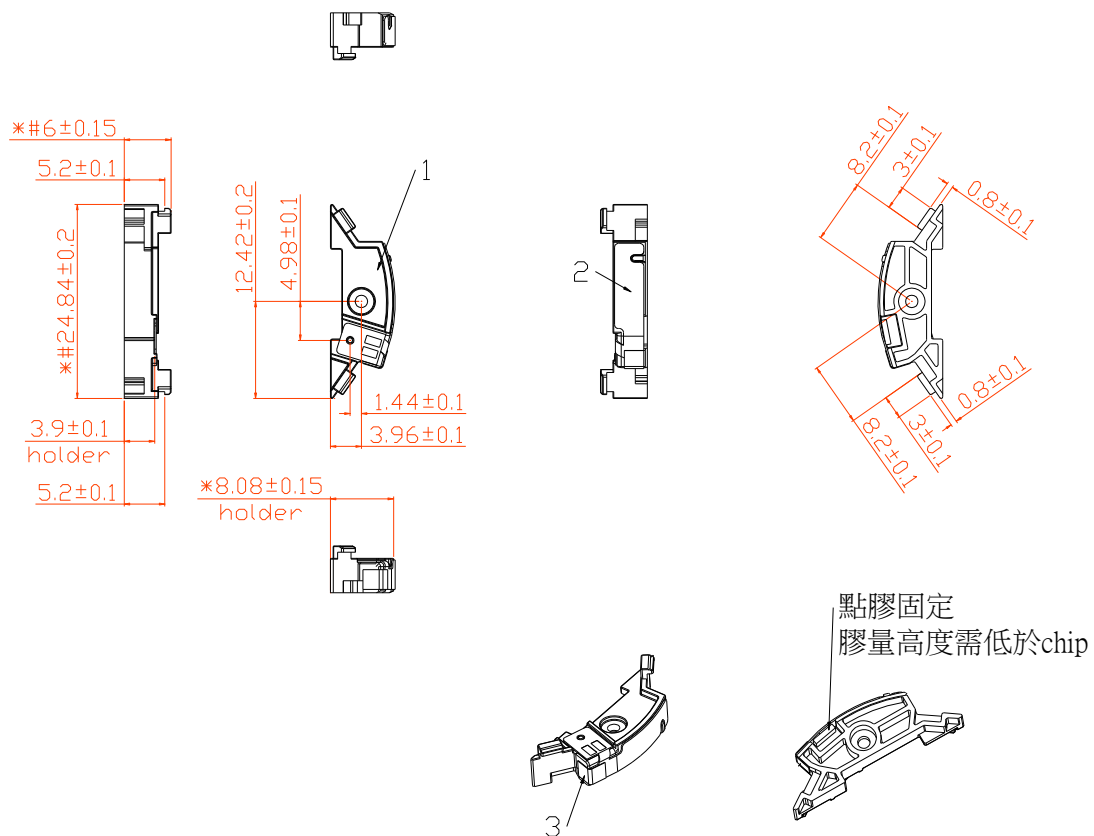

UNLESS OTHER SPECIFIED TOLERANCES ON :
 X=N/A X.X=N/A X.XX=N/A
 ANGLES=N/A HOLEDIA=N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 周敬晨

CHECKED BY : 鄭榮謀

DESIGNED BY : 洪賢修

APPROVED BY : 謝立庭

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : Embedded Single-Band Antenna for
 WA-C2-LA-00-003


DOCUMENT
 NO.

ENS000196230

SPEC REV.
 A1

NOTE:


1. 工程圖上*為重點尺寸標註指示
Mark * are the key dimensions.
2. 工程圖上#為Cpk量測尺寸標註指示
Mark # are CPK dimensions.

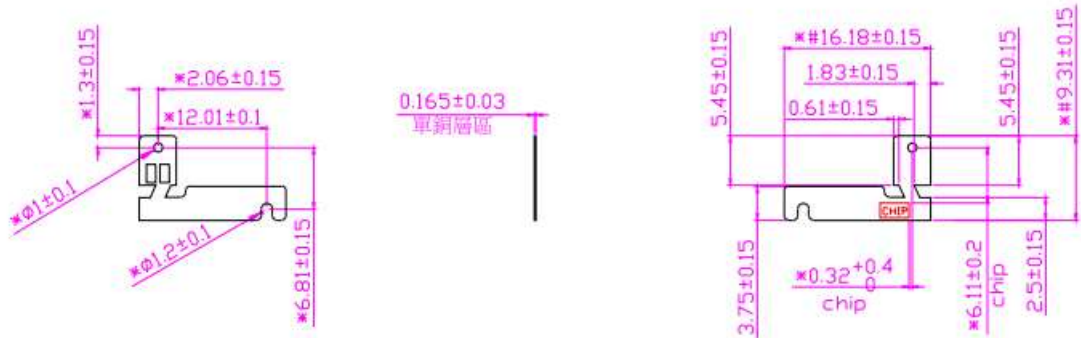

REV.A1

Figure 2-1-1 The antenna drawing

ITEM	DESCRIPTION	MATERIAL SPECIFICATION	QUANTITY	UNIT	SUPPLIER	UL NO.
1	Holder	材質:FR450 尺寸: 24.84x8.08x6	1	PCS	HA0017	E335478
2	FPCB+Chip	FPCB,T0.15mm,18.58x9.31mm Chip,ACA-3216-A2-MC-S	1	PCS	HA0081	E216543
3	Acetate tape	5x2.5x0.08mm	1	PCS	HA0026	N/A

UNLESS OTHER SPECIFIED TOLERANCES ON : X=N/A X.X=N/A X.XX=N/A ANGLES=N/A HOLEDIA=N/A		 INPAQ TECHNOLOGY CO., LTD.	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
SCALE : N/A	UNIT : mm		
DRAWN BY : 周敬晨	CHECKED BY : 鄭榮謀		
DESIGNED BY : 洪賢修	APPROVED BY : 謝立庭		
TITLE : Embedded Single-Band Antenna for WA-C2-LA-00-003		DOCUMENT NO.	ENS000196230 SPEC REV. A1

3. Electrical Specification :

Those specifications were specially defined for **GUSTO** model **Wireless Antenna**, and all characteristics were measured under the model's handset testing jig.

3-1. Frequency Band :


Frequency Band	MHz
BT	2400~2500

3-2. Impedance :

50 ohm nominal

3-3. Matching circuit :

Fine Tune Matching

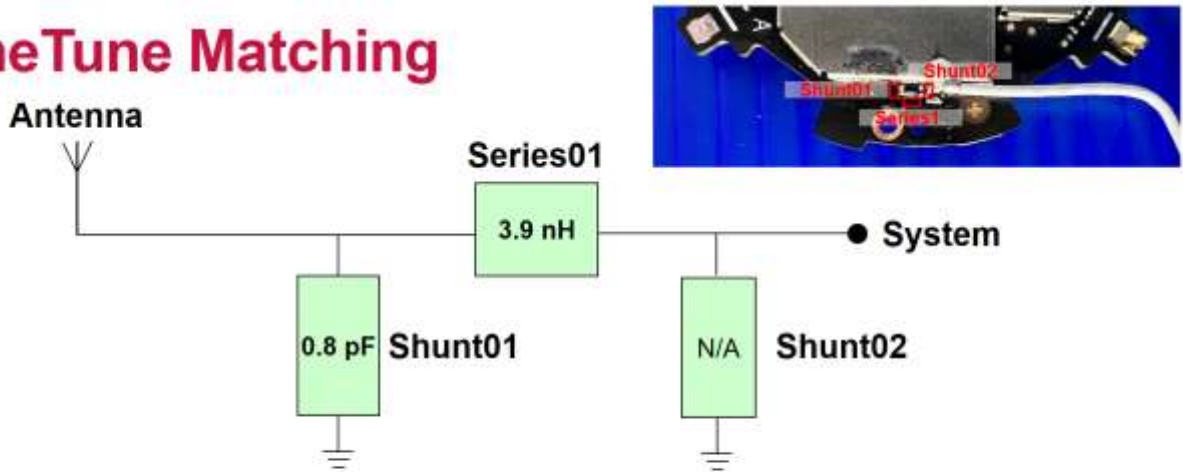

Location	Description	Vendor
Series01	3.9 nH	Murata
Shunt01	0.8 pF	Murata
Shunt02	N/A	N/A

UNLESS OTHER SPECIFIED TOLERANCES ON :
 X=N/A X.X=N/A X.XX=N/A
 ANGLES=N/A HOLEDIA=N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 周敬晨

CHECKED BY : 鄭榮謀

DESIGNED BY : 洪賢修

APPROVED BY : 謝立庭

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : Embedded Single-Band Antenna for
 WA-C2-LA-00-003


DOCUMENT
 NO.

ENS000196230

SPEC REV.
A1


3-4. VSWR

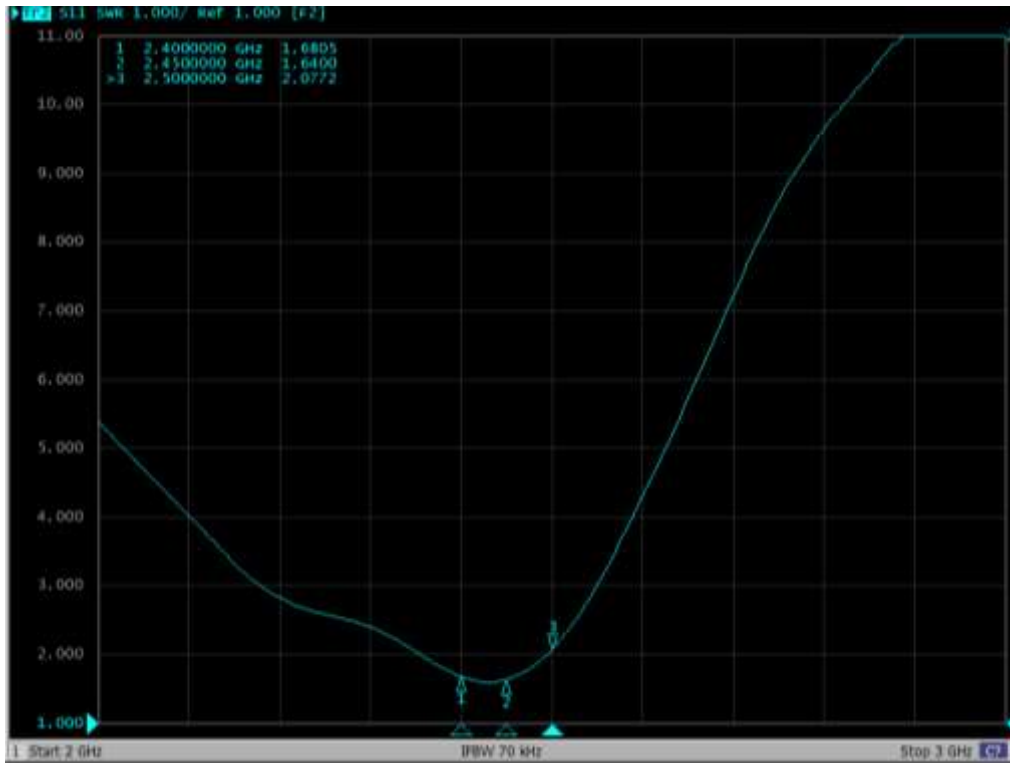


UNLESS OTHER SPECIFIED TOLERANCES ON : X=N/A X.X=N/A X.XX=N/A ANGLES=N/A HOLEDIA=N/A		 INPAQ TECHNOLOGY CO., LTD.	
SCALE : N/A	UNIT : mm		
DRAWN BY : 周敬晨	CHECKED BY : 鄭榮謀	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DESIGNED BY : 洪賢修	APPROVED BY : 謝立庭		
TITLE : Embedded Single-Band Antenna for WA-C2-LA-00-003	DOCUMENT NO.	ENS000196230	SPEC REV. A1


3-5. Efficiency

GUSTO		
Frequency (MHz)	Peak Gain (dBi)	Efficiency (dBi)
2400	-4.78	-10.47
2450	-4.52	-10.08
2500	-4.20	-10.34


UNLESS OTHER SPECIFIED TOLERANCES ON : X=N/A X.X=N/A X.XX=N/A ANGLES=N/A HOLEDIA=N/A			INPAQ TECHNOLOGY CO., LTD.	
SCALE : N/A	UNIT : mm			
DRAWN BY : 周敬晨	CHECKED BY : 鄭榮謀	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION		
DESIGNED BY : 洪賢修	APPROVED BY : 謝立庭			
TITLE : Embedded Single-Band Antenna for WA-C2-LA-00-003		DOCUMENT NO.	ENS000196230	SPEC REV. A1


3-6. 2D Radiation

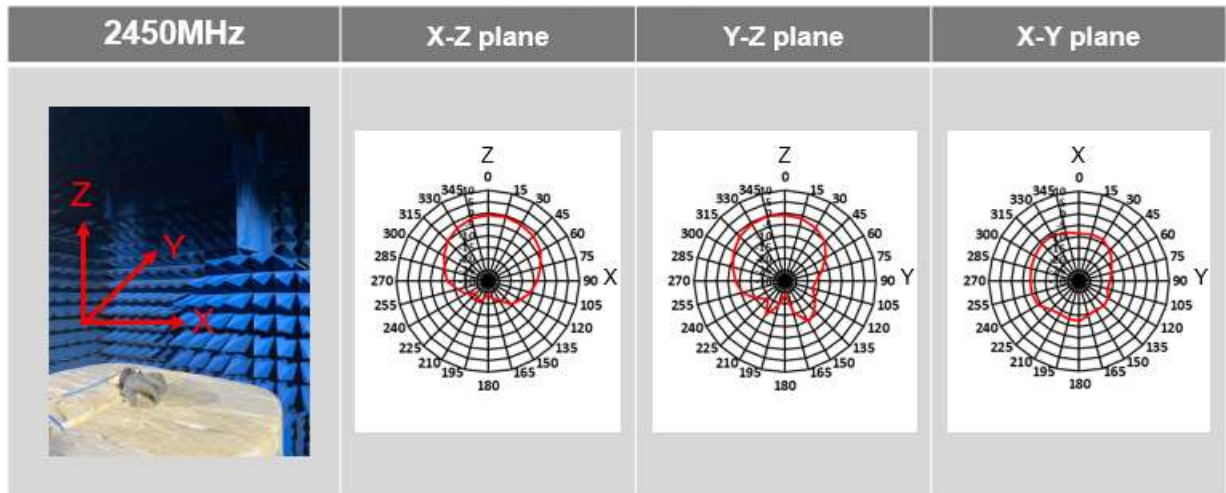

UNLESS OTHER SPECIFIED TOLERANCES ON : X=N/A X.X=N/A X.XX=N/A ANGLES=N/A HOLEDIA=N/A			INPAQ TECHNOLOGY CO., LTD.	
SCALE : N/A	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION		
DRAWN BY : 周敬晨	CHECKED BY : 鄭榮謀			
DESIGNED BY : 洪賢修	APPROVED BY : 謝立庭	DOCUMENT NO.	ENS000196230	SPEC REV. A1
TITLE : Embedded Single-Band Antenna for WA-C2-LA-00-003				

3-7. 3D Radiation

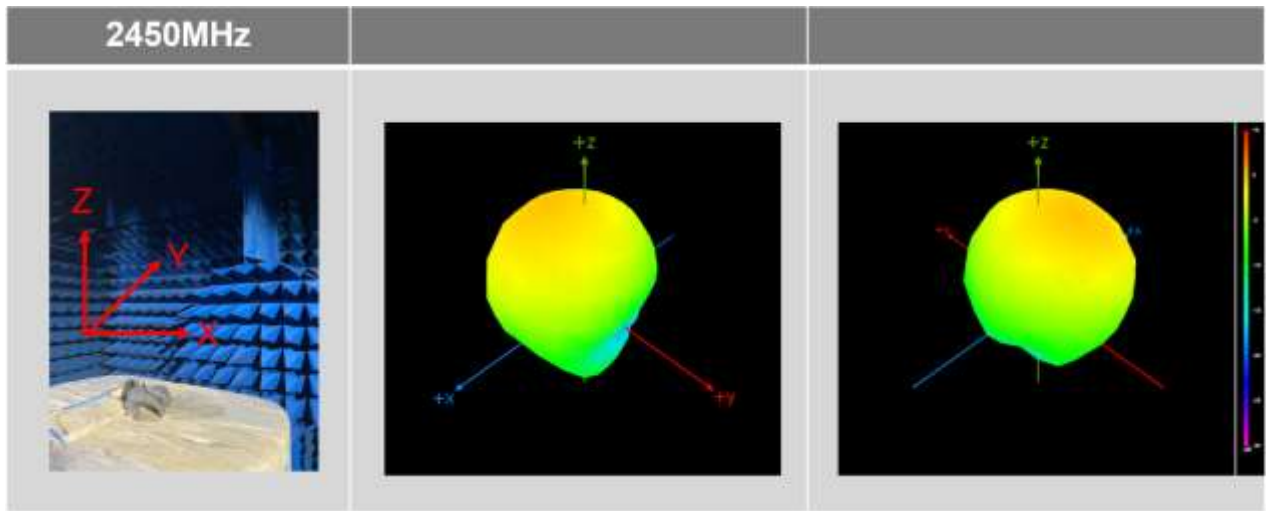

UNLESS OTHER SPECIFIED TOLERANCES ON :			INPAQ TECHNOLOGY CO., LTD.	
X = N/A	X.X = N/A			
ANGLES = N/A		HOLEDIA = N/A		
SCALE : N/A	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION		
DRAWN BY : 周敬晨	CHECKED BY : 鄭榮謀			
DESIGNED BY : 洪賢修	APPROVED BY : 謝立庭			
TITLE : Embedded Single-Band Antenna for WA-C2-LA-00-003		DOCUMENT NO.	ENS000196230	SPEC REV. A1

ZPK2.E216543 - Wiring, Printed - Flexible Material Constructions - Component

Wiring, Printed - Flexible Material Constructions - Component

SUZHOU FLEXIBLE PCB ELE. CO LTD

No.18 Zhongcheng Rd. Meili Town
(Tonggang Industrial Park Meili Town)
Changshu, JIANGSU 215518 China

E216543

Type	Cond Width		SS/ Thk	Area DS/ Diam	Max Date After	Report Surface Mount	Assembly Solder Process	Solder Limits	Max Oper Temp	Meets UL796F	C	DSR	I		
	Min	Max													
Single layer flexible material construction printed-wiring boards for use in flexible applications															
F-1	0.08	0.08	35	DS	20.3	No	-	-	-	263	15	105	V-0	All	-
Single layer flexible materials interconnect constructions, Flammability Recognition only															
F-1a	-	-	-	SS	-	No	-	-	-	260	10	-	V-0	-	-
F-2 (ASP 1)	-	-	-	SS	-	Yes	Yes	260	6	-	-	-	V-0	-	-

ASP 1 - Assembly solder process evaluated to IPC-TM-650, 2.6.27 Thermal Stress Assembly Simulation.

Marking: Company name or file number and type designation. May be followed by a suffix to denote factory identification or flammability classification..

Last Updated on 2022-08-17

在此資料庫中出現的公司名稱或產品，並不代表其產品本身的製造有經過UL 後續檢驗服務的把關。僅有附 UL 標誌的產品才可被視為取得認證，並涵蓋在UL 後續檢驗服務範圍裡。請務必確認產品上是否有此標誌。

UL 允許複製線上認證目錄中所包含的資料，但必須符合以下條件：1.指南資訊、零組件、構造、設計、系統和/或認證 (檔案) 必須以完整的方式呈現，且不得誤導、不得操弄這些資料 (或圖繪)。2.「經 UL 許可自線上認證目錄轉載」的聲明，必須顯示在擷取的資料旁。此外，轉載的資料必須包含以下格式的版權聲明： "©2023 UL LLC."

Plastics - Component

COMPANY

HONG KONG SINOPLAST GROUP LIMITED

Room D,10/F, Tower A, Billion Centre
 1 Wang Kwong Road, Kowloon Bay
 Kowloom, Hong Kong

E335478

Dsg	Color	Min Thk mm	Flame Class	H		Elec Str	RTI		H D		
				W	A		Mech Imp	Str	V	4	C
				I	I				R	5	I
Acrylonitrile Butadiene Styrene (ABS) "POLYKING" furnished as pellets											
951-(xx)	ALL	1.5	V-0	2	1	60	60	60	2	7	1
		3.0	V-0	0	0	60	60	60	-	-	-
Acrylonitrile Butadiene Styrene/Polycarbonate (ABS/PC) furnished as Pellets, rolls or sheets											
FR450	ALL	1.5	V-0	-	-	60	60	60	-	-	-
		3.0	V-0	-	-	60	60	60	-	-	-
Acrylonitrile Butadiene Styrene/Polymethyl Methacrylate (ABS/PMMA) furnished as Pellets, rolls or sheets											
MA915-(xx)	ALL	1.5	HB	-	-	50	50	50	-	-	-
		3.0	HB	-	-	50	50	50	-	-	-
Polyamide (PA), Semi Aromatic Resin, "POLYKING" furnished as granular material											
HT-(xx)	NC, BK	0.75	V-0	0	0	65	65	65	4	-	-
		1.5	V-0	0	0	65	65	65	-	-	-
		3.0	V-0	0	0	65	65	65	-	-	-
Polyamide (PA) furnished as pellets											
221-(xx)	ALL	0.75	HB	4	0	65	65	65	1	4	0
		1.5	HB	4	0	65	65	65	-	-	-
		3.0	HB	3	0	65	65	65	-	-	-
Polybutylene Terephthalate (PBT) "POLYKING" furnished as pellets, rolls or sheets											
BT201-(xx)	ALL	0.8	V-0	1	-	75	75	75	-	-	1
		1.5	V-0	0	-	75	75	75	-	-	-
		3.0	V-0	0	-	75	75	75	-	-	-

Feedback

Polycarbonate (PC) "POLYKING" furnished as pellets											
6010-(xx)	ALL	0.8	V-0	4	0	80	80	80	-	-	1
		3.0	V-0	3	0	80	80	80	-	-	-
Polycarbonate (PC) "POLYKING" furnished as pellets, rolls and sheets											
3010-(z)(f2)	NC	0.8	-	2	0	80	80	80	2	-	2
	WT	0.8	V-2	2	0	80	80	80	-	-	-
	NC	0.85	V-2	2	0	80	80	80	-	-	-
	NC, WT	3.0	V-2	2	0	80	80	80	-	-	-
	BK	3.0-3.3	V-2	2	0	80	80	80	-	-	-
Polycarbonate (PC) furnished as pellets											
5010-(xx)	ALL	1.5	V-0	-	-	80	80	80	-	-	-
		3.0	V-0	-	-	80	80	80	-	-	-
Polycarbonate (PC)											
7015-(xx)	ALL	1.5	HB	3	1	80	80	80	3	-	-
		3.0	HB	2	1	80	80	80	-	-	-
Polycarbonate/Acrylonitrile Butadiene Styrene (PC/ABS)											
FR650-(xx)	ALL	0.8	V-0	1	-	60	60	60	-	-	3
		1.5	V-0, 5VB	0	-	60	60	60	-	-	-
		3.0	V-0, 5VA	0	-	60	60	60	-	-	-
Polyethylene Terephthalate (PET) furnished as pellets, rolls or sheets											
ET301-(xx)	ALL	1.5	V-0	0	0	-	75	75	-	-	-
		3.0	V-0	0	0	-	75	75	-	-	-
Polyphenylene Sulfide (PPS), modified, "POLYKING" furnished as pellets											
HPA-(xx)	ALL	0.8	V-0	3	1	130	130	130	-	-	4
		1.5	V-0	0	1	130	130	130	-	-	-

(f2) - Subjected to one or more of the following tests: Ultraviolet Light, Water Exposure or Immersion in accordance with UL 746C, where the acceptability for outdoor use is to be determined by UL.

(xx) - Represents a one, two, three or four digit number or letter combination or any combination of numbers or letters to denote a customer code.

(z) - Represents a one, two, three, four, five or six digit number or letter combination or any combination of numbers or letters to denote a customer code.

Marking: Company name, material designation On container, wrapper Or finished part.

Last Updated on 2022-12-13

Feedback

并不是所有出现在本数据库中的公司名称和产品都满足了UL跟踪检验服务的要求。只有带有UL标志的产品，才应该被视为经过UL认证，并满足UL跟踪检验服务的要求。注意查看产品上的标志。

UL 允许在线认证目录中所含材料的复制遵循以下条件：1.指南信息、装配、构造、设计、系统和/或认证（文件）必须在不篡改任何数据（或图纸）的情况下完整且无误导性地呈现。2.“经 UL 允许从在线认证目录转载”声明必须出现在所摘取材料的邻近位置。此外，转载材料必须包含以下格式的版权声明：“©2023 UL LLC.”

Model FR450

File Number: E335478



COMPANY

HONG KONG SINOPLAST GROUP LIMITED

Room D,10/F, Tower A, Billion Centre
1 Wang Kwong Road, Kowloon Bay
Kowloom, Hong Kong

MODEL INFO

FR450

Acrylonitrile Butadiene Styrene/Polycarbonate (ABS/PC), furnished as Pellets, rolls or sheets

FLAMMABILITY PROPERTIES	额定值	测试方法
Flammability		ANSI/UL 94
1.5 mm, Color: ALL	V-0	
3.0 mm, Color: ALL	V-0	
ISO/IEC FLAMMABILITY PROPERTIES	额定值	测试方法
Flammability		IEC 60695-11-10
1.5 mm, Color: ALL	V-0	
3.0 mm, Color: ALL	V-0	
THERMAL PROPERTIES	额定值	测试方法
Relative Thermal Index - Electrical Strength		UL 746B
1.5 mm	60 °C	
3.0 mm	60 °C	
Relative Thermal Index - Mechanical Impact		UL 746B
1.5 mm	60 °C	
3.0 mm	60 °C	
Relative Thermal Index - Mechanical Strength		UL 746B

Feedback

1.5 mm	60 °C
3.0 mm	60 °C

Report Date: 2010-06-14
Revision Date: 2022-12-13

并不是所有出现在本数据库中的公司名称和产品都满足了UL 跟踪检验服务的要求。只有带有 UL 标志的产品，才应该被视为经过UL认证，并满足UL 跟踪检验服务的要求。注意查看产品上的标志。

UL 允许在线认证目录中所含材料的复制遵循以下条件：1.指南信息、装配、构造、设计、系统和/或认证（文件）必须在不篡改任何数据（或图纸）的情况下完整且无误导性地呈现。2.“经 UL 允许从在线认证目录转载”声明必须出现在所摘取材料的邻近位置。此外，转载材料必须包含以下格式的版权声明：“©2023 UL LLC.”