

ANTENNA INFORMATION

OEM	ASUS
ODM	Inventec
Platform model name	S3407QA
Qualcomm platform (ex: Yes, No or NA)	Yes
Platform type (ex: regular NB, convertible PC, AIO...etc)	Regular NB
SAR minimum separation (mm)	FCC (1g) 4.85
	ISED (1g) 4.85
	ISED (10g) 1.8

Antenna manufacturer	Company name	LUXSHARE-ICT
	Address	7F, No. 568, Sec.1, Minsheng N. Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
Test location	Company name	LUXSHARE-ICT
	Address	7F, No. 568, Sec.1, Minsheng N. Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
Test Personnel	Name(Full name)	Michael.Pan
	E-mail	Michael.Pan@luxshare-ict.com
	Tel/Mobile	0933019915
Testing date		2024/12/26

Antenna Part number	Main	LA9RF636-NB-H
	Aux	LA9RF637-NB-H
Antenna type (ex: PIFA, Dipole...etc)		PIFA Antenna

Antenna Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	2.74	2.71	2.74	4.42	3.30	3.30	4.14	4.26	4.26	3.95
Aux	2.88	2.78	2.40	3.20	3.82	4.05	4.58	3.89	4.02	3.85

Cable Assembly Part Number and Information					
	Cable PN	Cable length(mm)	Cable diameter(mm)	Impedance(ohm)	Connector type
Main	SY113L/50-055	180	1.13	50Ω	I-Pex NGFF (20565-001R-13)
Aux	SY113L/50-063	335	1.13	50Ω	I-Pex NGFF (20565-001R-13)

* 3D Antenna Peak Gain required being test in system basis.

Table of Contents

Cover page.....	1
1. Intel Reference Gain and Type.....	3
2. Document Revision History.....	3
3. Test & System Description	
3.1 Measurement Method and System.....	4
3.2 Test setup.....	4
3.3 Equipment list.....	5
4. Radiation characteristics of antenna loaded in Host Platform.....	6
Annex A. Photographs	
A.1 Setup Photo.....	16
A.2 Test sample.....	17
Annex B. Antenna Location	
B.1 Antenna Host Platform Location Information.....	19
B.2 Antenna dimensional information for SAR evaluation.....	20


1. Qualcomm Reference Gain

Antenna Peak gain w/ cable loss (dBi)											
Band/Frequency		2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
PIFA	EU/UK	3.53	3.06	3.07	4.81	4.2	5.09	5.14	5.09	5.16	5.12


2. Test & System Description

3.1 Measurement Method and System

<insert test description here for test method>

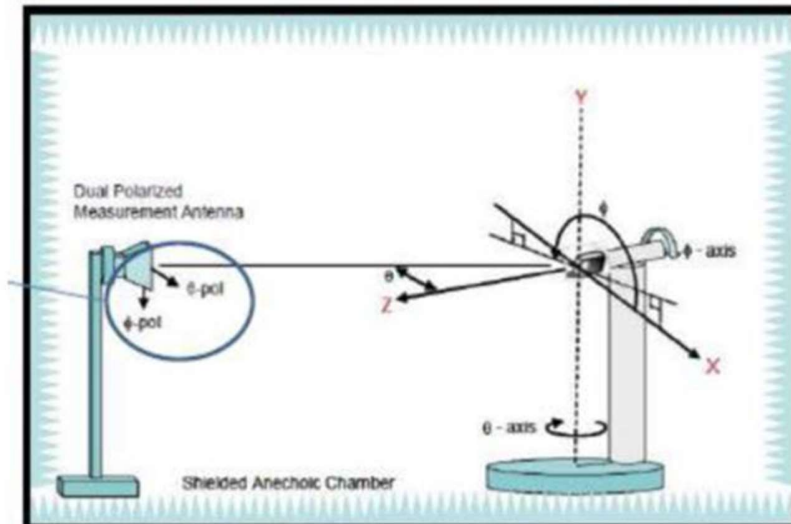

3.2 Test setup

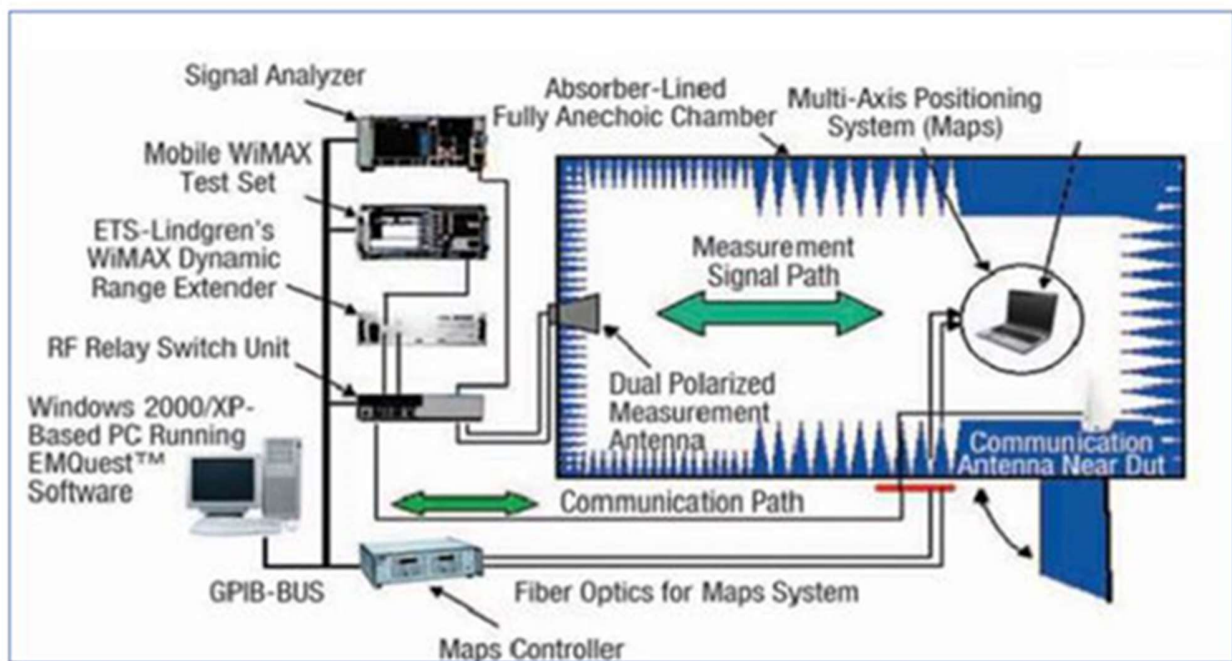

3.3 Equipment list

<insert test diagram here for test site utilized>

Device	Type/Model	Serial#	Manufacturer	Cal. Date	Cal. Due Date
Anechoic Chamber	AMS-8500	1191	ETS-Lindgren	2024/3/9	2026/3/9
Turn Table	2090	-	ETS-Lindgren	N/A	N/A
Switch & Positioning systems	7001-002	116599	ETS-Lindgren	N/A	N/A
Measurement SW	EMQuest v1.0.8	1352	ETS-Lindgren	N/A	N/A
Boresight antenna mast	2090	-	ETS-Lindgren	N/A	N/A
Spectrum Analyzer	N9010A	X16-96096	Agilent Technologies	2024/7/25	2026/7/25
Horn antenna	3164-08	00143257	ETS-Lindgren	2024/4/3	2026/4/3
Horn antenna + Amplifier + HPF6.4	115195	00117614	ETS-Lindgren	2024/8/1	2026/8/1
Cable 2.5m - 30MHz to 18GHz	0500990992500KE	19.23.395	Radial	2024/1/10	2026/1/10
Cable 1.2m - 18 to 40GHz	UFA147A-0-0480-200200	MFR 64639223720-003	Micro-caox	2024/1/10	2026/1/10
Cable 1m - 1GHz to 18GHz	UFA147A	-	Utileflex	2024/1/10	2026/1/10
Cable 2m - 26.5MHz to 40GHz	794-9191-200A	E00327	Atem	2024/1/10	2026/1/10
Cable 1m - 30MHz to 18GHz	UFB311A-0-0590-50U50U	MFR 64639223230-001	Micro-caox	2024/1/10	2026/1/10
Cable 7m - DC-18GHz	0501051057000GX	19.35.850	Radial	2024/1/10	2026/1/10
Cable 7m - 18GHz to 40GHz	R286304009	-	Radial	2024/1/10	2026/1/10
Cable 1.5m - DC-18GHz	CBL-1.5M-SMSM+	202879	Mini-Circuits	2024/1/10	2026/1/10
Temp & Humidity Logger	GM-108A	-		2024/5/2	2026/5/2

Antenna Information

1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
(P/N: LA9RF636-NB-H) Main Antenna	Luxshare-ICT	PIFA	50 ohm Coaxial Length: 180 mm Diameter : 1.13 mm Normal Connector: IPEX 20565-001R-13	2400-2483.5	2.74	3.18	3.0	0.44
				5150-5250	2.71	3.37	3.0	0.66
				5250-5350	2.74	3.41	3.0	0.67
				5470-5725	4.42	5.11	3.0	0.69
				5725-5850	3.30	3.99	3.0	0.69
				5850-5895	3.30	3.99	3.0	0.69
				5925-6425	4.14	4.85	3.0	0.71
				6425-6525	4.26	4.97	3.0	0.71
				6525-6875	4.26	4.98	3.0	0.72
				6875-7125	3.95	4.68	3.0	0.72
(P/N: LA9RF637-NB-H) Aux Antenna	Luxshare-ICT	PIFA	50 ohm Coaxial Length: 335 mm Diameter : 1.13 mm Normal Connector: IPEX 20565-001R-13	2400-2483.5	2.88	3.70	3.0	0.82
				5150-5250	2.78	4.01	3.0	1.23
				5250-5350	2.40	3.64	3.0	1.24
				5470-5725	3.20	4.48	3.0	1.28
				5725-5850	3.82	5.11	3.0	1.29
				5850-5895	4.05	5.34	3.0	1.29
				5925-6425	4.58	5.91	3.0	1.33
				6425-6525	3.89	5.22	3.0	1.33
				6525-6875	4.02	5.36	3.0	1.34
				6875-7125	3.85	5.19	3.0	1.34


- 3D Antenna Peak Gain required being test in system basis.

3. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.74

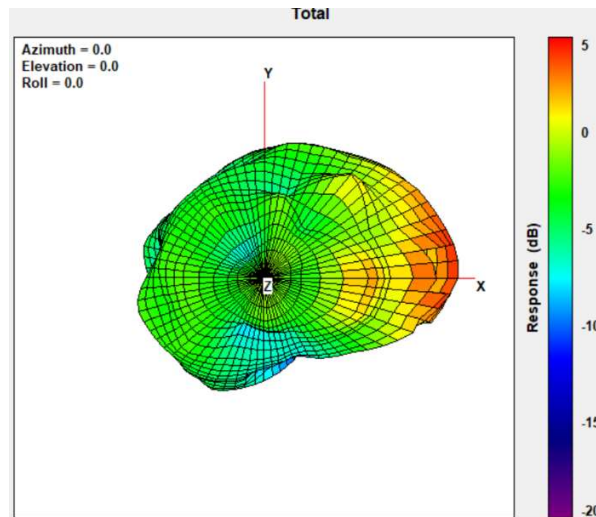


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.71

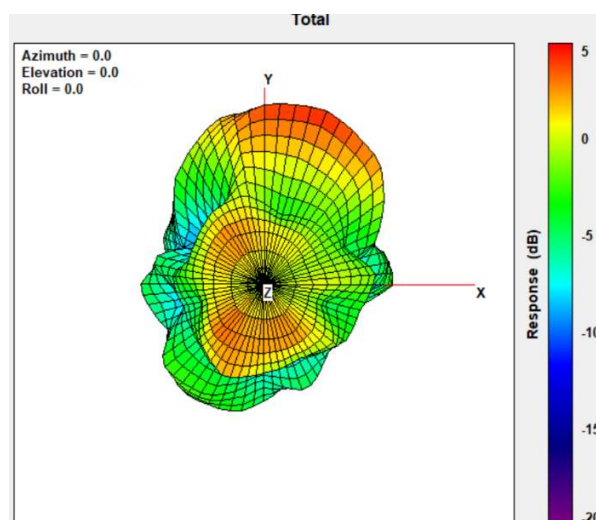


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.74

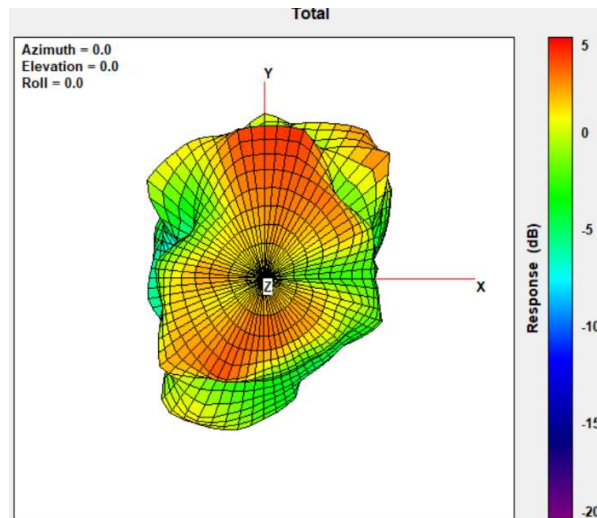


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	4.42

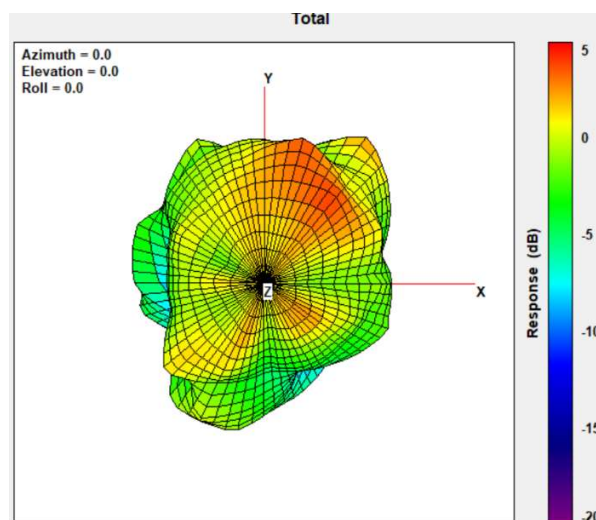


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	3.30

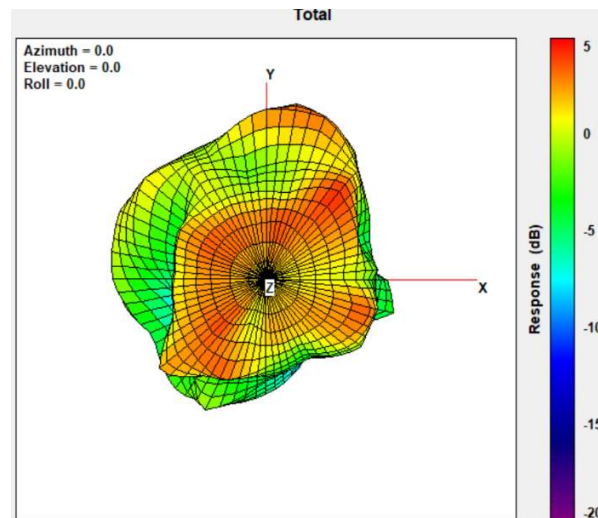


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	3.30

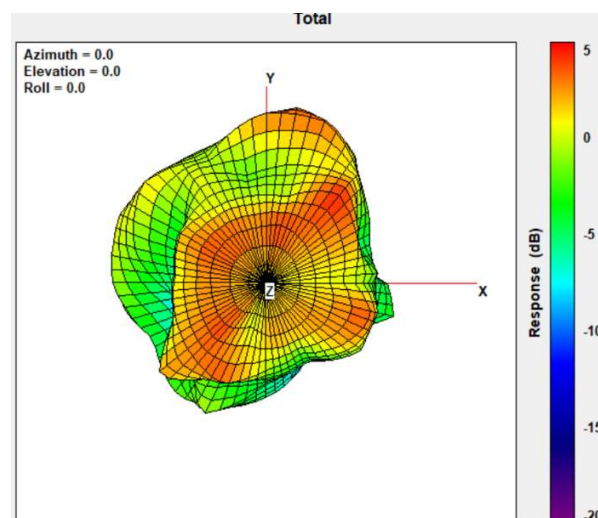


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	4.14

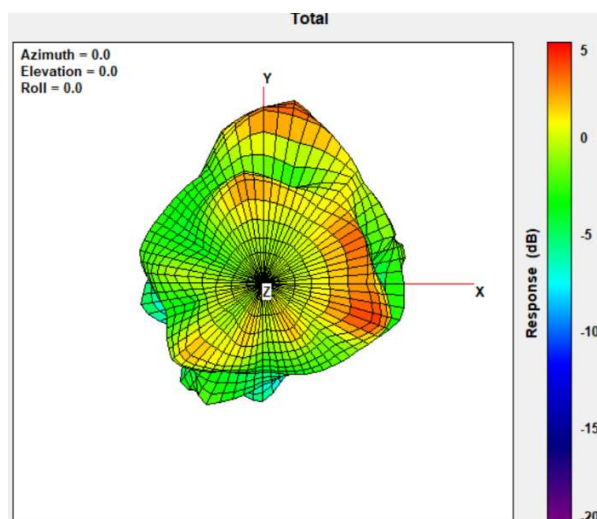


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	4.26

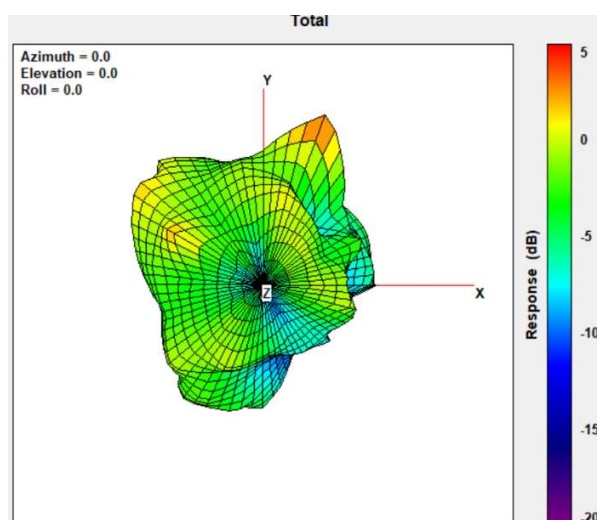


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	4.26

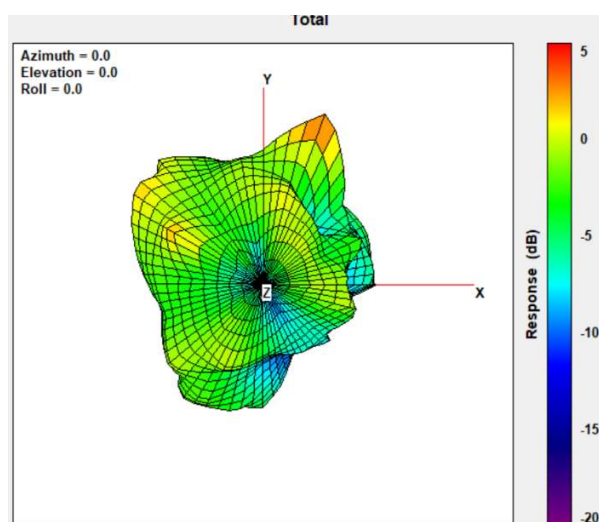

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.95

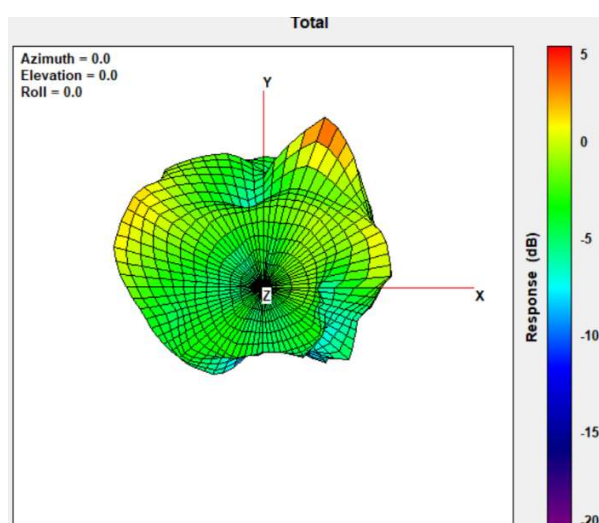

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.88

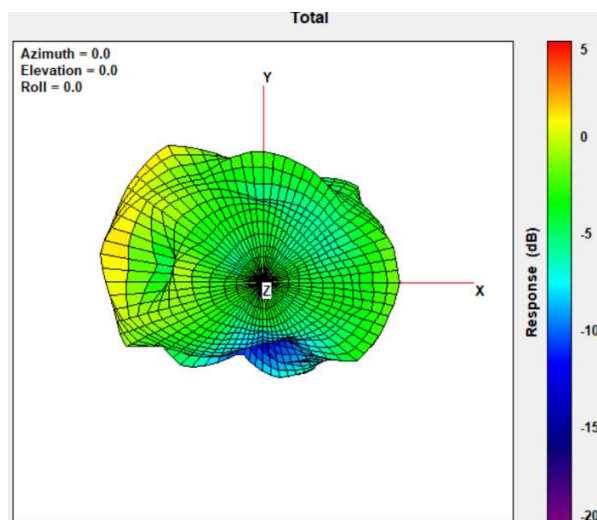


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.78

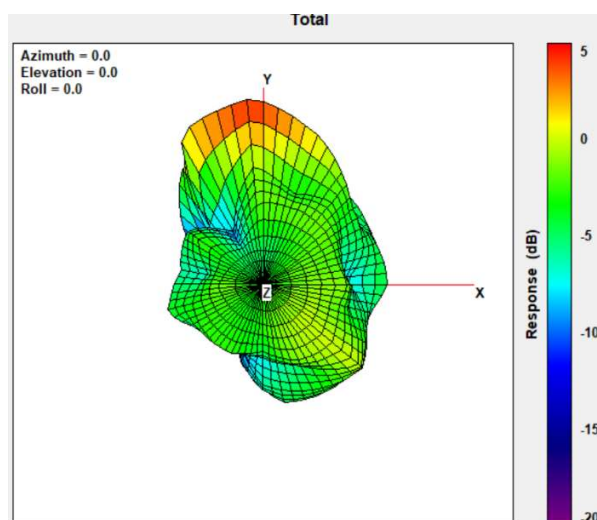


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.40

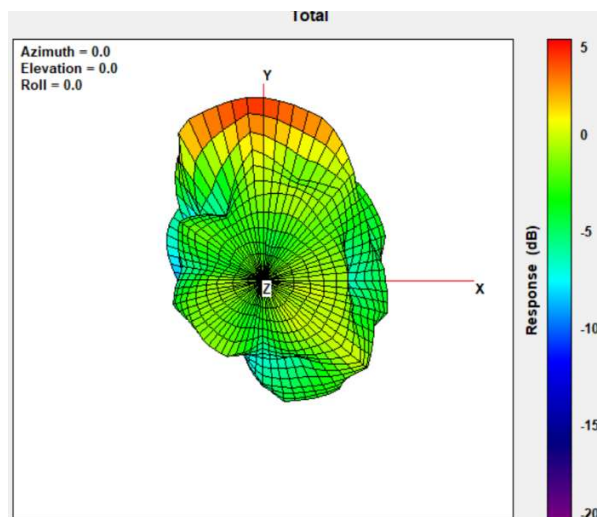


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	3.20

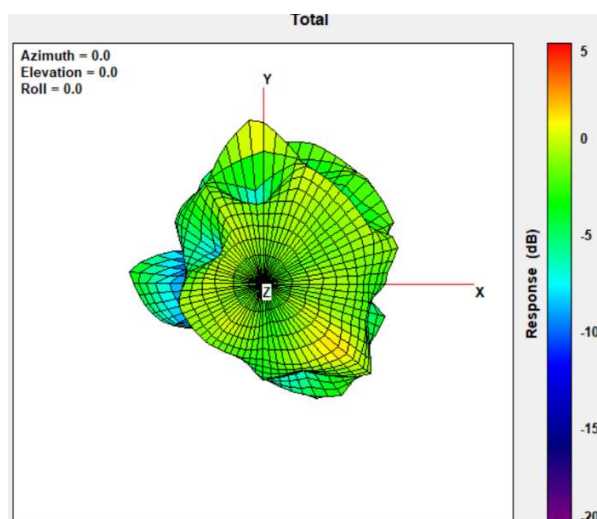


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	3.82

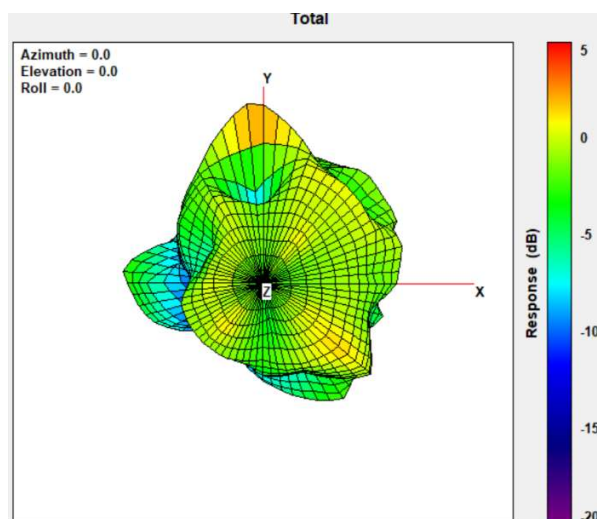


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	4.05

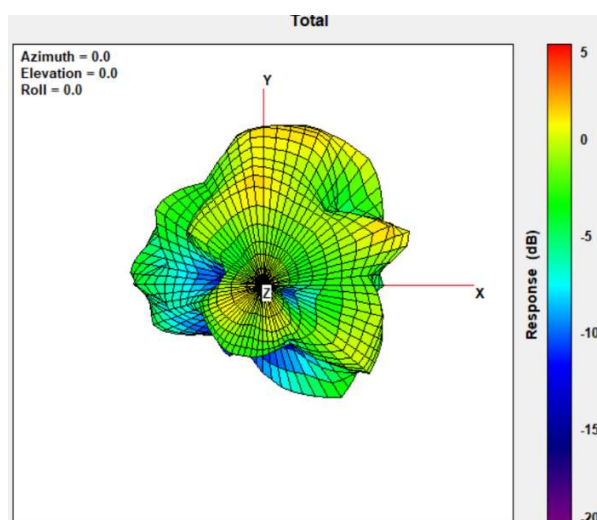


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	4.58

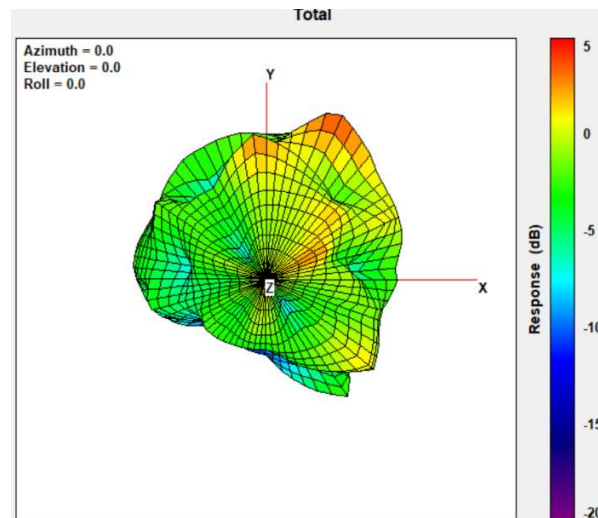


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	3.89

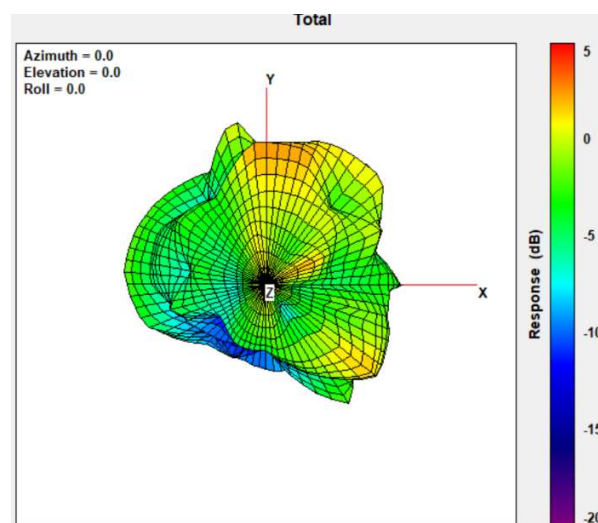


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	4.02

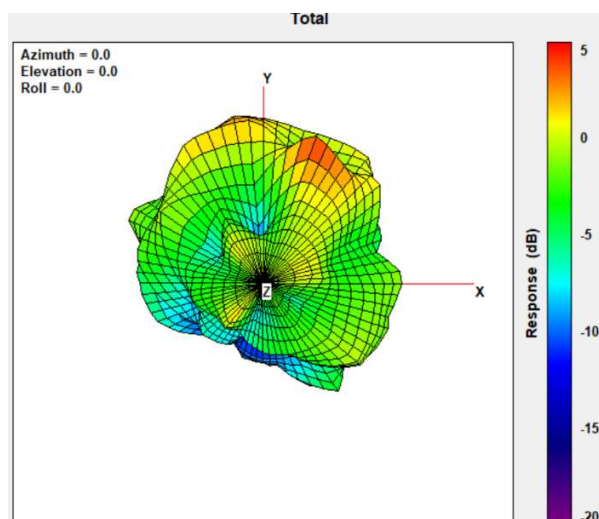

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.85

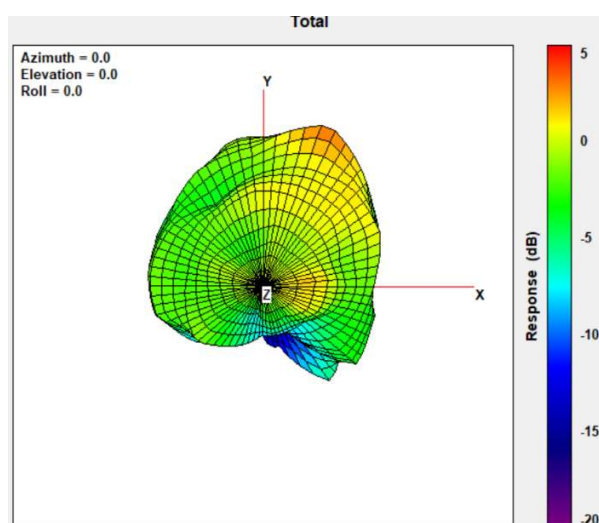

Annex A. Photographs

A.1 Setup Photo

<insert test diagram here for test site utilized>

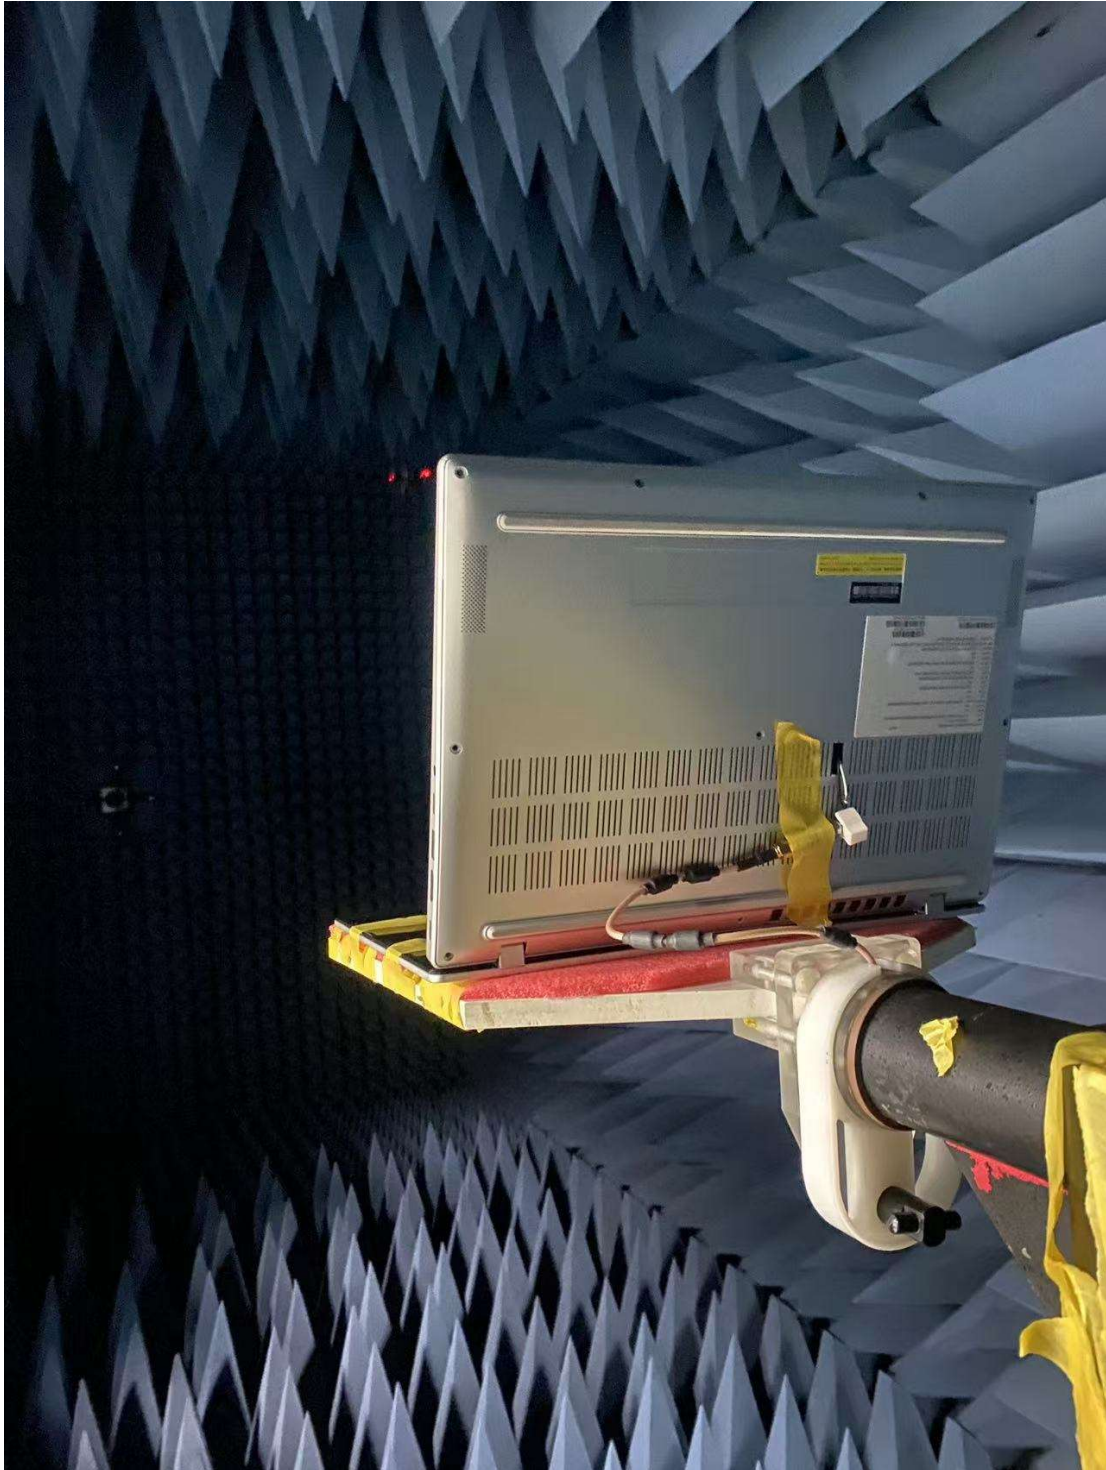


Annex B. Antenna Location

B.1 Antenna Host Platform Location Information

Include a dimensioned photo(s) or dimensioned drawing(s) of Main and Aux antenna placements (measurements are not required for receive-only antenna).


Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

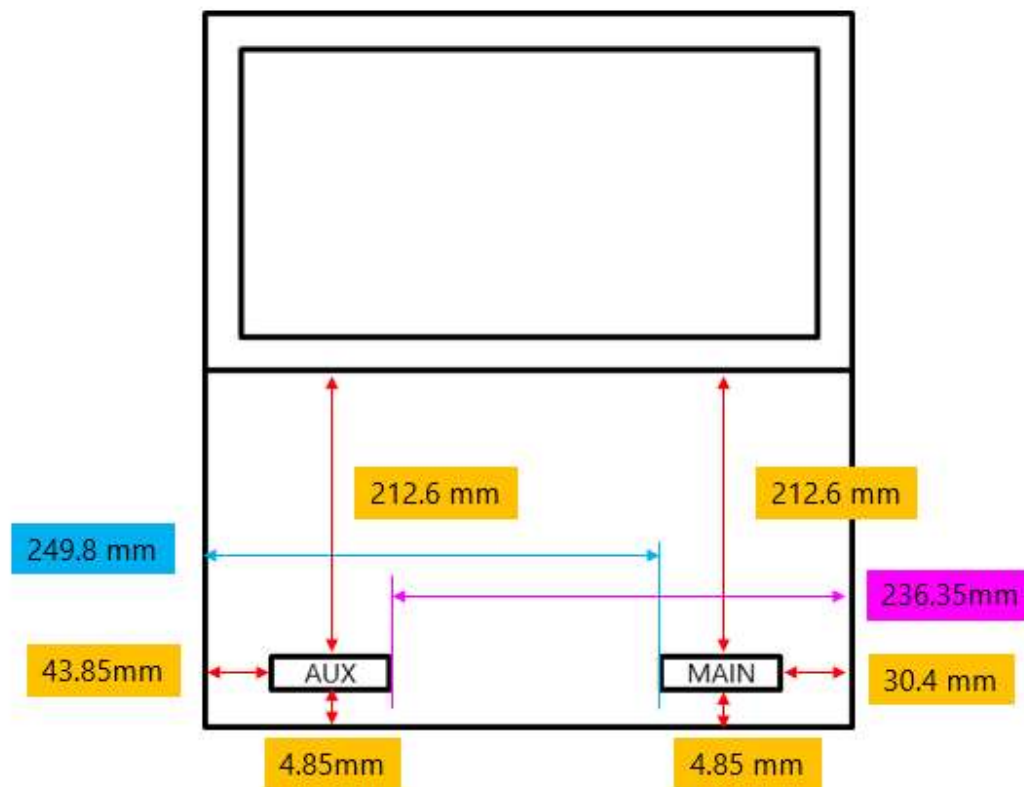

B.2 Antenna dimensional information for SAR evaluation


Include a dimensioned photo(s) or dimensioned drawing(s) showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

Antennas on the panel section

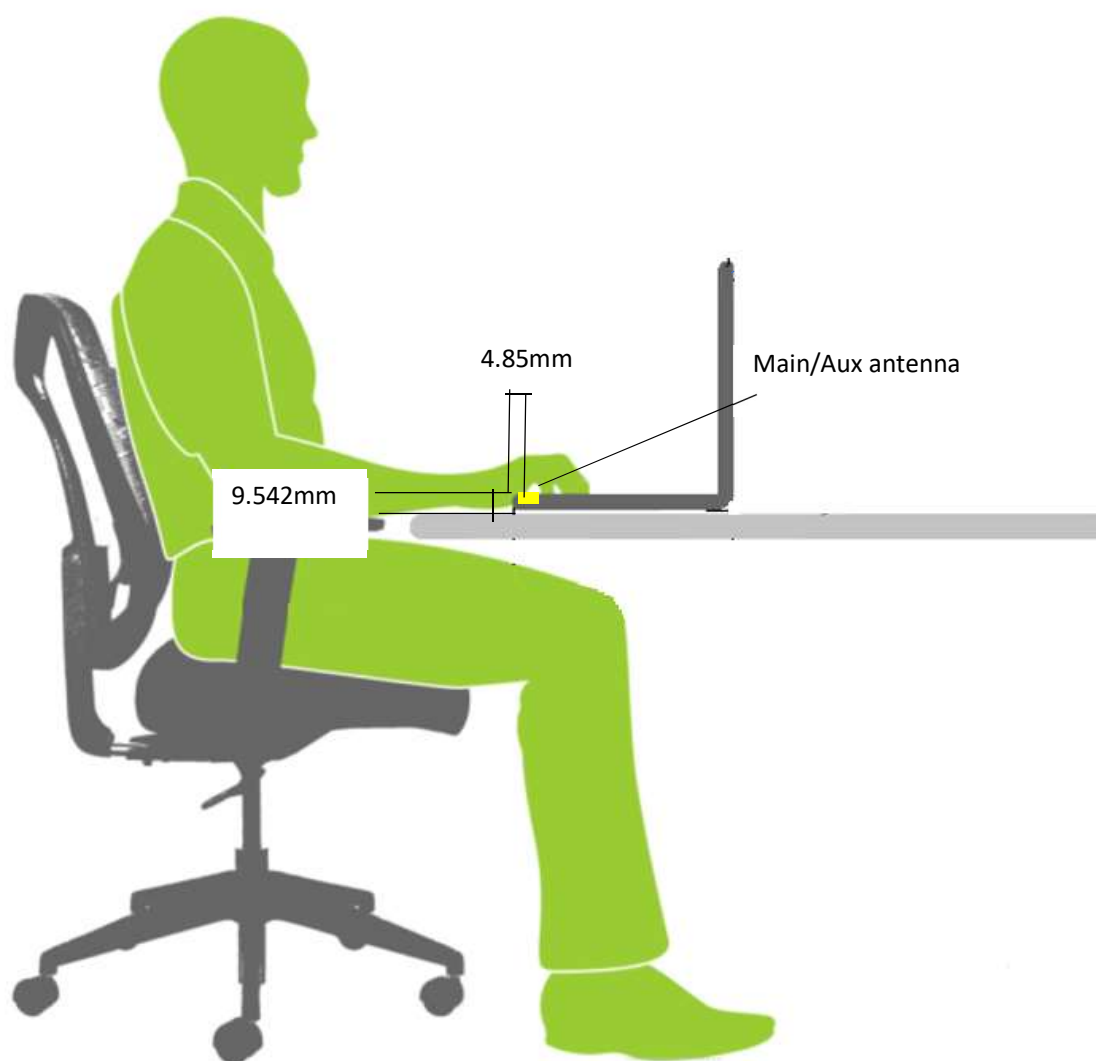

Measuring Surface	Antenna	Separation Distance(antenna-to- Surface)(mm)	1g SAR
Bottom Side	Main	9.542	FCC/ISED
	Aux	9.542	FCC/ISED

Antennas on the keyboard section

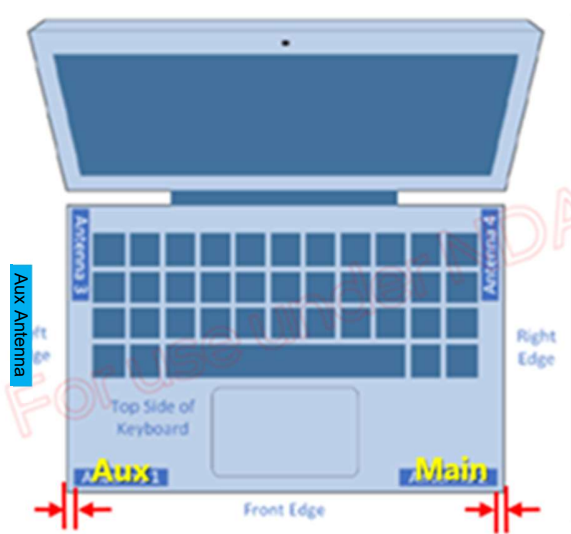

Measuring Surface	Antenna	Separation Distance(antenna-to-Surface)(mm)	1g or 10g SAR
Bottom Side	Main	9.542	1g (FCC/ISED)
	Aux	9.542	1g (FCC/ISED)
Front Edge	Main	4.85	1g (ISED)
	Aux	4.85	1g (ISED)
Left Edge	Main	212.6	10g (ISED)
	Aux	43.85	10g (ISED)
Right Edge	Main	30.4	10g (ISED)
	Aux	236.35	10g (ISED)
Top side of Keyboard	Main	1.8	10g (ISED)
	Aux	1.8	10g (ISED)