



# FCC TEST REPORT

**REPORT NO.:** RF121017D11-1 R1  
**MODEL NO.:** ASUS CUBE WITH GOOGLE TV RC  
**FCC ID:** MSQ-QUBERC01U  
**RECEIVED:** Oct. 17, 2012  
**TESTED:** Nov. 27, 2012  
**ISSUED:** Mar. 14, 2013

**APPLICANT:** ASUSTeK COMPUTER INC.

**ADDRESS:** 4F, No.150, LI-TE RD., PEITOU, TAIPEI,  
TAIWAN, R.O.C

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB LOCATION:** No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,  
New Taipei City, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



## Table of Contents

RELEASE CONTROL RECORD .....	3
1. CERTIFICATION.....	4
2. SUMMARY OF TEST RESULTS .....	5
2.1 MEASUREMENT UNCERTAINTY .....	5
3. GENERAL INFORMATION .....	6
3.1 GENERAL DESCRIPTION OF EUT .....	6
3.2 DESCRIPTION OF TEST MODES .....	7
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	8
3.3 DESCRIPTION OF SUPPORT UNITS .....	9
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST.....	9
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	10
4. TEST TYPES AND RESULTS .....	11
4.1 CONDUCTED EMISSION MEASUREMENT .....	11
4.2 RADIATED EMISSION AND BAND EDGE MEASUREMENT .....	11
4.2.1 LIMITS OF RADIATED EMISSION AND BAND EDGE MEASUREMENT .....	11
4.2.2 TEST INSTRUMENTS.....	12
4.2.3 TEST PROCEDURES .....	13
4.2.4 DEVIATION FROM TEST STANDARD .....	13
4.2.5 TEST SETUP.....	14
4.2.6 EUT OPERATING CONDITIONS .....	14
4.2.7 TEST RESULTS .....	15
5. PHOTOGRAPHS OF THE TEST CONFIGURATION .....	21
6. INFORMATION ON THE TESTING LABORATORIES.....	22
7. APPENDIX A – MODIFICATION RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	23



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF121017D11-1	Original release	Nov. 30, 2012
RF121017D11-1 R1	As client's request, modify model name and model no.	Mar. 14, 2013



A D T

## 1. CERTIFICATION

**PRODUCT:** Media Streamer RC

**BRAND:** ASUS

**MODEL NO.:** ASUS CUBE WITH GOOGLE TV RC

**APPLICANT:** ASUSTeK COMPUTER INC.

**TESTED:** Nov. 27, 2012

**TEST SAMPLE:** MASS-PRODUCTION

**STANDARDS:** FCC Part 15, Subpart C (Section 15.249)

**ANSI C63.10-2009**

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Annie Chang , **DATE:** Mar. 14, 2013  
( Annie Chang / Supervisor )

**APPROVED BY :** Ken Liu , **DATE:** Mar. 14, 2013  
( Ken Liu / Manager )



## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.249)			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	N/A	Power supply is 3.0Vdc from batteries
15.209 15.249 15.249 (d)	Radiated Emission Test Band Edge Measurement Limit: 50dB less than the peak value of fundamental frequency or meet radiated emission limit in section 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -9.1dB at 2473.00MHz.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Frequency	Uncertainty
Conducted emissions	150kHz ~ 30MHz	2.41 dB
Radiated emissions	30MHz ~ 1GHz	3.78 dB
	Above 1GHz	3.36 dB



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	Media Streamer RC
<b>MODEL NO.</b>	ASUS CUBE WITH GOOGLE TV RC
<b>POWER SUPPLY</b>	3.0Vdc from batteries
<b>MODULATION TYPE</b>	GFSK
<b>OPERATING FREQUENCY</b>	2410MHz ~ 2473MHz
<b>NUMBER OF CHANNEL</b>	64
<b>ANTENNA TYPE</b>	Printed monopole antenna with 1.88dBi gain
<b>DATA CABLE</b>	N/A
<b>I/O PORT</b>	N/A
<b>ACCESSORY DEVICES</b>	N/A

**NOTE:**

1. The EUT is a Media Streamer RC.
2. The above EUT information is declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

64 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
1	2410	17	2426	33	2442	49	2458
2	2411	18	2427	34	2443	50	2459
3	2412	19	2428	35	2444	51	2460
4	2413	20	2429	36	2445	52	2461
5	2414	21	2430	37	2446	53	2462
6	2415	22	2431	38	2447	54	2463
7	2416	23	2432	39	2448	55	2464
8	2417	24	2433	40	2449	56	2465
9	2418	25	2434	41	2450	57	2466
10	2419	26	2435	42	2451	58	2467
11	2420	27	2436	43	2452	59	2468
12	2421	28	2437	44	2453	60	2469
13	2422	29	2438	45	2454	61	2470
14	2423	30	2439	46	2455	62	2471
15	2424	31	2440	47	2456	63	2472
16	2425	32	2441	48	2457	64	2473

### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE $\geq$ 1G	RE $<$ 1G	BM	
-	Note	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE $\geq$ 1G**: Radiated Emission above 1GHz  
**RE $<$ 1G**: Radiated Emission below 1GHz **BM**: Bandedge Measurement

**NOTE 1**: No need to concern of Conducted Emission due to the EUT is powered by batteries.

**NOTE2**: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Y-plane.

#### RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	1 to 64	1, 32, 64	GFSK

#### RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	1 to 64	1	GFSK

#### BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	1 to 64	1, 64	GFSK

#### TEST CONDITION:


APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	24deg. C, 73% RH	3.0Vdc	Dalen Dai
RE $<$ 1G	25deg. C, 76% RH	3.0Vdc	Dalen Dai
BM	24deg. C, 73% RH	3.0Vdc	Dalen Dai



### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without any necessary accessory or support unit.

#### 3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

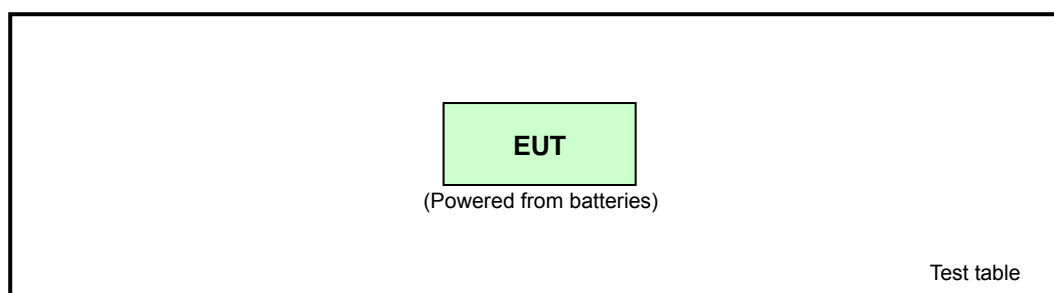



### **3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (Section 15.249)**

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

N/A

### 4.2 RADIATED EMISSION AND BAND EDGE MEASUREMENT

#### 4.2.1 LIMITS OF RADIATED EMISSION AND BAND EDGE MEASUREMENT

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 ~ 928 MHz	50	500
2400 ~ 2483.5 MHz	50	500
5725 ~ 5875 MHz	50	500
24 ~ 24.25 GHz	250	2500

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits as below table, whichever is the lesser attenuation

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



## 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 29, 2012	Feb. 28, 2013
HP Preamplifier	8449B	3008A01201	Feb. 29, 2012	Feb. 28, 2013
Agilent Spectrum Analyzer	E4446A	MY46180403	Jun. 13, 2012	Jun. 12, 2013
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Oct. 14, 2012	Oct. 13, 2013
Schwarzbeck Antenna	VULB 9168	137	Apr. 03, 2012	Apr. 02, 2013
Schwarzbeck Antenna	VHBA 9123	480	May 22, 2012	May 21, 2013
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	ADT_Radiated_V 7.6.15.9.2	NA	NA	NA
SUHNER RF cable	SF102	CABLE-CH6	Aug. 19, 2012	Aug. 18, 2013
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	May 18, 2012	May 17, 2013
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSP 40	100036	May 09, 2012	May 08, 2013

- NOTE:**
1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  3. The test was performed in Chamber No. 6.
  4. The Industry Canada Reference No. IC 7450E-6.
  5. The FCC Site Registration No. is 447212.

### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

## 4.2.5 TEST SETUP

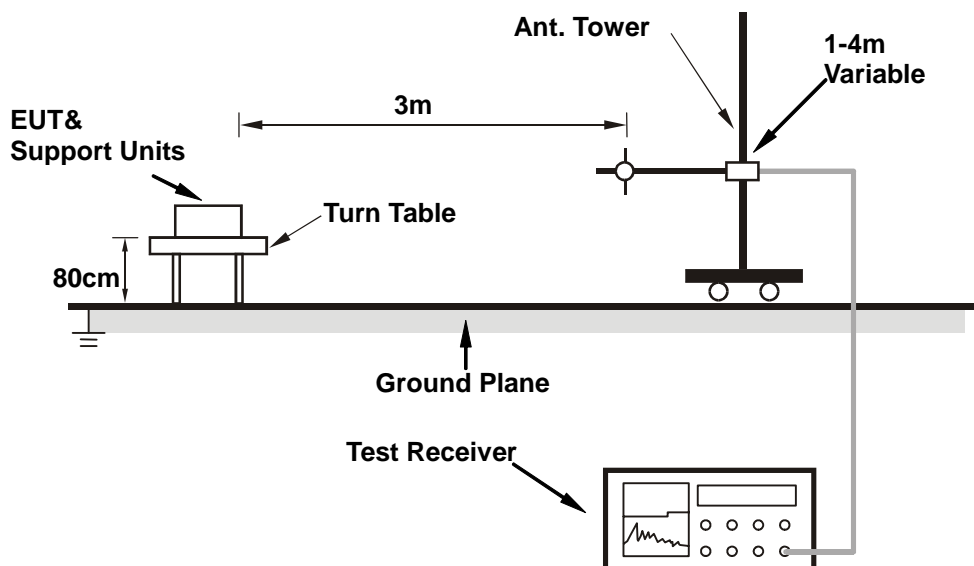

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 4.2.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.



A D T

## 4.2.7 TEST RESULTS

### ABOVE 1GHz DATA

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.9 PK	74.0	-12.1	1.00 H	66	31.65	30.24
2	2390.00	44.6 AV	54.0	-9.5	1.00 H	66	14.31	30.24
3	2400.00	48.3 PK	74.0	-25.7	1.00 H	66	18.04	30.29
4	2400.00	21.6 AV	54.0	-32.4	1.00 H	66	-8.66	30.29
5	*2410.00	102.4 PK	114.0	-11.6	1.00 H	66	72.11	30.32
6	*2410.00	75.7 AV	94.0	-18.3	1.00 H	66	45.41	30.32
7	4820.00	55.7 PK	74.0	-18.4	1.21 H	7	19.02	36.63
8	4820.00	29.0 AV	54.0	-25.1	1.21 H	7	-7.68	36.63
9	7230.00	63.2 PK	74.0	-10.8	1.37 H	227	20.73	42.51
10	7230.00	36.5 AV	54.0	-17.5	1.37 H	227	-5.97	42.51

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* ” : Fundamental frequency
6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:  
$$20 \log (\text{Duty cycle}) = 20 \log (0.38 \text{ ms} / 8.22 \text{ ms}) = -26.7 \text{ dB}$$
Please see page 19 for plotted duty.



A D T

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	1.00 V	154	29.90	30.24
2	2390.00	44.3 AV	54.0	-9.7	1.00 V	154	14.07	30.24
3	2400.00	45.9 PK	74.0	-28.1	1.00 V	154	15.61	30.29
4	2400.00	19.2 AV	54.0	-34.8	1.00 V	154	-11.09	30.29
5	*2410.00	100.0 PK	114.0	-14.0	1.00 V	154	69.68	30.32
6	*2410.00	73.3 AV	94.0	-20.7	1.00 V	154	42.98	30.32
7	4820.00	59.7 PK	74.0	-14.3	1.09 V	146	23.10	36.63
8	4820.00	33.0 AV	54.0	-21.0	1.09 V	146	-3.60	36.63
9	7230.00	60.1 PK	74.0	-13.9	1.25 V	108	17.63	42.51
10	7230.00	33.4 AV	54.0	-20.6	1.25 V	108	-9.07	42.51

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “ : Fundamental frequency
6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:  
 $20 \log (\text{Duty cycle}) = 20 \log (0.38 \text{ ms} / 8.22 \text{ ms}) = -26.7 \text{ dB}$   
Please see page 19 for plotted duty.





A D T

<b>CHANNEL</b>	TX Channel 32	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	103.6 PK	114.0	-10.4	1.00 H	67	73.20	30.43
2	*2441.00	76.9 AV	94.0	-17.1	1.00 H	67	46.50	30.43
3	4882.00	57.4 PK	74.0	-16.6	1.34 H	114	20.63	36.79
4	4882.00	30.7 AV	54.0	-23.3	1.34 H	114	-6.07	36.79
5	7323.00	63.4 PK	74.0	-10.6	1.36 H	75	20.74	42.69
6	7323.00	36.7 AV	54.0	-17.3	1.36 H	75	-5.96	42.69

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	100.4 PK	114.0	-13.6	1.00 V	93	69.97	30.43
2	*2441.00	73.7 AV	94.0	-20.3	1.00 V	93	43.27	30.43
3	4882.00	60.5 PK	74.0	-13.5	1.16 V	154	23.72	36.79
4	4882.00	33.8 AV	54.0	-20.2	1.16 V	154	-2.98	36.79
5	7323.00	63.1 PK	74.0	-10.9	1.15 V	40	20.42	42.69
6	7323.00	36.4 AV	54.0	-17.6	1.15 V	40	-6.28	42.69

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “ : Fundamental frequency
6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:  
 $20 \log (\text{Duty cycle}) = 20 \log (0.38 \text{ ms} / 8.22 \text{ ms}) = -26.7 \text{ dB}$   
 Please see page 19 for plotted duty.



A D T

<b>CHANNEL</b>	TX Channel 64	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2473.00	105.0 PK	114.0	-9.1	1.00 H	67	74.41	30.54
2	*2473.00	78.3 AV	94.0	-15.8	1.00 H	67	47.71	30.54
3	2483.50	51.0 PK	74.0	-23.1	1.00 H	67	20.38	30.57
4	2483.50	24.3 AV	54.0	-29.8	1.00 H	67	-6.32	30.57
5	4946.00	54.8 PK	74.0	-19.2	1.02 H	126	17.84	36.95
6	4946.00	28.1 AV	54.0	-25.9	1.02 H	126	-8.86	36.95
7	7419.00	63.9 PK	74.0	-10.1	1.40 H	228	21.08	42.84
8	7419.00	37.2 AV	54.0	-16.8	1.40 H	228	-5.62	42.84

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**


NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2473.00	97.2 PK	114.0	-16.8	1.00 V	169	66.62	30.54
2	*2473.00	70.5 AV	94.0	-23.5	1.00 V	169	39.92	30.54
3	2483.50	43.2 PK	74.0	-30.8	1.00 V	169	12.59	30.57
4	2483.50	16.5 AV	54.0	-37.5	1.00 V	169	-14.11	30.57
5	4946.00	56.0 PK	74.0	-18.0	1.38 V	179	19.09	36.95
6	4946.00	29.3 AV	54.0	-24.7	1.38 V	179	-7.61	36.95
7	7419.00	63.8 PK	74.0	-10.2	1.41 V	97	20.99	42.84
8	7419.00	37.1 AV	54.0	-16.9	1.41 V	97	-5.71	42.84

**REMARKS:**

- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
- Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- The other emission levels were very low against the limit.
- Margin value = Emission level – Limit value.
- \* \* : Fundamental frequency
- The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:  
 $20 \log (\text{Duty cycle}) = 20 \log (0.38 \text{ ms} / 8.22 \text{ ms}) = -26.7 \text{ dB}$   
 Please see page 19 for plotted duty.



A D T

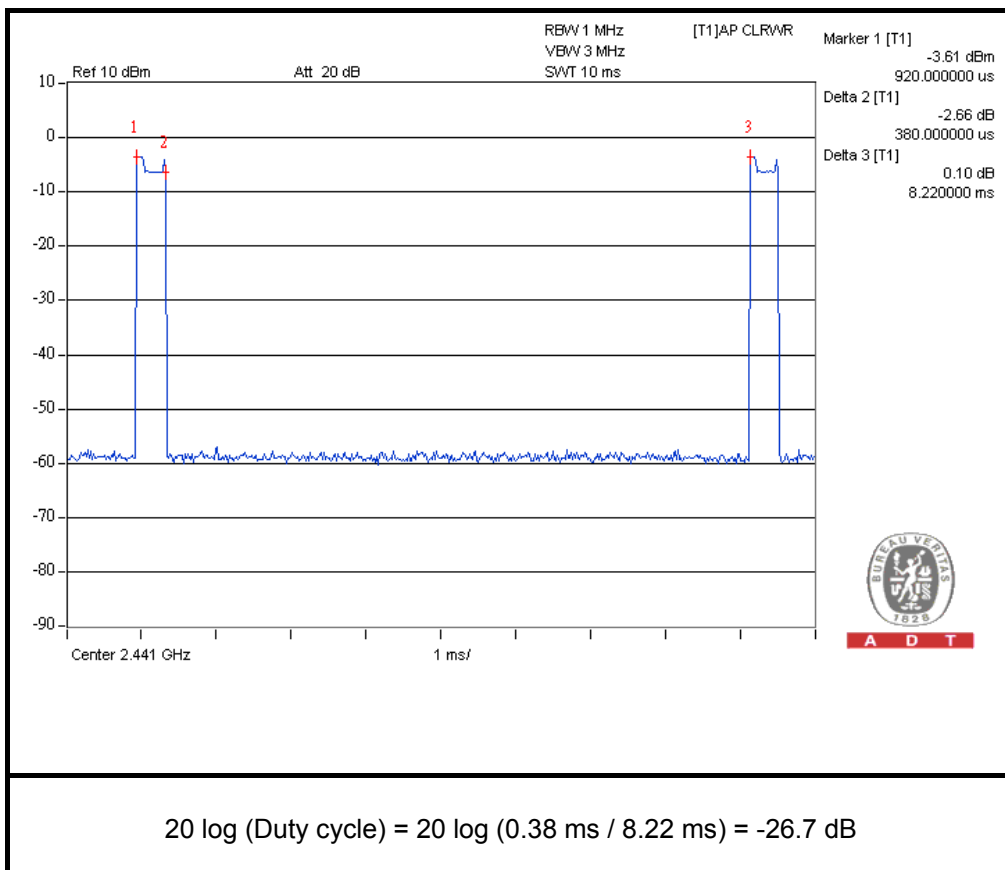

A D T



A D T

### BELOW 1GHz WORST-CASE DATA

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak
FREQUENCY RANGE	Below 1000MHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	424.47	25.7 QP	46.0	-20.3	1.08 H	190	6.72	18.98
2	820.55	31.2 QP	46.0	-14.9	1.52 H	130	4.32	26.83
3	839.95	35.3 QP	46.0	-10.7	1.33 H	340	8.15	27.13
4	894.92	33.7 QP	46.0	-12.4	1.88 H	254	5.78	27.87
5	930.48	34.0 QP	46.0	-12.0	1.54 H	313	5.81	28.22
6	959.58	33.9 QP	46.0	-12.1	1.09 H	347	5.39	28.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	529.55	27.9 QP	46.0	-18.1	1.07 V	10	6.16	21.73
2	576.43	32.2 QP	46.0	-13.8	1.22 V	289	9.46	22.71
3	839.95	35.2 QP	46.0	-10.8	1.36 V	10	8.11	27.13
4	899.77	34.3 QP	46.0	-11.7	1.47 V	149	6.35	27.94
5	930.48	35.8 QP	46.0	-10.2	1.59 V	9	7.54	28.22
6	959.58	35.9 QP	46.0	-10.1	1.00 V	339	7.43	28.51

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.



## **7. APPENDIX A – MODIFICATION RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No modifications were made to the EUT by the lab during the test.

**---END---**