


Appendix D. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	26°C	Humidity	68%
Test Engineer	Lucas Hang	Configurations	2.4G + 5G B1 +5G B4

Horizontal

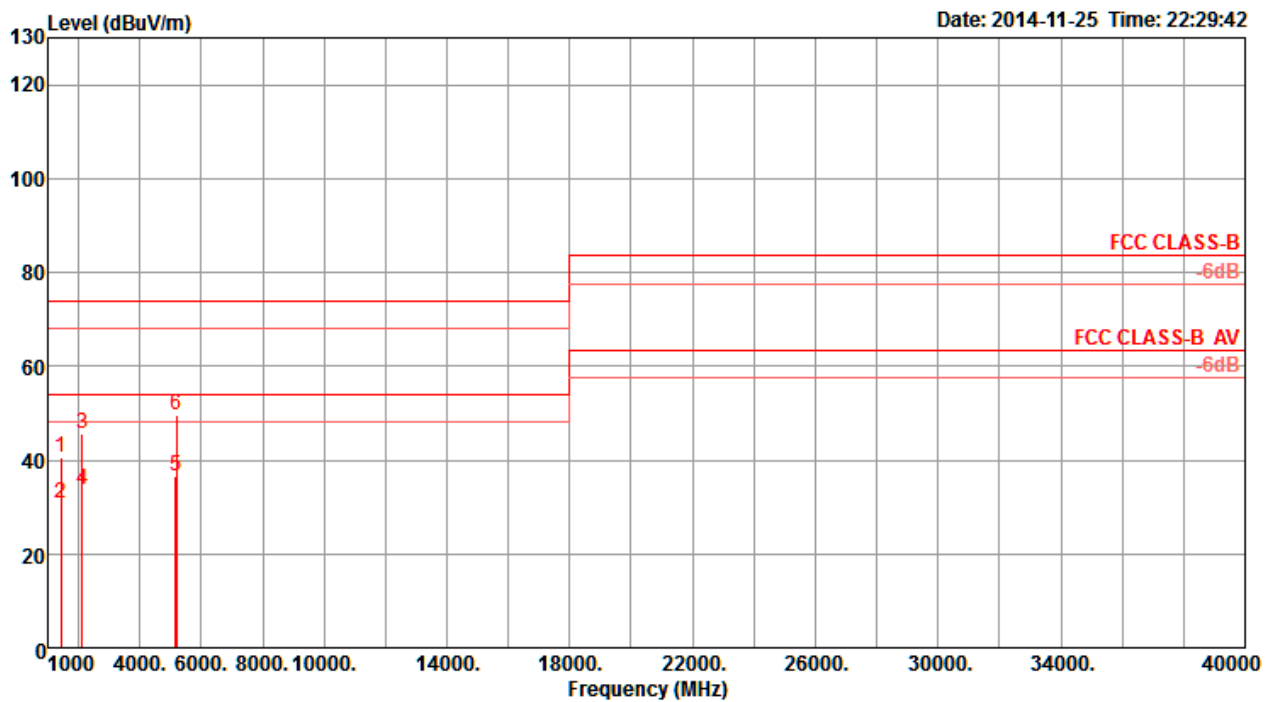

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	
1	1439.68	40.69	74.00	-33.31	48.22	2.23	25.31	35.07	Peak	226	100	HORIZONTAL
2	1440.01	30.88	54.00	-23.12	38.41	2.23	25.31	35.07	Average	226	100	HORIZONTAL
3	2118.54	45.67	74.00	-28.33	49.34	2.69	28.26	34.62	Peak	168	100	HORIZONTAL
4	2121.22	33.53	54.00	-20.47	37.20	2.69	28.26	34.62	Average	168	100	HORIZONTAL
5	5176.58	36.60	54.00	-17.40	33.67	4.27	33.19	34.53	Average	212	103	HORIZONTAL
6	5176.87	49.77	74.00	-24.23	46.84	4.27	33.19	34.53	Peak	212	103	HORIZONTAL

Vertical

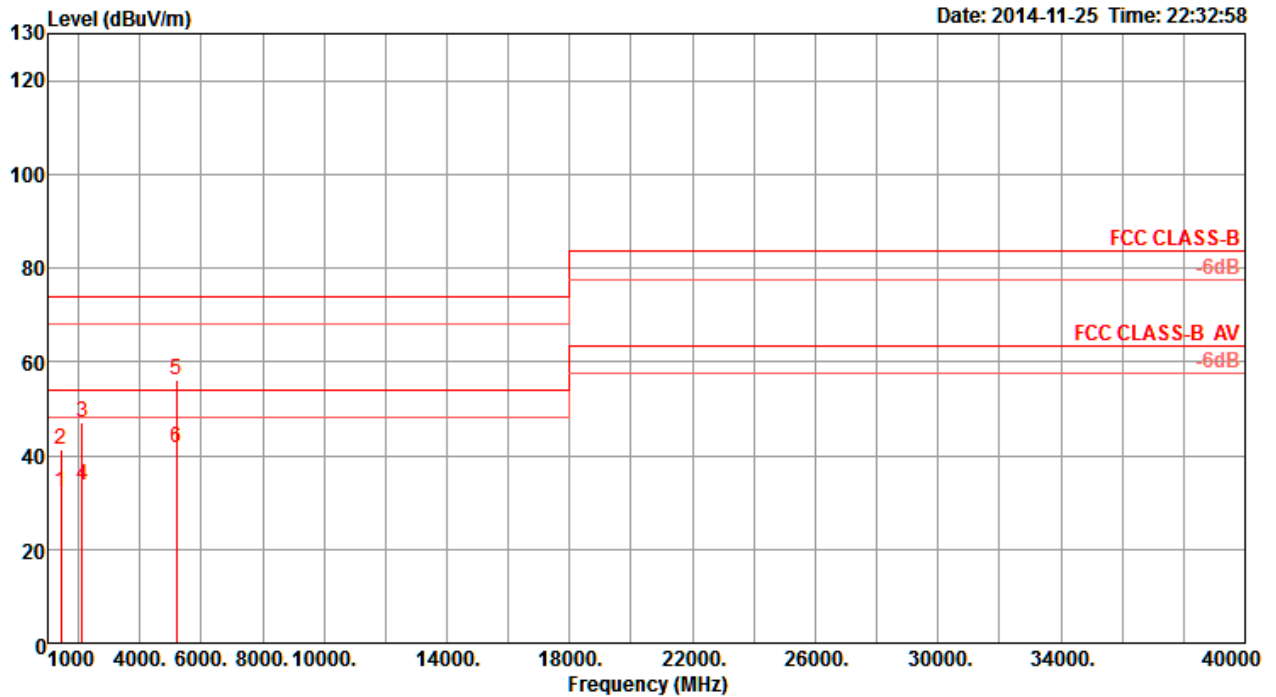

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	1440.03	32.36	54.00	-21.64	39.89	2.23	25.31	35.07	Average	297	100	VERTICAL
2	1440.09	41.42	74.00	-32.58	48.95	2.23	25.31	35.07	Peak	297	100	VERTICAL
3	2118.17	47.06	74.00	-26.94	50.73	2.69	28.26	34.62	Peak	326	100	VERTICAL
4	2121.20	33.54	54.00	-20.46	37.21	2.69	28.26	34.62	Average	326	100	VERTICAL
5	5181.42	56.10	74.00	-17.90	53.17	4.27	33.19	34.53	Peak	203	100	VERTICAL
6	5181.42	41.67	54.00	-12.33	38.74	4.27	33.19	34.53	Average	203	100	VERTICAL