




2412MHz (30MHz-25GHz)-802.11n(20MHz)(ANT 0)

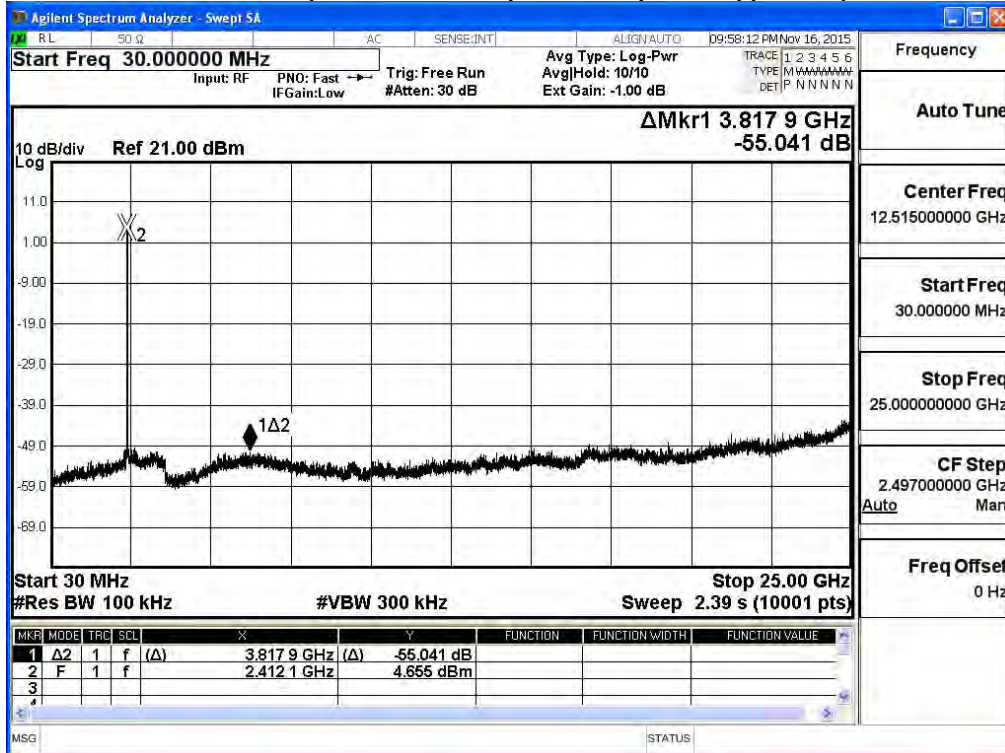


2437MHz (30MHz-25GHz)-802.11n(20MHz)(ANT 0)

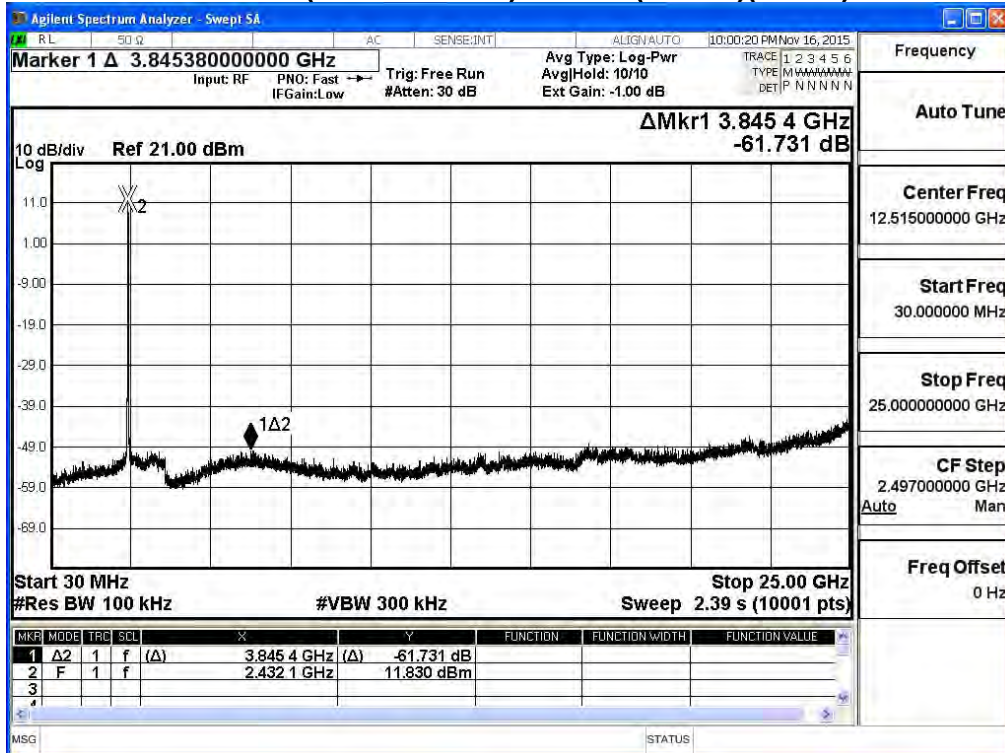


2462MHz (30MHz-25GHz)-802.11n(20MHz)(ANT 0)

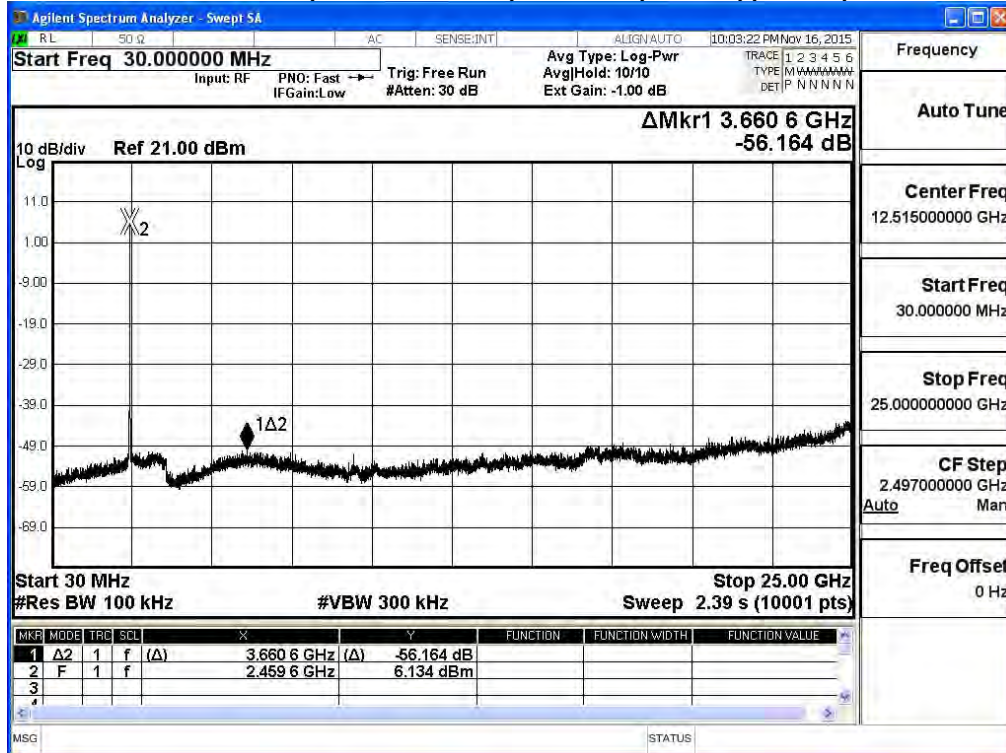

2412MHz (30MHz-25GHz)-802.11n(20MHz)(ANT 1)

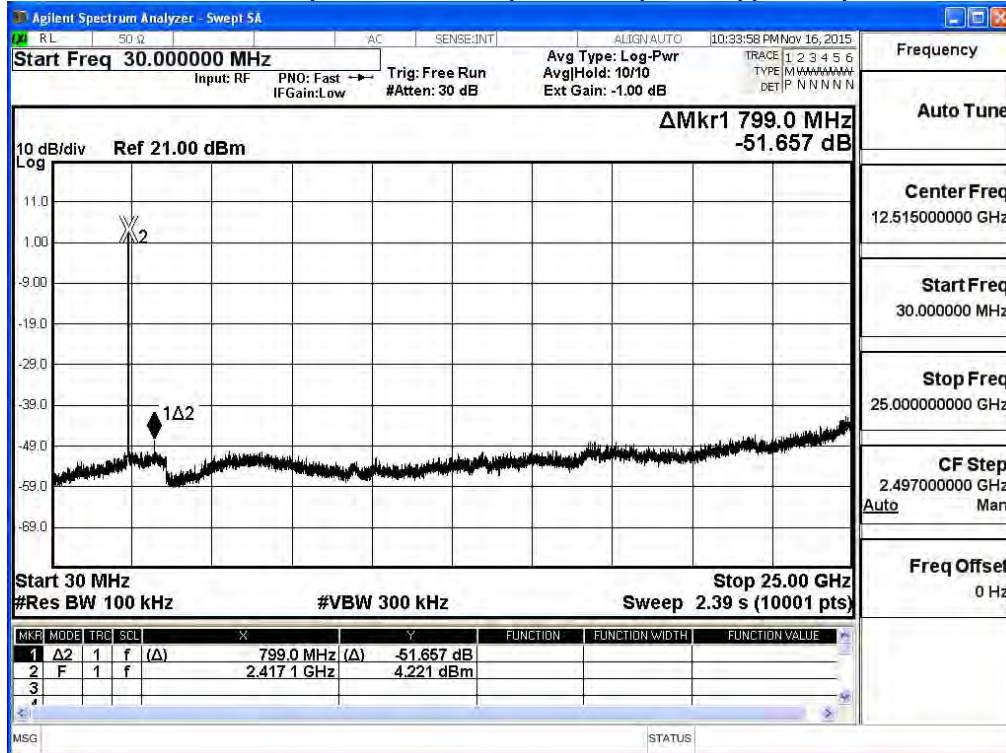


2437MHz (30MHz-25GHz)-802.11n(20MHz)(ANT 1)

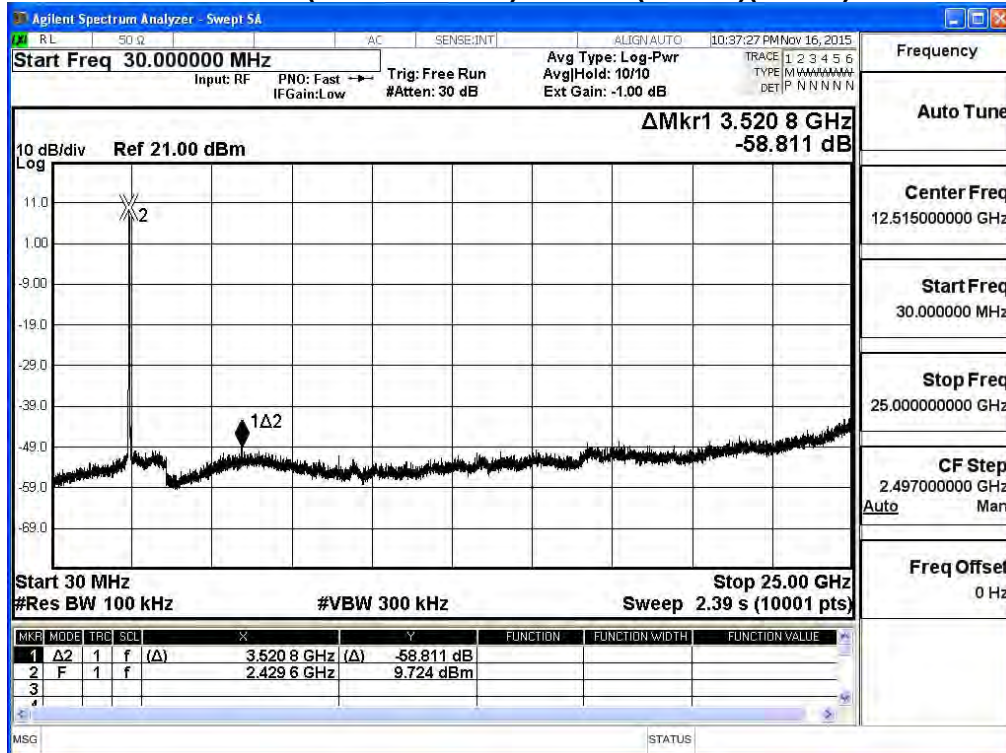


2462MHz (30MHz-25GHz)-802.11n(20MHz)(ANT 1)




2412MHz (30MHz-25GHz)-802.11n(20MHz)(ANT 2)

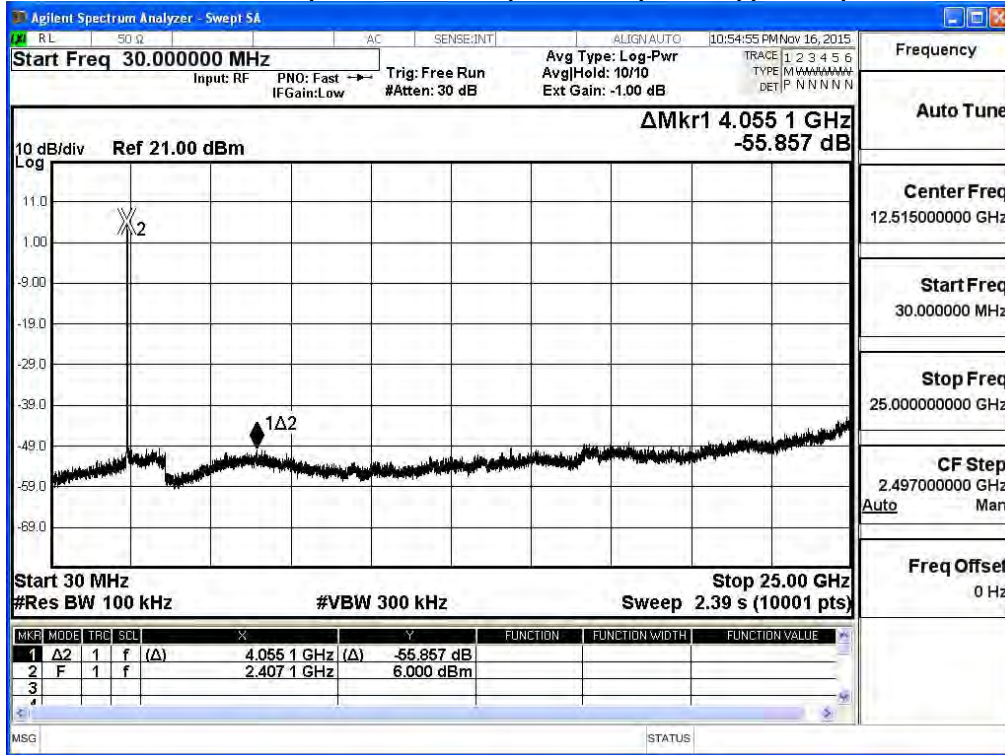


2437MHz (30MHz-25GHz)-802.11n(20MHz)(ANT 2)

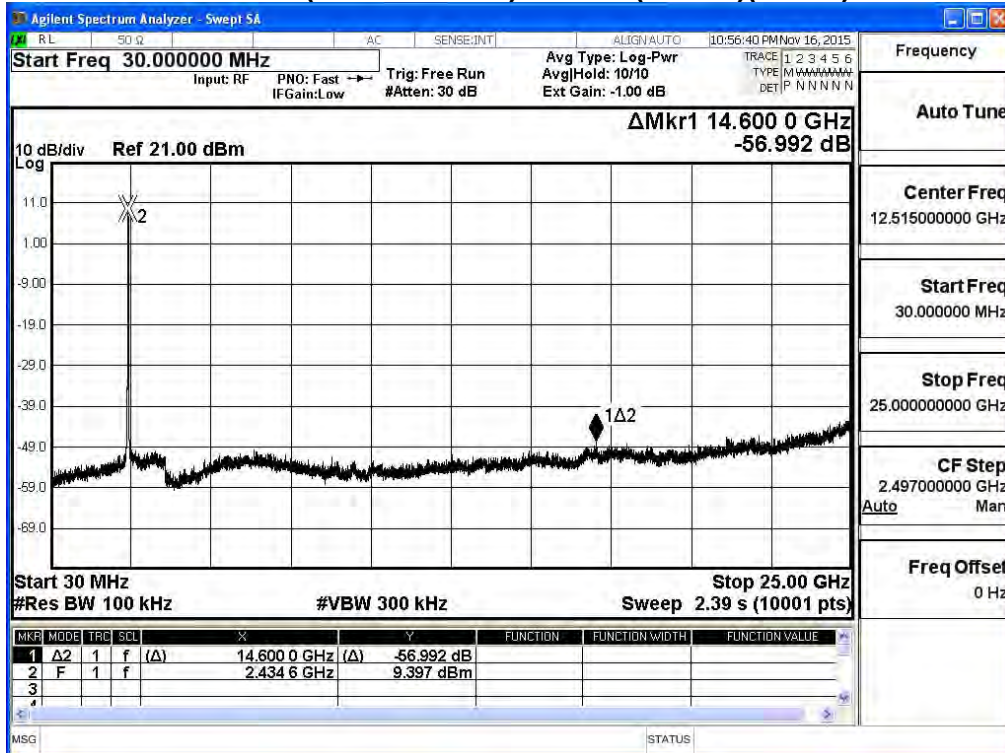


2462MHz (30MHz-25GHz)-802.11n(20MHz)(ANT 2)

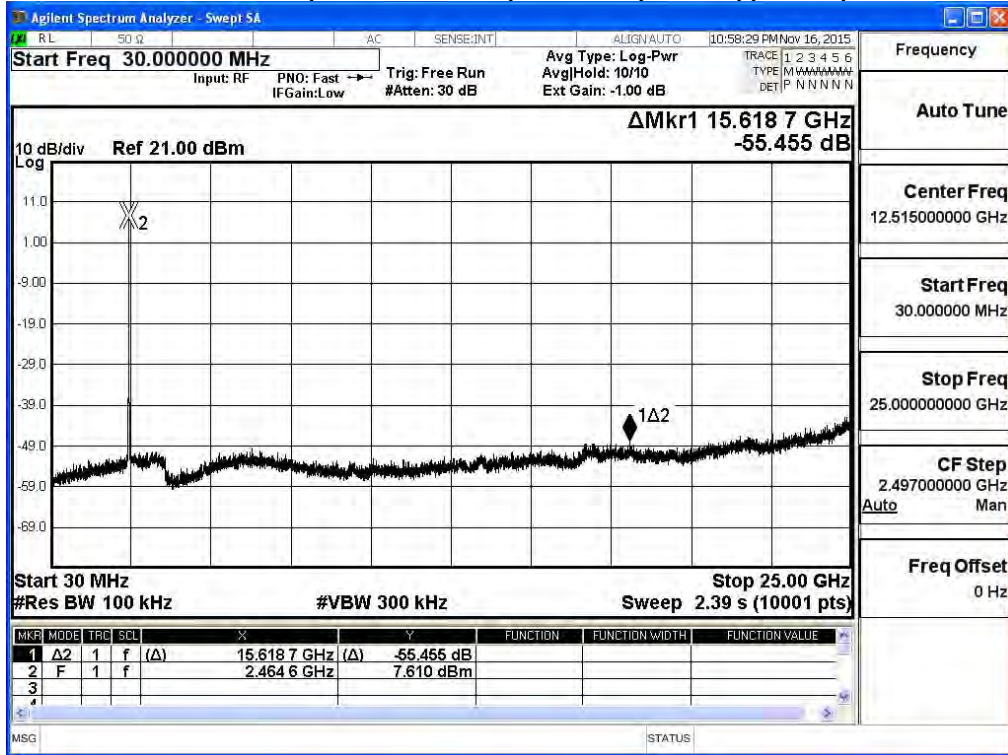


2412MHz (30MHz-25GHz)-802.11n(20MHz)(ANT 3)

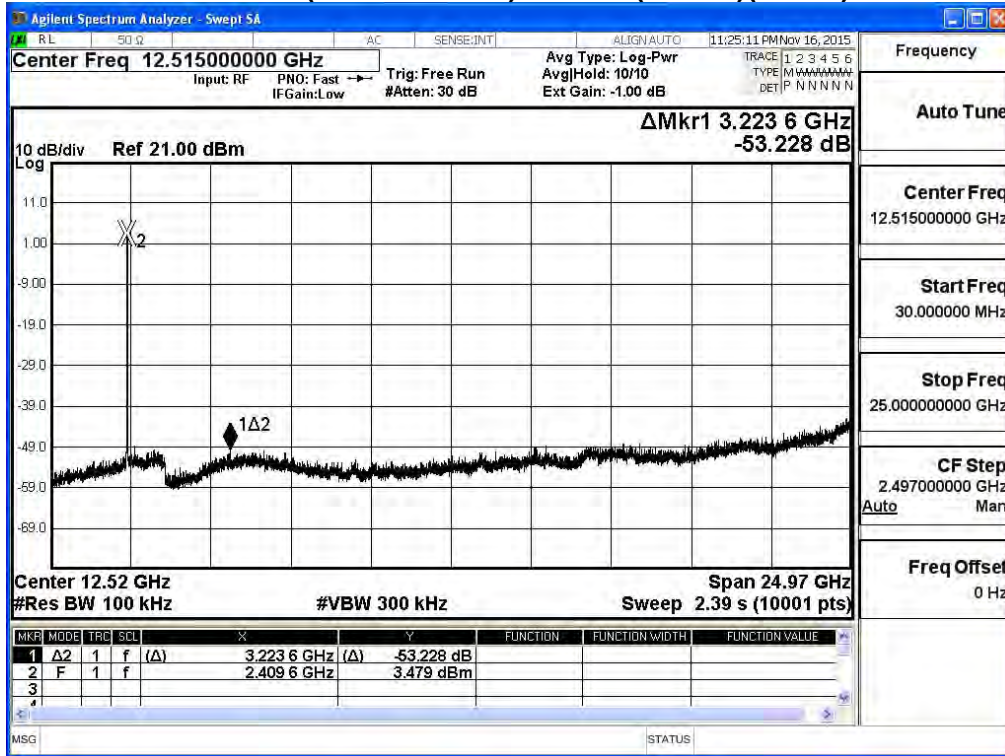


2437MHz (30MHz-25GHz)-802.11n(20MHz)(ANT 3)

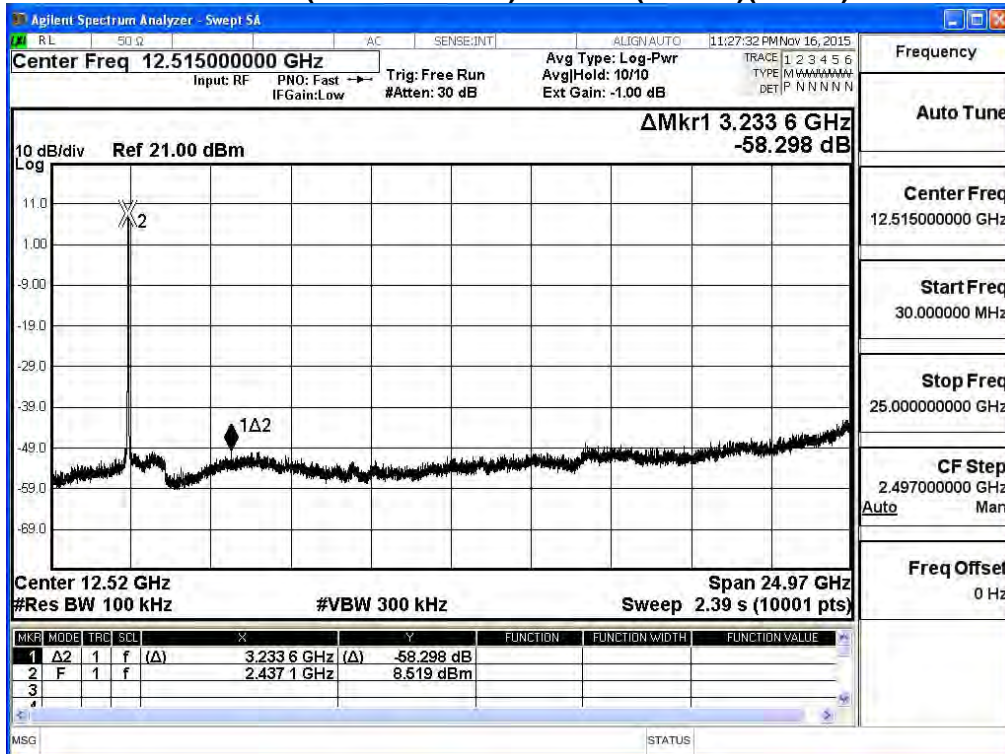


2462MHz (30MHz-25GHz)-802.11n(20MHz)(ANT 3)

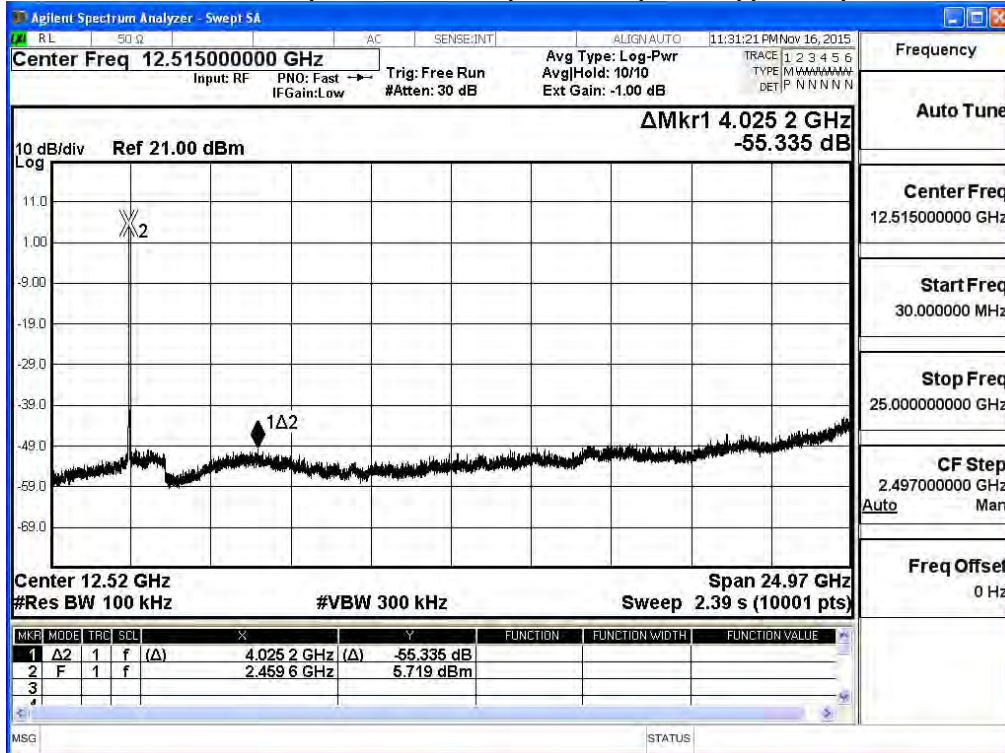


2422MHz (30MHz-25GHz)-802.11n(40MHz) (Ant 0)

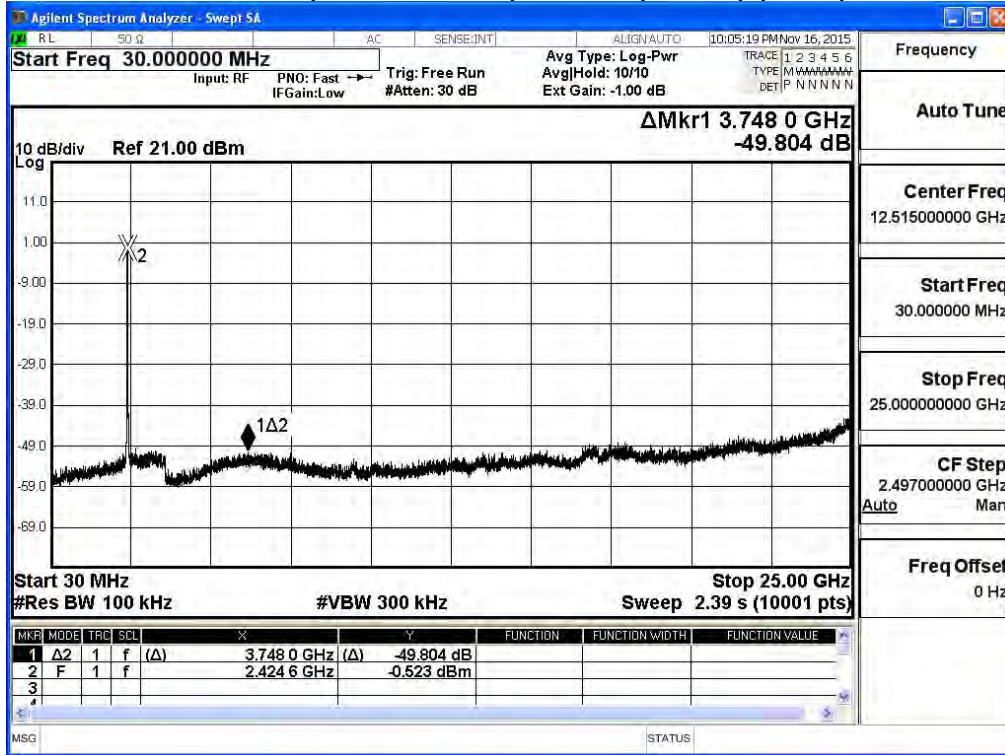


2437MHz (30MHz-25GHz)-802.11n(40MHz) (Ant 0)

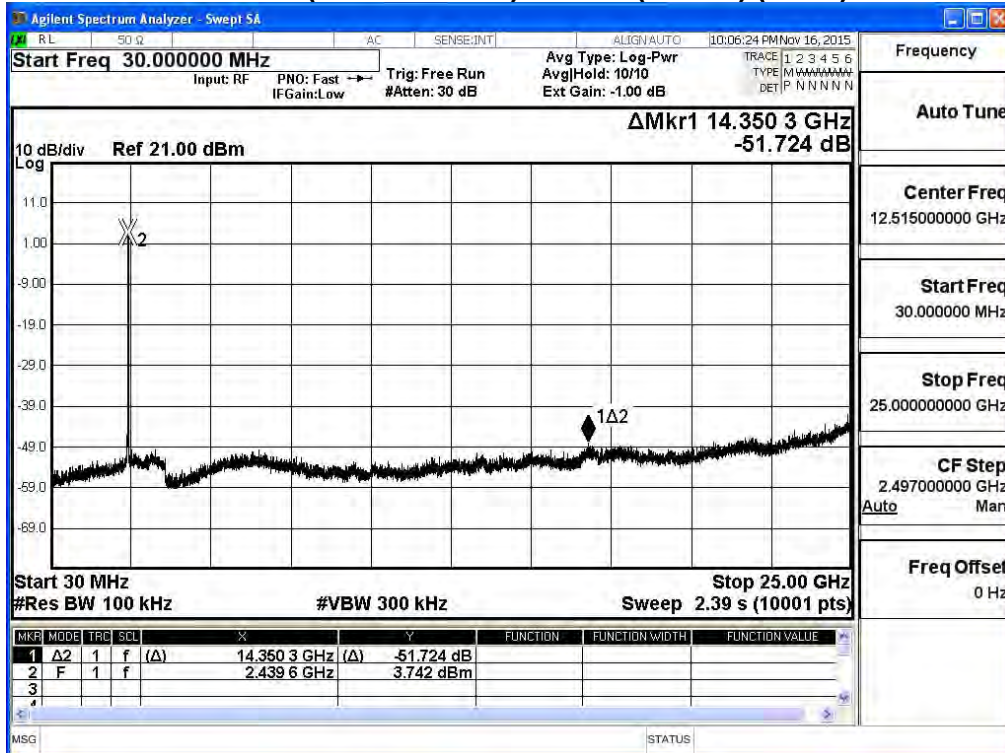


2452MHz (30MHz-25GHz)-802.11n(40MHz) (Ant 0)

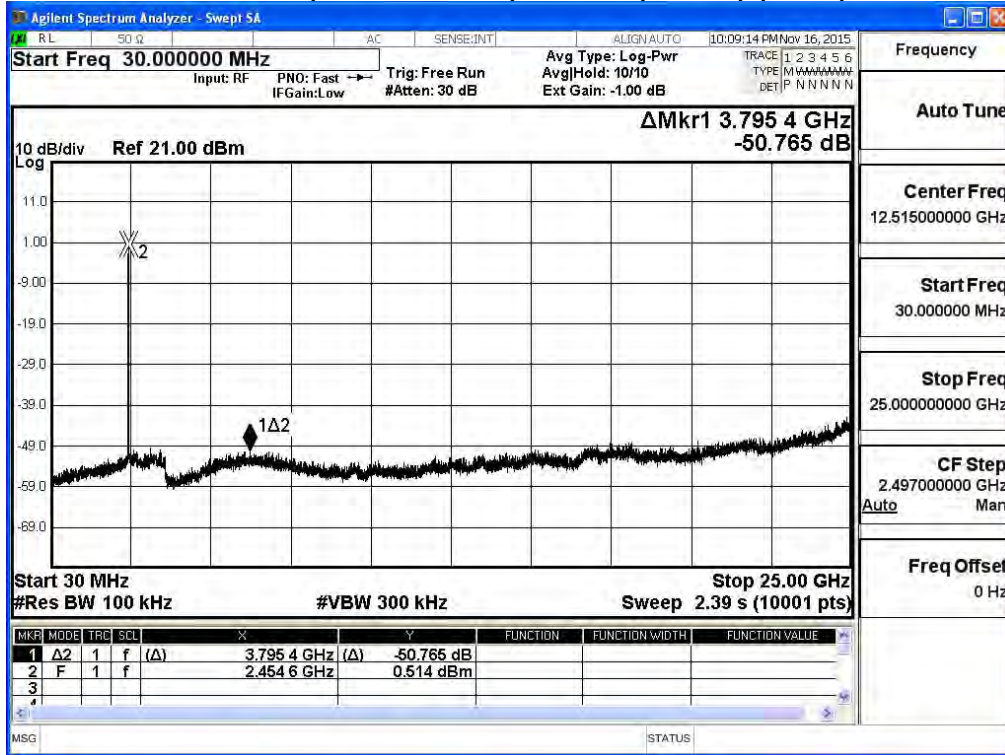


2422MHz (30MHz-25GHz)-802.11n(40MHz) (Ant 1)

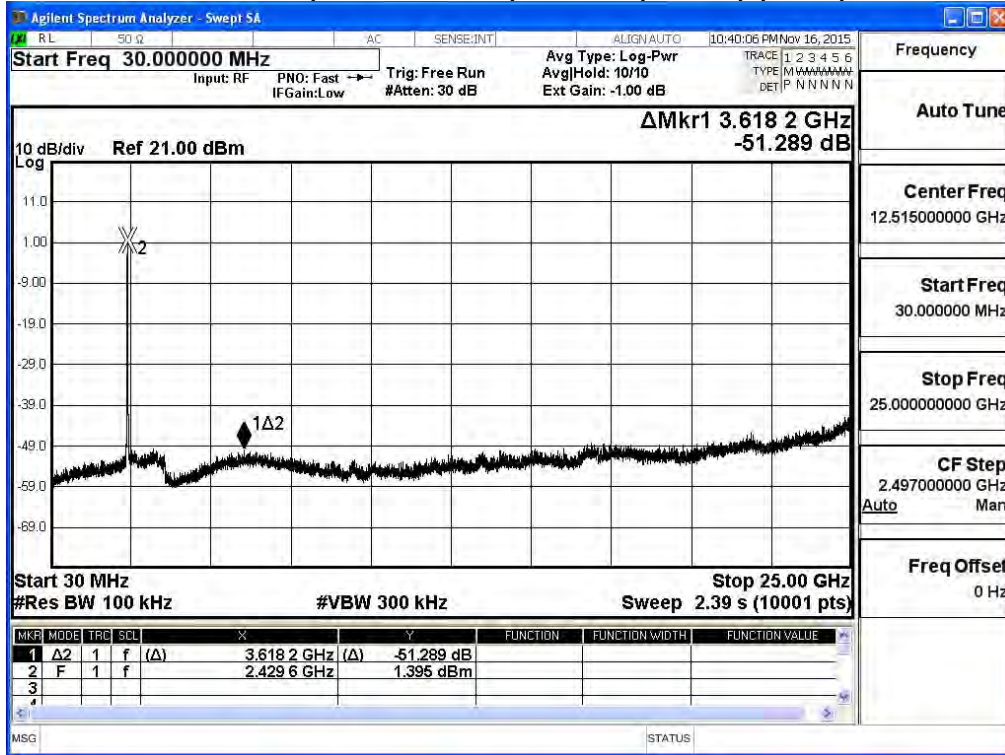


2437MHz (30MHz-25GHz)-802.11n(40MHz) (Ant 1)

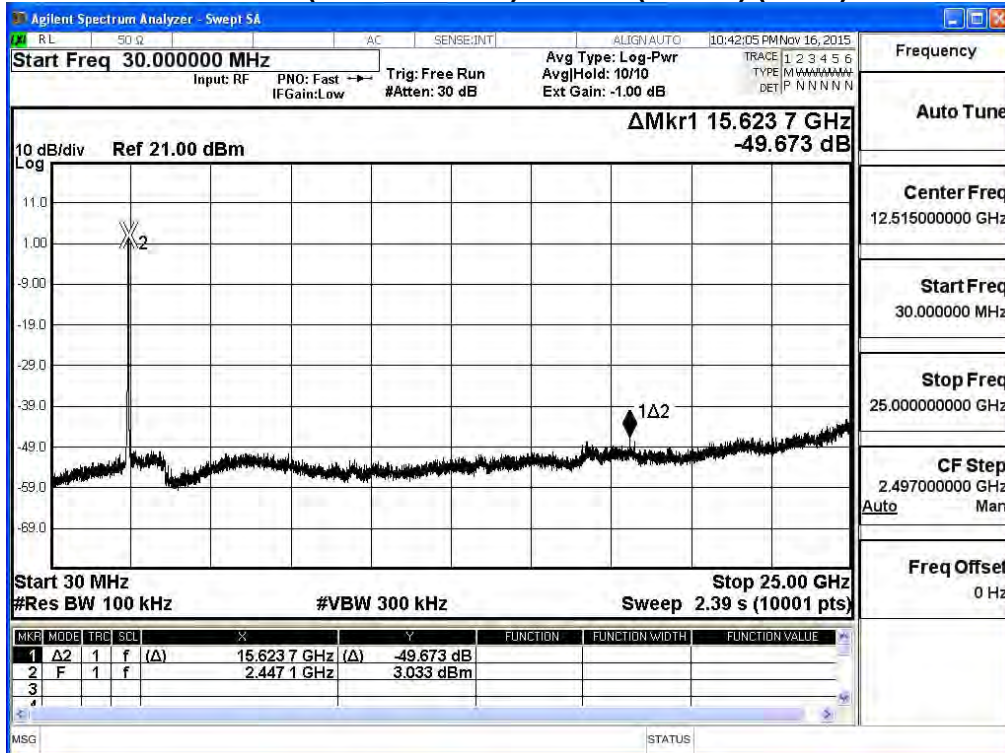


2452MHz (30MHz-25GHz)-802.11n(40MHz) (Ant 1)

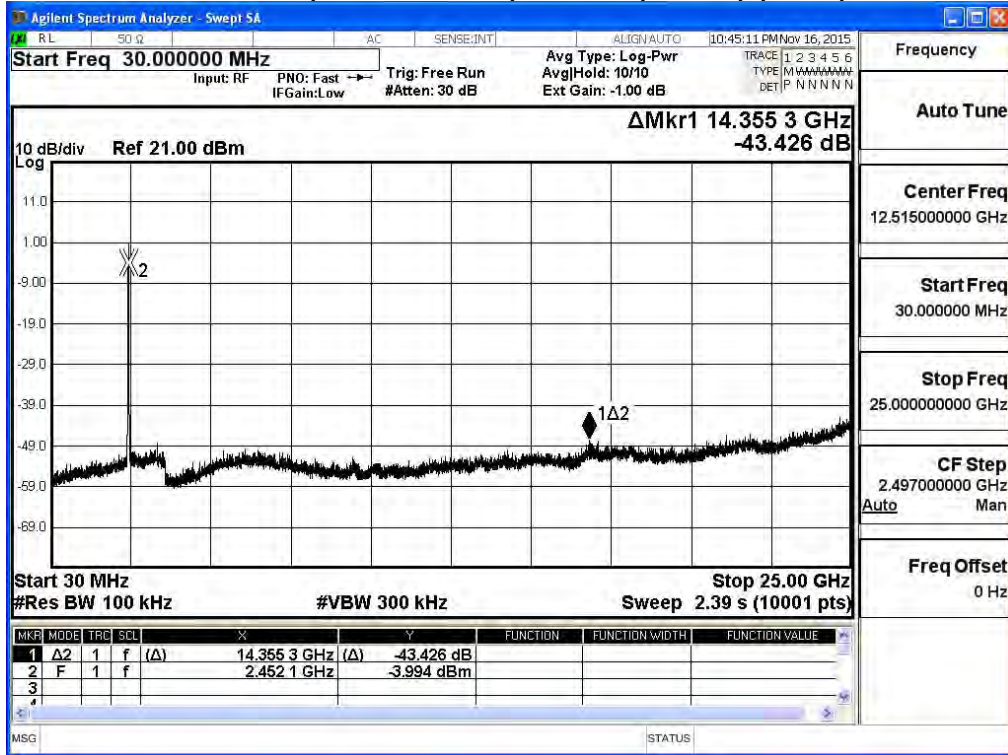


2422MHz (30MHz-25GHz)-802.11n(40MHz) (Ant 2)

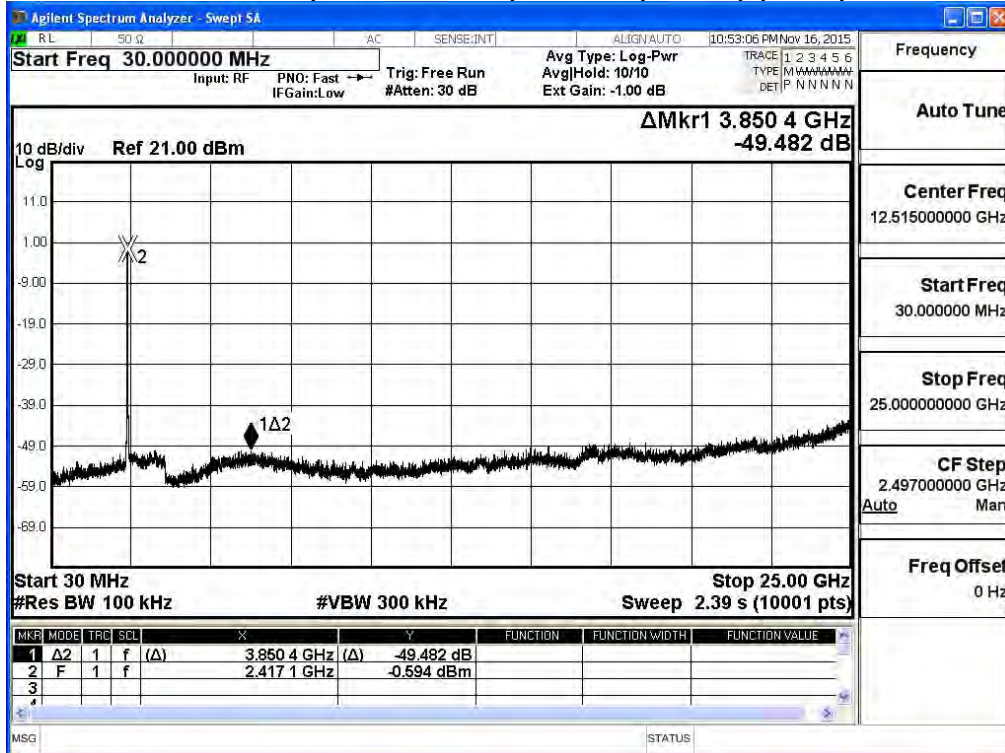


2437MHz (30MHz-25GHz)-802.11n(40MHz) (Ant 2)

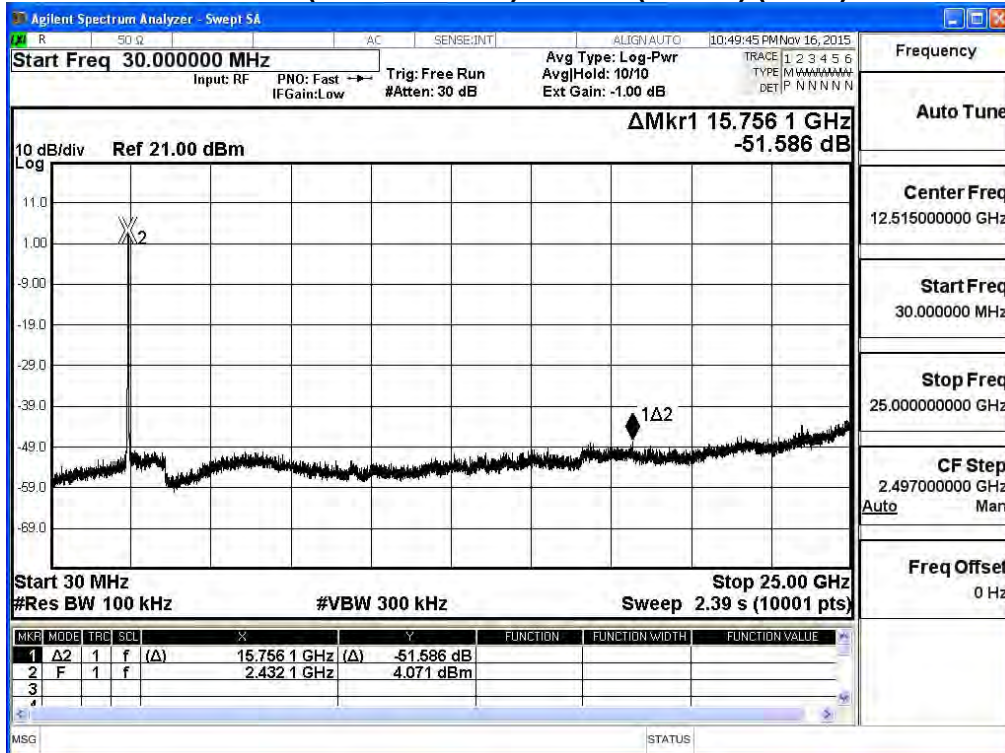


2452MHz (30MHz-25GHz)-802.11n(40MHz) (Ant 2)

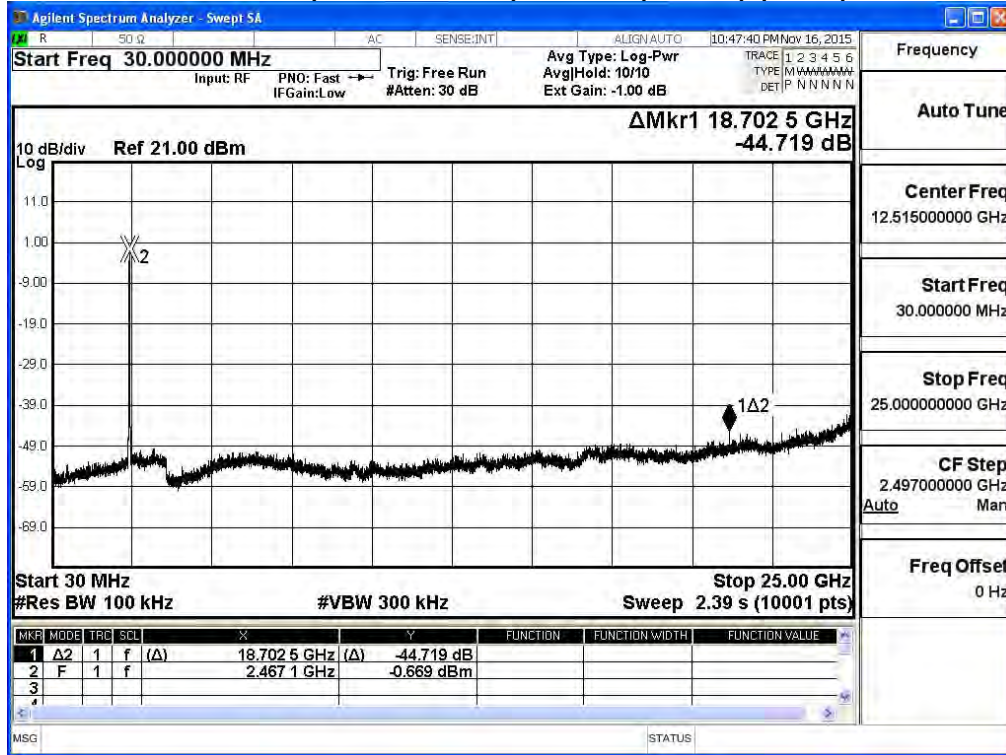


2422MHz (30MHz-25GHz)-802.11n(40MHz) (Ant 3)

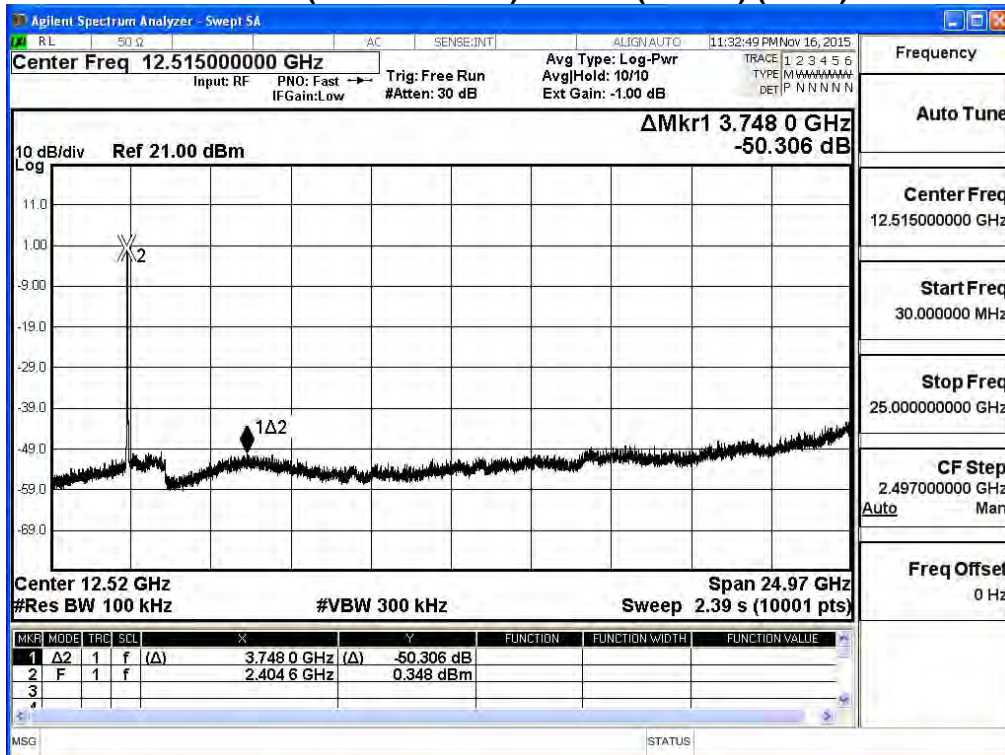

2437MHz (30MHz-25GHz)-802.11n(40MHz) (Ant 3)

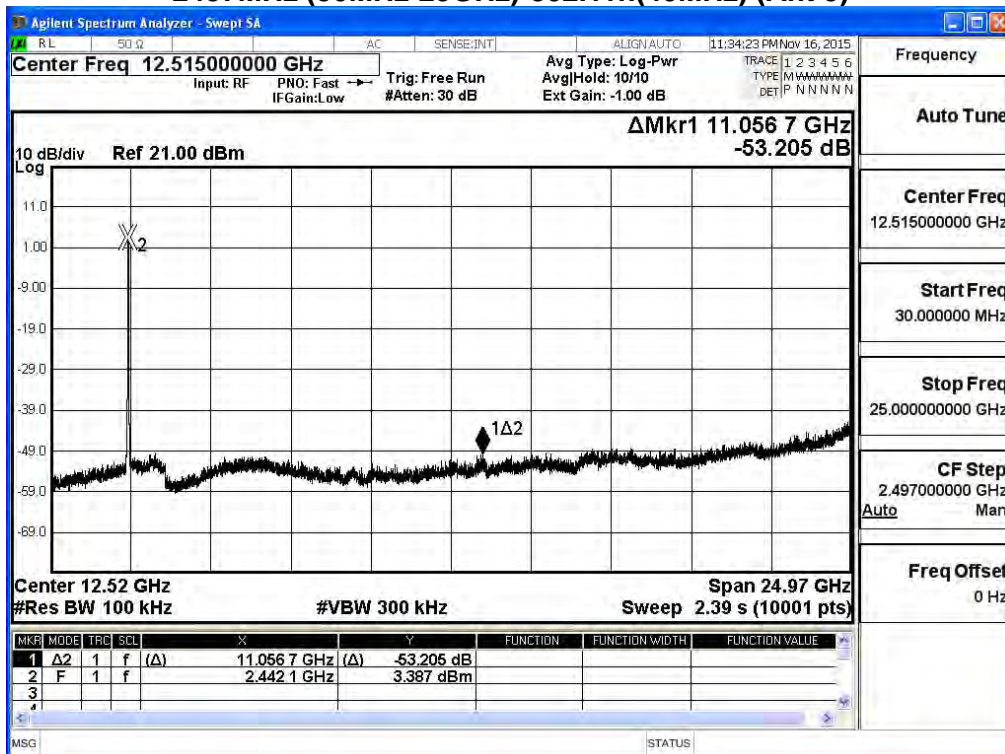


2452MHz (30MHz-25GHz)-802.11n(40MHz) (Ant 3)

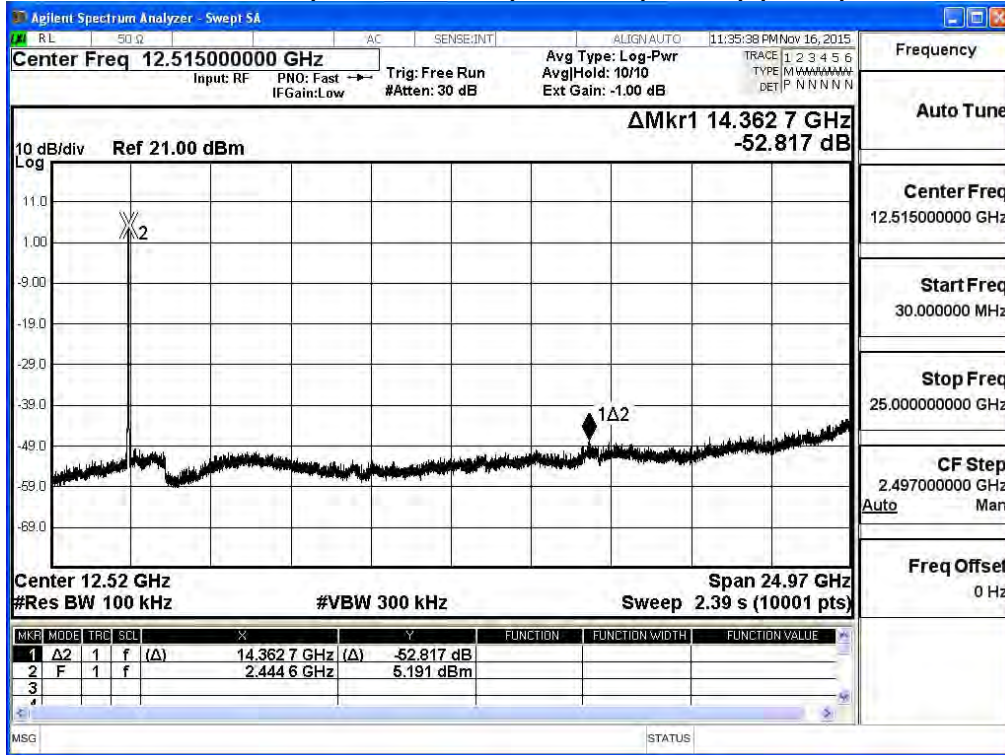


Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/02	Test Site	SR7

IEEE 802.11a (ANT 0)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
149	5745	34.062	≥ 30	Pass
157	5785	61.612	≥ 30	Pass
165	5825	38.913	≥ 30	Pass

Channel 149

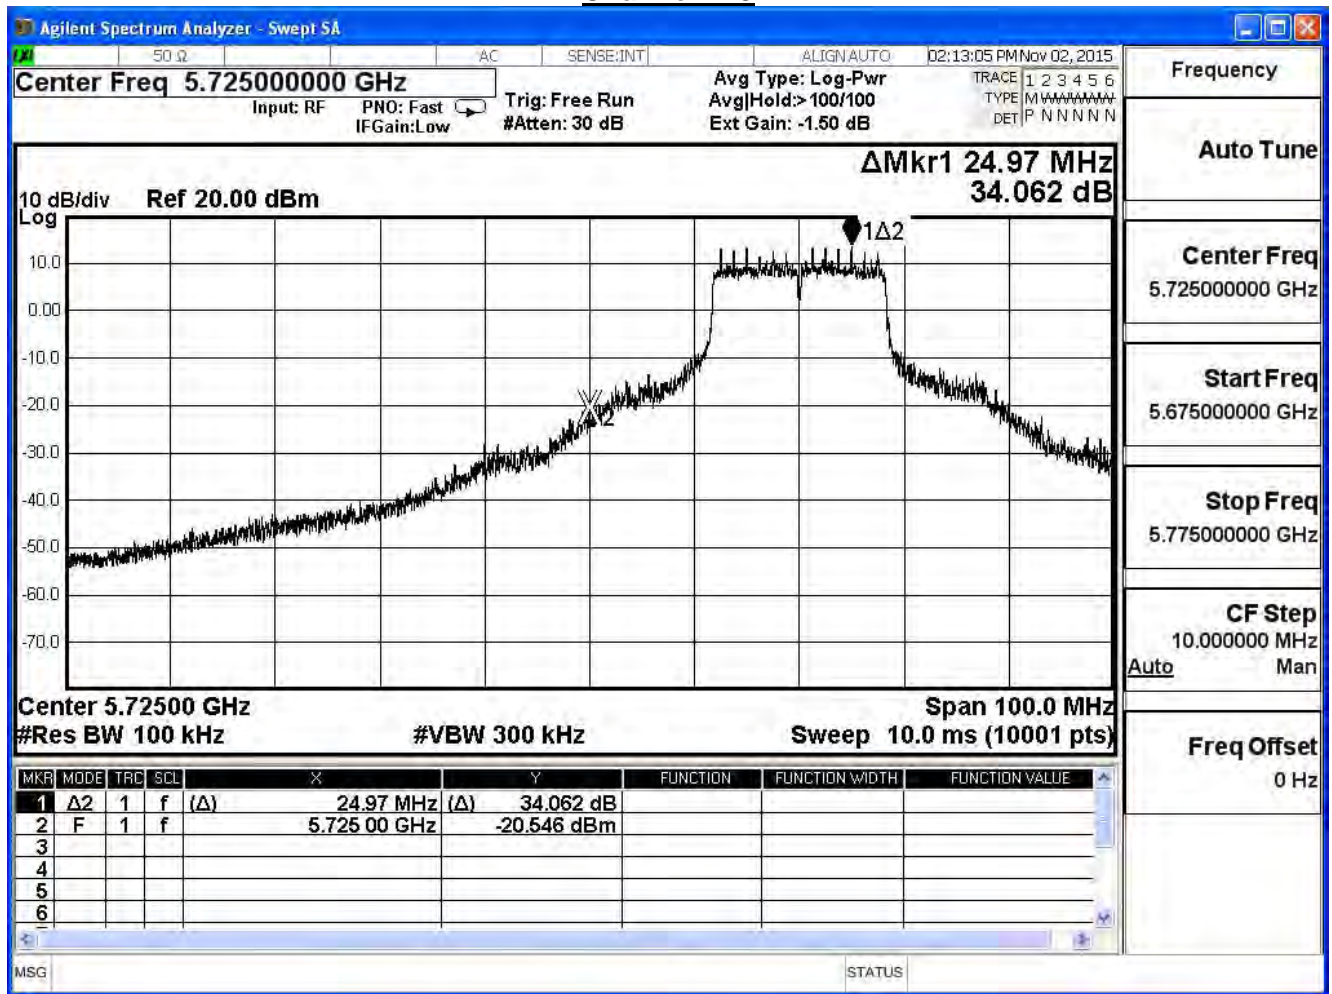

Channel 157

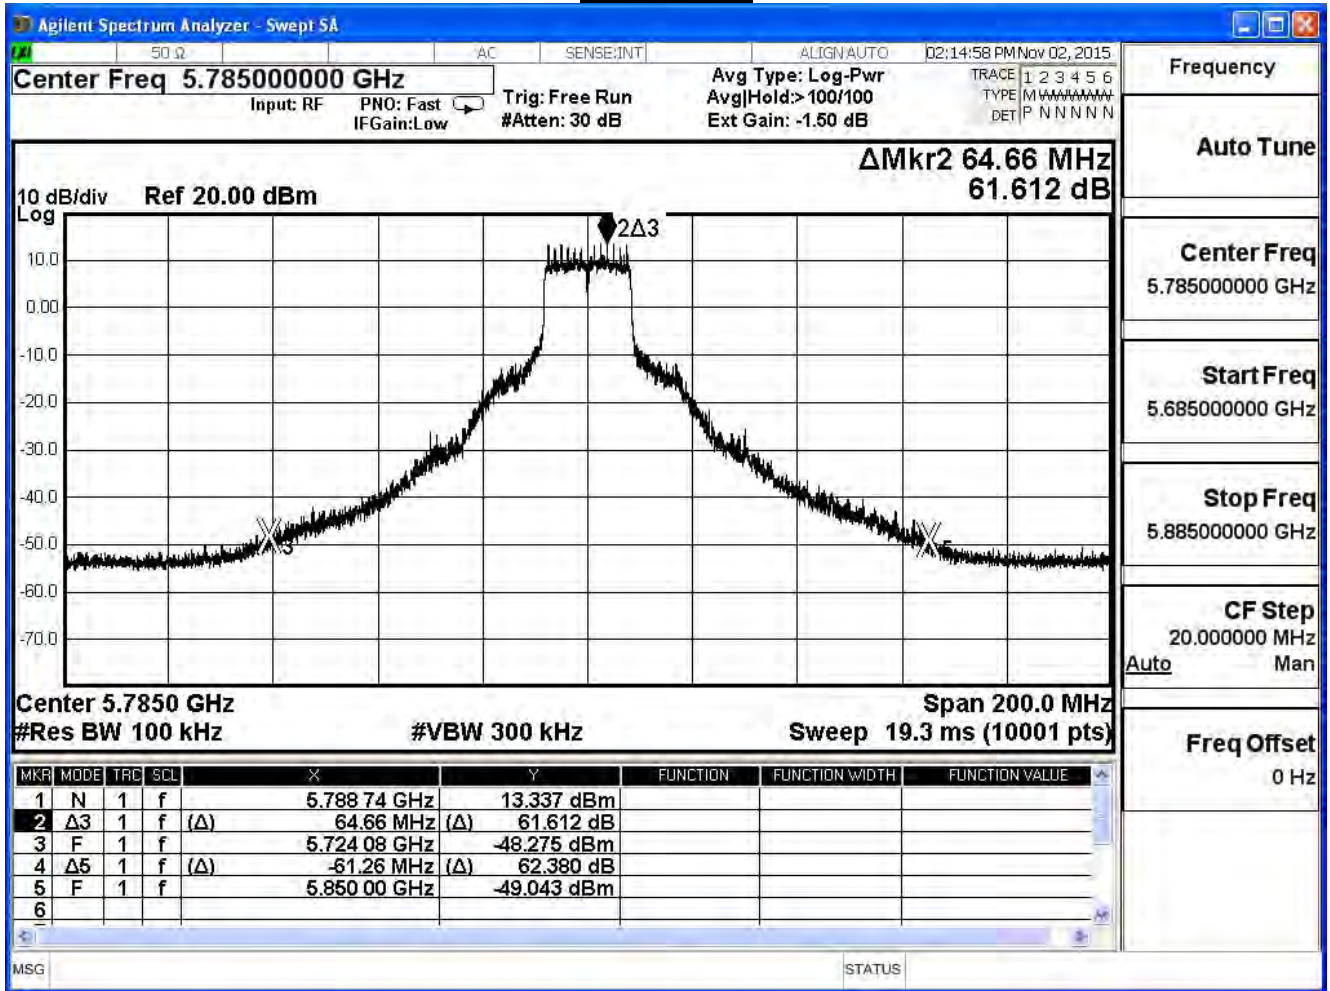


Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/06	Test Site	SR7


IEEE 802.11a (ANT 1)

Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
149	5745	37.441	≥ 30	Pass
157	5785	61.571	≥ 30	Pass
165	5825	41.127	≥ 30	Pass

Channel 149

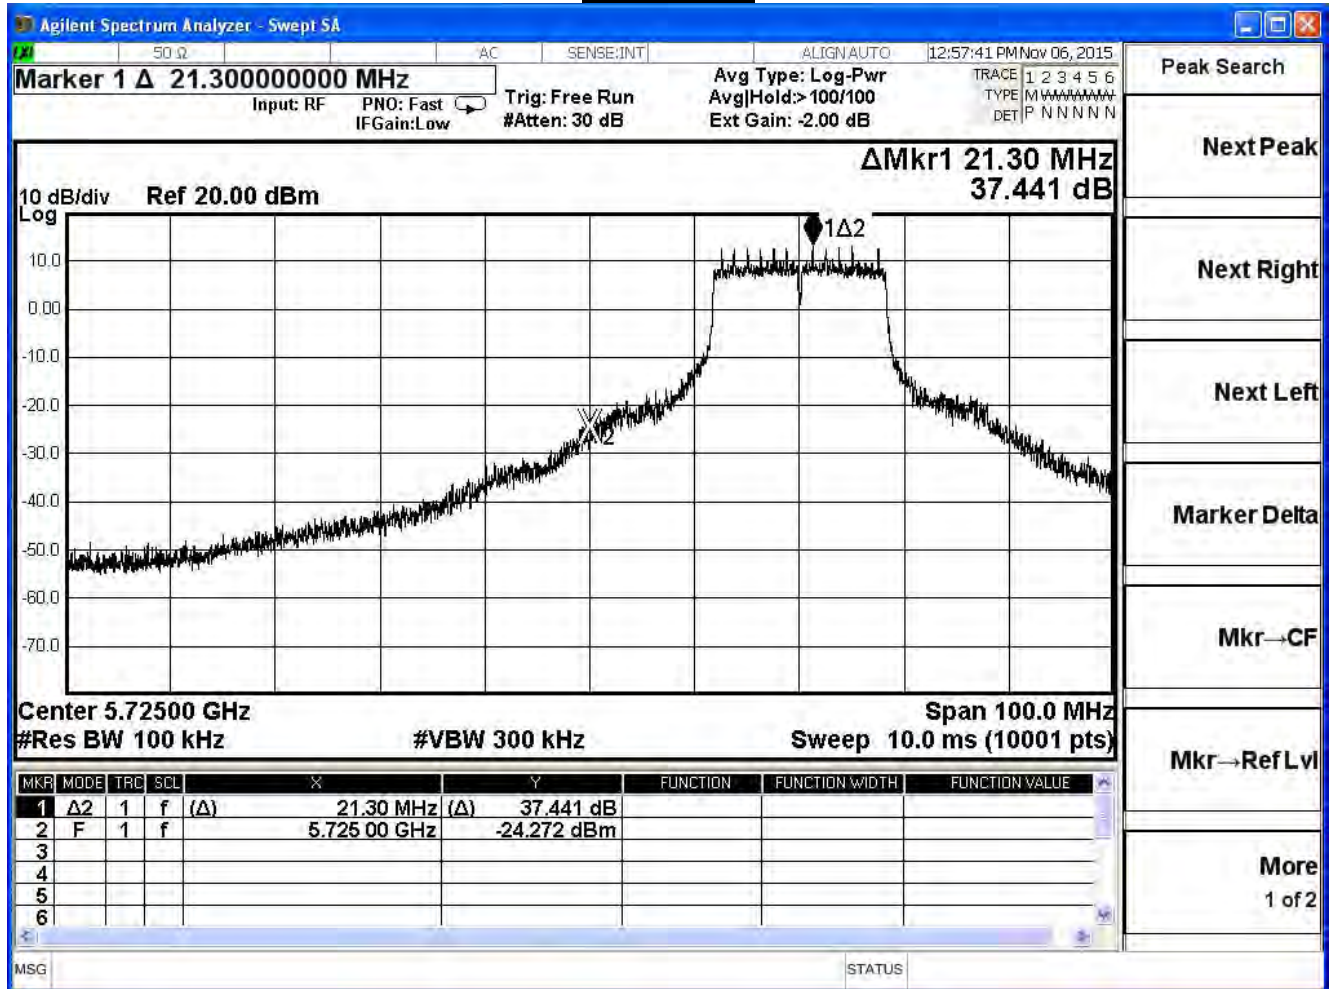


Channel 157

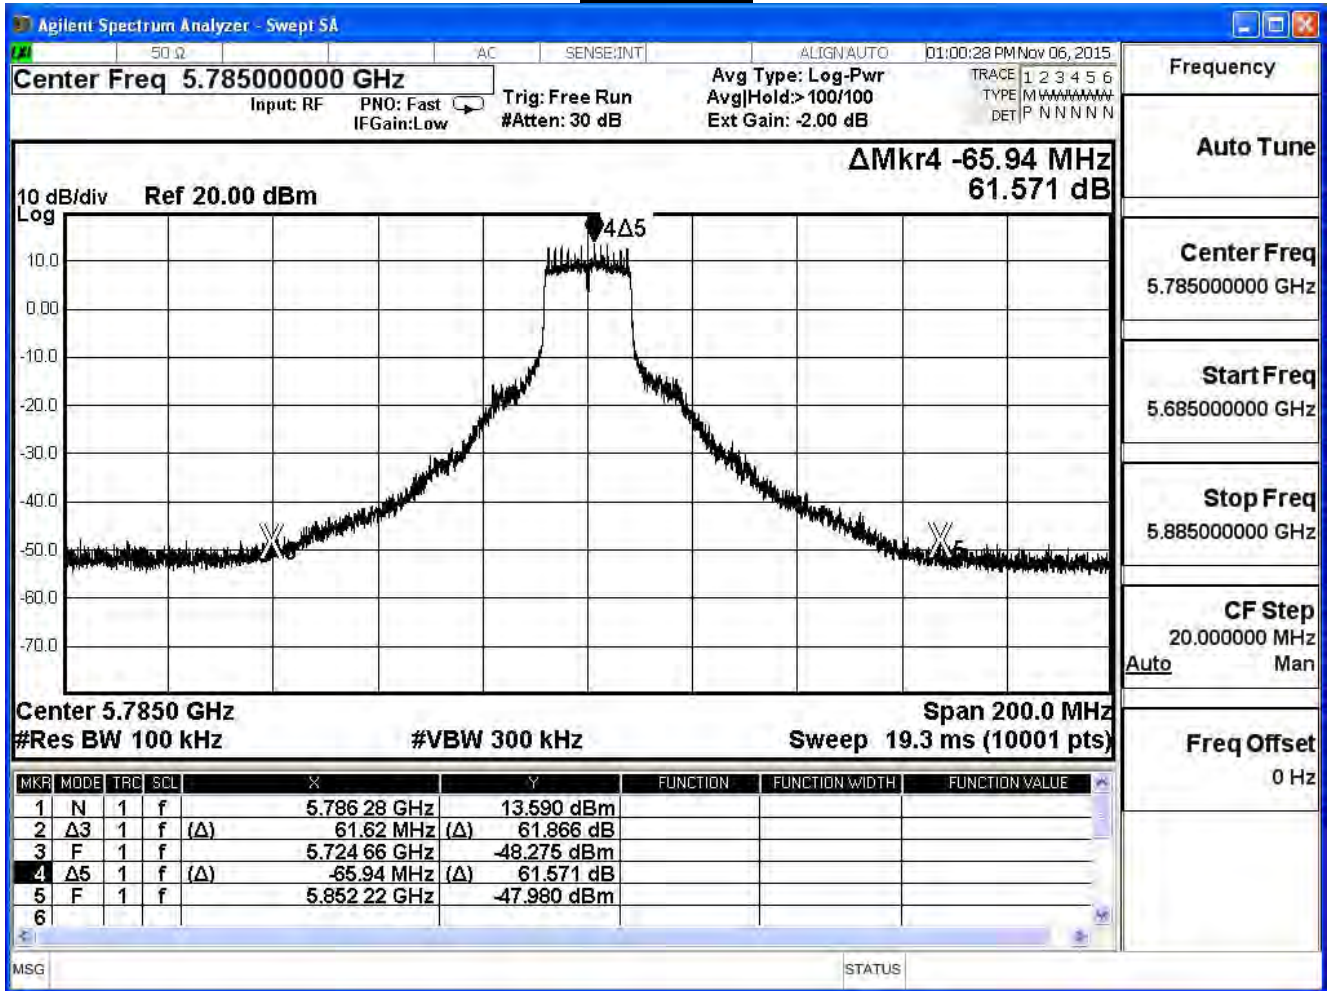


Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/06	Test Site	SR7

IEEE 802.11a (ANT 2)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
149	5745	37.314	≥ 30	Pass
157	5785	62.324	≥ 30	Pass
165	5825	40.928	≥ 30	Pass


Channel 149

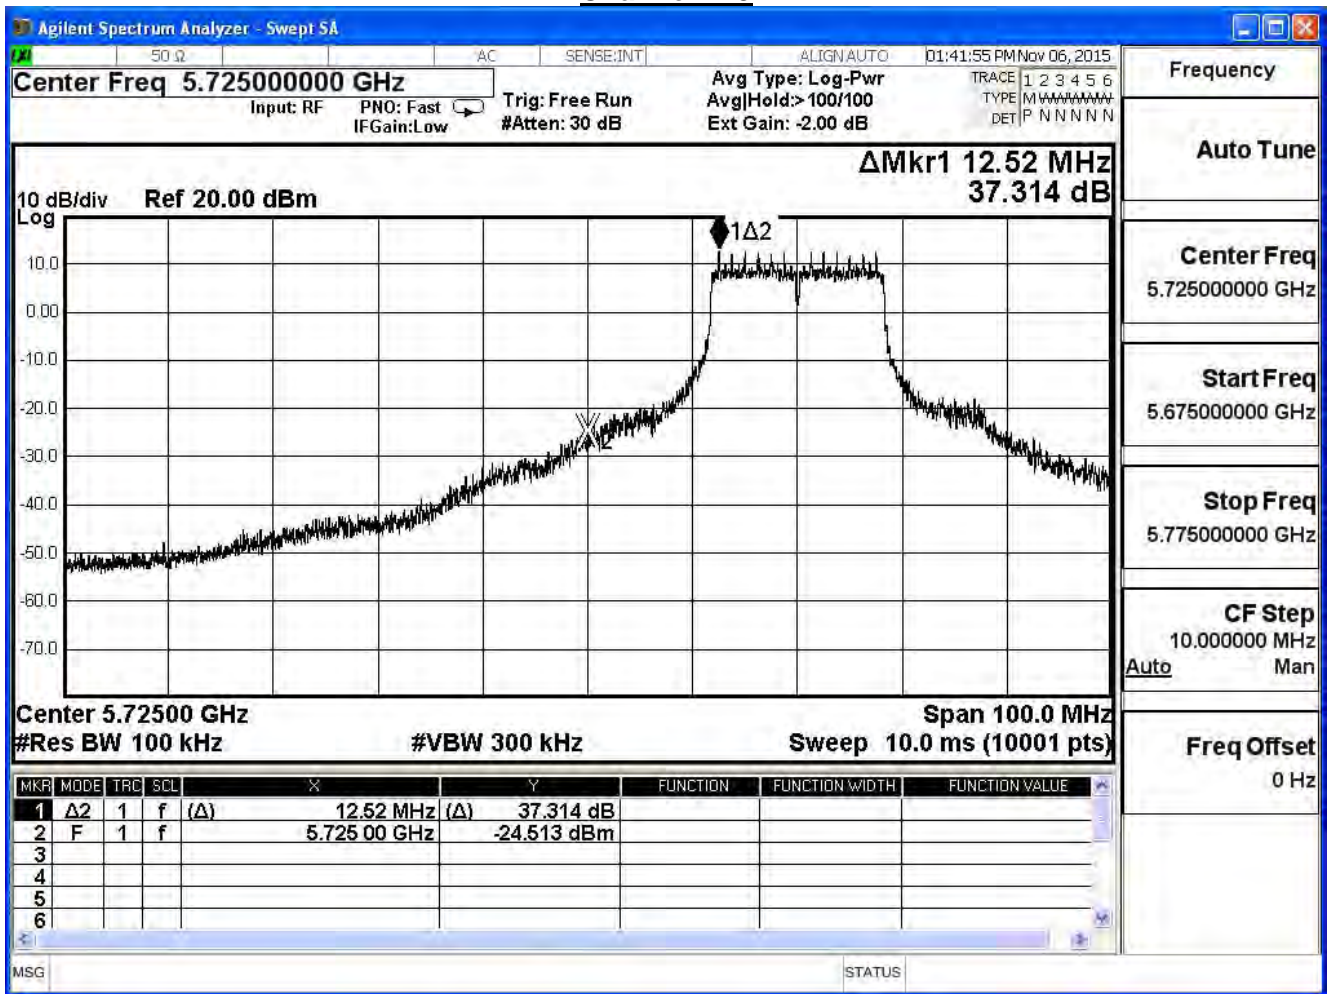

Channel 157

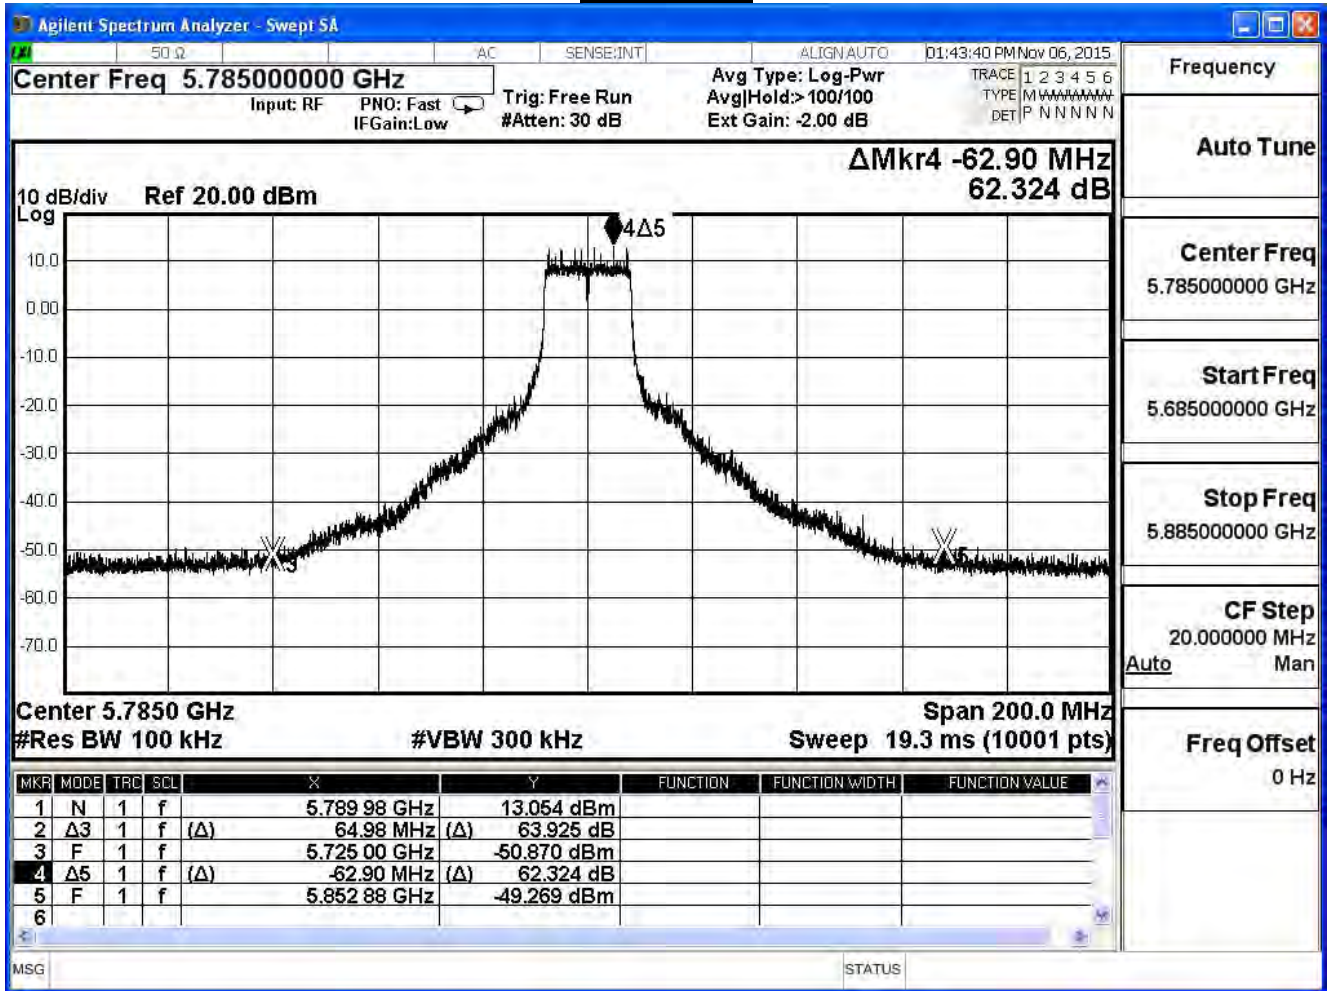


Channel 165

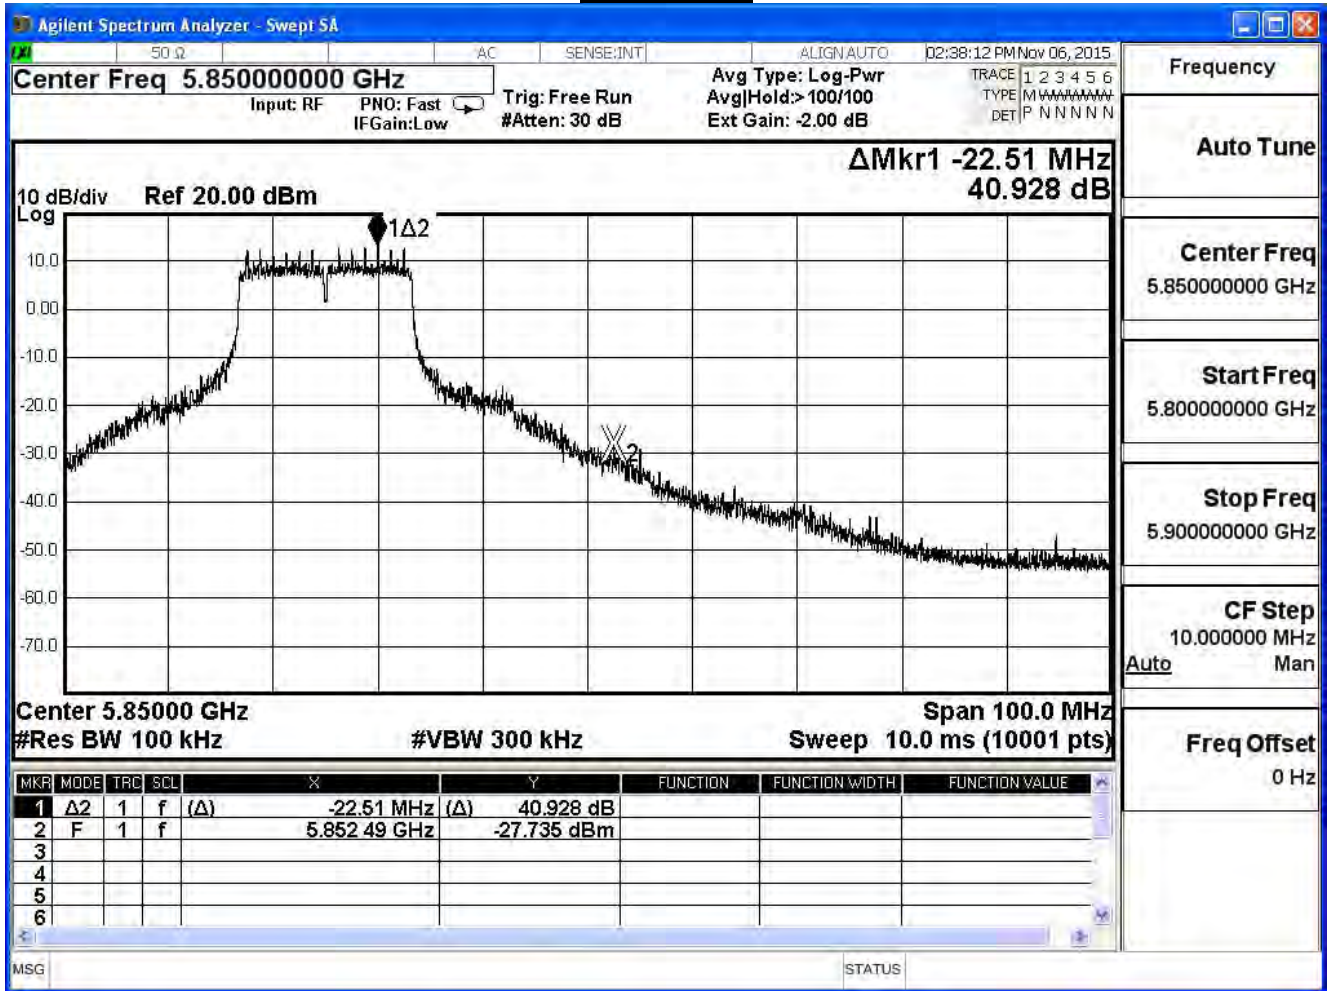


Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/06	Test Site	SR7

IEEE 802.11a (ANT 3)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
149	5745	37.653	≥ 30	Pass
157	5785	63.854	≥ 30	Pass
165	5825	42.179	≥ 30	Pass

Channel 149

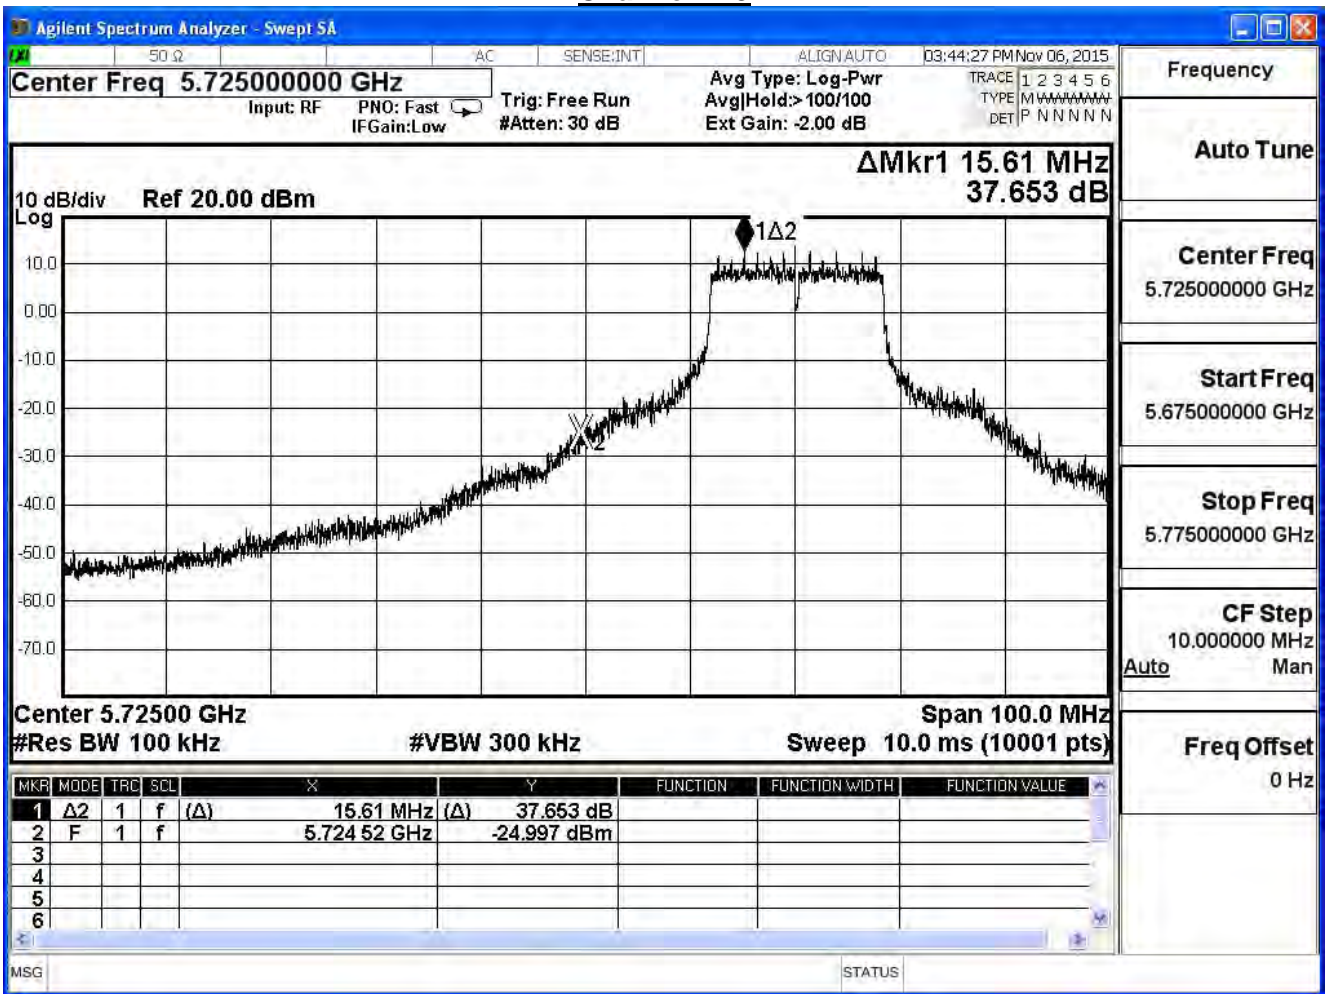

Channel 157

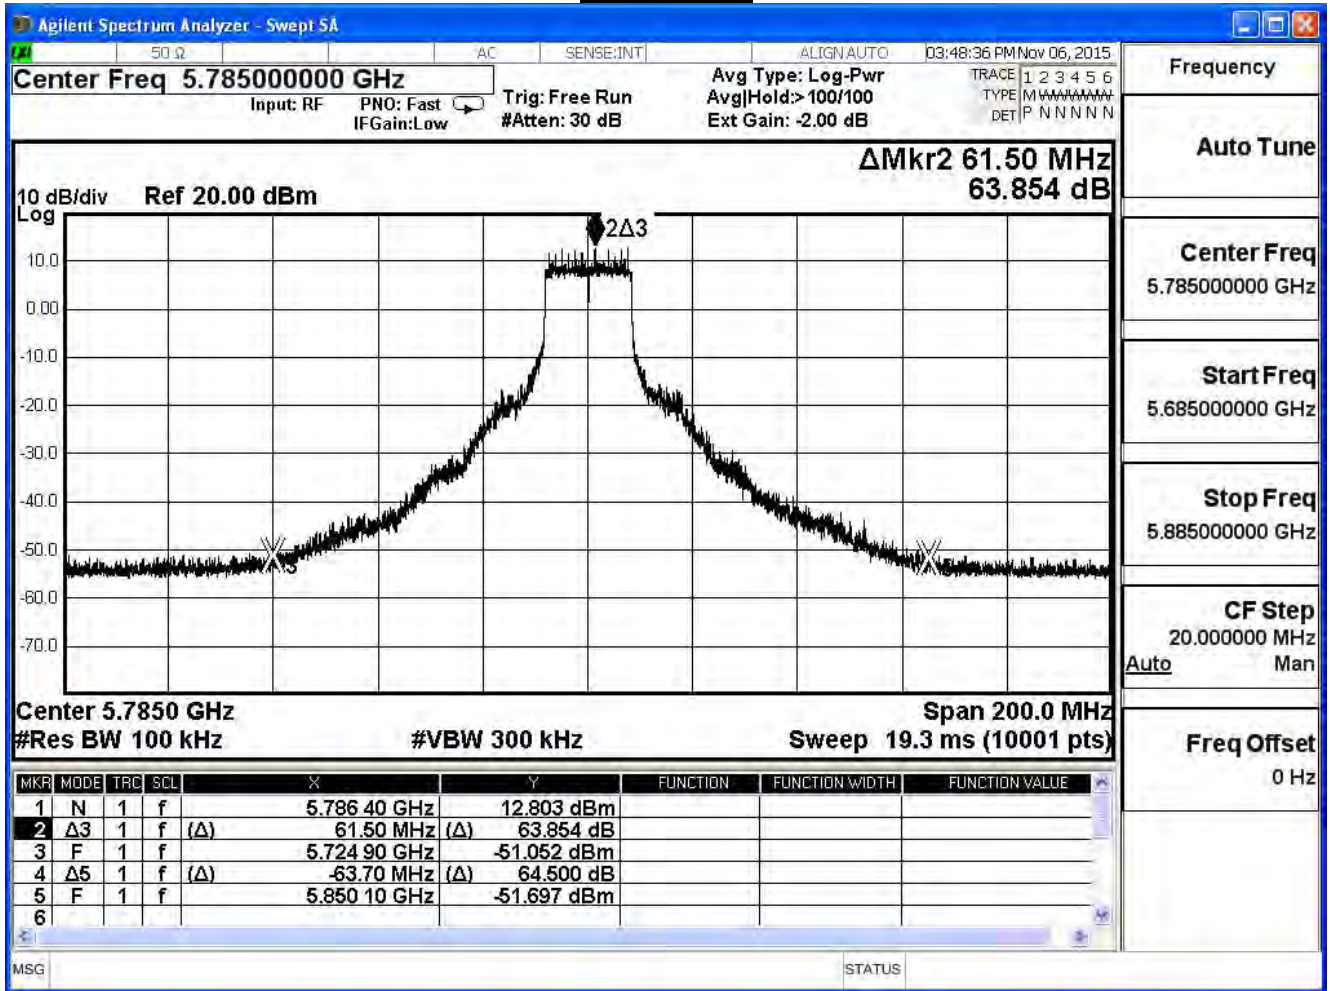

Channel 165




Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/02	Test Site	SR7


IEEE 802.11n_20M (ANT 0)

Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
149	5745	32.677	≥ 30	Pass
157	5785	59.972	≥ 30	Pass
165	5825	37.924	≥ 30	Pass


Channel 149

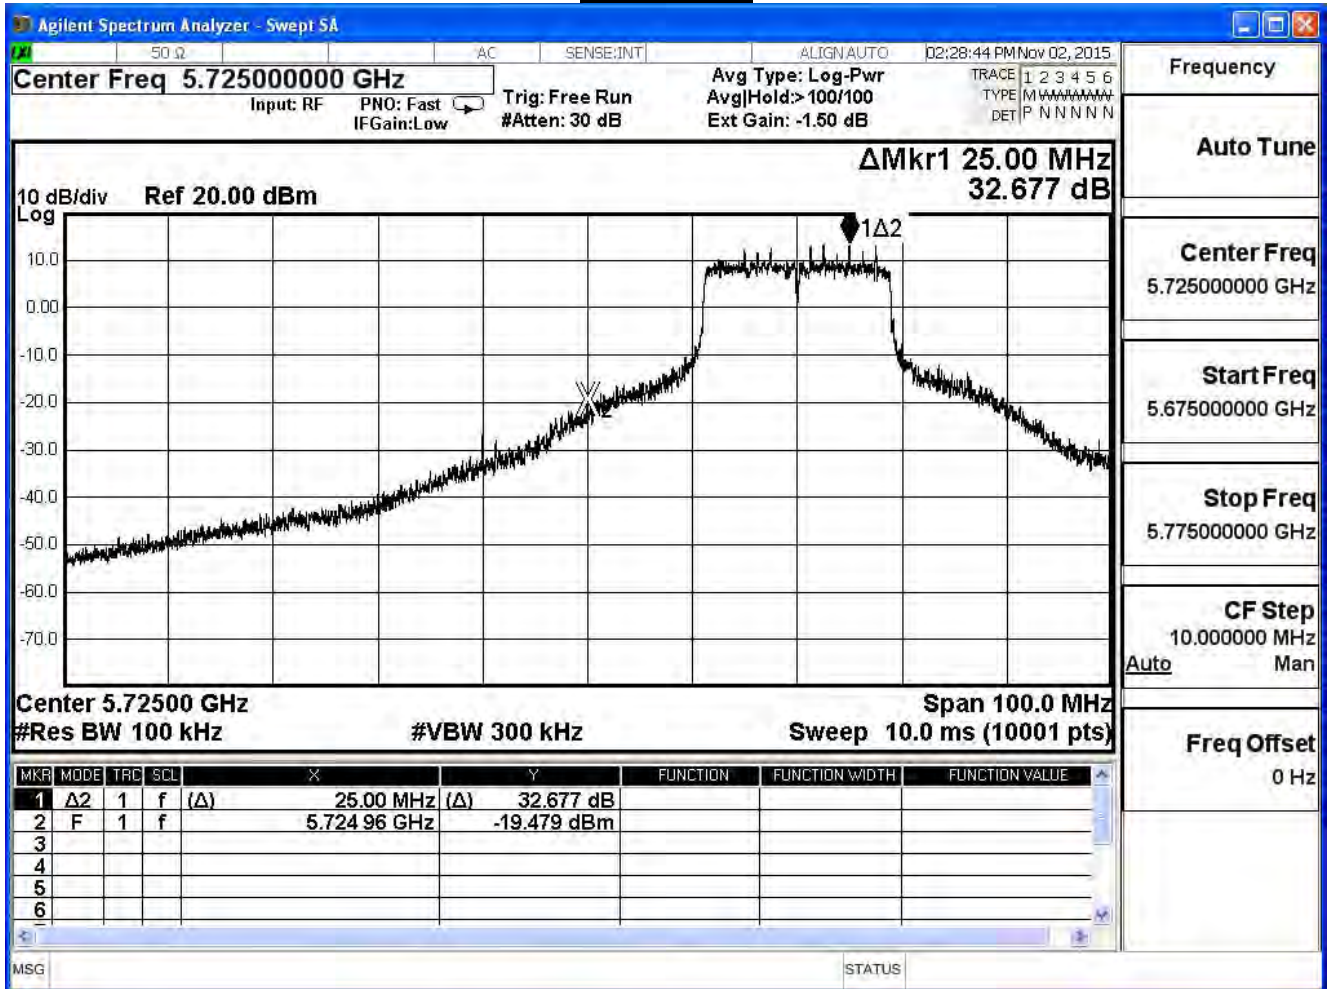

Channel 157

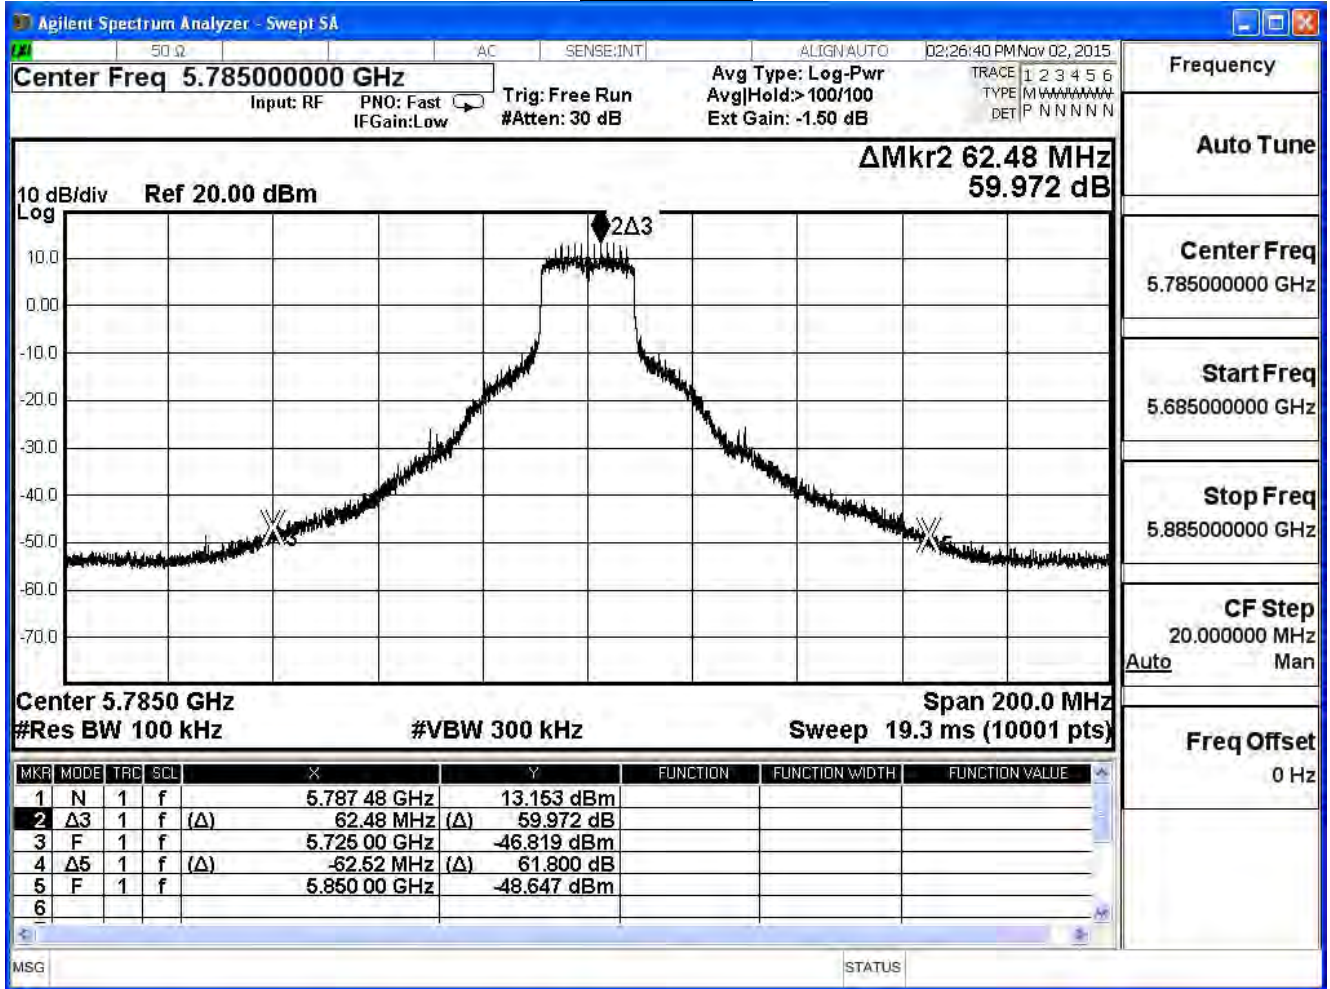

Channel 165

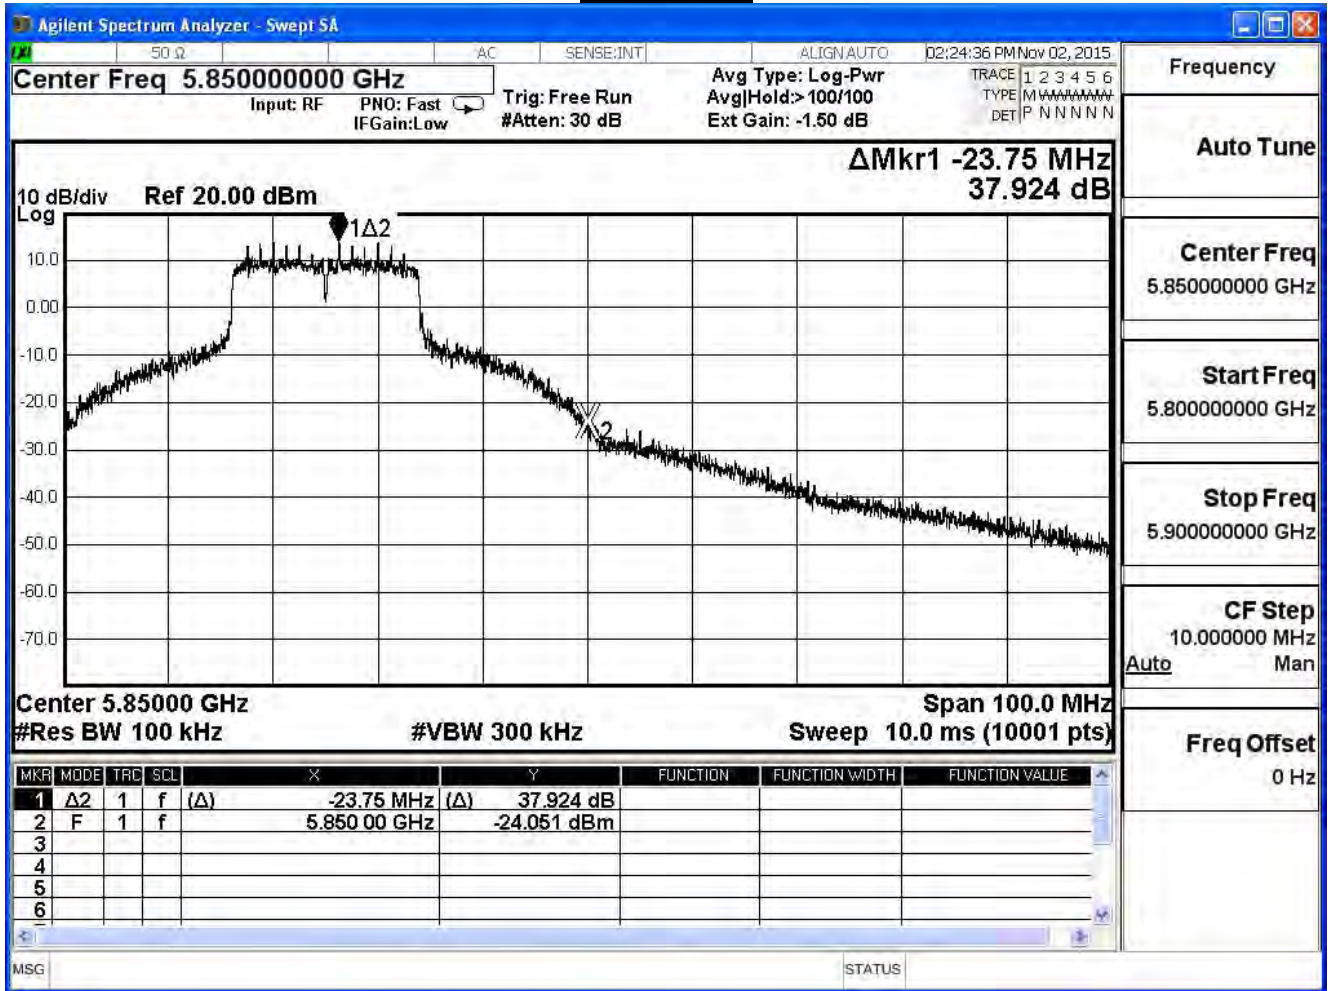


Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/06	Test Site	SR7


IEEE 802.11n_20M (ANT 1)

Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
149	5745	39.172	≥ 30	Pass
157	5785	60.604	≥ 30	Pass
165	5825	42.772	≥ 30	Pass


Channel 149

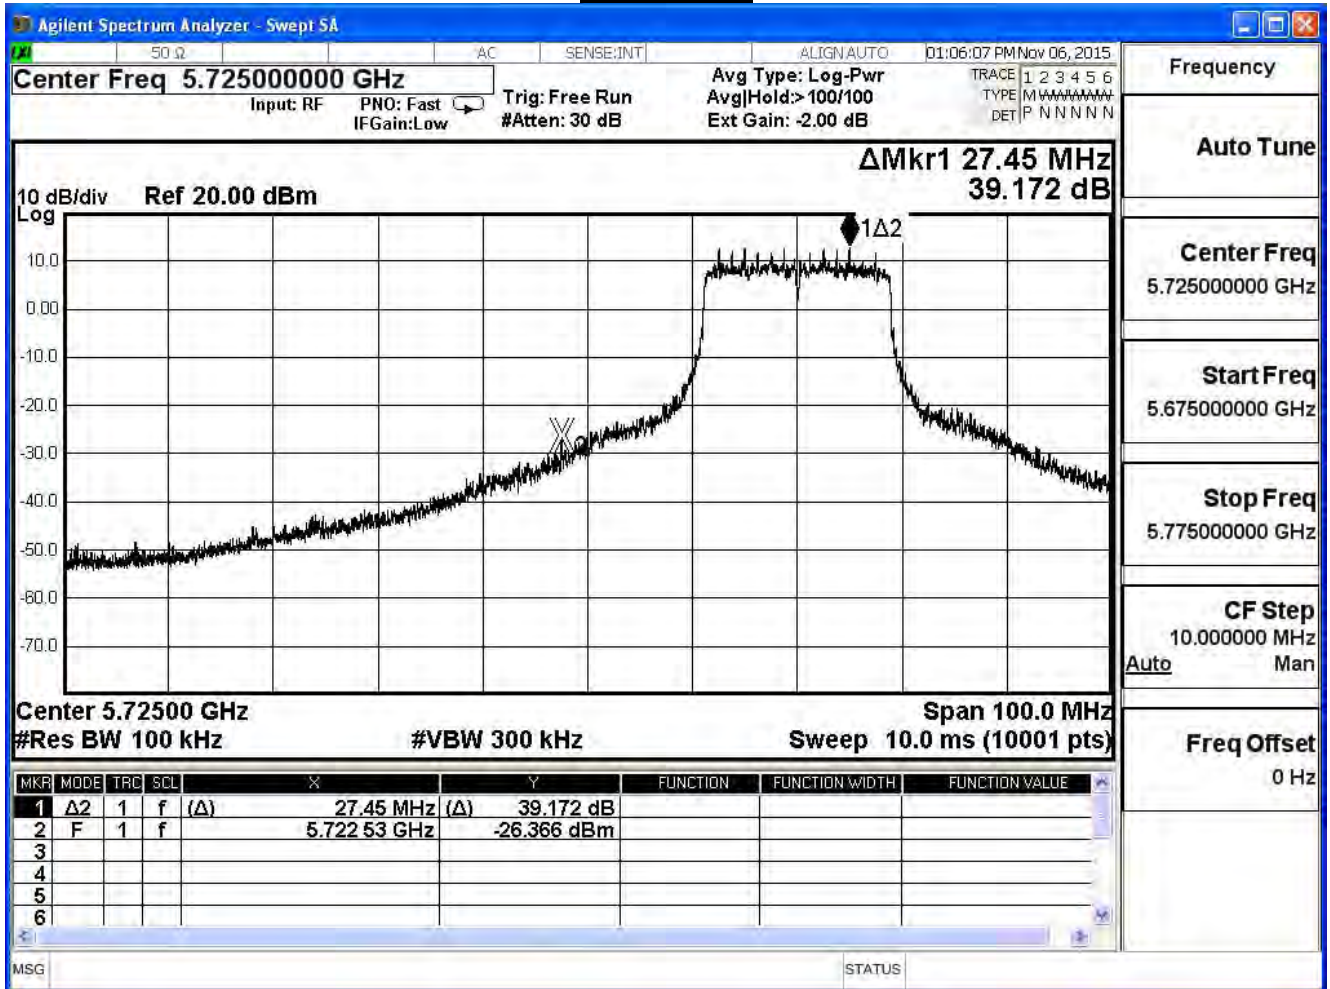

Channel 157

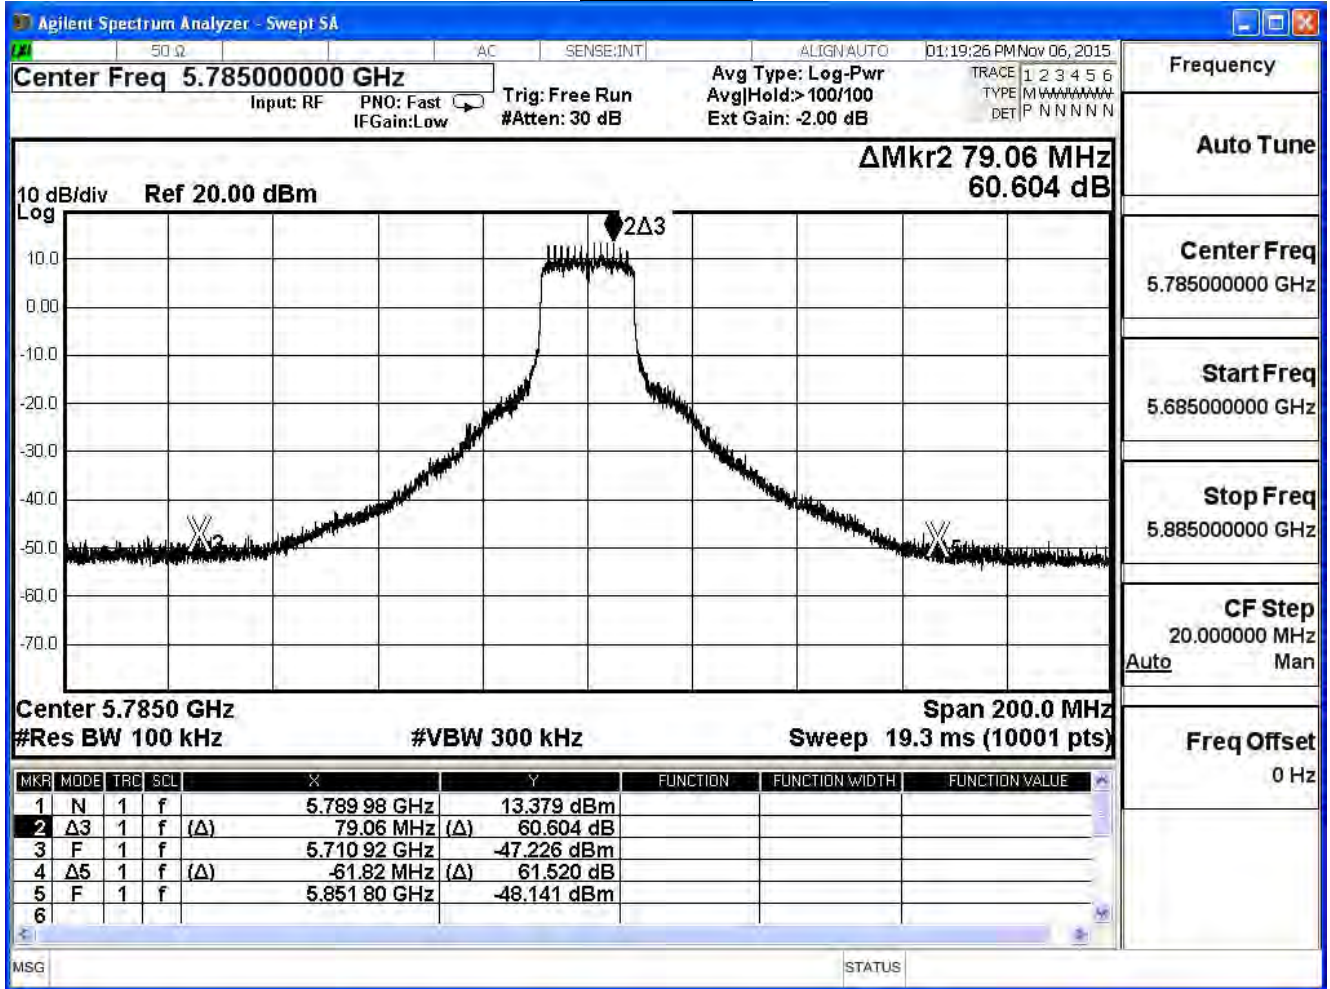


Channel 165

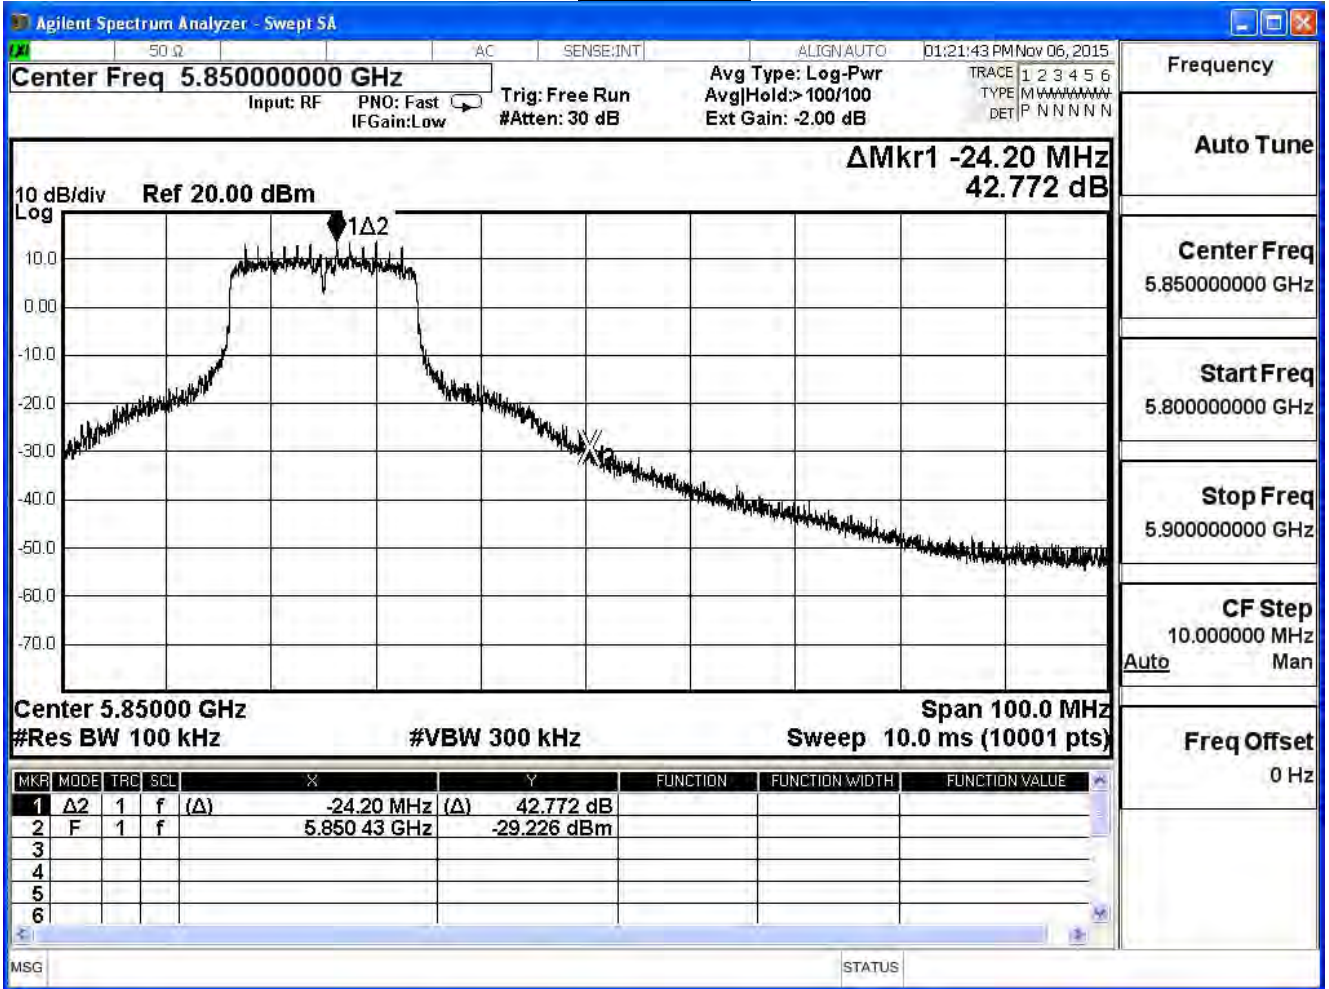


Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/06	Test Site	SR7

IEEE 802.11n_20M (ANT 2)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
149	5745	40.936	≥ 30	Pass
157	5785	61.168	≥ 30	Pass
165	5825	41.811	≥ 30	Pass


Channel 149

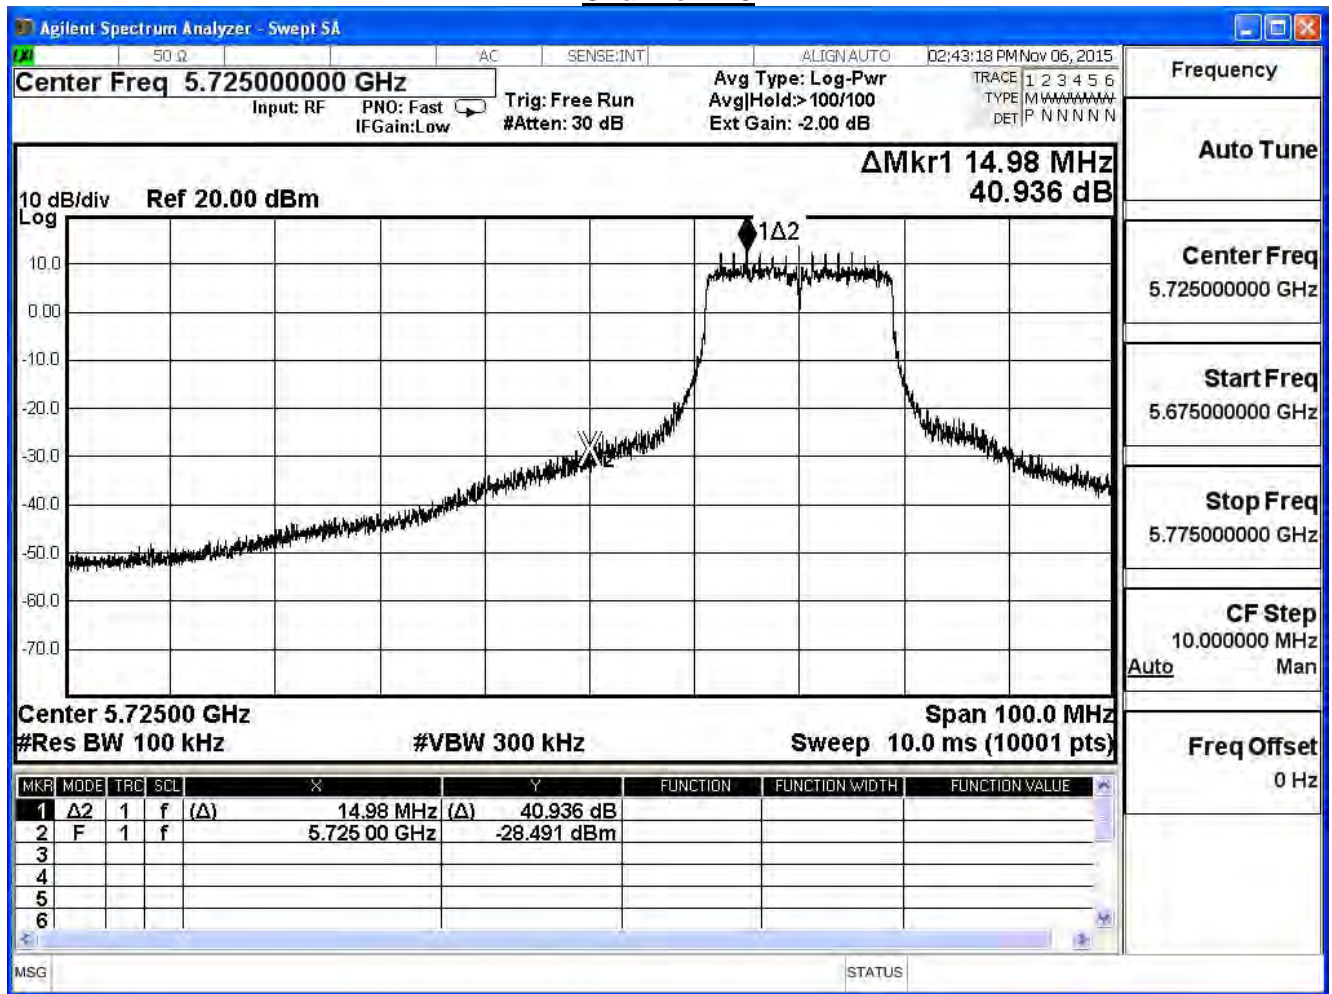

Channel 157

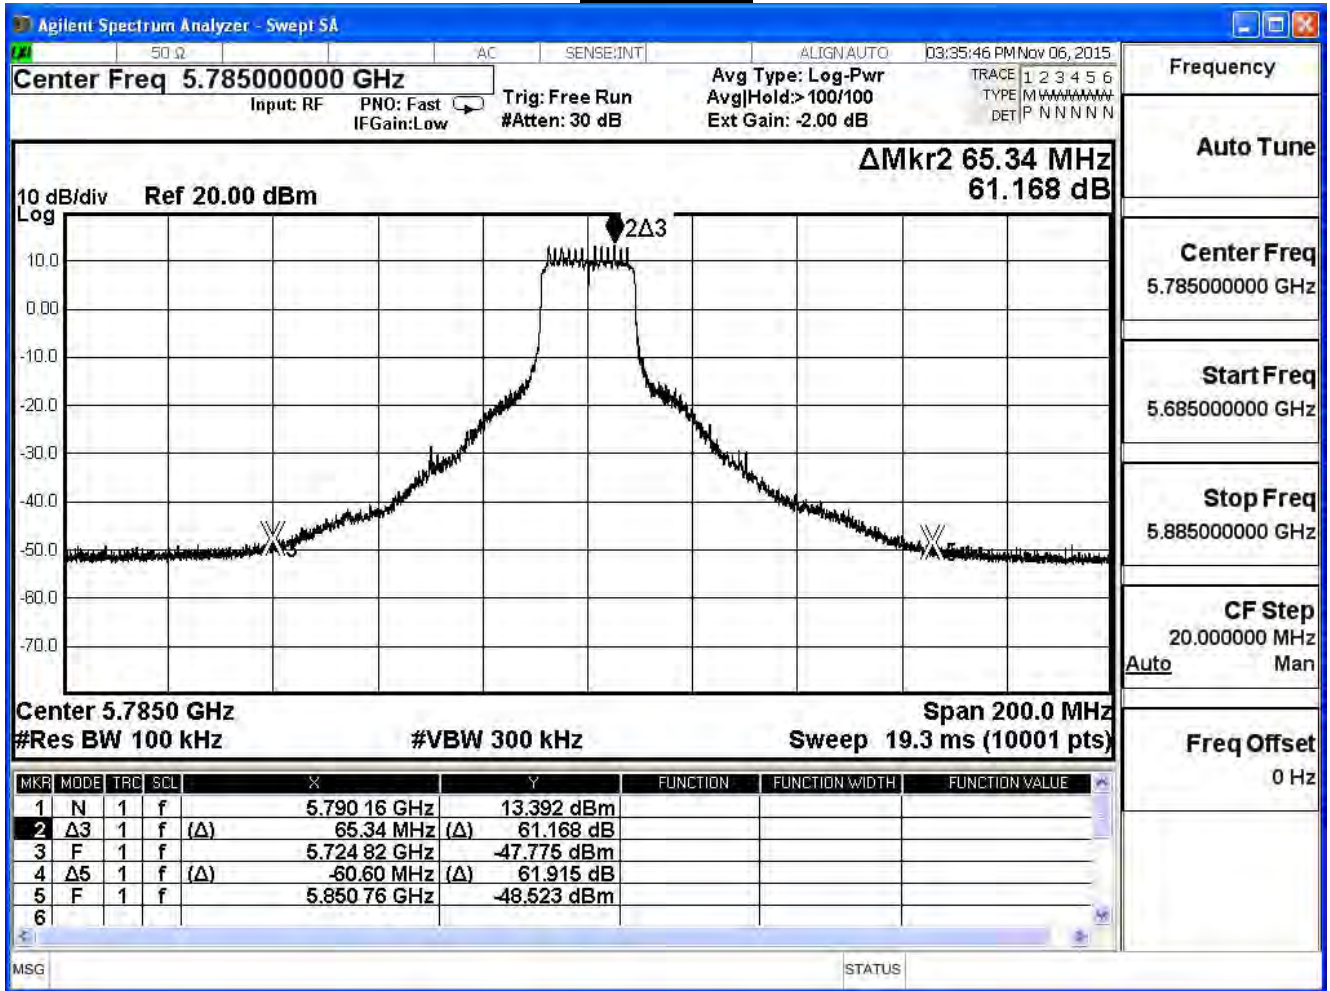


Channel 165

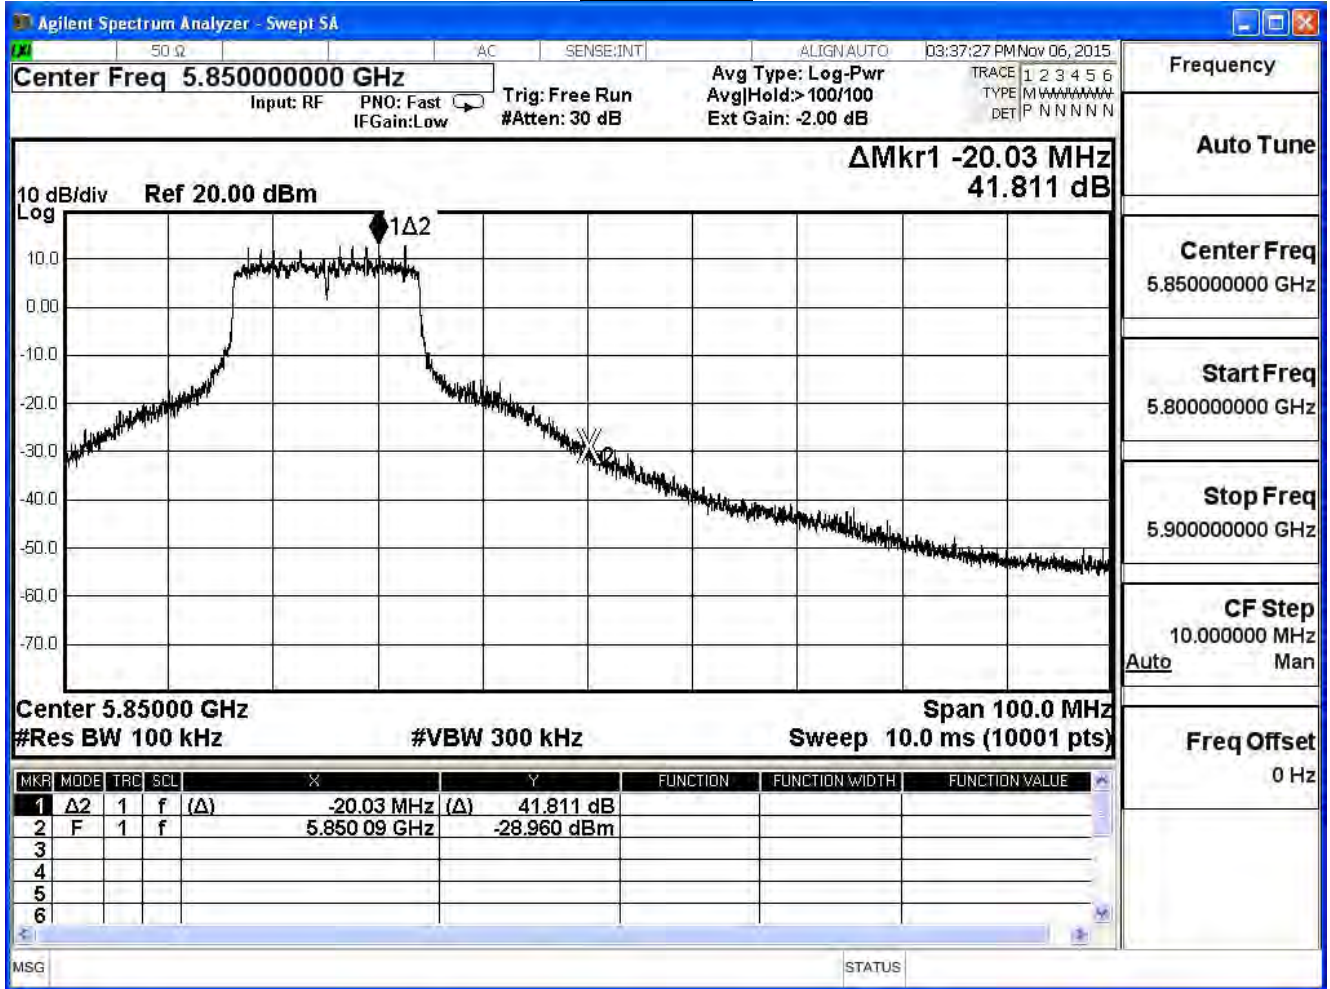


Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/06	Test Site	SR7

IEEE 802.11n_20M (ANT 3)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
149	5745	39.870	≥ 30	Pass
157	5785	62.613	≥ 30	Pass
165	5825	43.357	≥ 30	Pass


Channel 149

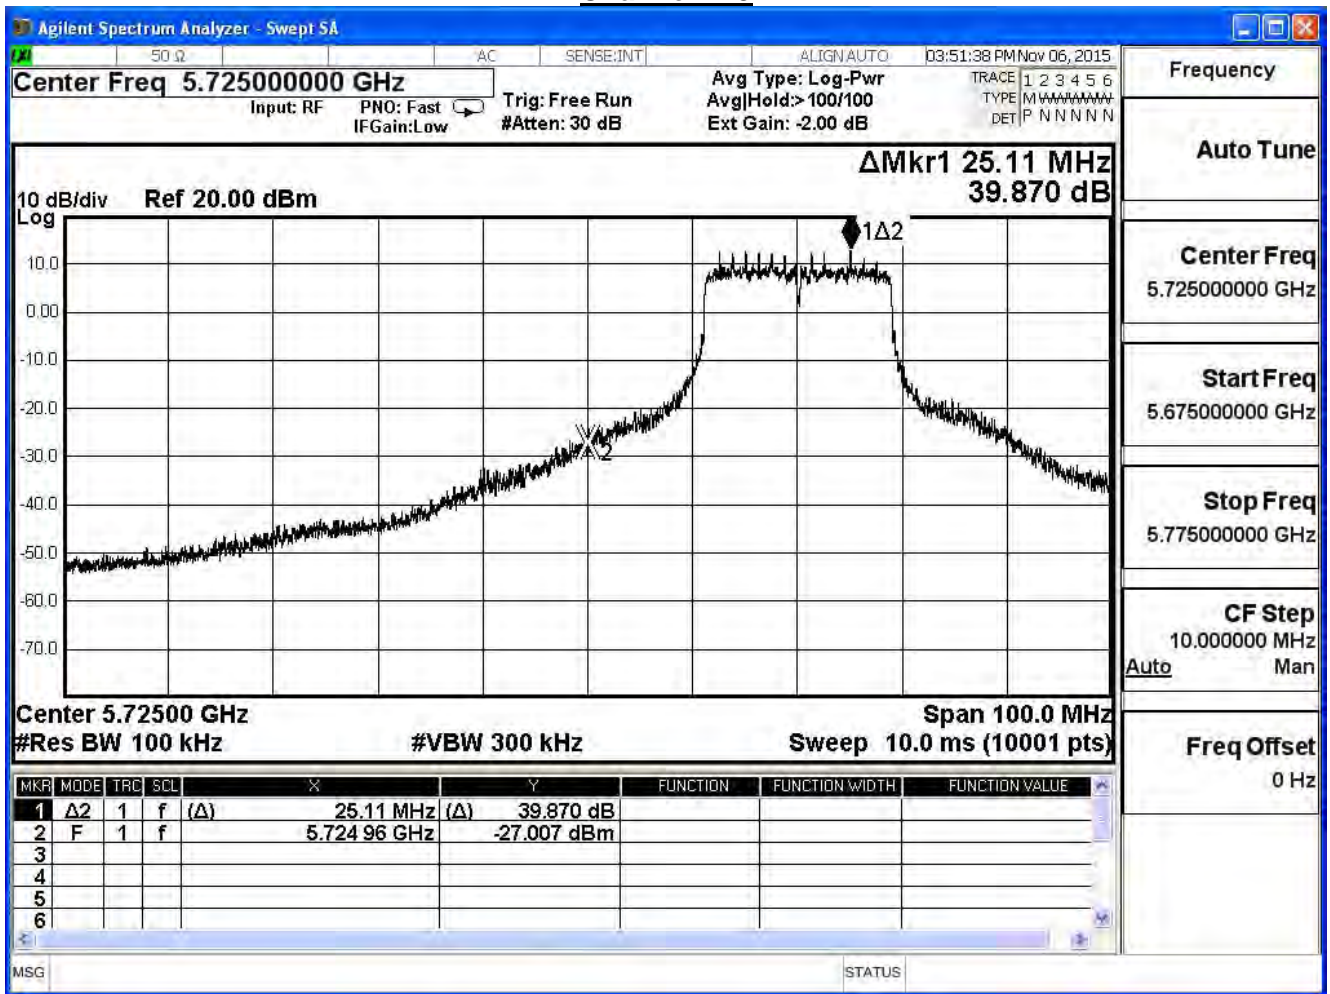

Channel 157

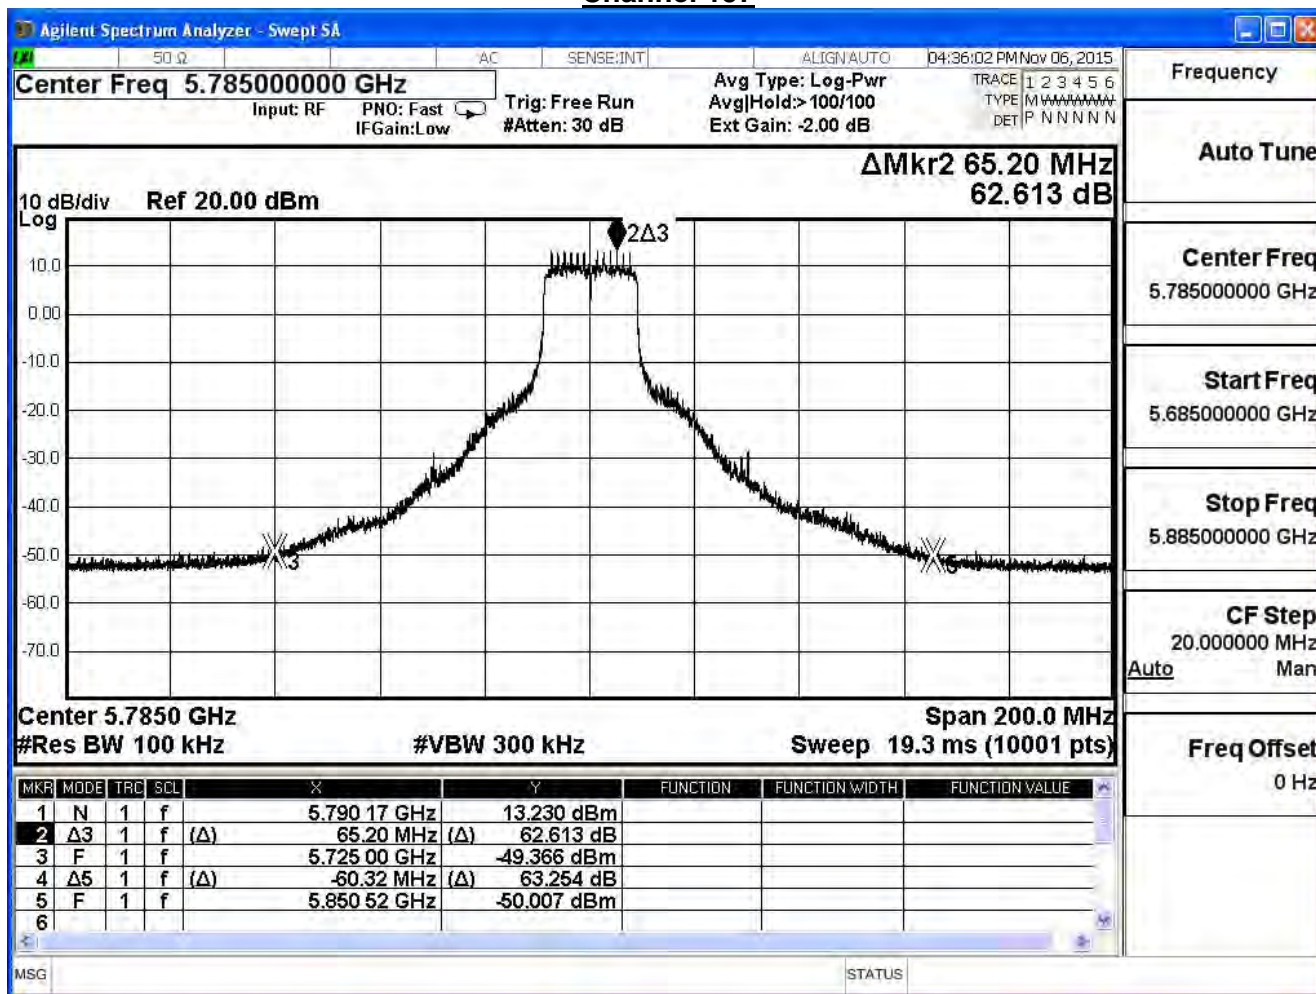


Channel 165

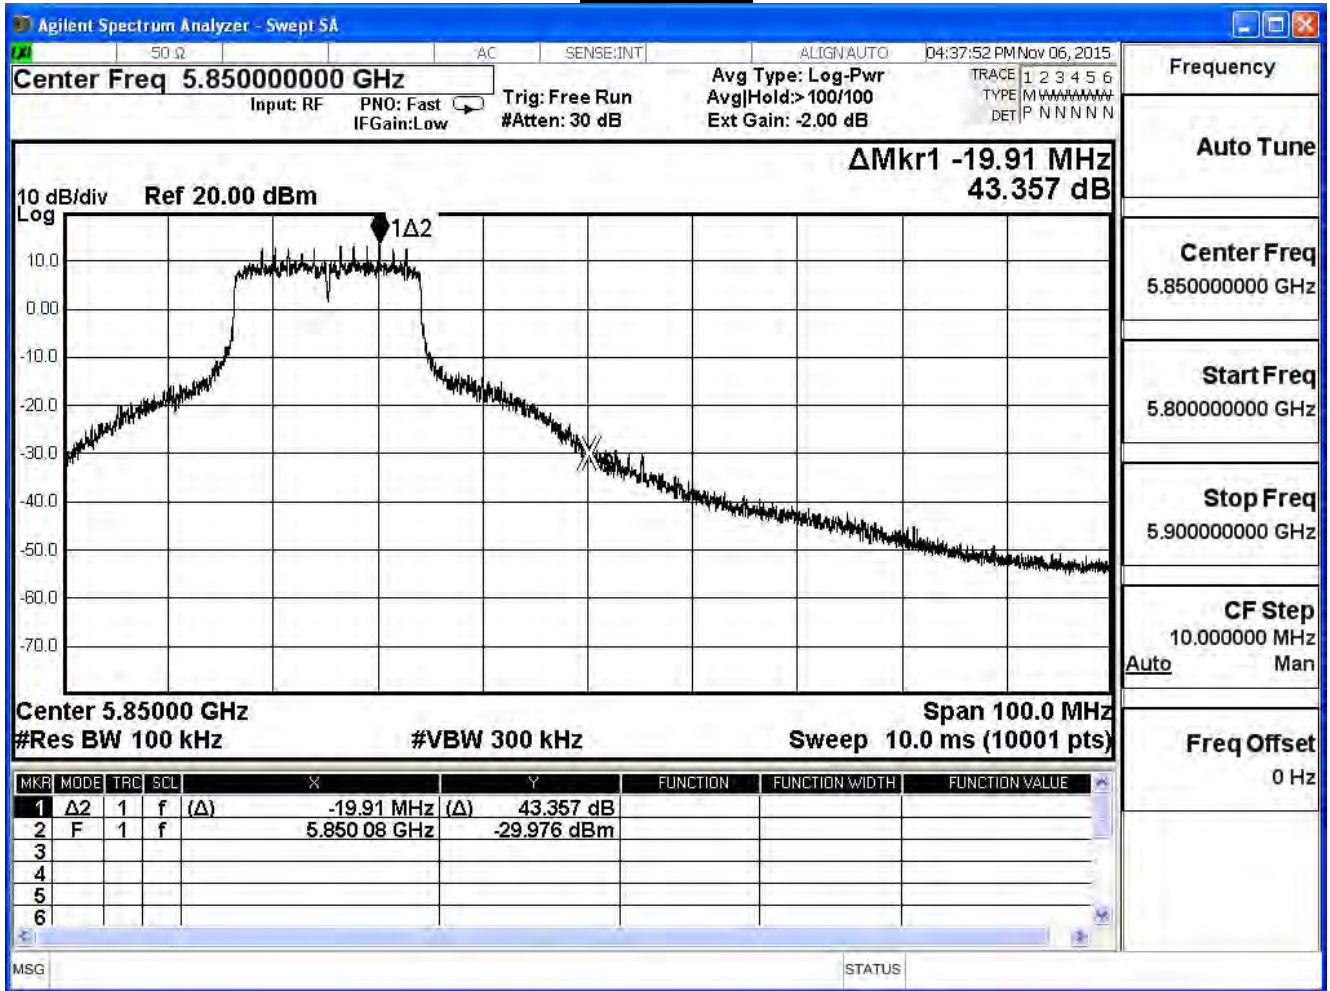


Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/02	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 0)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
151	5755	31.389	≥ 30	Pass
159	5795	35.601	≥ 30	Pass

Channel 151 (5755MHz)

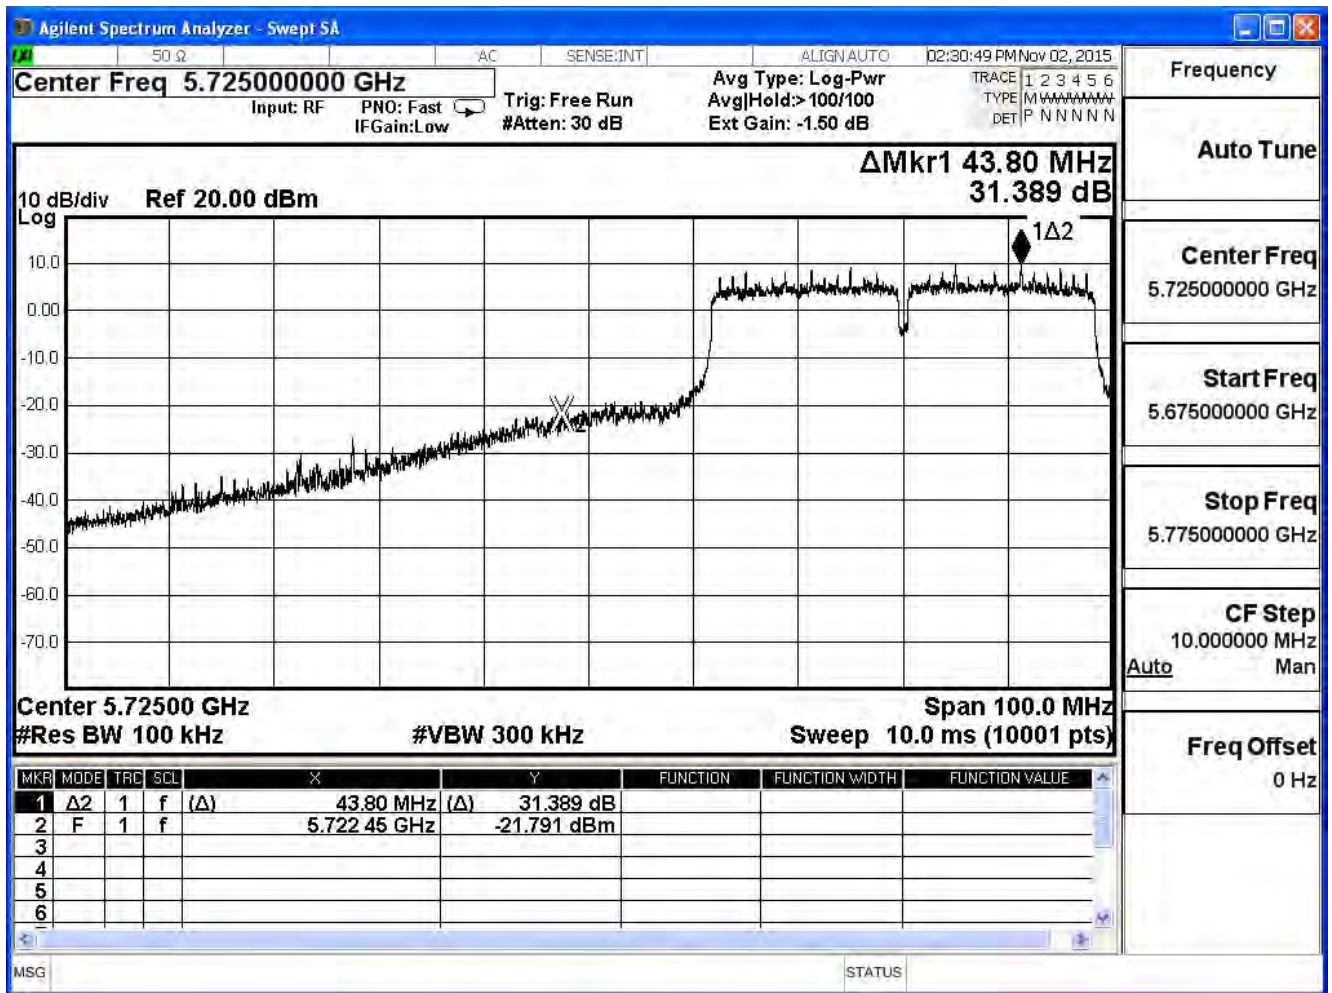


Channel 159 (5795MHz)

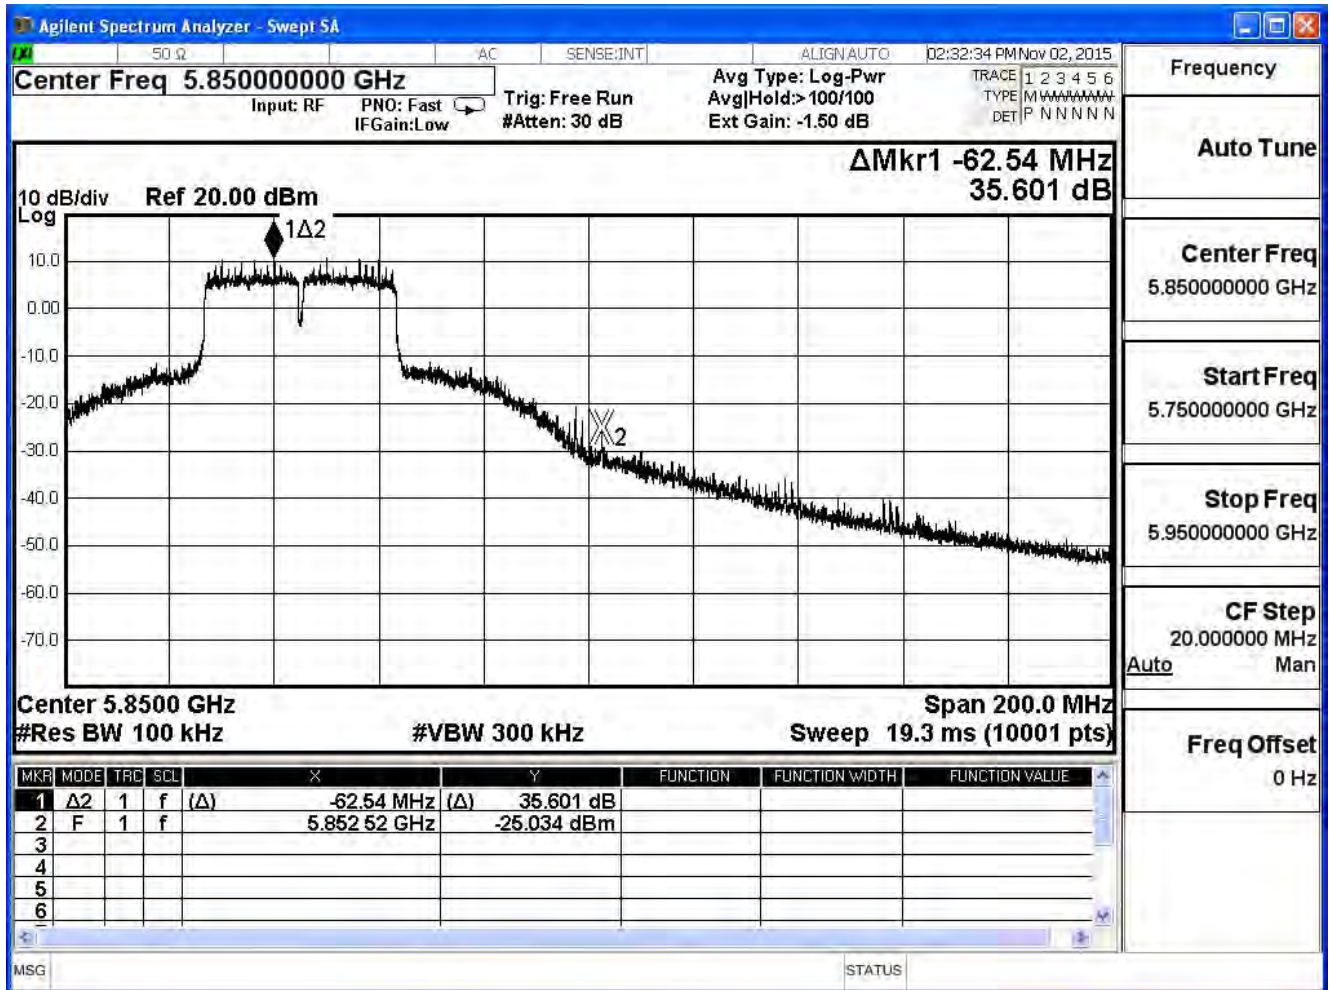


Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/06	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 1)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
151	5755	30.275	≥ 30	Pass
159	5795	37.635	≥ 30	Pass

Channel 151 (5755MHz)

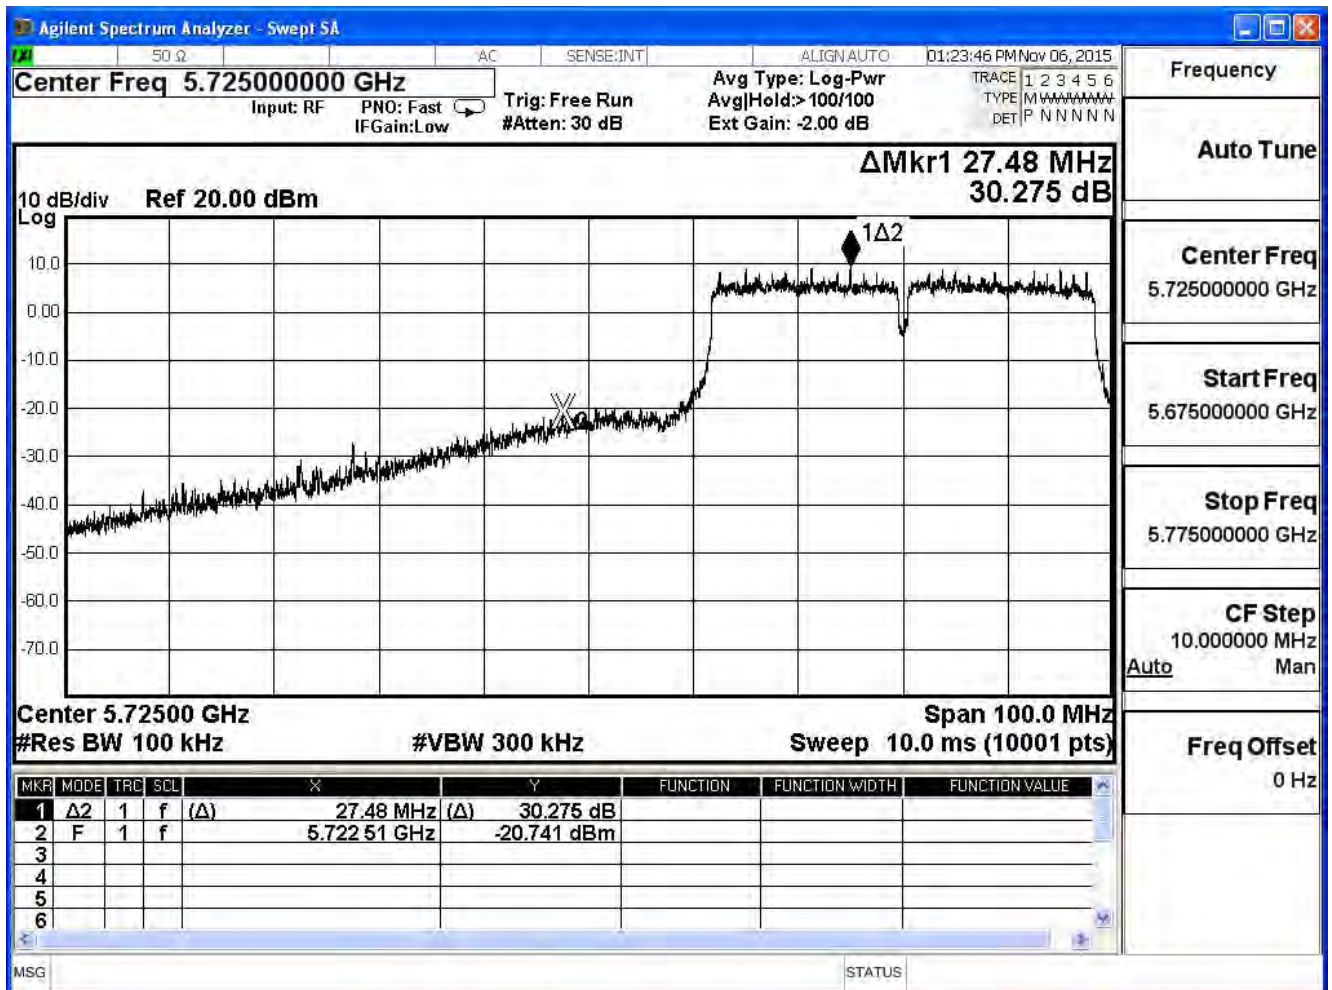


Channel 159 (5795MHz)

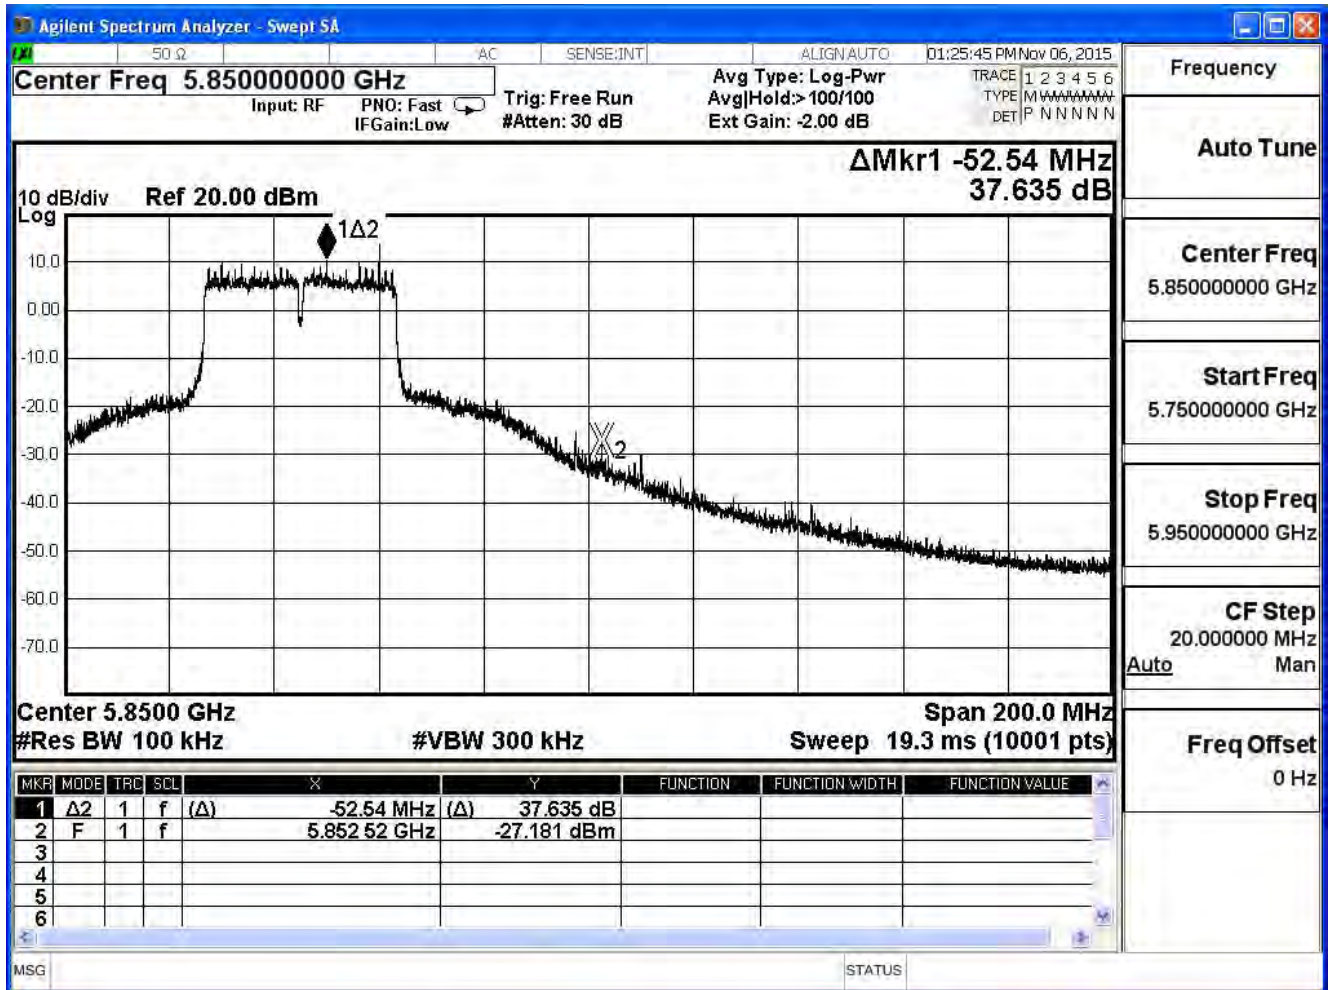


Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/06	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 2)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
151	5755	33.712	≥ 30	Pass
159	5795	40.009	≥ 30	Pass

Channel 151 (5755MHz)

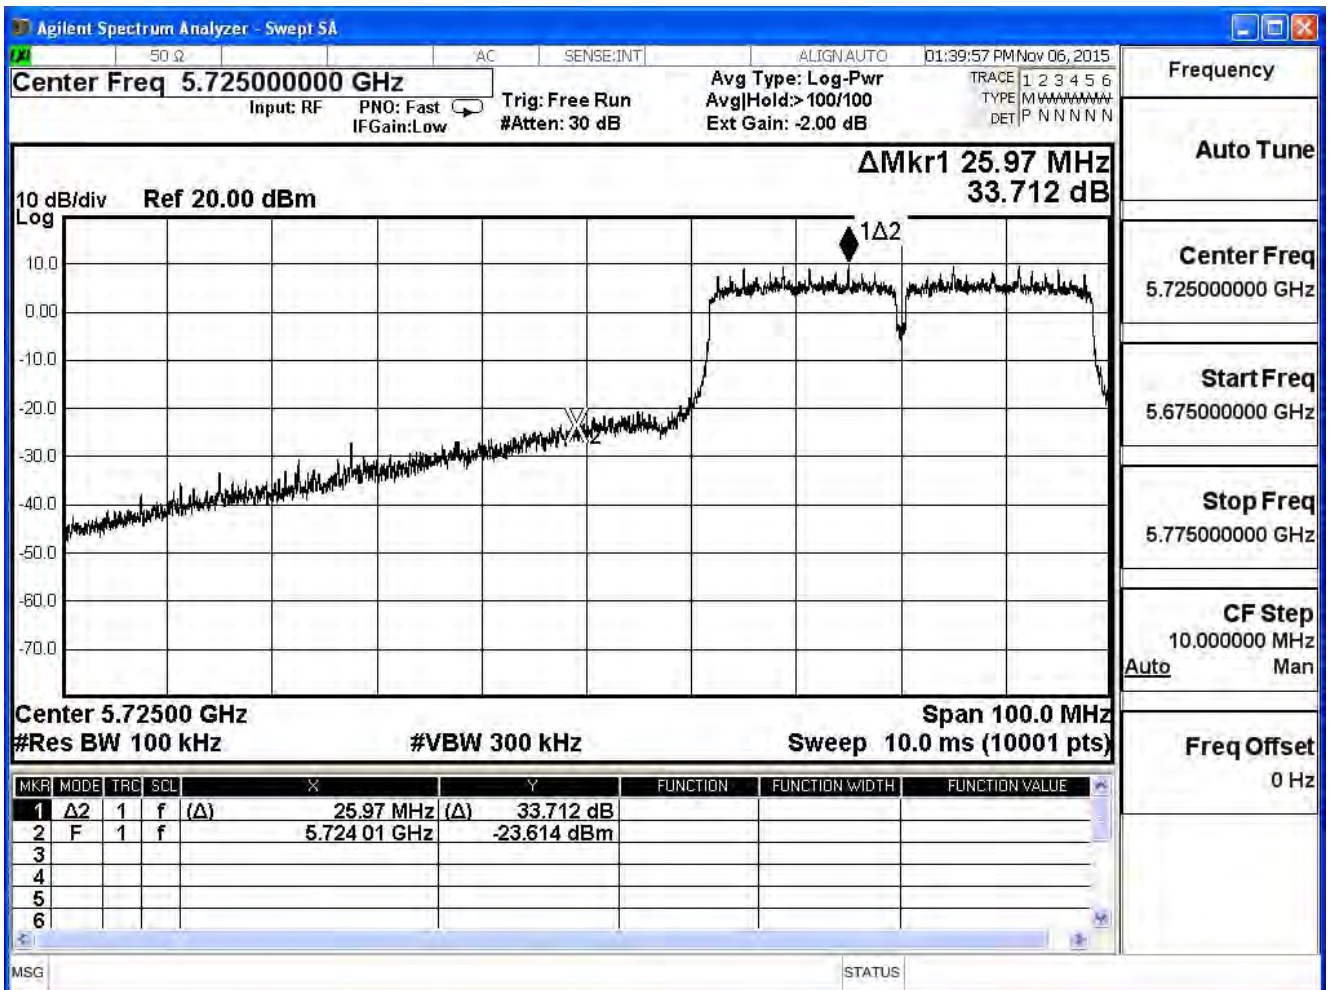


Channel 159 (5795MHz)

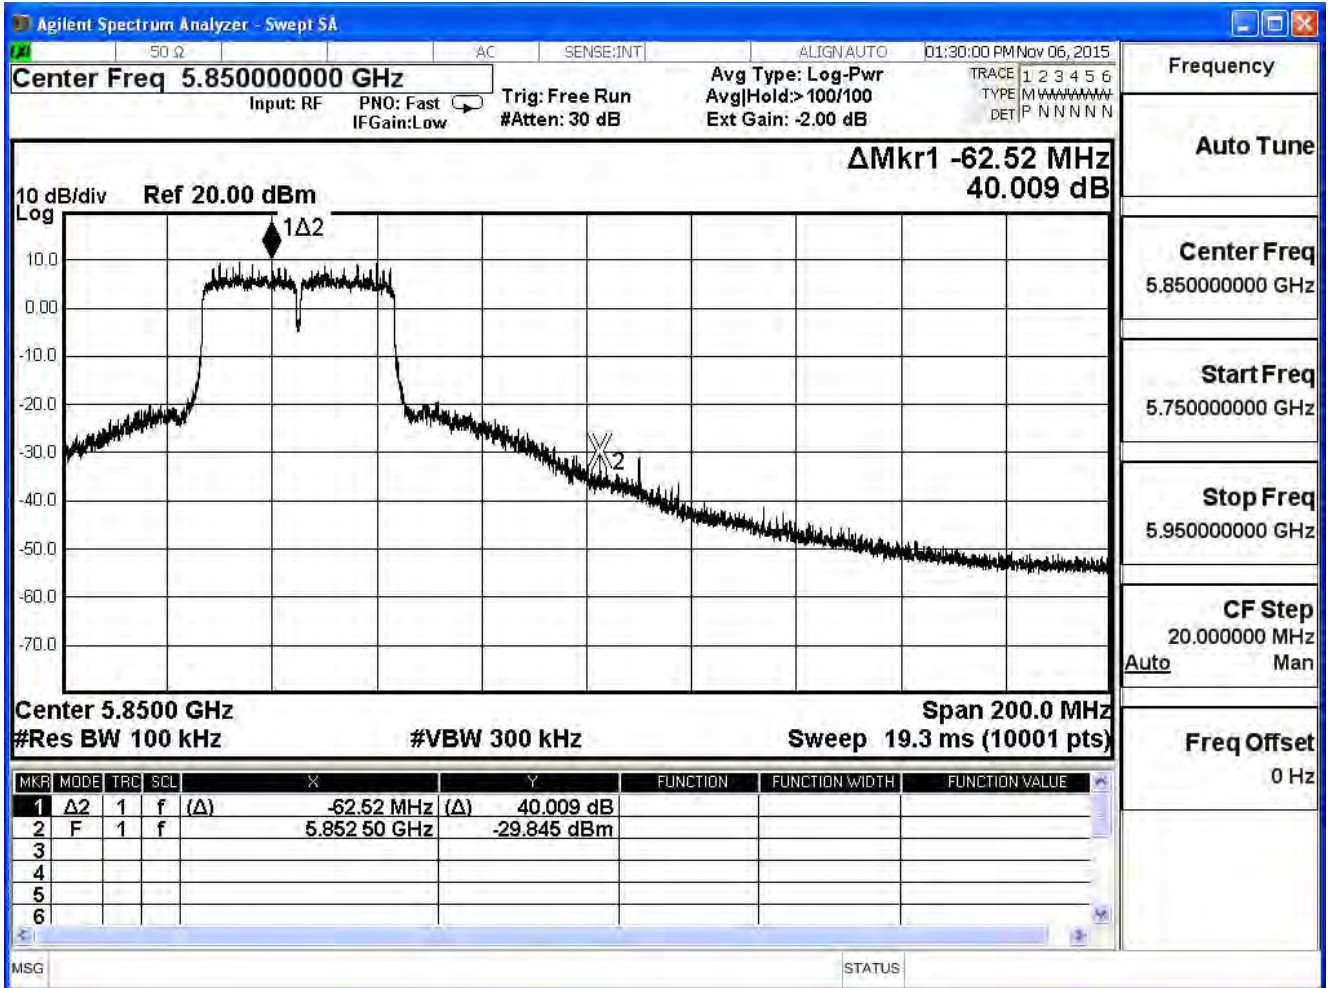


Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/06	Test Site	SR7

IEEE 802.11n (40MHz)(ANT 3)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
151	5755	30.329	≥ 30	Pass
159	5795	36.772	≥ 30	Pass

Channel 151 (5755MHz)

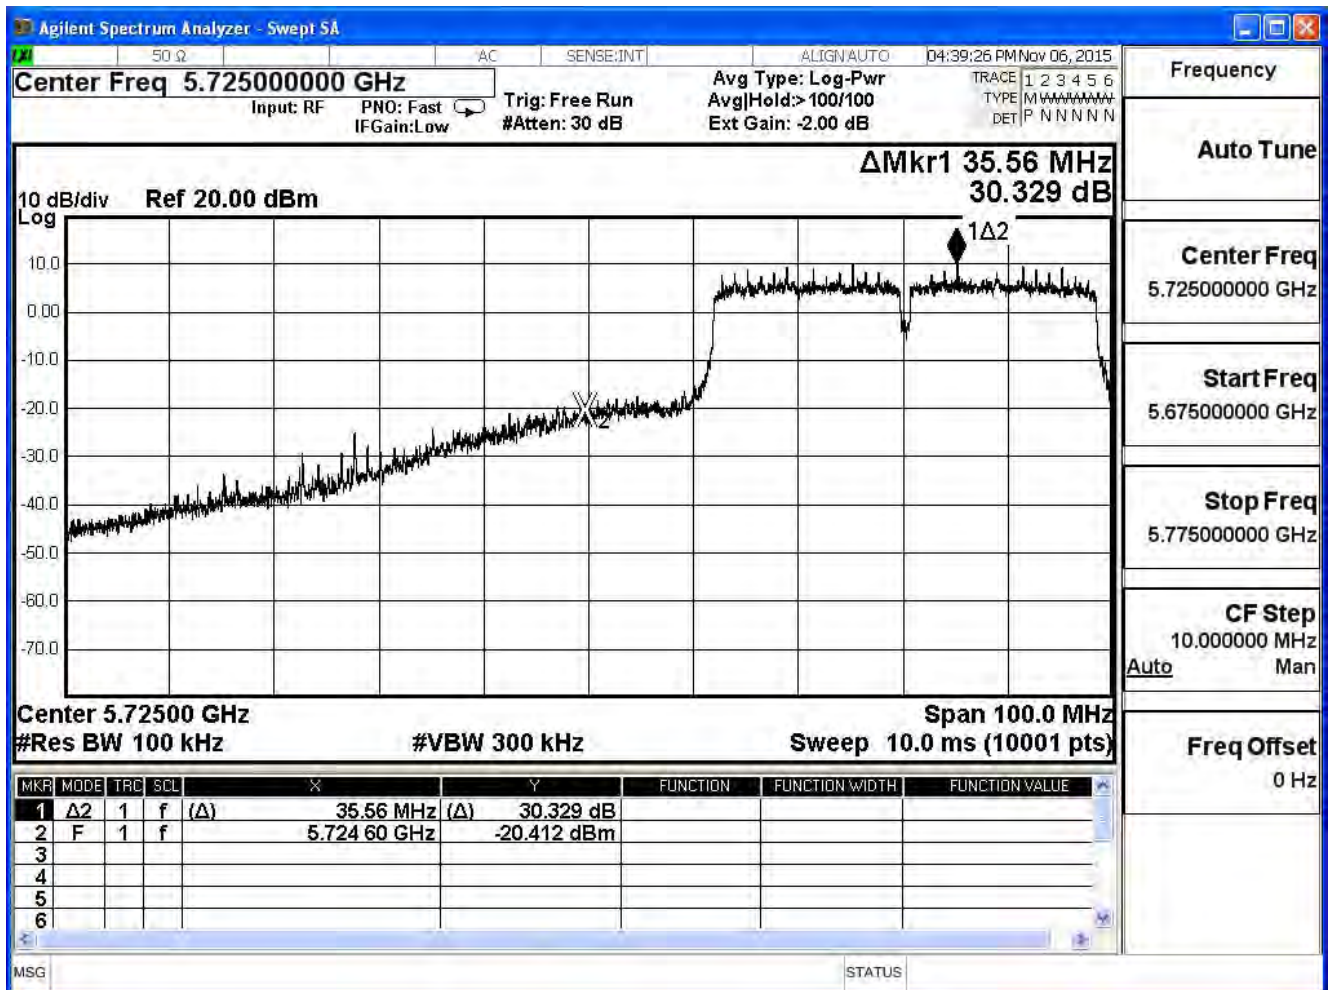


Channel 159 (5795MHz)

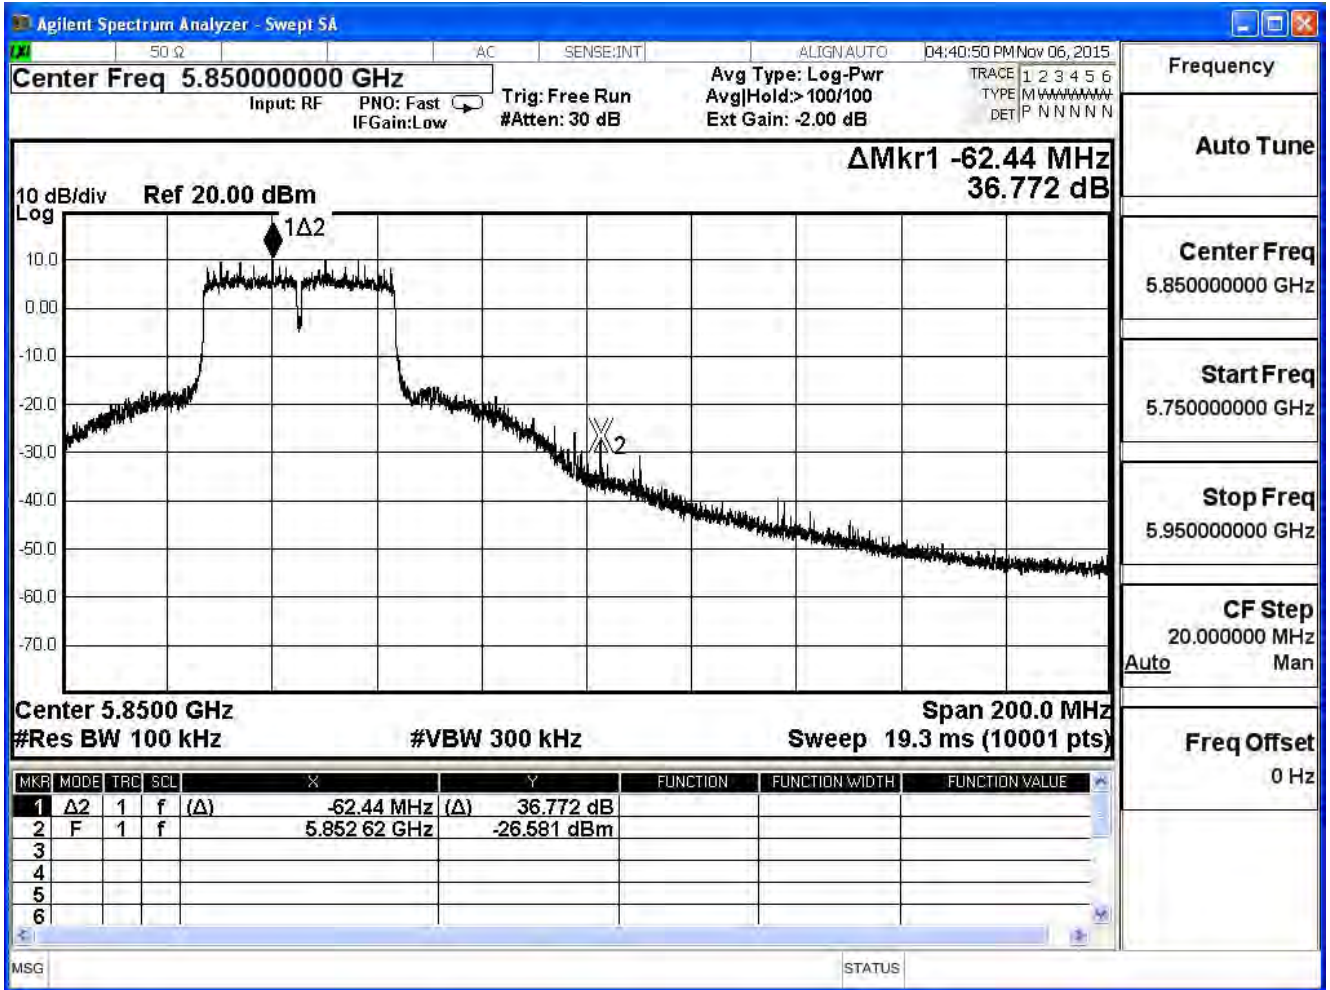

Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/02	Test Site	SR7

IEEE 802.11ac (80MHz)(ANT 0)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
155	5775	32.333	≥ 30	Pass


Channel 155 (5775MHz)

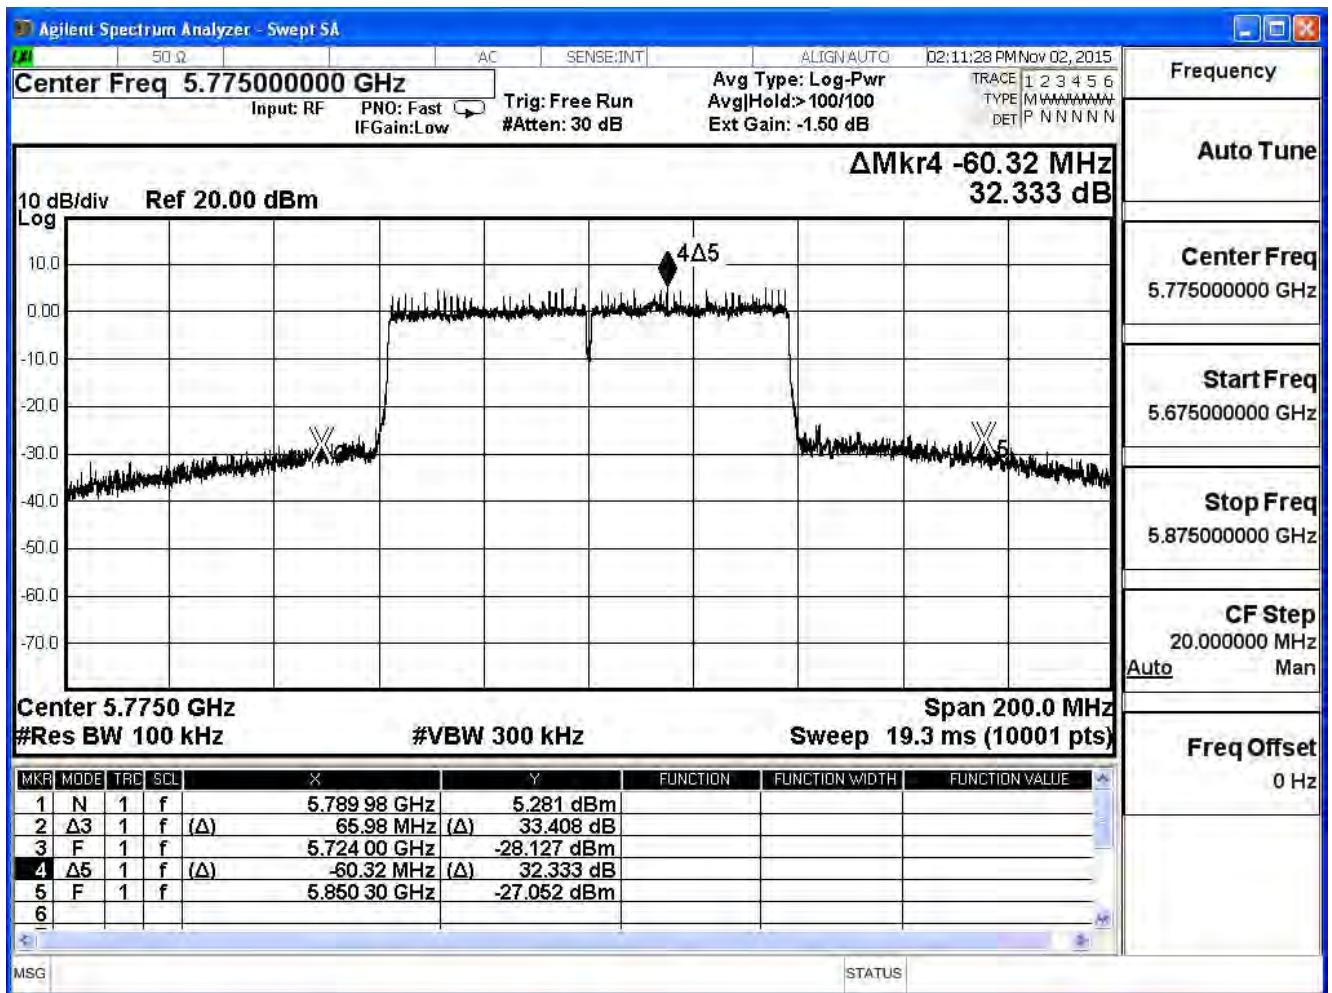

Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/02	Test Site	SR7

IEEE 802.11ac (80MHz)(ANT1)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
155	5775	32.844	≥ 30	Pass


Channel 155 (5775MHz)

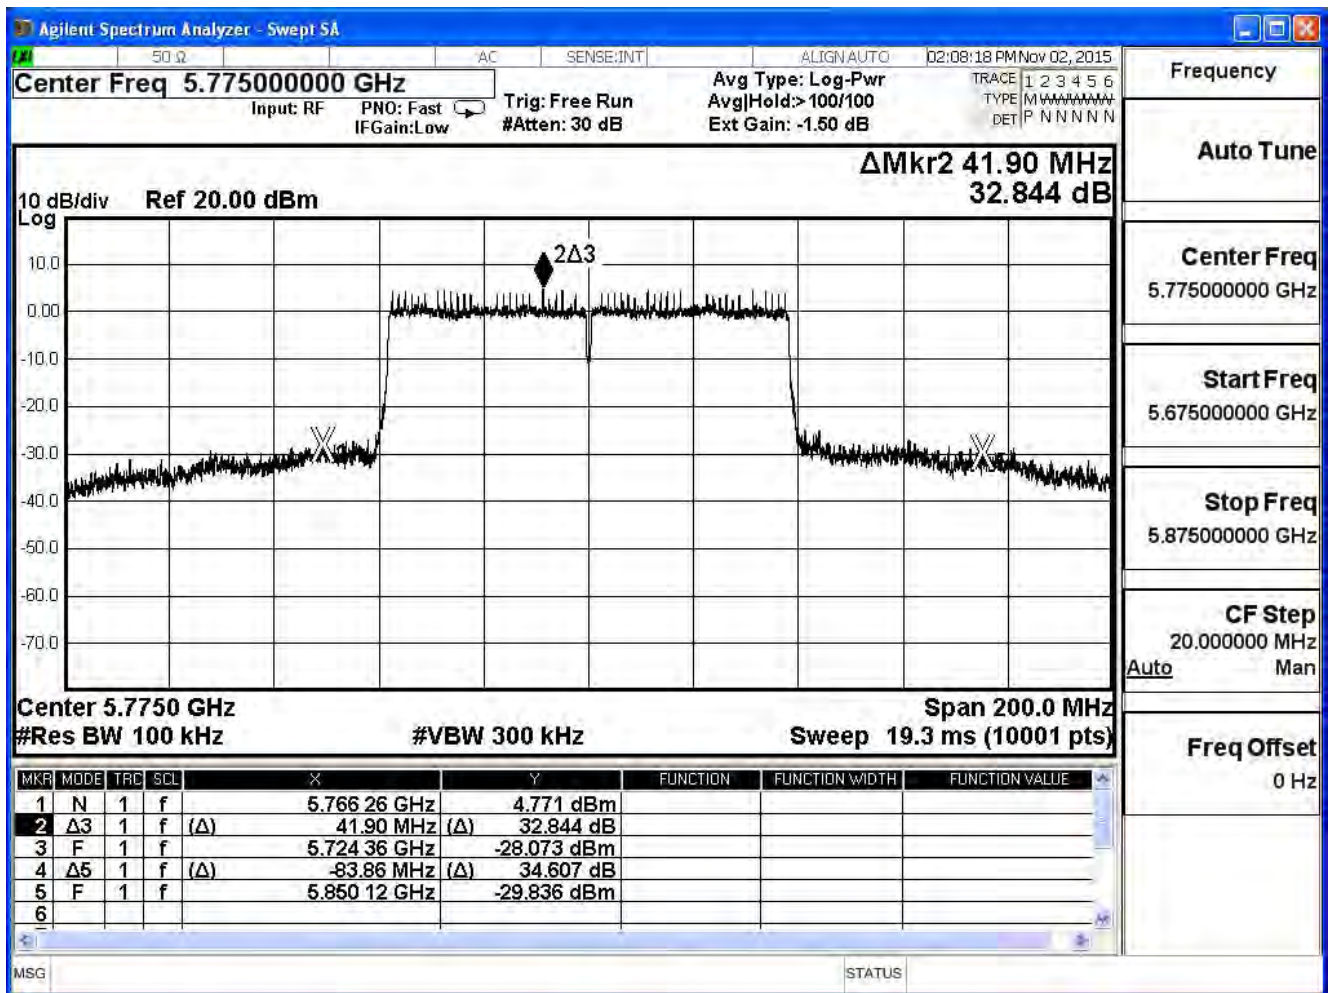

Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/02	Test Site	SR7

IEEE 802.11ac (80MHz)(ANT 2)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
155	5775	30.759	≥ 30	Pass


Channel 155 (5775MHz)

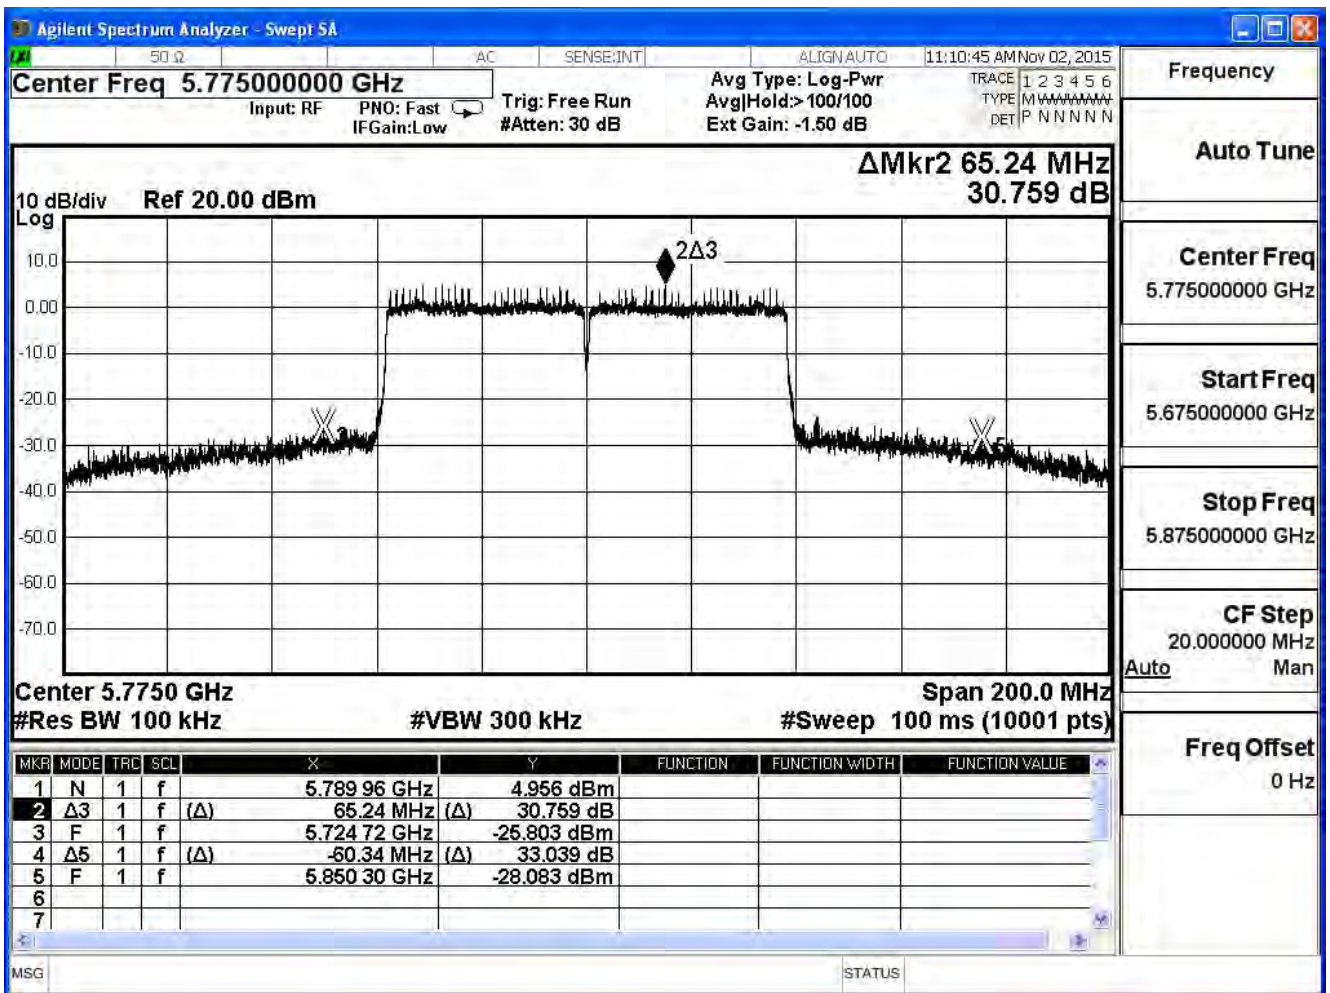

Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/02	Test Site	SR7


IEEE 802.11ac (80MHz)(ANT 3)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
155	5775	30.141	≥ 30	Pass

Channel 155 (5775MHz)

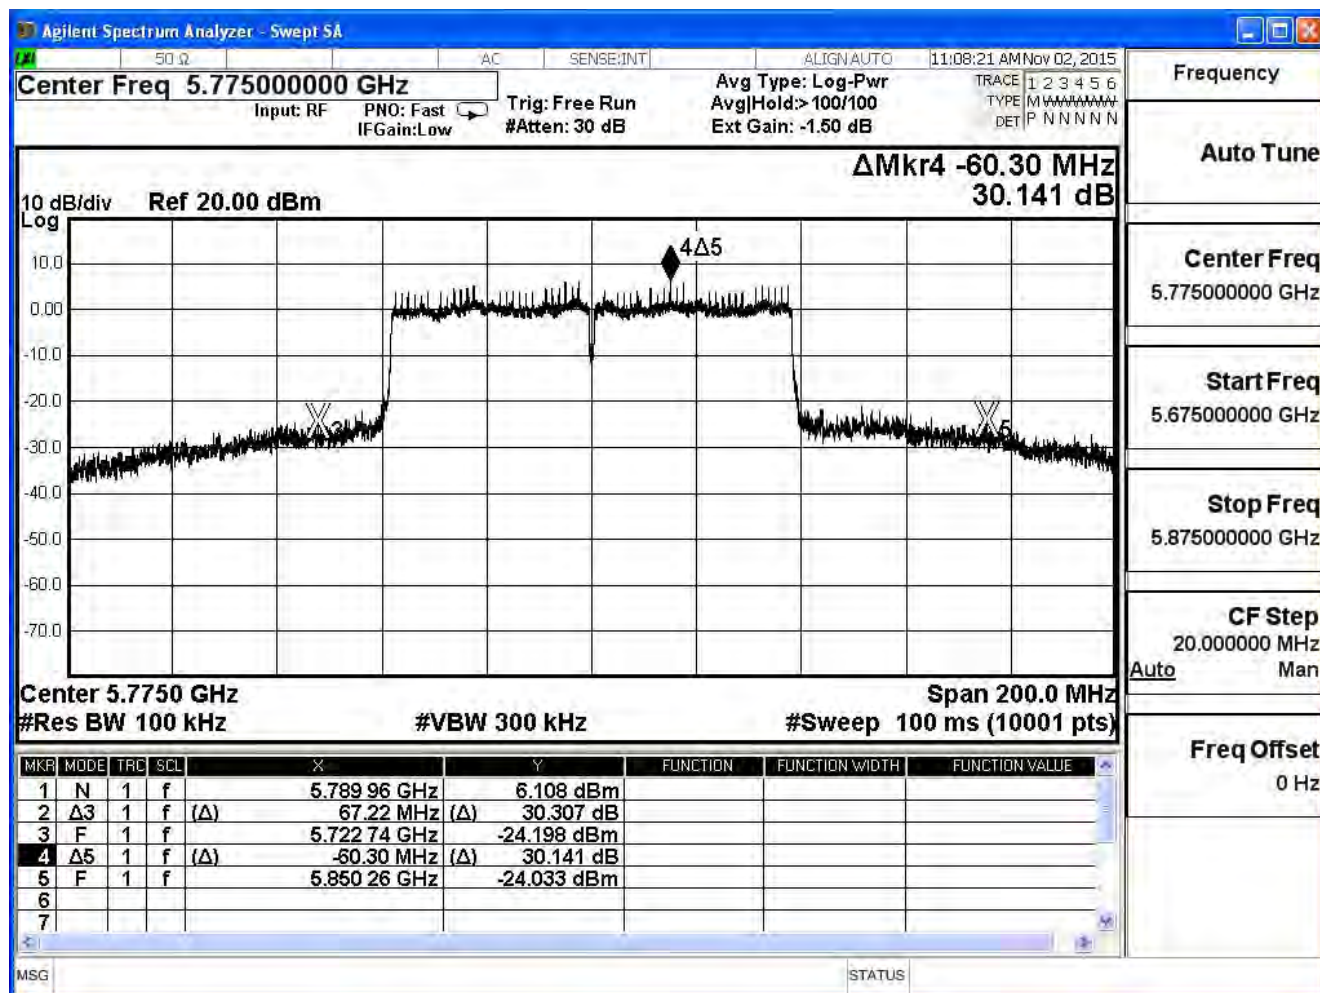


Product	Wireless-AC2600 Dual WAN VPN Wireless Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_CDD Mode_Adapter 1		
Date of Test	2015/11/12	Test Site	SR7


5745MHz (30MHz~25GHz)-802.11a (Ant 0)

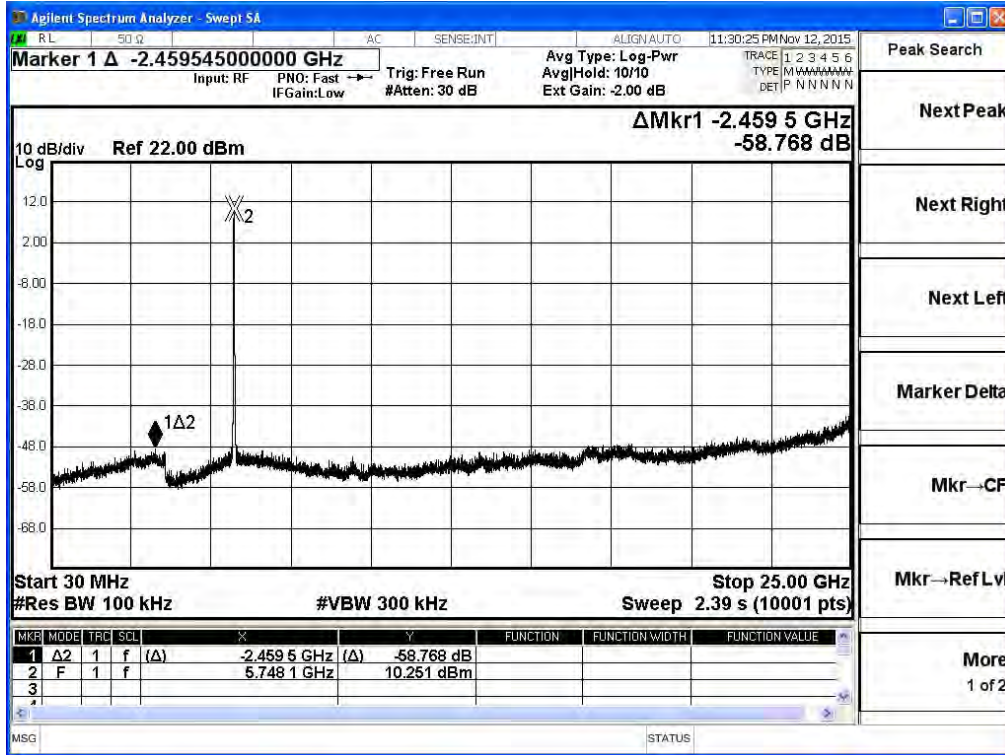


5785MHz (30MHz~25GHz)-802.11a (Ant 0)

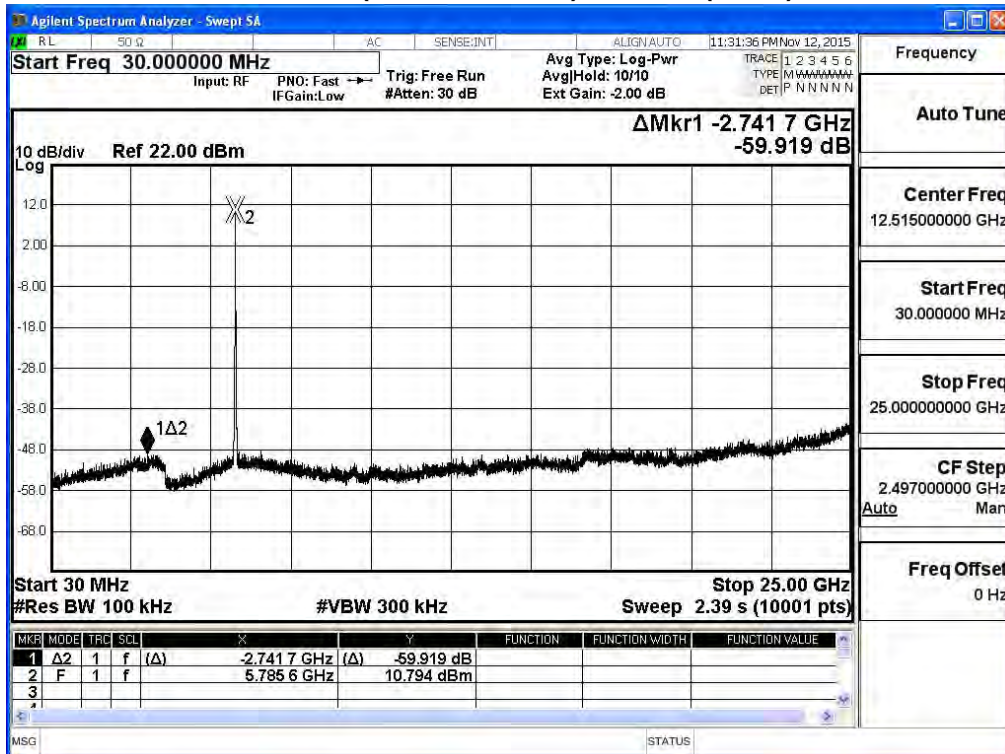


5825MHz (30MHz~25GHz)-802.11a (Ant 0)

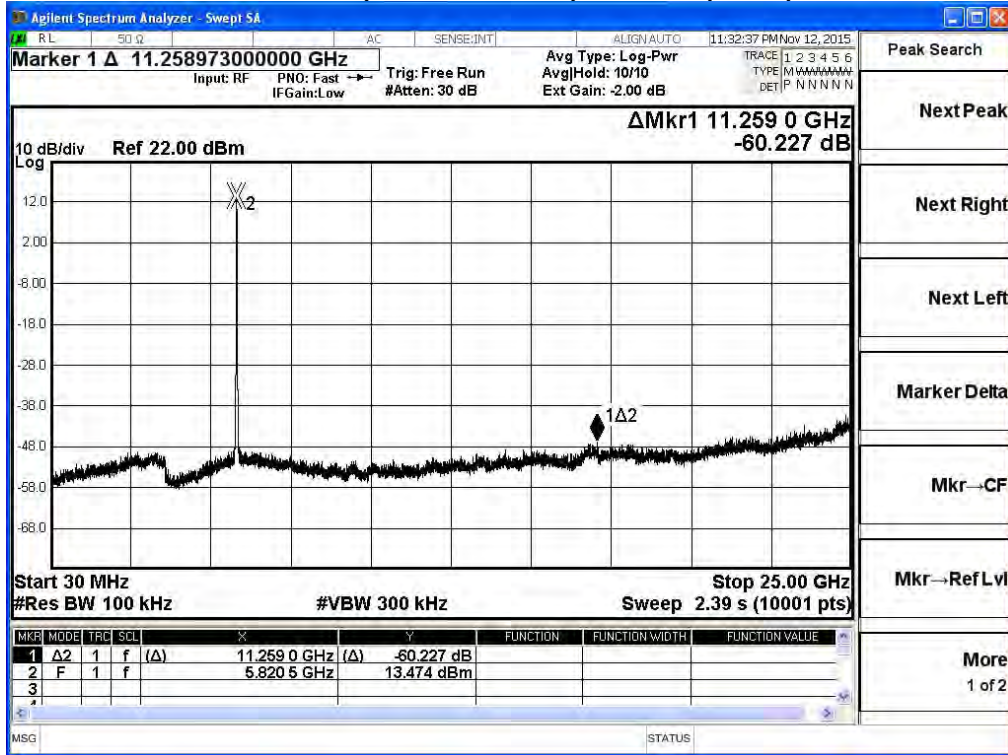


5745MHz (30MHz~25GHz)-802.11a (Ant 1)

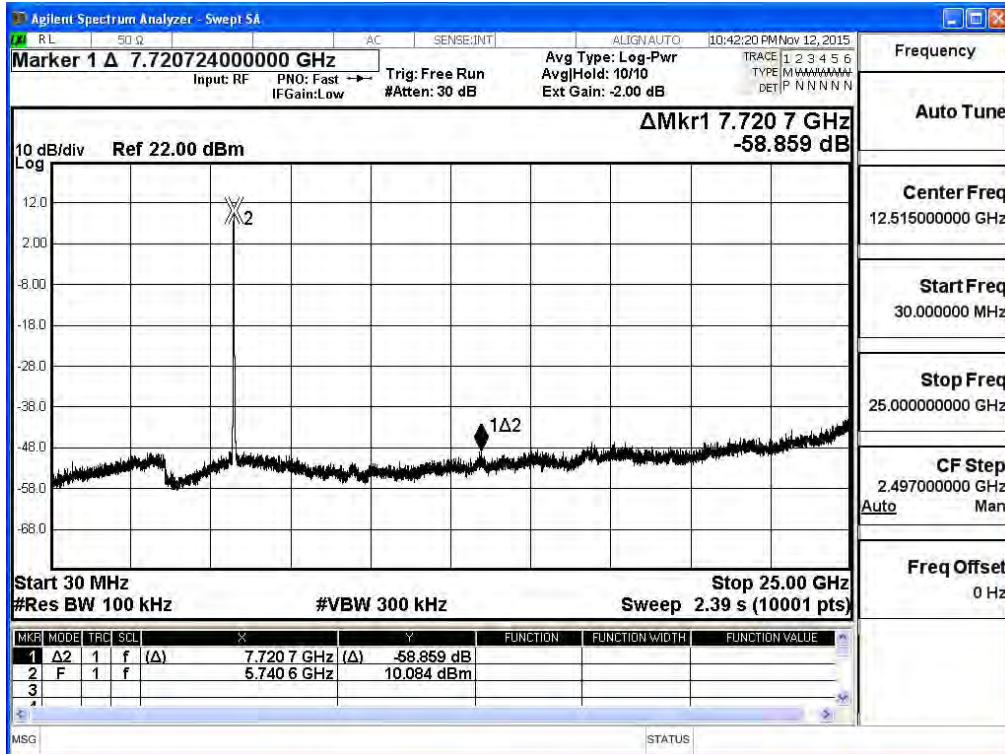


5785MHz (30MHz~25GHz)-802.11a (Ant 1)

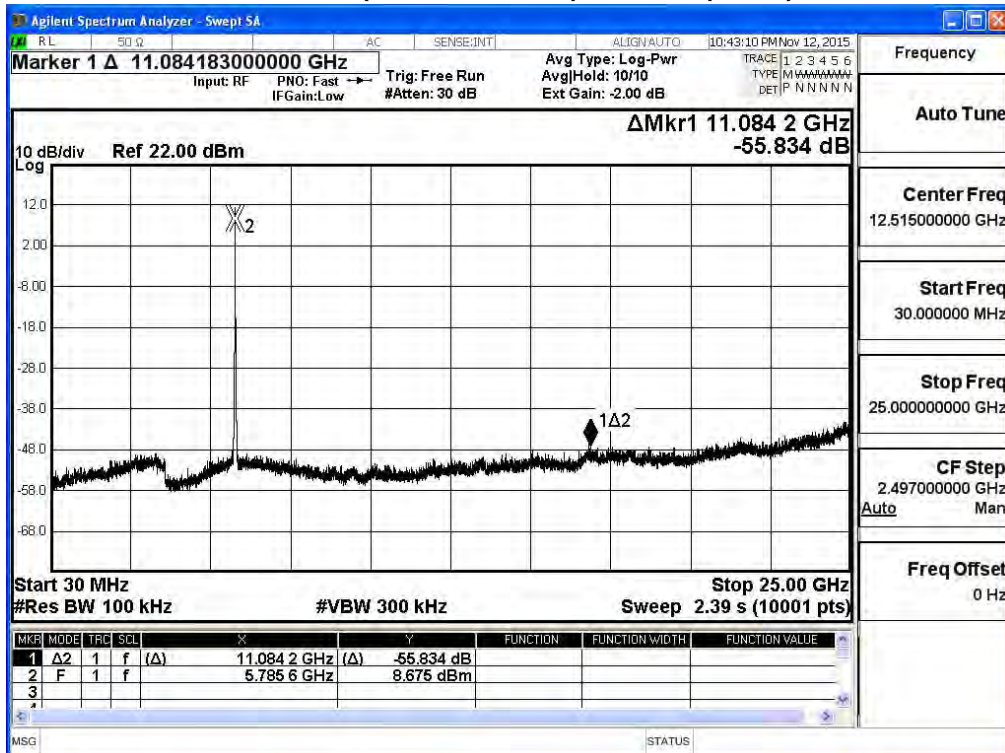


5825MHz (30MHz~25GHz)-802.11a (Ant 1)

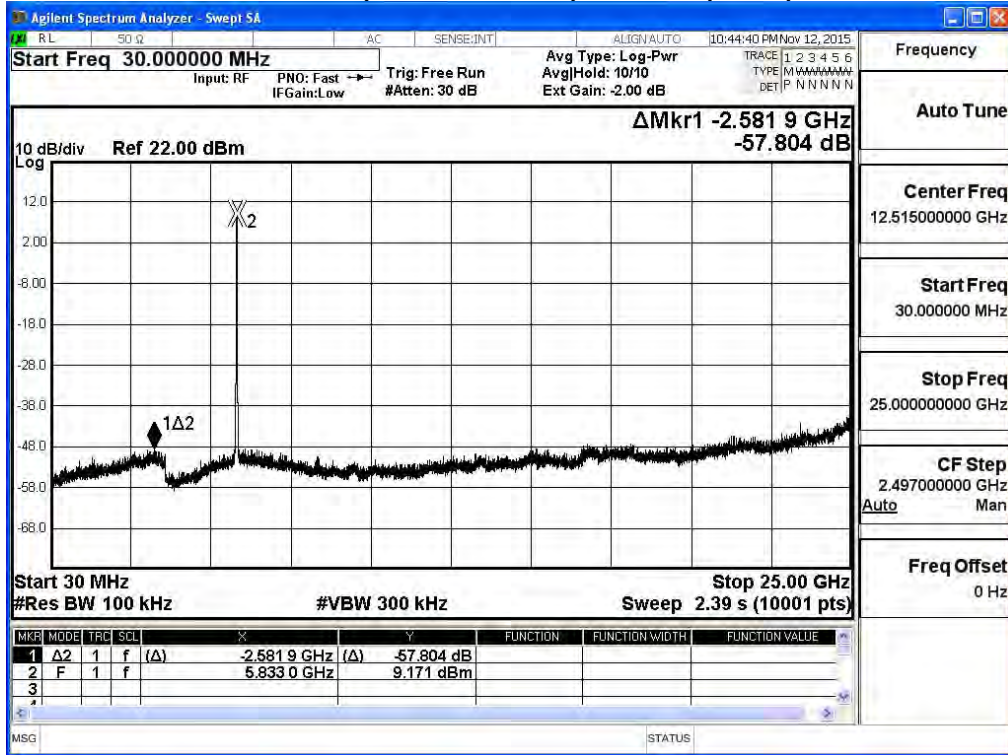


5745MHz (30MHz~25GHz)-802.11a (Ant 2)

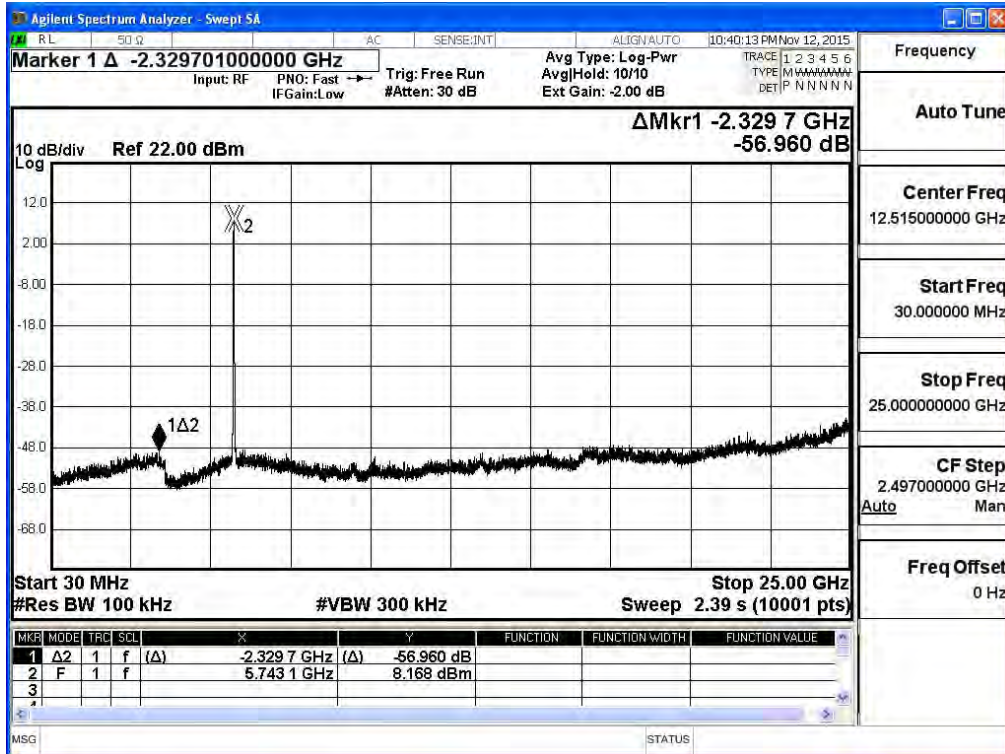


5785MHz (30MHz~25GHz)-802.11a (Ant 2)

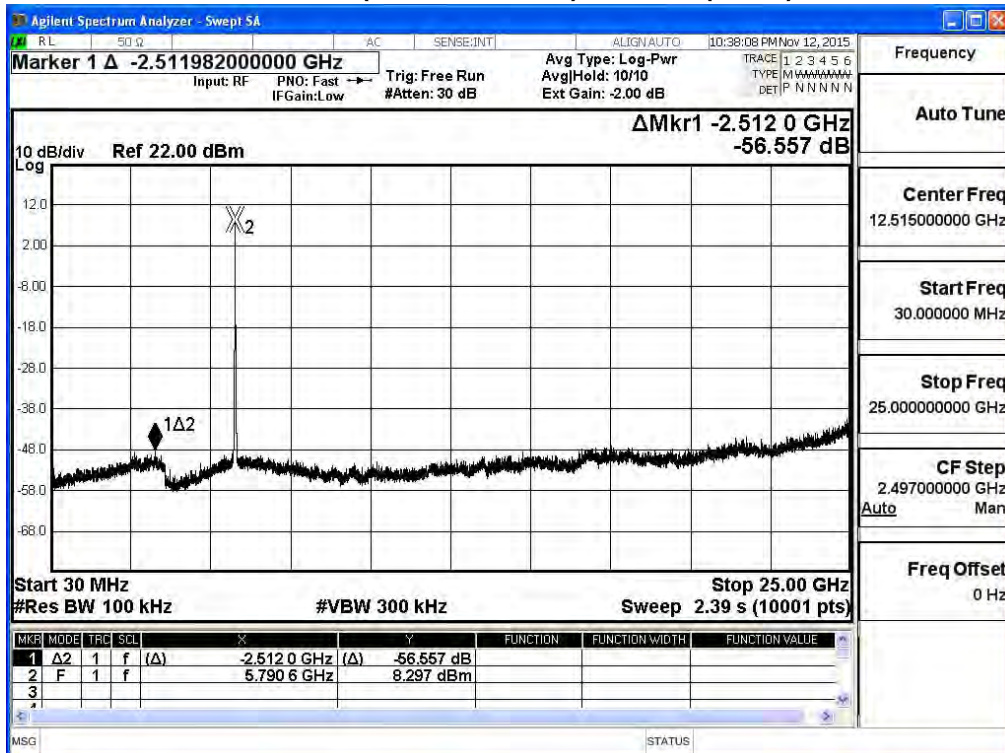


5825MHz (30MHz~25GHz)-802.11a (Ant 2)

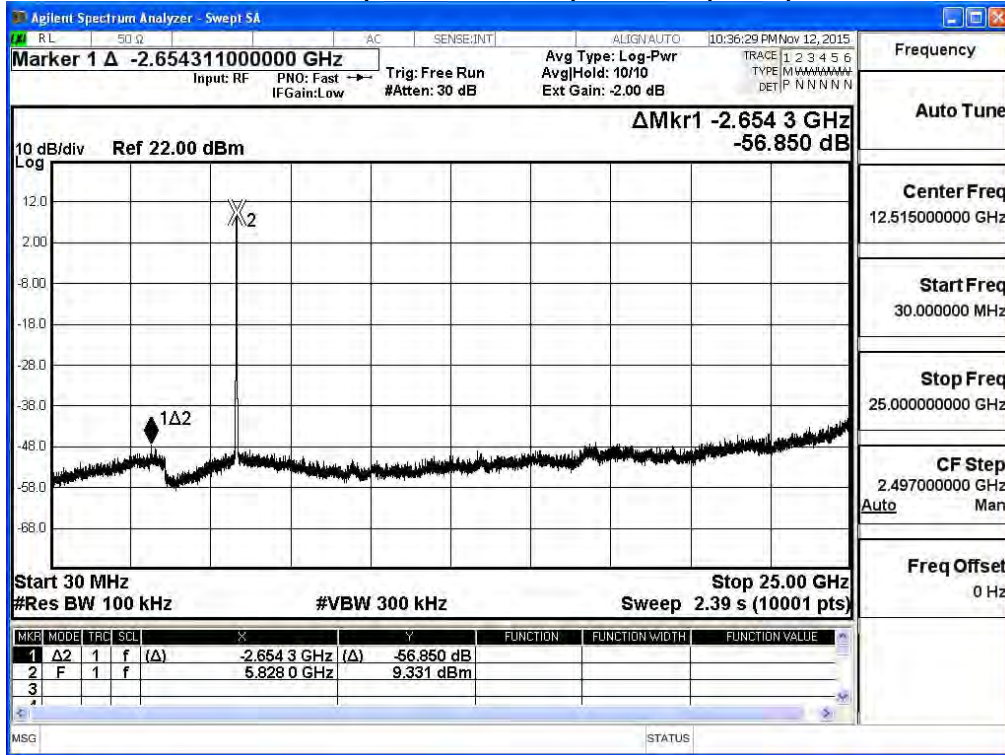


5745MHz (30MHz~25GHz)-802.11a (Ant 3)

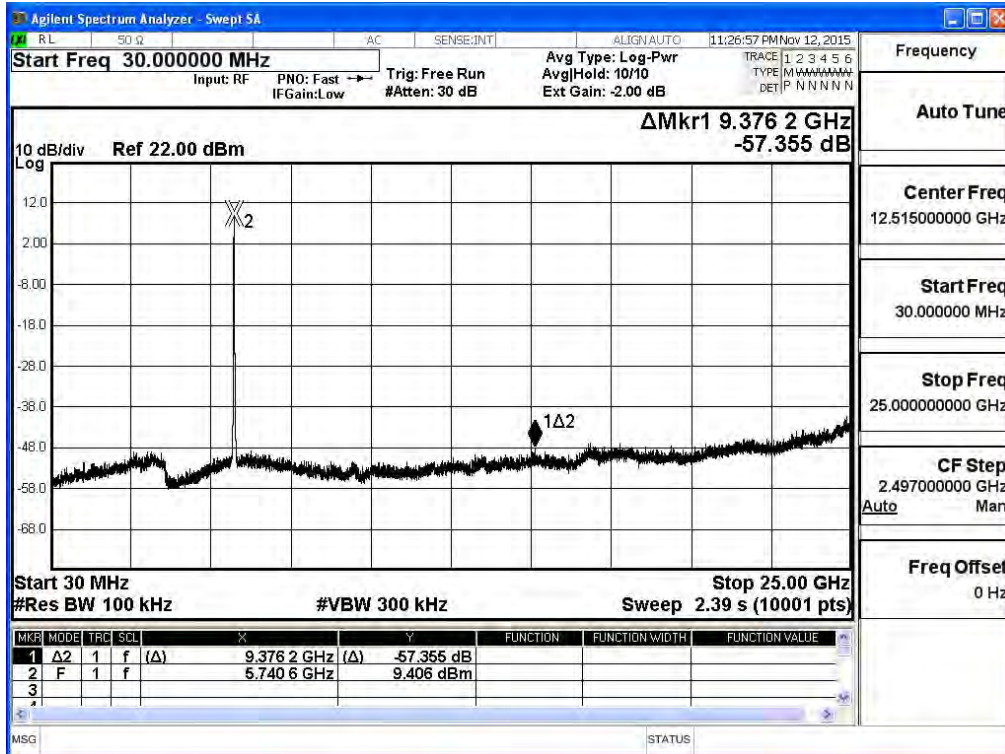


5785MHz (30MHz~25GHz)-802.11a (Ant 3)

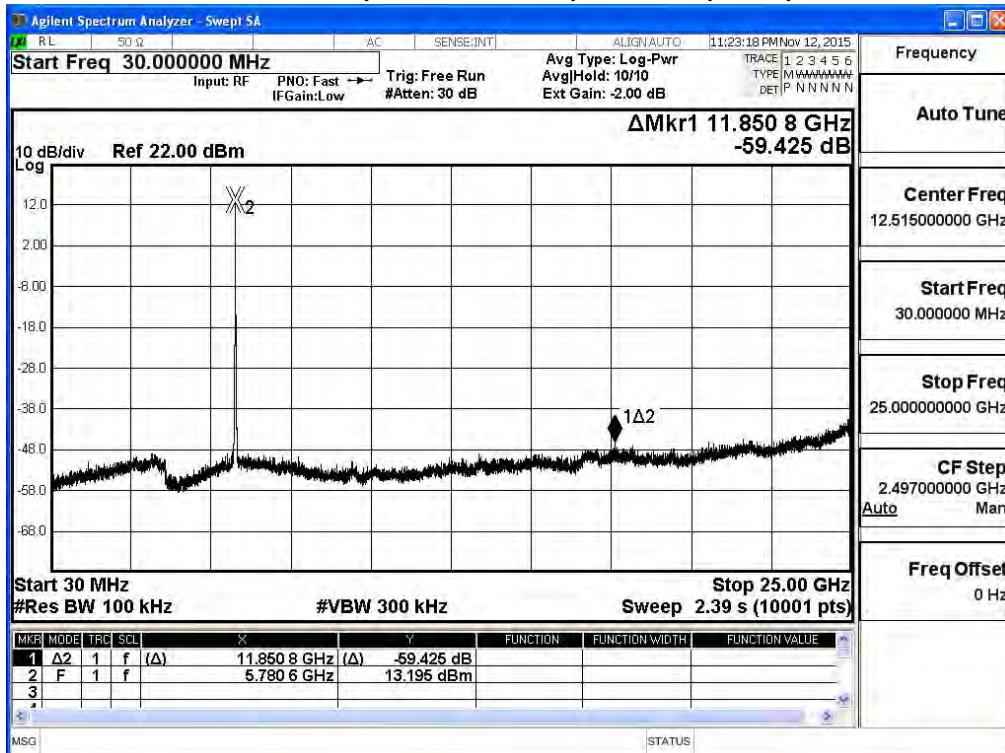


5825MHz (30MHz~25GHz)-802.11a (Ant 3)

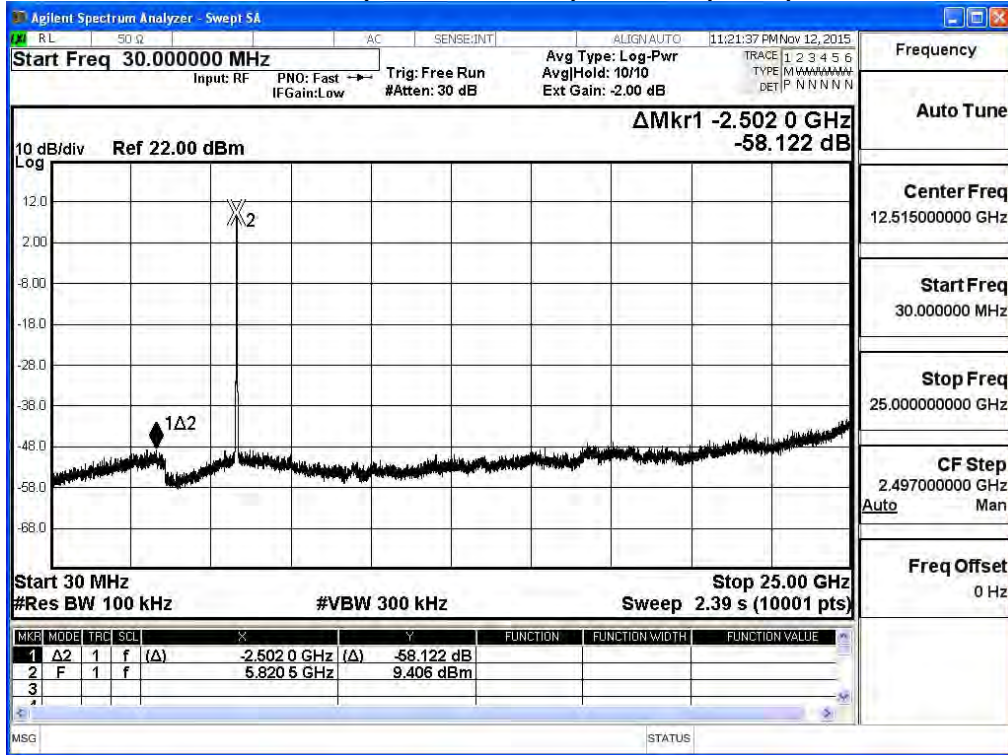


5745MHz (30MHz~25GHz)-802.11n(20MHz) (Ant 0)

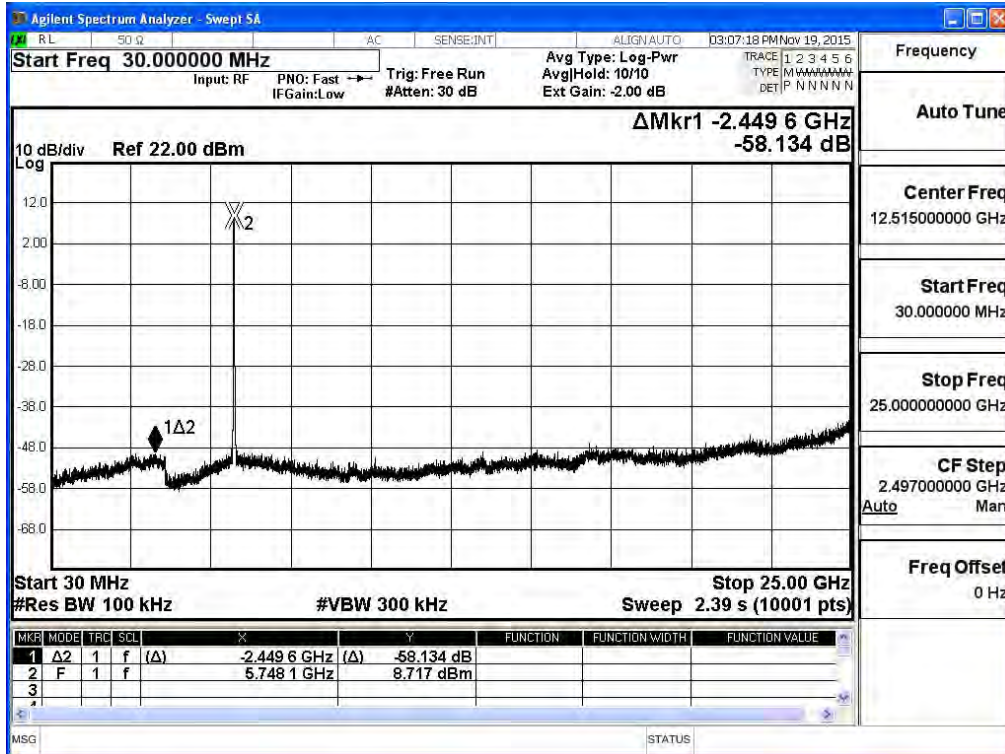


5785MHz (30MHz~25GHz)-802.11n(20MHz) (Ant 0)

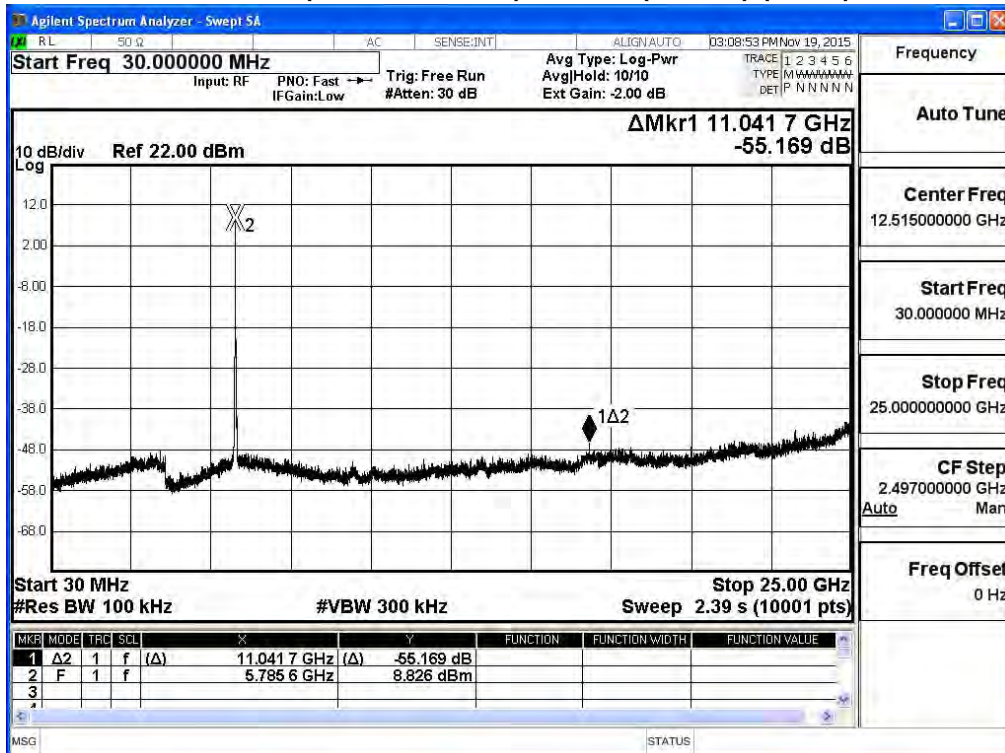


5825MHz (30MHz~25GHz)-802.11n(20MHz) (Ant 0)

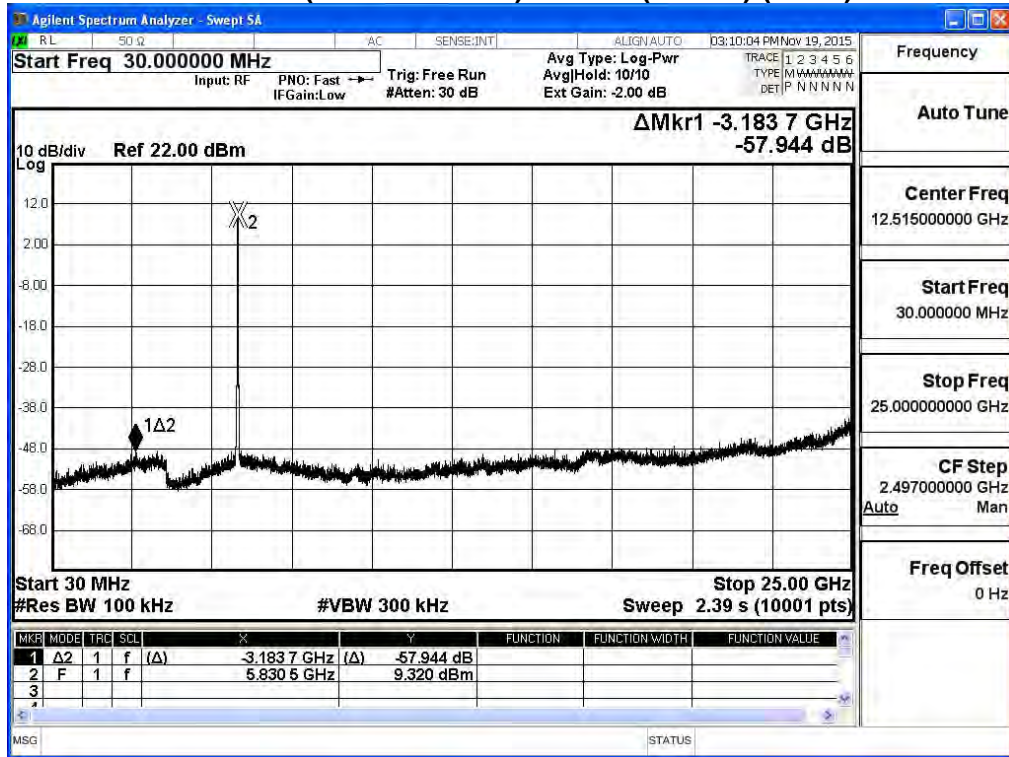


5745MHz (30MHz~25GHz)-802.11n(20MHz) (Ant 1)

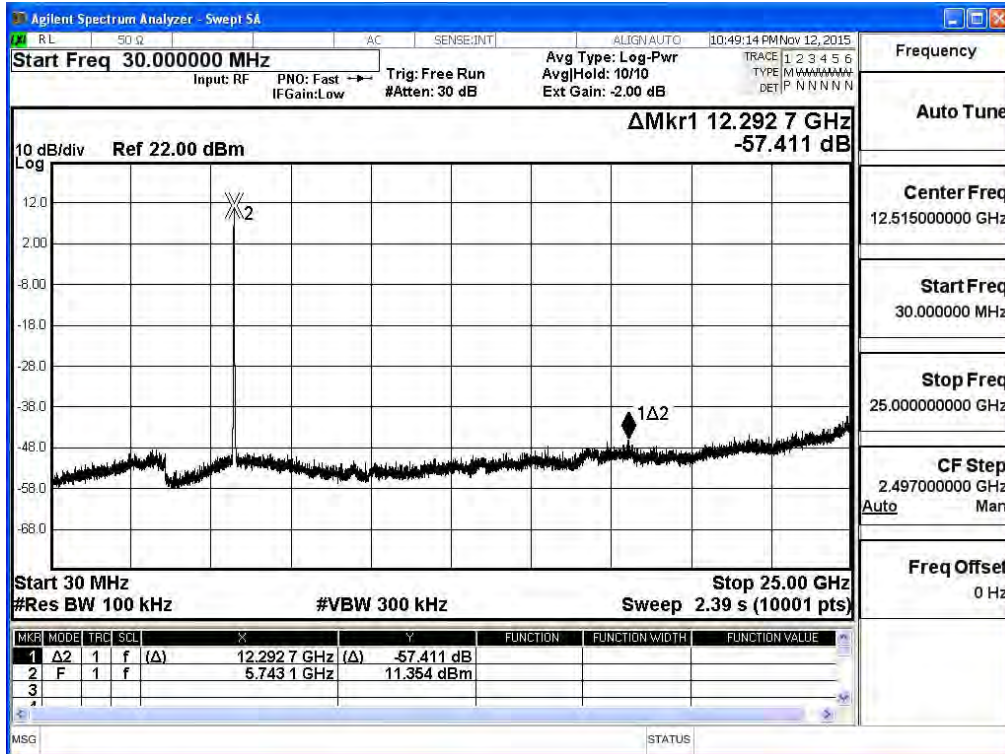


5785MHz (30MHz~25GHz)-802.11n(20MHz) (Ant 1)

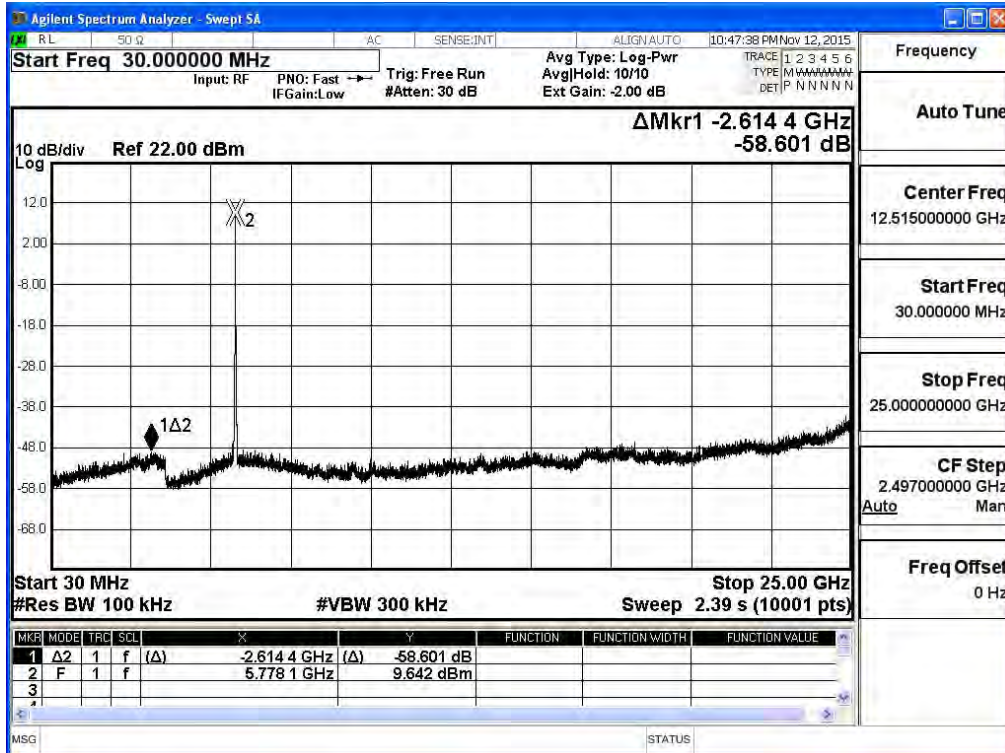


5825MHz (30MHz~25GHz)-802.11n(20MHz) (Ant 1)

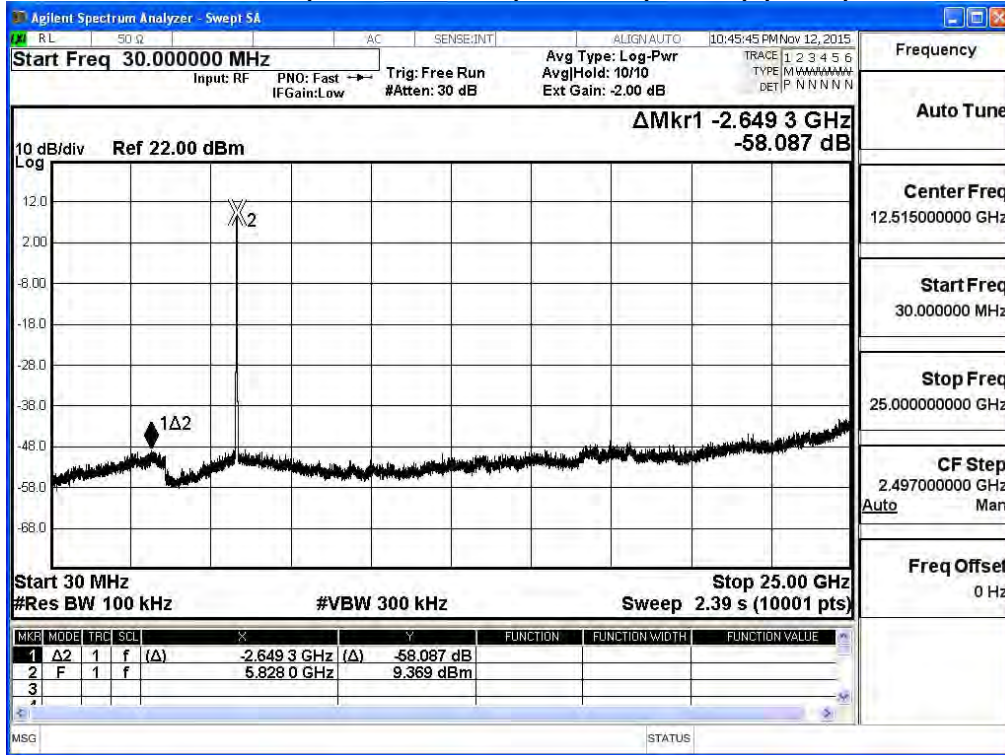


5745MHz (30MHz~25GHz)-802.11n(20MHz) (Ant 2)

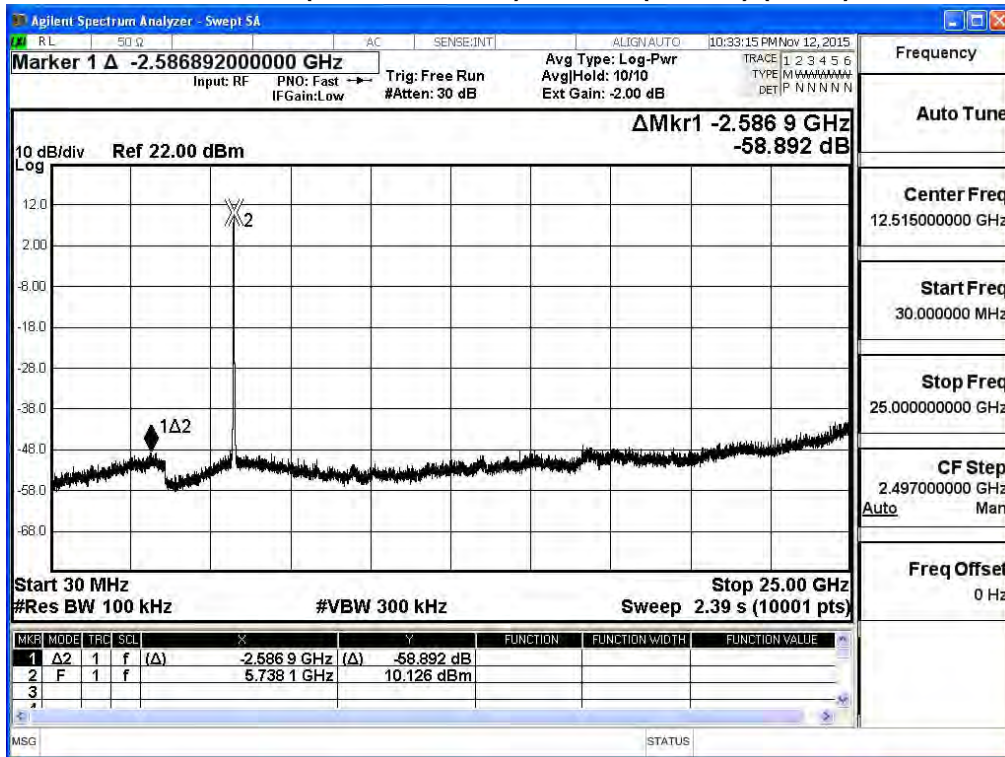


5785MHz (30MHz~25GHz)-802.11n(20MHz) (Ant 2)

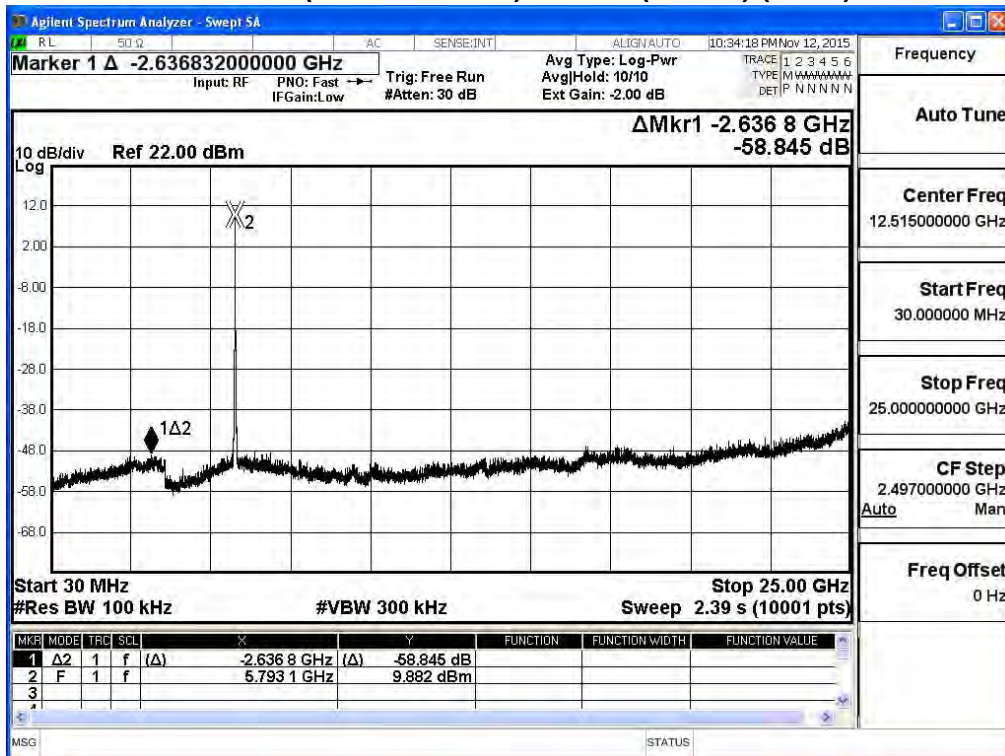


5825MHz (30MHz~25GHz)-802.11n(20MHz) (Ant 2)

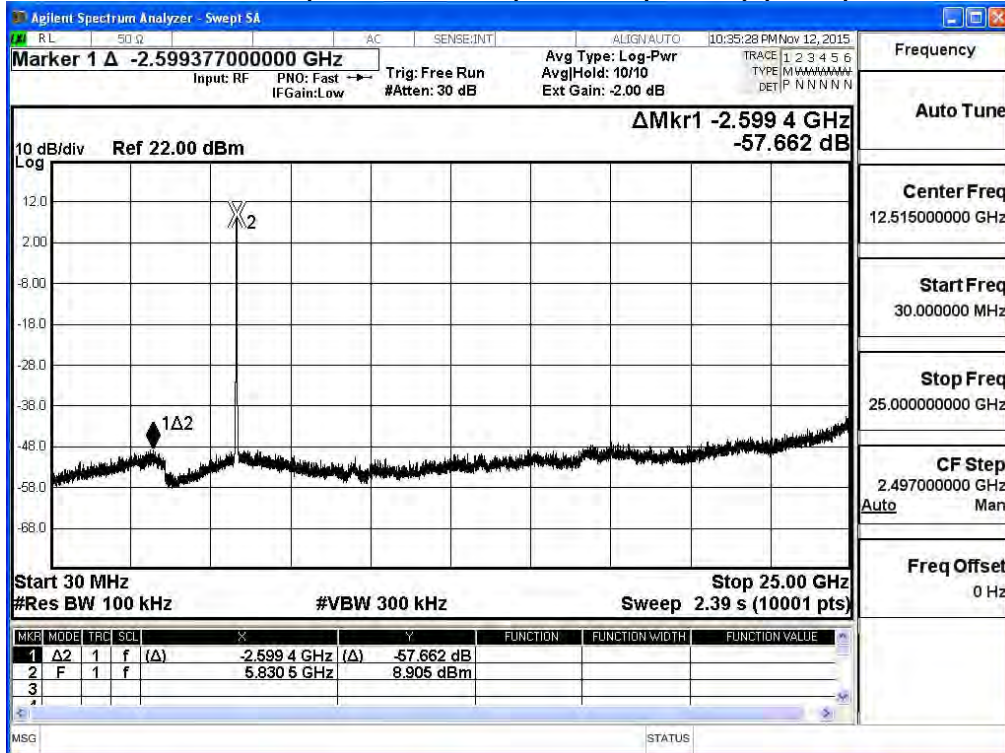


5745MHz (30MHz~25GHz)-802.11n(20MHz) (Ant 3)

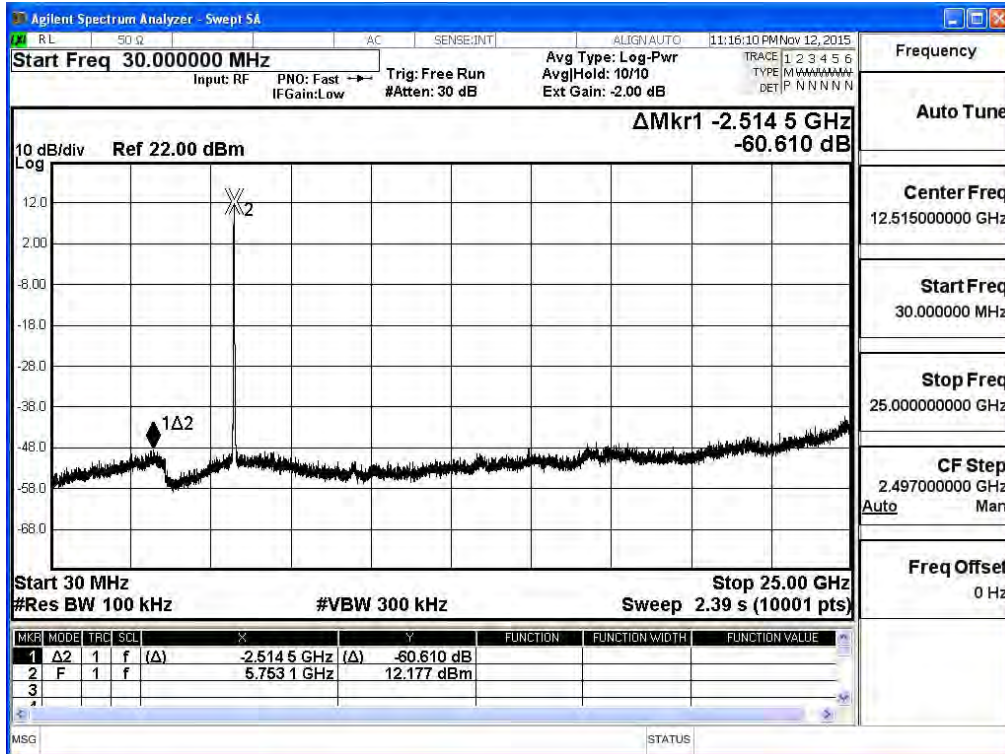


5785MHz (30MHz~25GHz)-802.11n(20MHz) (Ant 3)

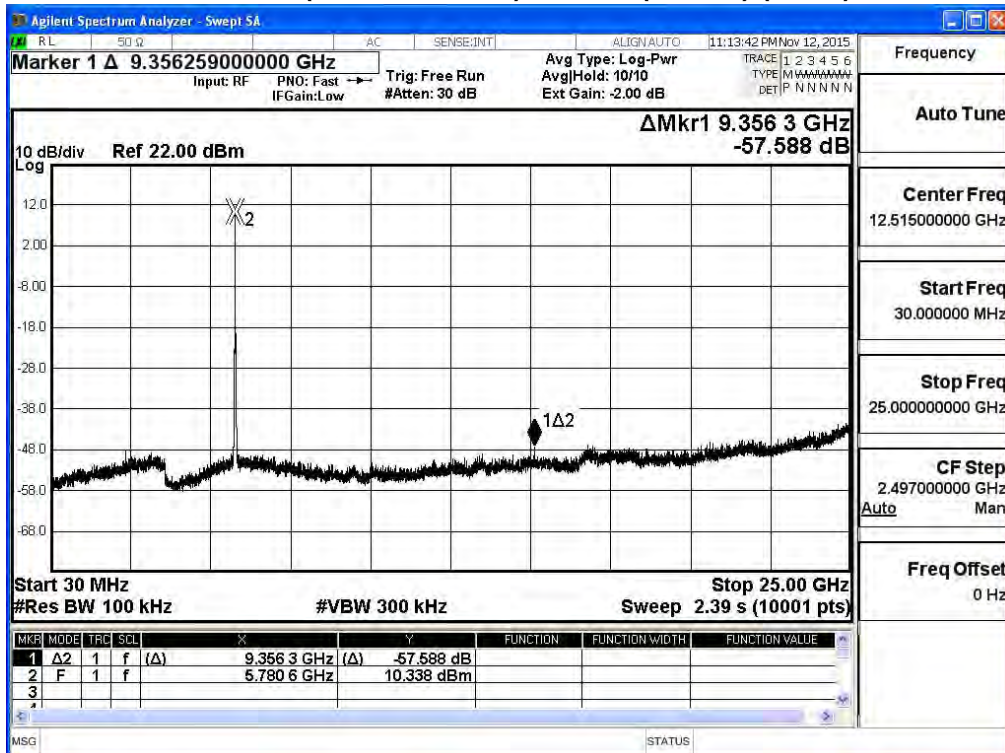


5825MHz (30MHz~25GHz)-802.11n(20MHz) (Ant 3)

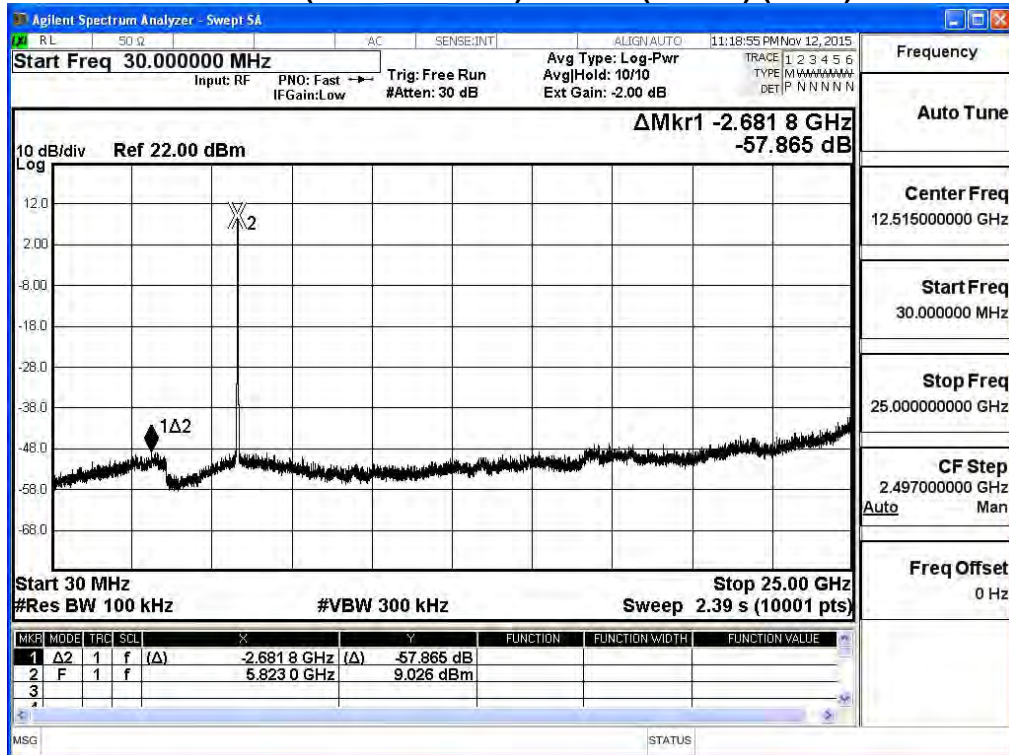


5755MHz (30MHz~25GHz)- 802.11n(40MHz) (Ant 0)

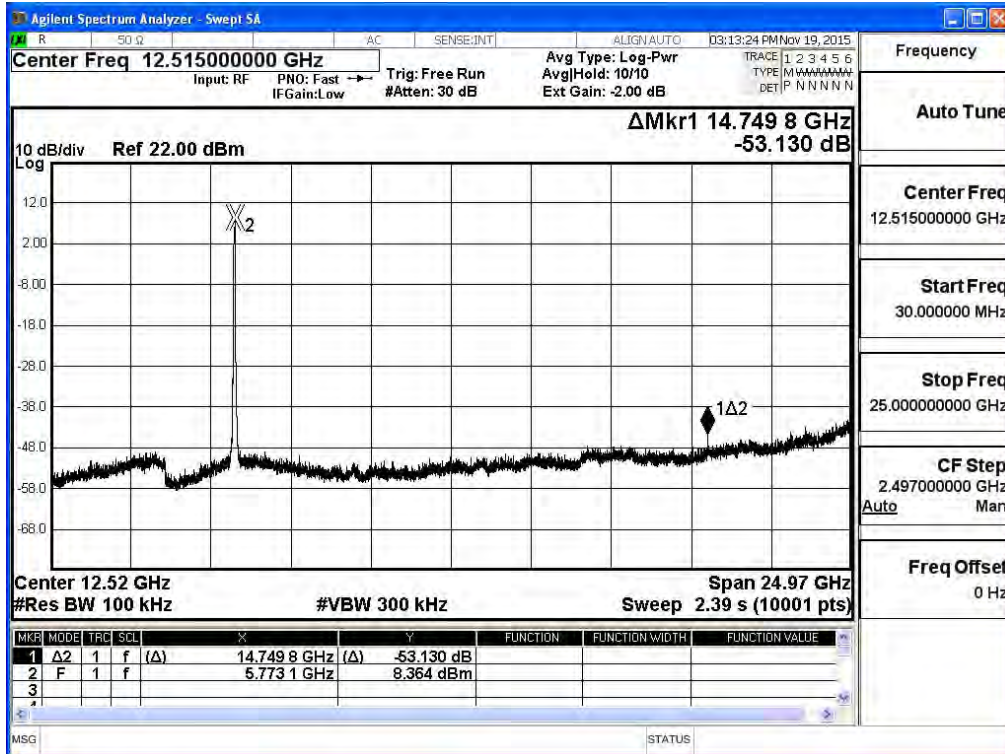


5795MHz (30MHz~25GHz)- 802.11n(40MHz) (Ant 0)

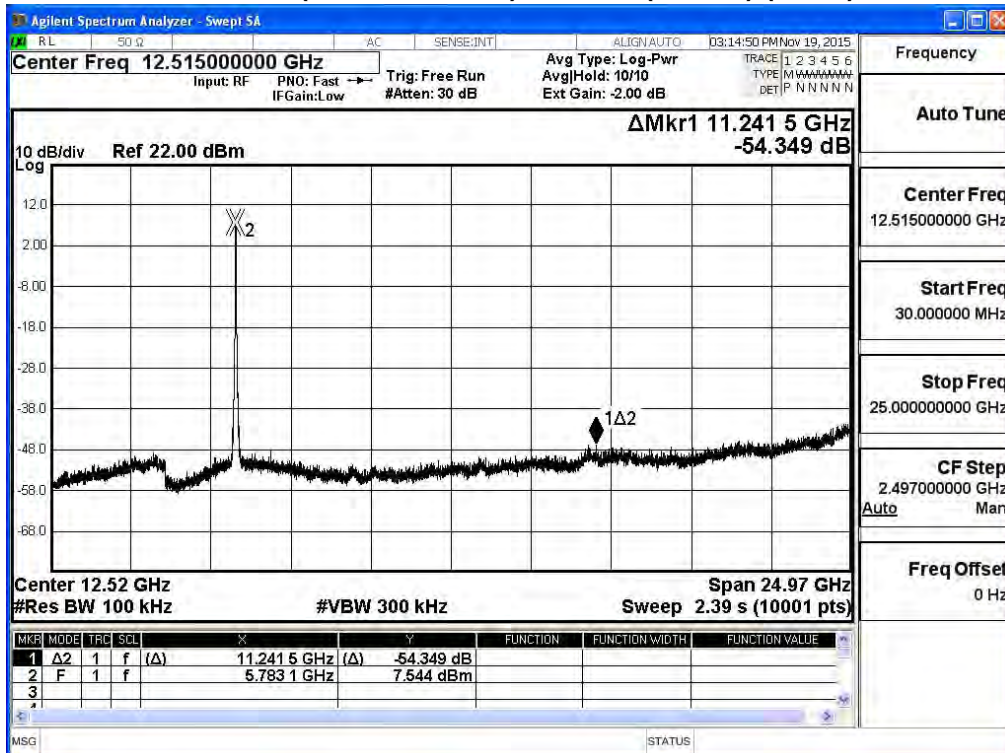


5755MHz (30MHz~25GHz)- 802.11n(40MHz) (Ant 1)

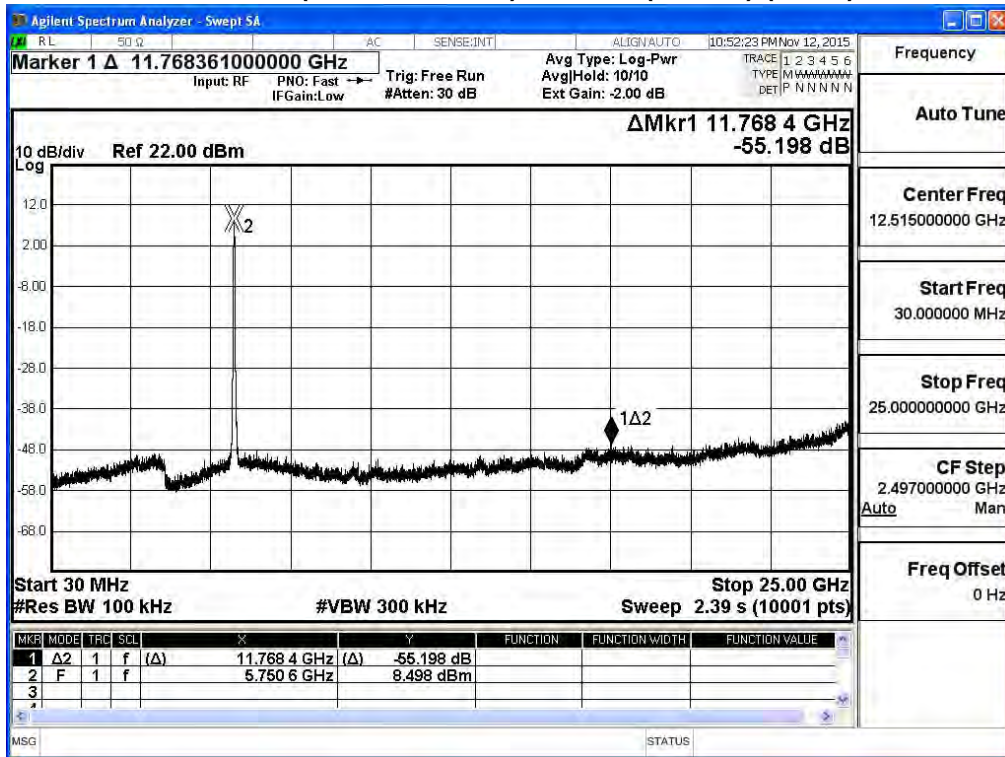


5795MHz (30MHz~25GHz)- 802.11n(40MHz) (Ant 1)

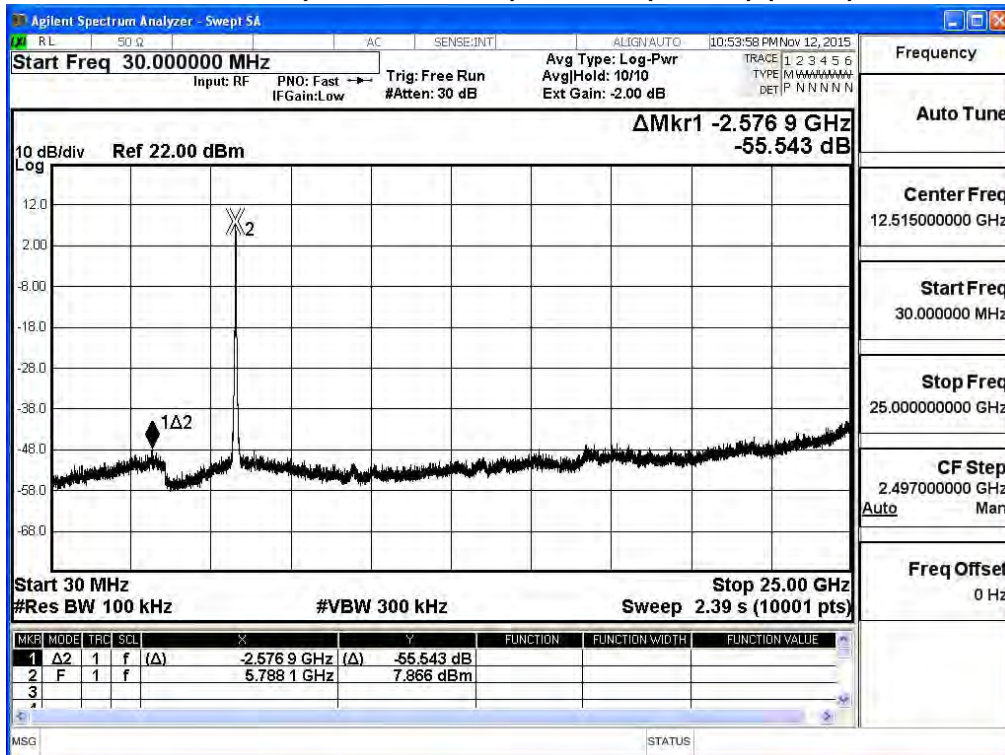


5755MHz (30MHz~25GHz)- 802.11n(40MHz) (Ant 2)

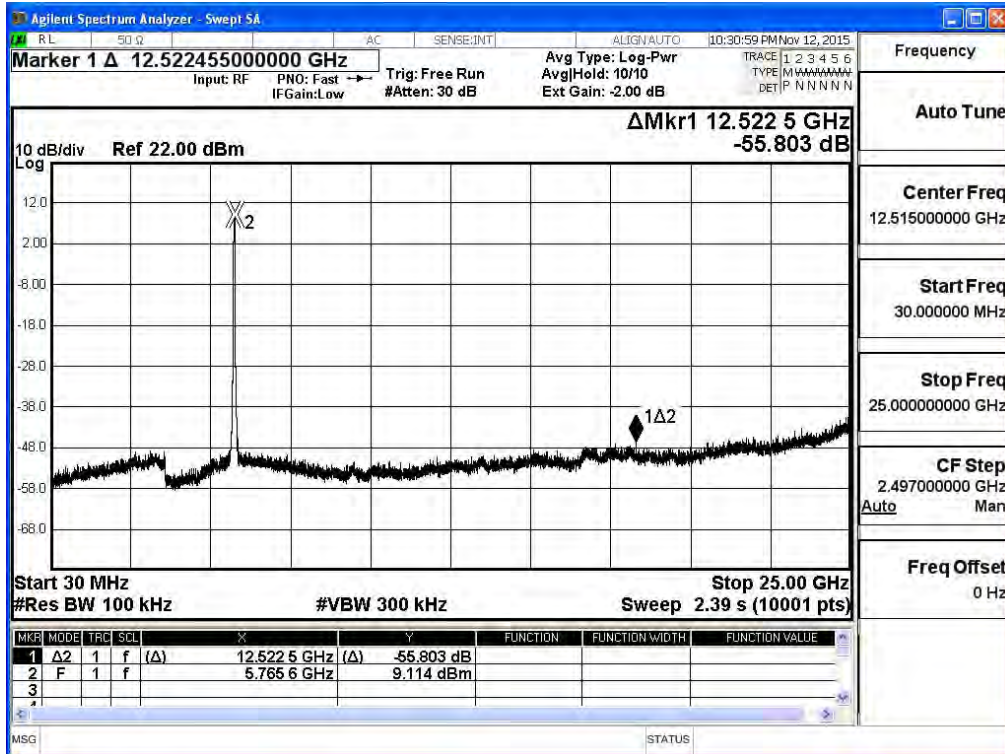


5795MHz (30MHz~25GHz)- 802.11n(40MHz) (Ant 2)

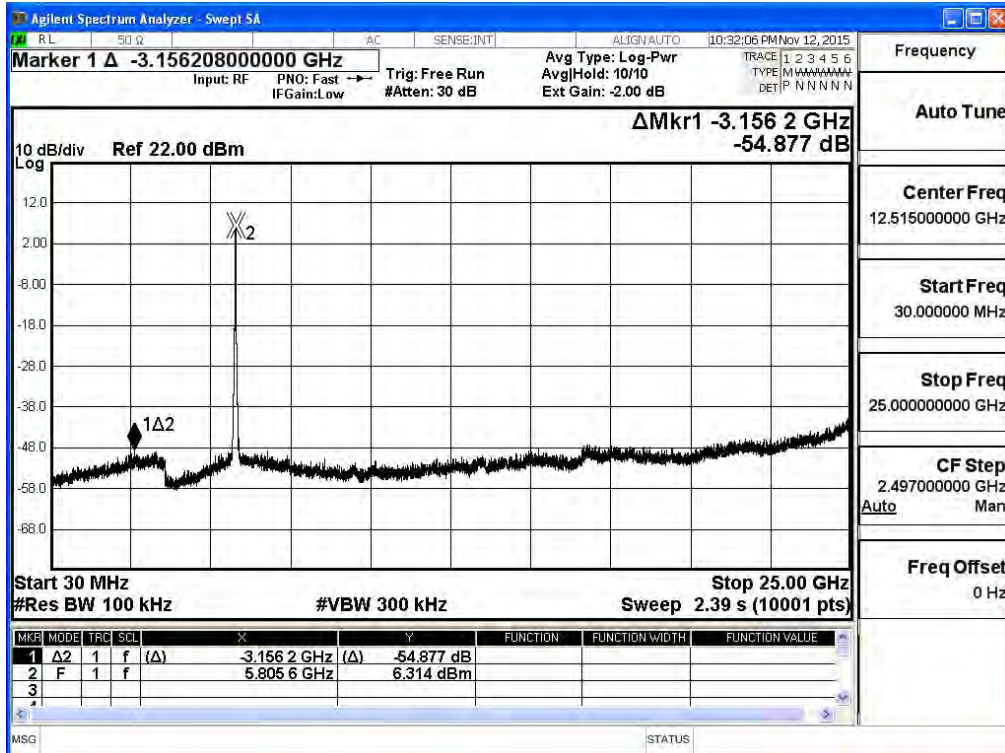


5755MHz (30MHz~25GHz)- 802.11n(40MHz) (Ant 3)

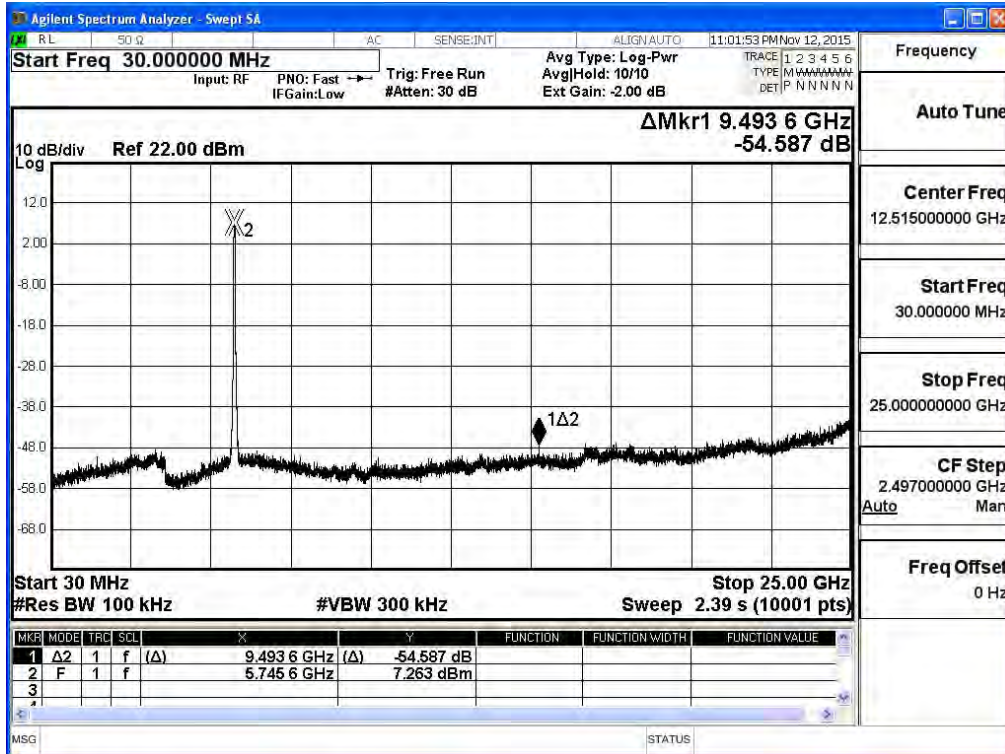


5795MHz (30MHz~25GHz)- 802.11n(40MHz) (Ant 3)

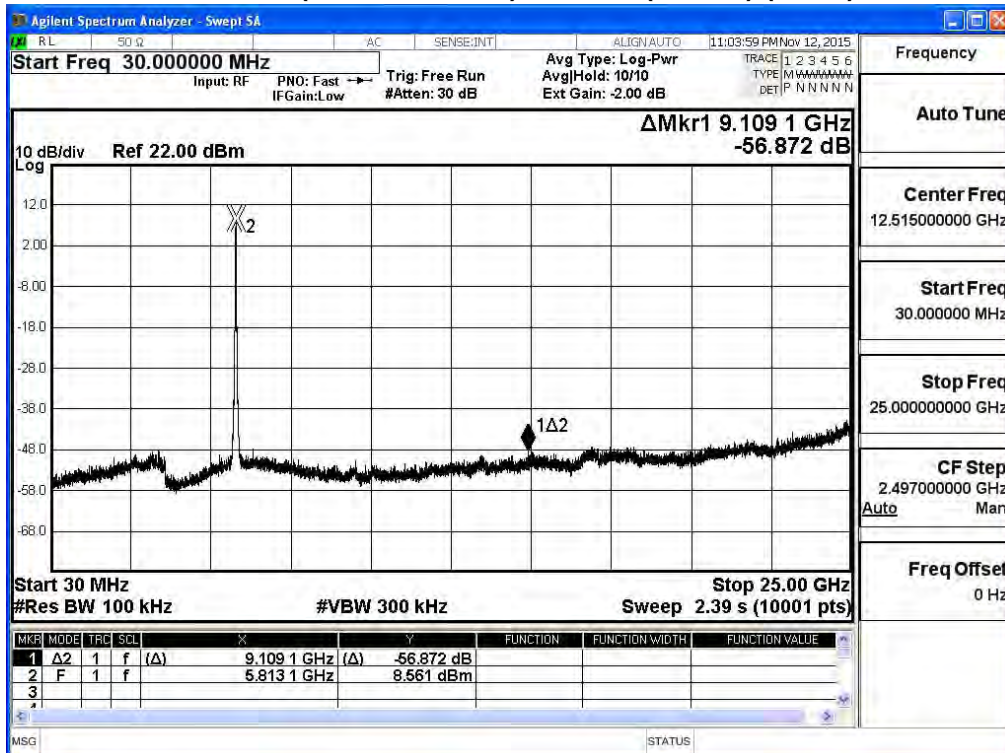


5775MHz (30MHz~25GHz)- 802.11ac(80MHz) (Ant 0)

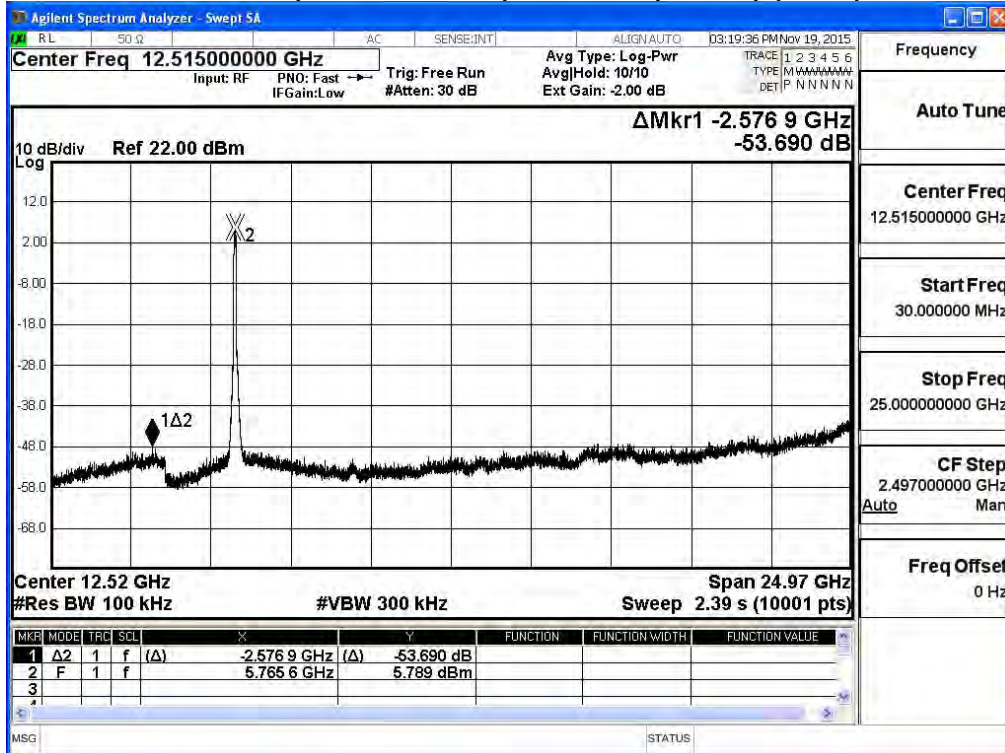


5775MHz (30MHz~25GHz)- 802.11ac(80MHz) (Ant 1)

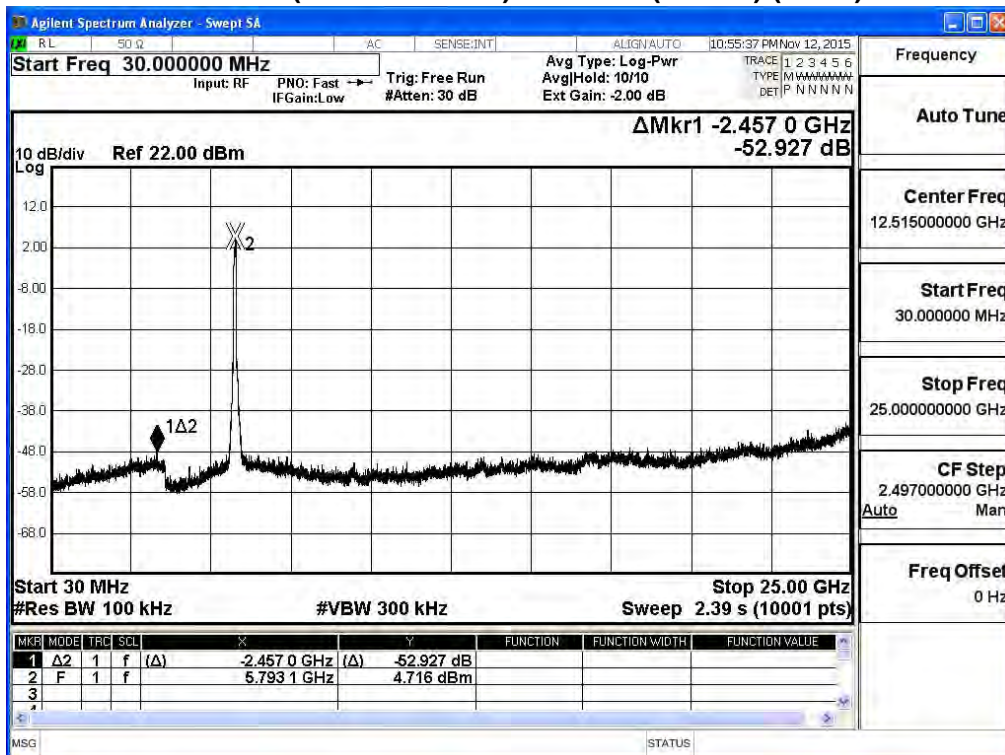

5775MHz (30MHz~25GHz)- 802.11ac(80MHz) (Ant 2)

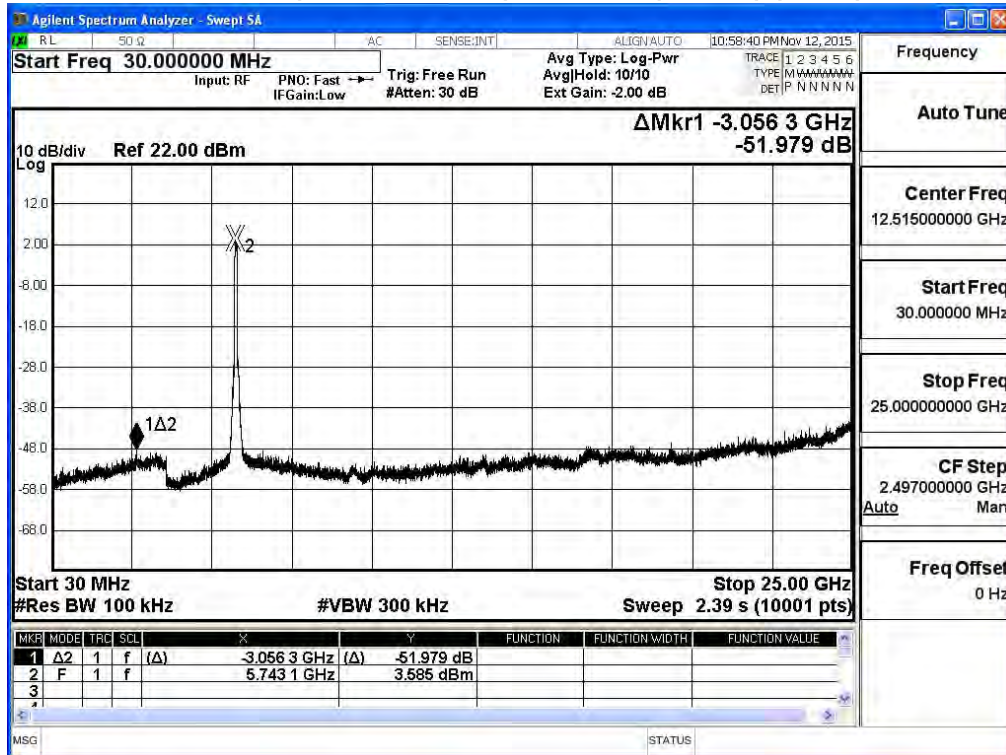

5775MHz (30MHz~25GHz)- 802.11ac(80MHz) (Ant 3)

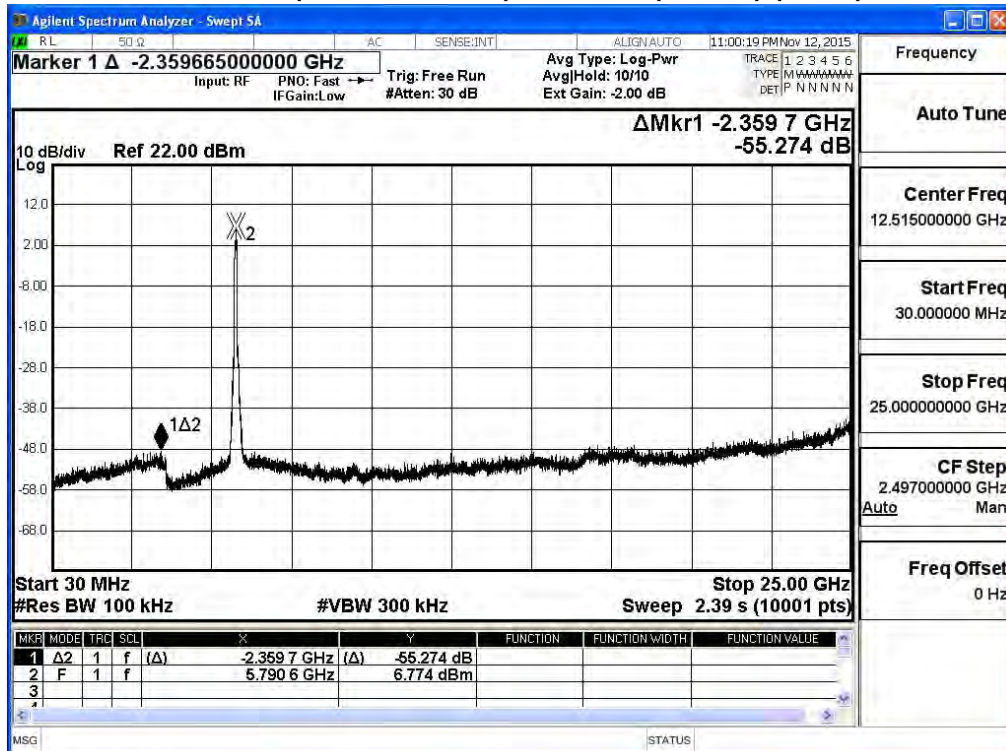

6. Radiated Emission Band Edge

6.1. Test Equipment


The following test equipments are used during the test:

Radiated Emission Band Edge / CB1

Instrument	Manufacturer	Model No.	Serial No	Next Cal. Date
Double Ridged Guide Horn Antenna	Schwarzback	BBHA 9120	D743	2016/01/26
Spectrum Analyzer	Agilent	E4440A	MY46187335	2016/01/07
k Type Cable	Huber Suhner	Sucoflex 102	25623/2	2016/01/26

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.

6.2. Test Setup

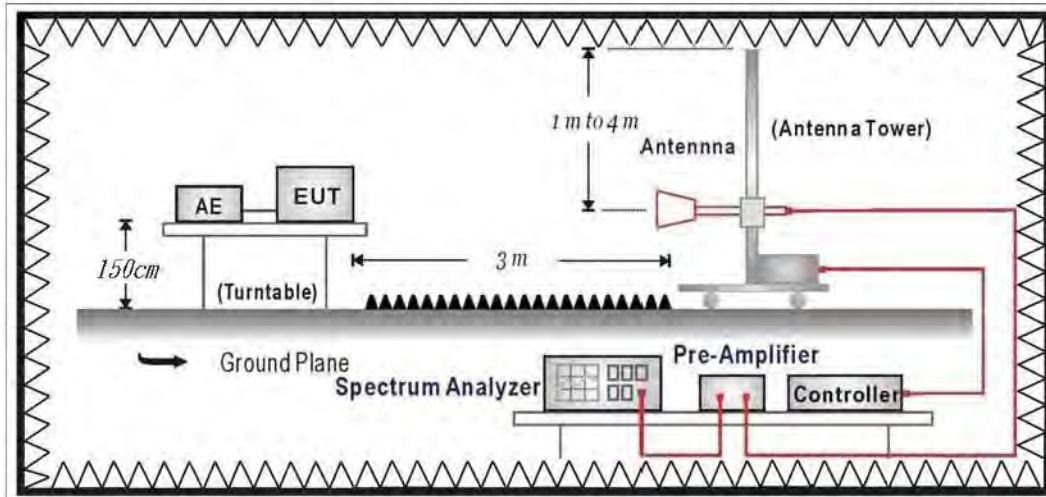

6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB558074 v03r02 for compliance to FCC 47CFR 15.247 requirements.

The EUT and its simulators are placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

6.5. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2014


6.6. Uncertainty

The measurement uncertainty
 ± 3.9 dB above 1GHz

6.7. Test Result

Radiated is defined as

Site : CB1	Time : 2015/11/11 - 21:22
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2412MHz

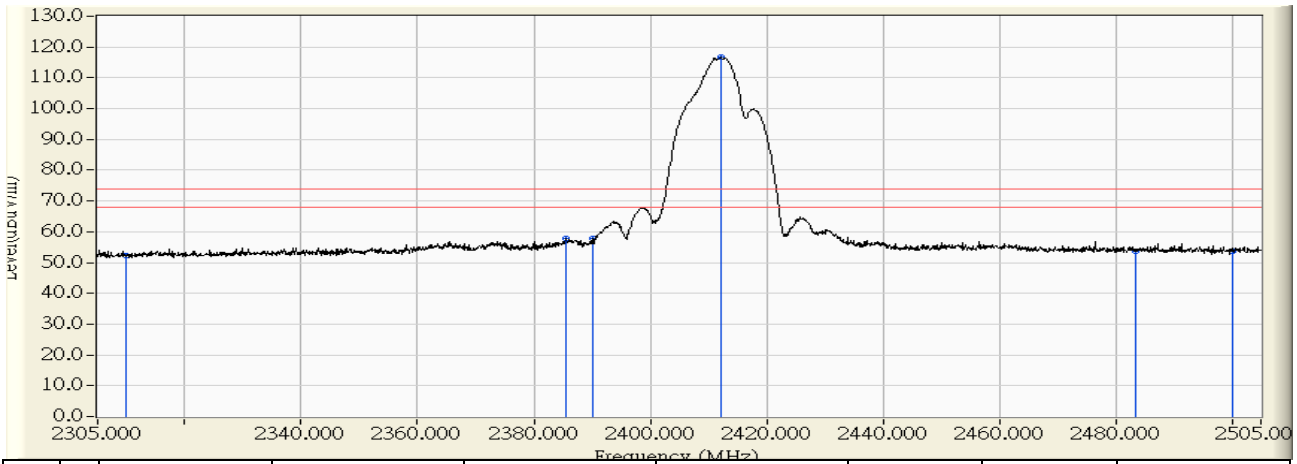


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	24.310	52.440	-21.560	74.000	PEAK
2	2385.400	28.887	29.105	57.992	-16.008	74.000	PEAK
3	2390.000	28.933	29.067	58.000	-16.000	74.000	PEAK
4	* 2412.200	29.156	87.451	116.607	42.607	74.000	PEAK
5	2483.500	29.829	23.716	53.545	-20.455	74.000	PEAK
6	2500.000	29.826	23.966	53.791	-20.209	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 21:24
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2412MHz

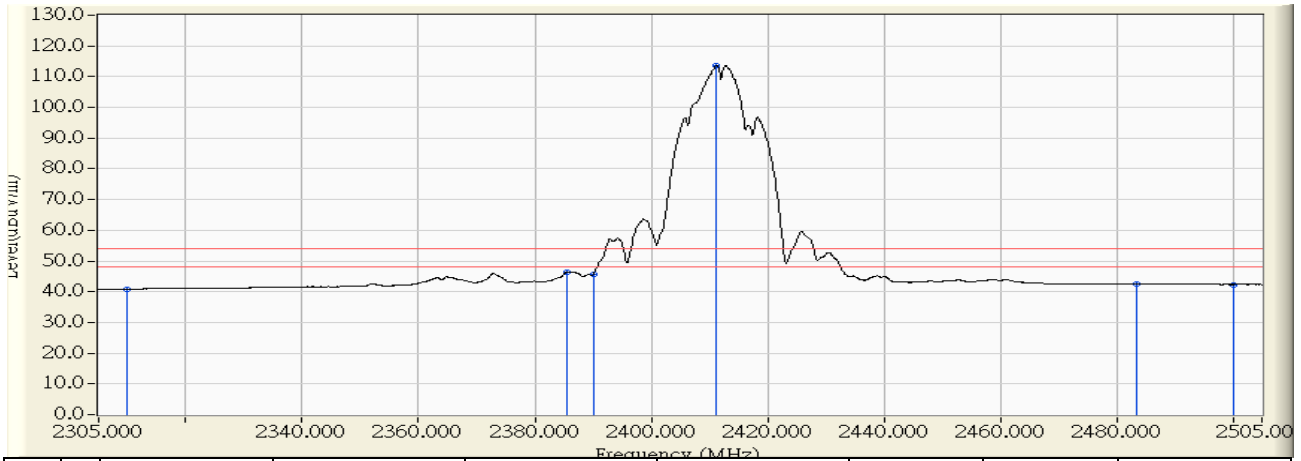


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	12.621	40.751	-13.249	54.000	AVERAGE
2	2385.500	28.888	17.465	46.353	-7.647	54.000	AVERAGE
3	2390.000	28.933	16.609	45.542	-8.458	54.000	AVERAGE
4	* 2411.200	29.146	84.489	113.635	59.635	54.000	AVERAGE
5	2483.500	29.829	12.669	42.498	-11.502	54.000	AVERAGE
6	2500.000	29.826	12.513	42.338	-11.662	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 21:30
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2412MHz

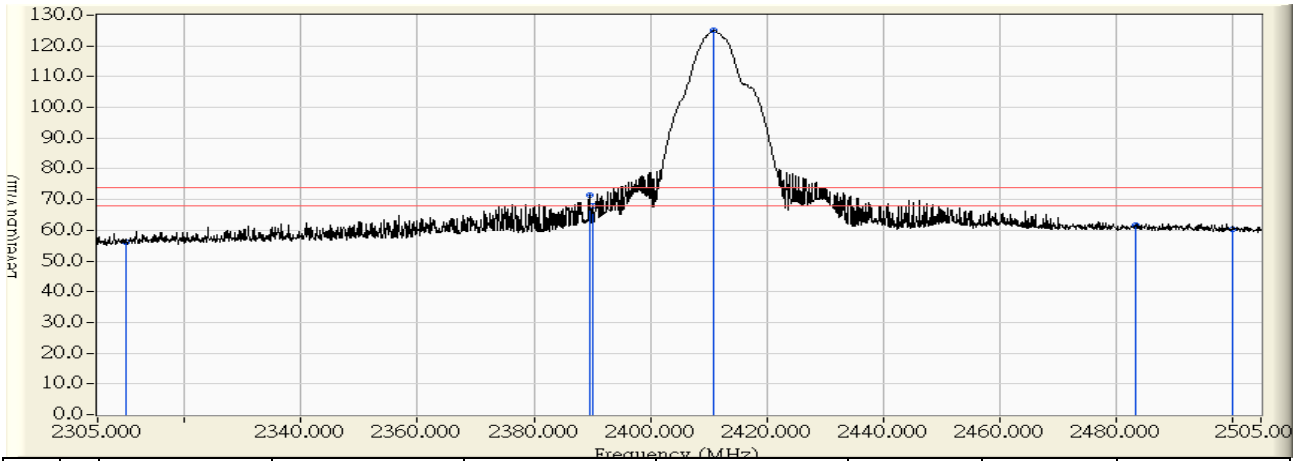


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	27.332	56.116	-17.884	74.000	PEAK
2	2389.500	29.741	41.782	71.523	-2.477	74.000	PEAK
3	2390.000	29.747	38.167	67.914	-6.086	74.000	PEAK
4	* 2410.900	29.998	95.192	125.191	51.191	74.000	PEAK
5	2483.500	30.830	30.733	61.563	-12.437	74.000	PEAK
6	2500.000	30.860	29.444	60.303	-13.697	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 21:29
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2412MHz

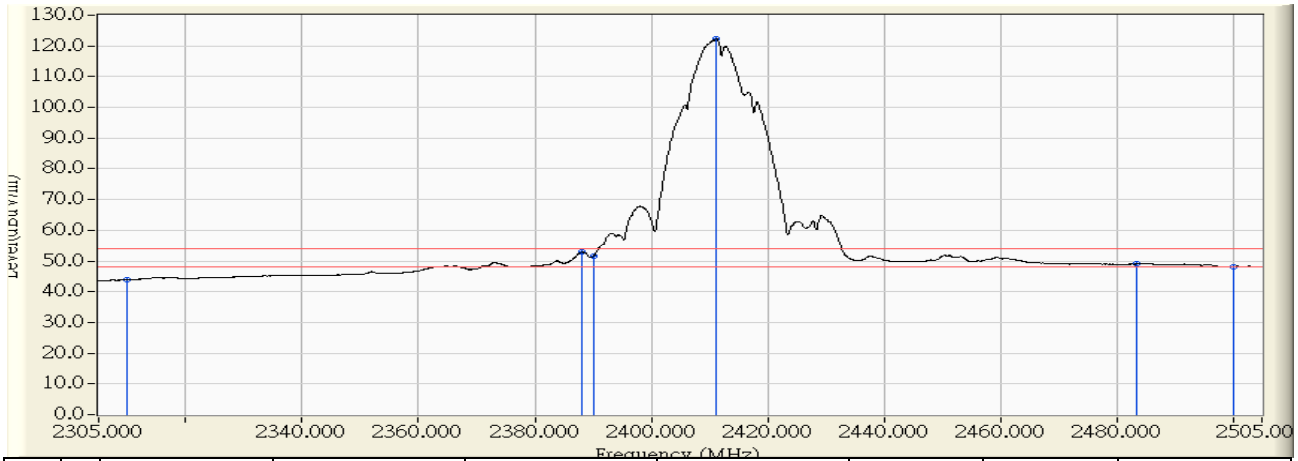


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	15.028	43.812	-10.188	54.000	AVERAGE
2	2388.000	29.723	23.115	52.838	-1.162	54.000	AVERAGE
3	2390.000	29.747	21.674	51.421	-2.579	54.000	AVERAGE
4	* 2411.200	30.002	92.335	122.337	68.337	54.000	AVERAGE
5	2483.500	30.830	18.147	48.977	-5.023	54.000	AVERAGE
6	2500.000	30.860	17.343	48.202	-5.798	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 22:14
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2417MHz

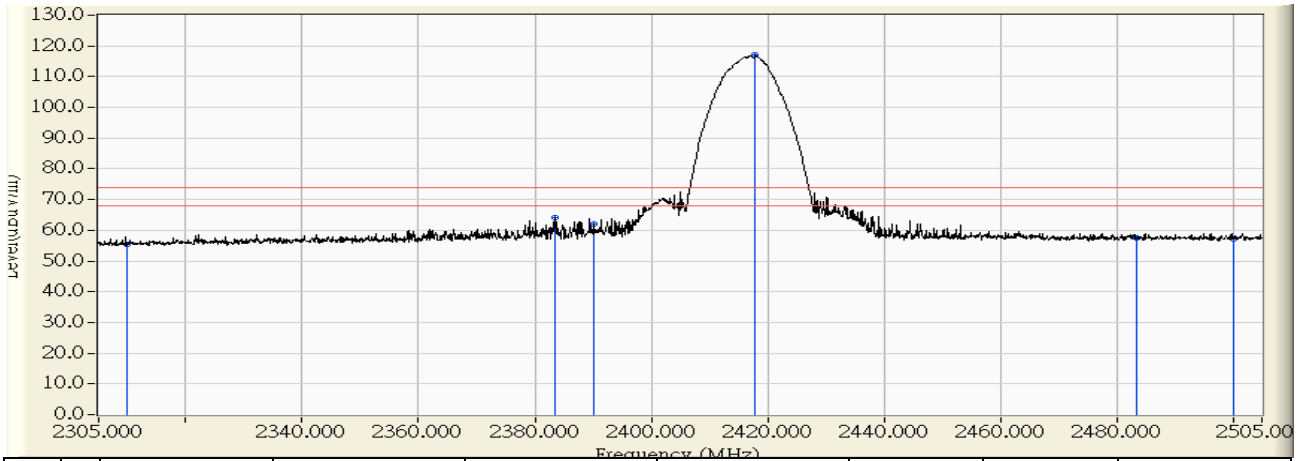


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	26.595	55.493	-18.507	74.000	PEAK
2	2383.500	29.698	34.412	64.109	-9.891	74.000	PEAK
3	2390.000	29.768	32.159	61.927	-12.073	74.000	PEAK
4	* 2417.800	30.071	86.920	116.990	42.990	74.000	PEAK
5	2483.500	30.738	26.714	57.453	-16.547	74.000	PEAK
6	2500.000	30.740	26.397	57.136	-16.864	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 22:12
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2417MHz

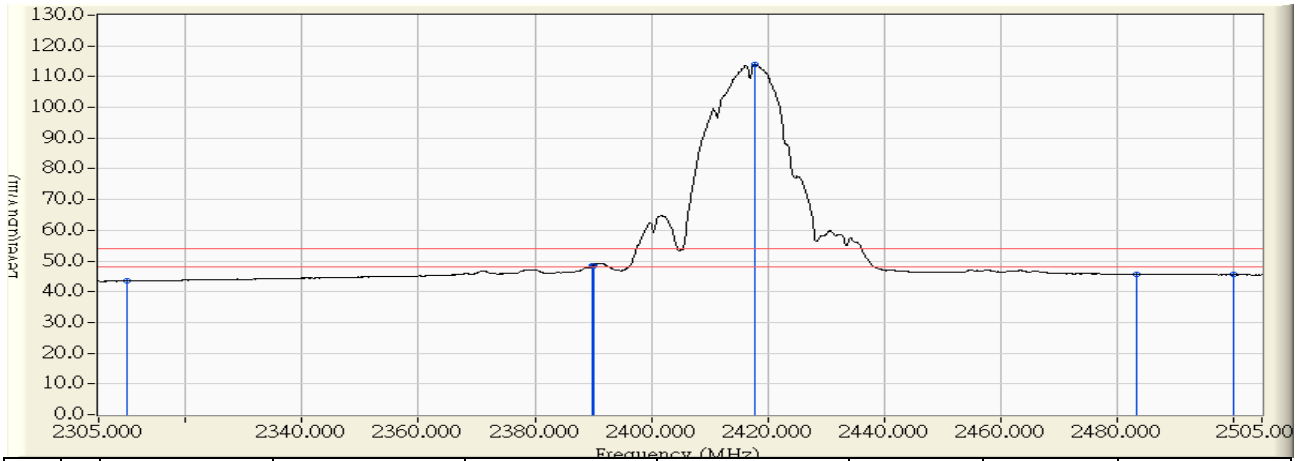


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	14.577	43.475	-10.525	54.000	AVERAGE
2	2389.900	29.767	18.583	48.350	-5.650	54.000	AVERAGE
3	2390.000	29.768	18.725	48.493	-5.507	54.000	AVERAGE
4	* 2417.800	30.071	83.962	114.032	60.032	54.000	AVERAGE
5	2483.500	30.738	14.935	45.674	-8.326	54.000	AVERAGE
6	2500.000	30.740	14.755	45.494	-8.506	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 22:06
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2417MHz

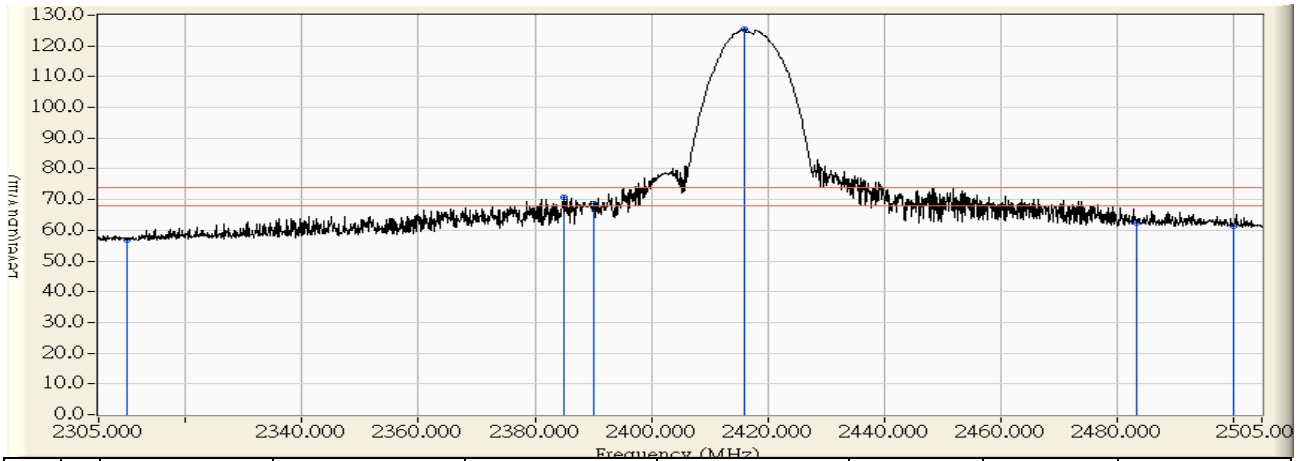


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	27.406	56.958	-17.042	74.000	PEAK
2	2385.100	30.519	40.294	70.813	-3.187	74.000	PEAK
3	2390.000	30.582	38.102	68.684	-5.316	74.000	PEAK
4	* 2416.000	30.917	94.477	125.394	51.394	74.000	PEAK
5	2483.500	31.739	30.667	62.407	-11.593	74.000	PEAK
6	2500.000	31.774	29.478	61.251	-12.749	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 22:04
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2417MHz

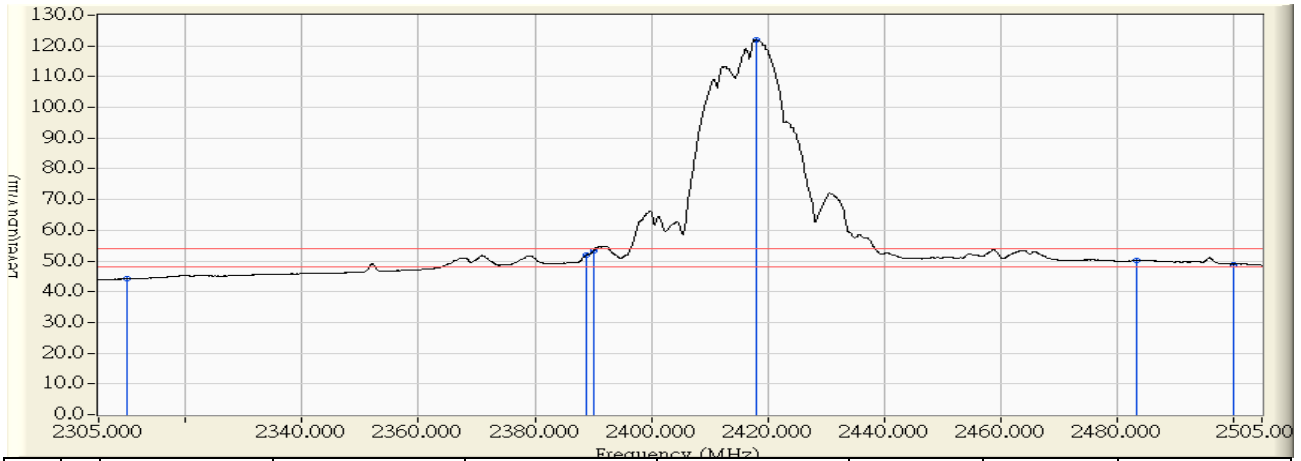


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	14.608	44.160	-9.840	54.000	AVERAGE
2	2388.800	30.567	21.218	51.785	-2.215	54.000	AVERAGE
3	2390.000	30.582	22.618	53.200	-0.800	54.000	AVERAGE
4	* 2418.200	30.945	91.185	122.130	68.130	54.000	AVERAGE
5	2483.500	31.739	18.371	50.111	-3.889	54.000	AVERAGE
6	2500.000	31.774	17.193	48.966	-5.034	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 11:22
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2437MHz

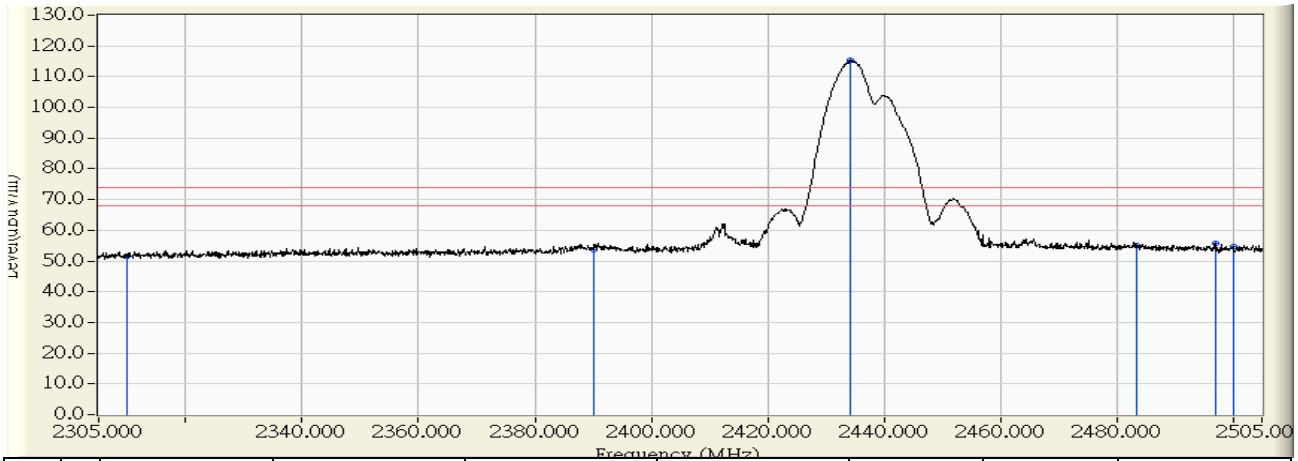


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	23.453	51.583	-22.417	74.000	PEAK
2	2390.000	28.933	24.617	53.550	-20.450	74.000	PEAK
3	* 2434.200	29.377	85.894	115.271	41.271	74.000	PEAK
4	2483.500	29.829	25.117	54.946	-19.054	74.000	PEAK
5	2497.000	29.832	25.816	55.649	-18.351	74.000	PEAK
6	2500.000	29.826	25.038	54.863	-19.137	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 11:28
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2437MHz

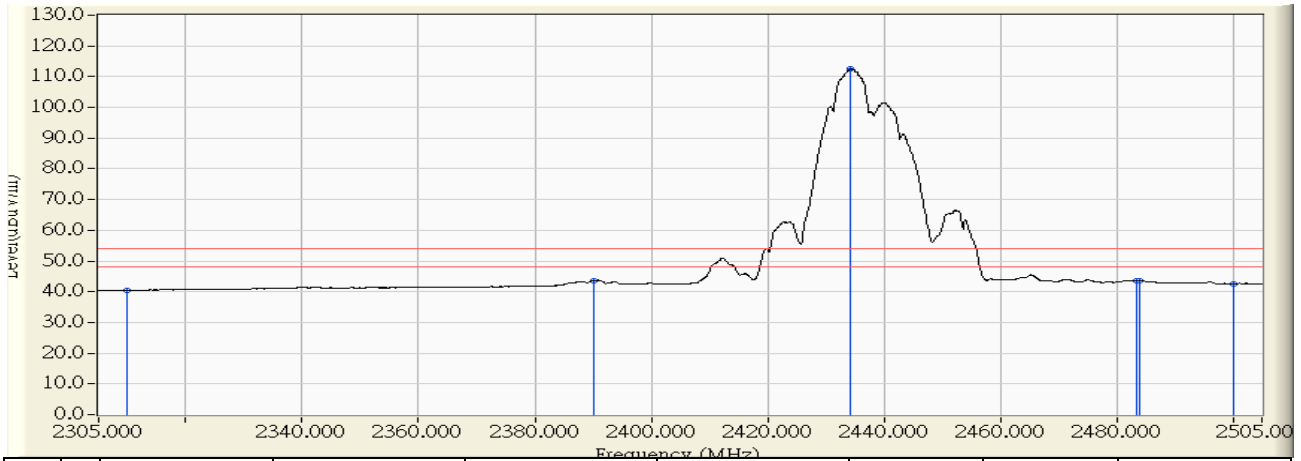


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	12.344	40.474	-13.526	54.000	AVERAGE
2	2390.000	28.933	14.579	43.512	-10.488	54.000	AVERAGE
3	* 2434.300	29.378	83.074	112.452	58.452	54.000	AVERAGE
4	2483.500	29.829	13.786	43.615	-10.385	54.000	AVERAGE
5	2483.900	29.830	13.706	43.535	-10.465	54.000	AVERAGE
6	2500.000	29.826	12.768	42.593	-11.407	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 11:15
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2437MHz

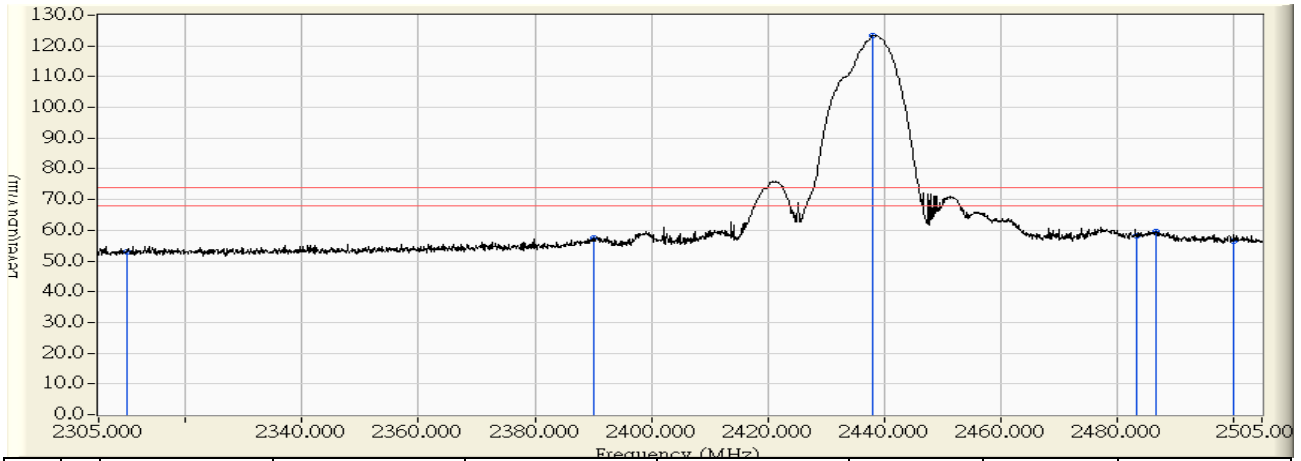


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	24.261	53.045	-20.955	74.000	PEAK
2	2390.000	29.747	27.792	57.539	-16.461	74.000	PEAK
3	* 2438.100	30.327	93.011	123.337	49.337	74.000	PEAK
4	2483.500	30.830	27.511	58.341	-15.659	74.000	PEAK
5	2486.700	30.838	28.932	59.770	-14.230	74.000	PEAK
6	2500.000	30.860	25.550	56.409	-17.591	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 11:16
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2437MHz

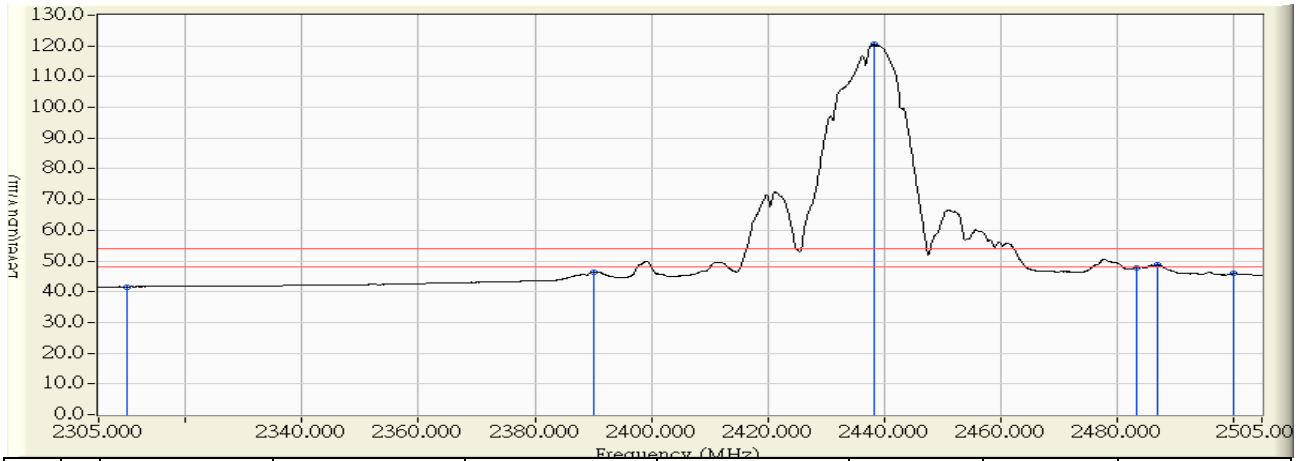


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	12.829	41.613	-12.387	54.000	AVERAGE
2	2390.000	29.747	16.768	46.515	-7.485	54.000	AVERAGE
3	* 2438.300	30.329	90.111	120.440	66.440	54.000	AVERAGE
4	2483.500	30.830	17.066	47.896	-6.104	54.000	AVERAGE
5	2487.000	30.839	17.815	48.654	-5.346	54.000	AVERAGE
6	2500.000	30.860	14.990	45.849	-8.151	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 22:44
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2457MHz

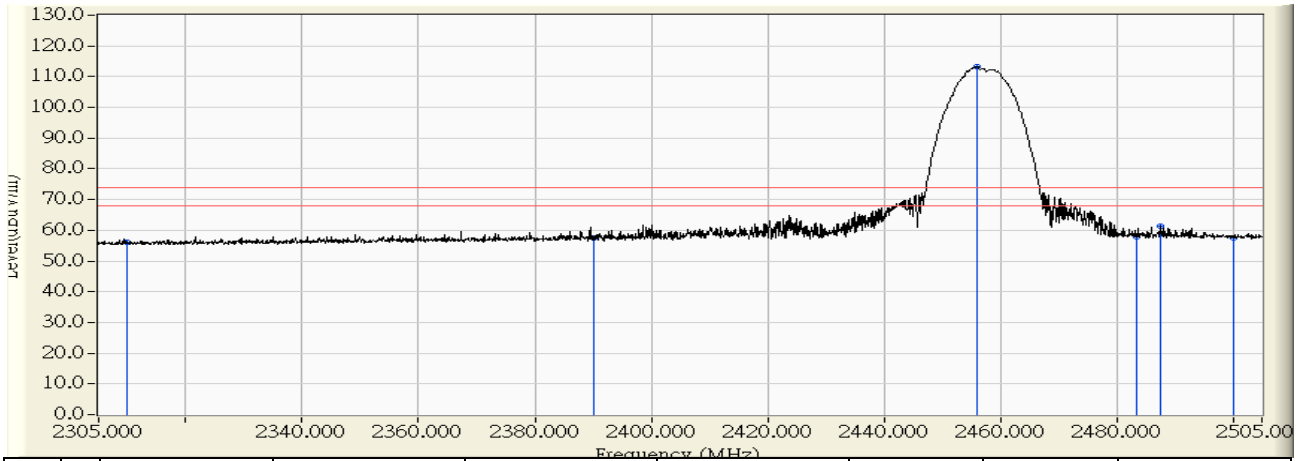


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	27.364	56.262	-17.738	74.000	PEAK
2	2390.000	29.768	27.613	57.381	-16.619	74.000	PEAK
3	* 2456.000	30.485	82.813	113.299	39.299	74.000	PEAK
4	2483.500	30.738	27.009	57.748	-16.252	74.000	PEAK
5	2487.600	30.742	30.608	61.350	-12.650	74.000	PEAK
6	2500.000	30.740	26.895	57.634	-16.366	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 22:45
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2457MHz

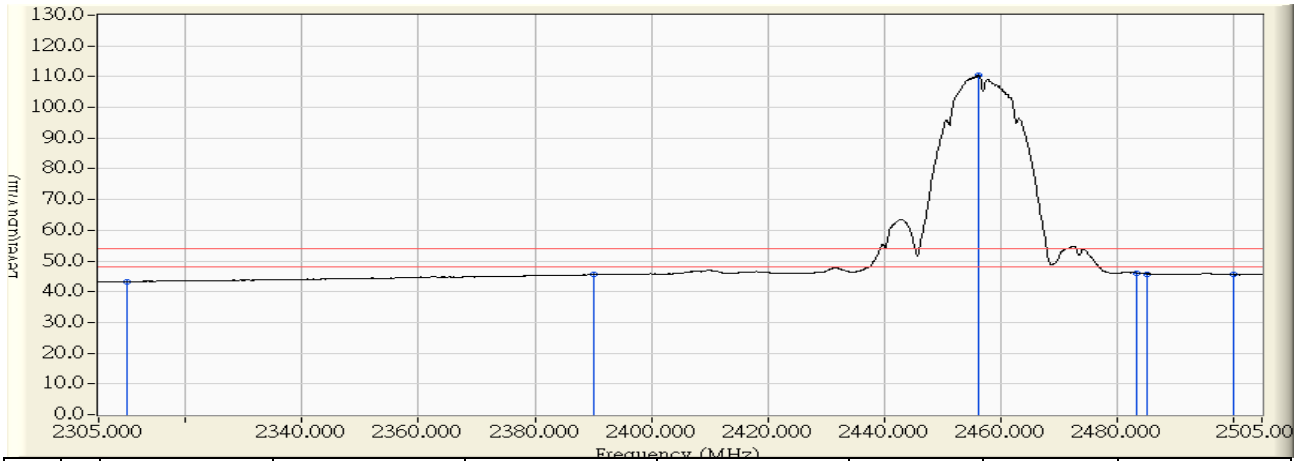


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	14.359	43.257	-10.743	54.000	AVERAGE
2	2390.000	29.768	15.756	45.524	-8.476	54.000	AVERAGE
3	* 2456.200	30.488	79.950	110.438	56.438	54.000	AVERAGE
4	2483.500	30.738	15.419	46.158	-7.842	54.000	AVERAGE
5	2485.200	30.741	15.079	45.819	-8.181	54.000	AVERAGE
6	2500.000	30.740	14.830	45.569	-8.431	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 22:36
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2457MHz

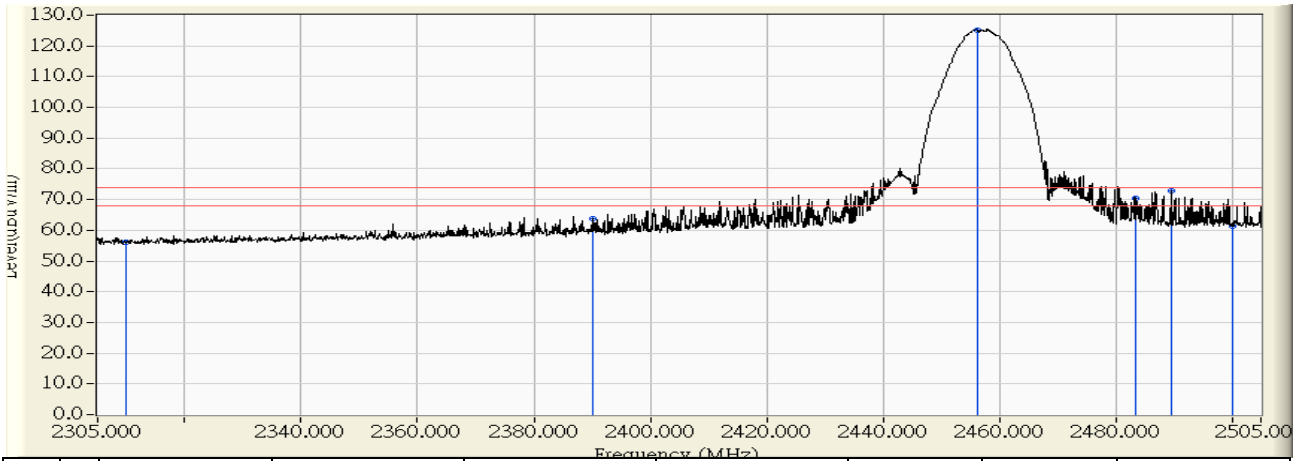


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	26.695	56.247	-17.753	74.000	PEAK
2	2390.000	30.582	33.189	63.771	-10.229	74.000	PEAK
3	* 2456.300	31.436	93.725	125.160	51.160	74.000	PEAK
4	2483.500	31.739	38.713	70.453	-3.547	74.000	PEAK
5	2489.500	31.757	41.077	72.833	-1.167	74.000	PEAK
6	2500.000	31.774	29.454	61.227	-12.773	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 22:20
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2457MHz

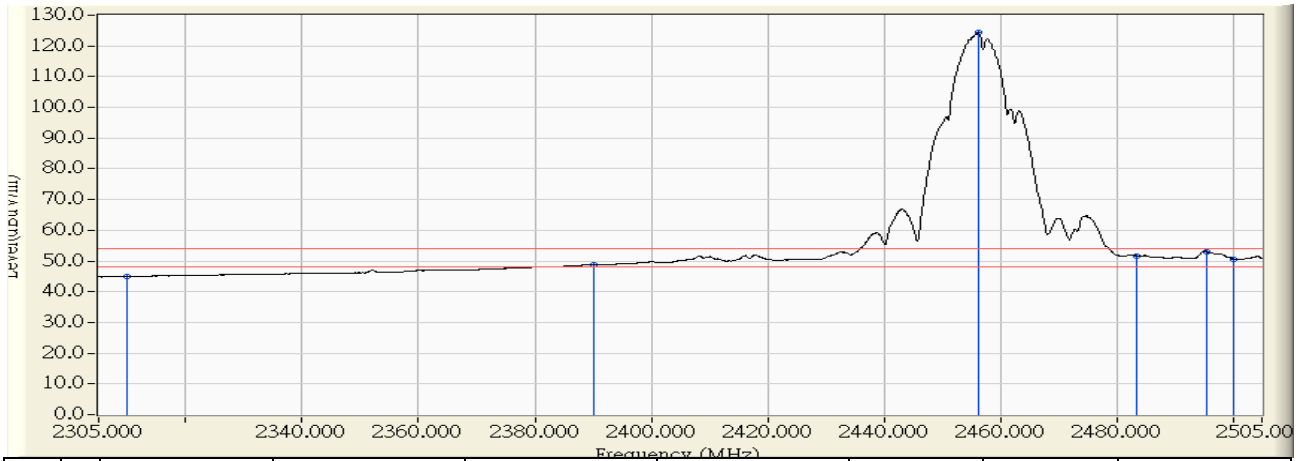


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	15.416	44.968	-9.032	54.000	AVERAGE
2	2390.000	30.582	18.224	48.806	-5.194	54.000	AVERAGE
3	* 2456.300	31.436	92.818	124.253	70.253	54.000	AVERAGE
4	2483.500	31.739	19.947	51.687	-2.313	54.000	AVERAGE
5	2495.400	31.772	21.297	53.070	-0.930	54.000	AVERAGE
6	2500.000	31.774	18.815	50.588	-3.412	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 11:43
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2462MHz

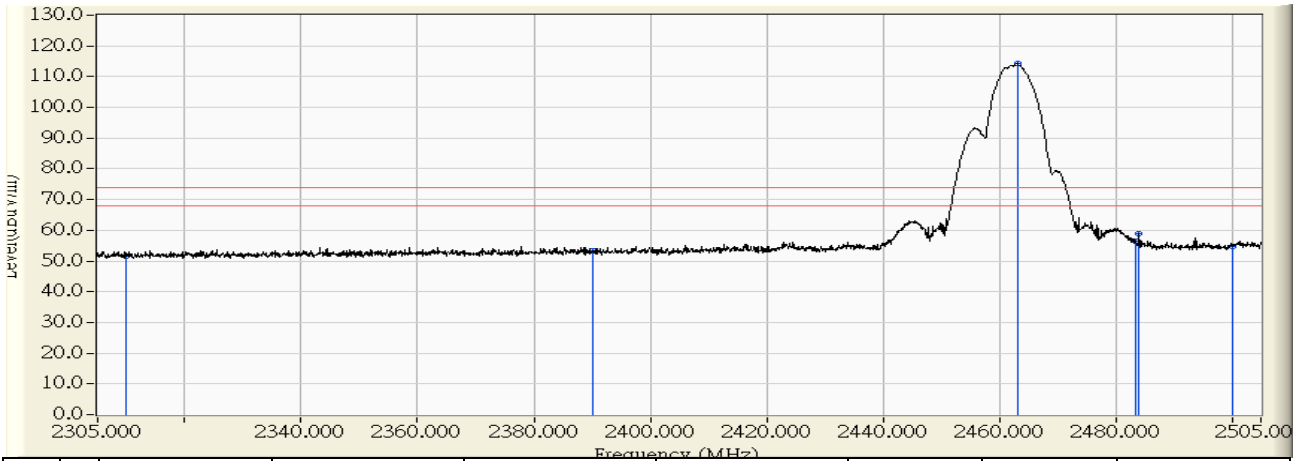


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	23.434	51.564	-22.436	74.000	PEAK
2	2390.000	28.933	24.235	53.168	-20.832	74.000	PEAK
3	* 2463.100	29.667	84.609	114.276	40.276	74.000	PEAK
4	2483.500	29.829	26.478	56.307	-17.693	74.000	PEAK
5	2484.100	29.830	29.139	58.968	-15.032	74.000	PEAK
6	2500.000	29.826	25.023	54.848	-19.152	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 11:44
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2462MHz

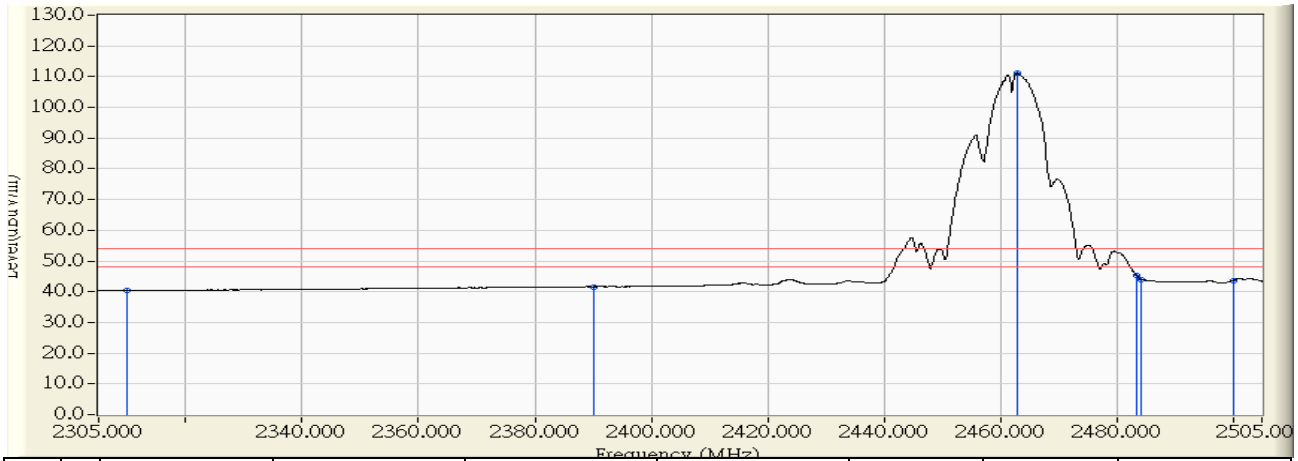


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	12.293	40.423	-13.577	54.000	AVERAGE
2	2390.000	28.933	12.681	41.614	-12.386	54.000	AVERAGE
3	* 2462.900	29.665	81.481	111.146	57.146	54.000	AVERAGE
4	2483.500	29.829	15.371	45.200	-8.800	54.000	AVERAGE
5	2484.200	29.830	14.103	43.932	-10.068	54.000	AVERAGE
6	2500.000	29.826	13.848	43.673	-10.327	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 20:01
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2462MHz

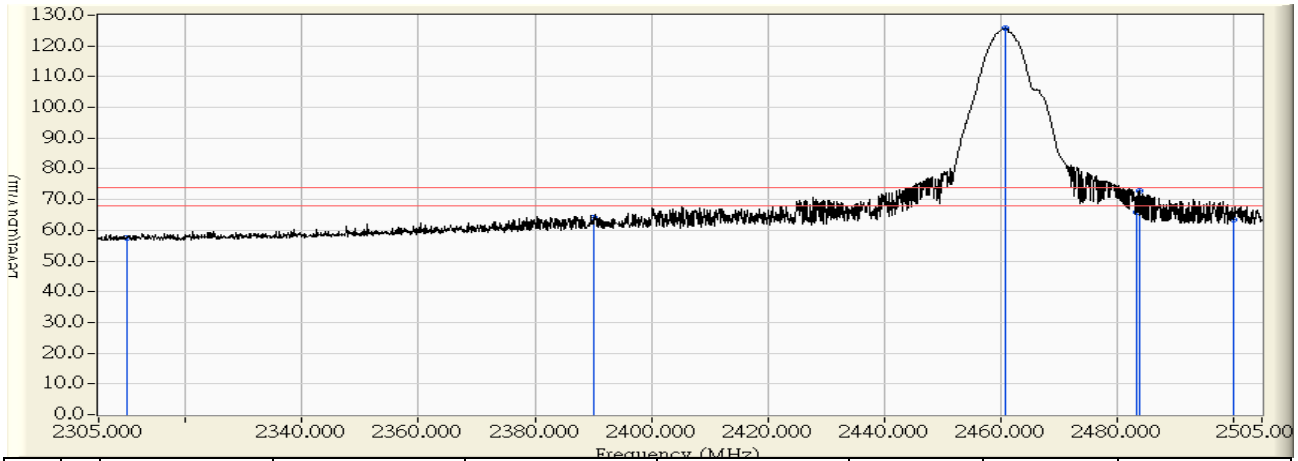


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	28.605	57.389	-16.611	74.000	PEAK
2	2390.000	29.747	34.355	64.102	-9.898	74.000	PEAK
3	* 2461.000	30.602	95.191	125.793	51.793	74.000	PEAK
4	2483.500	30.830	34.917	65.747	-8.253	74.000	PEAK
5	2484.000	30.832	42.014	72.845	-1.155	74.000	PEAK
6	2500.000	30.860	32.687	63.546	-10.454	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 20:00
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11b_2462MHz

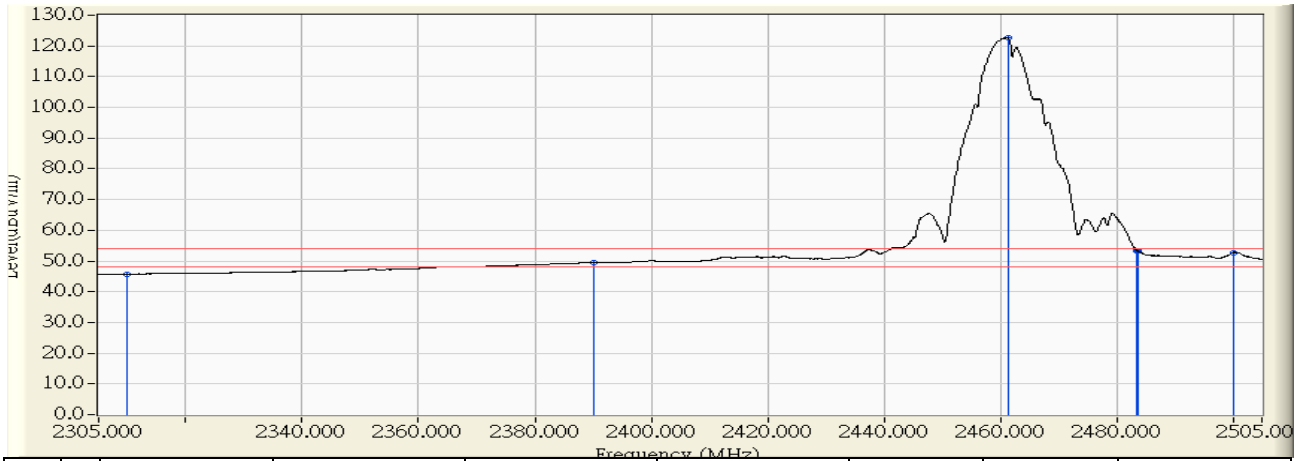


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	16.930	45.714	-8.286	54.000	AVERAGE
2	2390.000	29.747	19.761	49.508	-4.492	54.000	AVERAGE
3	* 2461.300	30.606	92.196	122.802	68.802	54.000	AVERAGE
4	2483.500	30.830	22.584	53.414	-0.586	54.000	AVERAGE
5	2483.600	30.831	22.465	53.295	-0.705	54.000	AVERAGE
6	2500.000	30.860	21.840	52.699	-1.301	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 20:17
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2412MHz

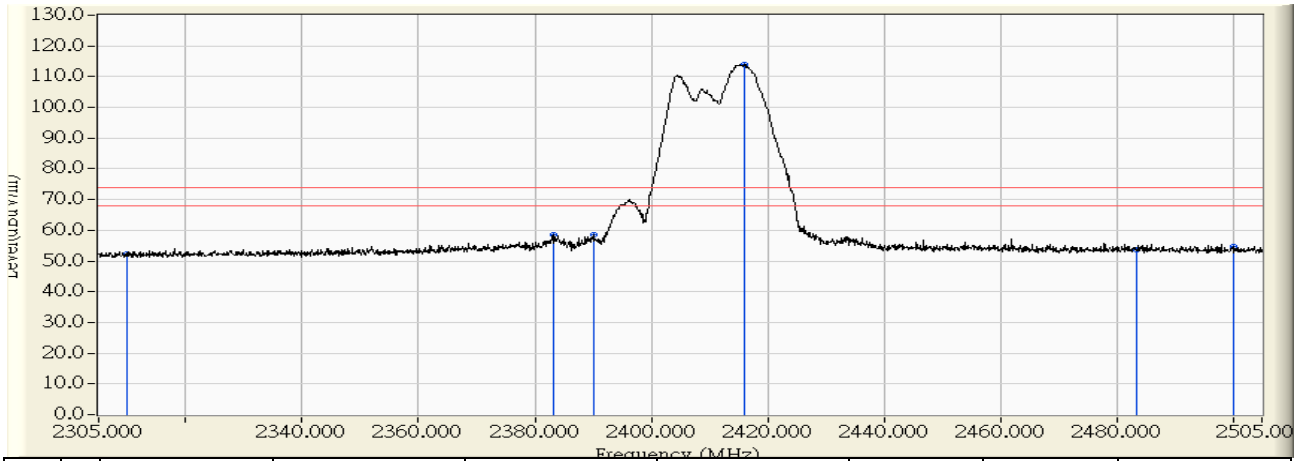


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	24.160	52.290	-21.710	74.000	PEAK
2	2383.200	28.865	29.751	58.616	-15.384	74.000	PEAK
3	2390.000	28.933	29.592	58.525	-15.475	74.000	PEAK
4	* 2415.900	29.193	84.740	113.933	39.933	74.000	PEAK
5	2483.500	29.829	23.679	53.508	-20.492	74.000	PEAK
6	2500.000	29.826	24.895	54.720	-19.280	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 20:18
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2412MHz

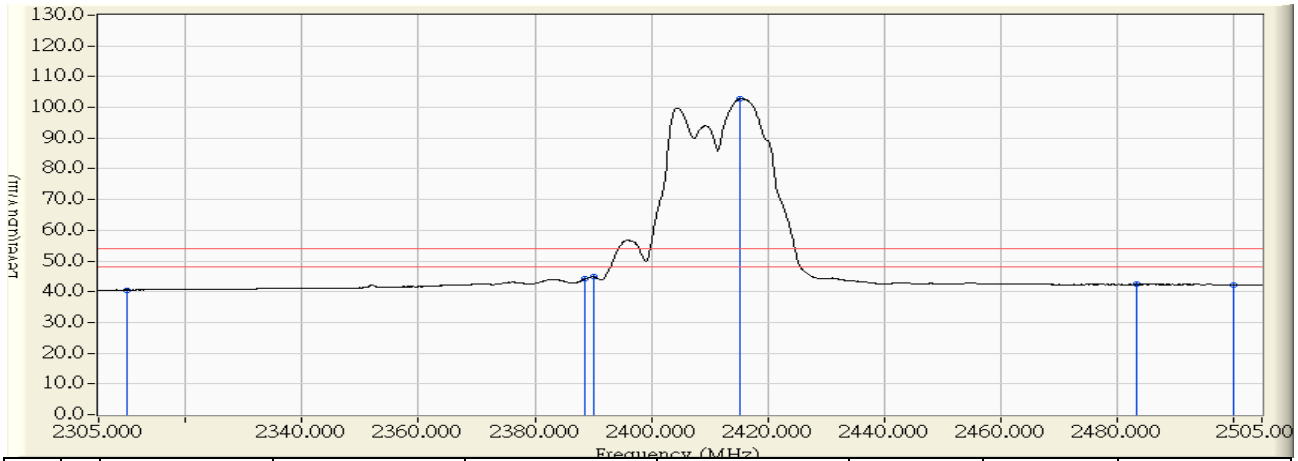


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	12.471	40.601	-13.399	54.000	AVERAGE
2	2388.700	28.920	15.297	44.217	-9.783	54.000	AVERAGE
3	2390.000	28.933	15.877	44.810	-9.190	54.000	AVERAGE
4	* 2415.300	29.187	73.586	102.773	48.773	54.000	AVERAGE
5	2483.500	29.829	12.536	42.365	-11.635	54.000	AVERAGE
6	2500.000	29.826	12.398	42.223	-11.777	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 20:11
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2412MHz

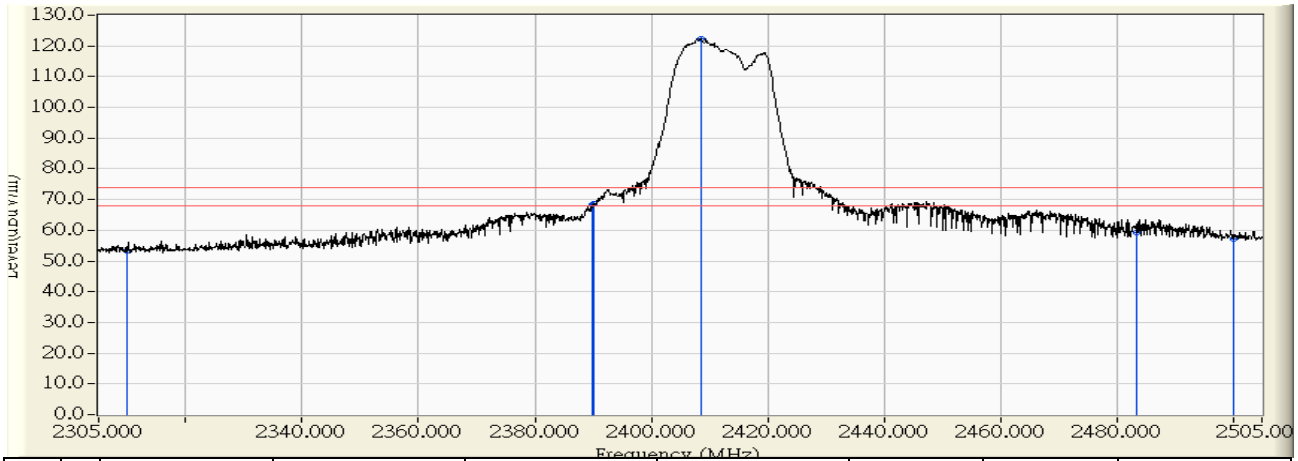


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	24.567	53.351	-20.649	74.000	PEAK
2	2389.900	29.746	38.495	68.241	-5.759	74.000	PEAK
3	2390.000	29.747	38.800	68.547	-5.453	74.000	PEAK
4	* 2408.500	29.970	92.309	122.279	48.279	74.000	PEAK
5	2483.500	30.830	28.269	59.099	-14.901	74.000	PEAK
6	2500.000	30.860	26.285	57.144	-16.856	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 20:11
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2412MHz

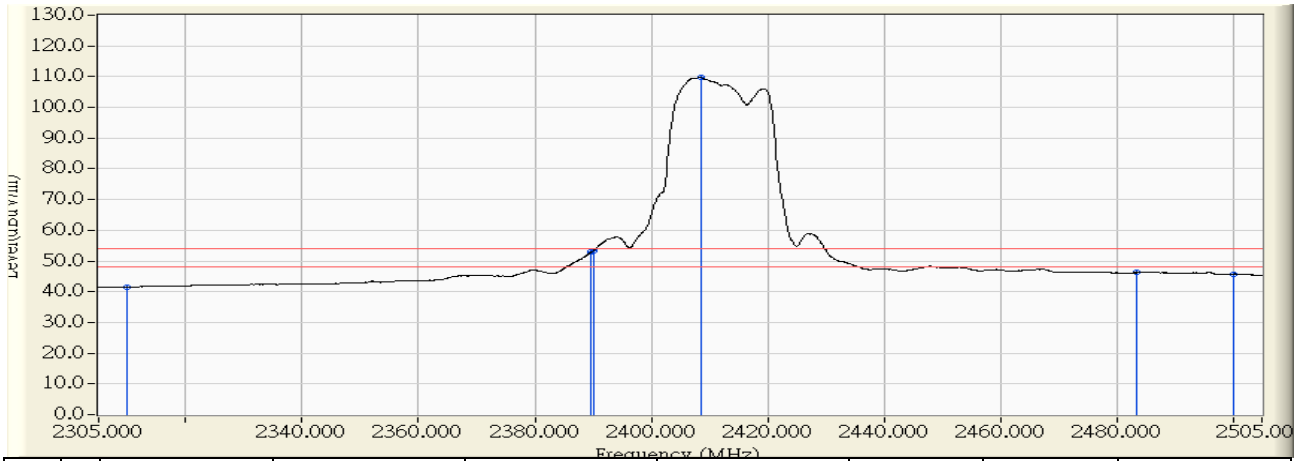


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	12.809	41.593	-12.407	54.000	AVERAGE
2	2389.700	29.743	23.118	52.861	-1.139	54.000	AVERAGE
3	2390.000	29.747	23.522	53.269	-0.731	54.000	AVERAGE
4	* 2408.500	29.970	79.675	109.645	55.645	54.000	AVERAGE
5	2483.500	30.830	15.413	46.243	-7.757	54.000	AVERAGE
6	2500.000	30.860	14.835	45.694	-8.306	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 23:00
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2417MHz

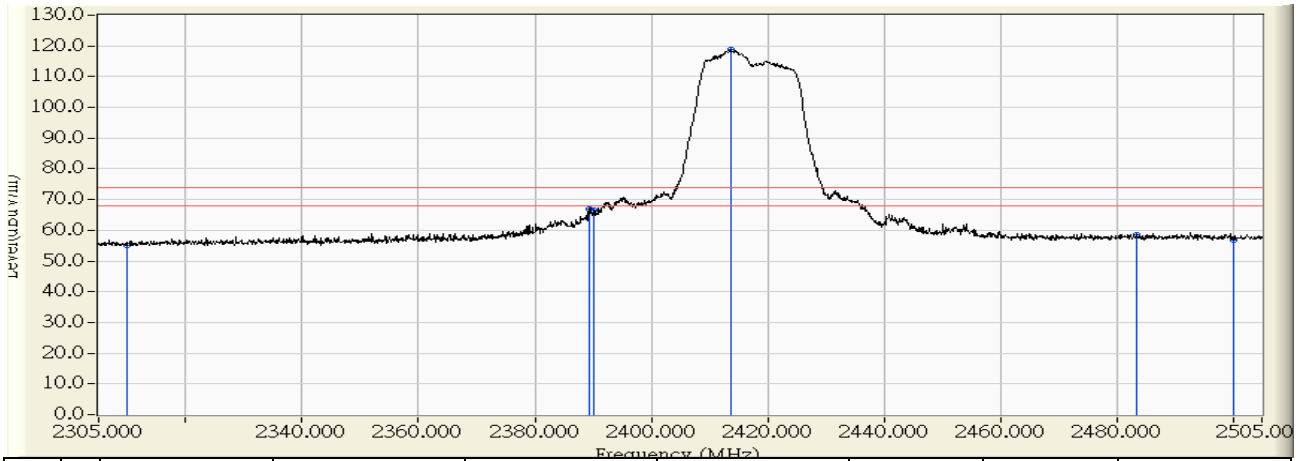


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	26.200	55.098	-18.902	74.000	PEAK
2	2389.300	29.760	37.133	66.894	-7.106	74.000	PEAK
3	2390.000	29.768	36.728	66.496	-7.504	74.000	PEAK
4	* 2413.800	30.027	88.899	118.926	44.926	74.000	PEAK
5	2483.500	30.738	27.748	58.487	-15.513	74.000	PEAK
6	2500.000	30.740	26.194	56.933	-17.067	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 23:01
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2417MHz

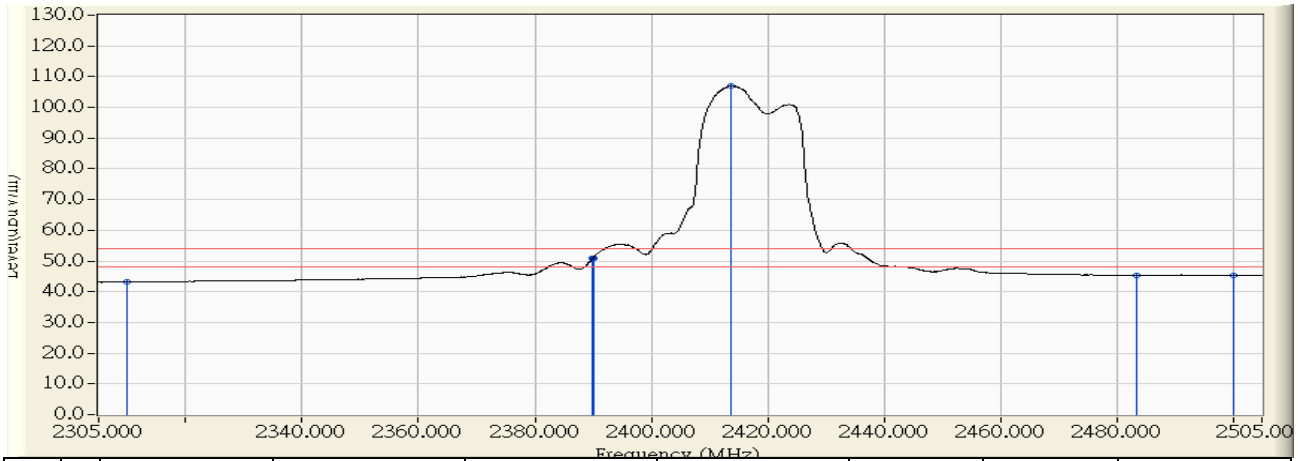


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	14.231	43.129	-10.871	54.000	AVERAGE
2	2389.900	29.767	21.022	50.789	-3.211	54.000	AVERAGE
3	2390.000	29.768	21.145	50.913	-3.087	54.000	AVERAGE
4	* 2413.700	30.026	76.969	106.995	52.995	54.000	AVERAGE
5	2483.500	30.738	14.687	45.426	-8.574	54.000	AVERAGE
6	2500.000	30.740	14.645	45.384	-8.616	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 22:56
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2417MHz

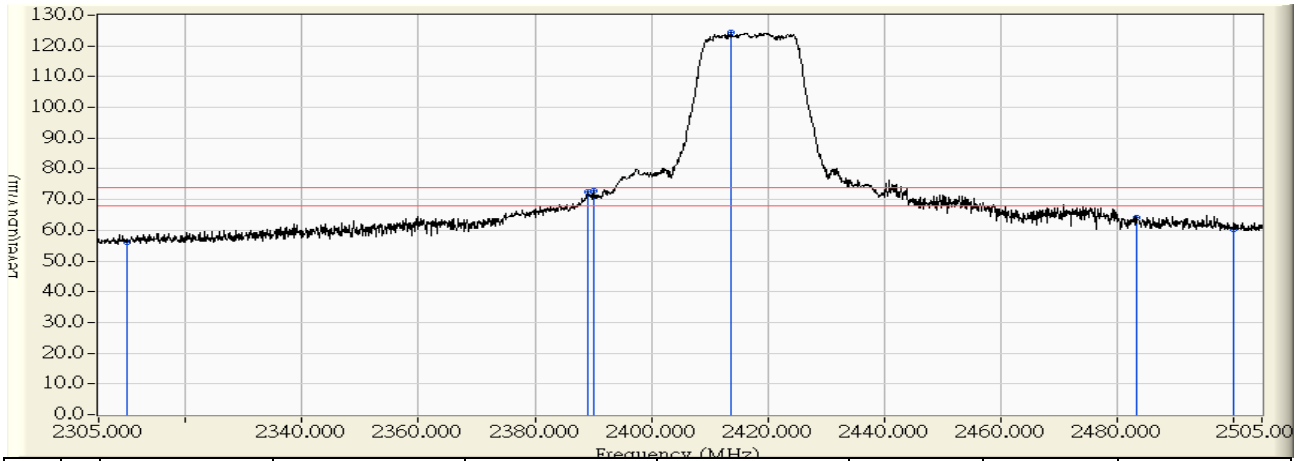


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	26.480	56.032	-17.968	74.000	PEAK
2	2389.000	30.569	41.947	72.516	-1.484	74.000	PEAK
3	2390.000	30.582	42.197	72.779	-1.221	74.000	PEAK
4	* 2413.800	30.888	93.422	124.310	50.310	74.000	PEAK
5	2483.500	31.739	32.419	64.159	-9.841	74.000	PEAK
6	2500.000	31.774	28.560	60.333	-13.667	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 22:54
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2417MHz

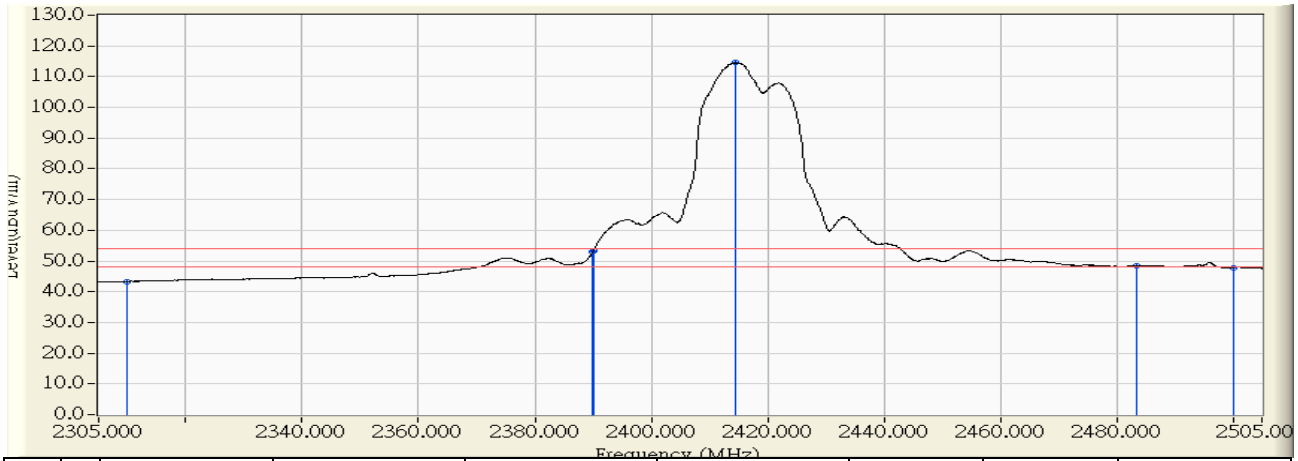


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	13.756	43.308	-10.692	54.000	AVERAGE
2	2389.900	30.581	22.339	52.920	-1.080	54.000	AVERAGE
3	2390.000	30.582	22.599	53.181	-0.819	54.000	AVERAGE
4	* 2414.600	30.899	83.601	114.500	60.500	54.000	AVERAGE
5	2483.500	31.739	16.623	48.363	-5.637	54.000	AVERAGE
6	2500.000	31.774	16.083	47.856	-6.144	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 12:17
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2437MHz

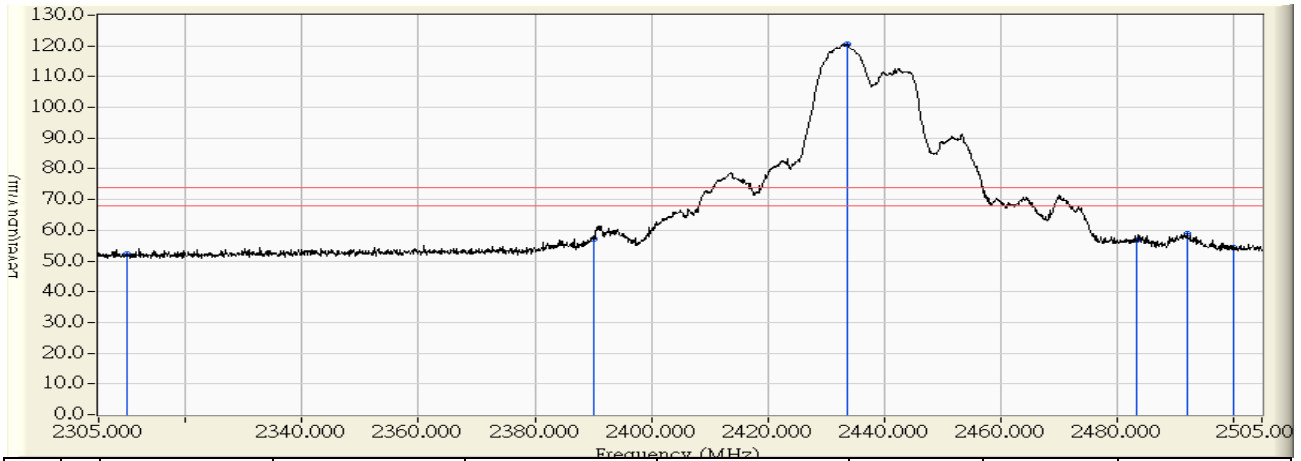


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	24.056	52.186	-21.814	74.000	PEAK
2	2390.000	28.933	28.056	56.989	-17.011	74.000	PEAK
3	* 2433.600	29.371	91.091	120.462	46.462	74.000	PEAK
4	2483.500	29.829	26.985	56.814	-17.186	74.000	PEAK
5	2492.200	29.833	29.075	58.908	-15.092	74.000	PEAK
6	2500.000	29.826	24.474	54.299	-19.701	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 12:23
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2437MHz

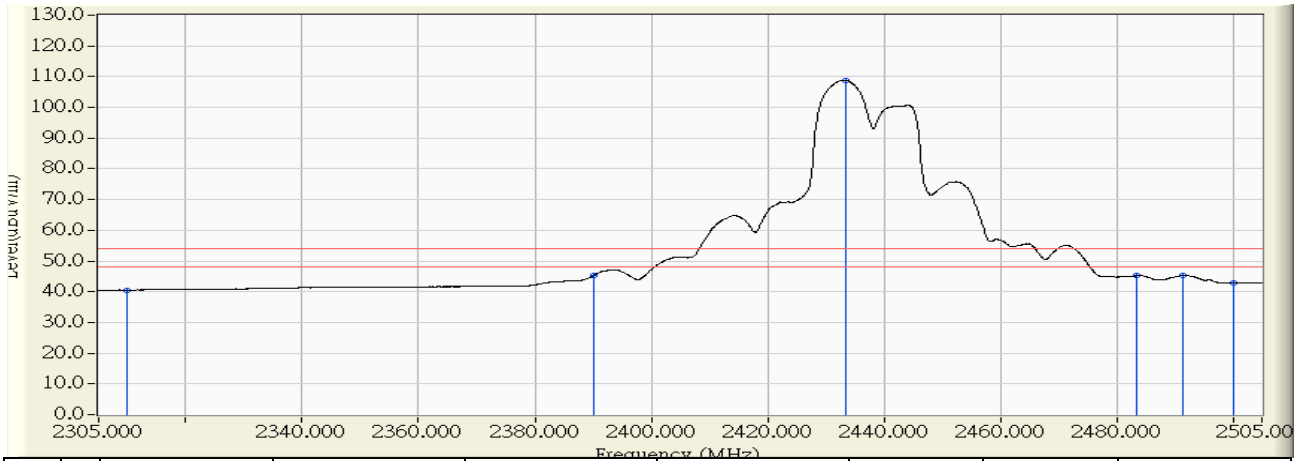


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	12.437	40.567	-13.433	54.000	AVERAGE
2	2390.000	28.933	16.295	45.228	-8.772	54.000	AVERAGE
3	* 2433.400	29.369	79.435	108.804	54.804	54.000	AVERAGE
4	2483.500	29.829	15.370	45.199	-8.801	54.000	AVERAGE
5	2491.300	29.833	15.504	45.337	-8.663	54.000	AVERAGE
6	2500.000	29.826	13.148	42.973	-11.027	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 20:47
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2437MHz

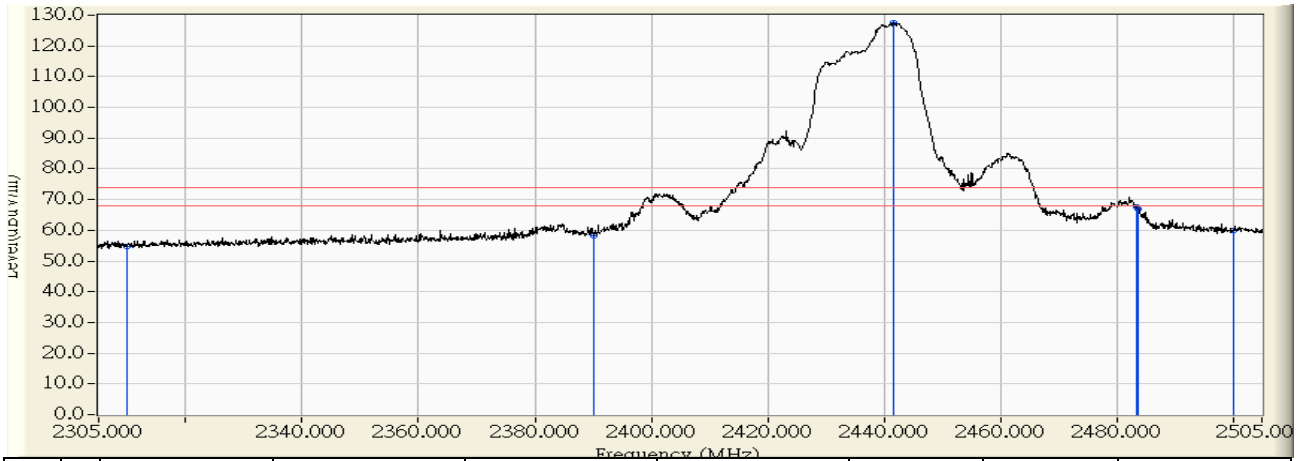


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	26.081	54.865	-19.135	74.000	PEAK
2	2390.000	29.747	28.597	58.344	-15.656	74.000	PEAK
3	* 2441.700	30.370	97.072	127.442	53.442	74.000	PEAK
4	2483.500	30.830	36.848	67.678	-6.322	74.000	PEAK
5	2483.600	30.831	36.184	67.014	-6.986	74.000	PEAK
6	2500.000	30.860	28.978	59.837	-14.163	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 20:45
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2437MHz

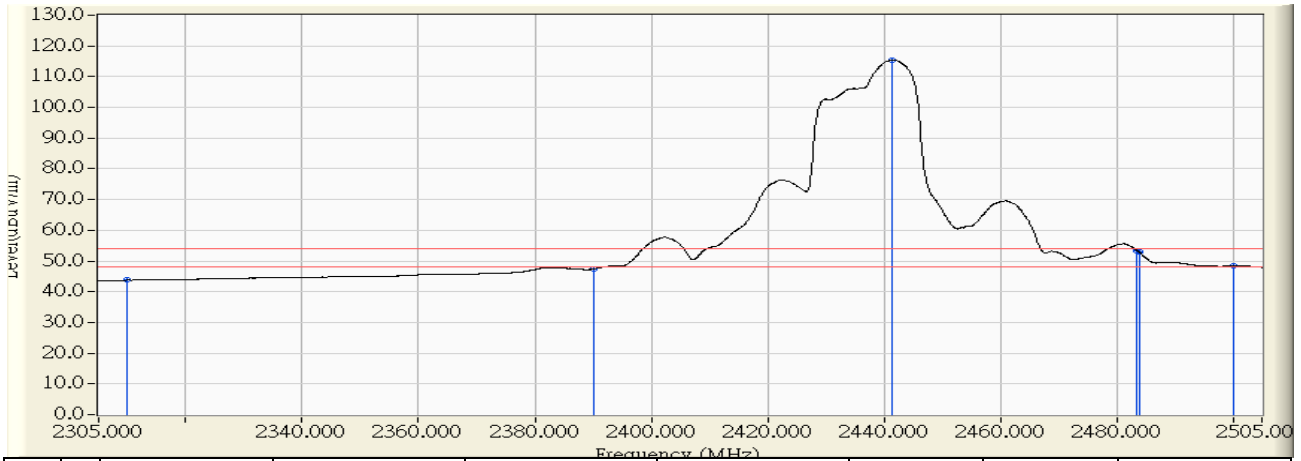


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	14.973	43.757	-10.243	54.000	AVERAGE
2	2390.000	29.747	17.576	47.323	-6.677	54.000	AVERAGE
3	* 2441.300	30.365	84.977	115.342	61.342	54.000	AVERAGE
4	2483.500	30.830	22.619	53.449	-0.551	54.000	AVERAGE
5	2483.900	30.831	22.144	52.975	-1.025	54.000	AVERAGE
6	2500.000	30.860	17.569	48.428	-5.572	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 23:16
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2457MHz

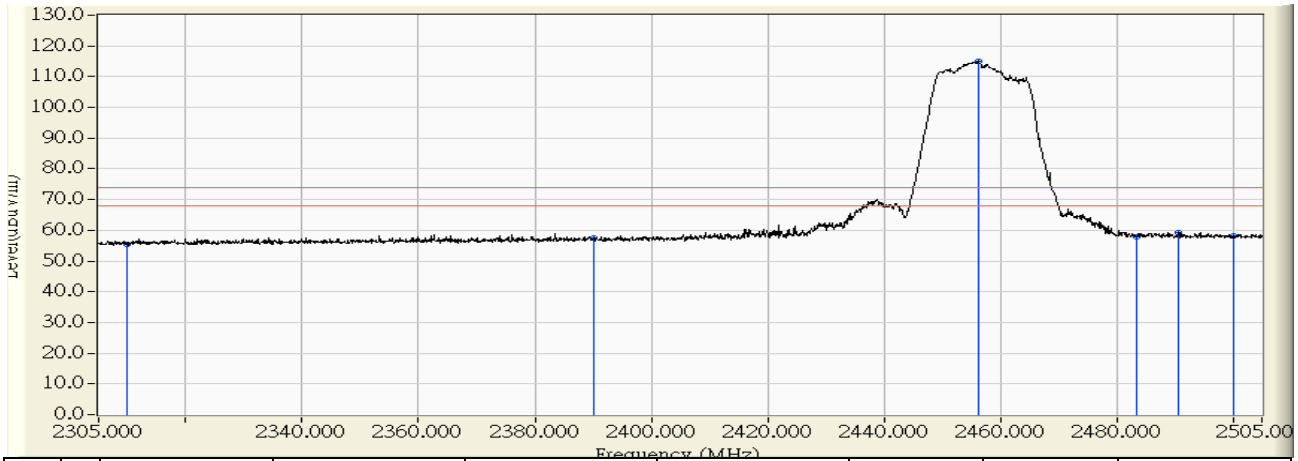


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	26.558	55.456	-18.544	74.000	PEAK
2	2390.000	29.768	27.660	57.428	-16.572	74.000	PEAK
3	* 2456.200	30.488	84.354	114.842	40.842	74.000	PEAK
4	2483.500	30.738	27.023	57.762	-16.238	74.000	PEAK
5	2490.600	30.744	28.597	59.341	-14.659	74.000	PEAK
6	2500.000	30.740	27.448	58.187	-15.813	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 23:16
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2457MHz

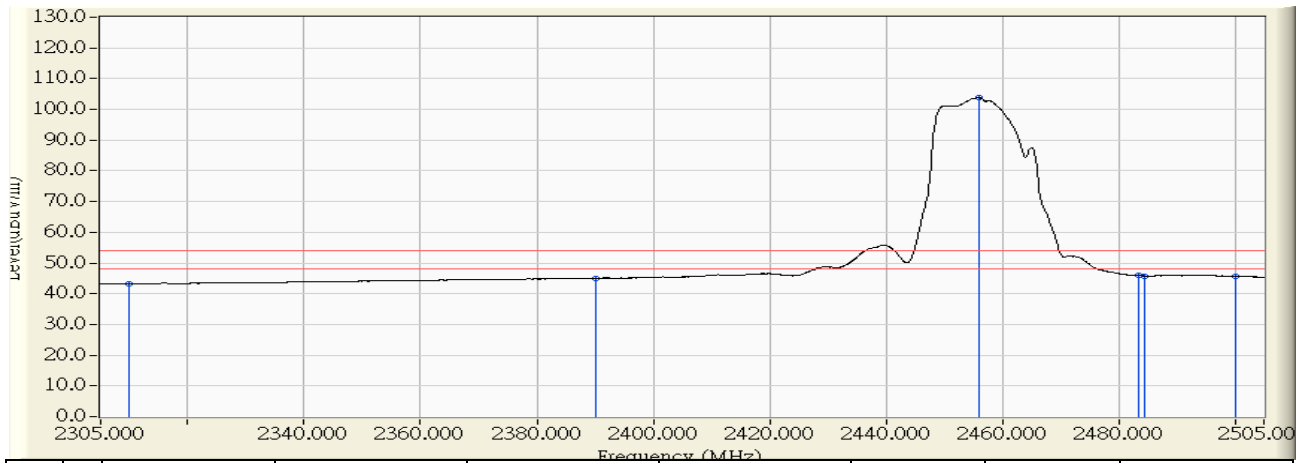


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	14.307	43.205	-10.795	54.000	AVERAGE
2	2390.000	29.768	15.320	45.088	-8.912	54.000	AVERAGE
3	* 2456.100	30.487	73.416	103.903	49.903	54.000	AVERAGE
4	2483.500	30.738	15.199	45.938	-8.062	54.000	AVERAGE
5	2484.400	30.740	15.038	45.778	-8.222	54.000	AVERAGE
6	2500.000	30.740	14.960	45.699	-8.301	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 23:07
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2457MHz

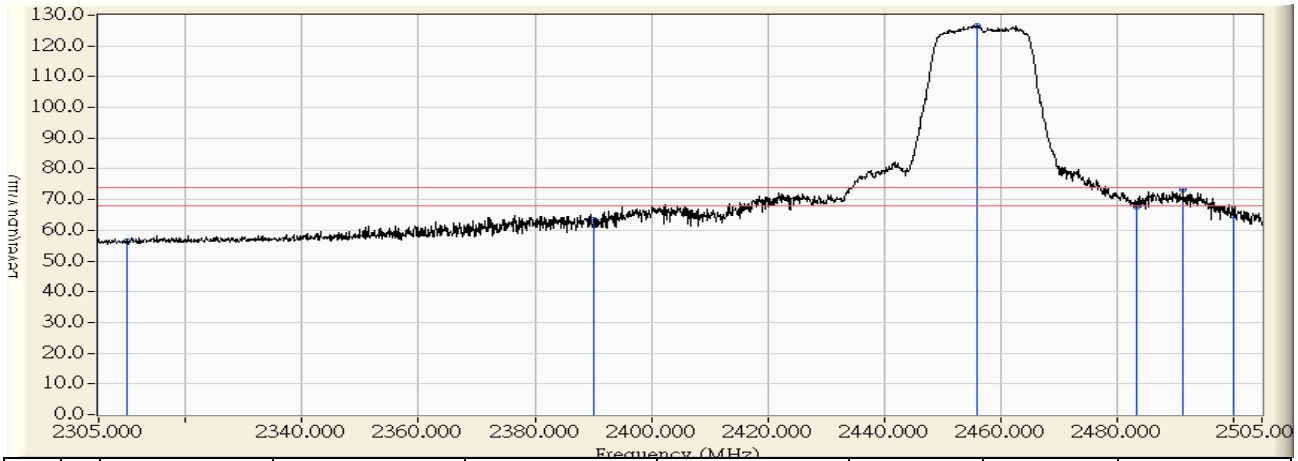


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	26.763	56.315	-17.685	74.000	PEAK
2	2390.000	30.582	32.933	63.515	-10.485	74.000	PEAK
3	* 2456.100	31.433	95.064	126.497	52.497	74.000	PEAK
4	2483.500	31.739	36.034	67.774	-6.226	74.000	PEAK
5	2491.400	31.762	41.276	73.038	-0.962	74.000	PEAK
6	2500.000	31.774	33.058	64.831	-9.169	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 23:06
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2457MHz

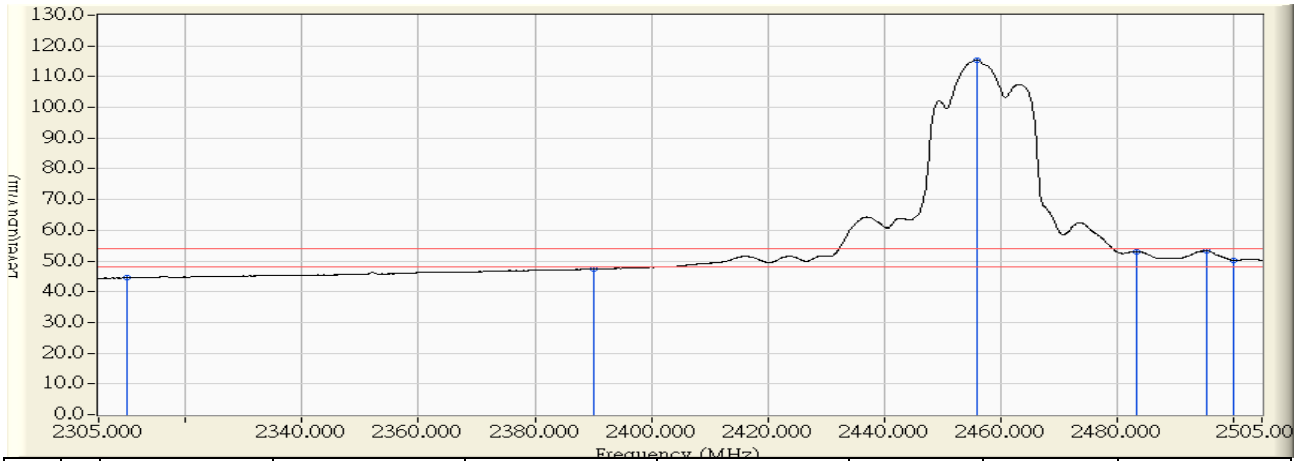


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	14.997	44.549	-9.451	54.000	AVERAGE
2	2390.000	30.582	16.913	47.495	-6.505	54.000	AVERAGE
3	* 2455.900	31.430	84.041	115.471	61.471	54.000	AVERAGE
4	2483.500	31.739	21.344	53.084	-0.916	54.000	AVERAGE
5	2495.400	31.772	21.509	53.282	-0.718	54.000	AVERAGE
6	2500.000	31.774	18.508	50.281	-3.719	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 22:00
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2462MHz

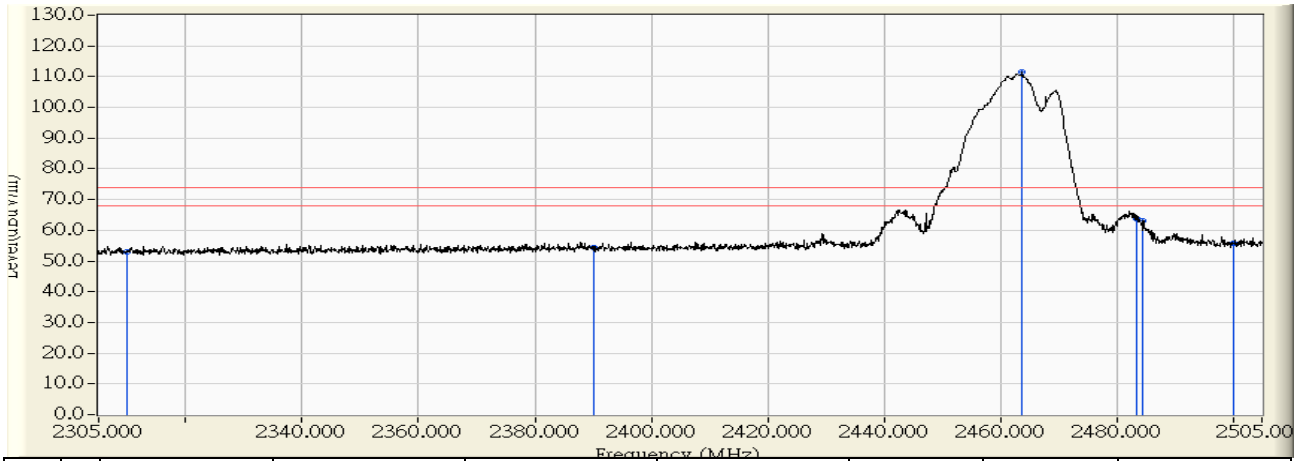


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	24.848	52.978	-21.022	74.000	PEAK
2	2390.000	28.933	25.343	54.276	-19.724	74.000	PEAK
3	* 2463.800	29.674	81.935	111.609	37.609	74.000	PEAK
4	2483.500	29.829	33.955	63.784	-10.216	74.000	PEAK
5	2484.500	29.830	33.361	63.191	-10.809	74.000	PEAK
6	2500.000	29.826	25.813	55.638	-18.362	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 22:01
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2462MHz

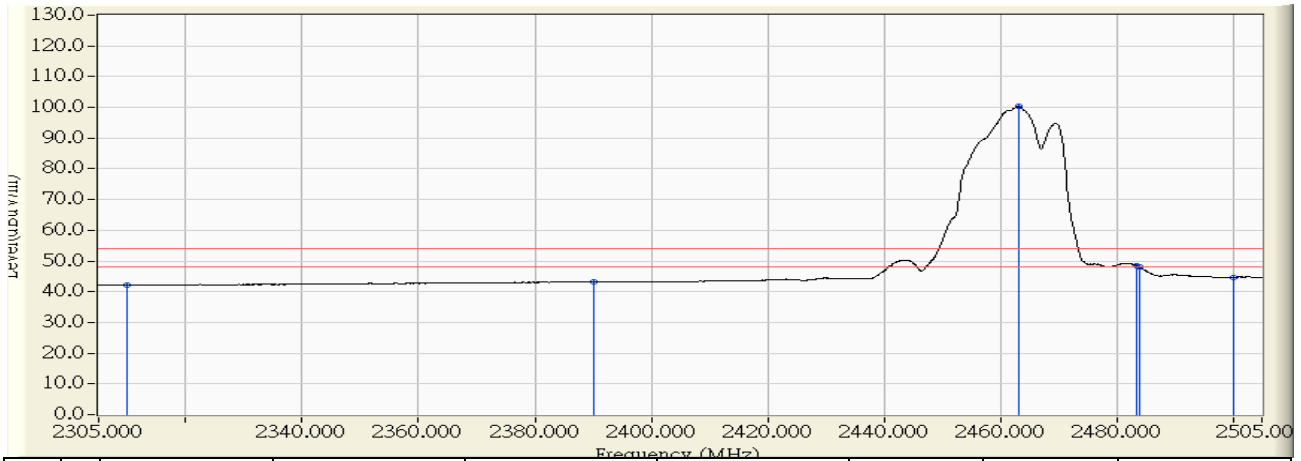


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	14.010	42.140	-11.860	54.000	AVERAGE
2	2390.000	28.933	14.287	43.220	-10.780	54.000	AVERAGE
3	* 2463.100	29.667	70.581	100.248	46.248	54.000	AVERAGE
4	2483.500	29.829	18.513	48.342	-5.658	54.000	AVERAGE
5	2483.900	29.830	18.170	47.999	-6.001	54.000	AVERAGE
6	2500.000	29.826	14.818	44.643	-9.357	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 20:56
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2462MHz

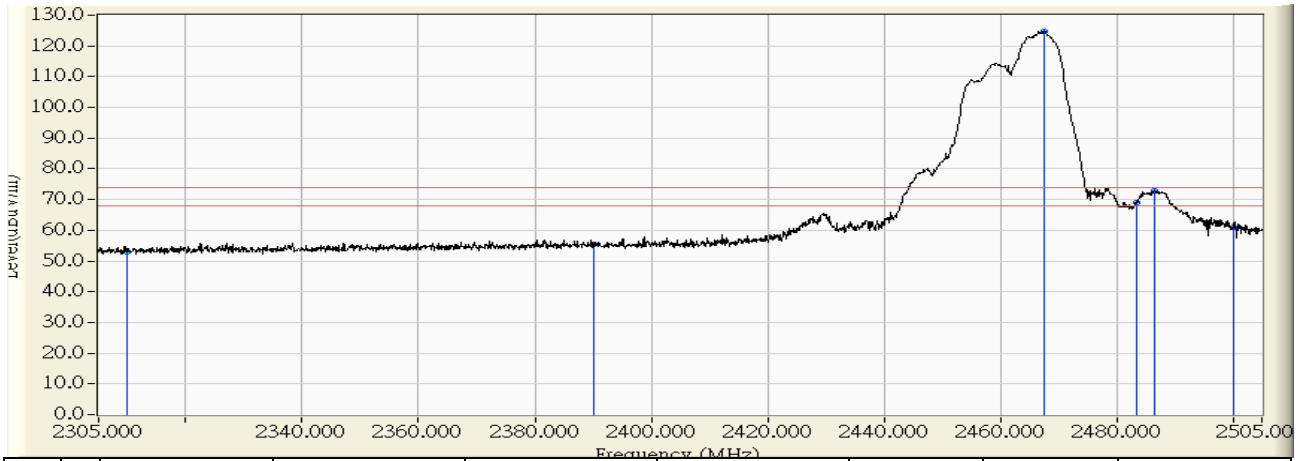


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	24.300	53.084	-20.916	74.000	PEAK
2	2390.000	29.747	25.767	55.514	-18.486	74.000	PEAK
3	* 2467.600	30.682	94.104	124.786	50.786	74.000	PEAK
4	2483.500	30.830	38.064	68.894	-5.106	74.000	PEAK
5	2486.600	30.838	42.017	72.855	-1.145	74.000	PEAK
6	2500.000	30.860	30.288	61.147	-12.853	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 20:55
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11g_2462MHz

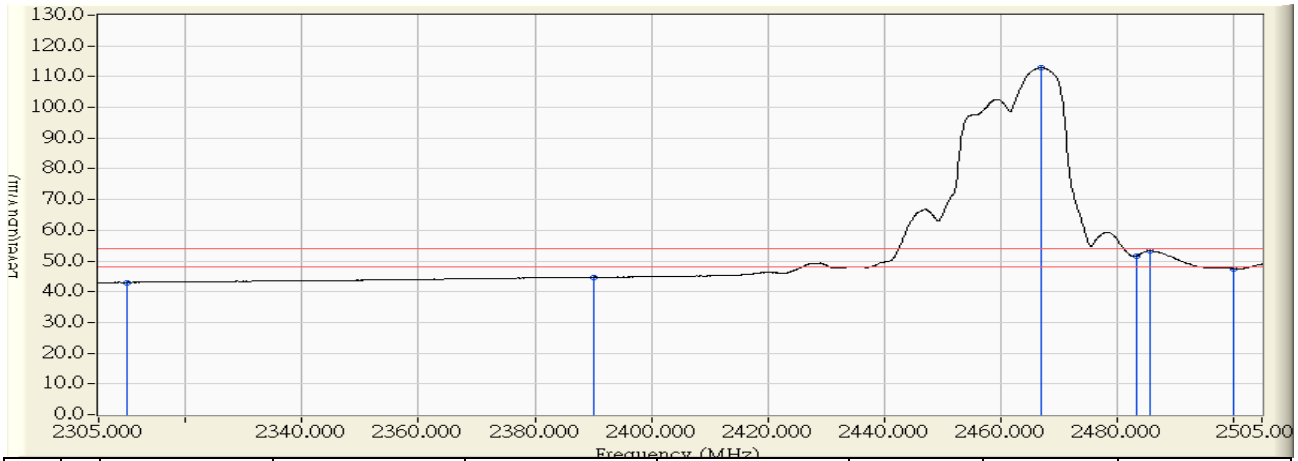


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	14.245	43.029	-10.971	54.000	AVERAGE
2	2390.000	29.747	15.023	44.770	-9.230	54.000	AVERAGE
3	* 2467.100	30.676	82.209	112.885	58.885	54.000	AVERAGE
4	2483.500	30.830	20.866	51.696	-2.304	54.000	AVERAGE
5	2485.700	30.835	22.505	53.341	-0.659	54.000	AVERAGE
6	2500.000	30.860	16.690	47.549	-6.451	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 22:10
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2412MHz

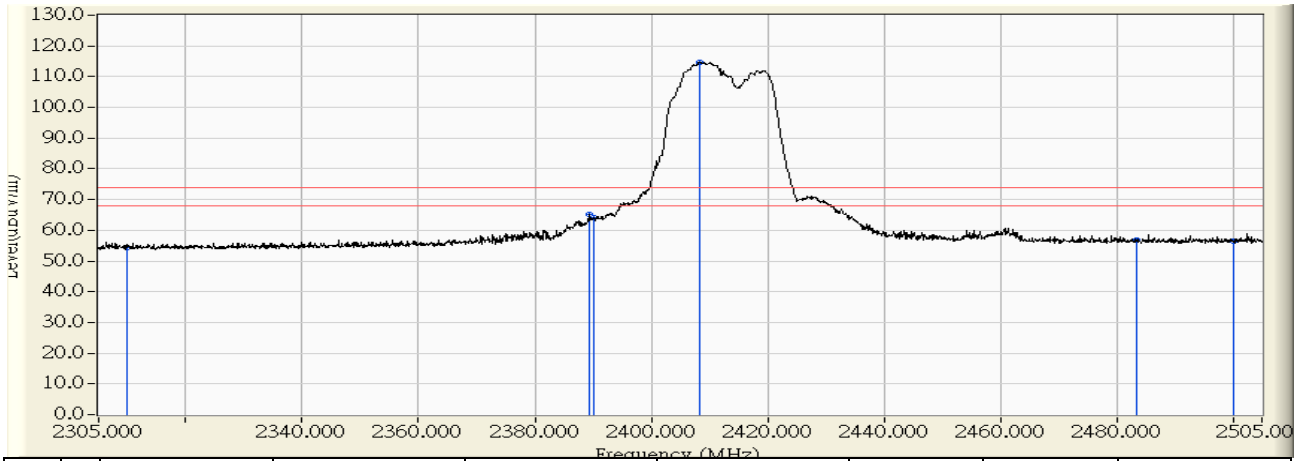


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	26.392	54.522	-19.478	74.000	PEAK
2	2389.300	28.926	36.132	65.058	-8.942	74.000	PEAK
3	2390.000	28.933	35.368	64.301	-9.699	74.000	PEAK
4	* 2408.400	29.118	85.543	114.661	40.661	74.000	PEAK
5	2483.500	29.829	26.816	56.645	-17.355	74.000	PEAK
6	2500.000	29.826	26.786	56.611	-17.389	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 22:12
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2412MHz

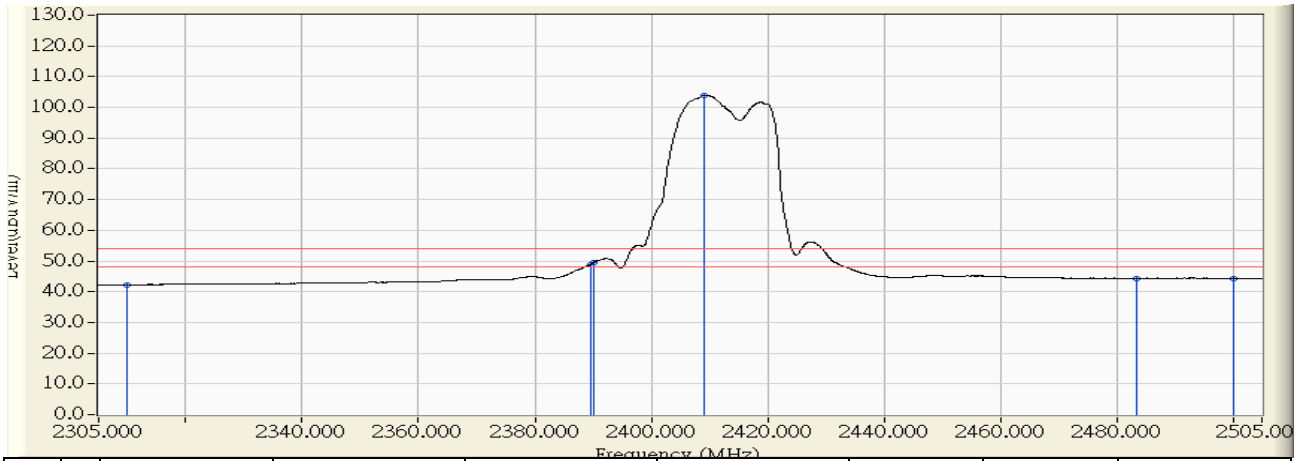


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	14.162	42.292	-11.708	54.000	AVERAGE
2	2389.500	28.928	19.849	48.777	-5.223	54.000	AVERAGE
3	2390.000	28.933	20.522	49.455	-4.545	54.000	AVERAGE
4	* 2409.200	29.126	74.757	103.883	49.883	54.000	AVERAGE
5	2483.500	29.829	14.545	44.374	-9.626	54.000	AVERAGE
6	2500.000	29.826	14.572	44.397	-9.603	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 18:54
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2412MHz

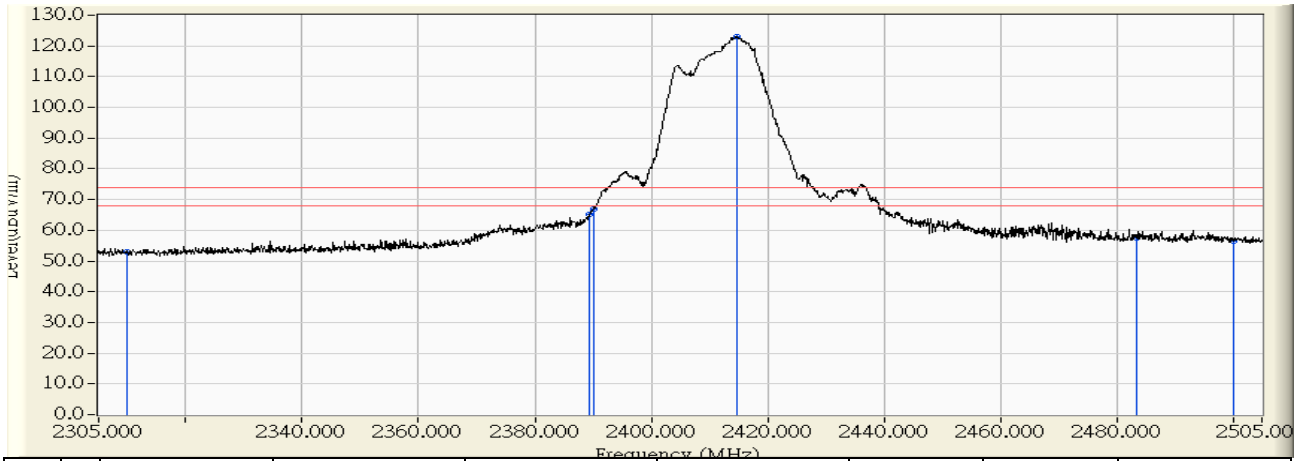


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	24.131	52.915	-21.085	74.000	PEAK
2	2389.400	29.740	35.532	65.272	-8.728	74.000	PEAK
3	2390.000	29.747	37.280	67.027	-6.973	74.000	PEAK
4	* 2414.700	30.045	92.998	123.043	49.043	74.000	PEAK
5	2483.500	30.830	26.768	57.598	-16.402	74.000	PEAK
6	2500.000	30.860	25.693	56.552	-17.448	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 18:53
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2412MHz

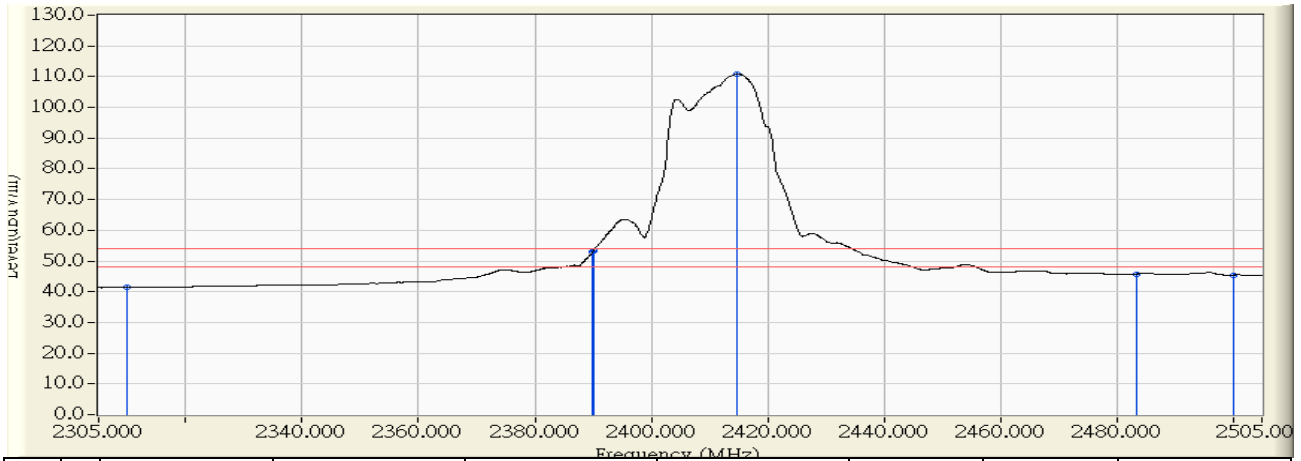


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	12.609	41.393	-12.607	54.000	AVERAGE
2	2389.900	29.746	23.217	52.963	-1.037	54.000	AVERAGE
3	2390.000	29.747	23.472	53.219	-0.781	54.000	AVERAGE
4	* 2414.700	30.045	80.870	110.915	56.915	54.000	AVERAGE
5	2483.500	30.830	14.999	45.829	-8.171	54.000	AVERAGE
6	2500.000	30.860	14.589	45.448	-8.552	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 23:39
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2417MHz

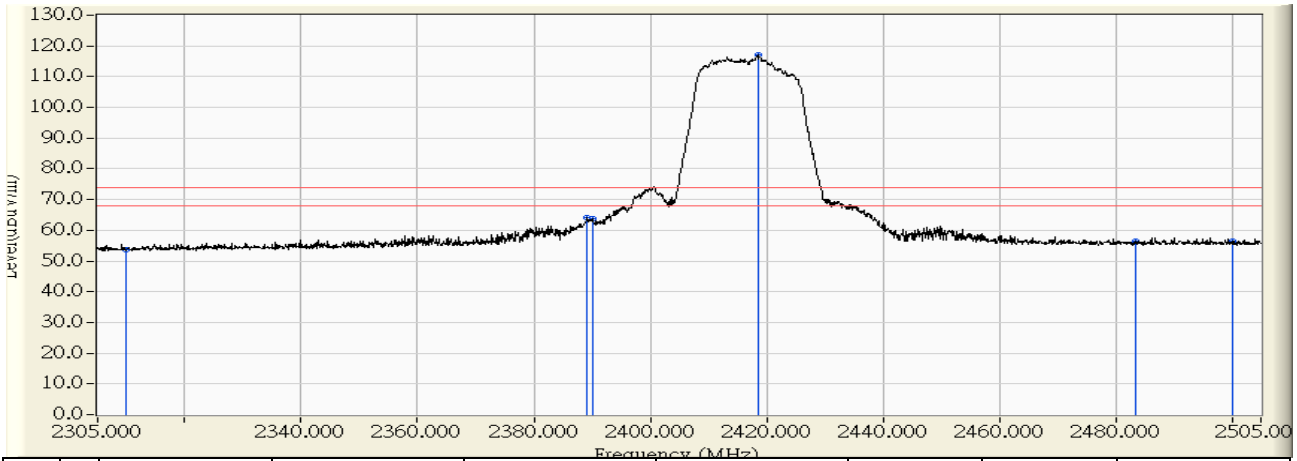


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	24.665	53.563	-20.437	74.000	PEAK
2	2389.200	29.759	34.436	64.195	-9.805	74.000	PEAK
3	2390.000	29.768	34.041	63.809	-10.191	74.000	PEAK
4	* 2418.500	30.078	86.877	116.955	42.955	74.000	PEAK
5	2483.500	30.738	25.595	56.334	-17.666	74.000	PEAK
6	2500.000	30.740	25.554	56.293	-17.707	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 23:40
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2417MHz

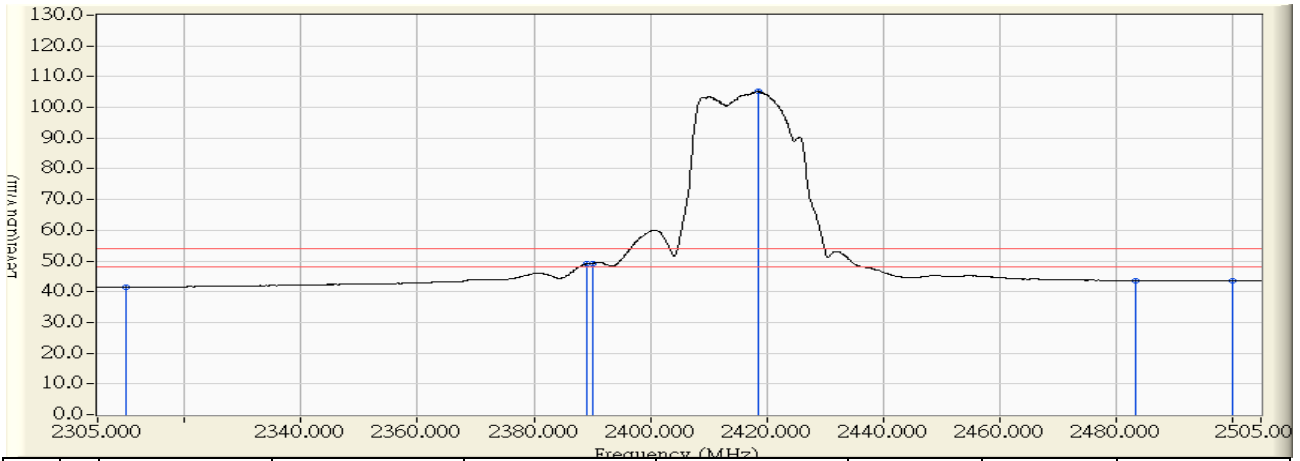


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	12.490	41.388	-12.612	54.000	AVERAGE
2	2389.000	29.757	19.269	49.026	-4.974	54.000	AVERAGE
3	2390.000	29.768	19.354	49.122	-4.878	54.000	AVERAGE
4	* 2418.700	30.080	75.125	105.205	51.205	54.000	AVERAGE
5	2483.500	30.738	12.870	43.609	-10.391	54.000	AVERAGE
6	2500.000	30.740	12.787	43.526	-10.474	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 23:34
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2417MHz

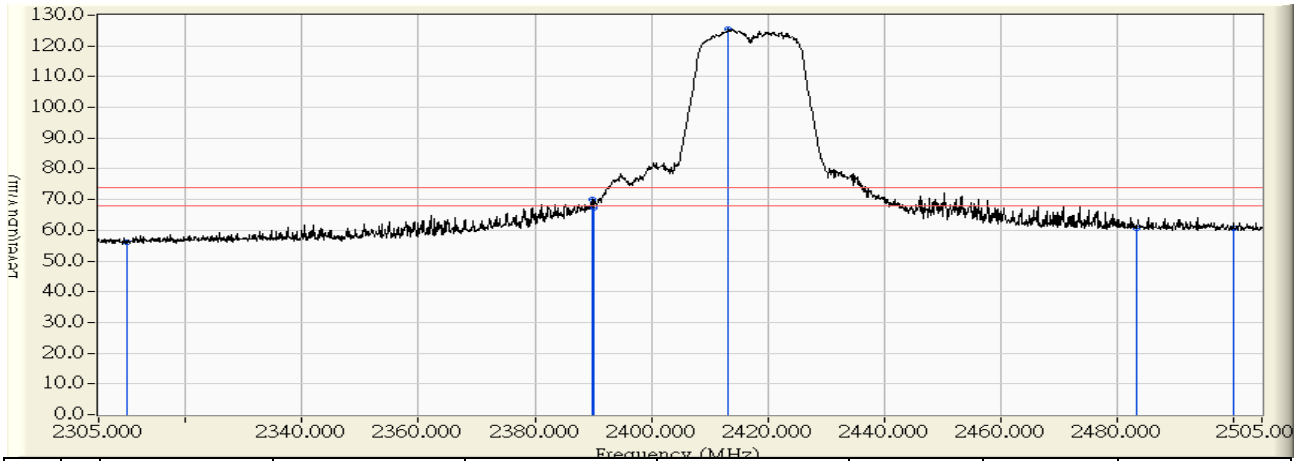


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	26.480	56.032	-17.968	74.000	PEAK
2	2389.800	30.580	39.363	69.943	-4.057	74.000	PEAK
3	2390.000	30.582	36.511	67.093	-6.907	74.000	PEAK
4	* 2413.200	30.880	94.661	125.542	51.542	74.000	PEAK
5	2483.500	31.739	29.017	60.757	-13.243	74.000	PEAK
6	2500.000	31.774	29.007	60.780	-13.220	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 23:33
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2417MHz

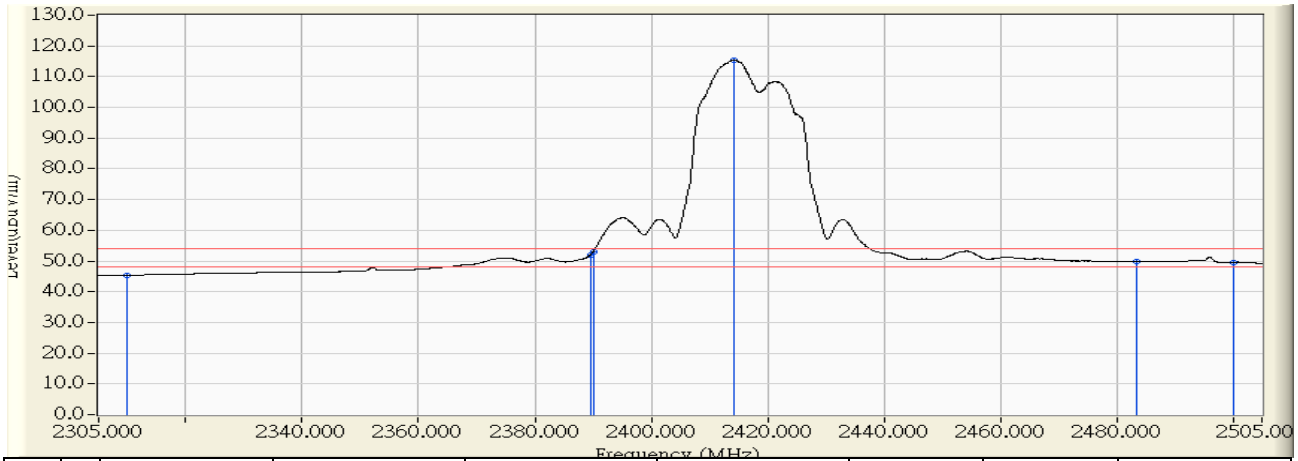


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	15.782	45.334	-8.666	54.000	AVERAGE
2	2389.500	30.576	21.425	52.001	-1.999	54.000	AVERAGE
3	2390.000	30.582	22.441	53.023	-0.977	54.000	AVERAGE
4	* 2414.200	30.894	84.624	115.518	61.518	54.000	AVERAGE
5	2483.500	31.739	18.261	50.001	-3.999	54.000	AVERAGE
6	2500.000	31.774	17.726	49.499	-4.501	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 14:34
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2437MHz

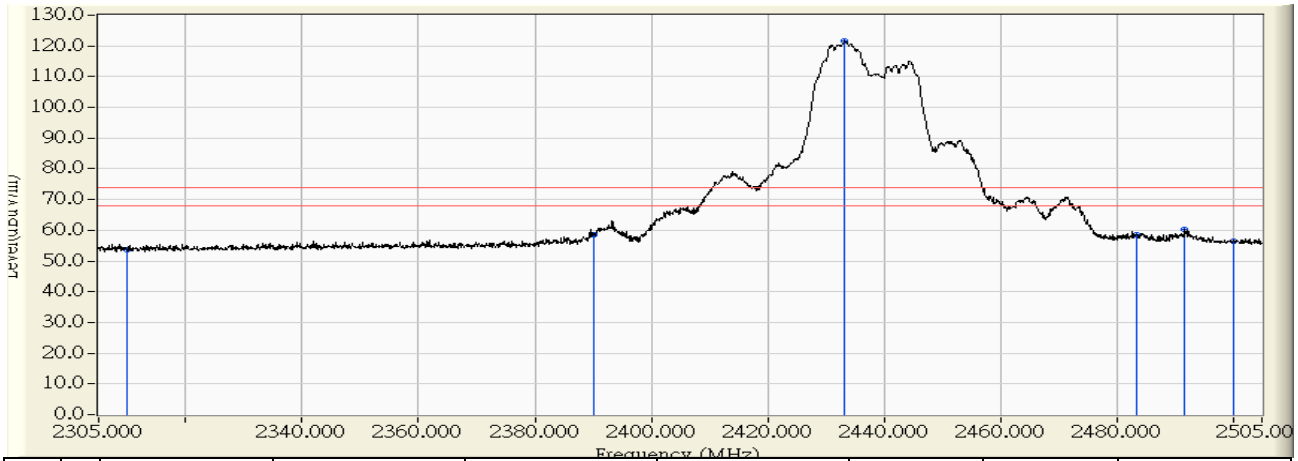


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	25.655	53.785	-20.215	74.000	PEAK
2	2390.000	28.933	29.604	58.537	-15.463	74.000	PEAK
3	* 2433.300	29.368	92.122	121.490	47.490	74.000	PEAK
4	2483.500	29.829	28.581	58.410	-15.590	74.000	PEAK
5	2491.700	29.833	30.486	60.319	-13.681	74.000	PEAK
6	2500.000	29.826	26.583	56.408	-17.592	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 14:35
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2437MHz

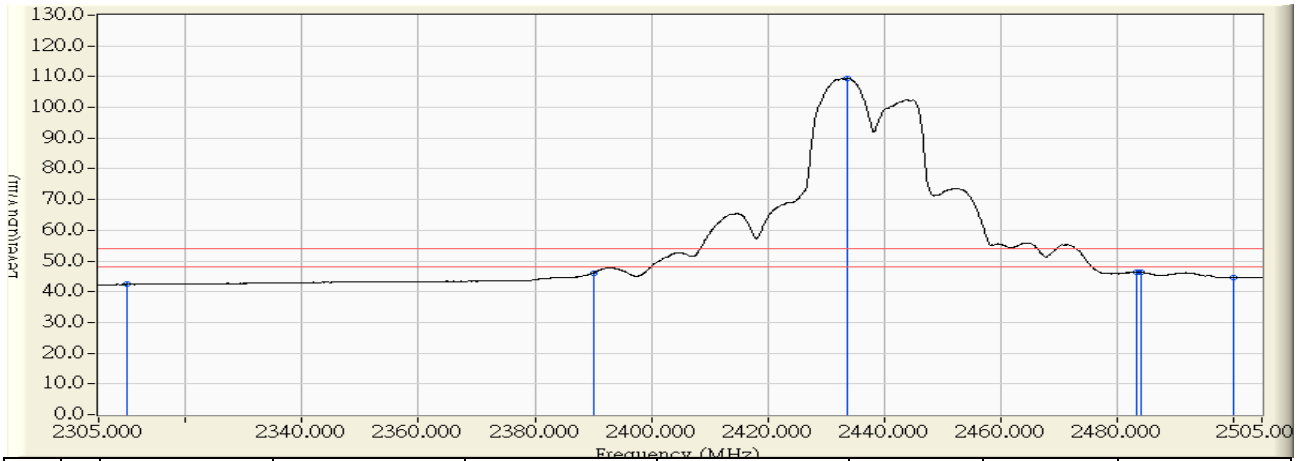


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	14.236	42.366	-11.634	54.000	AVERAGE
2	2390.000	28.933	17.233	46.166	-7.834	54.000	AVERAGE
3	* 2433.800	29.373	80.227	109.600	55.600	54.000	AVERAGE
4	2483.500	29.829	16.551	46.380	-7.620	54.000	AVERAGE
5	2484.200	29.830	16.501	46.330	-7.670	54.000	AVERAGE
6	2500.000	29.826	14.874	44.699	-9.301	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 17:56
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2437MHz

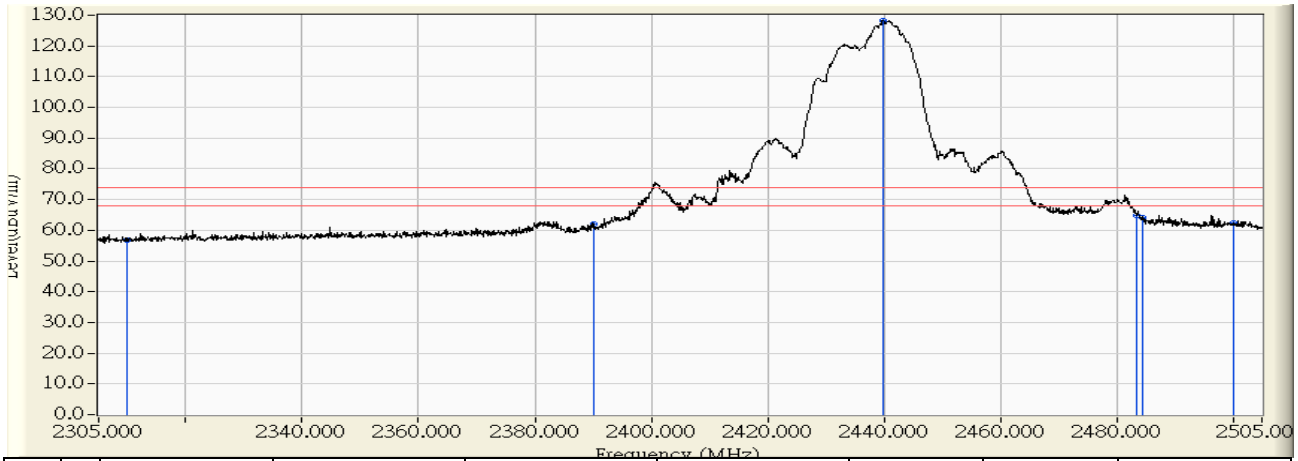


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	28.194	56.978	-17.022	74.000	PEAK
2	2390.000	29.747	32.454	62.201	-11.799	74.000	PEAK
3	* 2439.900	30.348	97.972	128.320	54.320	74.000	PEAK
4	2483.500	30.830	33.835	64.665	-9.335	74.000	PEAK
5	2484.500	30.833	33.413	64.246	-9.754	74.000	PEAK
6	2500.000	30.860	31.449	62.308	-11.692	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 17:53
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2437MHz

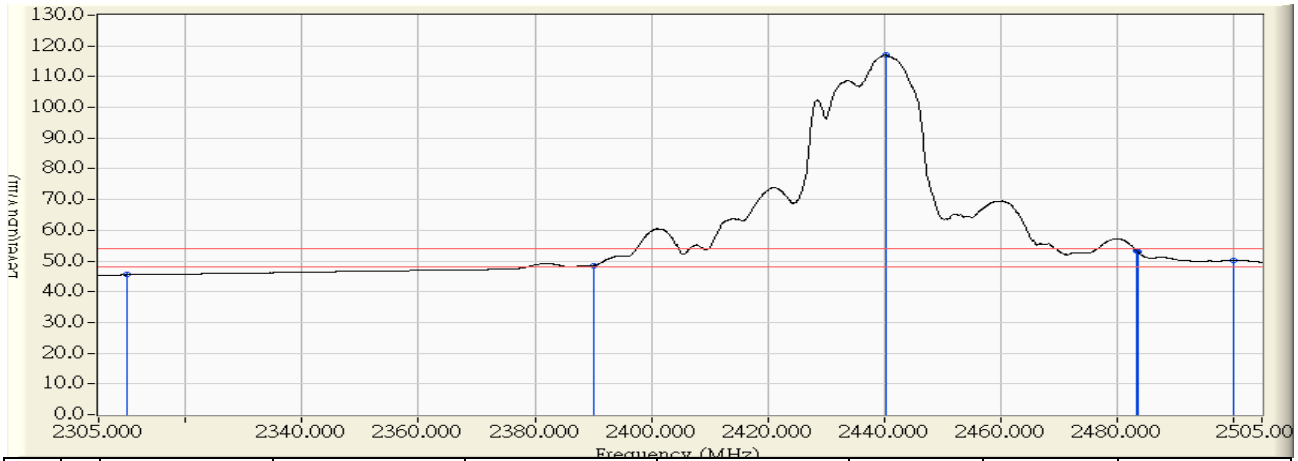


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	16.743	45.527	-8.473	54.000	AVERAGE
2	2390.000	29.747	18.805	48.552	-5.448	54.000	AVERAGE
3	* 2440.300	30.352	86.682	117.035	63.035	54.000	AVERAGE
4	2483.500	30.830	22.441	53.271	-0.729	54.000	AVERAGE
5	2483.600	30.831	22.310	53.140	-0.860	54.000	AVERAGE
6	2500.000	30.860	19.413	50.272	-3.728	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 23:55
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2457MHz

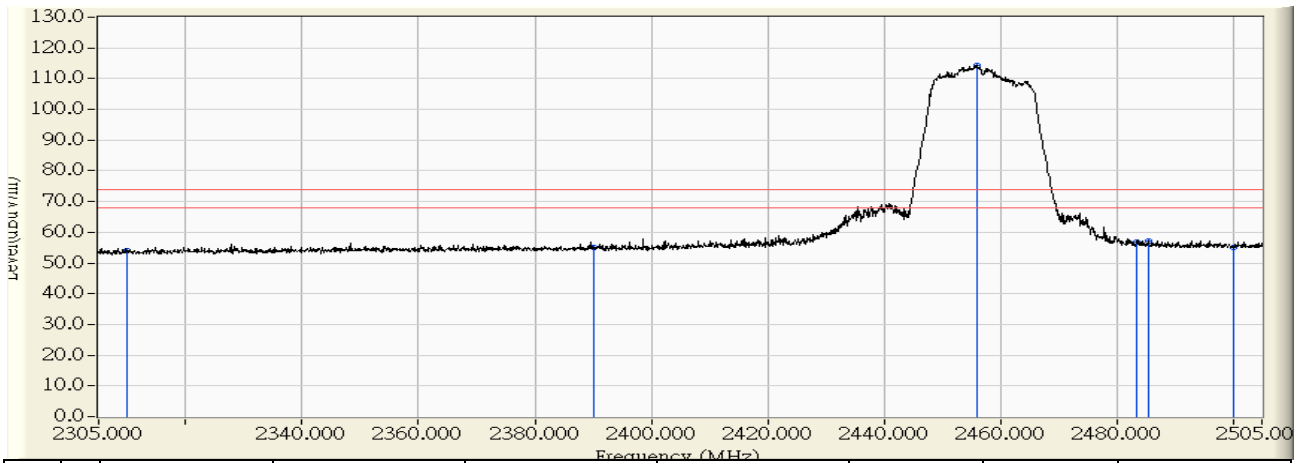


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	25.273	54.171	-19.829	74.000	PEAK
2	2390.000	29.768	25.354	55.122	-18.878	74.000	PEAK
3	* 2455.900	30.484	83.790	114.274	40.274	74.000	PEAK
4	2483.500	30.738	26.136	56.875	-17.125	74.000	PEAK
5	2485.400	30.741	26.580	57.320	-16.680	74.000	PEAK
6	2500.000	30.740	24.487	55.226	-18.774	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 23:57
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2457MHz

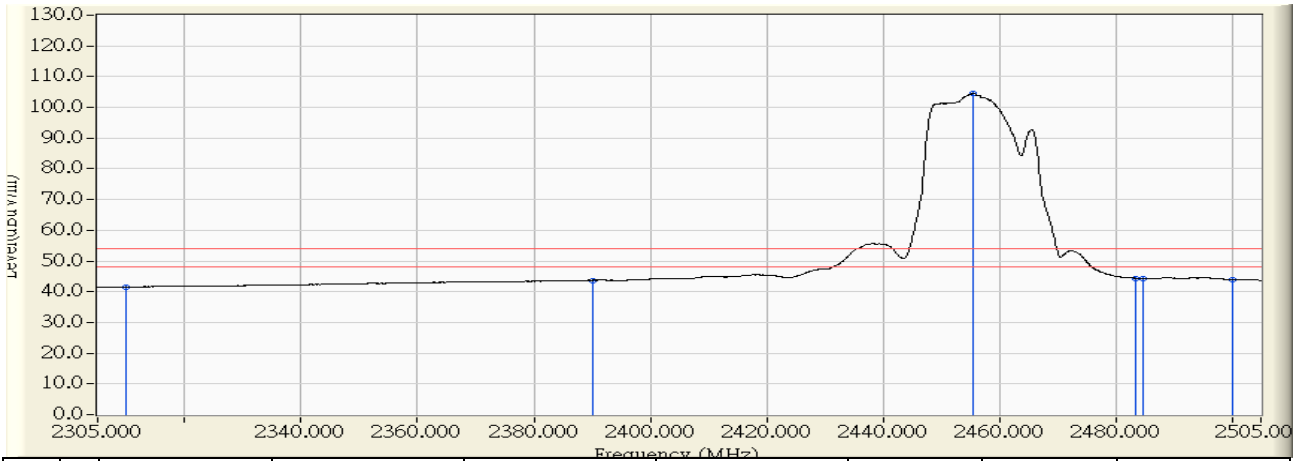


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	12.672	41.570	-12.430	54.000	AVERAGE
2	2390.000	29.768	13.955	43.723	-10.277	54.000	AVERAGE
3	* 2455.600	30.481	74.043	104.524	50.524	54.000	AVERAGE
4	2483.500	30.738	13.610	44.349	-9.651	54.000	AVERAGE
5	2484.700	30.740	13.583	44.323	-9.677	54.000	AVERAGE
6	2500.000	30.740	13.206	43.945	-10.055	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 23:50
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2457MHz

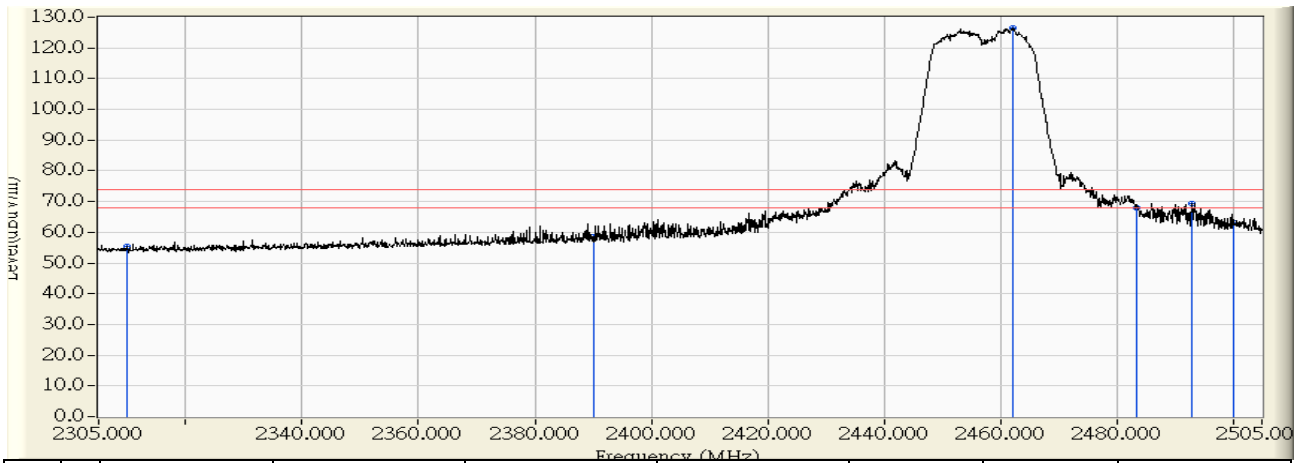


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	25.794	55.346	-18.654	74.000	PEAK
2	2390.000	30.582	28.007	58.589	-15.411	74.000	PEAK
3	* 2462.100	31.510	95.067	126.577	52.577	74.000	PEAK
4	2483.500	31.739	36.131	67.871	-6.129	74.000	PEAK
5	2493.000	31.766	37.758	69.524	-4.476	74.000	PEAK
6	2500.000	31.774	31.343	63.116	-10.884	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/12 - 23:49
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2457MHz

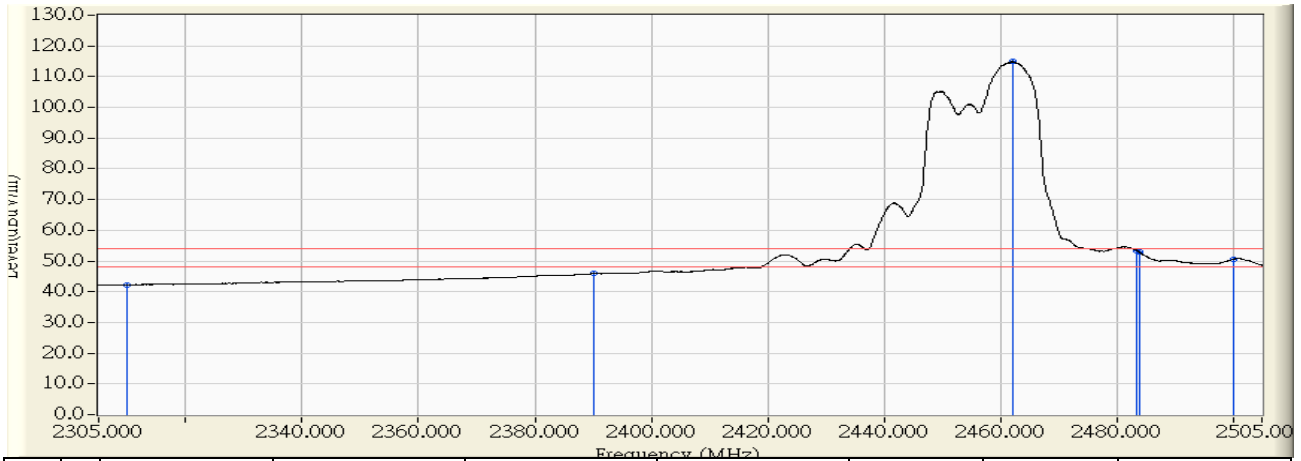


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	12.731	42.283	-11.717	54.000	AVERAGE
2	2390.000	30.582	15.303	45.885	-8.115	54.000	AVERAGE
3	* 2462.200	31.512	83.418	114.929	60.929	54.000	AVERAGE
4	2483.500	31.739	21.663	53.403	-0.597	54.000	AVERAGE
5	2483.900	31.741	21.262	53.003	-0.997	54.000	AVERAGE
6	2500.000	31.774	18.779	50.552	-3.448	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 22:03
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2462MHz

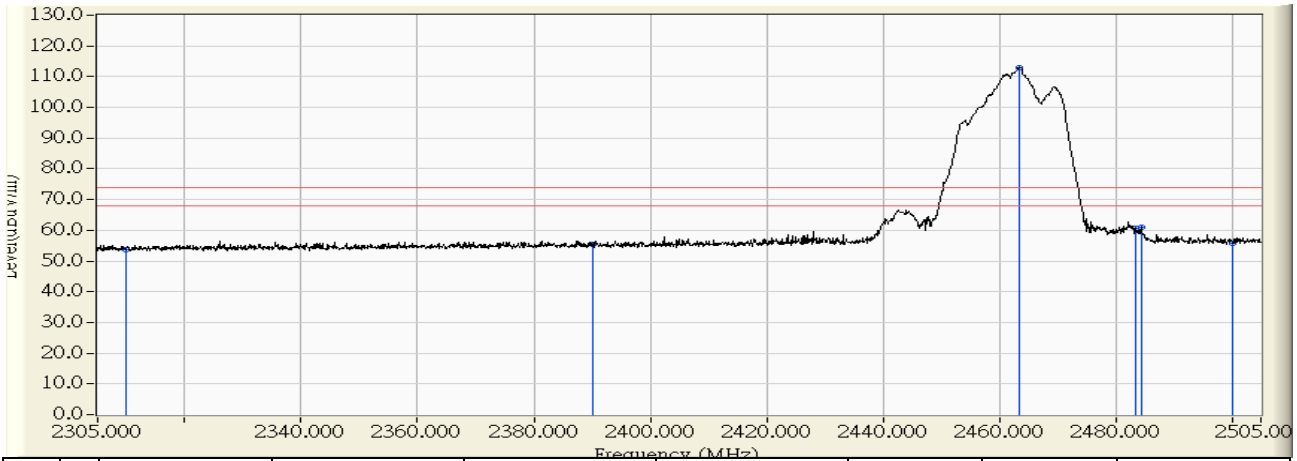


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	25.440	53.570	-20.430	74.000	PEAK
2	2390.000	28.933	26.652	55.585	-18.415	74.000	PEAK
3	* 2463.500	29.671	83.383	113.054	39.054	74.000	PEAK
4	2483.500	29.829	30.722	60.551	-13.449	74.000	PEAK
5	2484.500	29.830	31.224	61.054	-12.946	74.000	PEAK
6	2500.000	29.826	25.974	55.799	-18.201	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 22:04
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2462MHz

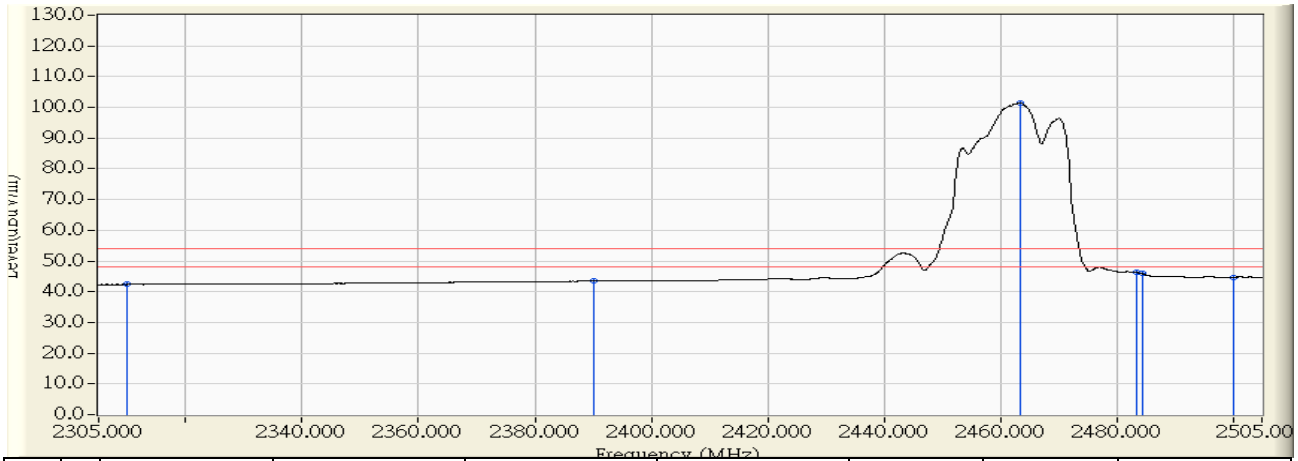


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	14.222	42.352	-11.648	54.000	AVERAGE
2	2390.000	28.933	14.548	43.481	-10.519	54.000	AVERAGE
3	* 2463.500	29.671	71.870	101.541	47.541	54.000	AVERAGE
4	2483.500	29.829	16.409	46.238	-7.762	54.000	AVERAGE
5	2484.400	29.830	16.095	45.924	-8.076	54.000	AVERAGE
6	2500.000	29.826	14.832	44.657	-9.343	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 19:05
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2462MHz

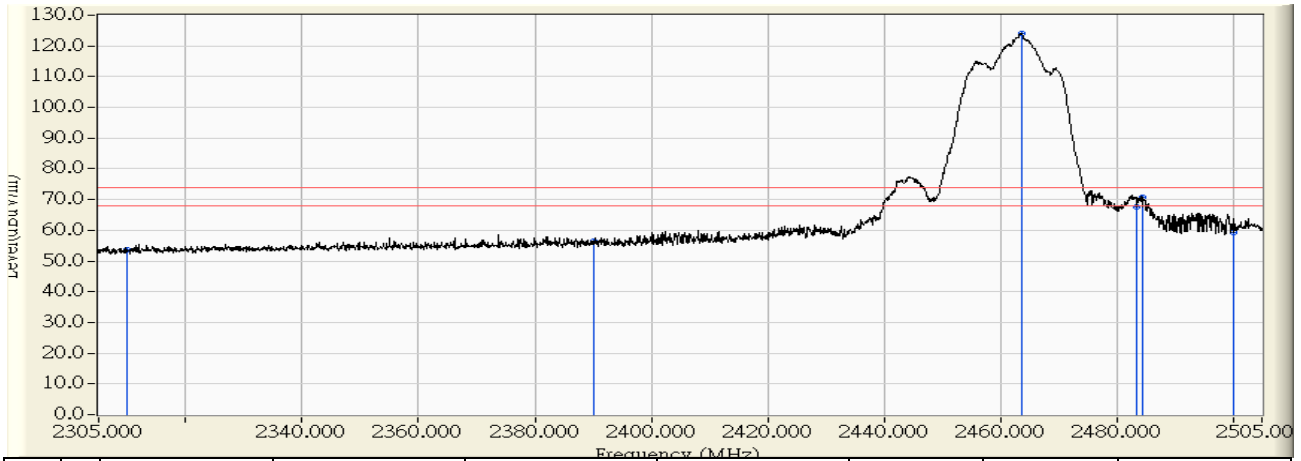


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	24.833	53.617	-20.383	74.000	PEAK
2	2390.000	29.747	26.629	56.376	-17.624	74.000	PEAK
3	* 2463.600	30.633	93.405	124.038	50.038	74.000	PEAK
4	2483.500	30.830	36.675	67.505	-6.495	74.000	PEAK
5	2484.600	30.833	39.963	70.796	-3.204	74.000	PEAK
6	2500.000	30.860	28.374	59.233	-14.767	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 19:06
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_2462MHz

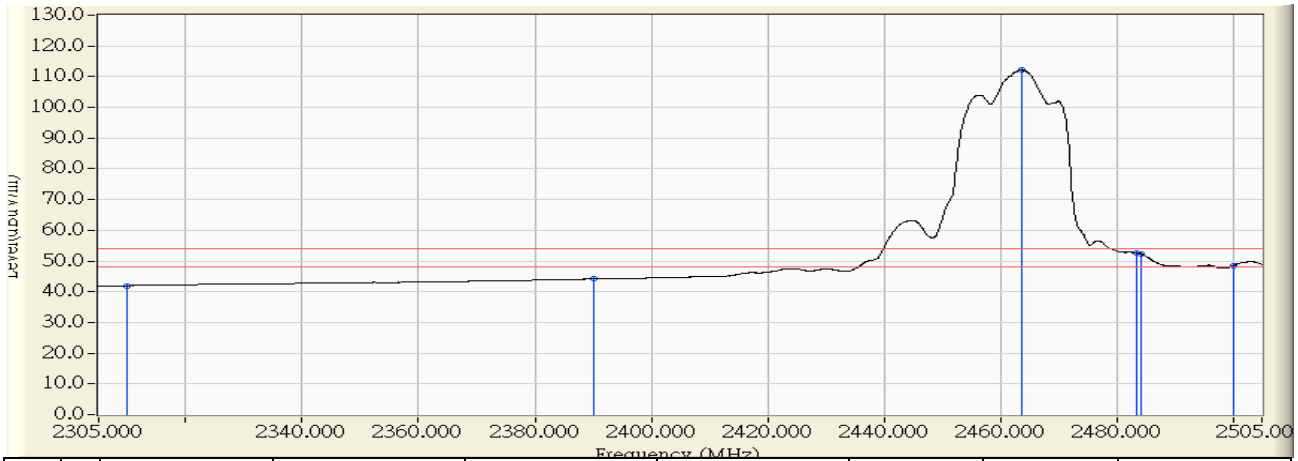


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	13.169	41.953	-12.047	54.000	AVERAGE
2	2390.000	29.747	14.454	44.201	-9.799	54.000	AVERAGE
3	* 2463.600	30.633	81.616	112.249	58.249	54.000	AVERAGE
4	2483.500	30.830	21.833	52.663	-1.337	54.000	AVERAGE
5	2484.200	30.832	21.562	52.394	-1.606	54.000	AVERAGE
6	2500.000	30.860	17.573	48.432	-5.568	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 22:19
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2422MHz

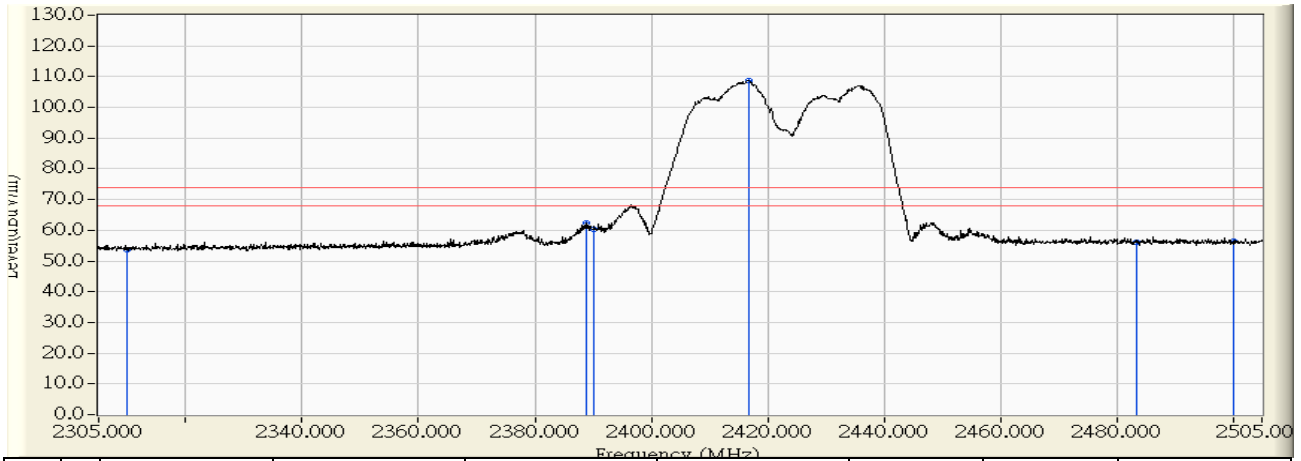


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	25.432	53.562	-20.438	74.000	PEAK
2	2388.900	28.922	33.373	62.295	-11.705	74.000	PEAK
3	2390.000	28.933	31.331	60.264	-13.736	74.000	PEAK
4	* 2416.700	29.201	79.575	108.776	34.776	74.000	PEAK
5	2483.500	29.829	26.254	56.083	-17.917	74.000	PEAK
6	2500.000	29.826	26.501	56.326	-17.674	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 22:24
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2422MHz

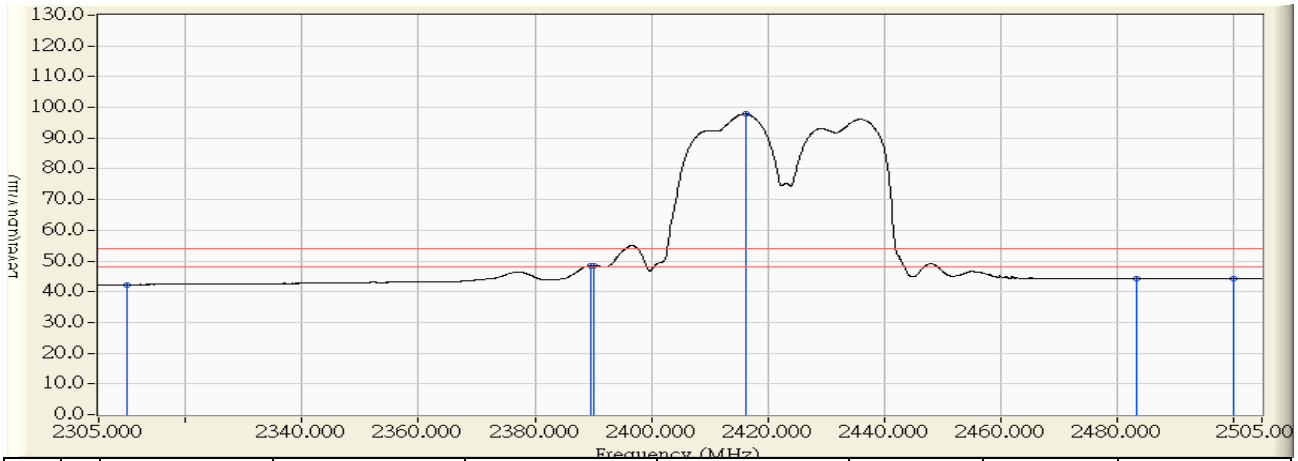


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	14.162	42.292	-11.708	54.000	AVERAGE
2	2389.600	28.929	19.625	48.554	-5.446	54.000	AVERAGE
3	2390.000	28.933	19.651	48.584	-5.416	54.000	AVERAGE
4	* 2416.200	29.196	68.648	97.844	43.844	54.000	AVERAGE
5	2483.500	29.829	14.532	44.361	-9.639	54.000	AVERAGE
6	2500.000	29.826	14.476	44.301	-9.699	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 19:15
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2422MHz

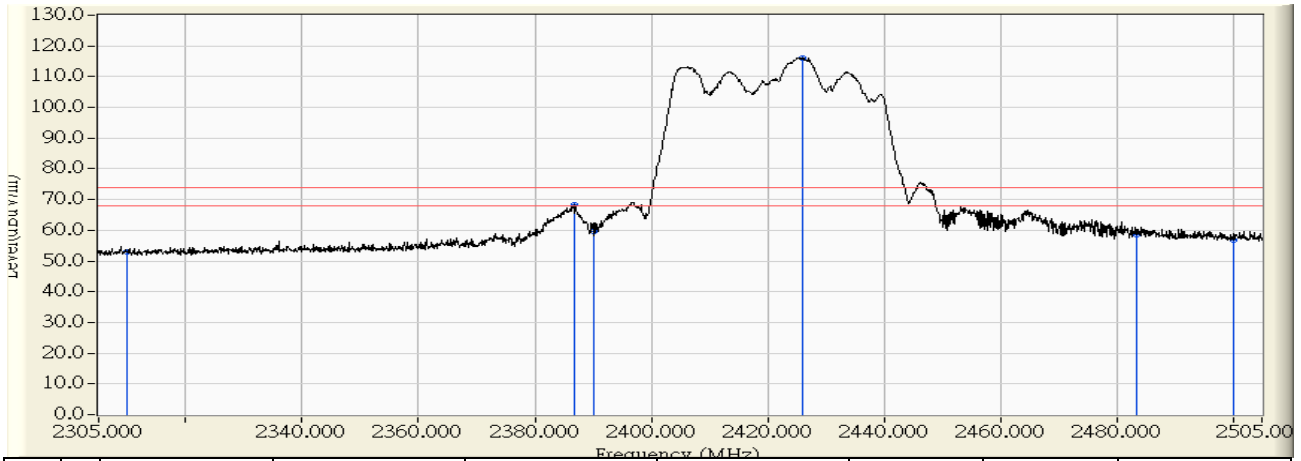


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	24.265	53.049	-20.951	74.000	PEAK
2	2386.700	29.707	38.450	68.157	-5.843	74.000	PEAK
3	2390.000	29.747	29.689	59.436	-14.564	74.000	PEAK
4	* 2425.900	30.179	86.047	116.226	42.226	74.000	PEAK
5	2483.500	30.830	27.706	58.536	-15.464	74.000	PEAK
6	2500.000	30.860	26.007	56.866	-17.134	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 19:14
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2422MHz

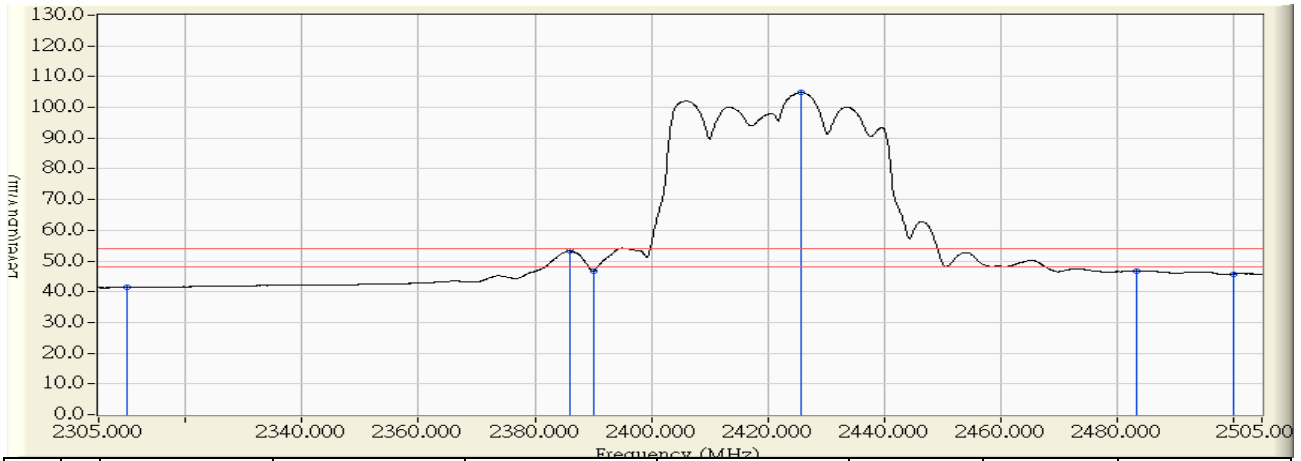


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	12.599	41.383	-12.617	54.000	AVERAGE
2	2386.000	29.699	23.493	53.192	-0.808	54.000	AVERAGE
3	2390.000	29.747	16.875	46.622	-7.378	54.000	AVERAGE
4	* 2425.700	30.177	74.656	104.833	50.833	54.000	AVERAGE
5	2483.500	30.830	15.820	46.650	-7.350	54.000	AVERAGE
6	2500.000	30.860	14.948	45.807	-8.193	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/13 - 10:37
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2427MHz

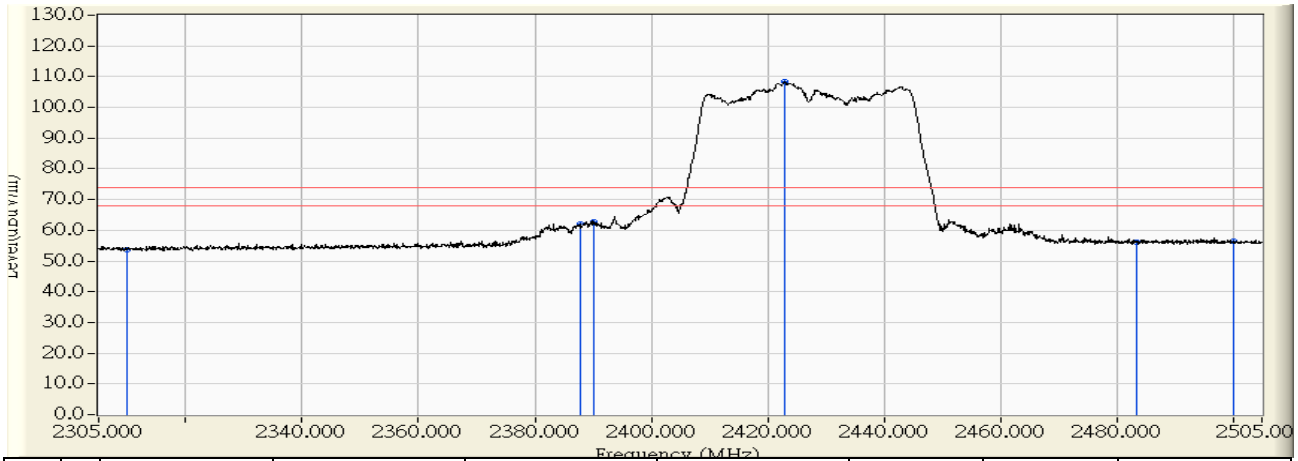


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	24.883	53.781	-20.219	74.000	PEAK
2	2387.700	29.744	32.356	62.099	-11.901	74.000	PEAK
3	2390.000	29.768	32.916	62.684	-11.316	74.000	PEAK
4	* 2422.900	30.126	78.132	108.258	34.258	74.000	PEAK
5	2483.500	30.738	25.483	56.222	-17.778	74.000	PEAK
6	2500.000	30.740	25.607	56.346	-17.654	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/13 - 10:38
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2427MHz

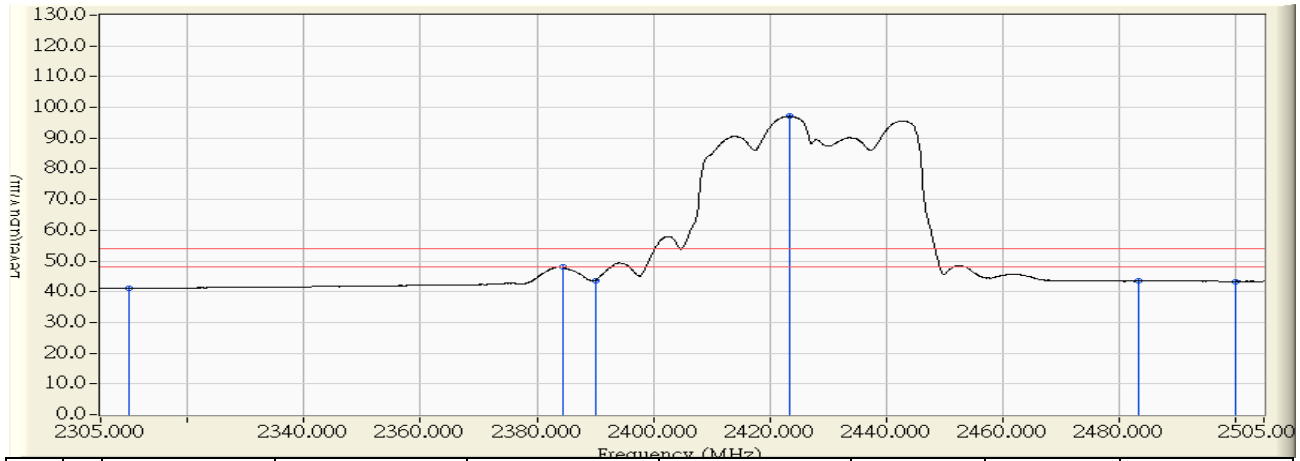


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	12.210	41.108	-12.892	54.000	AVERAGE
2	2384.400	29.708	18.295	48.002	-5.998	54.000	AVERAGE
3	2390.000	29.768	13.884	43.652	-10.348	54.000	AVERAGE
4	* 2423.400	30.131	66.955	97.086	43.086	54.000	AVERAGE
5	2483.500	30.738	12.755	43.494	-10.506	54.000	AVERAGE
6	2500.000	30.740	12.648	43.387	-10.613	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/13 - 10:22
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2427MHz

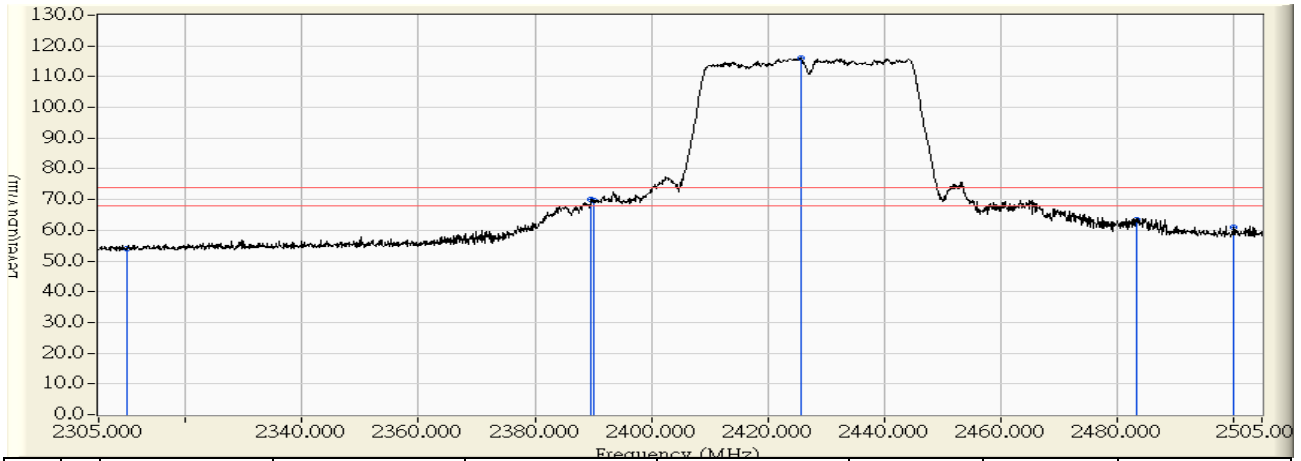


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	24.333	53.885	-20.115	74.000	PEAK
2	2389.700	30.578	39.579	70.157	-3.843	74.000	PEAK
3	2390.000	30.582	39.272	69.854	-4.146	74.000	PEAK
4	* 2425.700	31.042	85.017	116.059	42.059	74.000	PEAK
5	2483.500	31.739	31.626	63.366	-10.634	74.000	PEAK
6	2500.000	31.774	29.203	60.976	-13.024	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/13 - 10:20
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2427MHz

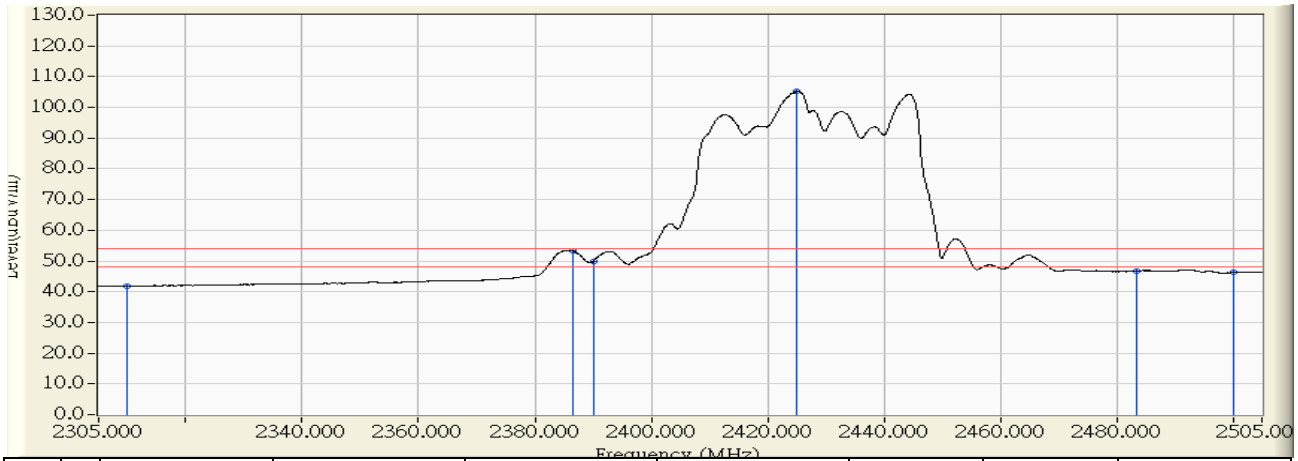


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	12.301	41.853	-12.147	54.000	AVERAGE
2	2386.500	30.537	22.883	53.420	-0.580	54.000	AVERAGE
3	2390.000	30.582	19.157	49.739	-4.261	54.000	AVERAGE
4	* 2425.100	31.034	74.152	105.186	51.186	54.000	AVERAGE
5	2483.500	31.739	15.047	46.787	-7.213	54.000	AVERAGE
6	2500.000	31.774	14.561	46.334	-7.666	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 22:31
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2437MHz

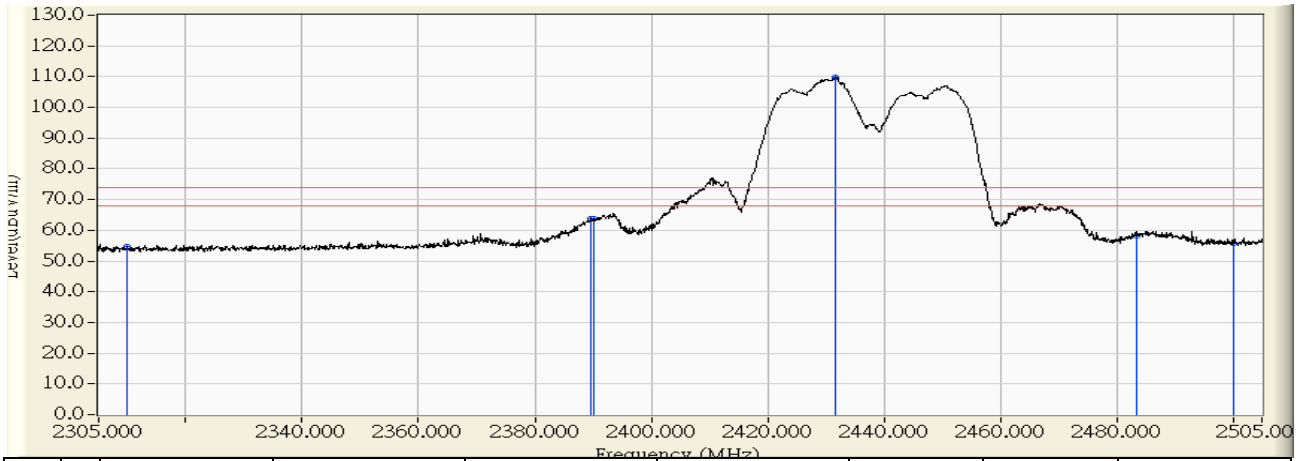


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	26.468	54.598	-19.402	74.000	PEAK
2	2389.600	28.929	34.929	63.858	-10.142	74.000	PEAK
3	2390.000	28.933	34.947	63.880	-10.120	74.000	PEAK
4	* 2431.700	29.351	80.393	109.745	35.745	74.000	PEAK
5	2483.500	29.829	28.407	58.236	-15.764	74.000	PEAK
6	2500.000	29.826	26.066	55.891	-18.109	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 22:32
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2437MHz

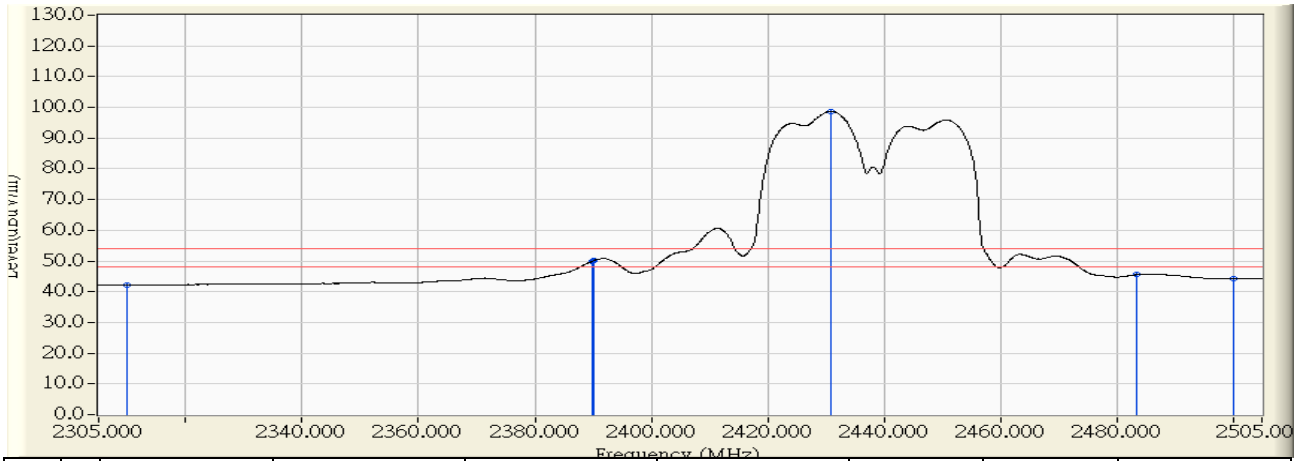


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	14.057	42.187	-11.813	54.000	AVERAGE
2	2389.900	28.932	21.073	50.005	-3.995	54.000	AVERAGE
3	2390.000	28.933	21.168	50.101	-3.899	54.000	AVERAGE
4	* 2431.000	29.345	69.342	98.687	44.687	54.000	AVERAGE
5	2483.500	29.829	15.729	45.558	-8.442	54.000	AVERAGE
6	2500.000	29.826	14.509	44.334	-9.666	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 18:23
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2437MHz

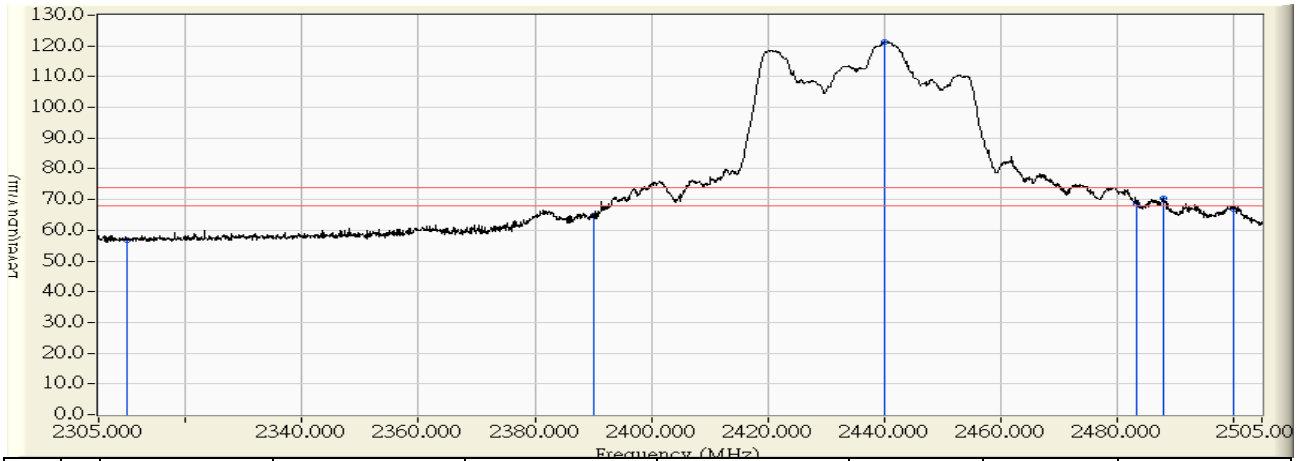


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	28.168	56.952	-17.048	74.000	PEAK
2	2390.000	29.747	34.938	64.685	-9.315	74.000	PEAK
3	* 2440.200	30.351	90.901	121.253	47.253	74.000	PEAK
4	2483.500	30.830	37.709	68.539	-5.461	74.000	PEAK
5	2488.200	30.842	39.410	70.252	-3.748	74.000	PEAK
6	2500.000	30.860	35.935	66.794	-7.206	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 18:25
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2437MHz

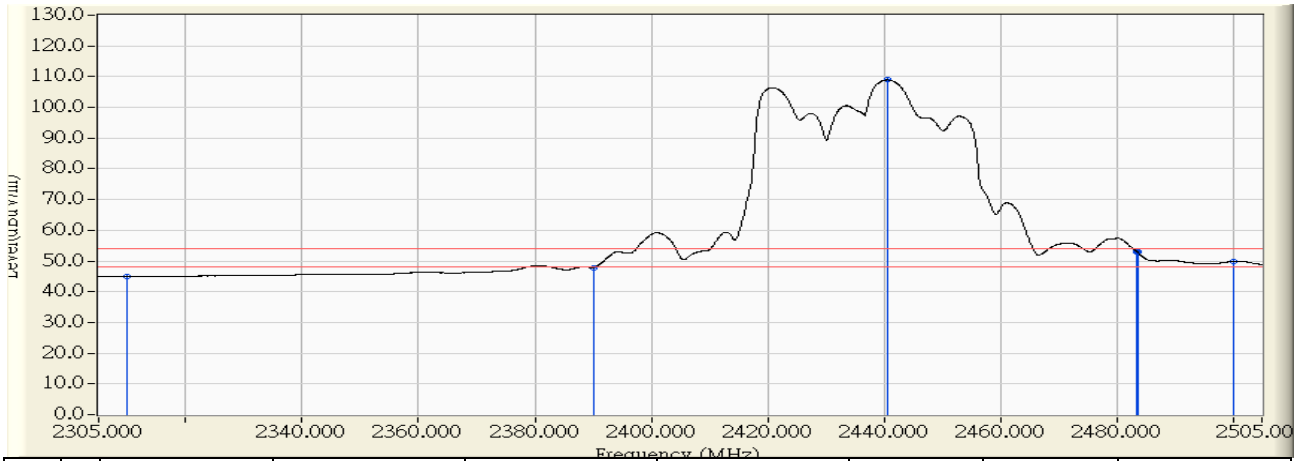


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	16.122	44.906	-9.094	54.000	AVERAGE
2	2390.000	29.747	18.121	47.868	-6.132	54.000	AVERAGE
3	* 2440.600	30.356	78.585	108.941	54.941	54.000	AVERAGE
4	2483.500	30.830	22.177	53.007	-0.993	54.000	AVERAGE
5	2483.600	30.831	22.018	52.848	-21.152	74.000	AVERAGE
6	2500.000	30.860	19.016	49.875	-4.125	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/13 - 11:04
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2447MHz

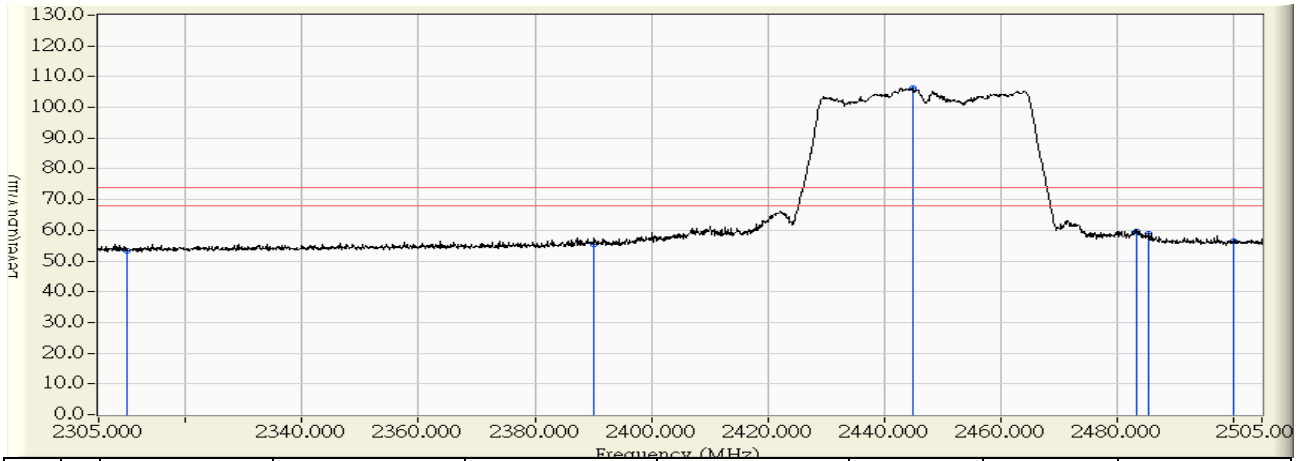


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	24.441	53.339	-20.661	74.000	PEAK
2	2390.000	29.768	25.810	55.578	-18.422	74.000	PEAK
3	* 2444.900	30.364	75.876	106.241	32.241	74.000	PEAK
4	2483.500	30.738	28.883	59.622	-14.378	74.000	PEAK
5	2485.500	30.741	28.091	58.831	-15.169	74.000	PEAK
6	2500.000	30.740	25.575	56.314	-17.686	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/13 - 11:05
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2447MHz

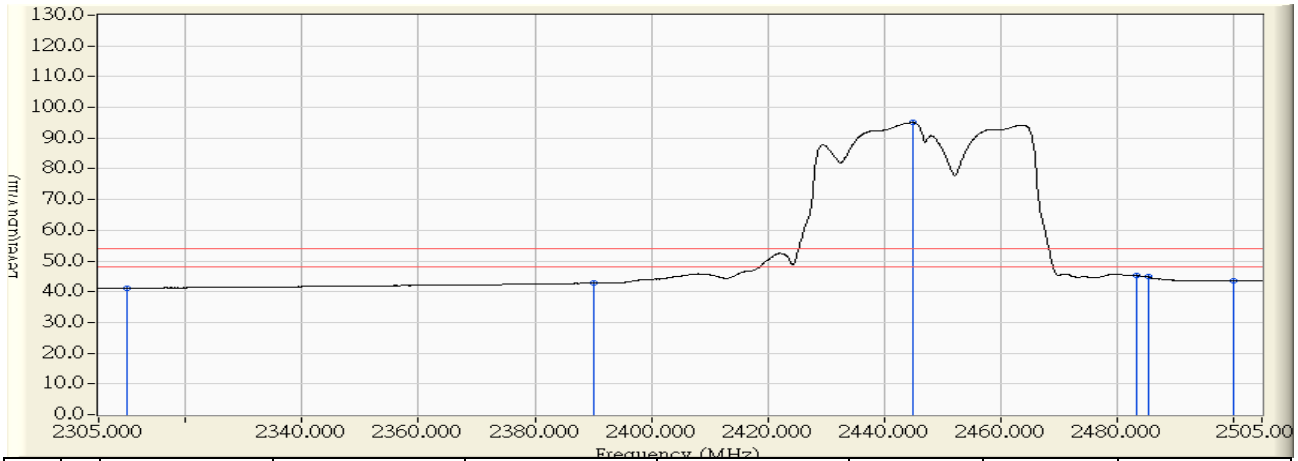


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.899	12.293	41.191	-12.809	54.000	AVERAGE
2	2390.000	29.768	13.008	42.776	-11.224	54.000	AVERAGE
3	* 2445.100	30.367	64.651	95.018	41.018	54.000	AVERAGE
4	2483.500	30.738	14.462	45.201	-8.799	54.000	AVERAGE
5	2485.400	30.741	14.086	44.826	-9.174	54.000	AVERAGE
6	2500.000	30.740	12.823	43.562	-10.438	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/13 - 10:56
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2447MHz

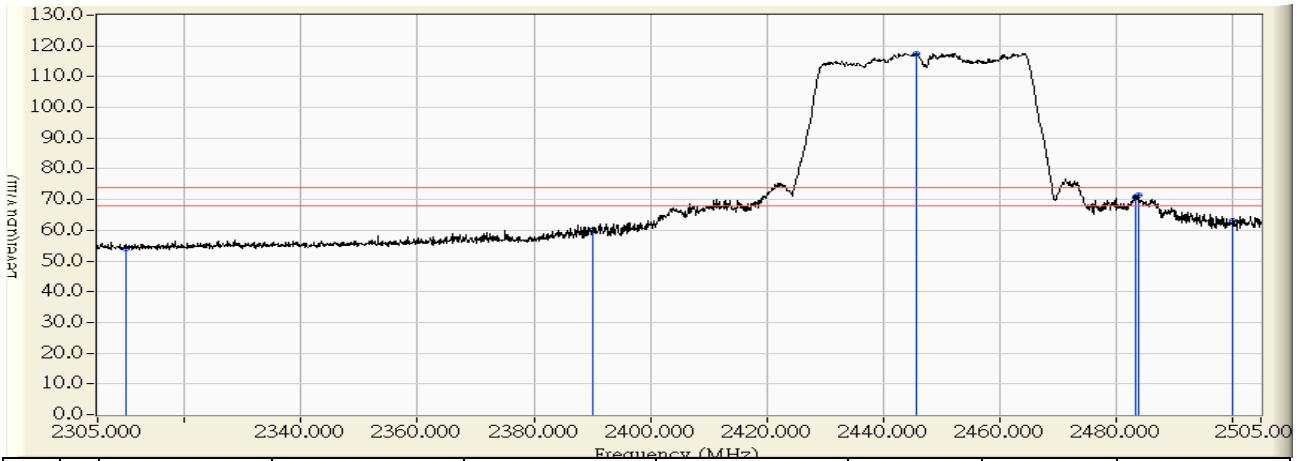


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	24.578	54.130	-19.870	74.000	PEAK
2	2390.000	30.582	29.422	60.004	-13.996	74.000	PEAK
3	* 2445.700	31.299	86.241	117.540	43.540	74.000	PEAK
4	2483.500	31.739	38.889	70.629	-3.371	74.000	PEAK
5	2483.900	31.741	39.534	71.275	-2.725	74.000	PEAK
6	2500.000	31.774	31.367	63.140	-10.860	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/13 - 10:54
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2447MHz

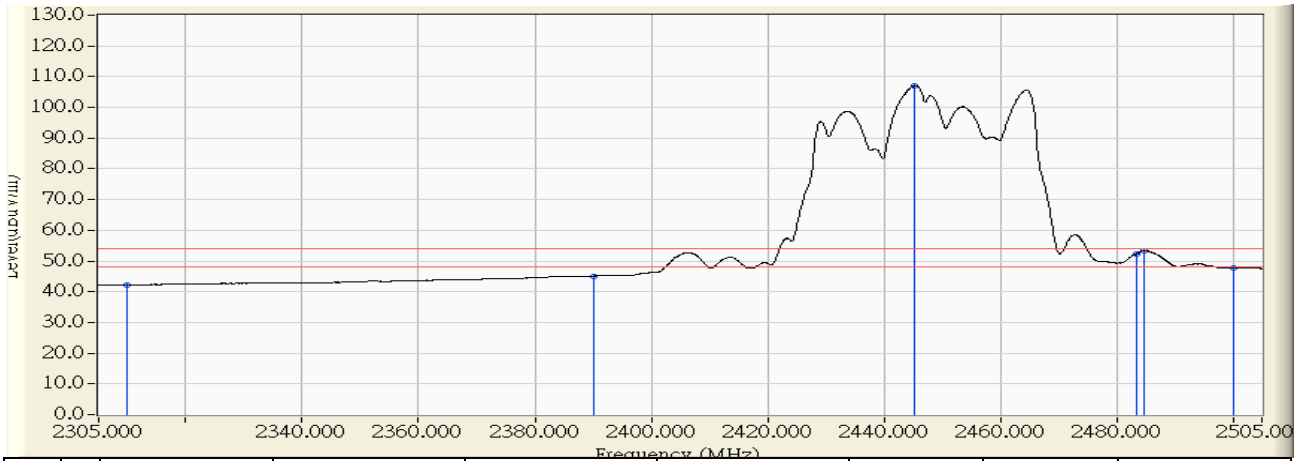


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	29.553	12.648	42.200	-11.800	54.000	AVERAGE
2	2390.000	30.582	14.477	45.059	-8.941	54.000	AVERAGE
3	* 2445.300	31.294	75.671	106.965	52.965	54.000	AVERAGE
4	2483.500	31.739	20.654	52.394	-1.606	54.000	AVERAGE
5	2484.700	31.743	21.612	53.355	-0.645	54.000	AVERAGE
6	2500.000	31.774	15.949	47.722	-6.278	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 15:35
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2452MHz

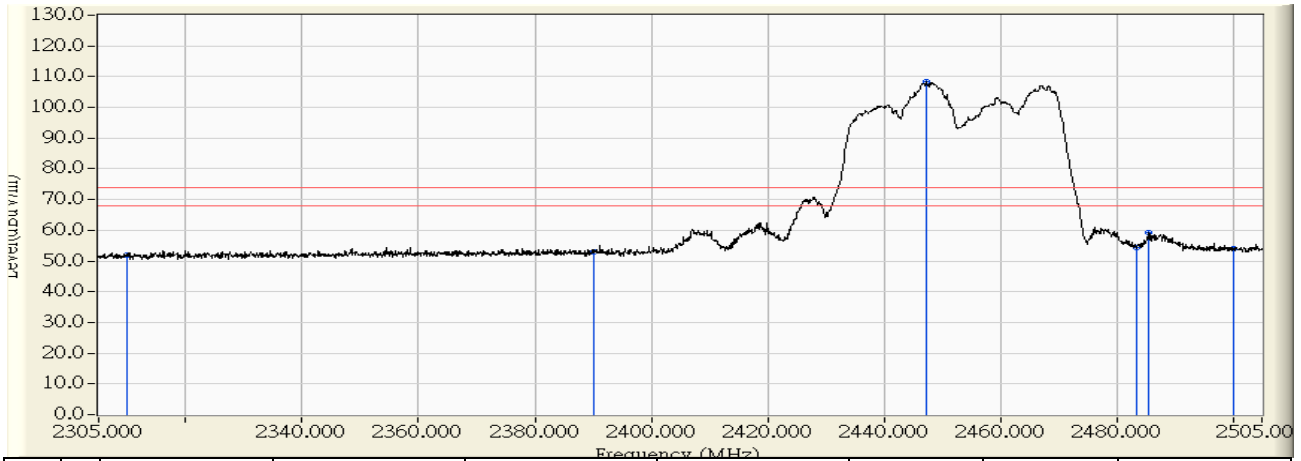


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	23.827	51.957	-22.043	74.000	PEAK
2	2390.000	28.933	23.974	52.907	-21.093	74.000	PEAK
3	* 2447.200	29.508	78.928	108.435	34.435	74.000	PEAK
4	2483.500	29.829	24.462	54.291	-19.709	74.000	PEAK
5	2485.600	29.830	29.444	59.274	-14.726	74.000	PEAK
6	2500.000	29.826	24.282	54.107	-19.893	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 15:36
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2452MHz

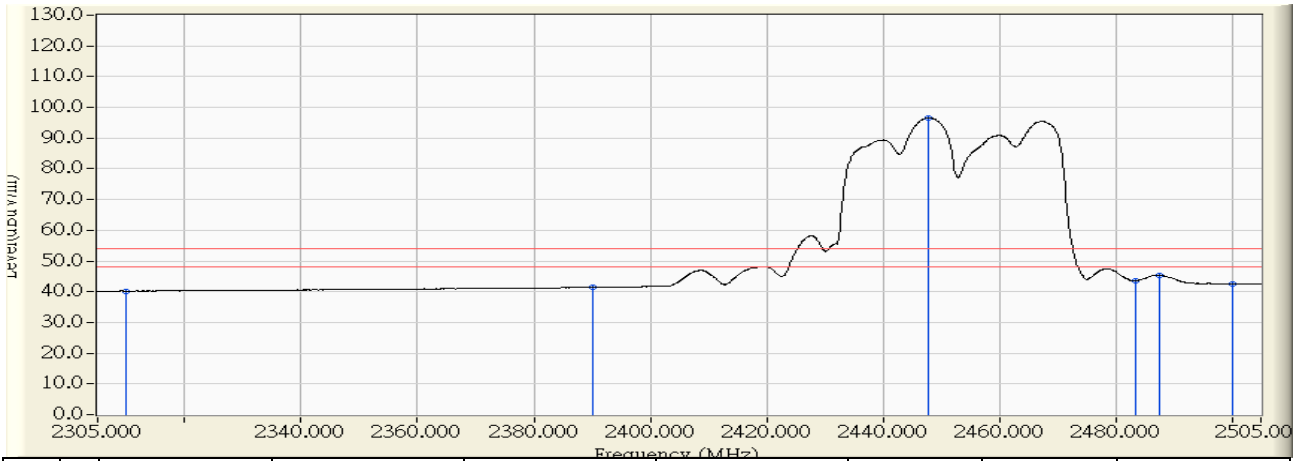


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	12.104	40.234	-13.766	54.000	AVERAGE
2	2390.000	28.933	12.494	41.427	-12.573	54.000	AVERAGE
3	* 2447.800	29.514	67.125	96.639	42.639	54.000	AVERAGE
4	2483.500	29.829	13.622	43.451	-10.549	54.000	AVERAGE
5	2487.500	29.831	15.568	45.399	-8.601	54.000	AVERAGE
6	2500.000	29.826	12.719	42.544	-11.456	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 19:29
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2452MHz

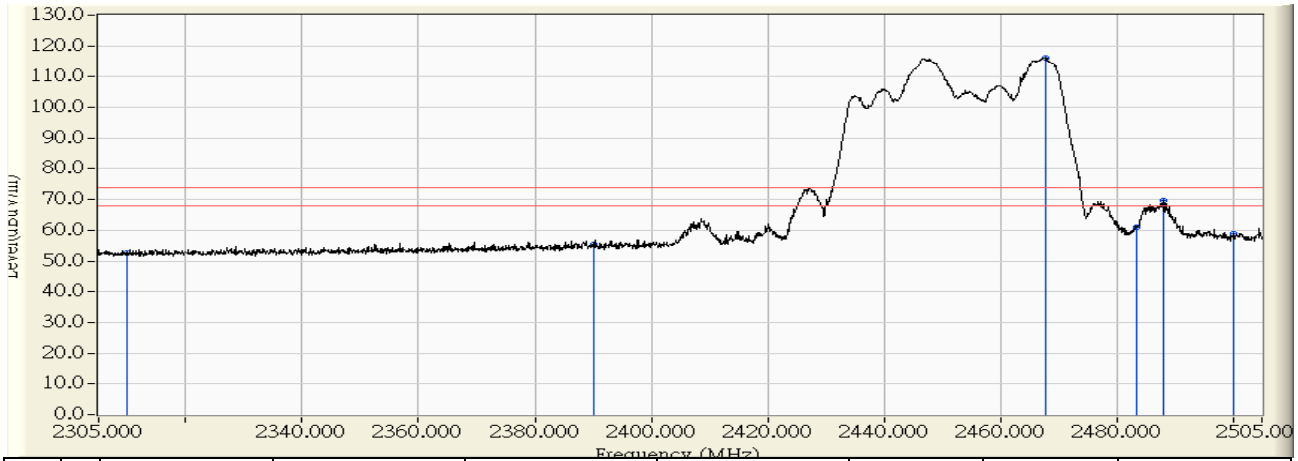


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	23.787	52.571	-21.429	74.000	PEAK
2	2390.000	29.747	25.547	55.294	-18.706	74.000	PEAK
3	* 2467.800	30.684	85.344	116.028	42.028	74.000	PEAK
4	2483.500	30.830	30.305	61.135	-12.865	74.000	PEAK
5	2488.000	30.841	38.779	69.620	-4.380	74.000	PEAK
6	2500.000	30.860	28.043	58.902	-15.098	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/11 - 19:29
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_2452MHz

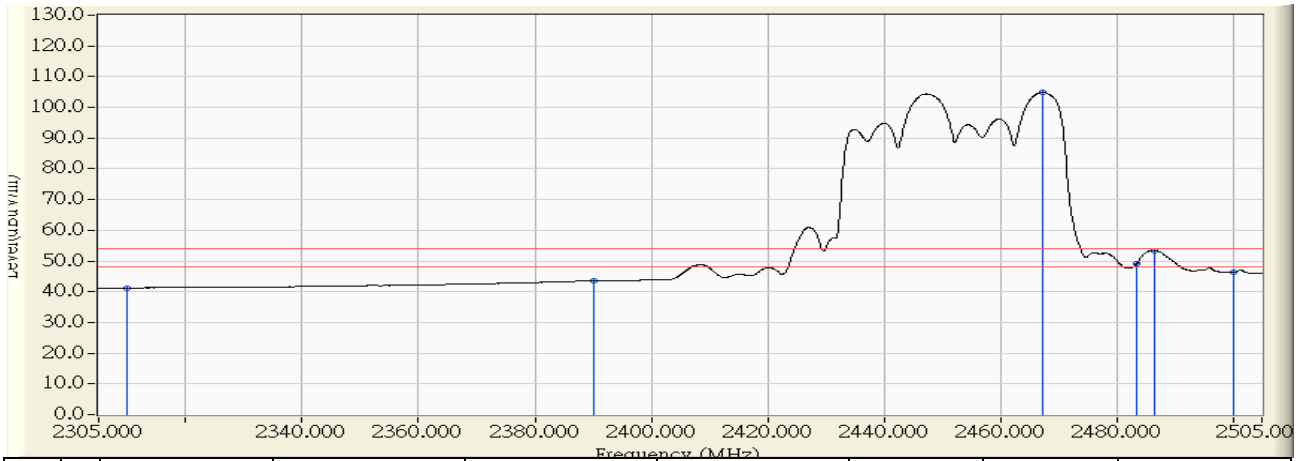


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	12.446	41.230	-12.770	54.000	AVERAGE
2	2390.000	29.747	13.750	43.497	-10.503	54.000	AVERAGE
3	* 2467.300	30.678	74.226	104.904	50.904	54.000	AVERAGE
4	2483.500	30.830	18.315	49.145	-4.855	54.000	AVERAGE
5	2486.500	30.838	22.516	53.354	-0.646	54.000	AVERAGE
6	2500.000	30.860	15.518	46.377	-7.623	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 20:44
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11a_5745MHz

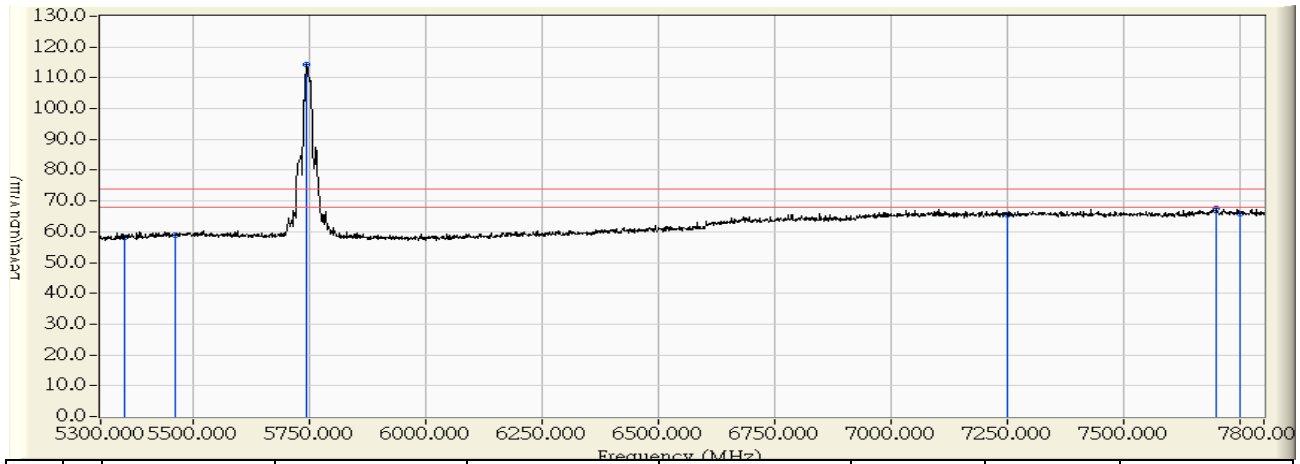


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	57.382	58.316	-15.684	74.000	PEAK
2	5460.000	1.853	56.978	58.831	-15.169	74.000	PEAK
3	* 5743.750	1.418	112.758	114.176	40.176	74.000	PEAK
4	7250.000	5.954	59.738	65.691	-8.309	74.000	PEAK
5	7697.500	6.751	61.031	67.782	-6.218	74.000	PEAK
6	7750.000	6.833	58.872	65.706	-8.294	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 20:46
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11a_5745MHz

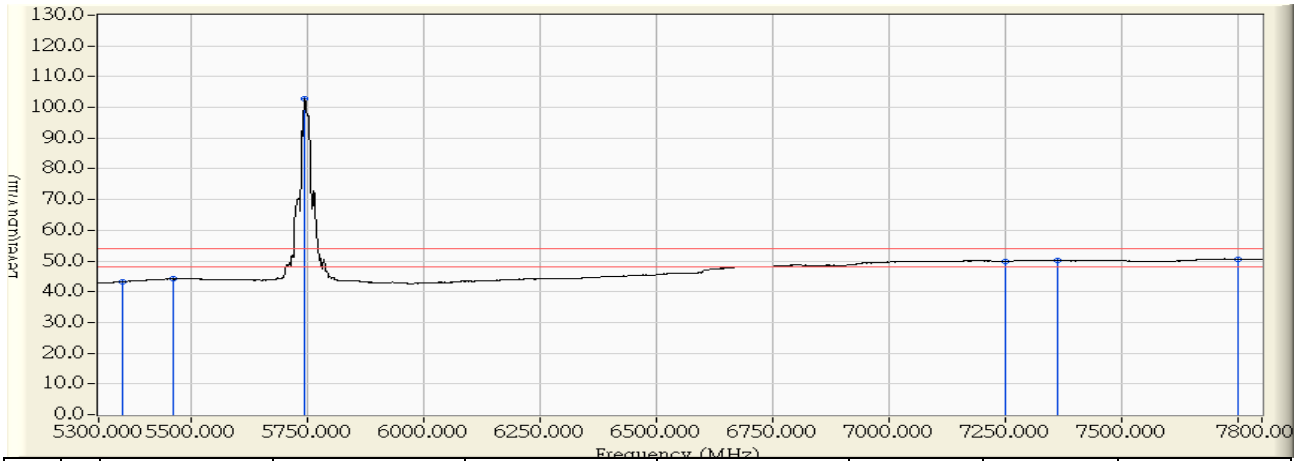


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	42.277	43.211	-10.789	54.000	AVERAGE
2	5460.000	1.853	42.271	44.124	-9.876	54.000	AVERAGE
3	* 5743.750	1.418	101.396	102.814	48.814	54.000	AVERAGE
4	7250.000	5.954	43.896	49.849	-4.151	54.000	AVERAGE
5	7360.000	6.170	43.958	50.128	-3.872	54.000	AVERAGE
6	7750.000	6.833	43.765	50.599	-3.401	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 20:52
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11a_5745MHz

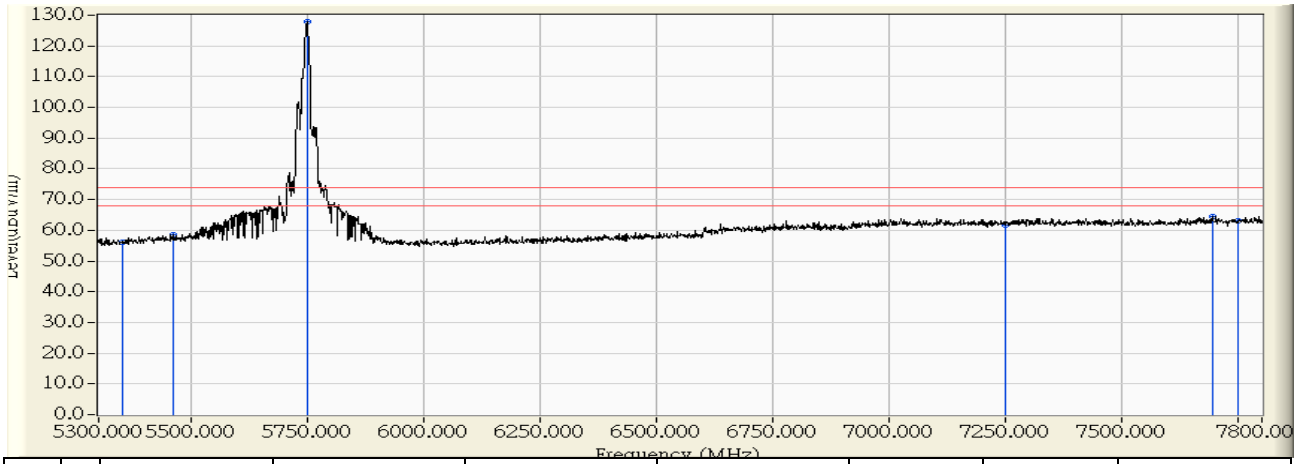


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	54.940	56.190	-17.810	74.000	PEAK
2	5460.000	2.114	56.297	58.411	-15.589	74.000	PEAK
3	* 5747.500	1.527	126.354	127.881	53.881	74.000	PEAK
4	7250.000	5.454	56.320	61.773	-12.227	74.000	PEAK
5	7693.750	6.245	58.295	64.540	-9.460	74.000	PEAK
6	7750.000	6.333	56.642	62.976	-11.024	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 20:54
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11a_5745MHz

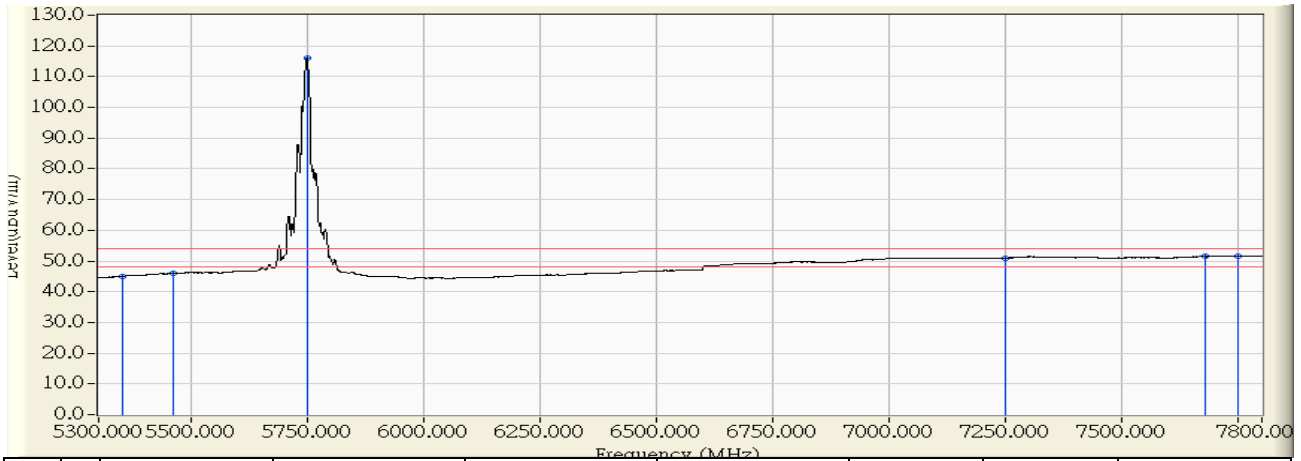


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.783	45.033	-8.967	54.000	AVERAGE
2	5460.000	2.114	43.769	45.883	-8.117	54.000	AVERAGE
3	* 5747.500	1.527	114.672	116.199	62.199	54.000	AVERAGE
4	7250.000	5.454	45.511	50.964	-3.036	54.000	AVERAGE
5	7677.500	6.219	45.312	51.531	-2.469	54.000	AVERAGE
6	7750.000	6.333	45.212	51.546	-2.454	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:00
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11a_5785MHz

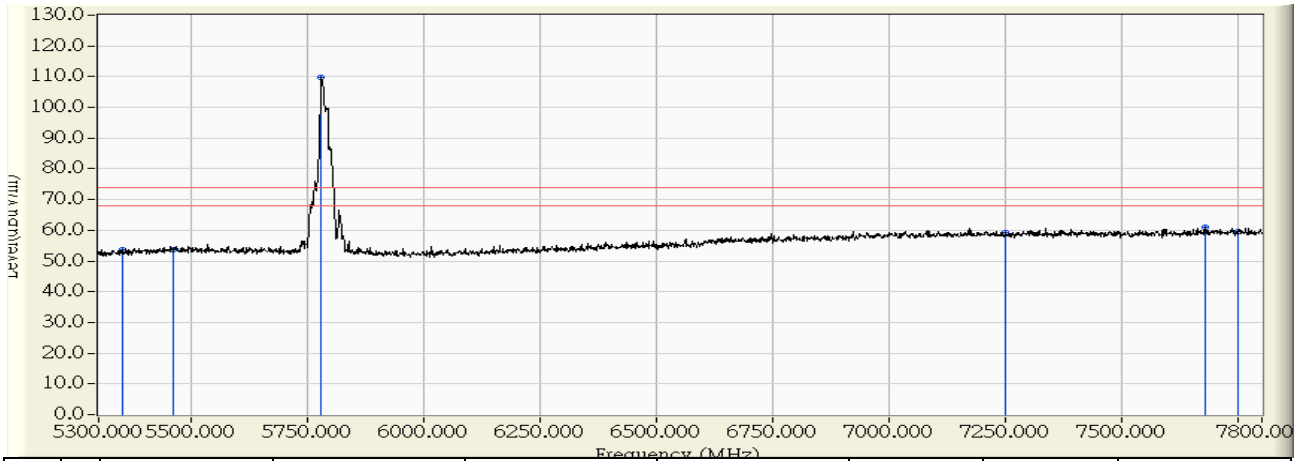


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	52.588	53.522	-20.478	74.000	PEAK
2	5460.000	1.853	51.754	53.607	-20.393	74.000	PEAK
3	* 5778.750	1.334	108.428	109.762	35.762	74.000	PEAK
4	7250.000	5.954	53.173	59.126	-14.874	74.000	PEAK
5	7678.750	6.721	54.427	61.148	-12.852	74.000	PEAK
6	7750.000	6.833	52.758	59.592	-14.408	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:02
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11a_5785MHz

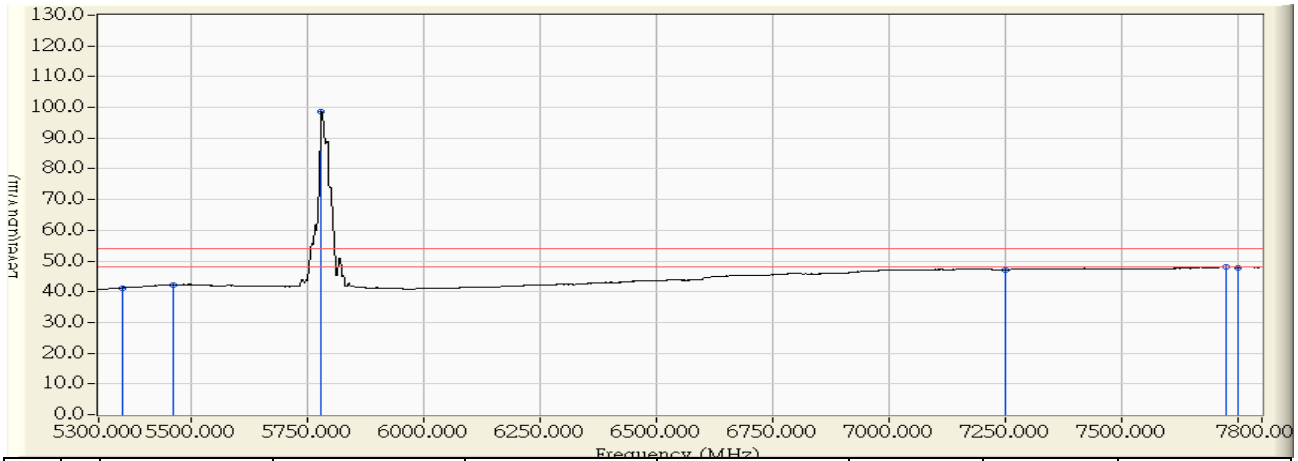


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	40.339	41.273	-12.727	54.000	AVERAGE
2	5460.000	1.853	40.318	42.171	-11.829	54.000	AVERAGE
3	* 5778.750	1.334	97.421	98.755	44.755	54.000	AVERAGE
4	7250.000	5.954	41.187	47.140	-6.860	54.000	AVERAGE
5	7722.500	6.790	41.263	48.053	-5.947	54.000	AVERAGE
6	7750.000	6.833	41.070	47.904	-6.096	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:07
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11a_5785MHz

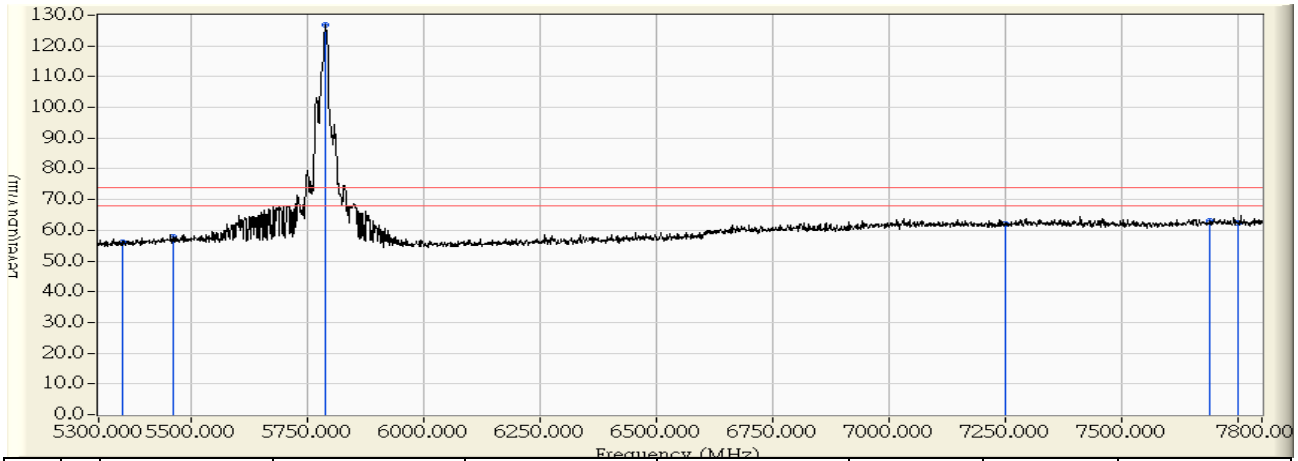


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	54.879	56.129	-17.871	74.000	PEAK
2	5460.000	2.114	55.698	57.812	-16.188	74.000	PEAK
3	* 5787.500	1.410	125.497	126.908	52.908	74.000	PEAK
4	7250.000	5.454	56.736	62.189	-11.811	74.000	PEAK
5	7688.750	6.237	56.901	63.138	-10.862	74.000	PEAK
6	7750.000	6.333	56.200	62.534	-11.466	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:10
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11a_5785MHz

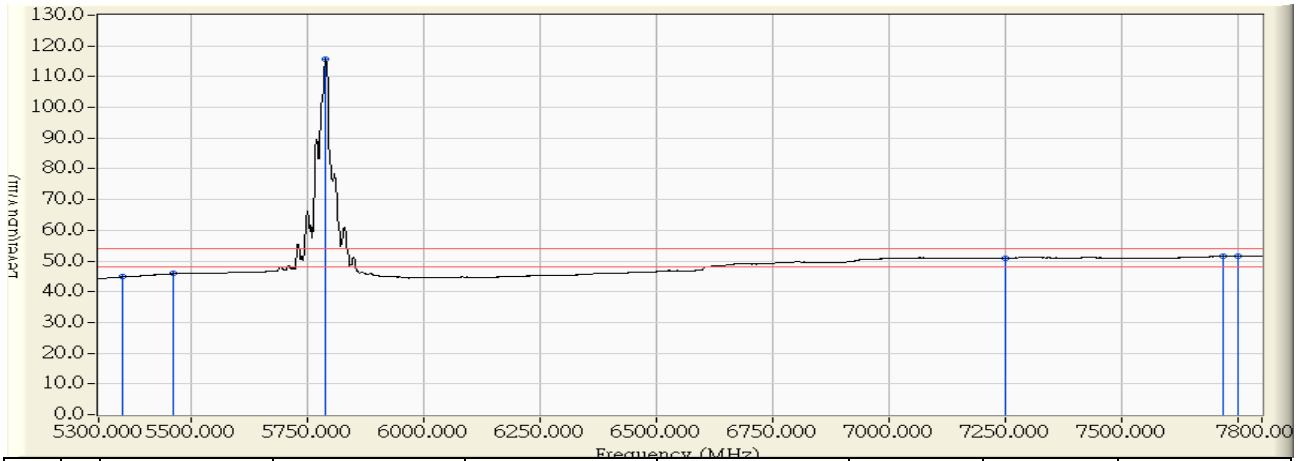


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.592	44.842	-9.158	54.000	AVERAGE
2	5460.000	2.114	43.735	45.849	-8.151	54.000	AVERAGE
3	* 5788.750	1.407	114.180	115.587	61.587	54.000	AVERAGE
4	7250.000	5.454	45.466	50.919	-3.081	54.000	AVERAGE
5	7716.250	6.281	45.276	51.557	-2.443	54.000	AVERAGE
6	7750.000	6.333	45.084	51.418	-2.582	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:15
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11a_5825MHz

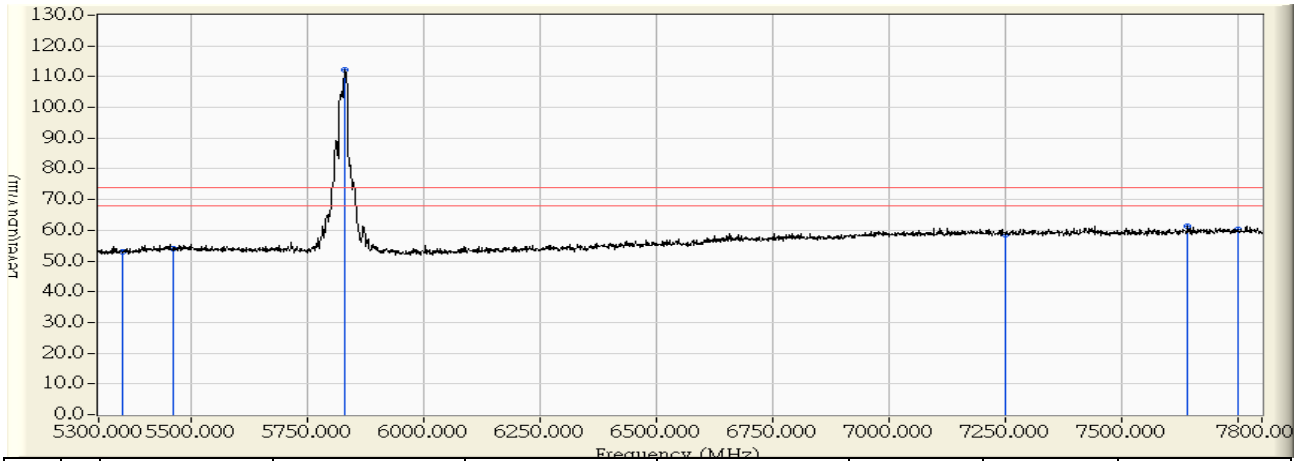


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	52.109	53.043	-20.957	74.000	PEAK
2	5460.000	1.853	52.113	53.966	-20.034	74.000	PEAK
3	* 5830.000	1.211	111.159	112.370	38.370	74.000	PEAK
4	7250.000	5.954	52.498	58.451	-15.549	74.000	PEAK
5	7641.250	6.662	54.577	61.239	-12.761	74.000	PEAK
6	7750.000	6.833	53.578	60.412	-13.588	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:18
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11a_5825MHz

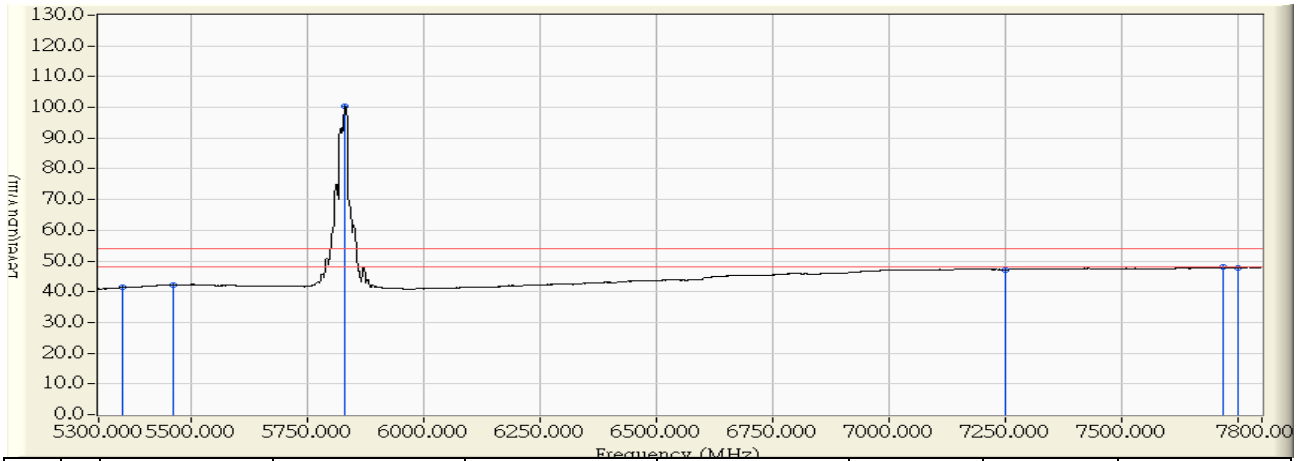


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	40.388	41.322	-12.678	54.000	AVERAGE
2	5460.000	1.853	40.316	42.169	-11.831	54.000	AVERAGE
3	* 5830.000	1.211	99.000	100.211	46.211	54.000	AVERAGE
4	7250.000	5.954	41.223	47.176	-6.824	54.000	AVERAGE
5	7716.250	6.781	41.176	47.957	-6.043	54.000	AVERAGE
6	7750.000	6.833	40.999	47.833	-6.167	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:22
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11a_5825MHz

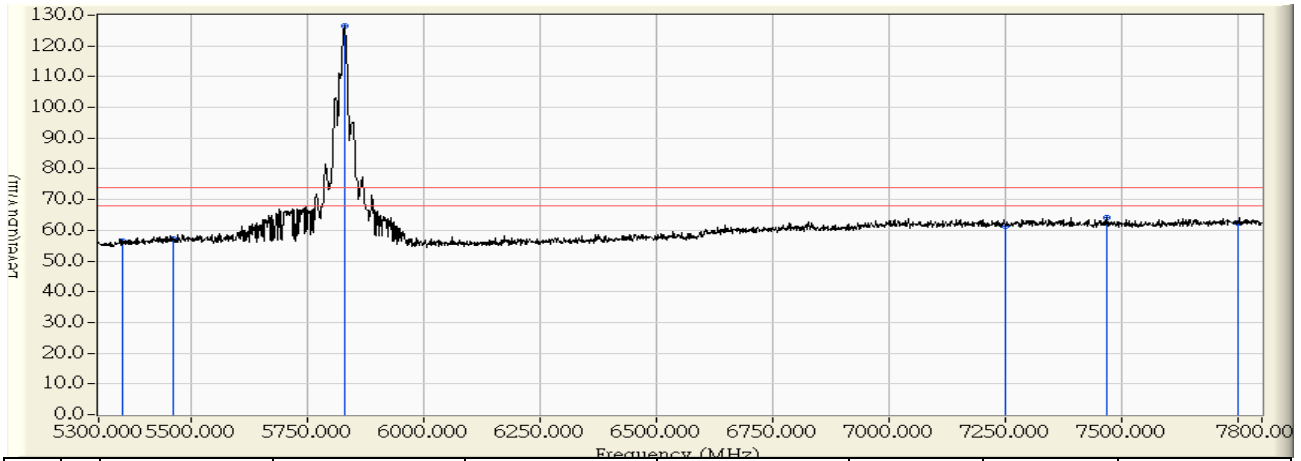


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	55.360	56.610	-17.390	74.000	PEAK
2	5460.000	2.114	55.200	57.314	-16.686	74.000	PEAK
3	* 5827.500	1.294	125.386	126.681	52.681	74.000	PEAK
4	7250.000	5.454	55.731	61.184	-12.816	74.000	PEAK
5	7467.500	5.881	58.093	63.974	-10.026	74.000	PEAK
6	7750.000	6.333	56.113	62.447	-11.553	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:24
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11a_5825MHz

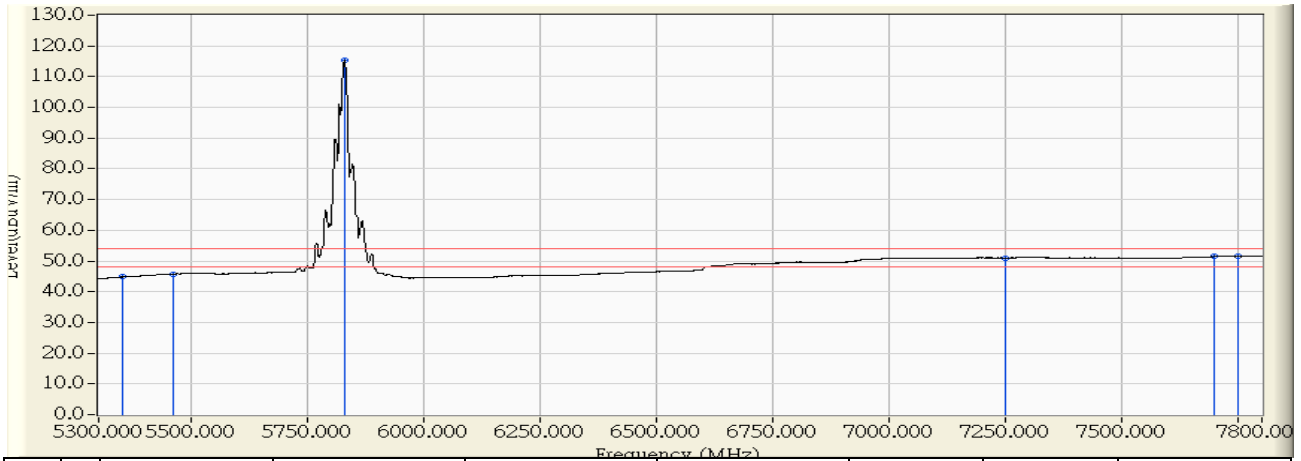


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.545	44.795	-9.205	54.000	AVERAGE
2	5460.000	2.114	43.573	45.687	-8.313	54.000	AVERAGE
3	* 5828.750	1.291	113.937	115.228	61.228	54.000	AVERAGE
4	7250.000	5.454	45.550	51.003	-2.997	54.000	AVERAGE
5	7696.250	6.249	45.168	51.417	-2.583	54.000	AVERAGE
6	7750.000	6.333	45.086	51.420	-2.580	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:28
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_5745MHz

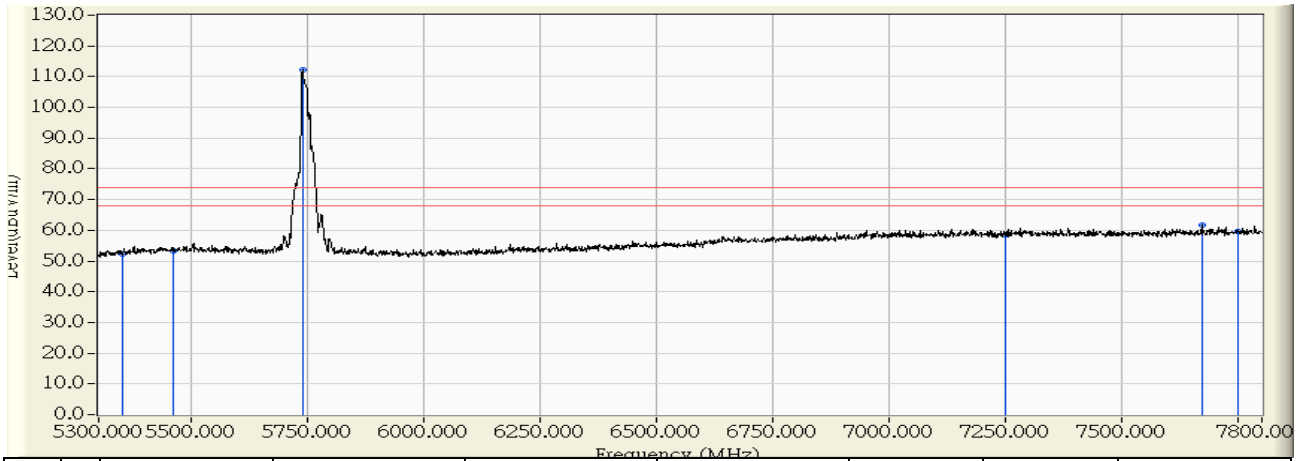


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	51.325	52.259	-21.741	74.000	PEAK
2	5460.000	1.853	51.559	53.412	-20.588	74.000	PEAK
3	* 5738.750	1.430	110.782	112.212	38.212	74.000	PEAK
4	7250.000	5.954	52.499	58.452	-15.548	74.000	PEAK
5	7671.250	6.710	54.915	61.624	-12.376	74.000	PEAK
6	7750.000	6.833	52.623	59.457	-14.543	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:30
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_5745MHz

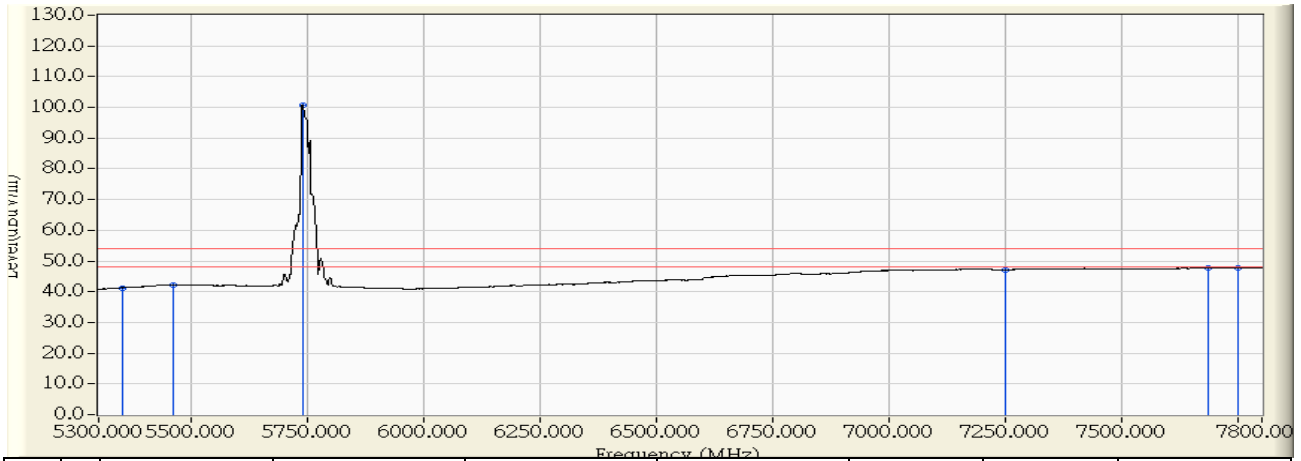


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	40.347	41.281	-12.719	54.000	AVERAGE
2	5460.000	1.853	40.274	42.127	-11.873	54.000	AVERAGE
3	* 5738.750	1.430	99.331	100.761	46.761	54.000	AVERAGE
4	7250.000	5.954	41.132	47.085	-6.915	54.000	AVERAGE
5	7683.750	6.729	40.917	47.646	-6.354	54.000	AVERAGE
6	7750.000	6.833	41.031	47.865	-6.135	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:35
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_5745MHz

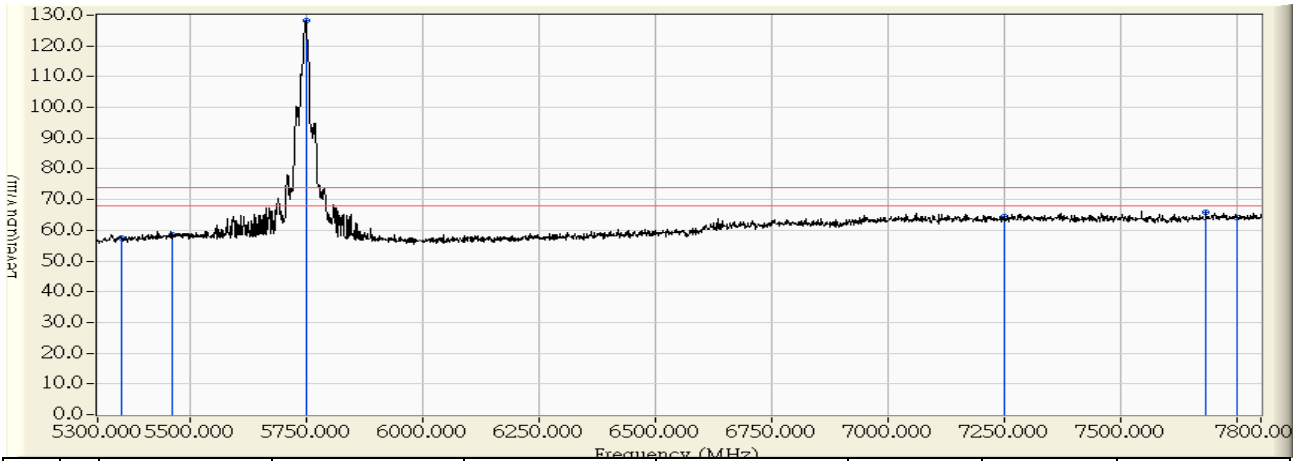


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	56.247	57.497	-16.503	74.000	PEAK
2	5460.000	2.114	56.519	58.633	-15.367	74.000	PEAK
3	* 5747.500	1.527	126.759	128.286	54.286	74.000	PEAK
4	7250.000	5.454	59.044	64.497	-9.503	74.000	PEAK
5	7682.500	6.227	59.574	65.801	-8.199	74.000	PEAK
6	7750.000	6.333	57.669	64.003	-9.997	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:37
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_5745MHz

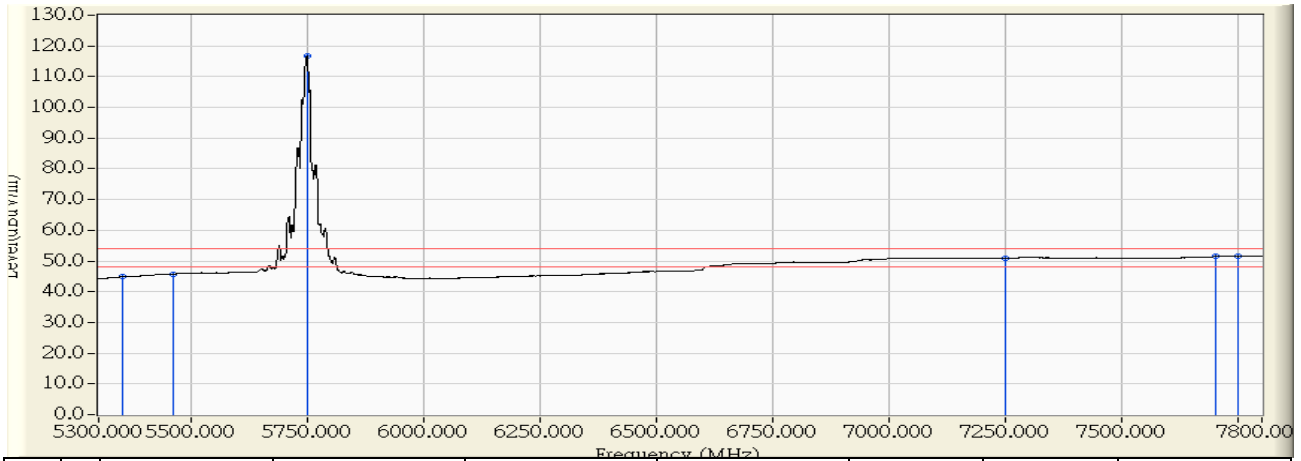


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.553	44.803	-9.197	54.000	AVERAGE
2	5460.000	2.114	43.629	45.743	-8.257	54.000	AVERAGE
3	* 5747.500	1.527	115.135	116.662	62.662	54.000	AVERAGE
4	7250.000	5.454	45.400	50.853	-3.147	54.000	AVERAGE
5	7700.000	6.254	45.192	51.447	-2.553	54.000	AVERAGE
6	7750.000	6.333	45.109	51.443	-2.557	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:42
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_5785MHz

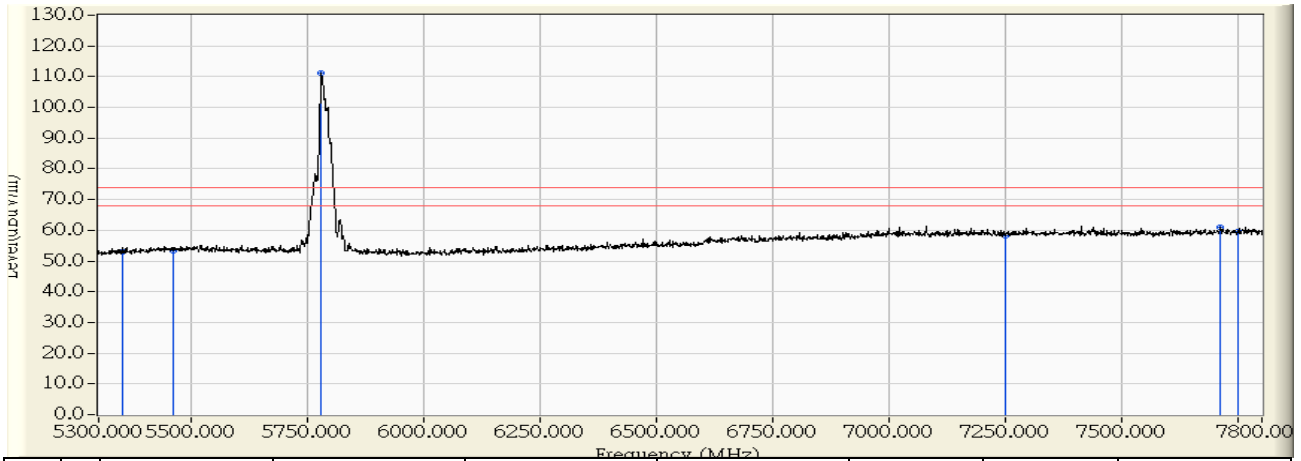


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	51.996	52.930	-21.070	74.000	PEAK
2	5460.000	1.853	51.540	53.393	-20.607	74.000	PEAK
3	* 5778.750	1.334	109.876	111.210	37.210	74.000	PEAK
4	7250.000	5.954	52.313	58.266	-15.734	74.000	PEAK
5	7710.000	6.770	54.258	61.029	-12.971	74.000	PEAK
6	7750.000	6.833	52.887	59.721	-14.279	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:43
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_5785MHz

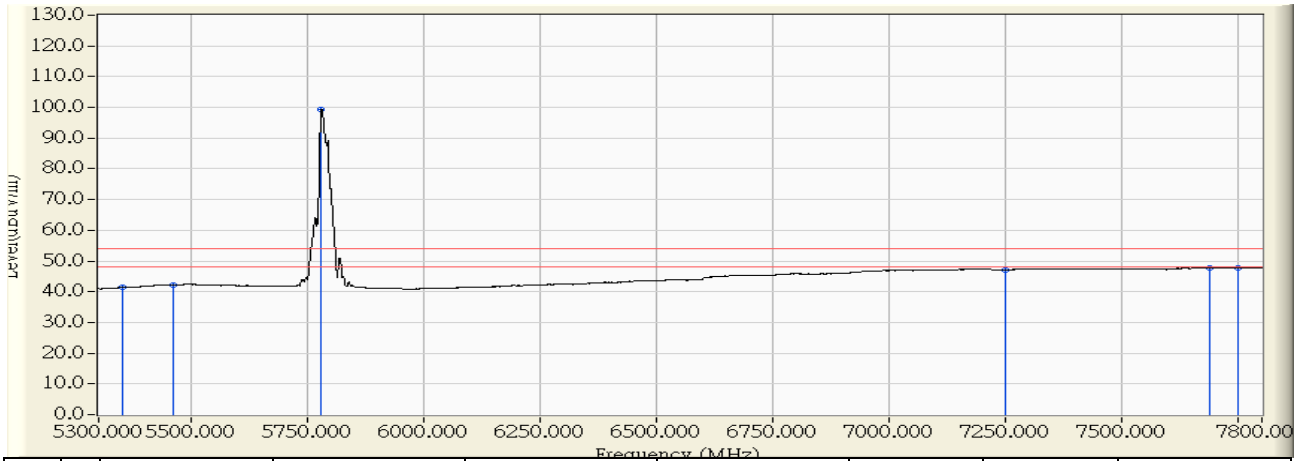


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	40.459	41.393	-12.607	54.000	AVERAGE
2	5460.000	1.853	40.362	42.215	-11.785	54.000	AVERAGE
3	* 5778.750	1.334	98.091	99.425	45.425	54.000	AVERAGE
4	7250.000	5.954	41.142	47.095	-6.905	54.000	AVERAGE
5	7686.250	6.733	40.904	47.637	-6.363	54.000	AVERAGE
6	7750.000	6.833	41.007	47.841	-6.159	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:47
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_5785MHz

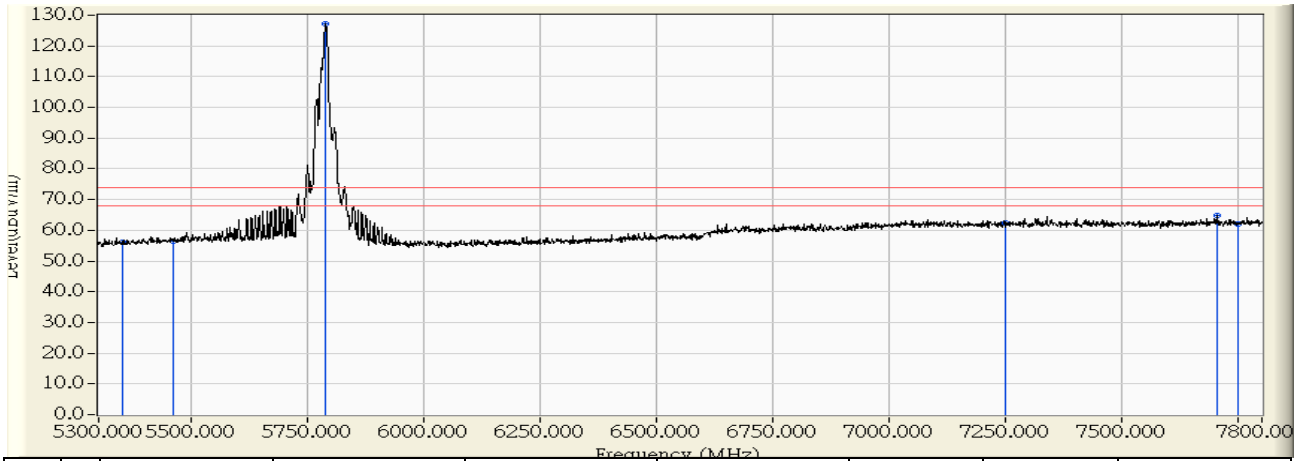


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	54.823	56.073	-17.927	74.000	PEAK
2	5460.000	2.114	54.303	56.417	-17.583	74.000	PEAK
3	* 5788.750	1.407	125.870	127.277	53.277	74.000	PEAK
4	7250.000	5.454	56.880	62.333	-11.667	74.000	PEAK
5	7705.000	6.262	58.531	64.794	-9.206	74.000	PEAK
6	7750.000	6.333	55.697	62.031	-11.969	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:50
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_5785MHz

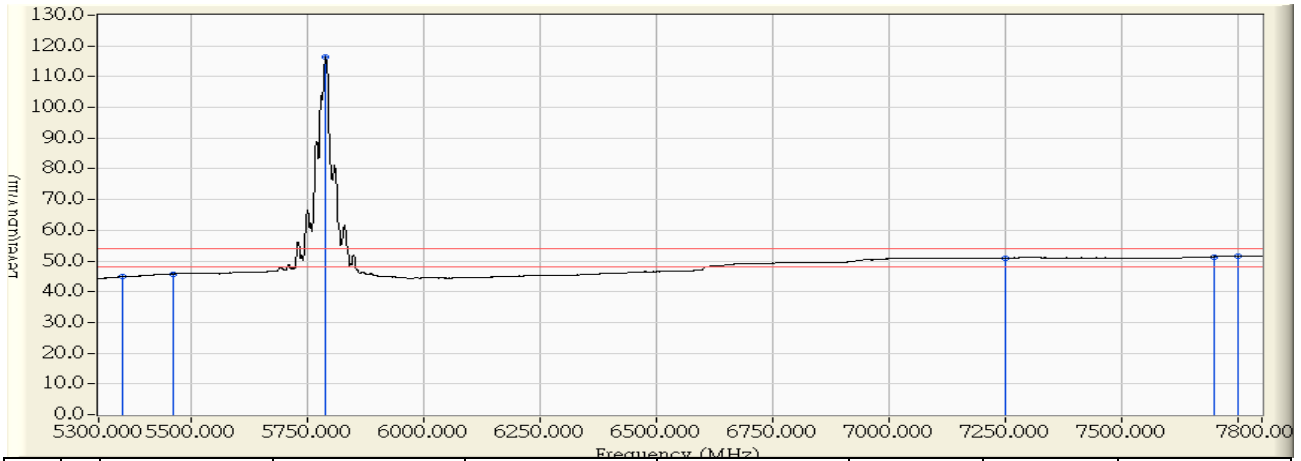


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.610	44.860	-9.140	54.000	AVERAGE
2	5460.000	2.114	43.663	45.777	-8.223	54.000	AVERAGE
3	* 5788.750	1.407	114.983	116.390	62.390	54.000	AVERAGE
4	7250.000	5.454	45.459	50.912	-3.088	54.000	AVERAGE
5	7696.250	6.249	45.146	51.395	-2.605	54.000	AVERAGE
6	7750.000	6.333	45.113	51.447	-2.553	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 21:53
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_5825MHz

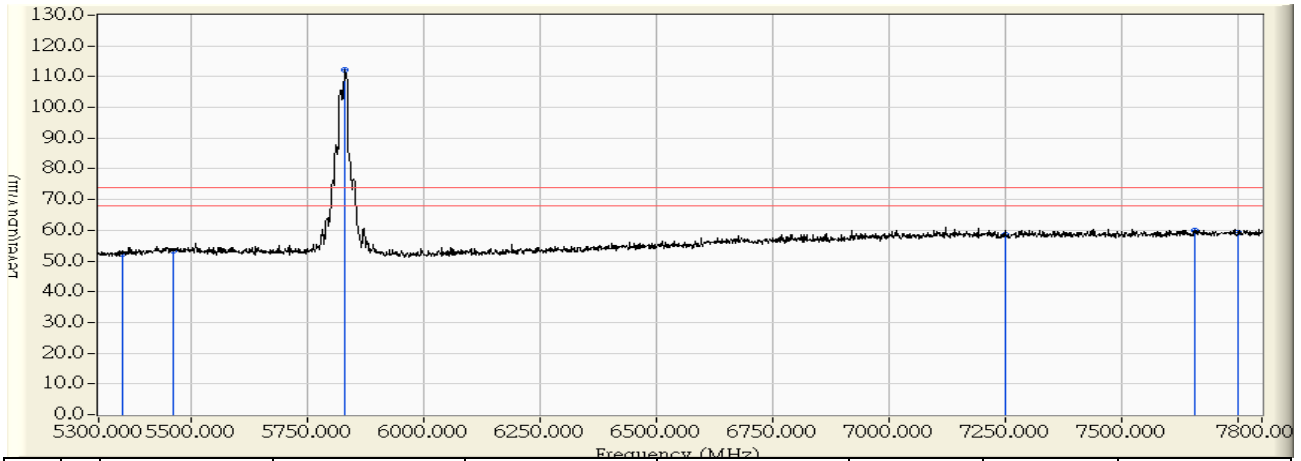


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	51.445	52.379	-21.621	74.000	PEAK
2	5460.000	1.853	51.472	53.325	-20.675	74.000	PEAK
3	* 5830.000	1.211	111.085	112.296	38.296	74.000	PEAK
4	7250.000	5.954	52.628	58.581	-15.419	74.000	PEAK
5	7655.000	6.683	53.419	60.103	-13.897	74.000	PEAK
6	7750.000	6.833	52.380	59.214	-14.786	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 22:06
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_5825MHz

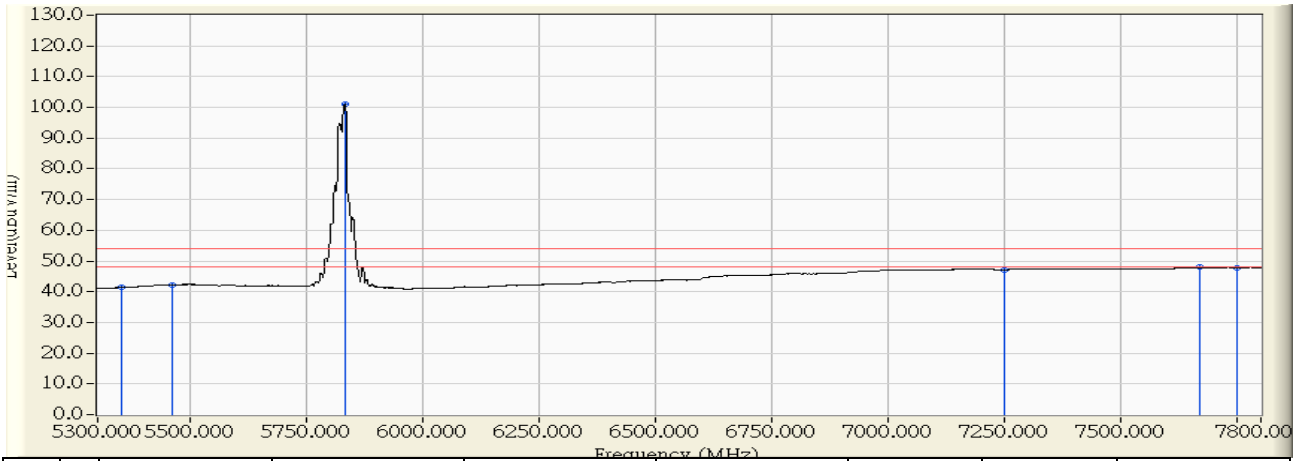


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	40.458	41.392	-12.608	54.000	AVERAGE
2	5460.000	1.853	40.356	42.209	-11.791	54.000	AVERAGE
3	* 5831.250	1.208	99.706	100.914	46.914	54.000	AVERAGE
4	7250.000	5.954	41.196	47.149	-6.851	54.000	AVERAGE
5	7668.750	6.706	41.235	47.940	-6.060	54.000	AVERAGE
6	7750.000	6.833	41.042	47.876	-6.124	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 22:07
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_5825MHz

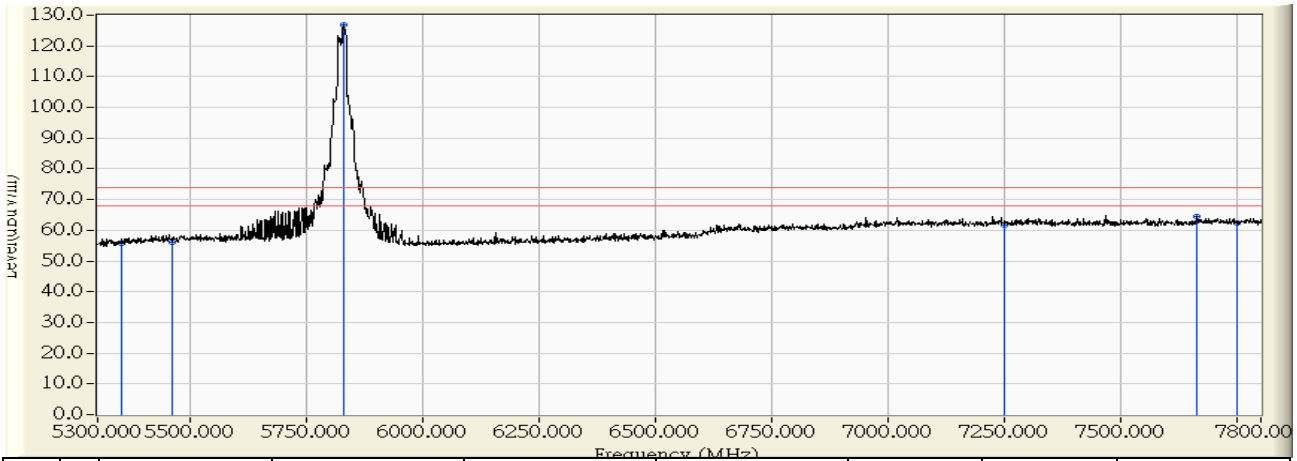


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	54.476	55.726	-18.274	74.000	PEAK
2	5460.000	2.114	53.931	56.045	-17.955	74.000	PEAK
3	* 5827.500	1.294	125.672	126.967	52.967	74.000	PEAK
4	7250.000	5.454	56.226	61.679	-12.321	74.000	PEAK
5	7663.750	6.198	58.132	64.330	-9.670	74.000	PEAK
6	7750.000	6.333	56.018	62.352	-11.648	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 22:09
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(20M)_5825MHz

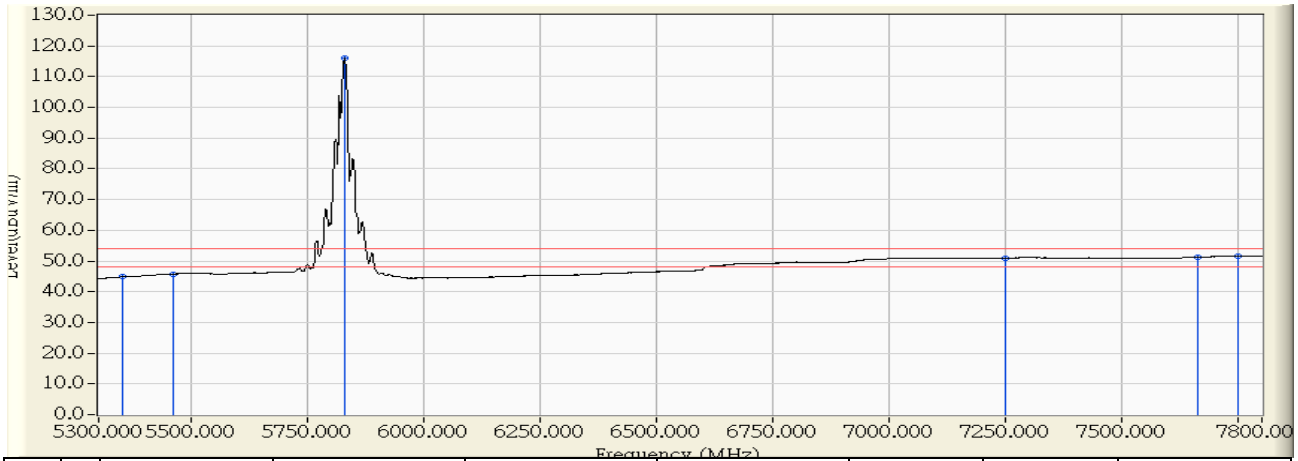


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.590	44.840	-9.160	54.000	AVERAGE
2	5460.000	2.114	43.648	45.762	-8.238	54.000	AVERAGE
3	* 5828.750	1.291	114.734	116.025	62.025	54.000	AVERAGE
4	7250.000	5.454	45.425	50.878	-3.122	54.000	AVERAGE
5	7661.250	6.194	45.083	51.277	-2.723	54.000	AVERAGE
6	7750.000	6.333	45.135	51.469	-2.531	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/10 - 09:30
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_5755MHz

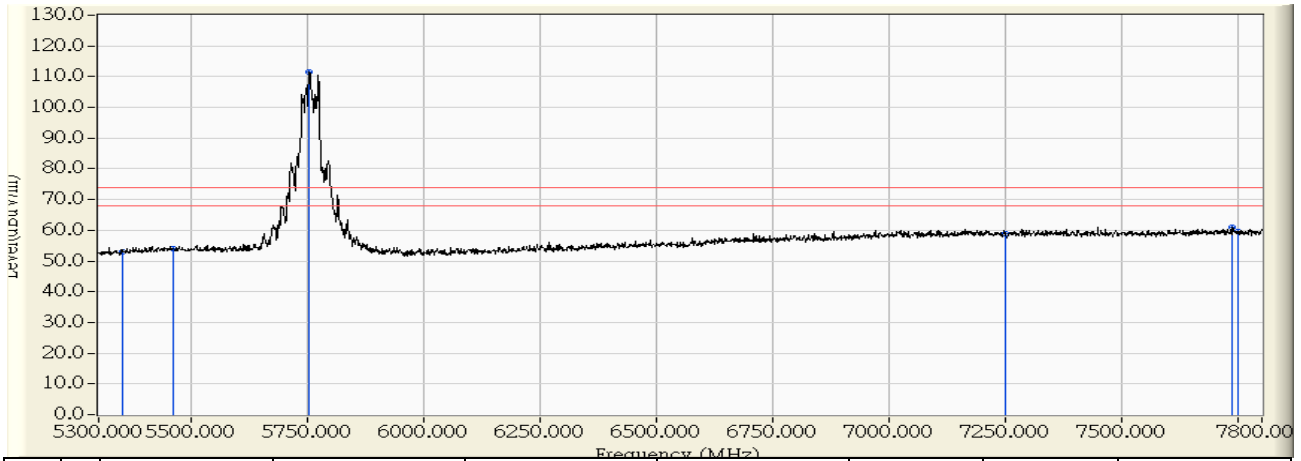


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	52.017	52.951	-21.049	74.000	PEAK
2	5460.000	1.853	52.273	54.126	-19.874	74.000	PEAK
3	* 5752.500	1.398	110.032	111.429	37.429	74.000	PEAK
4	7250.000	5.954	52.882	58.835	-15.165	74.000	PEAK
5	7736.250	6.812	54.148	60.960	-13.040	74.000	PEAK
6	7750.000	6.833	52.802	59.636	-14.364	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/10 - 09:31
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_5755MHz

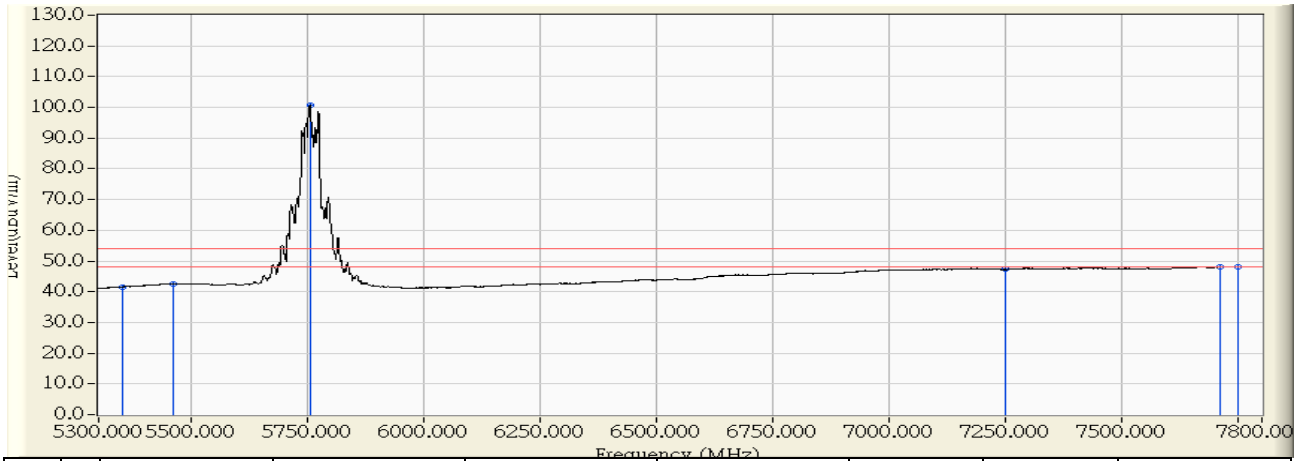


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	40.683	41.617	-12.383	54.000	AVERAGE
2	5460.000	1.853	40.596	42.449	-11.551	54.000	AVERAGE
3	* 5753.750	1.394	99.211	100.605	46.605	54.000	AVERAGE
4	7250.000	5.954	41.281	47.234	-6.766	54.000	AVERAGE
5	7708.750	6.769	41.225	47.994	-6.006	54.000	AVERAGE
6	7750.000	6.833	41.131	47.965	-6.035	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/10 - 09:35
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_5755MHz

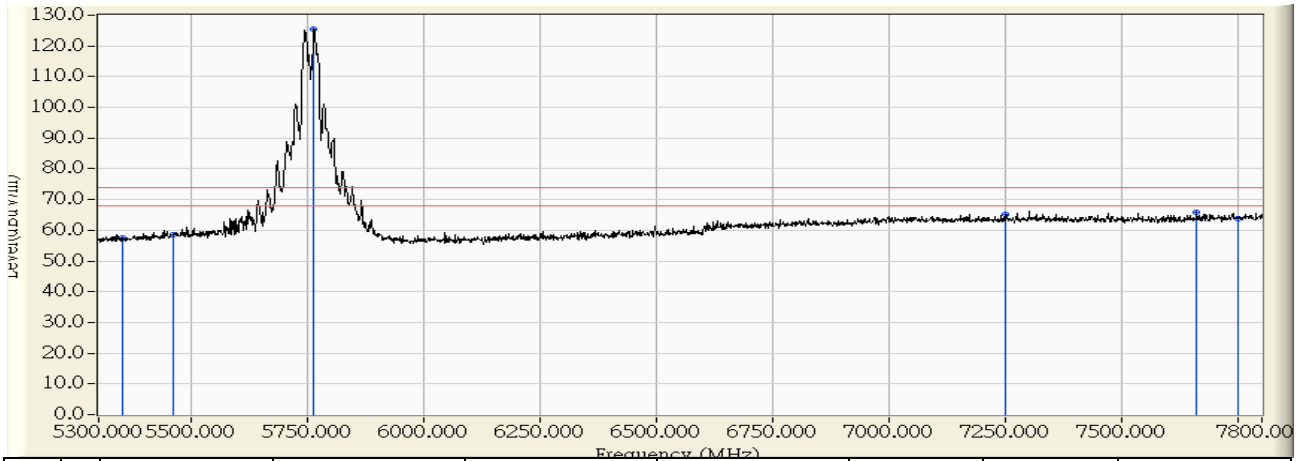


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	56.232	57.482	-16.518	74.000	PEAK
2	5460.000	2.114	56.290	58.404	-15.596	74.000	PEAK
3	* 5762.500	1.484	123.969	125.452	51.452	74.000	PEAK
4	7250.000	5.454	59.565	65.018	-8.982	74.000	PEAK
5	7660.000	6.191	59.837	66.029	-7.971	74.000	PEAK
6	7750.000	6.333	57.399	63.733	-10.267	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/10 - 09:37
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_5755MHz

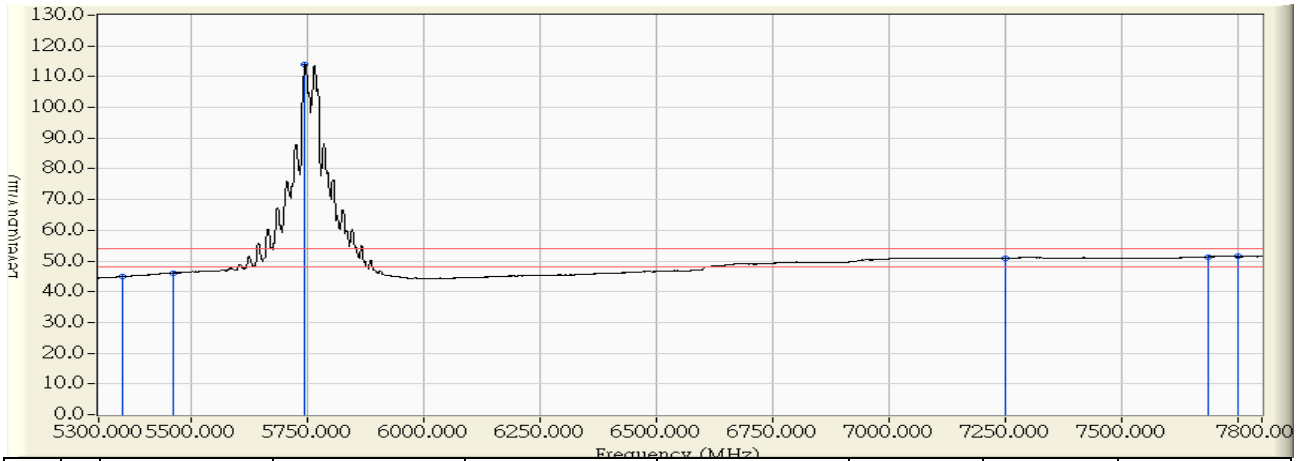


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.674	44.924	-9.076	54.000	AVERAGE
2	5460.000	2.114	43.933	46.047	-7.953	54.000	AVERAGE
3	* 5743.750	1.537	112.591	114.129	60.129	54.000	AVERAGE
4	7250.000	5.454	45.395	50.848	-3.152	54.000	AVERAGE
5	7683.750	6.229	45.107	51.336	-2.664	54.000	AVERAGE
6	7750.000	6.333	45.104	51.438	-2.562	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/10 - 09:45
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_5795MHz

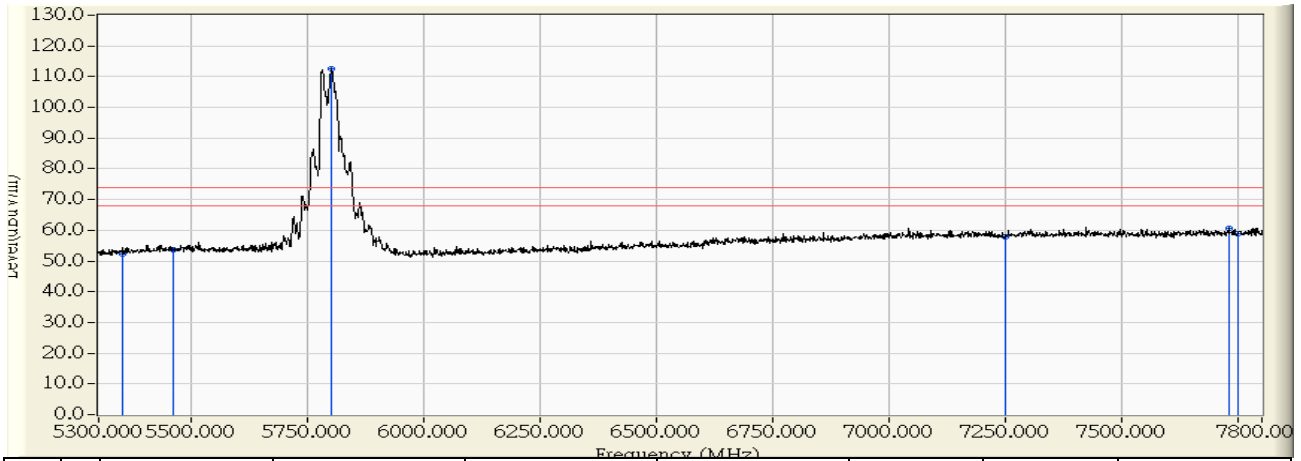


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	51.517	52.451	-21.549	74.000	PEAK
2	5460.000	1.853	51.855	53.708	-20.292	74.000	PEAK
3	* 5800.000	1.283	111.432	112.715	38.715	74.000	PEAK
4	7250.000	5.954	52.016	57.969	-16.031	74.000	PEAK
5	7728.750	6.800	53.933	60.733	-13.267	74.000	PEAK
6	7750.000	6.833	52.010	58.844	-15.156	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/10 - 09:46
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_5795MHz

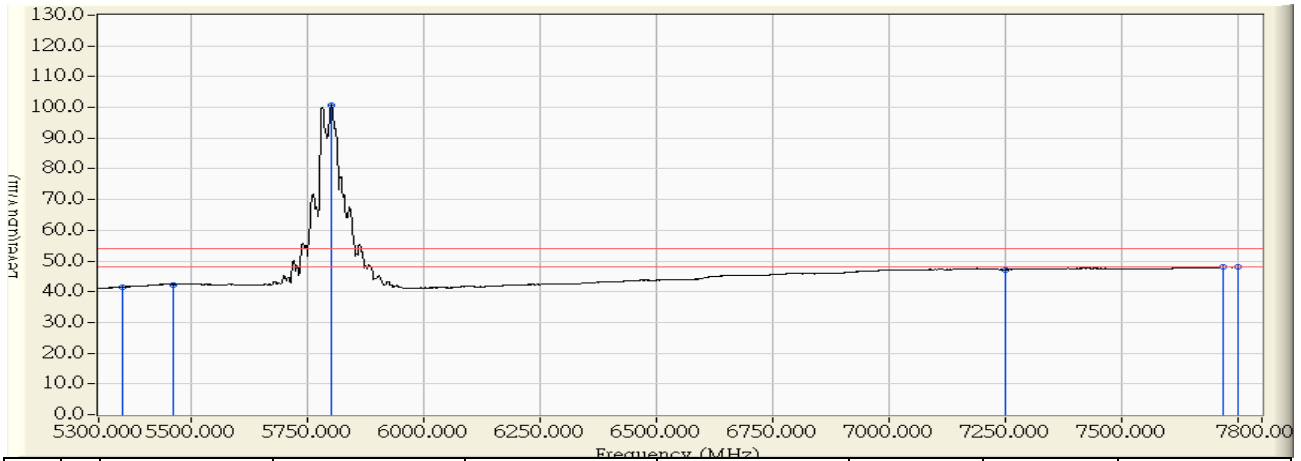


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	40.586	41.520	-12.480	54.000	AVERAGE
2	5460.000	1.853	40.492	42.345	-11.655	54.000	AVERAGE
3	* 5801.250	1.280	99.394	100.674	46.674	54.000	AVERAGE
4	7250.000	5.954	41.223	47.176	-6.824	54.000	AVERAGE
5	7716.250	6.781	41.261	48.042	-5.958	54.000	AVERAGE
6	7750.000	6.833	41.103	47.937	-6.063	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/10 - 09:54
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_5795MHz

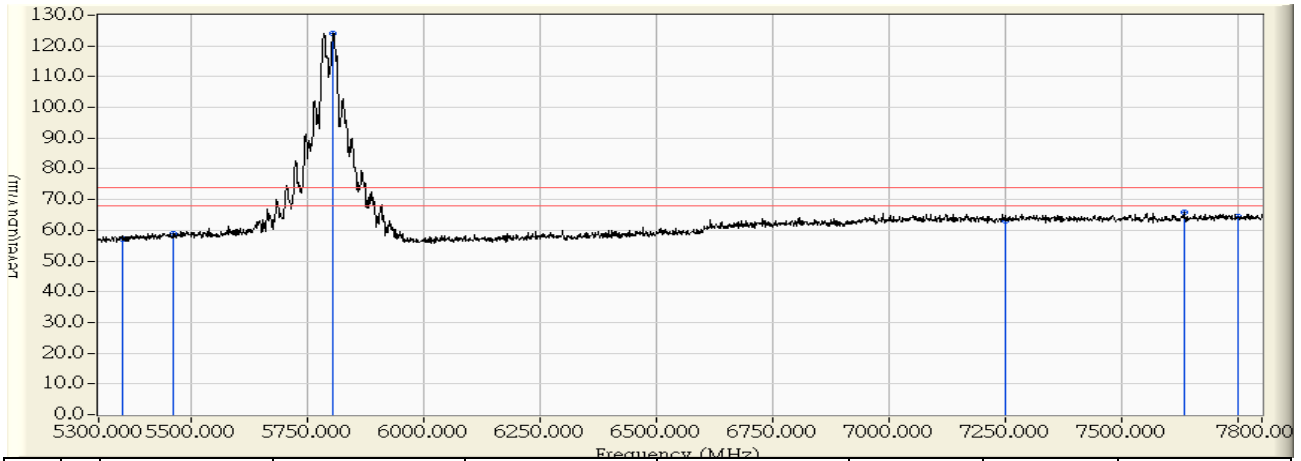


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	55.804	57.054	-16.946	74.000	PEAK
2	5460.000	2.114	56.714	58.828	-15.172	74.000	PEAK
3	* 5803.750	1.363	122.884	124.248	50.248	74.000	PEAK
4	7250.000	5.454	57.645	63.098	-10.902	74.000	PEAK
5	7633.750	6.150	59.811	65.961	-8.039	74.000	PEAK
6	7750.000	6.333	58.175	64.509	-9.491	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/10 - 09:58
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11n(40M)_5795MHz

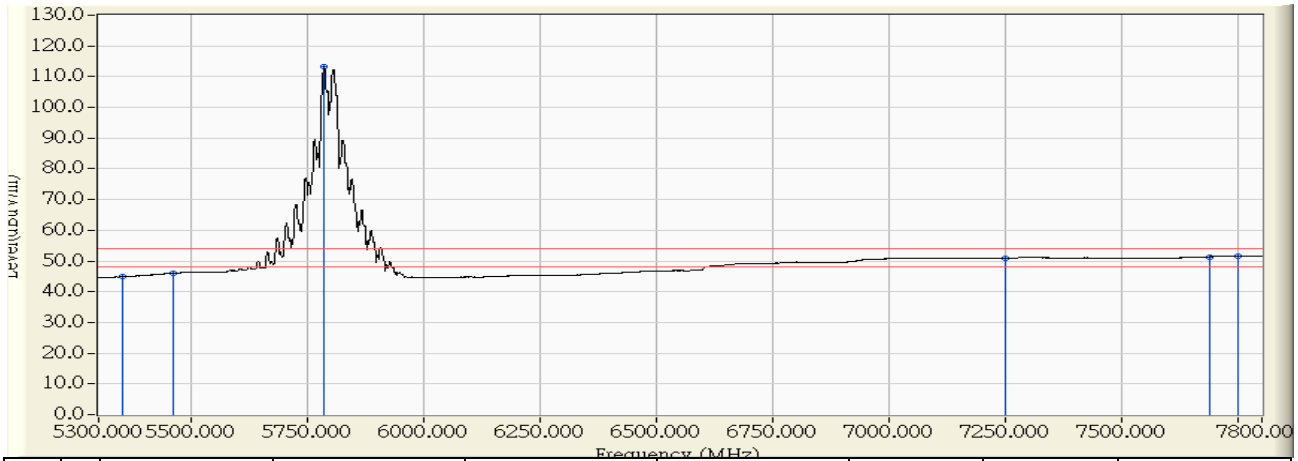


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.608	44.858	-9.142	54.000	AVERAGE
2	5460.000	2.114	43.893	46.007	-7.993	54.000	AVERAGE
3	* 5783.750	1.421	111.729	113.151	59.151	54.000	AVERAGE
4	7250.000	5.454	45.370	50.823	-3.177	54.000	AVERAGE
5	7686.250	6.233	45.154	51.387	-2.613	54.000	AVERAGE
6	7750.000	6.333	45.129	51.463	-2.537	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/10 - 10:04
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11ac(80M)_5775MHz

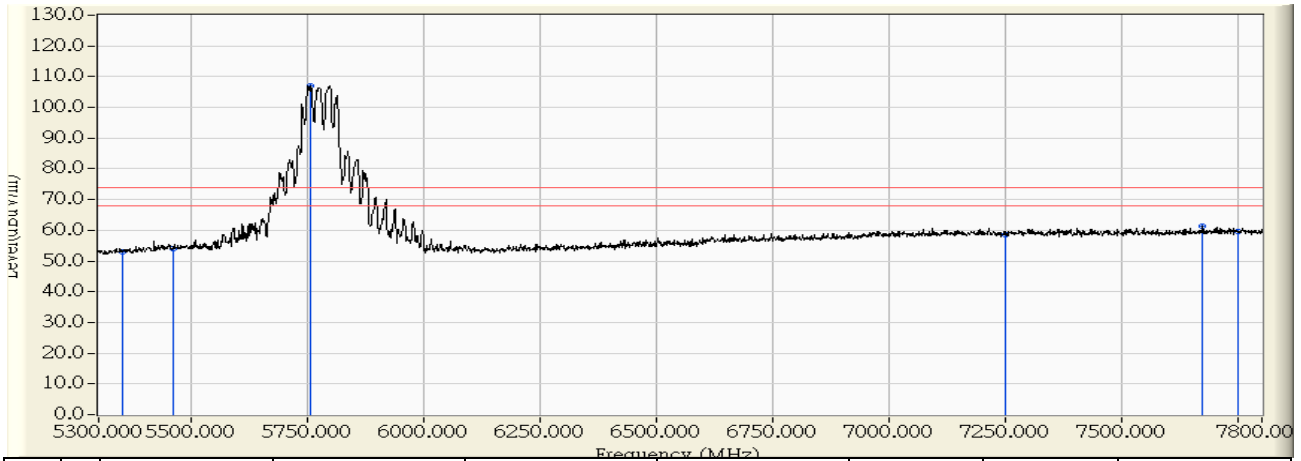


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	52.198	53.132	-20.868	74.000	PEAK
2	5460.000	1.853	52.255	54.108	-19.892	74.000	PEAK
3	* 5755.000	1.391	105.765	107.156	33.156	74.000	PEAK
4	7250.000	5.954	52.570	58.523	-15.477	74.000	PEAK
5	7672.500	6.711	54.688	61.399	-12.601	74.000	PEAK
6	7750.000	6.833	52.756	59.590	-14.410	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/10 - 10:06
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11ac(80M)_5775MHz

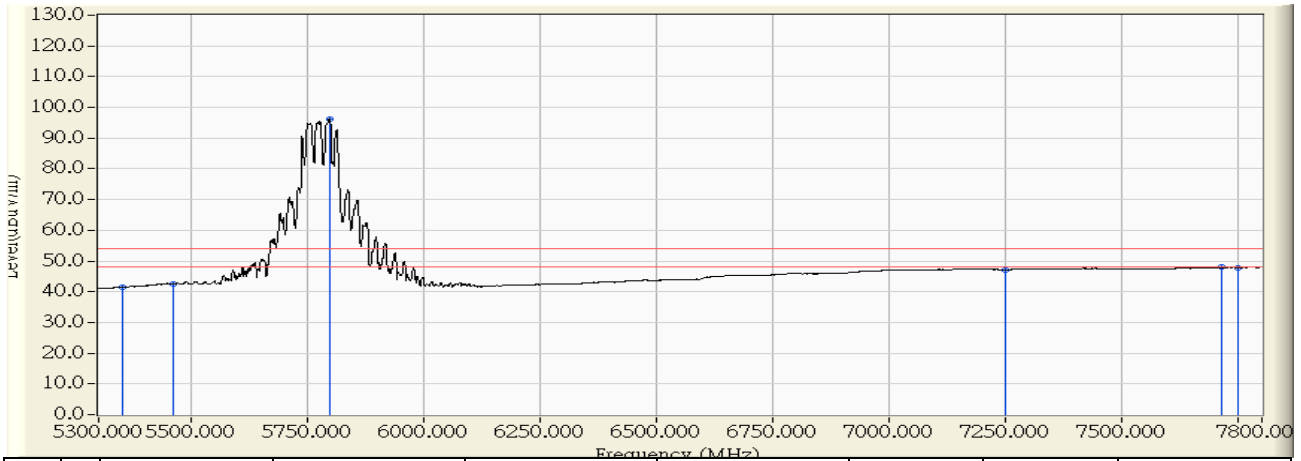


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	40.619	41.553	-12.447	54.000	AVERAGE
2	5460.000	1.853	40.568	42.421	-11.579	54.000	AVERAGE
3	* 5796.250	1.292	95.009	96.301	42.301	54.000	AVERAGE
4	7250.000	5.954	41.200	47.153	-6.847	54.000	AVERAGE
5	7713.750	6.777	41.193	47.970	-6.030	54.000	AVERAGE
6	7750.000	6.833	41.044	47.878	-6.122	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/10 - 10:12
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11ac(80M)_5775MHz

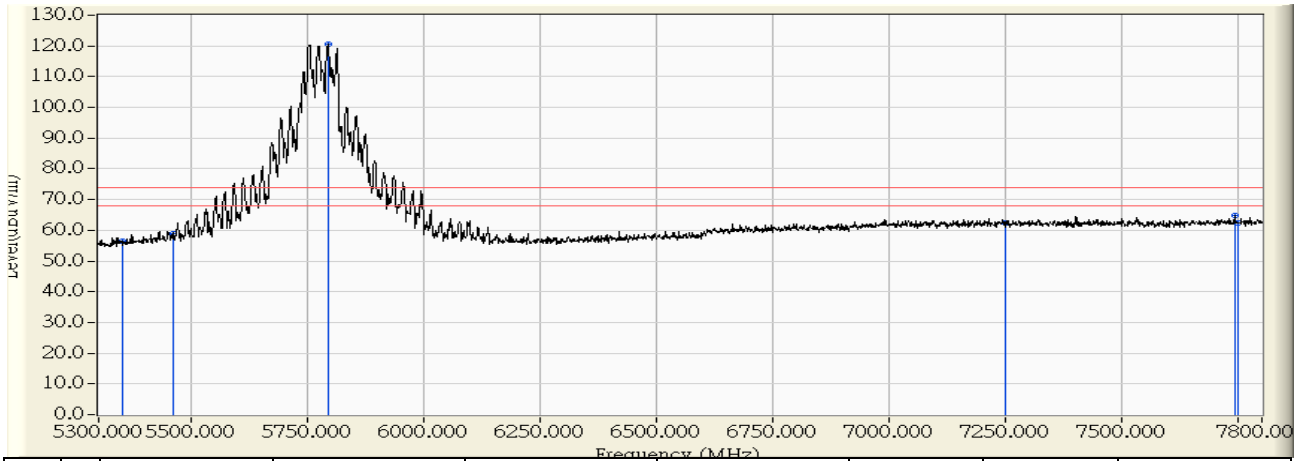


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	55.330	56.580	-17.420	74.000	PEAK
2	5460.000	2.114	56.811	58.925	-15.075	74.000	PEAK
3	* 5793.750	1.392	119.040	120.433	46.433	74.000	PEAK
4	7250.000	5.454	57.039	62.492	-11.508	74.000	PEAK
5	7742.500	6.322	58.528	64.850	-9.150	74.000	PEAK
6	7750.000	6.333	56.198	62.532	-11.468	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/10 - 10:14
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 1: Transmit_CDD Mode_Adapter 1 802.11ac(80M)_5775MHz

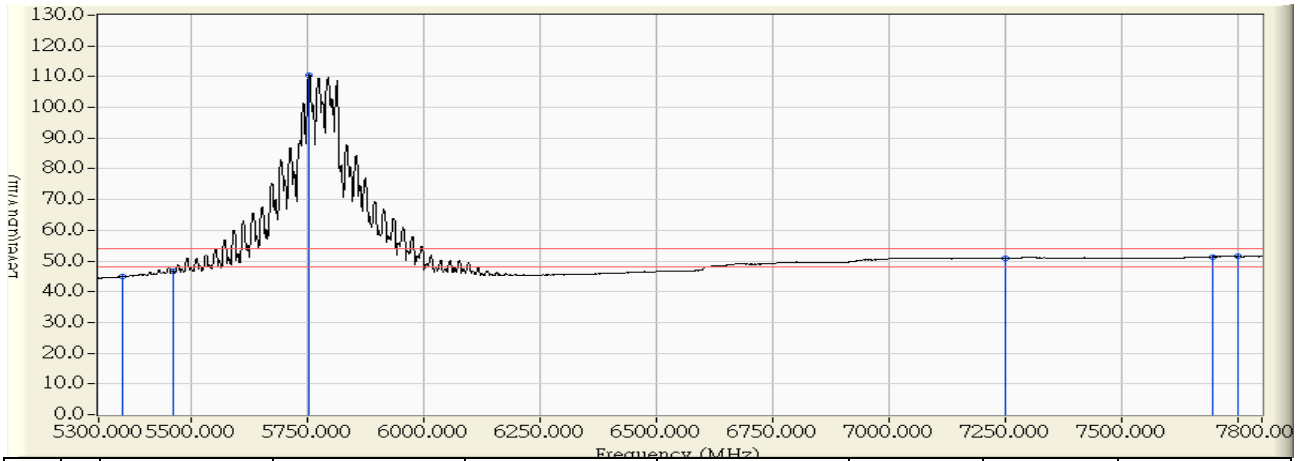


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.710	44.960	-9.040	54.000	AVERAGE
2	5460.000	2.114	44.511	46.625	-7.375	54.000	AVERAGE
3	* 5752.500	1.513	108.884	110.396	56.396	54.000	AVERAGE
4	7250.000	5.454	45.419	50.872	-3.128	54.000	AVERAGE
5	7693.750	6.245	45.078	51.323	-2.677	54.000	AVERAGE
6	7750.000	6.333	45.132	51.466	-2.534	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 13:39
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2412MHz

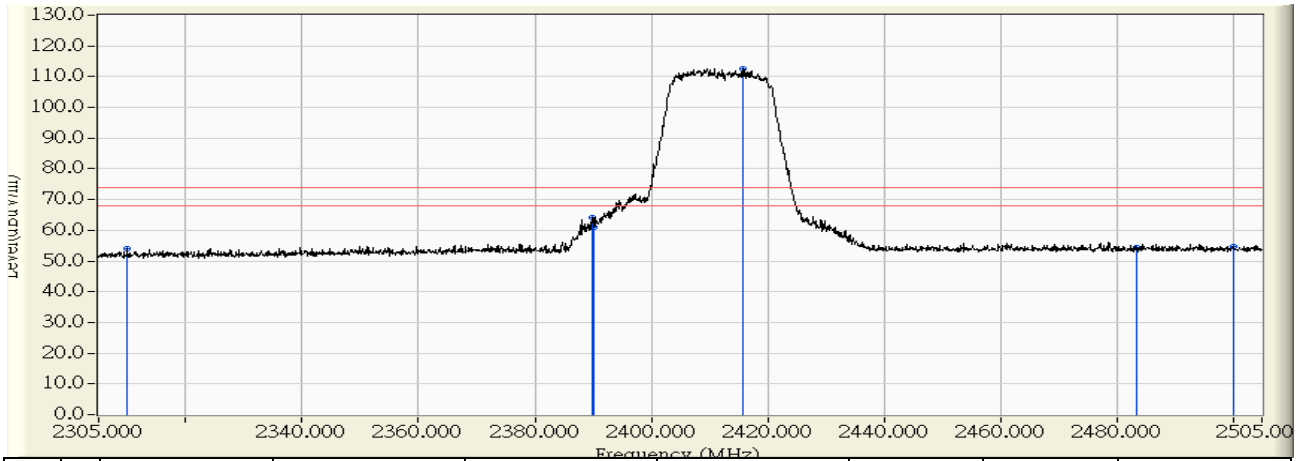


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	25.856	53.986	-20.014	74.000	PEAK
2	2389.800	28.931	35.318	64.249	-9.751	74.000	PEAK
3	2390.000	28.933	32.130	61.063	-12.937	74.000	PEAK
4	* 2415.700	29.191	83.510	112.701	38.701	74.000	PEAK
5	2483.500	29.829	24.513	54.342	-19.658	74.000	PEAK
6	2500.000	29.826	24.809	54.634	-19.366	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 13:42
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2412MHz

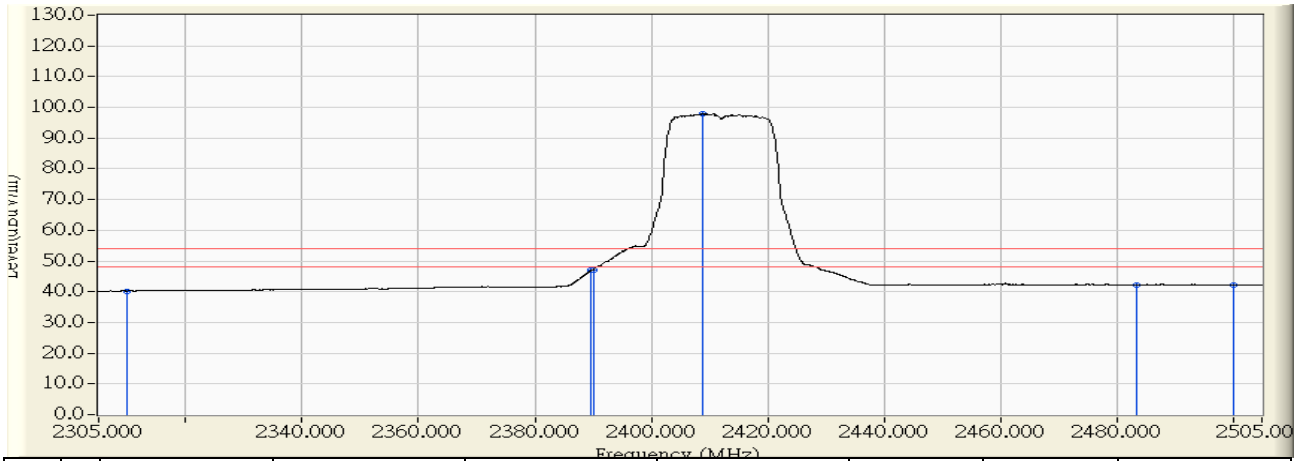


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	12.113	40.243	-13.757	54.000	AVERAGE
2	2389.700	28.930	18.061	46.991	-7.009	54.000	AVERAGE
3	2390.000	28.933	18.204	47.137	-6.863	54.000	AVERAGE
4	* 2408.800	29.122	68.907	98.029	44.029	54.000	AVERAGE
5	2483.500	29.829	12.472	42.301	-11.699	54.000	AVERAGE
6	2500.000	29.826	12.443	42.268	-11.732	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 11:43
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2412MHz

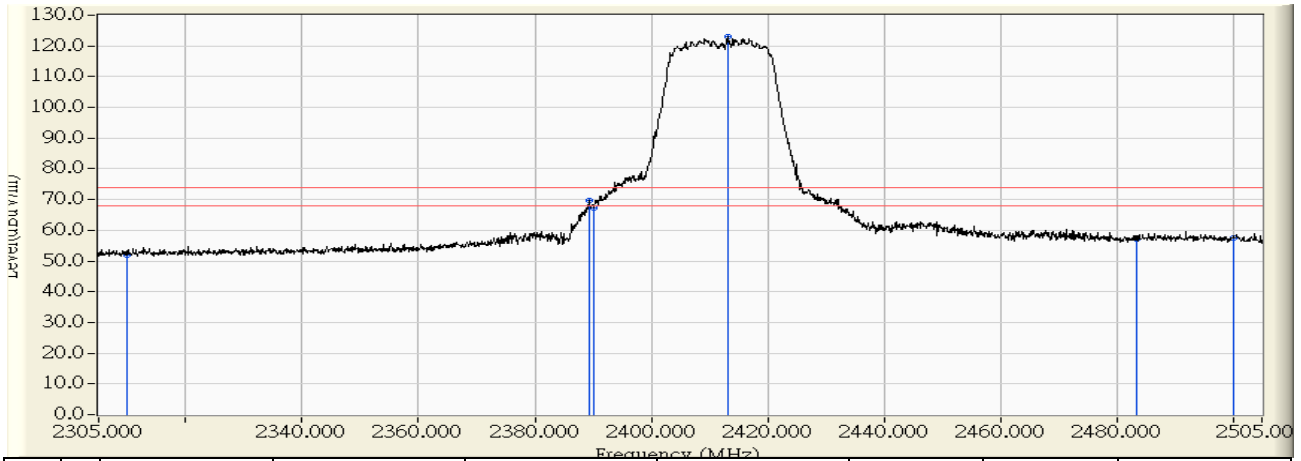


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	23.283	52.067	-21.933	74.000	PEAK
2	2389.300	29.739	39.843	69.582	-4.418	74.000	PEAK
3	2390.000	29.747	37.503	67.250	-6.750	74.000	PEAK
4	* 2413.100	30.025	92.957	122.982	48.982	74.000	PEAK
5	2483.500	30.830	26.434	57.264	-16.736	74.000	PEAK
6	2500.000	30.860	26.627	57.486	-16.514	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 11:38
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2412MHz

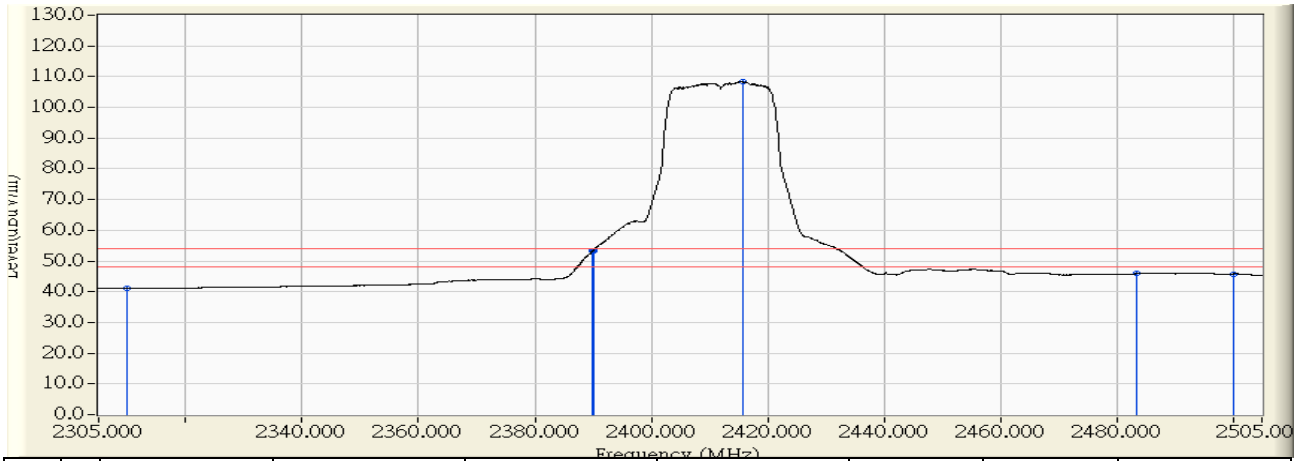


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	12.297	41.081	-12.919	54.000	AVERAGE
2	2389.900	29.746	23.448	53.194	-0.806	54.000	AVERAGE
3	2390.000	29.747	23.603	53.350	-0.650	54.000	AVERAGE
4	* 2415.700	30.057	78.237	108.294	54.294	54.000	AVERAGE
5	2483.500	30.830	15.100	45.930	-8.070	54.000	AVERAGE
6	2500.000	30.860	14.971	45.830	-8.170	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 14:22
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2417MHz

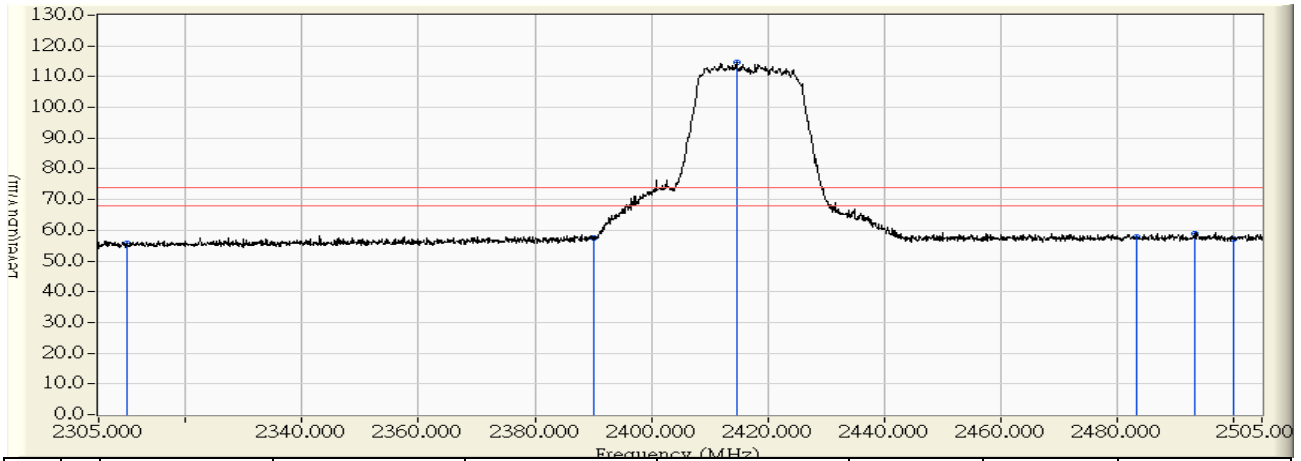


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	27.485	55.615	-18.385	74.000	PEAK
2	2390.000	28.933	28.567	57.500	-16.500	74.000	PEAK
3	* 2414.700	29.181	85.609	114.790	40.790	74.000	PEAK
4	2483.500	29.829	27.921	57.750	-16.250	74.000	PEAK
5	2493.400	29.834	29.106	58.940	-15.060	74.000	PEAK
6	2500.000	29.826	27.418	57.243	-16.757	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 14:23
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2417MHz

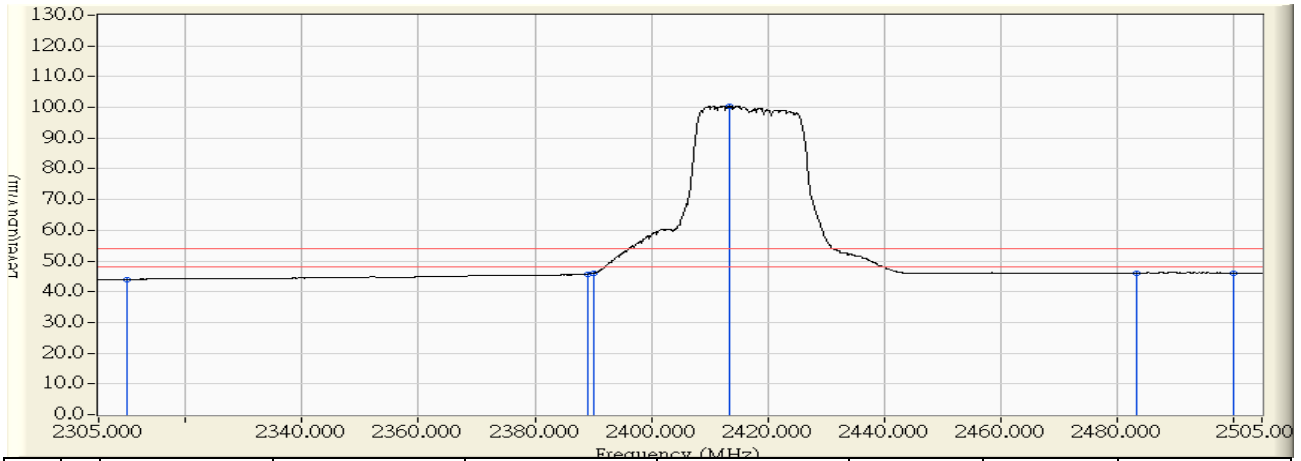


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	15.881	44.011	-9.989	54.000	AVERAGE
2	2389.000	28.923	16.870	45.793	-8.207	54.000	AVERAGE
3	2390.000	28.933	17.046	45.979	-8.021	54.000	AVERAGE
4	* 2413.400	29.168	71.268	100.436	46.436	54.000	AVERAGE
5	2483.500	29.829	16.304	46.133	-7.867	54.000	AVERAGE
6	2500.000	29.826	16.315	46.140	-7.860	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 14:18
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2417MHz

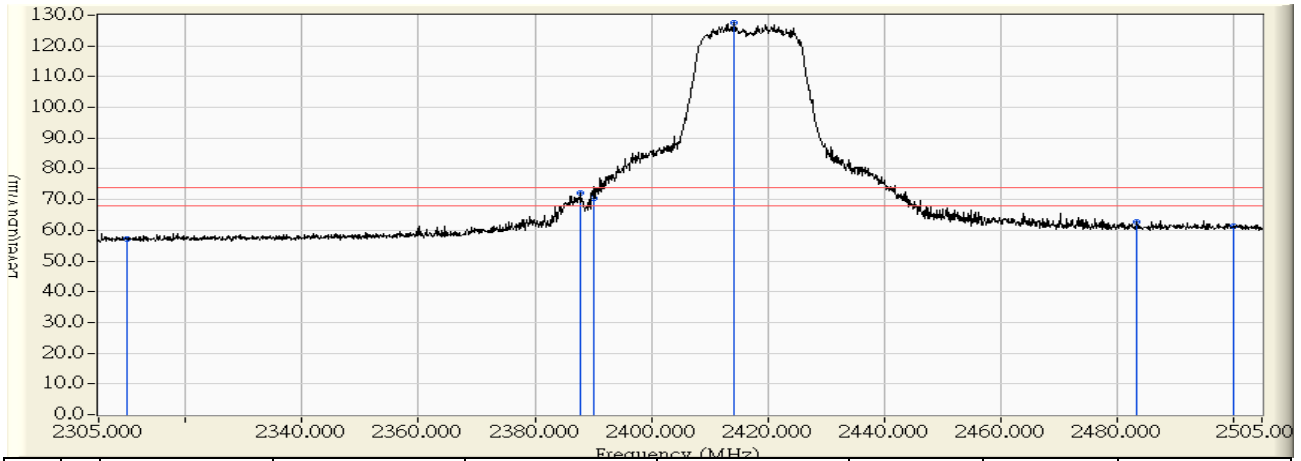


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	28.536	57.320	-16.680	74.000	PEAK
2	2387.800	29.720	42.384	72.105	-1.895	74.000	PEAK
3	2390.000	29.747	40.539	70.286	-3.714	74.000	PEAK
4	* 2414.300	30.040	97.389	127.429	53.429	74.000	PEAK
5	2483.500	30.830	32.019	62.849	-11.151	74.000	PEAK
6	2500.000	30.860	30.467	61.326	-12.674	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 14:19
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2417MHz

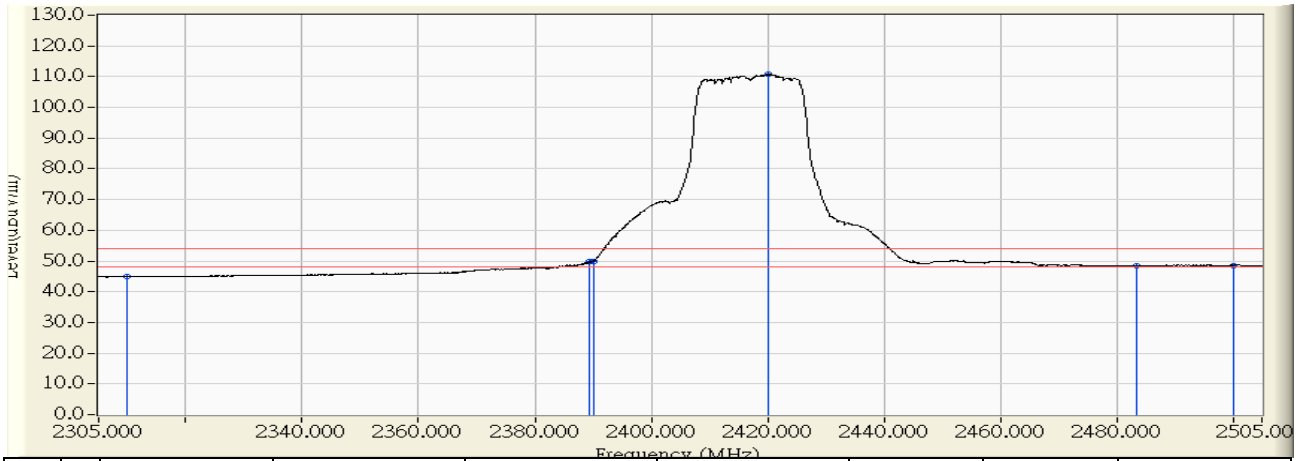


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	16.147	44.931	-9.069	54.000	AVERAGE
2	2389.400	29.740	20.224	49.964	-4.036	54.000	AVERAGE
3	2390.000	29.747	20.054	49.801	-4.199	54.000	AVERAGE
4	* 2420.100	30.110	80.667	110.777	56.777	54.000	AVERAGE
5	2483.500	30.830	17.552	48.382	-5.618	54.000	AVERAGE
6	2500.000	30.860	17.678	48.537	-5.463	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 15:07
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1
	802.11n(20M)_2437MHz

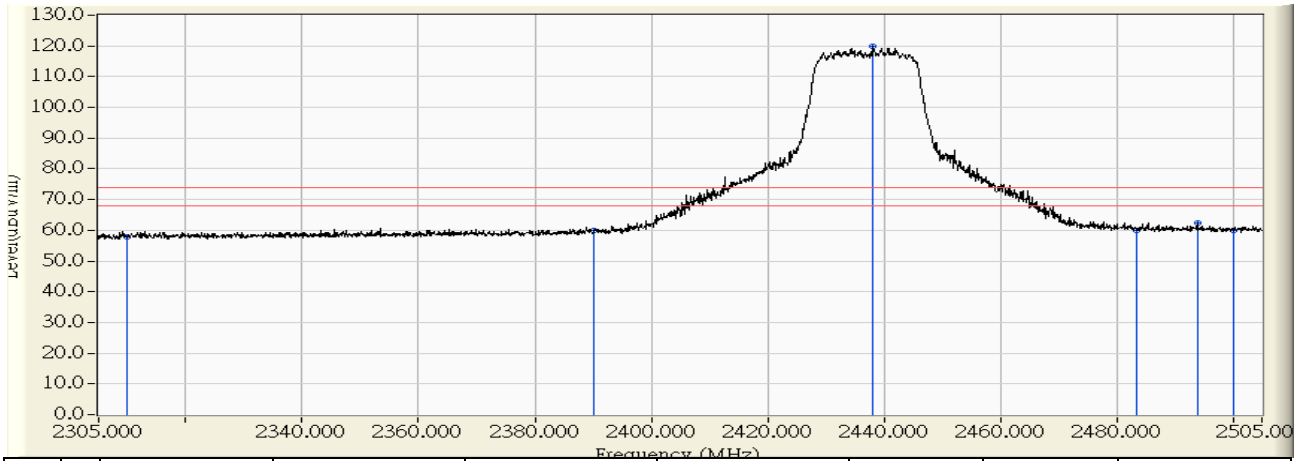


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	29.761	57.891	-16.109	74.000	PEAK
2	2390.000	28.933	31.008	59.941	-14.059	74.000	PEAK
3	* 2438.200	29.417	90.316	119.733	45.733	74.000	PEAK
4	2483.500	29.829	30.278	60.107	-13.893	74.000	PEAK
5	2493.900	29.834	32.720	62.554	-11.446	74.000	PEAK
6	2500.000	29.826	30.258	60.083	-13.917	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 15:11
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2437MHz

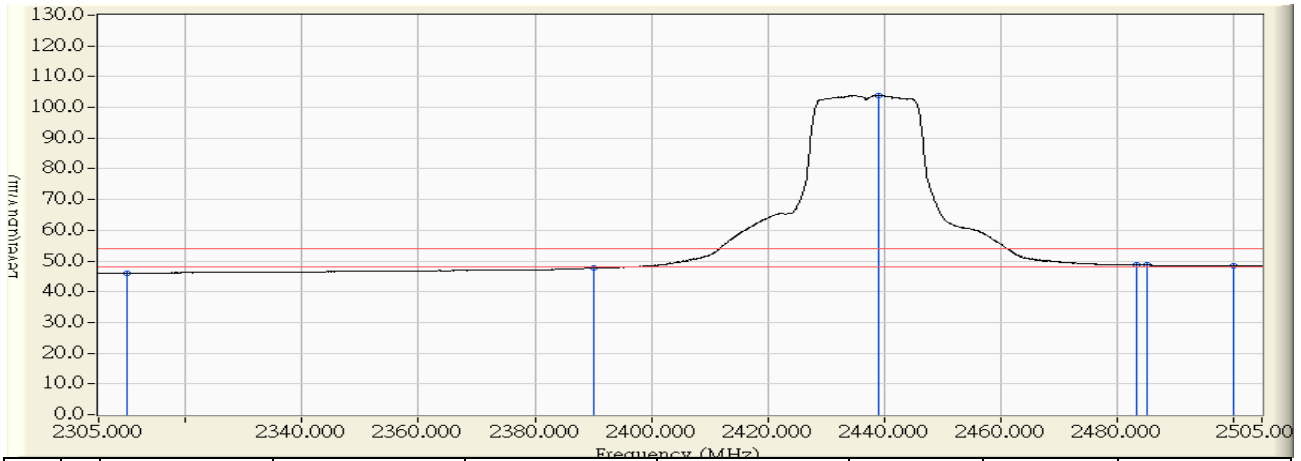


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	17.976	46.106	-7.894	54.000	AVERAGE
2	2390.000	28.933	18.731	47.664	-6.336	54.000	AVERAGE
3	* 2439.100	29.426	74.475	103.901	49.901	54.000	AVERAGE
4	2483.500	29.829	18.926	48.755	-5.245	54.000	AVERAGE
5	2485.200	29.830	18.872	48.702	-5.298	54.000	AVERAGE
6	2500.000	29.826	18.516	48.341	-5.659	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 14:34
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2437MHz

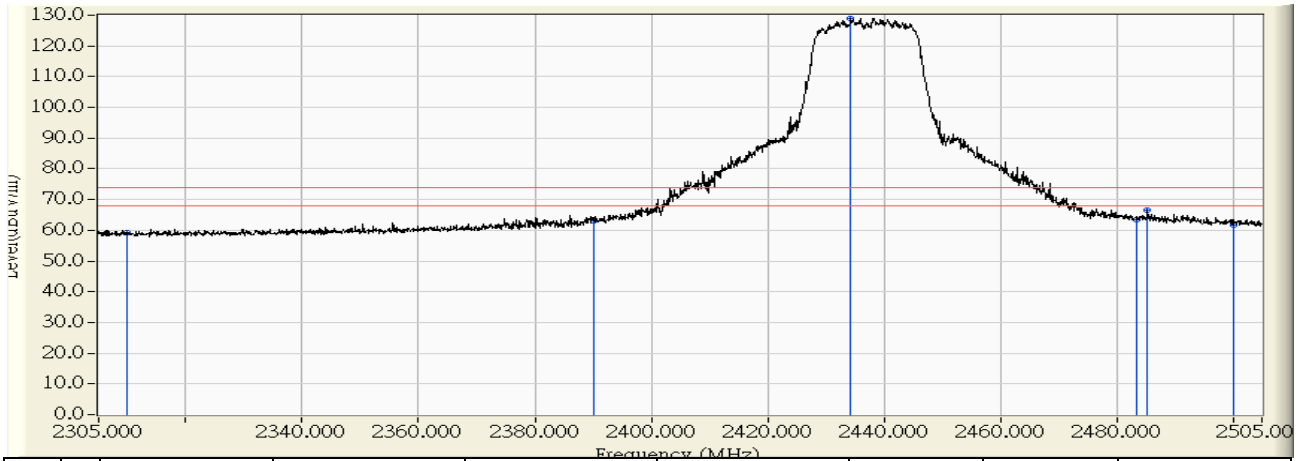


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	30.616	59.400	-14.600	74.000	PEAK
2	2390.000	29.747	33.450	63.197	-10.803	74.000	PEAK
3	* 2434.300	30.280	98.698	128.979	54.979	74.000	PEAK
4	2483.500	30.830	32.543	63.373	-10.627	74.000	PEAK
5	2485.300	30.834	35.600	66.435	-7.565	74.000	PEAK
6	2500.000	30.860	30.843	61.702	-12.298	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 14:33
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2437MHz

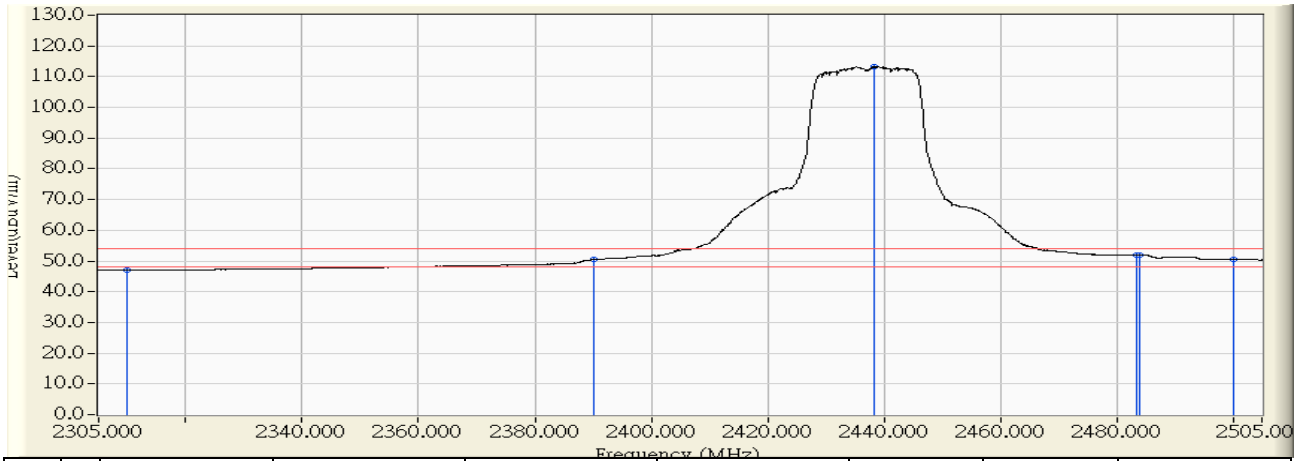


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	18.211	46.995	-7.005	54.000	AVERAGE
2	2390.000	29.747	20.669	50.416	-3.584	54.000	AVERAGE
3	* 2438.300	30.329	82.869	113.198	59.198	54.000	AVERAGE
4	2483.500	30.830	21.064	51.894	-2.106	54.000	AVERAGE
5	2483.900	30.831	21.107	51.938	-2.062	54.000	AVERAGE
6	2500.000	30.860	19.580	50.439	-3.561	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 15:58
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2457MHz

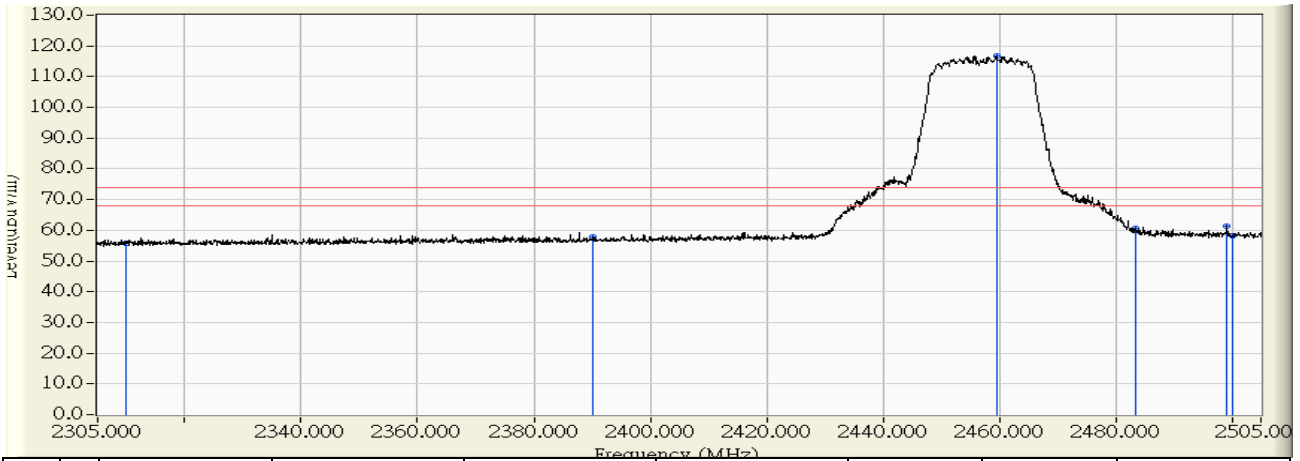


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	27.647	55.777	-18.223	74.000	PEAK
2	2390.000	28.933	29.003	57.936	-16.064	74.000	PEAK
3	* 2459.500	29.631	87.185	116.816	42.816	74.000	PEAK
4	2483.500	29.829	30.667	60.496	-13.504	74.000	PEAK
5	2499.200	29.827	31.554	61.381	-12.619	74.000	PEAK
6	2500.000	29.826	28.429	58.254	-15.746	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 16:00
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2457MHz

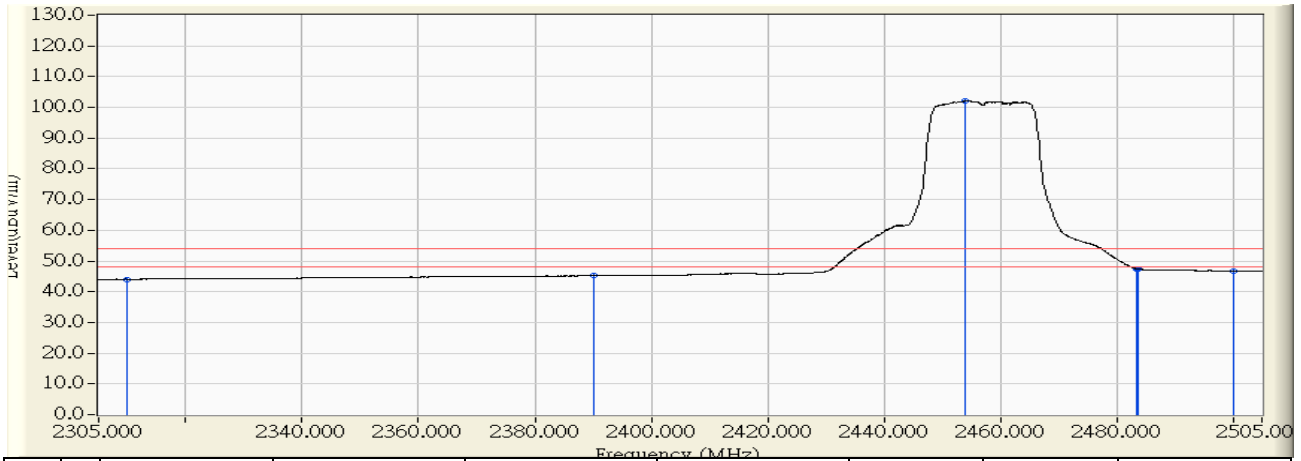


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	15.946	44.076	-9.924	54.000	AVERAGE
2	2390.000	28.933	16.263	45.196	-8.804	54.000	AVERAGE
3	* 2454.000	29.576	72.529	102.105	48.105	54.000	AVERAGE
4	2483.500	29.829	17.625	47.454	-6.546	54.000	AVERAGE
5	2483.600	29.829	17.601	47.430	-6.570	54.000	AVERAGE
6	2500.000	29.826	16.956	46.781	-7.219	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 15:42
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2457MHz

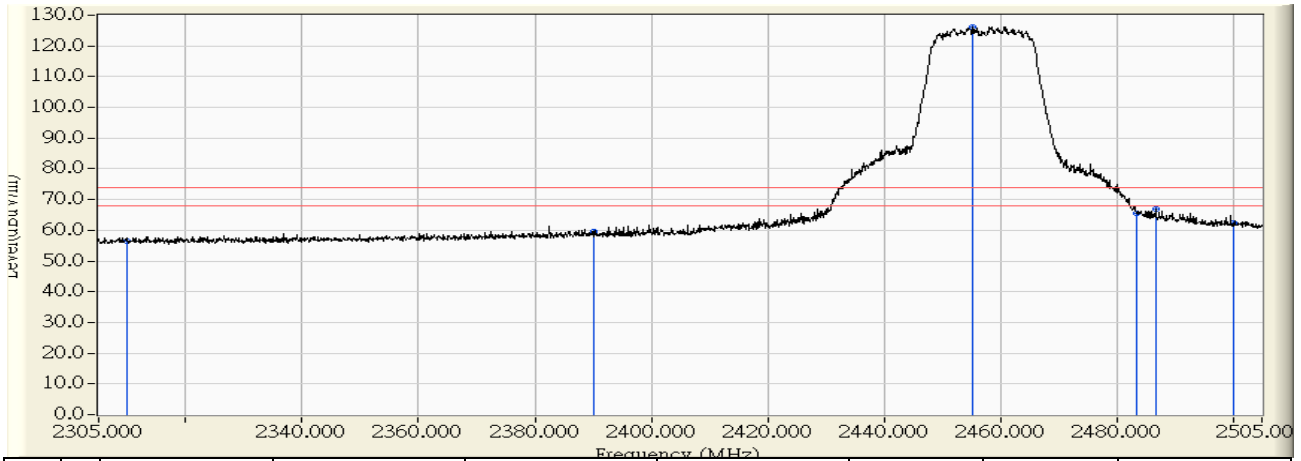


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	27.707	56.491	-17.509	74.000	PEAK
2	2390.000	29.747	29.982	59.729	-14.271	74.000	PEAK
3	* 2455.200	30.532	95.664	126.196	52.196	74.000	PEAK
4	2483.500	30.830	34.707	65.537	-8.463	74.000	PEAK
5	2486.700	30.838	36.134	66.972	-7.028	74.000	PEAK
6	2500.000	30.860	31.450	62.309	-11.691	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 15:41
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2457MHz

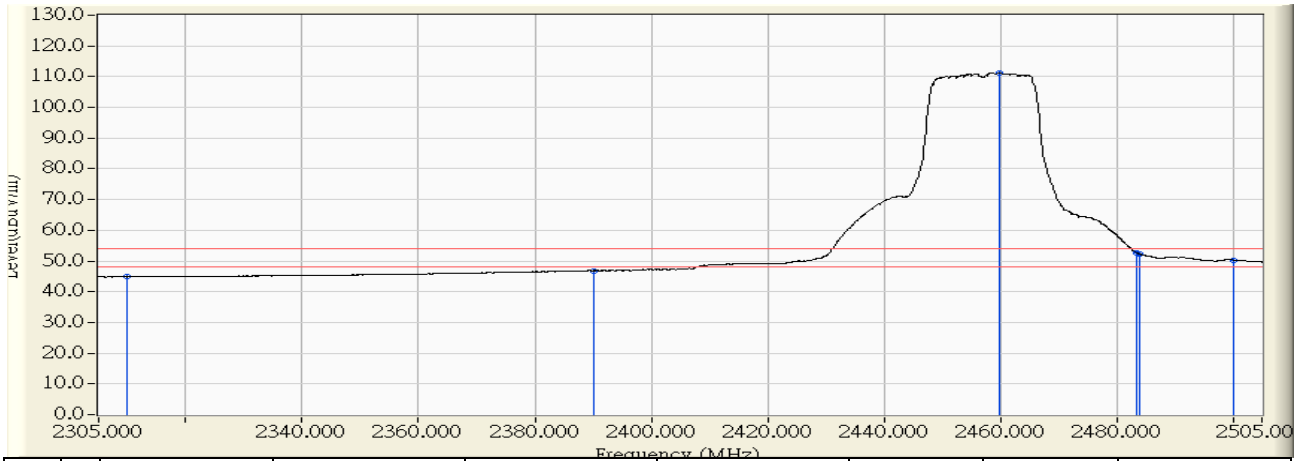


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	16.045	44.829	-9.171	54.000	AVERAGE
2	2390.000	29.747	17.001	46.748	-7.252	54.000	AVERAGE
3	* 2459.800	30.588	80.663	111.251	57.251	54.000	AVERAGE
4	2483.500	30.830	21.833	52.663	-1.337	54.000	AVERAGE
5	2483.900	30.831	21.473	52.304	-1.696	54.000	AVERAGE
6	2500.000	30.860	19.485	50.344	-3.656	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 15:28
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2462MHz

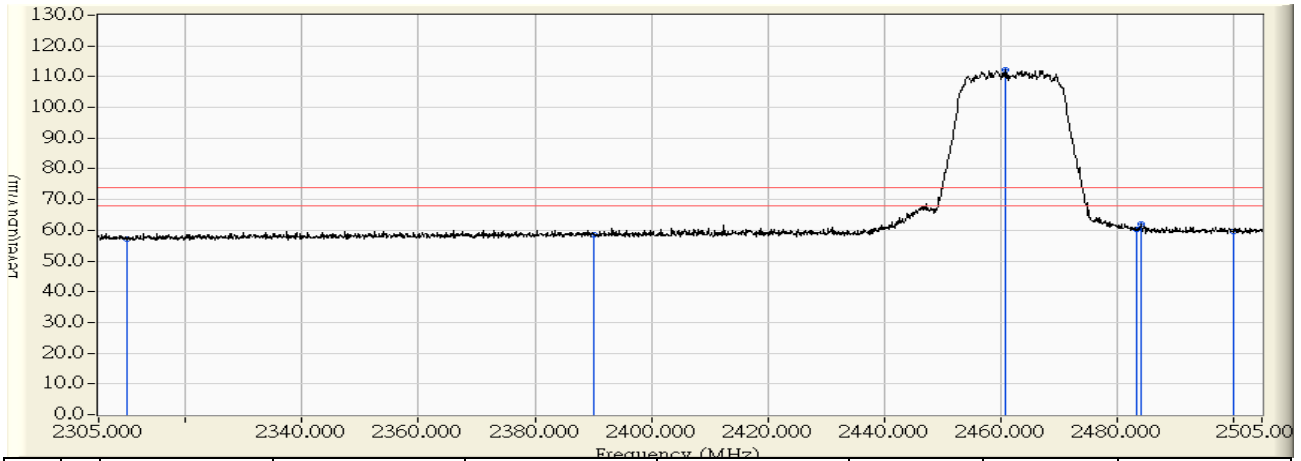


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	29.003	57.133	-16.867	74.000	PEAK
2	2390.000	28.933	29.572	58.505	-15.495	74.000	PEAK
3	* 2460.800	29.644	82.570	112.214	38.214	74.000	PEAK
4	2483.500	29.829	30.347	60.176	-13.824	74.000	PEAK
5	2484.200	29.830	32.049	61.878	-12.122	74.000	PEAK
6	2500.000	29.826	29.746	59.571	-14.429	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 15:31
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2462MHz

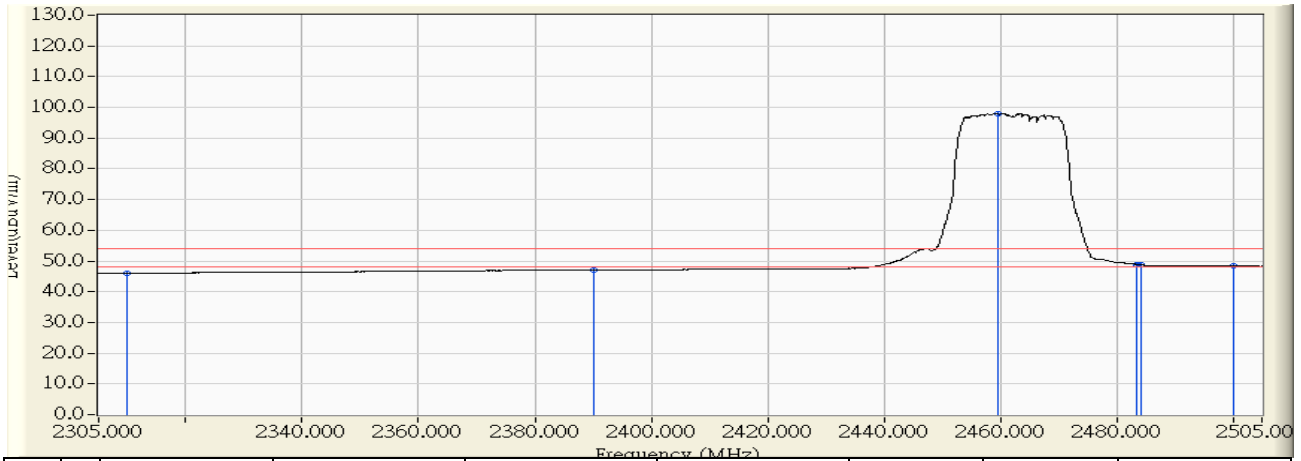


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	17.937	46.067	-7.933	54.000	AVERAGE
2	2390.000	28.933	18.168	47.101	-6.899	54.000	AVERAGE
3	* 2459.700	29.633	68.422	98.055	44.055	54.000	AVERAGE
4	2483.500	29.829	18.973	48.802	-5.198	54.000	AVERAGE
5	2484.200	29.830	18.886	48.715	-5.285	54.000	AVERAGE
6	2500.000	29.826	18.487	48.312	-5.688	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 15:20
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2462MHz

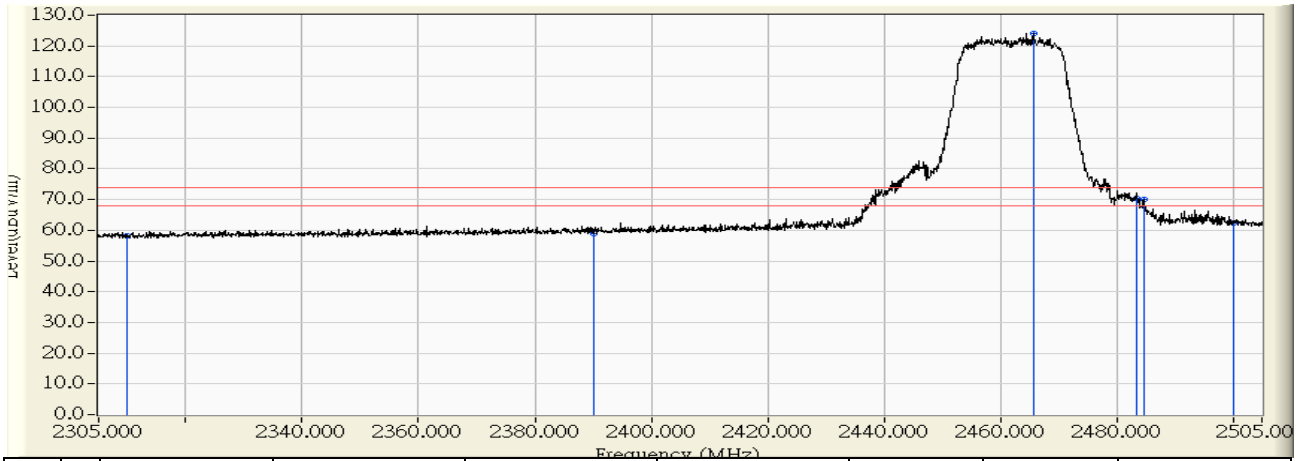


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	29.546	58.330	-15.670	74.000	PEAK
2	2390.000	29.747	29.144	58.891	-15.109	74.000	PEAK
3	* 2465.700	30.659	93.263	123.922	49.922	74.000	PEAK
4	2483.500	30.830	39.725	70.555	-3.445	74.000	PEAK
5	2484.800	30.833	39.272	70.105	-3.895	74.000	PEAK
6	2500.000	30.860	31.470	62.329	-11.671	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 15:20
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_2462MHz

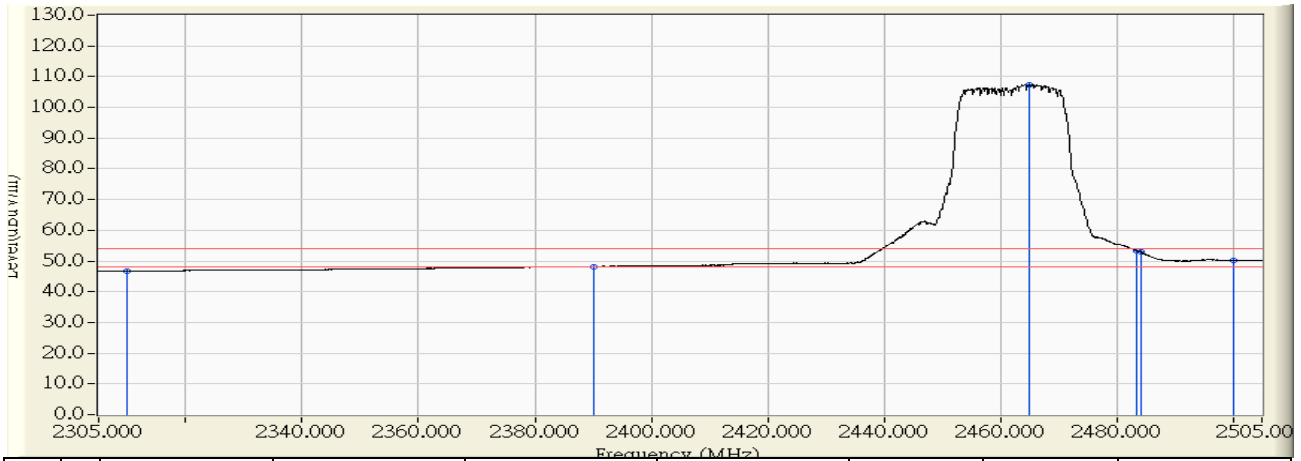


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	17.951	46.735	-7.265	54.000	AVERAGE
2	2390.000	29.747	18.450	48.197	-5.803	54.000	AVERAGE
3	* 2465.100	30.652	76.708	107.359	53.359	54.000	AVERAGE
4	2483.500	30.830	22.431	53.261	-0.739	54.000	AVERAGE
5	2484.200	30.832	22.014	52.846	-1.154	54.000	AVERAGE
6	2500.000	30.860	19.352	50.211	-3.789	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 16:53
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2422MHz

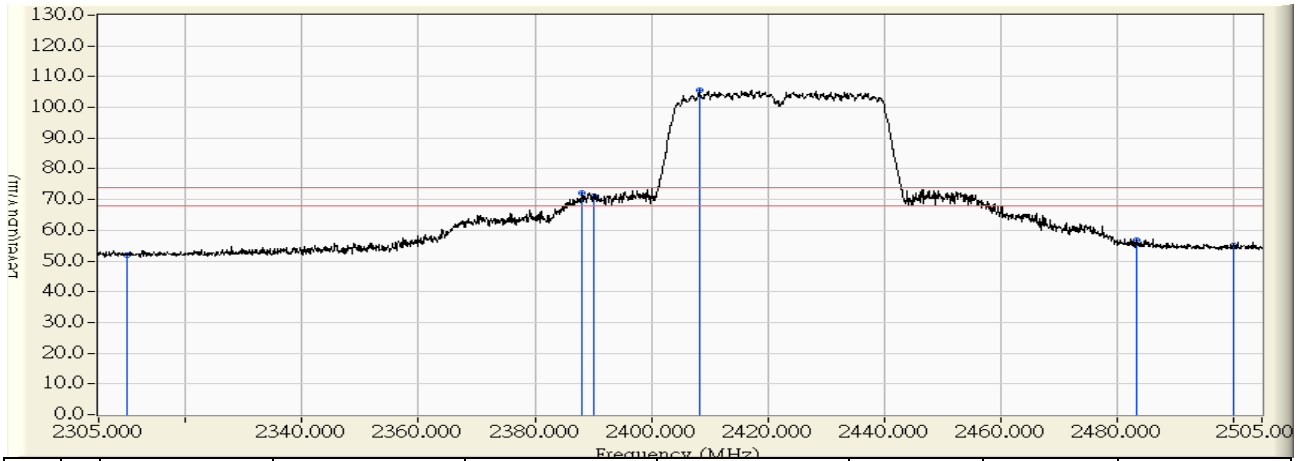


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	23.663	51.793	-22.207	74.000	PEAK
2	2388.200	28.915	43.057	71.972	-2.028	74.000	PEAK
3	2390.000	28.933	42.238	71.171	-2.829	74.000	PEAK
4	* 2408.300	29.116	76.516	105.633	31.633	74.000	PEAK
5	2483.500	29.829	26.905	56.734	-17.266	74.000	PEAK
6	2500.000	29.826	25.319	55.144	-18.856	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 16:54
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2422MHz

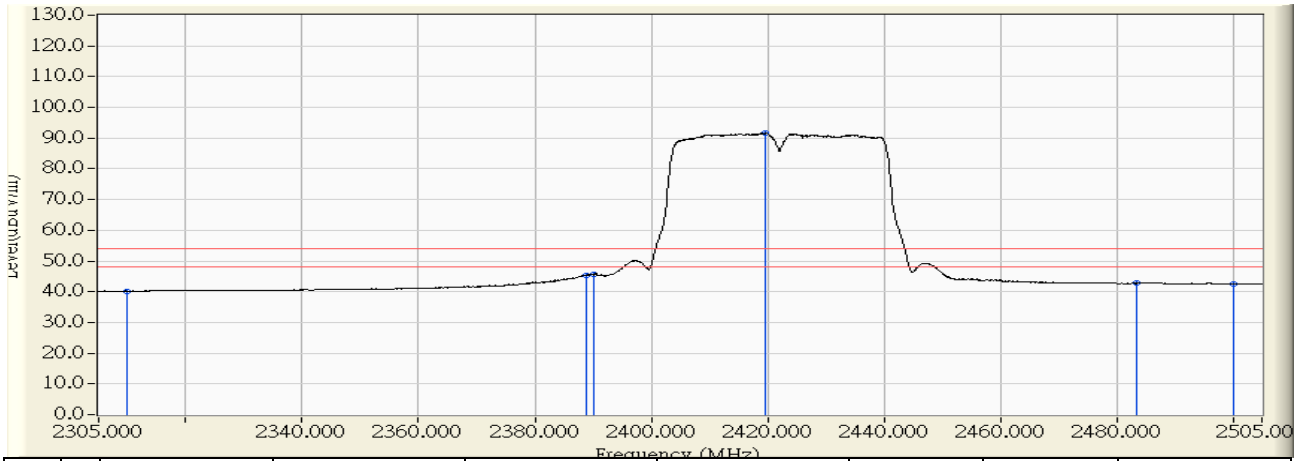


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	12.071	40.201	-13.799	54.000	AVERAGE
2	2388.800	28.921	16.343	45.264	-8.736	54.000	AVERAGE
3	2390.000	28.933	16.580	45.513	-8.487	54.000	AVERAGE
4	* 2419.500	29.229	62.395	91.624	37.624	54.000	AVERAGE
5	2483.500	29.829	12.880	42.709	-11.291	54.000	AVERAGE
6	2500.000	29.826	12.707	42.532	-11.468	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 16:48
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2422MHz

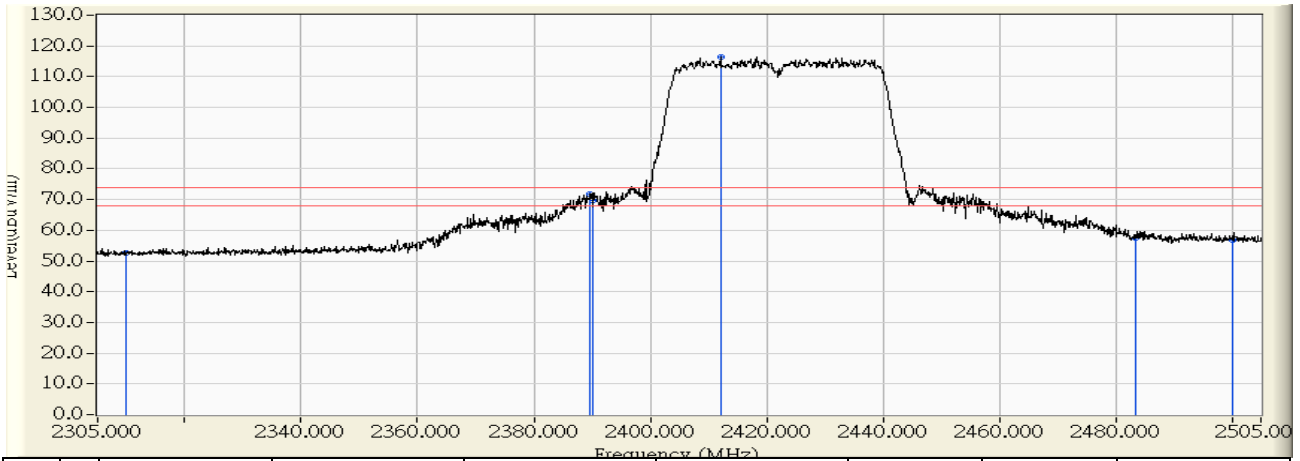


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	23.929	52.713	-21.287	74.000	PEAK
2	2389.600	29.742	42.163	71.905	-2.095	74.000	PEAK
3	2390.000	29.747	39.804	69.551	-4.449	74.000	PEAK
4	* 2412.200	30.015	86.413	116.427	42.427	74.000	PEAK
5	2483.500	30.830	26.560	57.390	-16.610	74.000	PEAK
6	2500.000	30.860	25.785	56.644	-17.356	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 16:45
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2422MHz

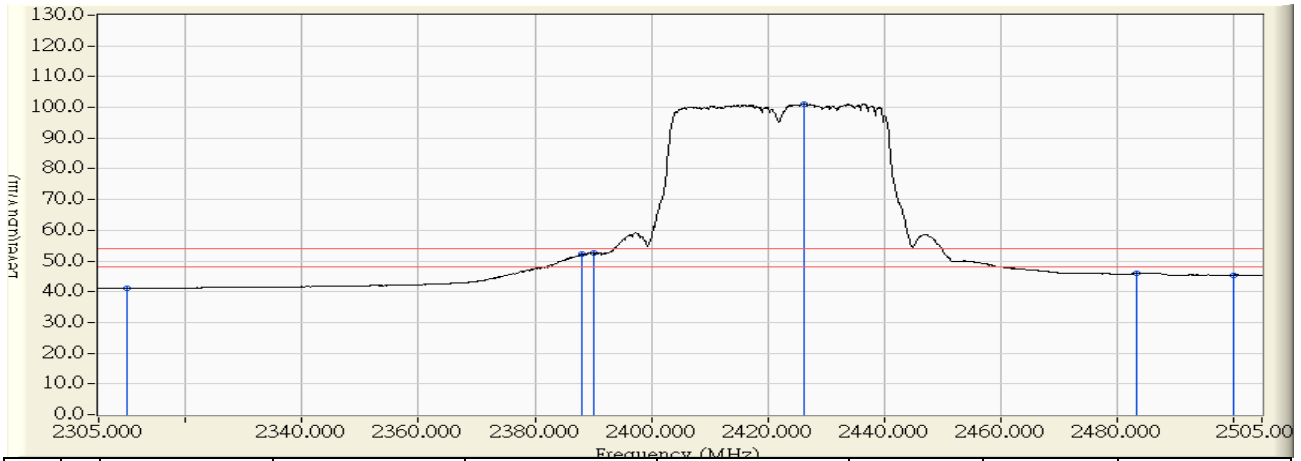


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	12.286	41.070	-12.930	54.000	AVERAGE
2	2388.100	29.725	22.555	52.279	-1.721	54.000	AVERAGE
3	2390.000	29.747	22.904	52.651	-1.349	54.000	AVERAGE
4	* 2426.200	30.183	71.010	101.193	47.193	54.000	AVERAGE
5	2483.500	30.830	15.066	45.896	-8.104	54.000	AVERAGE
6	2500.000	30.860	14.499	45.358	-8.642	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/17 - 00:21
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2427MHz

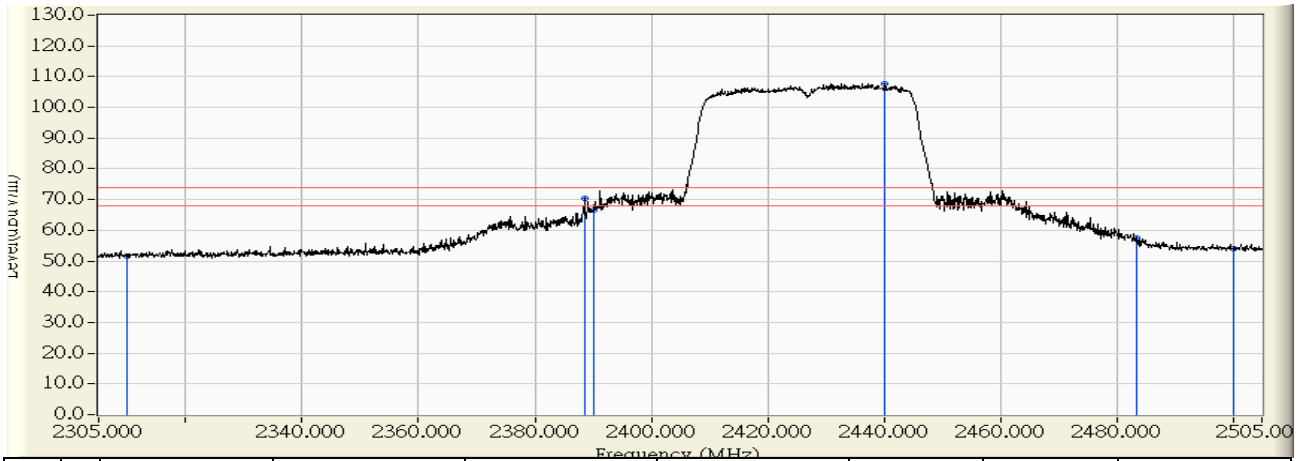


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	23.320	51.450	-22.550	74.000	PEAK
2	2388.600	28.919	41.517	70.436	-3.564	74.000	PEAK
3	2390.000	28.933	37.808	66.741	-7.259	74.000	PEAK
4	* 2440.200	29.437	78.329	107.766	33.766	74.000	PEAK
5	2483.500	29.829	27.730	57.559	-16.441	74.000	PEAK
6	2500.000	29.826	24.069	53.894	-20.106	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/17 - 00:23
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2427MHz

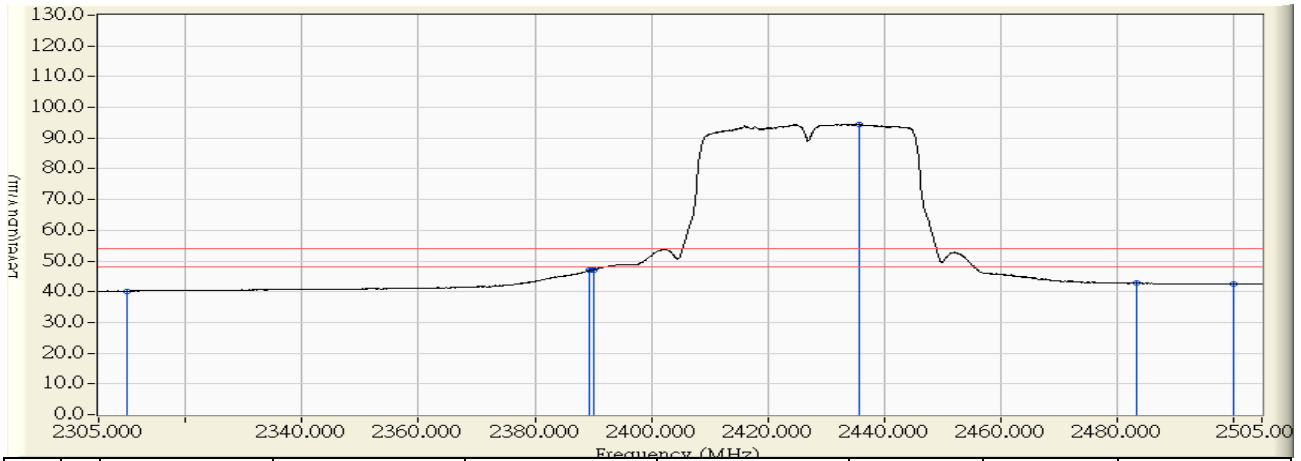


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	12.099	40.229	-13.771	54.000	AVERAGE
2	2389.300	28.926	17.962	46.888	-7.112	54.000	AVERAGE
3	2390.000	28.933	18.226	47.159	-6.841	54.000	AVERAGE
4	* 2435.800	29.393	65.137	94.530	40.530	54.000	AVERAGE
5	2483.500	29.829	12.908	42.737	-11.263	54.000	AVERAGE
6	2500.000	29.826	12.625	42.450	-11.550	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 23:56
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2427MHz

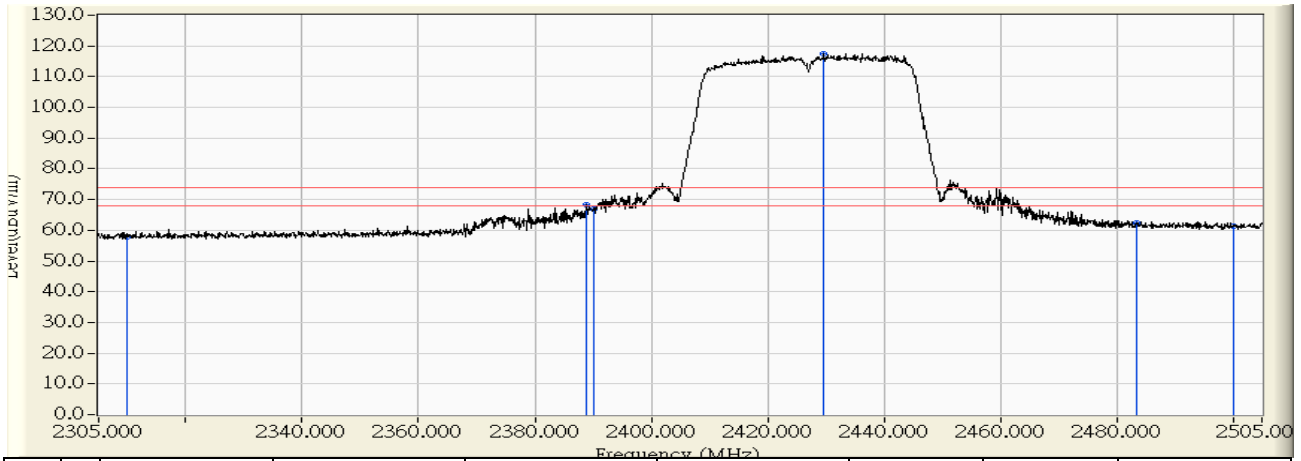


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	28.966	57.750	-16.250	74.000	PEAK
2	2388.900	29.734	38.519	68.253	-5.747	74.000	PEAK
3	2390.000	29.747	37.170	66.917	-7.083	74.000	PEAK
4	* 2429.700	30.225	87.233	117.458	43.458	74.000	PEAK
5	2483.500	30.830	31.552	62.382	-11.618	74.000	PEAK
6	2500.000	30.860	30.371	61.230	-12.770	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 23:55
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2427MHz

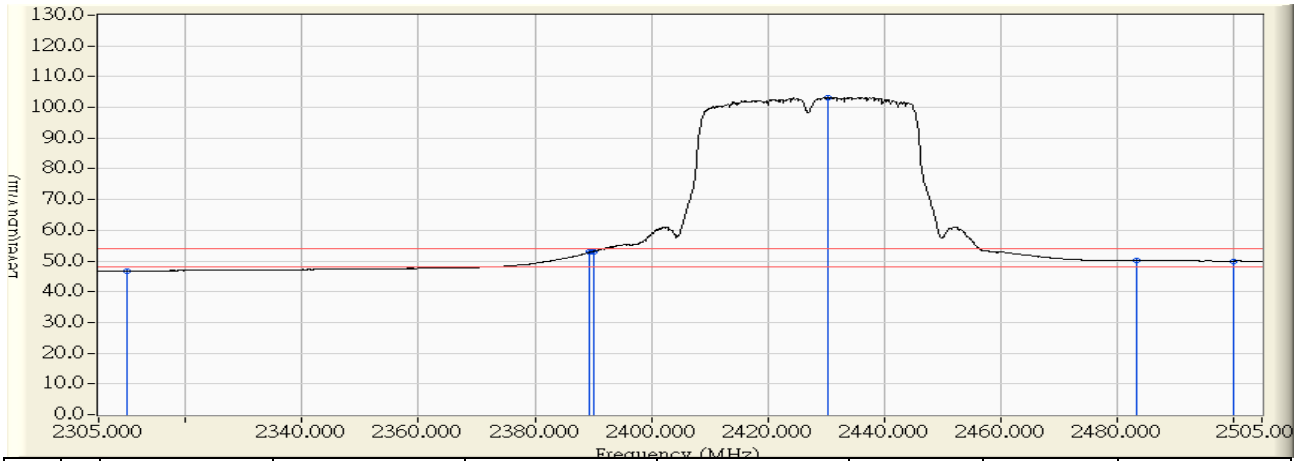


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	17.972	46.756	-7.244	54.000	AVERAGE
2	2389.400	29.740	23.082	52.822	-1.178	54.000	AVERAGE
3	2390.000	29.747	23.382	53.129	-0.871	54.000	AVERAGE
4	* 2430.400	30.234	73.047	103.281	49.281	54.000	AVERAGE
5	2483.500	30.830	19.262	50.092	-3.908	54.000	AVERAGE
6	2500.000	30.860	19.108	49.967	-4.033	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 17:29
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2437MHz

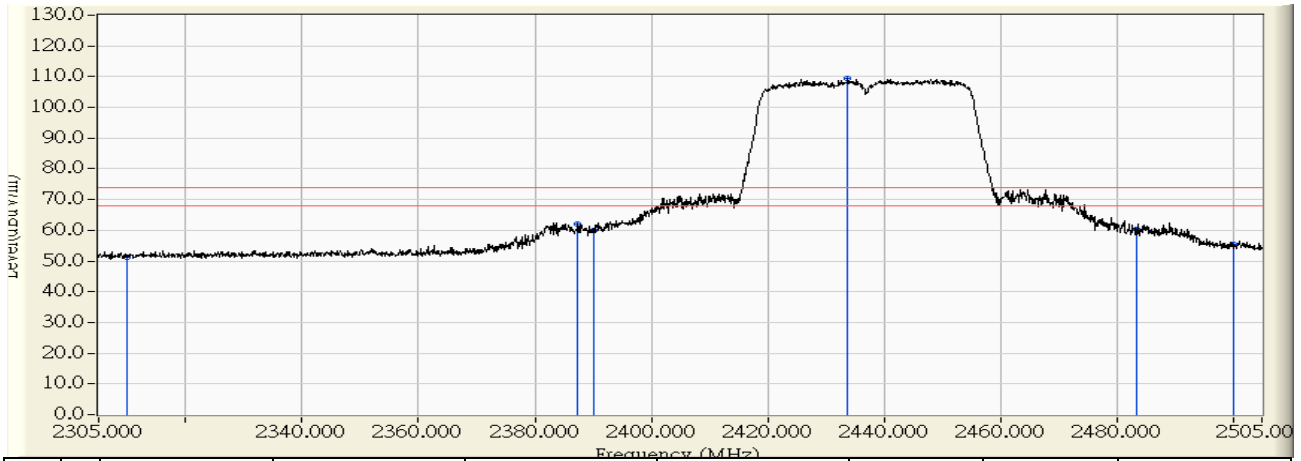


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	23.054	51.184	-22.816	74.000	PEAK
2	2387.400	28.907	33.115	62.022	-11.978	74.000	PEAK
3	2390.000	28.933	30.960	59.893	-14.107	74.000	PEAK
4	* 2433.800	29.373	80.013	109.386	35.386	74.000	PEAK
5	2483.500	29.829	30.380	60.209	-13.791	74.000	PEAK
6	2500.000	29.826	25.462	55.287	-18.713	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 17:30
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2437MHz

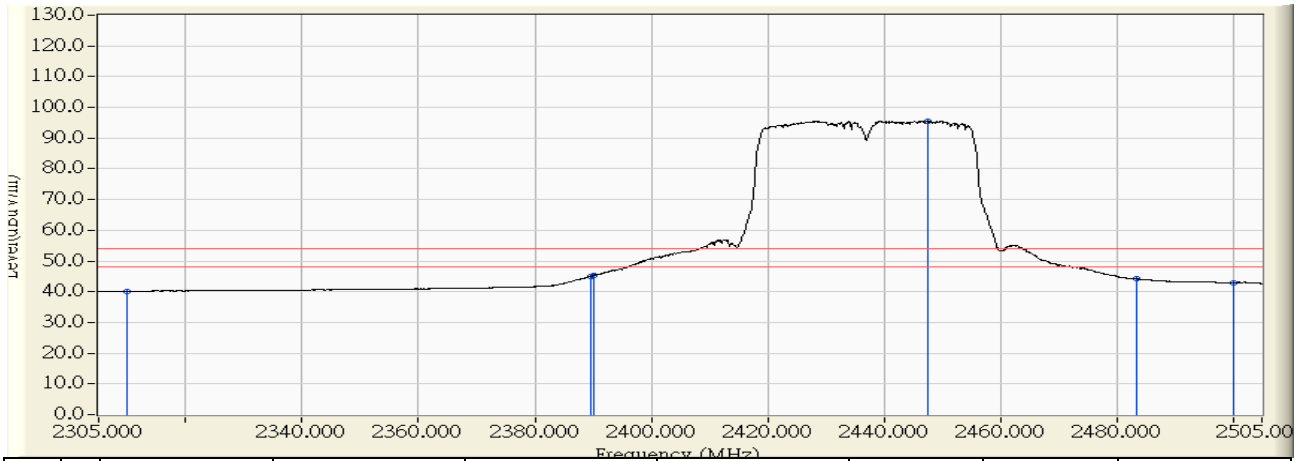


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	12.054	40.184	-13.816	54.000	AVERAGE
2	2389.500	28.928	16.095	45.023	-8.977	54.000	AVERAGE
3	2390.000	28.933	16.314	45.247	-8.753	54.000	AVERAGE
4	* 2447.500	29.511	66.114	95.625	41.625	54.000	AVERAGE
5	2483.500	29.829	14.341	44.170	-9.830	54.000	AVERAGE
6	2500.000	29.826	13.151	42.976	-11.024	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 17:27
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2437MHz

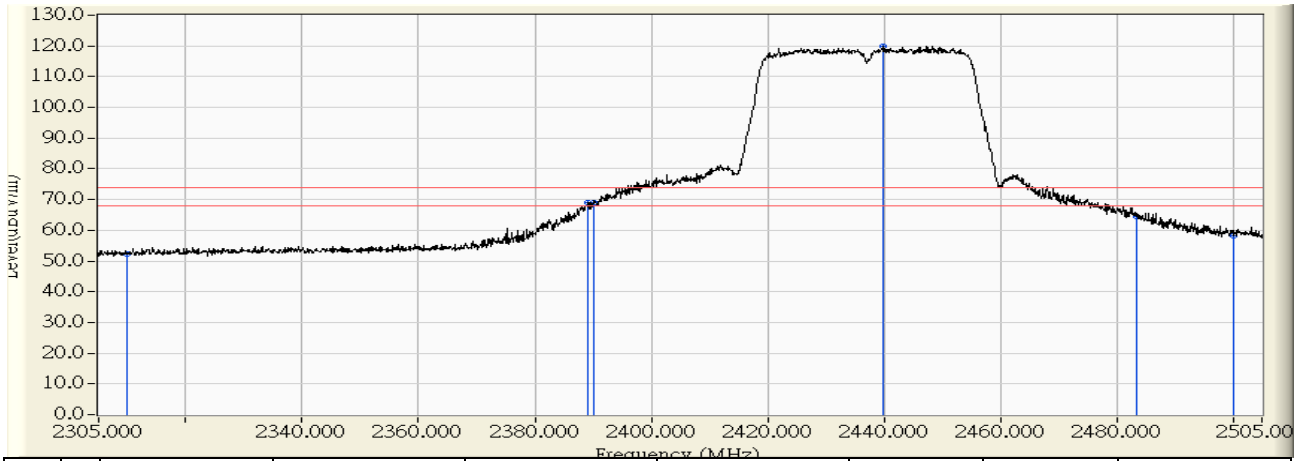


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	23.591	52.375	-21.625	74.000	PEAK
2	2389.200	29.738	39.372	69.109	-4.891	74.000	PEAK
3	2390.000	29.747	39.118	68.865	-5.135	74.000	PEAK
4	* 2439.800	30.347	89.518	119.865	45.865	74.000	PEAK
5	2483.500	30.830	33.819	64.649	-9.351	74.000	PEAK
6	2500.000	30.860	27.503	58.362	-15.638	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/16 - 17:17
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2437MHz

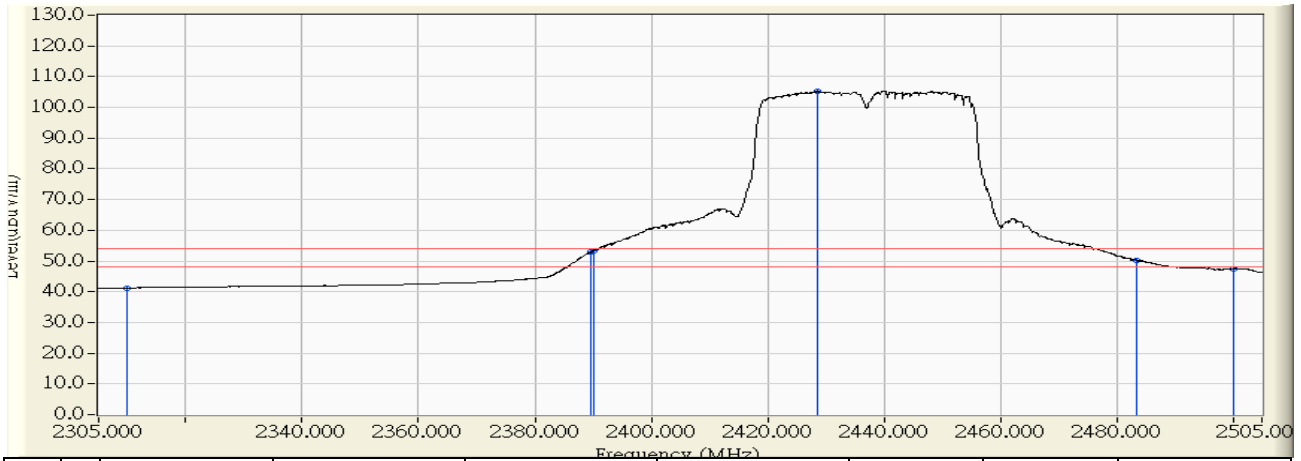


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	12.485	41.269	-12.731	54.000	AVERAGE
2	2389.600	29.742	23.107	52.849	-1.151	54.000	AVERAGE
3	2390.000	29.747	23.599	53.346	-0.654	54.000	AVERAGE
4	* 2428.600	30.212	75.075	105.287	51.287	54.000	AVERAGE
5	2483.500	30.830	19.429	50.259	-3.741	54.000	AVERAGE
6	2500.000	30.860	16.573	47.432	-6.568	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/17 - 00:36
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2447MHz

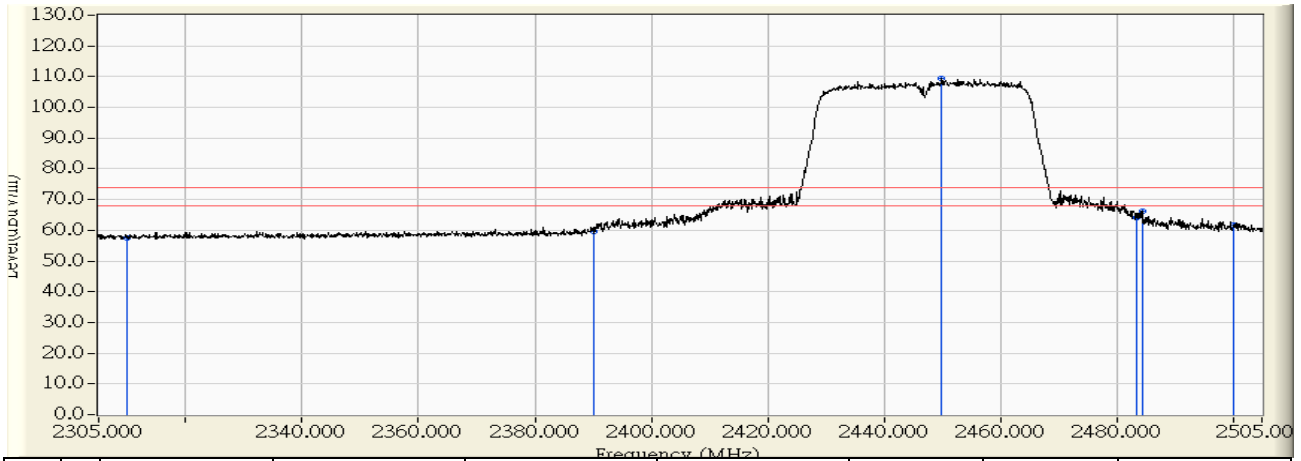


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	29.340	57.470	-16.530	74.000	PEAK
2	2390.000	28.933	30.788	59.721	-14.279	74.000	PEAK
3	* 2449.900	29.535	80.020	109.555	35.555	74.000	PEAK
4	2483.500	29.829	34.414	64.243	-9.757	74.000	PEAK
5	2484.500	29.830	36.335	66.165	-7.835	74.000	PEAK
6	2500.000	29.826	31.779	61.604	-12.396	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/17 - 00:39
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2447MHz

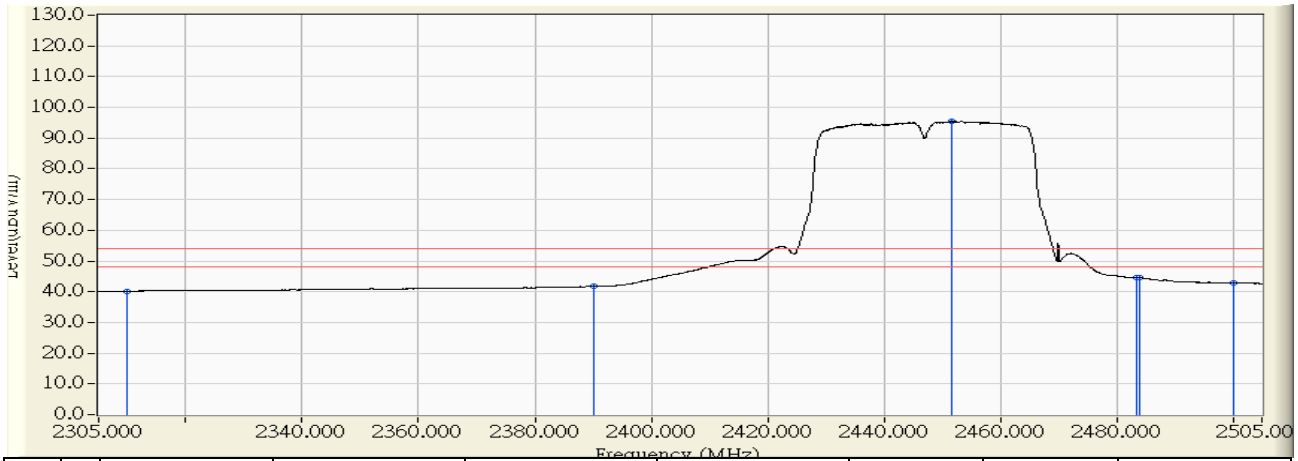


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	12.087	40.217	-13.783	54.000	AVERAGE
2	2390.000	28.933	12.848	41.781	-12.219	54.000	AVERAGE
3	* 2451.700	29.552	65.936	95.489	41.489	54.000	AVERAGE
4	2483.500	29.829	14.711	44.540	-9.460	54.000	AVERAGE
5	2483.900	29.830	14.638	44.467	-9.533	54.000	AVERAGE
6	2500.000	29.826	13.055	42.880	-11.120	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/17 - 00:33
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2447MHz

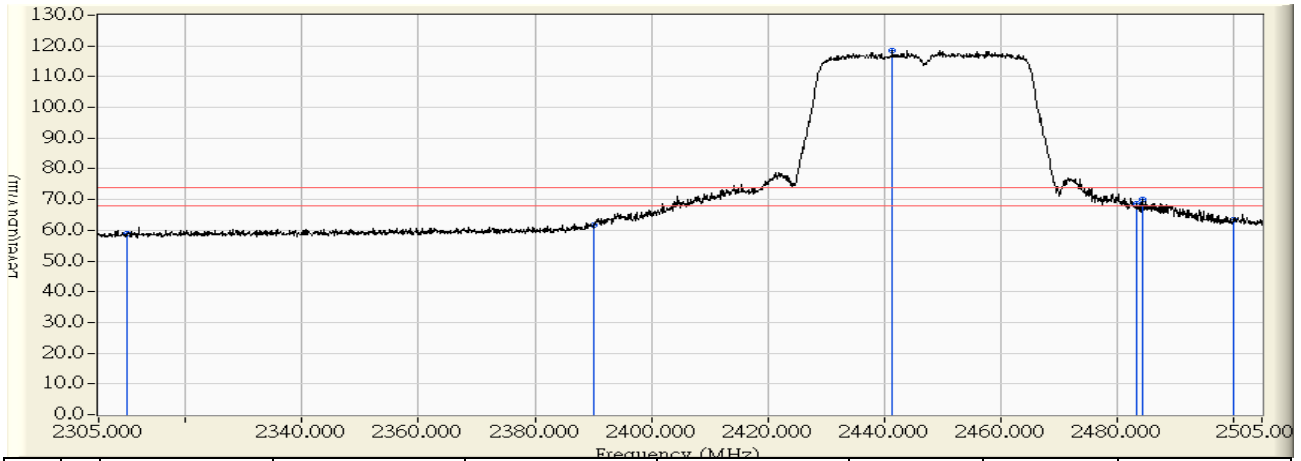


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	30.181	58.965	-15.035	74.000	PEAK
2	2390.000	29.747	32.067	61.814	-12.186	74.000	PEAK
3	* 2441.500	30.367	88.183	118.550	44.550	74.000	PEAK
4	2483.500	30.830	37.939	68.769	-5.231	74.000	PEAK
5	2484.400	30.832	39.393	70.225	-3.775	74.000	PEAK
6	2500.000	30.860	32.490	63.349	-10.651	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/17 - 00:31
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2447MHz

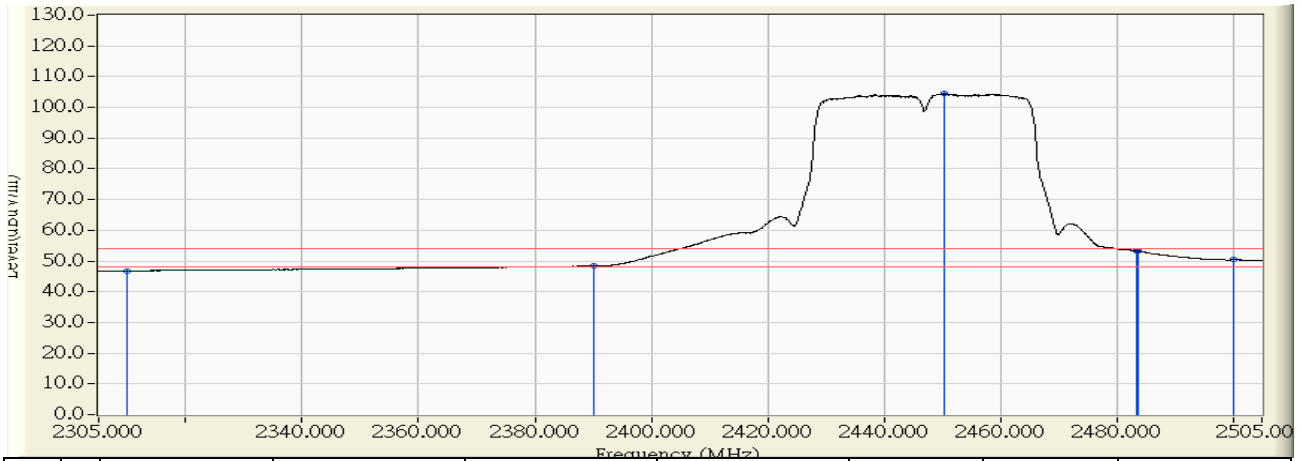


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	18.011	46.795	-7.205	54.000	AVERAGE
2	2390.000	29.747	18.678	48.425	-5.575	54.000	AVERAGE
3	* 2450.300	30.473	73.911	104.384	50.384	54.000	AVERAGE
4	2483.500	30.830	22.391	53.221	-0.779	54.000	AVERAGE
5	2483.600	30.831	22.345	53.175	-0.825	54.000	AVERAGE
6	2500.000	30.860	19.582	50.441	-3.559	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/17 - 00:53
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2452MHz

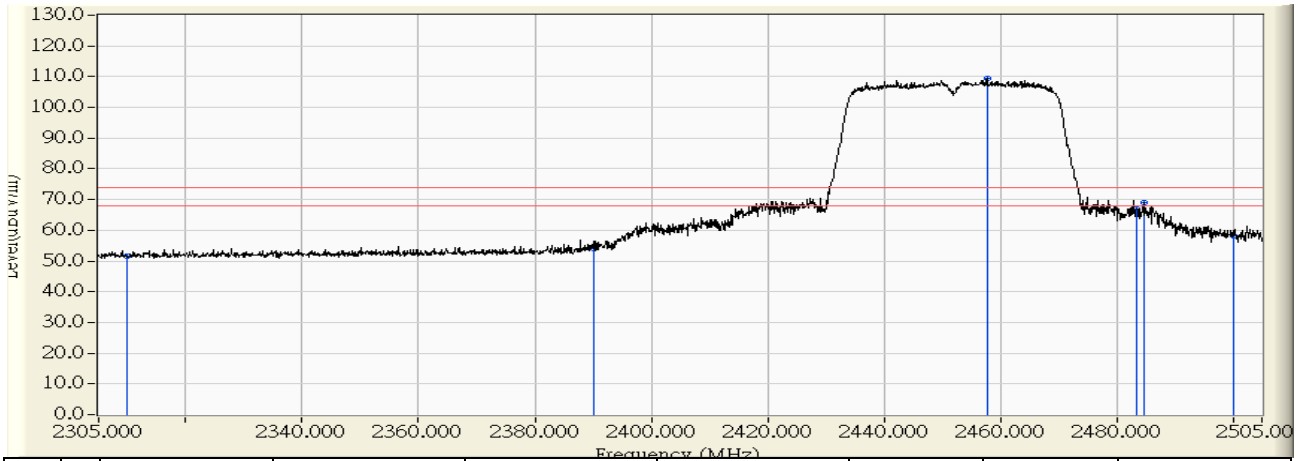


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	23.573	51.703	-22.297	74.000	PEAK
2	2390.000	28.933	24.936	53.869	-20.131	74.000	PEAK
3	* 2457.700	29.613	79.721	109.334	35.334	74.000	PEAK
4	2483.500	29.829	37.233	67.062	-6.938	74.000	PEAK
5	2484.700	29.830	39.286	69.116	-4.884	74.000	PEAK
6	2500.000	29.826	28.355	58.180	-15.820	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/17 - 00:54
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2452MHz

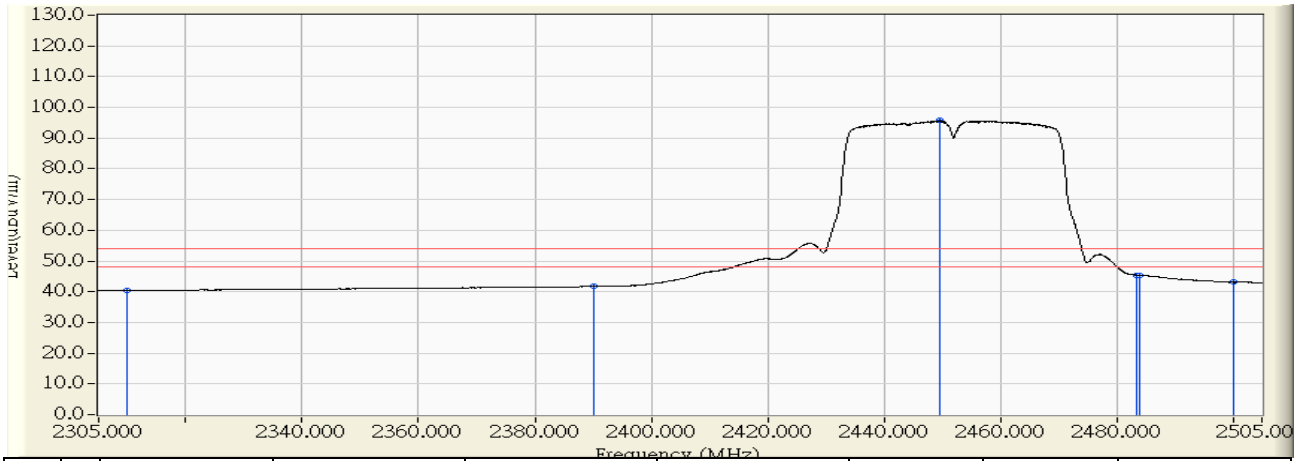


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.130	12.273	40.403	-13.597	54.000	AVERAGE
2	2390.000	28.933	12.795	41.728	-12.272	54.000	AVERAGE
3	* 2449.600	29.532	66.167	95.699	41.699	54.000	AVERAGE
4	2483.500	29.829	15.606	45.435	-8.565	54.000	AVERAGE
5	2483.900	29.830	15.550	45.379	-8.621	54.000	AVERAGE
6	2500.000	29.826	13.260	43.085	-10.915	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/17 - 00:49
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2452MHz

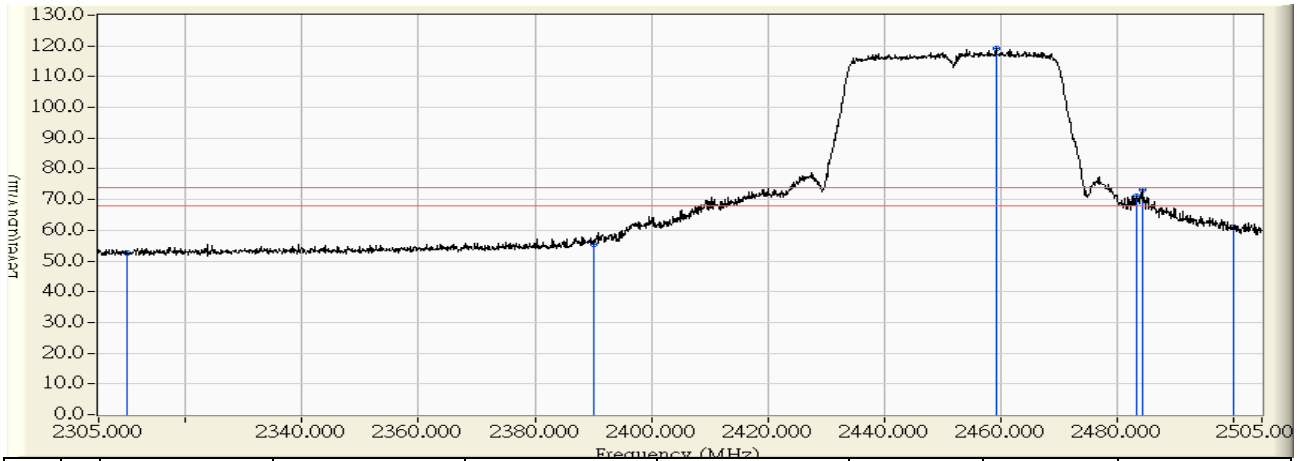


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	23.820	52.604	-21.396	74.000	PEAK
2	2390.000	29.747	25.523	55.270	-18.730	74.000	PEAK
3	* 2459.300	30.582	88.534	119.116	45.116	74.000	PEAK
4	2483.500	30.830	40.267	71.097	-2.903	74.000	PEAK
5	2484.500	30.833	42.492	73.325	-0.675	74.000	PEAK
6	2500.000	30.860	30.188	61.047	-12.953	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/17 - 00:47
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_2452MHz

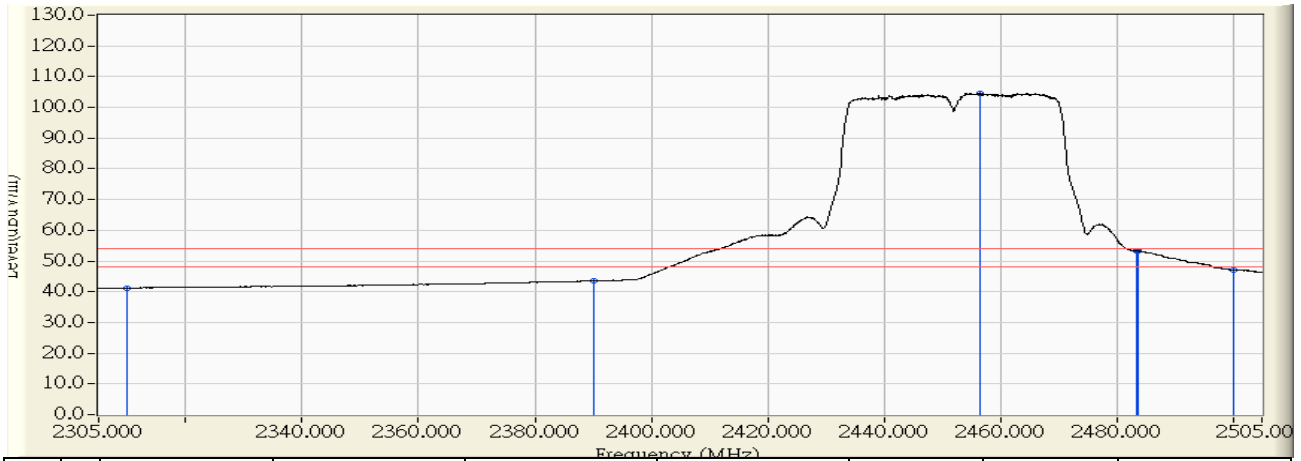


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	28.784	12.467	41.251	-12.749	54.000	AVERAGE
2	2390.000	29.747	13.766	43.513	-10.487	54.000	AVERAGE
3	* 2456.500	30.548	73.906	104.454	50.454	54.000	AVERAGE
4	2483.500	30.830	22.353	53.183	-0.817	54.000	AVERAGE
5	2483.700	30.831	22.560	53.391	-0.609	54.000	AVERAGE
6	2500.000	30.860	16.246	47.105	-6.895	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 16:36
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_5745MHz

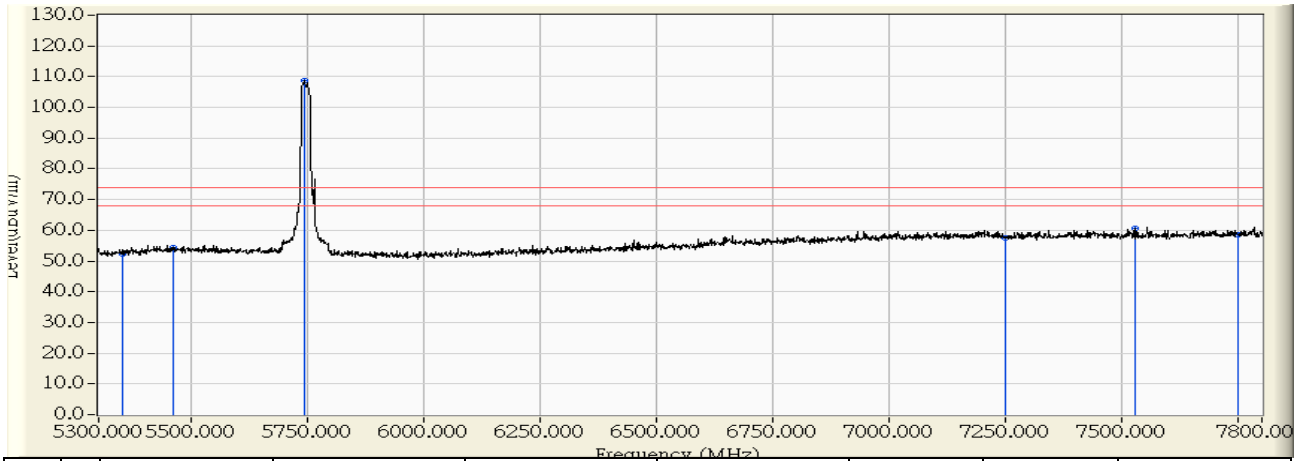


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	51.234	52.168	-21.832	74.000	PEAK
2	5460.000	1.853	52.571	54.424	-19.576	74.000	PEAK
3	* 5743.750	1.418	107.349	108.767	34.767	74.000	PEAK
4	7250.000	5.954	51.513	57.466	-16.534	74.000	PEAK
5	7526.250	6.480	54.195	60.675	-13.325	74.000	PEAK
6	7750.000	6.833	51.740	58.574	-15.426	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 16:37
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_5745MHz

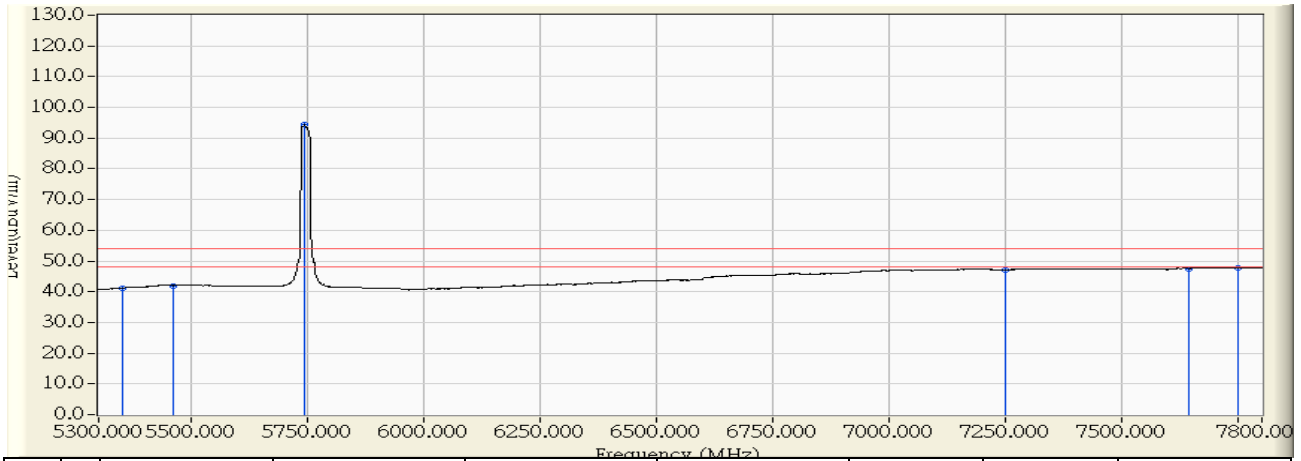


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	40.319	41.253	-12.747	54.000	AVERAGE
2	5460.000	1.853	40.137	41.990	-12.010	54.000	AVERAGE
3	* 5742.500	1.421	93.066	94.487	40.487	54.000	AVERAGE
4	7250.000	5.954	41.131	47.084	-6.916	54.000	AVERAGE
5	7642.500	6.664	40.885	47.549	-6.451	54.000	AVERAGE
6	7750.000	6.833	40.996	47.830	-6.170	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 16:41
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_5745MHz

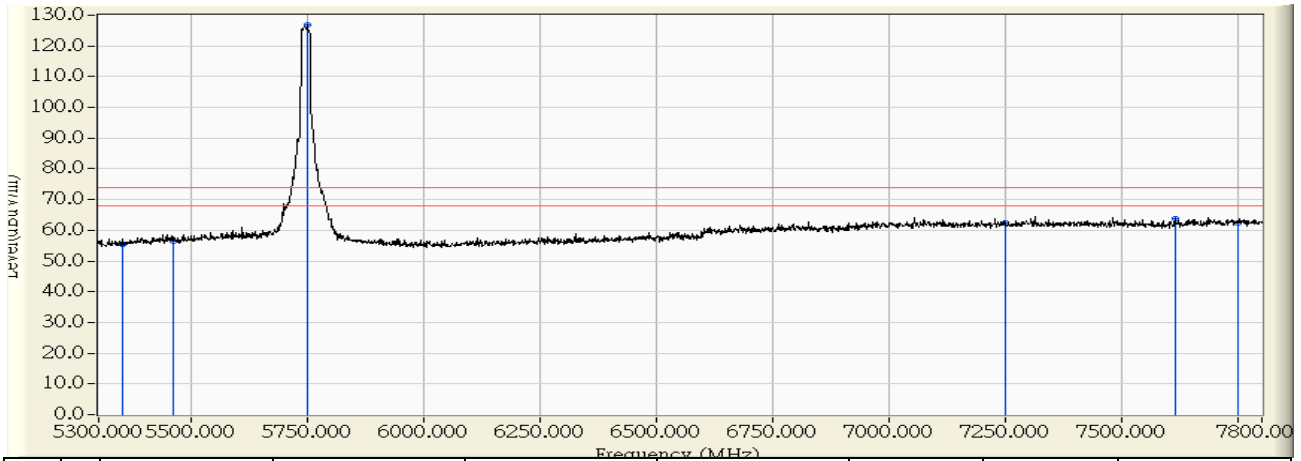


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	54.150	55.400	-18.600	74.000	PEAK
2	5460.000	2.114	54.187	56.301	-17.699	74.000	PEAK
3	* 5748.750	1.523	125.258	126.781	52.781	74.000	PEAK
4	7250.000	5.454	57.096	62.549	-11.451	74.000	PEAK
5	7612.500	6.116	57.774	63.891	-10.109	74.000	PEAK
6	7750.000	6.333	56.207	62.541	-11.459	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 16:43
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_5745MHz

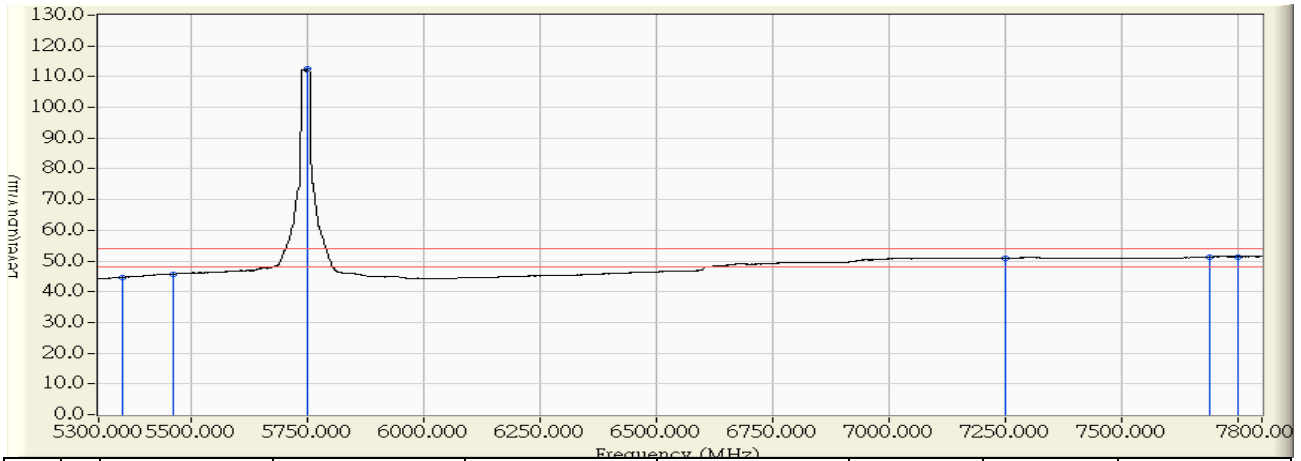


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.433	44.683	-9.317	54.000	AVERAGE
2	5460.000	2.114	43.667	45.781	-8.219	54.000	AVERAGE
3	* 5747.500	1.527	111.005	112.532	58.532	54.000	AVERAGE
4	7250.000	5.454	45.390	50.843	-3.157	54.000	AVERAGE
5	7686.250	6.233	45.053	51.286	-2.714	54.000	AVERAGE
6	7750.000	6.333	45.072	51.406	-2.594	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 17:02
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_5785MHz

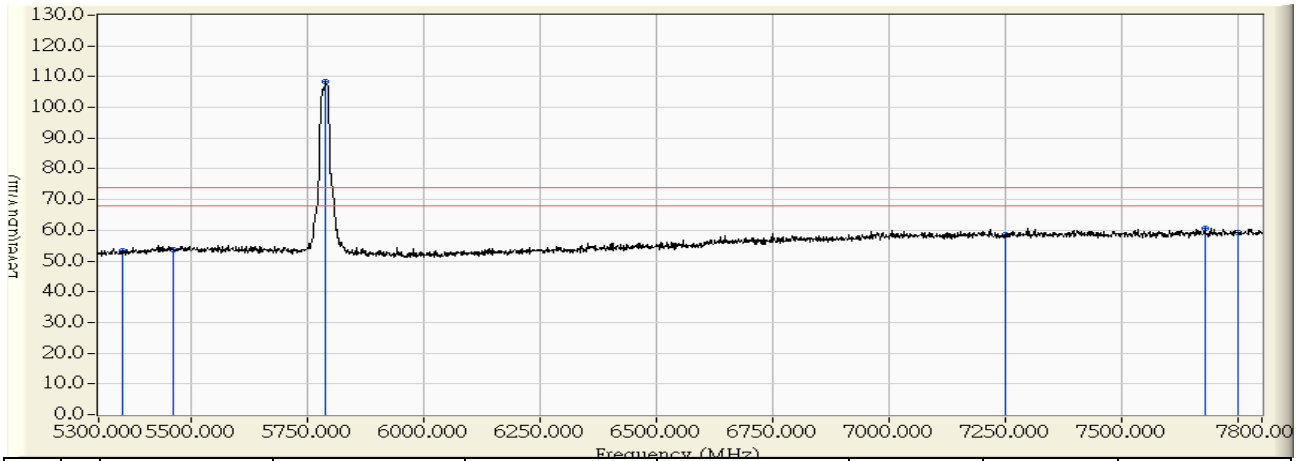


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	52.452	53.386	-20.614	74.000	PEAK
2	5460.000	1.853	51.823	53.676	-20.324	74.000	PEAK
3	* 5787.500	1.312	107.060	108.373	34.373	74.000	PEAK
4	7250.000	5.954	52.443	58.396	-15.604	74.000	PEAK
5	7677.500	6.719	54.022	60.741	-13.259	74.000	PEAK
6	7750.000	6.833	52.438	59.272	-14.728	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 17:03
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_5785MHz

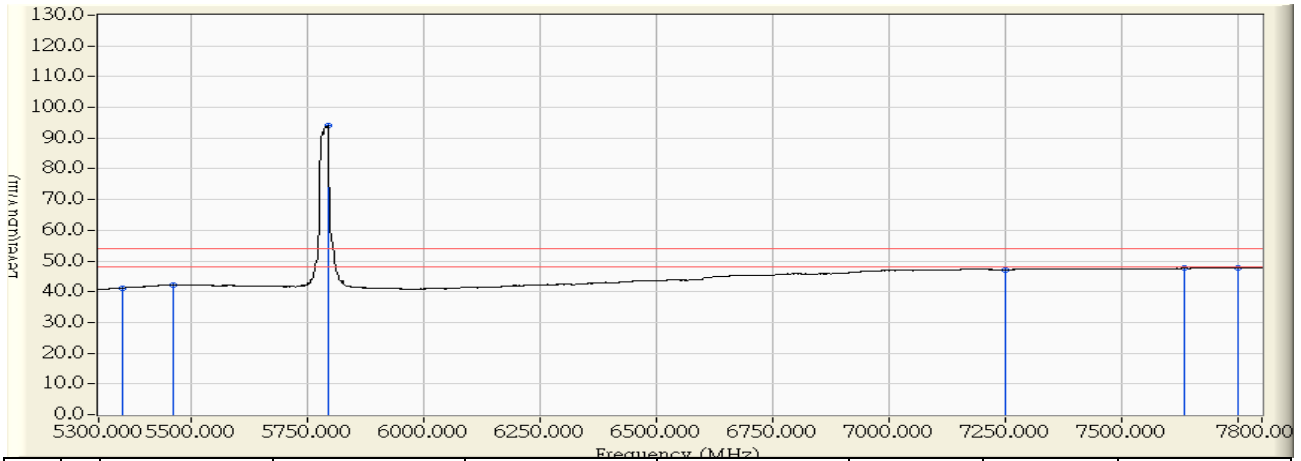


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	40.292	41.226	-12.774	54.000	AVERAGE
2	5460.000	1.853	40.224	42.077	-11.923	54.000	AVERAGE
3	* 5792.500	1.300	92.865	94.166	40.166	54.000	AVERAGE
4	7250.000	5.954	41.167	47.120	-6.880	54.000	AVERAGE
5	7632.500	6.648	41.004	47.652	-6.348	54.000	AVERAGE
6	7750.000	6.833	40.986	47.820	-6.180	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 17:12
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_5785MHz

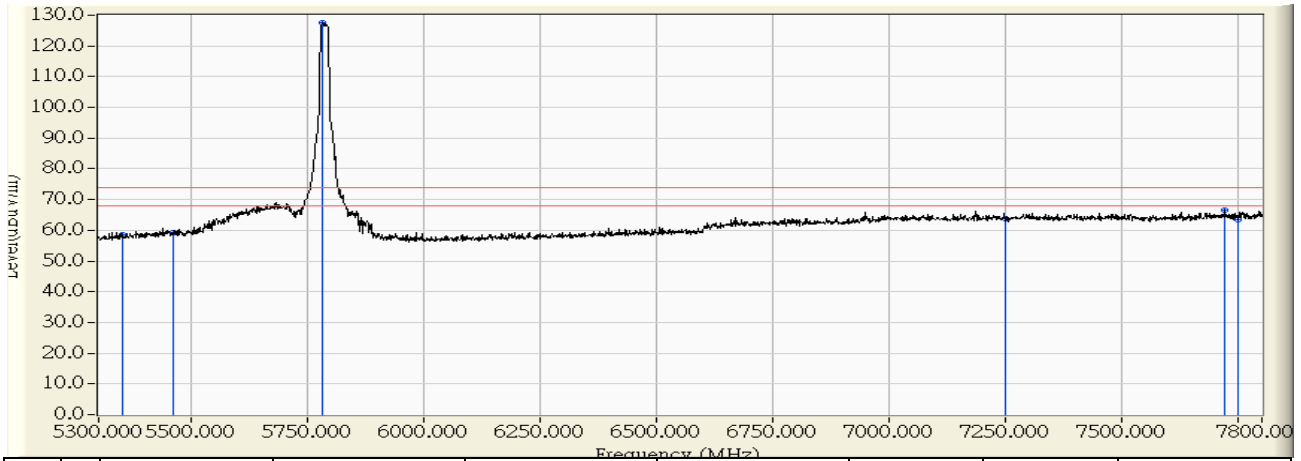


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	57.420	58.670	-15.330	74.000	PEAK
2	5460.000	2.114	57.095	59.209	-14.791	74.000	PEAK
3	* 5780.000	1.433	126.147	127.580	53.580	74.000	PEAK
4	7250.000	5.454	58.204	63.657	-10.343	74.000	PEAK
5	7721.250	6.289	60.264	66.552	-7.448	74.000	PEAK
6	7750.000	6.333	57.259	63.593	-10.407	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 17:15
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_5785MHz

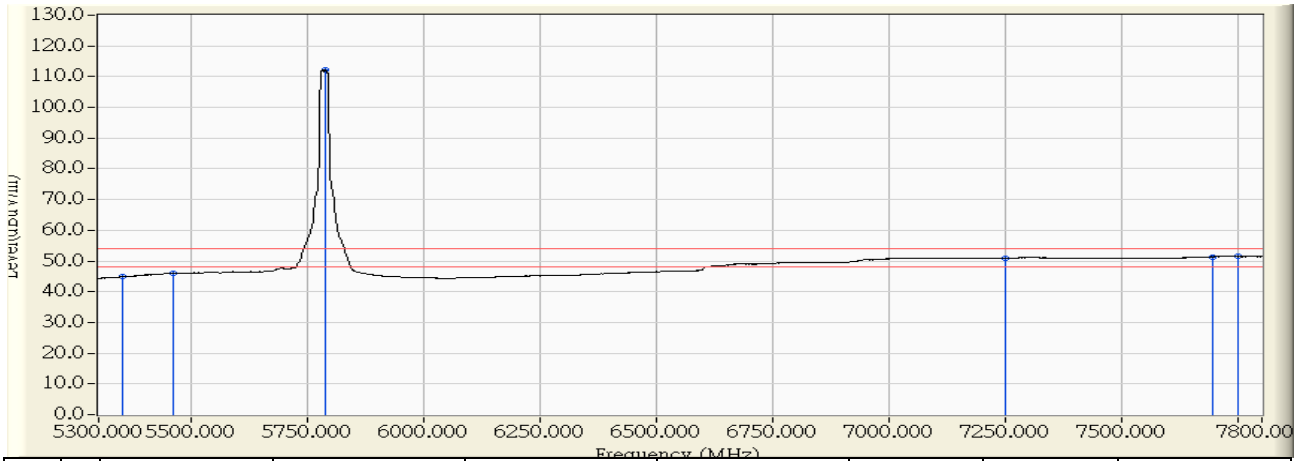


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.618	44.868	-9.132	54.000	AVERAGE
2	5460.000	2.114	43.838	45.952	-8.048	54.000	AVERAGE
3	* 5788.750	1.407	110.841	112.248	58.248	54.000	AVERAGE
4	7250.000	5.454	45.388	50.841	-3.159	54.000	AVERAGE
5	7693.750	6.245	45.115	51.360	-2.640	54.000	AVERAGE
6	7750.000	6.333	45.111	51.445	-2.555	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 17:24
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_5825MHz

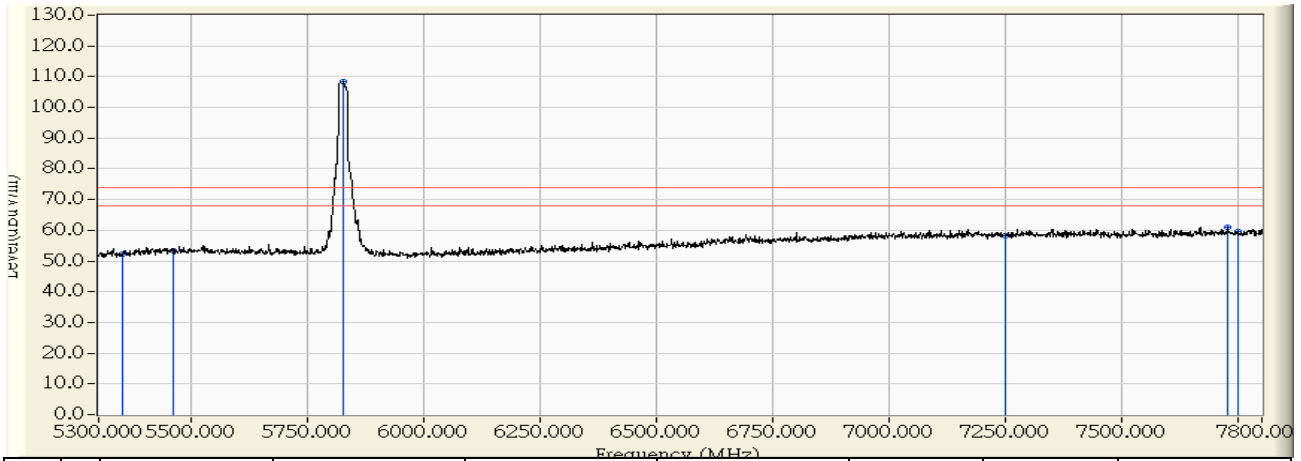


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	51.466	52.400	-21.600	74.000	PEAK
2	5460.000	1.853	51.482	53.335	-20.665	74.000	PEAK
3	* 5826.250	1.220	107.186	108.406	34.406	74.000	PEAK
4	7250.000	5.954	52.155	58.108	-15.892	74.000	PEAK
5	7726.250	6.796	54.151	60.947	-13.053	74.000	PEAK
6	7750.000	6.833	52.602	59.436	-14.564	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 17:26
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1
	802.11n(20M)_5825MHz

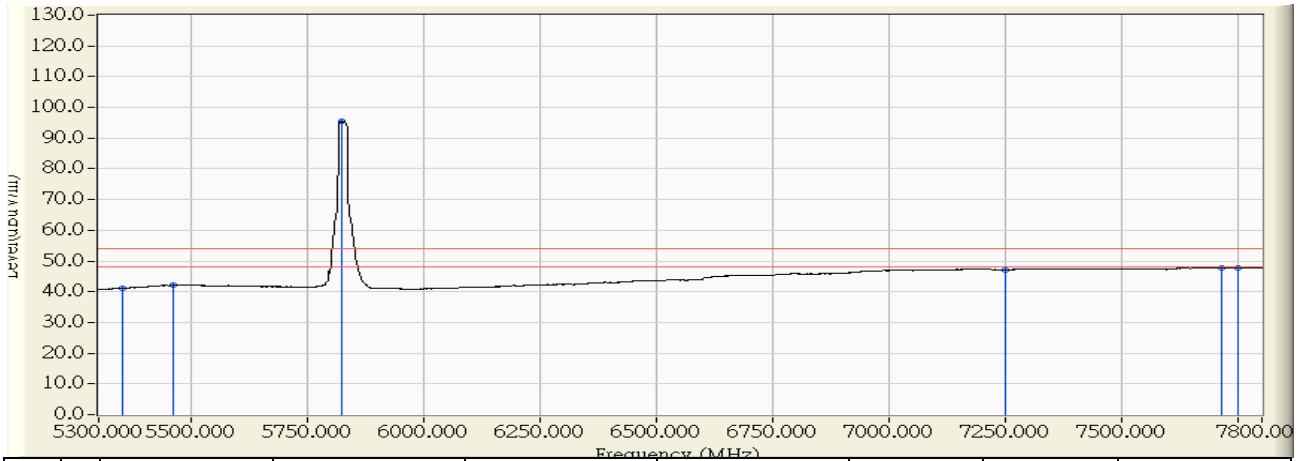


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	40.280	41.214	-12.786	54.000	AVERAGE
2	5460.000	1.853	40.168	42.021	-11.979	54.000	AVERAGE
3	* 5821.250	1.232	94.391	95.623	41.623	54.000	AVERAGE
4	7250.000	5.954	41.152	47.105	-6.895	54.000	AVERAGE
5	7712.500	6.774	41.124	47.899	-6.101	54.000	AVERAGE
6	7750.000	6.833	40.998	47.832	-6.168	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 17:31
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1
	802.11n(20M)_5825MHz

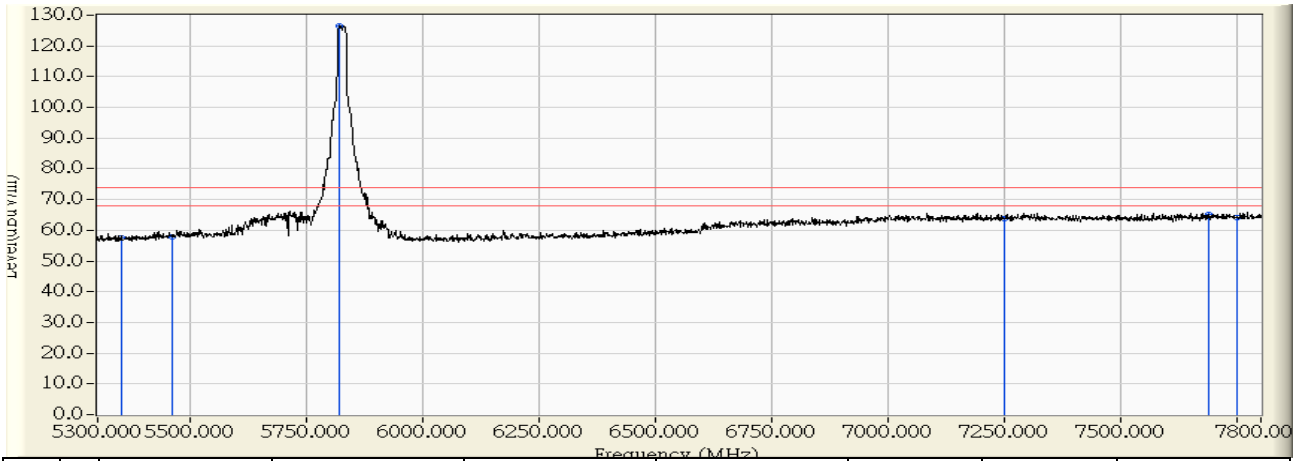


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	56.326	57.576	-16.424	74.000	PEAK
2	5460.000	2.114	55.726	57.840	-16.160	74.000	PEAK
3	* 5820.000	1.316	125.247	126.563	52.563	74.000	PEAK
4	7250.000	5.454	58.337	63.790	-10.210	74.000	PEAK
5	7688.750	6.237	59.095	65.332	-8.668	74.000	PEAK
6	7750.000	6.333	57.691	64.025	-9.975	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 17:33
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(20M)_5825MHz

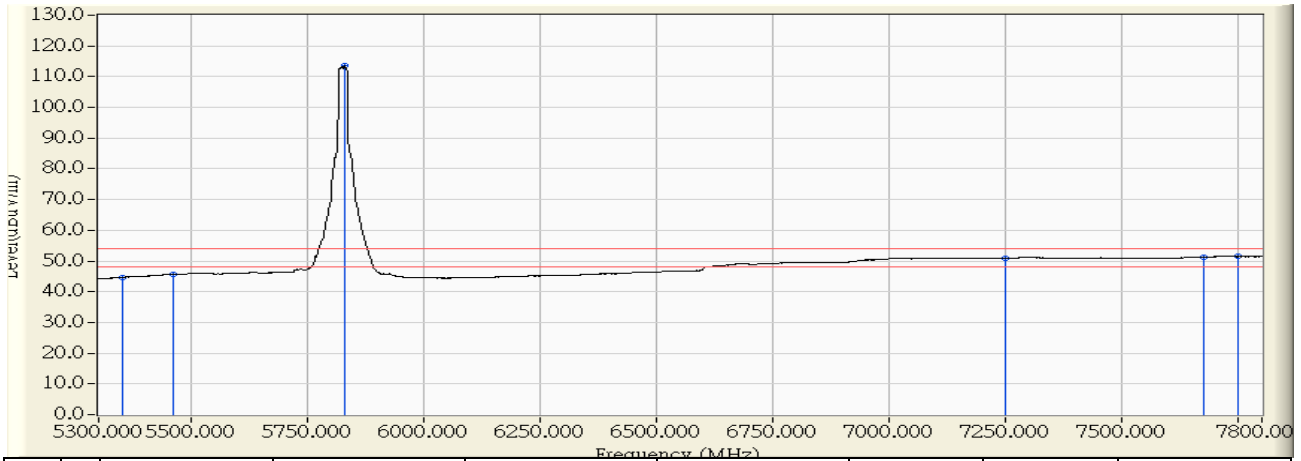


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.418	44.668	-9.332	54.000	AVERAGE
2	5460.000	2.114	43.453	45.567	-8.433	54.000	AVERAGE
3	* 5828.750	1.291	112.228	113.519	59.519	54.000	AVERAGE
4	7250.000	5.454	45.460	50.913	-3.087	54.000	AVERAGE
5	7673.750	6.213	45.068	51.281	-2.719	54.000	AVERAGE
6	7750.000	6.333	45.111	51.445	-2.555	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 17:48
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_5755MHz

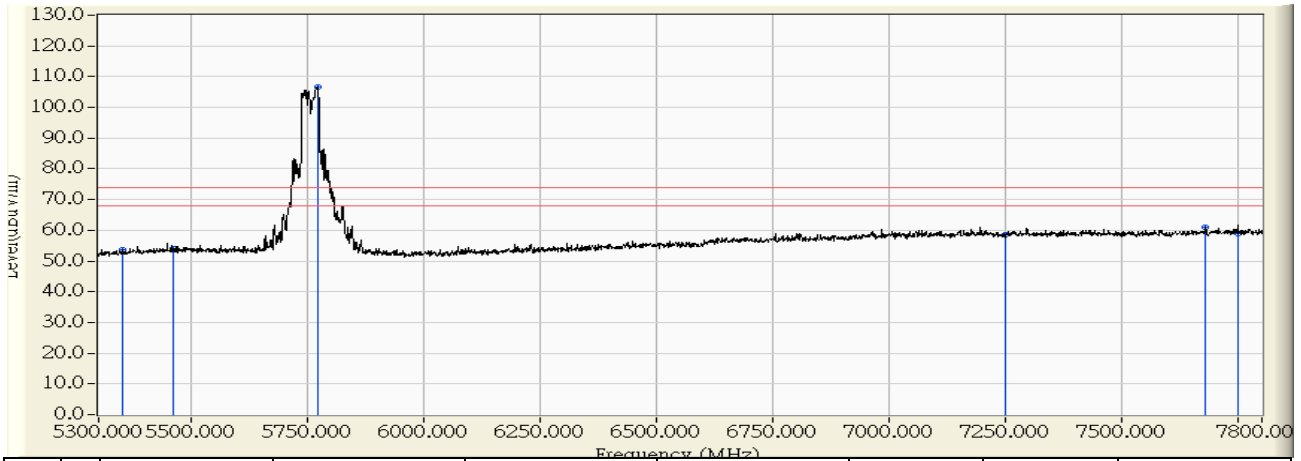


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	52.663	53.597	-20.403	74.000	PEAK
2	5460.000	1.853	52.215	54.068	-19.932	74.000	PEAK
3	* 5770.000	1.355	105.253	106.608	32.608	74.000	PEAK
4	7250.000	5.954	52.452	58.405	-15.595	74.000	PEAK
5	7678.750	6.721	54.309	61.030	-12.970	74.000	PEAK
6	7750.000	6.833	52.205	59.039	-14.961	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 17:50
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_5755MHz

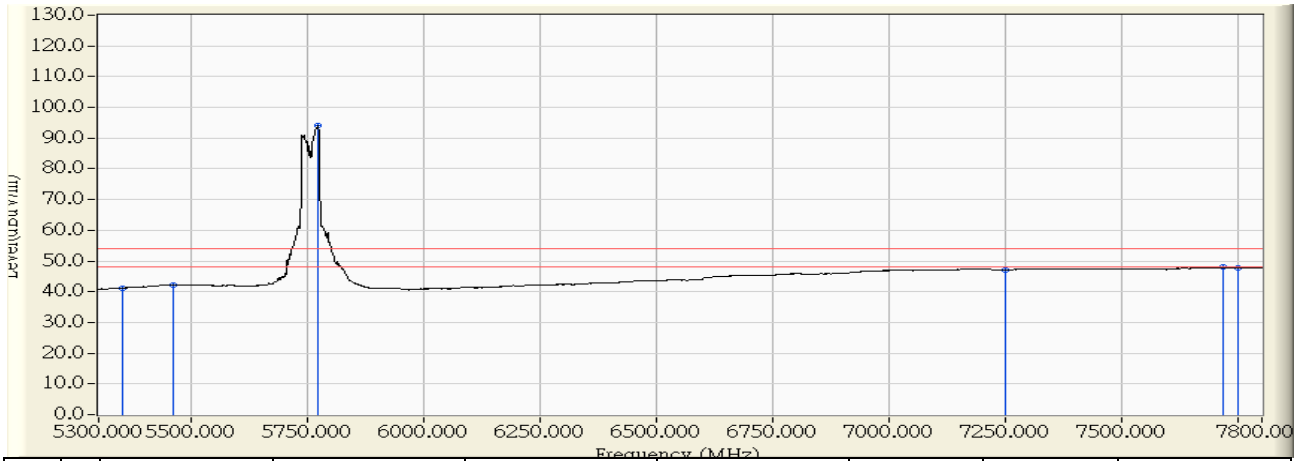


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	40.289	41.223	-12.777	54.000	AVERAGE
2	5460.000	1.853	40.193	42.046	-11.954	54.000	AVERAGE
3	* 5771.250	1.352	92.834	94.186	40.186	54.000	AVERAGE
4	7250.000	5.954	41.150	47.103	-6.897	54.000	AVERAGE
5	7717.500	6.782	41.165	47.948	-6.052	54.000	AVERAGE
6	7750.000	6.833	41.080	47.914	-6.086	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 17:56
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_5755MHz

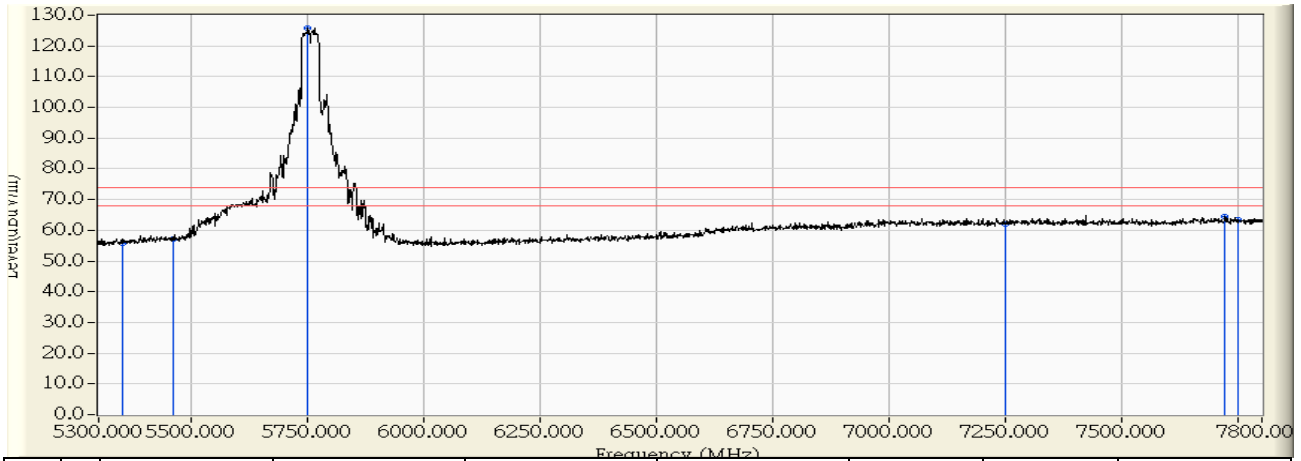


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	54.610	55.860	-18.140	74.000	PEAK
2	5460.000	2.114	55.045	57.159	-16.841	74.000	PEAK
3	* 5750.000	1.520	124.432	125.952	51.952	74.000	PEAK
4	7250.000	5.454	56.462	61.915	-12.085	74.000	PEAK
5	7720.000	6.286	58.280	64.566	-9.434	74.000	PEAK
6	7750.000	6.333	57.175	63.509	-10.491	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 17:58
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_5755MHz

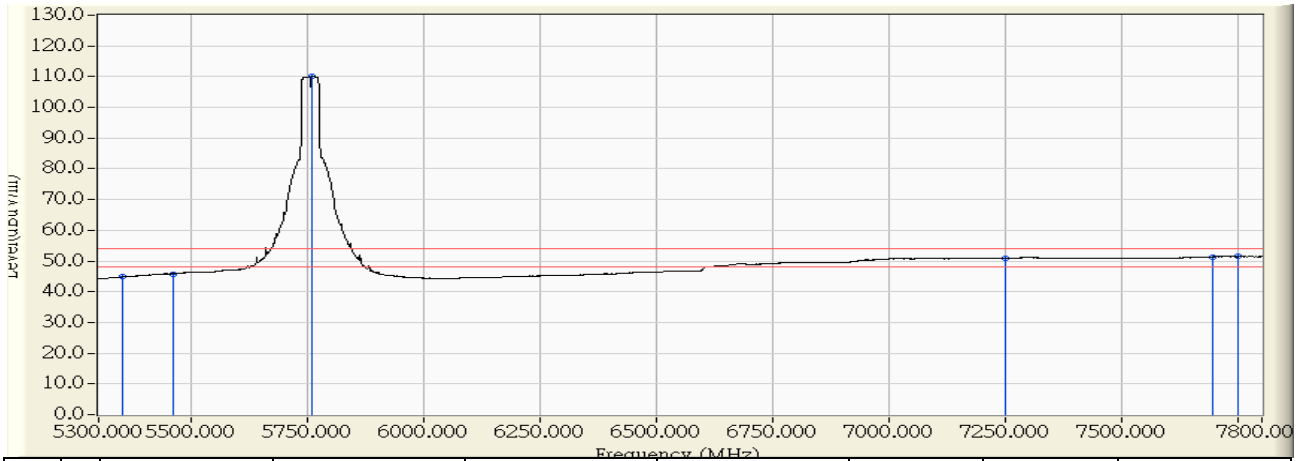


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.558	44.808	-9.192	54.000	AVERAGE
2	5460.000	2.114	43.712	45.826	-8.174	54.000	AVERAGE
3	* 5757.500	1.498	108.724	110.222	56.222	54.000	AVERAGE
4	7250.000	5.454	45.364	50.817	-3.183	54.000	AVERAGE
5	7693.750	6.245	45.161	51.406	-2.594	54.000	AVERAGE
6	7750.000	6.333	45.110	51.444	-2.556	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 18:43
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_5795MHz

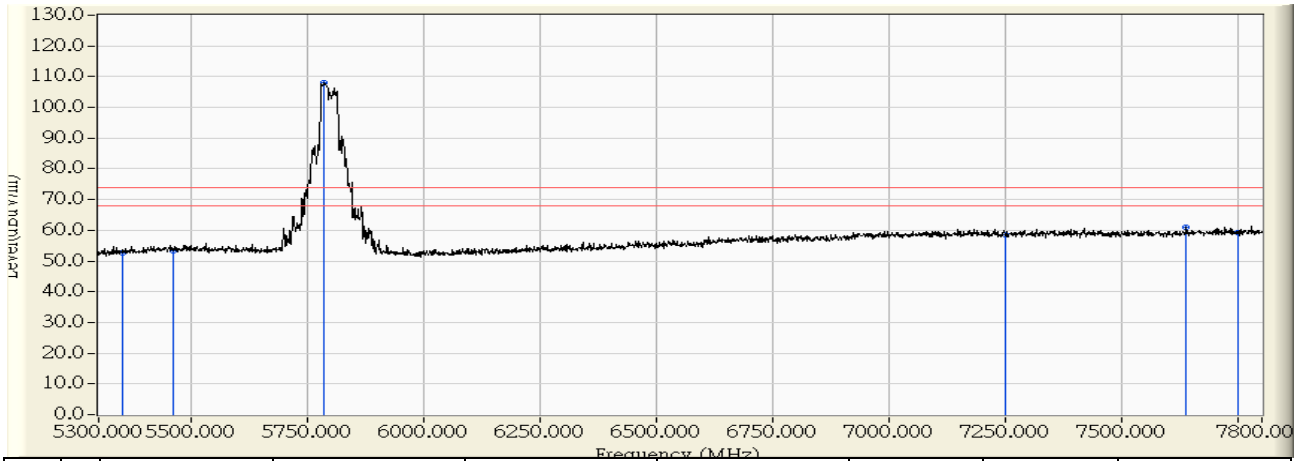


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	51.747	52.681	-21.319	74.000	PEAK
2	5460.000	1.853	51.512	53.365	-20.635	74.000	PEAK
3	* 5782.500	1.324	106.672	107.997	33.997	74.000	PEAK
4	7250.000	5.954	52.441	58.394	-15.606	74.000	PEAK
5	7637.500	6.656	54.389	61.045	-12.955	74.000	PEAK
6	7750.000	6.833	52.586	59.420	-14.580	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 18:45
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_5795MHz

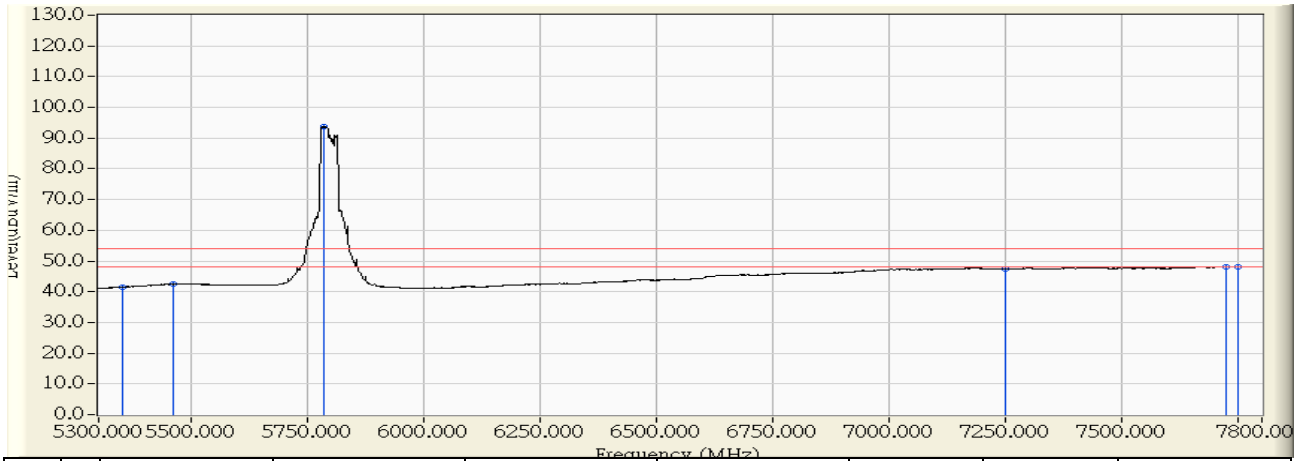


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	40.573	41.507	-12.493	54.000	AVERAGE
2	5460.000	1.853	40.531	42.384	-11.616	54.000	AVERAGE
3	* 5782.500	1.324	92.465	93.790	39.790	54.000	AVERAGE
4	7250.000	5.954	41.372	47.325	-6.675	54.000	AVERAGE
5	7722.500	6.790	41.277	48.067	-5.933	54.000	AVERAGE
6	7750.000	6.833	41.194	48.028	-5.972	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 18:49
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_5795MHz

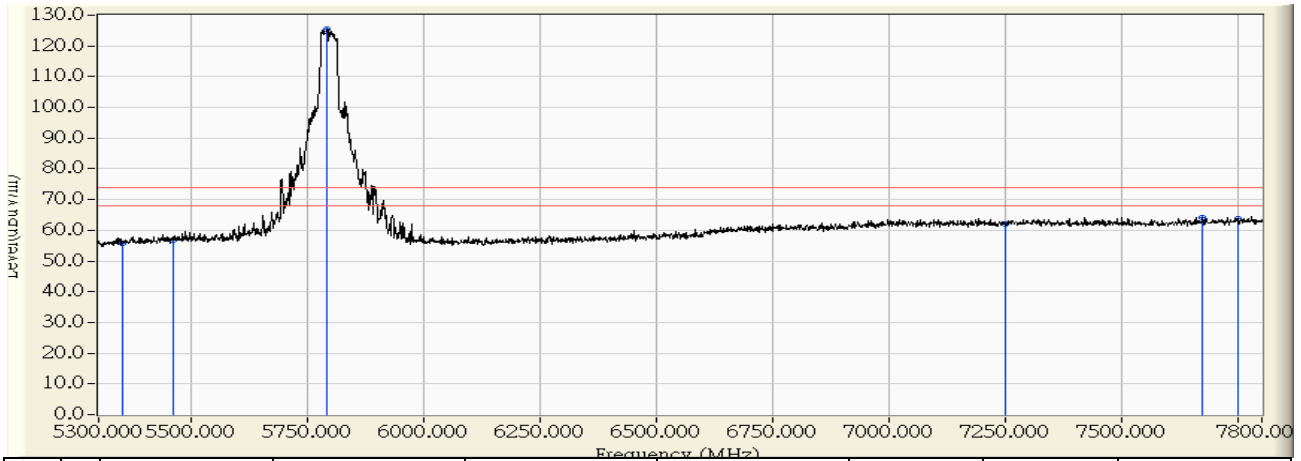


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	54.459	55.709	-18.291	74.000	PEAK
2	5460.000	2.114	54.789	56.903	-17.097	74.000	PEAK
3	* 5791.250	1.400	124.183	125.583	51.583	74.000	PEAK
4	7250.000	5.454	56.425	61.878	-12.122	74.000	PEAK
5	7672.500	6.211	57.970	64.181	-9.819	74.000	PEAK
6	7750.000	6.333	57.487	63.821	-10.179	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 18:51
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11n(40M)_5795MHz

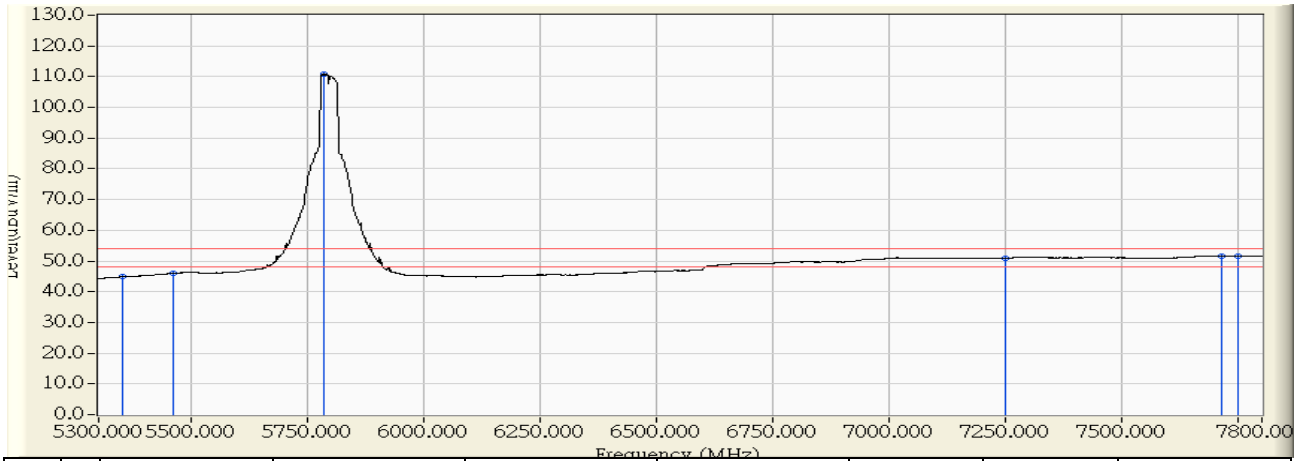


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.566	44.816	-9.184	54.000	AVERAGE
2	5460.000	2.114	43.879	45.993	-8.007	54.000	AVERAGE
3	* 5783.750	1.421	109.388	110.810	56.810	54.000	AVERAGE
4	7250.000	5.454	45.464	50.917	-3.083	54.000	AVERAGE
5	7713.750	6.277	45.458	51.735	-2.265	54.000	AVERAGE
6	7750.000	6.333	45.292	51.626	-2.374	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 19:18
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11ac(80M)_5775MHz

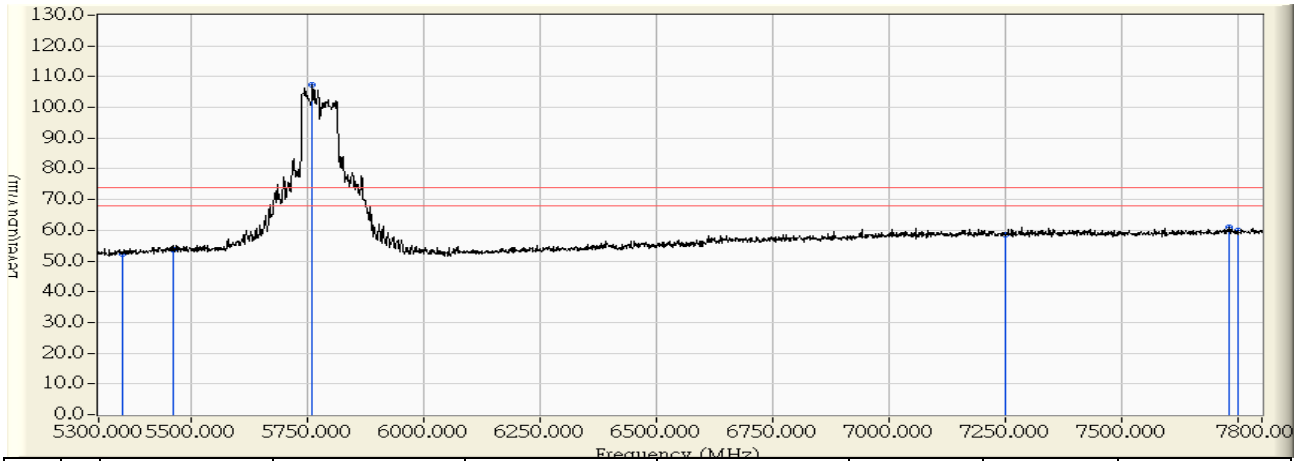


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	51.457	52.391	-21.609	74.000	PEAK
2	5460.000	1.853	51.868	53.721	-20.279	74.000	PEAK
3	* 5758.750	1.382	105.953	107.335	33.335	74.000	PEAK
4	7250.000	5.954	52.743	58.696	-15.304	74.000	PEAK
5	7730.000	6.802	54.164	60.966	-13.034	74.000	PEAK
6	7750.000	6.833	53.204	60.038	-13.962	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 19:21
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - HORIZONTAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11ac(80M)_5775MHz

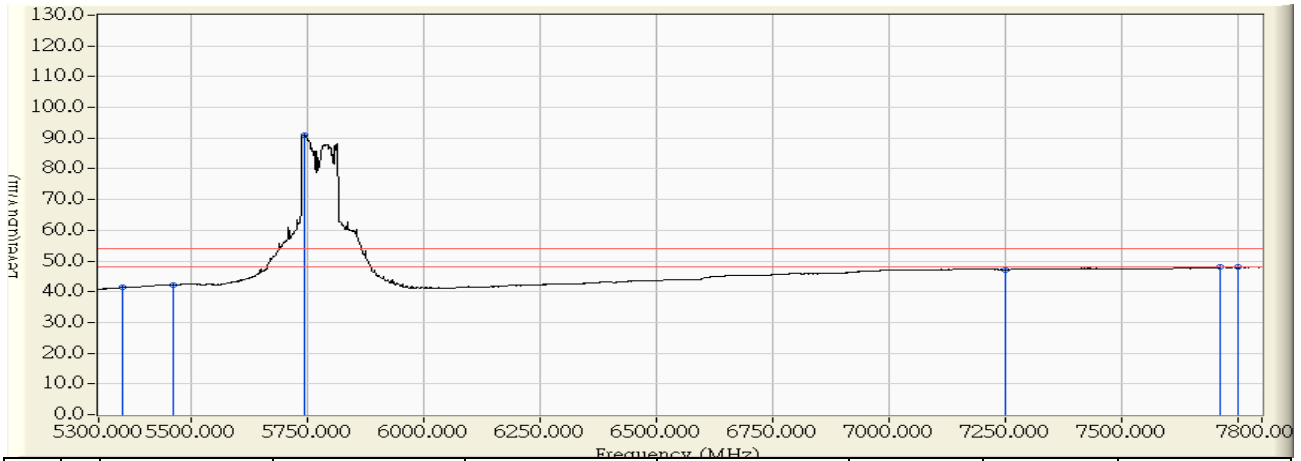


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	0.934	40.399	41.333	-12.667	54.000	AVERAGE
2	5460.000	1.853	40.388	42.241	-11.759	54.000	AVERAGE
3	* 5741.250	1.424	89.487	90.911	36.911	54.000	AVERAGE
4	7250.000	5.954	41.220	47.173	-6.827	54.000	AVERAGE
5	7711.250	6.773	41.211	47.984	-6.016	54.000	AVERAGE
6	7750.000	6.833	41.124	47.958	-6.042	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 19:25
Limit : FCC_SpartC_15.247_H_03M_PK	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11ac(80M)_5775MHz

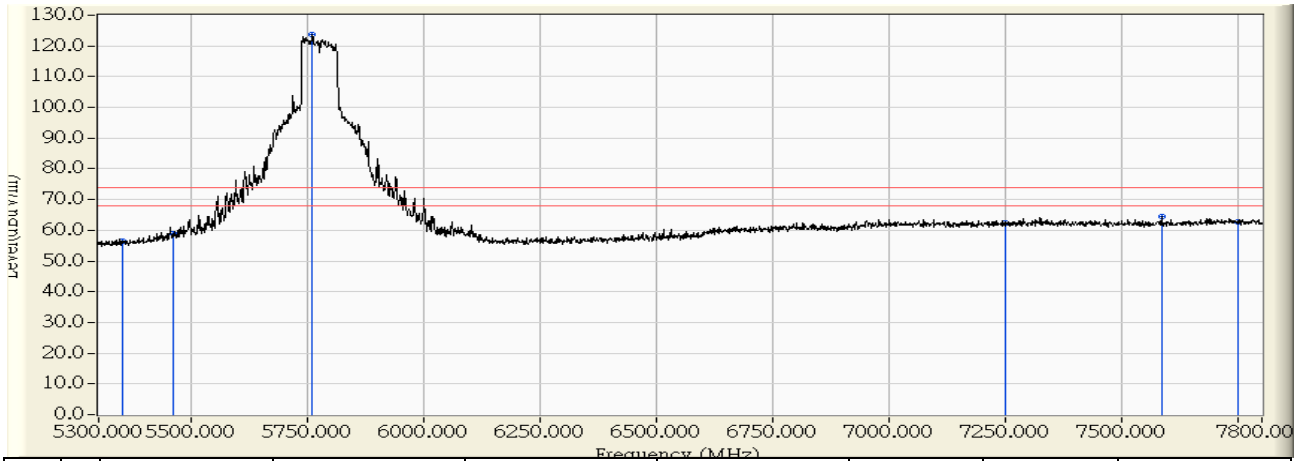


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	55.278	56.528	-17.472	74.000	PEAK
2	5460.000	2.114	56.863	58.977	-15.023	74.000	PEAK
3	* 5758.750	1.494	122.402	123.896	49.896	74.000	PEAK
4	7250.000	5.454	56.917	62.370	-11.630	74.000	PEAK
5	7583.750	6.071	58.430	64.501	-9.499	74.000	PEAK
6	7750.000	6.333	56.265	62.599	-11.401	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB1	Time : 2015/11/09 - 20:10
Limit : FCC_SpartC_15.247_H_03M_AV	Margin : 6
Probe : CB1_FCC_EFS_1-18G_H2 - VERTICAL	Power : AC 120 V / 60Hz
EUT : Wireless-AC2600 Dual WAN VPN Wireless Router	Note : Mode 2: Transmit_Beamforming Mode_Adapter 1 802.11ac(80M)_5775MHz

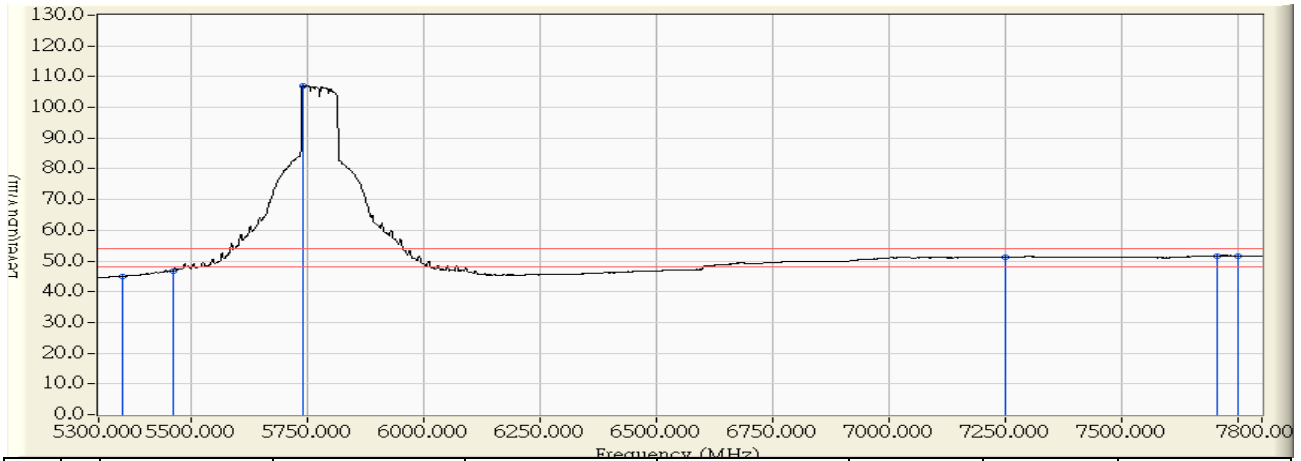

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5350.000	1.250	43.773	45.023	-8.977	54.000	AVERAGE
2	5460.000	2.114	44.696	46.810	-7.190	54.000	AVERAGE
3	* 5740.000	1.549	105.616	107.165	53.165	54.000	AVERAGE
4	7250.000	5.454	45.683	51.136	-2.864	54.000	AVERAGE
5	7703.750	6.261	45.485	51.746	-2.254	54.000	AVERAGE
6	7750.000	6.333	45.372	51.706	-2.294	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.