

FCC Test Report

Report No.: RF150717C01-1

FCC ID: MSQ-RT1E00

Test Model: RT-AC1200G

Received Date: Jul. 17, 2015

Test Date: Oct. 15 ~ Nov. 06, 2015

Issued Date: Nov. 09, 2015

Applicant: ASUSTek COMPUTER INC.

Address: 4F, NO. 150, LI-TE RD. PEITOU, TAIPEI 112, TAIWAN

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal.....	11
3.4 Description of Support Units.....	12
3.4.1 Configuration of System under Test.....	12
3.5 General Description of Applied Standards.....	12
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement.....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	14
4.1.2 Test Instruments.....	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard.....	16
4.1.5 Test Set Up.....	17
4.1.6 EUT Operating Conditions.....	17
4.1.7 Test Results.....	18
4.2 Conducted Emission Measurement.....	30
4.2.1 Limits of Conducted Emission Measurement.....	30
4.2.2 Test Instruments.....	30
4.2.3 Test Procedures.....	31
4.2.4 Deviation from Test Standard.....	31
4.2.5 Test Setup.....	31
4.2.6 EUT Operating Conditions.....	31
4.2.7 Test Results.....	32
4.3 Transmit Power Measurement.....	38
4.3.1 Limits of Transmit Power Measurement.....	38
4.3.2 Test Setup.....	38
4.3.3 Test Instruments.....	38
4.3.4 Test Procedure.....	39
4.3.5 Deviation from Test Standard.....	39
4.3.6 EUT Operating Conditions.....	39
4.3.7 Test Result.....	40
4.4 Peak Power Spectral Density Measurement.....	45
4.4.1 Limits of Peak Power Spectral Density Measurement.....	45
4.4.2 Test Setup.....	45
4.4.3 Test Instruments.....	45
4.4.4 Test Procedures.....	45
4.4.5 Deviation from Test Standard.....	45
4.4.6 EUT Operating Conditions.....	45
4.4.7 Test Results.....	46
4.5 Frequency Stability.....	48
4.5.1 Limits of Frequency Stability Measurement.....	48
4.5.2 Test Setup.....	48
4.5.3 Test Instruments.....	48
4.5.4 Test Procedure.....	48
4.5.5 Deviation from Test Standard.....	48
4.5.6 EUT Operating Condition.....	48



4.5.7 Test Results	49
5 Pictures of Test Arrangements.....	50
Appendix – Information on the Testing Laboratories	51



Release Control Record

Issue No.	Description	Date Issued
RF150717C01-1	Original release.	Nov. 09, 2015

1 Certificate of Conformity

Product: RT-AC1200G Dual Band 2x2 Wireless-AC1200 Gigabit Router

Brand: ASUS

Test Model: RT-AC1200G

Sample Status: Engineering sample

Applicant: ASUSTek COMPUTER INC.

Test Date: Oct. 15 ~ Nov. 06, 2015

Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Nov. 09, 2015
Celine Chou / Specialist

Approved by : Ken Liu , **Date:** Nov. 09, 2015
Ken Liu / Senior Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.207 15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -1.82dB at 0.50547MHz.
15.407(b) (1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.1dB at 5150.00MHz.
15.407(a)(1/2 /3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
15.407(a)(1/2 /3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex (MHF) not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.63 dB
	200MHz ~ 1000MHz	3.64 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	RT-AC1200G Dual Band 2x2 Wireless-AC1200 Gigabit Router
Brand	ASUS
Test Model	RT-AC1200G
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from adapter
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK
Modulation Technology	OFDM
Transfer Rate	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	5180 ~ 5240MHz
Number of Channel	802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1
Output Power	242.212mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Adapter
Data Cable Supplied	N/A

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX Function
802.11a	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX
802.11ac (VHT80)	2TX

* The modulation and bandwidth are similar for 802.11n mode for 20MHz / 40MHz and 802.11ac mode for 20MHz / 40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

2. The EUT consumes power from the following adapters.

Adapter 1	
Brand	Shenzhen Gongjin Electronics CO., LTD.
Model	S24B17-120A200-Y4
Input Power	100-240Vac, 50/60Hz, 0.7A
Output Power	12Vdc, 2A
Power Line	1.4m power cable without core attached on adapter

Adapter 2	
Brand	ShenZhen SOY Technology Co., Ltd
Model	SOY024A-1200200US
Input Power	100-240Vac, 50/60Hz, 0.6A
Output Power	12Vdc, 2A
Power Line	1.5m power cable with one core attached on adapter

Adapter 3	
Brand	Ten Pao International Inc.
Model	S024AMU1200200
Input Power	100-240Vac, 50/60Hz, 0.6A
Output Power	12Vdc, 2A
Power Line	1.8m power cable without core attached on adapter

3. The EUT with follow antennas gain is listed as table below.

Band	Antenna No.	Antenna type	Model	Manufacturer	connector	Gain(dBi)
2.4GHz	800000000561	Dipole	TA2450MO	Dong guan	i-pex (MHF)	5
	800000000562	Dipole	TA2450MO	Dong guan	i-pex (MHF)	5
5GHz	800000000563	Dipole	TA5X5MO	Dong guan	i-pex (MHF)	5
	800000000564	Dipole	TA5X5MO	Dong guan	i-pex (MHF)	5

3.2 Description of Test Modes

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
A	√	√	√	√	Powered by adapter 1
B	-	√	√	-	Powered by adapter 2
C	-	√	√	-	Powered by adapter 3

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE $<$ 1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.
2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	BPSK	7.2
A	802.11n (HT40)		38 to 46	38, 46	OFDM	BPSK	15.0
A	802.11ac (VHT80)		42	42	OFDM	BPSK	65.0

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B, C	802.11a	5180-5240	36 to 48	36	OFDM	BPSK	6.0

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B, C	802.11a	5180-5240	36 to 48	36	OFDM	BPSK	6.0

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	BPSK	7.2
A	802.11n (HT40)		38 to 46	38, 46	OFDM	BPSK	15.0
A	802.11ac (VHT80)		42	42	OFDM	BPSK	65.0

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	25deg. C, 65%RH	120Vac, 60Hz	Bayu Chen
RE $<$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Bayu Chen
PLC	18deg. C, 70%RH	120Vac, 60Hz	Nick Hsu
APCM	25deg. C, 60%RH	120Vac, 60Hz	Antony Lee

3.3 Duty Cycle of Test Signal


Duty cycle of test signal is < 98 %, duty factor shall be considered.

802.11a: Duty cycle = $2.037/2.175 = 0.937$, Duty factor = $10 * \log(1/0.937) = 0.28$

802.11n (HT20): Duty cycle = $1.887/2.100 = 0.899$, Duty factor = $10 * \log(1/0.899) = 0.46$

802.11n (HT40): Duty cycle = $0.900/1.075 = 0.837$, Duty factor = $10 * \log(1/0.837) = 0.77$

802.11ac (VHT80): Duty cycle = $0.437/0.549 = 0.796$, Duty factor = $10 * \log(1/0.796) = 0.99$

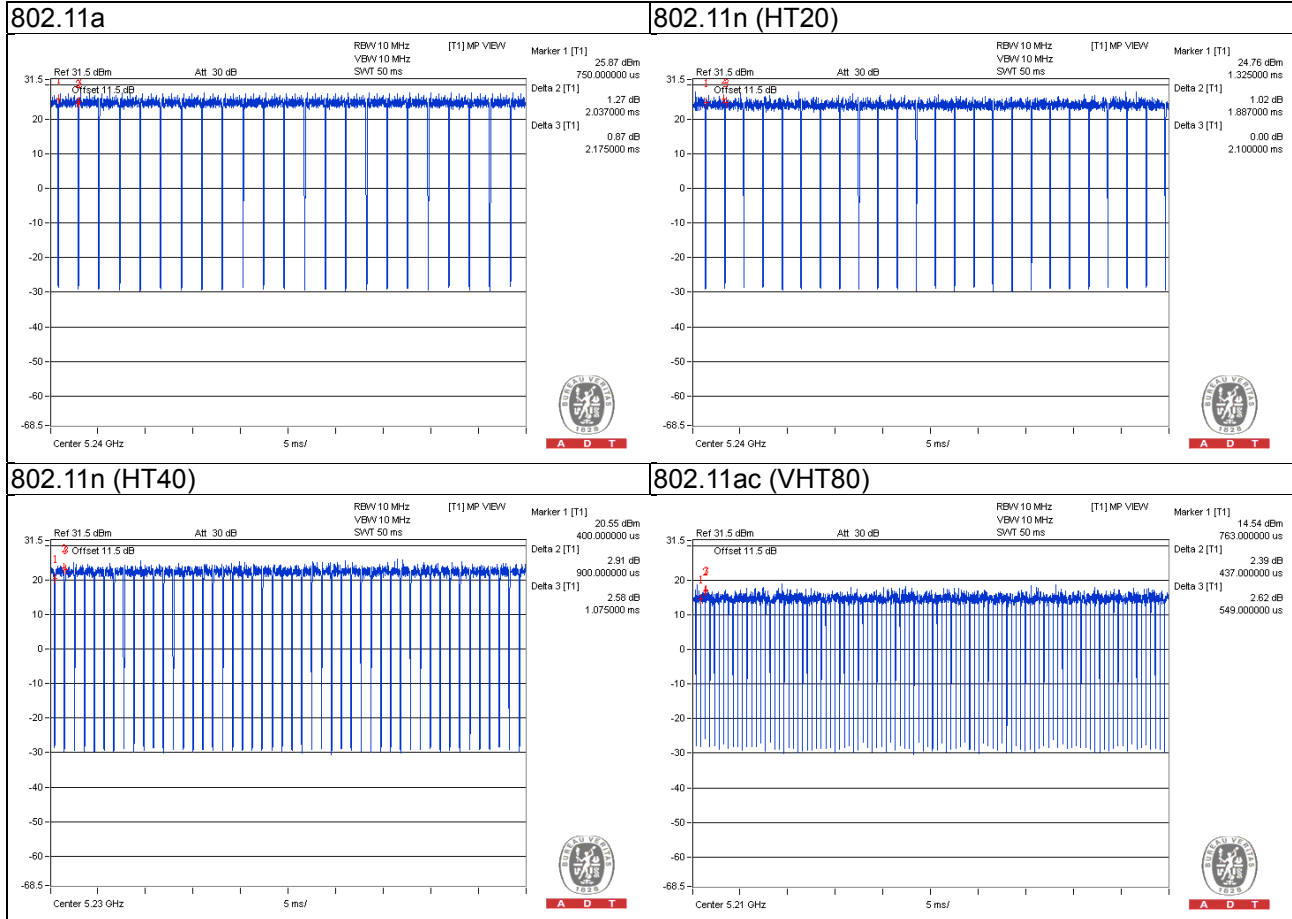

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	-
B.	Load	NA	NA	NA	NA	-
C.	USB Flash	Transcend	V85	538455 4489	FCC DoC Approved	-


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items A acted as communication partners to transfer data.


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN cable	1	3	N	0	-
2.	LAN cable	4	1.8	N	0	-

3.4.1 Configuration of System under Test

Test Mode A and C

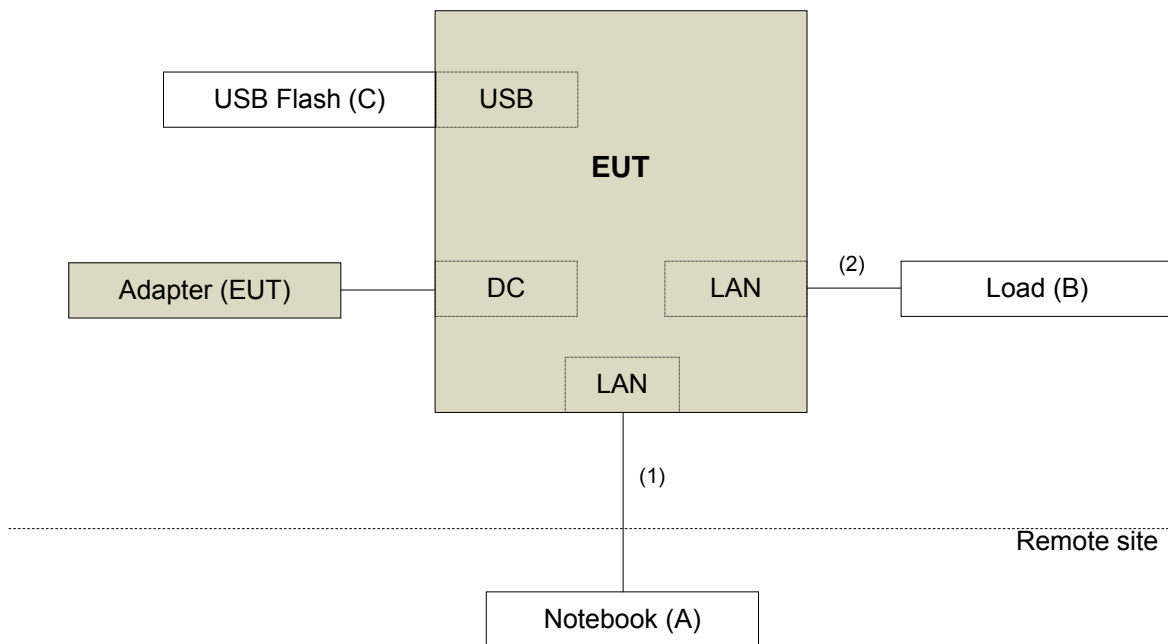

Test Mode B

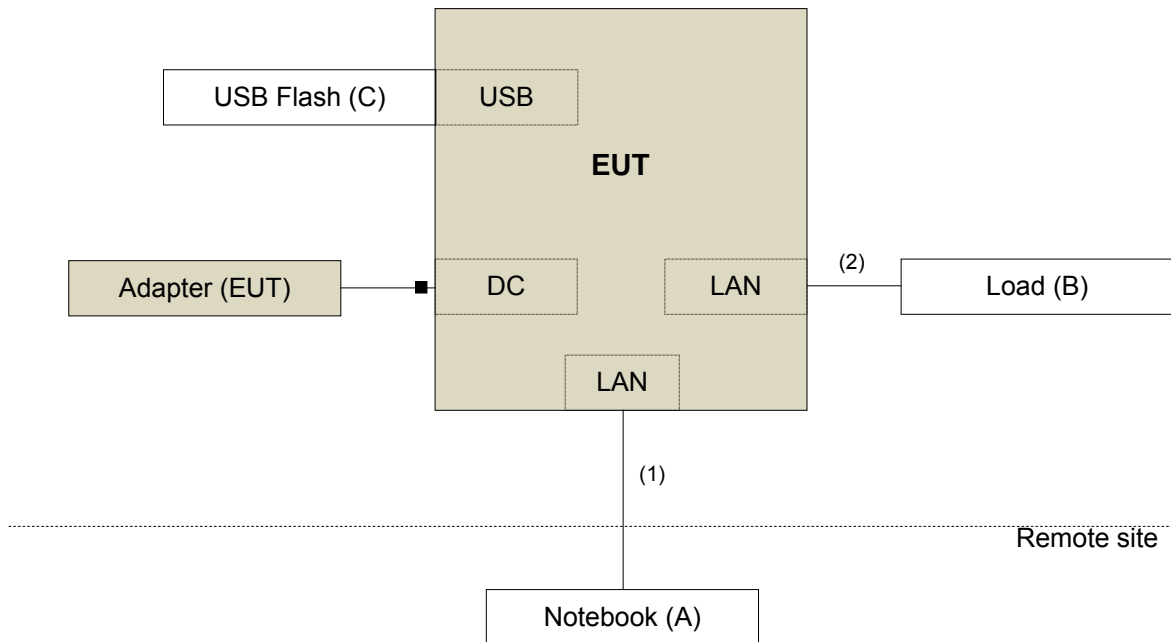

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D02 General UNII Test Procedure New Rules v01

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

Note: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedures New Rules v01	FIELD STRENGTH AT 3m	
	PK:74 (dBµV/m)	AV:54 (dBµV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBµV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	PK:-27 (dBm/MHz) ^{*1} PK:-17 (dBm/MHz) ^{*2}	PK: 68.2(dBµV/m) ^{*1} PK:78.2 (dBµV/m) ^{*2}

Note: ^{*1}beyond 10MHz of the band edge ^{*2}within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Dec. 01, 2014	Nov. 30, 2015
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Mar. 30, 2015	Mar. 29, 2016
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Feb. 06, 2015	Feb. 05, 2016
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Feb. 09, 2015	Feb. 08, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Feb. 09, 2015	Feb. 08, 2016
Preamplifier Agilent	8449B	3008A01911	Aug. 09, 2015	Aug. 08, 2016
Preamplifier Agilent	8447D	2944A10638	Aug. 09, 2015	Aug. 08, 2016
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-02(309222 +248780)	Aug. 09, 2015	Aug. 08, 2016
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-03(274092)	Aug. 09, 2015	Aug. 08, 2016
RF signal cable Woken	8D-FB	Cable-CH9-01	Aug. 11, 2015	Aug. 10, 2016
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2015	Oct. 17, 2016
High Speed Peak Power Meter	ML2495A	0824011	Jul. 09, 2015	Jul. 08, 2016
Power Sensor	MA2411B	0738171	Jul. 09, 2015	Jul. 08, 2016
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 08, 2015	Jun. 07, 2016

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 215374.
 5. The IC Site Registration No. is IC 7450F-9.

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

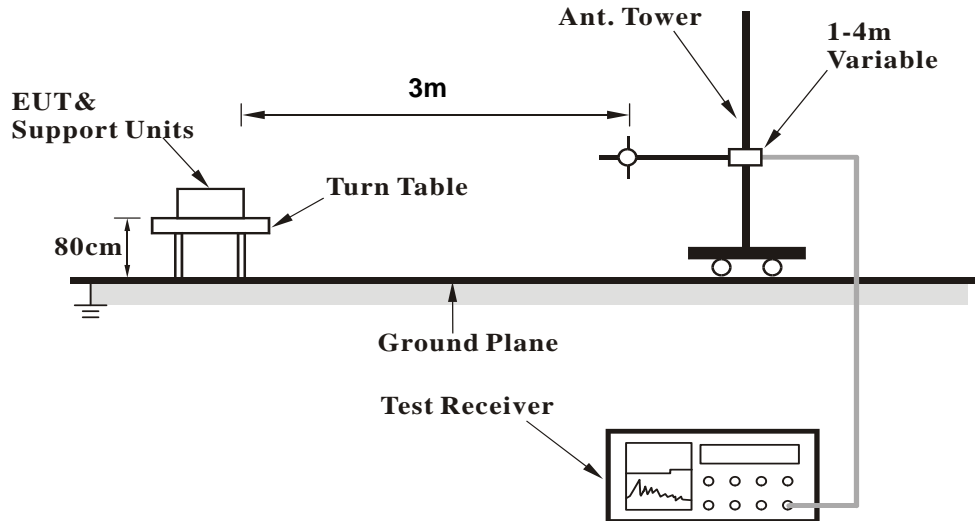

<Frequency Range above 1GHz>

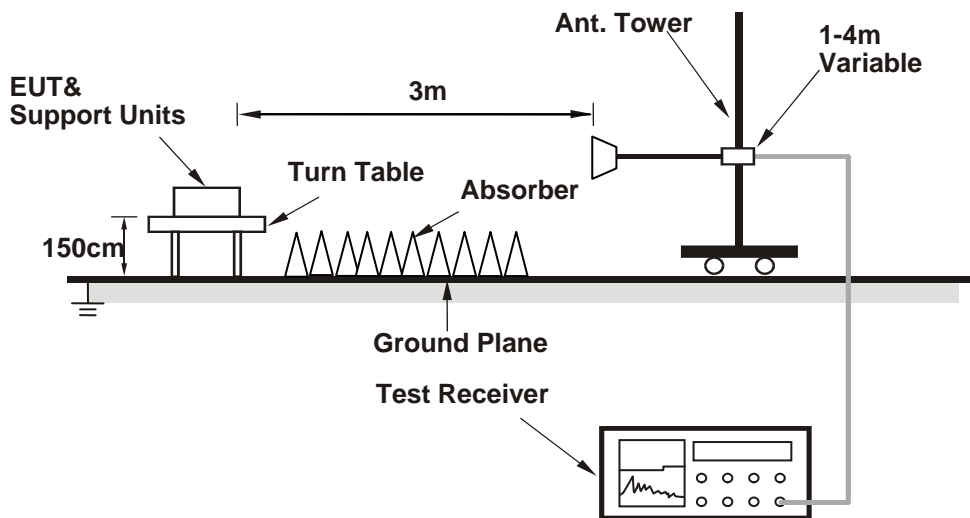

For the actual test configuration, please refer to the attached file (Test Setup Photo)

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared notebook to act as communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".
- The necessary accessories enable the system in full functions.

4.1.7 Test Results

Above 1GHz worst-case Data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.7 PK	74.0	-15.3	1.00 H	226	54.80	3.90
2	5150.00	46.0 AV	54.0	-8.0	1.00 H	226	42.10	3.90
3	*5180.00	97.9 PK			1.00 H	226	56.40	41.50
4	*5180.00	88.8 AV			1.00 H	226	47.30	41.50
5	#10360.00	65.1 PK	74.0	-8.9	1.14 H	58	49.80	15.30
6	#10360.00	50.5 AV	54.0	-3.5	1.14 H	58	35.20	15.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.2 PK	74.0	-7.8	1.68 V	133	62.30	3.90
2	5150.00	51.2 AV	54.0	-2.8	1.68 V	133	47.30	3.90
3	*5180.00	114.5 PK			1.68 V	133	73.00	41.50
4	*5180.00	103.8 AV			1.68 V	133	62.30	41.50
5	#10360.00	66.9 PK	74.0	-7.1	1.18 V	20	51.60	15.30
6	#10360.00	51.7 AV	54.0	-2.3	1.18 V	20	36.40	15.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.1 PK	74.0	-16.9	1.48 H	226	53.20	3.90
2	5150.00	46.2 AV	54.0	-7.8	1.48 H	226	42.30	3.90
3	*5200.00	101.1 PK			1.48 H	226	59.60	41.50
4	*5200.00	91.2 AV			1.48 H	226	49.70	41.50
5	5350.00	57.6 PK	74.0	-16.4	1.48 H	226	53.60	4.00
6	5350.00	45.7 AV	54.0	-8.3	1.48 H	226	41.70	4.00
7	#10400.00	63.8 PK	74.0	-10.2	1.20 H	68	48.30	15.50
8	#10400.00	50.1 AV	54.0	-3.9	1.20 H	68	34.60	15.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.8 PK	74.0	-13.2	1.57 V	179	56.90	3.90
2	5150.00	49.0 AV	54.0	-5.0	1.57 V	179	45.10	3.90
3	*5200.00	116.1 PK			1.57 V	179	74.60	41.50
4	*5200.00	106.5 AV			1.57 V	179	65.00	41.50
5	5350.00	60.4 PK	74.0	-13.6	1.57 V	179	56.40	4.00
6	5350.00	49.0 AV	54.0	-5.0	1.57 V	179	45.00	4.00
7	#10400.00	66.4 PK	74.0	-7.6	1.02 V	21	50.90	15.50
8	#10400.00	52.0 AV	54.0	-2.0	1.02 V	21	36.50	15.50

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	102.9 PK			1.12 H	234	61.30	41.60
2	*5240.00	93.0 AV			1.12 H	234	51.40	41.60
3	5350.00	58.7 PK	74.0	-15.3	1.12 H	234	54.70	4.00
4	5350.00	46.1 AV	54.0	-7.9	1.12 H	234	42.10	4.00
5	#10480.00	65.8 PK	74.0	-8.2	1.22 H	79	50.00	15.80
6	#10480.00	50.7 AV	54.0	-3.3	1.22 H	79	34.90	15.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.0 PK			1.63 V	179	76.40	41.60
2	*5240.00	108.3 AV			1.63 V	179	66.70	41.60
3	5350.00	62.1 PK	74.0	-11.9	1.63 V	179	58.10	4.00
4	5350.00	49.3 AV	54.0	-4.7	1.63 V	179	45.30	4.00
5	#10480.00	67.0 PK	74.0	-7.0	1.54 V	342	51.20	15.80
6	#10480.00	51.9 AV	54.0	-2.1	1.54 V	342	36.10	15.80

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.1 PK	74.0	-14.9	1.00 H	224	55.20	3.90
2	5150.00	46.3 AV	54.0	-7.7	1.00 H	224	42.40	3.90
3	*5180.00	98.2 PK			1.00 H	224	56.70	41.50
4	*5180.00	89.3 AV			1.00 H	224	47.80	41.50
5	#10360.00	65.4 PK	74.0	-8.6	1.00 H	62	50.10	15.30
6	#10360.00	50.6 AV	54.0	-3.4	1.00 H	62	35.30	15.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.6 PK	74.0	-9.4	1.67 V	200	60.70	3.90
2	5150.00	52.9 AV	54.0	-1.1	1.67 V	200	49.00	3.90
3	*5180.00	116.1 PK			1.67 V	200	74.60	41.50
4	*5180.00	105.9 AV			1.67 V	200	64.40	41.50
5	#10360.00	66.4 PK	74.0	-7.6	1.03 V	20	51.10	15.30
6	#10360.00	51.6 AV	54.0	-2.4	1.03 V	20	36.30	15.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	99.1 PK			1.02 H	264	57.60	41.50
2	*5200.00	89.8 AV			1.02 H	264	48.30	41.50
3	#10400.00	65.2 PK	74.0	-8.8	1.08 H	56	49.70	15.50
4	#10400.00	50.5 AV	54.0	-3.5	1.08 H	56	35.00	15.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	115.3 PK			1.71 V	175	73.80	41.50
2	*5200.00	105.7 AV			1.71 V	175	64.20	41.50
3	#10400.00	66.4 PK	74.0	-7.6	1.10 V	18	50.90	15.50
4	#10400.00	51.6 AV	54.0	-2.4	1.10 V	18	36.10	15.50

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	100.9 PK			1.00 H	249	59.30	41.60
2	*5240.00	91.2 AV			1.00 H	249	49.60	41.60
3	5350.00	58.6 PK	74.0	-15.4	1.00 H	249	54.60	4.00
4	5350.00	45.3 AV	54.0	-8.7	1.00 H	249	41.30	4.00
5	#10480.00	65.1 PK	74.0	-8.9	1.12 H	66	49.30	15.80
6	#10480.00	50.8 AV	54.0	-3.2	1.12 H	66	35.00	15.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.0 PK			1.55 V	200	75.40	41.60
2	*5240.00	106.7 AV			1.55 V	200	65.10	41.60
3	5350.00	60.7 PK	74.0	-13.3	1.55 V	200	56.70	4.00
4	5350.00	47.8 AV	54.0	-6.2	1.55 V	200	43.80	4.00
5	#10480.00	66.7 PK	74.0	-7.3	1.27 V	17	50.90	15.80
6	#10480.00	51.9 AV	54.0	-2.1	1.27 V	17	36.10	15.80

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.6 PK	74.0	-15.4	1.11 H	221	54.70	3.90
2	5150.00	46.3 AV	54.0	-7.7	1.11 H	221	42.40	3.90
3	*5190.00	95.1 PK			1.11 H	221	53.60	41.50
4	*5190.00	84.8 AV			1.11 H	221	43.30	41.50
5	#10380.00	61.4 PK	74.0	-12.6	1.08 H	69	46.00	15.40
6	#10380.00	48.0 AV	54.0	-6.0	1.08 H	69	32.60	15.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.3 PK	74.0	-5.7	1.65 V	179	64.40	3.90
2	5150.00	52.6 AV	54.0	-1.4	1.65 V	179	48.70	3.90
3	*5190.00	110.6 PK			1.65 V	179	69.10	41.50
4	*5190.00	100.5 AV			1.65 V	179	59.00	41.50
5	#10380.00	62.4 PK	74.0	-11.6	1.21 V	18	47.00	15.40
6	#10380.00	48.9 AV	54.0	-5.1	1.21 V	18	33.50	15.40

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.3 PK	74.0	-16.7	1.09 H	219	53.40	3.90
2	5150.00	46.2 AV	54.0	-7.8	1.09 H	219	42.30	3.90
3	*5230.00	98.9 PK			1.09 H	219	57.30	41.60
4	*5230.00	89.4 AV			1.09 H	219	47.80	41.60
5	5350.00	58.9 PK	74.0	-15.1	1.09 H	219	54.90	4.00
6	5350.00	45.9 AV	54.0	-8.1	1.09 H	219	41.90	4.00
7	#10460.00	65.6 PK	74.0	-8.4	1.10 H	71	50.10	15.50
8	#10460.00	50.8 AV	54.0	-3.2	1.10 H	71	35.30	15.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.4 PK	74.0	-10.6	1.67 V	178	59.50	3.90
2	5150.00	51.2 AV	54.0	-2.8	1.67 V	178	47.30	3.90
3	*5230.00	115.6 PK			1.67 V	178	74.00	41.60
4	*5230.00	105.5 AV			1.67 V	178	63.90	41.60
5	5350.00	64.0 PK	74.0	-10.0	1.67 V	178	60.00	4.00
6	5350.00	50.3 AV	54.0	-3.7	1.67 V	178	46.30	4.00
7	#10460.00	66.7 PK	74.0	-7.3	1.19 V	17	51.20	15.50
8	#10460.00	51.7 AV	54.0	-2.3	1.19 V	17	36.20	15.50

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.2 PK	74.0	-14.8	1.00 H	183	55.30	3.90
2	5150.00	46.3 AV	54.0	-7.7	1.00 H	183	42.40	3.90
3	*5210.00	89.3 PK			1.00 H	183	47.70	41.60
4	*5210.00	80.4 AV			1.00 H	183	38.80	41.60
5	#10420.00	59.6 PK	74.0	-14.4	1.03 H	215	44.10	15.50
6	#10420.00	47.1 AV	54.0	-6.9	1.03 H	215	31.60	15.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.7 PK	74.0	-7.3	1.78 V	196	62.80	3.90
2	5150.00	52.5 AV	54.0	-1.5	1.78 V	196	48.60	3.90
3	*5210.00	108.3 PK			1.78 V	196	66.70	41.60
4	*5210.00	97.8 AV			1.78 V	196	56.20	41.60
5	#10420.00	60.2 PK	74.0	-13.8	1.00 V	324	44.70	15.50
6	#10420.00	47.7 AV	54.0	-6.3	1.00 V	324	32.20	15.50

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz worst-case data: 802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	66.86	32.4 QP	40.0	-7.6	1.00 H	83	48.00	-15.60
2	125.06	29.1 QP	43.5	-14.4	1.24 H	84	45.10	-16.00
3	179.38	27.6 QP	43.5	-15.9	1.49 H	105	42.70	-15.10
4	233.70	29.8 QP	46.0	-16.2	1.00 H	111	45.50	-15.70
5	499.48	28.8 QP	46.0	-17.2	1.24 H	282	37.40	-8.60
6	842.86	30.7 QP	46.0	-15.3	1.99 H	5	32.60	-1.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.28	32.9 QP	40.0	-7.1	1.00 V	11	47.00	-14.10
2	125.06	29.0 QP	43.5	-14.5	1.00 V	13	45.00	-16.00
3	152.22	35.0 QP	43.5	-8.5	1.24 V	291	48.80	-13.80
4	231.76	30.1 QP	46.0	-15.9	1.00 V	312	46.30	-16.20
5	499.48	30.8 QP	46.0	-15.2	1.00 V	203	39.40	-8.60
6	875.84	31.6 QP	46.0	-14.4	1.00 V	208	33.30	-1.70

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.88	29.2 QP	40.0	-10.8	1.51 H	227	44.80	-15.60
2	142.52	29.5 QP	43.5	-14.0	1.25 H	263	44.00	-14.50
3	167.74	31.2 QP	43.5	-12.3	1.25 H	279	45.20	-14.00
4	243.40	29.6 QP	46.0	-16.4	1.01 H	296	44.20	-14.60
5	714.82	38.9 QP	46.0	-7.1	1.01 H	234	43.60	-4.70
6	875.84	34.0 QP	46.0	-12.0	1.51 H	159	35.70	-1.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.28	35.2 QP	40.0	-4.8	1.24 V	15	49.30	-14.10
2	119.24	33.1 QP	43.5	-10.4	1.00 V	92	49.60	-16.50
3	167.74	30.6 QP	43.5	-12.9	1.24 V	293	44.60	-14.00
4	499.48	30.3 QP	46.0	-15.7	1.99 V	204	38.90	-8.60
5	714.82	31.8 QP	46.0	-14.2	1.49 V	15	36.50	-4.70
6	875.84	35.2 QP	46.0	-10.8	1.00 V	177	36.90	-1.70

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	28.9 QP	40.0	-11.1	1.49 H	301	44.50	-15.60
2	76.56	23.8 QP	40.0	-16.2	2.00 H	107	41.50	-17.70
3	142.52	30.1 QP	43.5	-13.4	2.00 H	297	44.60	-14.50
4	187.14	29.5 QP	43.5	-14.0	1.49 H	179	45.50	-16.00
5	227.88	29.7 QP	46.0	-16.3	1.49 H	118	46.00	-16.30
6	499.48	31.3 QP	46.0	-14.7	1.49 H	231	39.90	-8.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.28	32.7 QP	40.0	-7.3	1.25 V	18	46.80	-14.10
2	74.62	28.6 QP	40.0	-11.4	1.01 V	339	45.80	-17.20
3	167.74	32.7 QP	43.5	-10.8	1.01 V	224	46.70	-14.00
4	297.72	27.6 QP	46.0	-18.4	1.50 V	259	40.20	-12.60
5	499.48	30.3 QP	46.0	-15.7	1.01 V	193	38.90	-8.60
6	747.80	35.4 QP	46.0	-10.6	1.50 V	154	39.10	-3.70

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note:** 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCS 30	100288	Apr. 27, 2015	Apr. 26, 2016
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Dec. 26, 2014	Dec. 25, 2015
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 30, 2014	Dec. 29, 2015
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 21, 2015	Jul. 20, 2016
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- Note:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

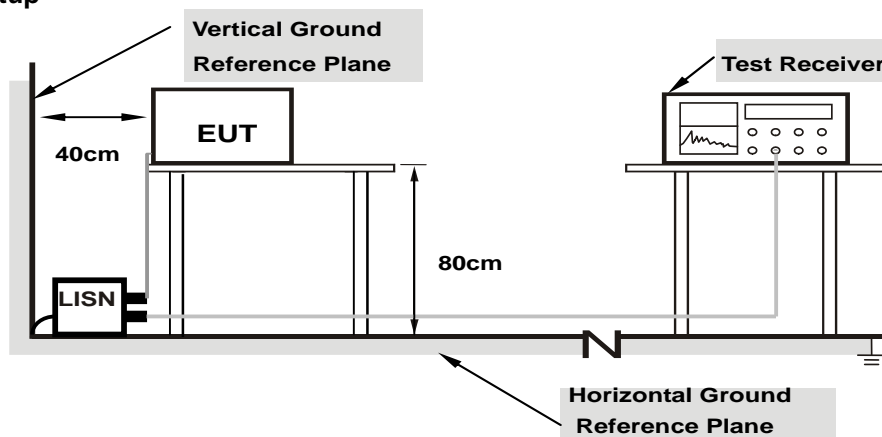

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16945	9.94	44.17	34.42	54.11	44.36	64.99
2	0.21140	9.95	40.21	32.35	50.16	42.30	63.15	53.15	-12.99	-10.85
3	0.25547	9.95	35.64	29.30	45.59	39.25	61.58	51.58	-15.99	-12.33
4	0.46422	9.96	38.19	32.48	48.15	42.44	56.62	46.62	-8.46	-4.17
5	0.50547	9.97	40.36	34.21	50.33	44.18	56.00	46.00	-5.67	-1.82
6	0.72504	10.01	29.18	21.65	39.19	31.66	56.00	46.00	-16.81	-14.34

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

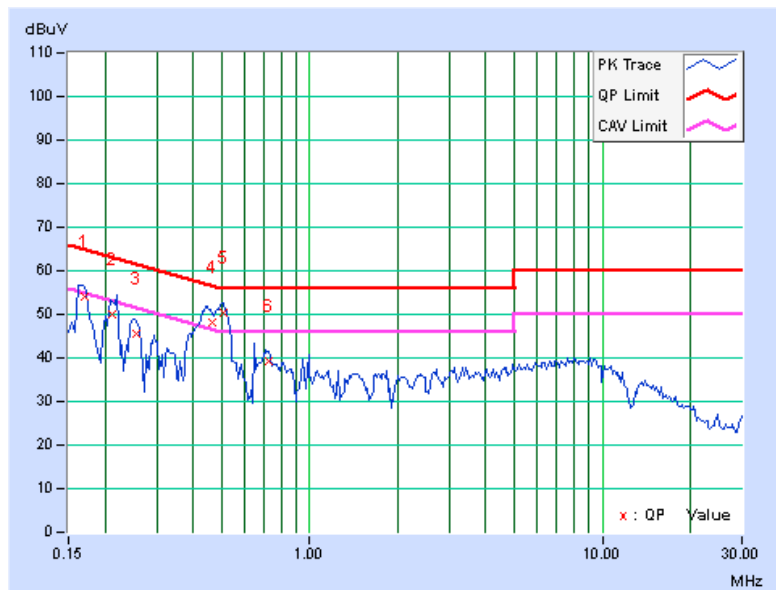


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16935	9.96	43.74	33.70	53.70	43.66	64.99	54.99	-11.30	-11.34
2	0.21095	9.97	39.85	31.97	49.82	41.94	63.17	53.17	-13.35	-11.23
3	0.25156	9.98	35.19	29.11	45.17	39.09	61.71	51.71	-16.54	-12.62
4	0.46150	10.01	38.95	32.93	48.96	42.94	56.67	46.67	-7.71	-3.73
5	0.50156	10.01	40.77	34.03	50.78	44.04	56.00	46.00	-5.22	-1.96
6	0.71388	10.04	28.07	20.24	38.11	30.28	56.00	46.00	-17.89	-15.72

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

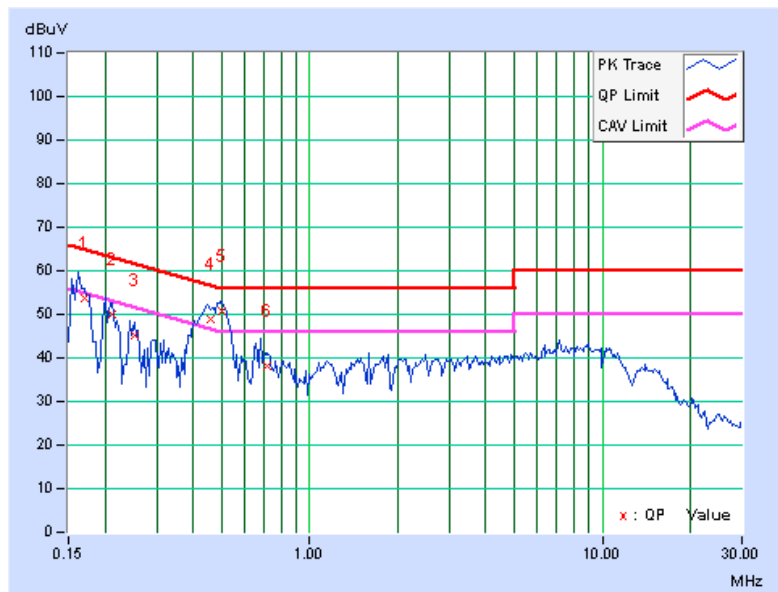


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.85	40.90	30.68	50.75	40.53	65.79
2	0.17605	9.89	35.96	22.28	45.85	32.17	64.67	54.67	-18.82	-22.50
3	0.45097	9.91	28.86	23.48	38.77	33.39	56.86	46.86	-18.09	-13.47
4	3.81758	10.18	18.65	11.04	28.83	21.22	56.00	46.00	-27.17	-24.78
5	12.79103	10.71	32.26	25.52	42.97	36.23	60.00	50.00	-17.03	-13.77
6	23.51616	11.29	20.38	15.21	31.67	26.50	60.00	50.00	-28.33	-23.50

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

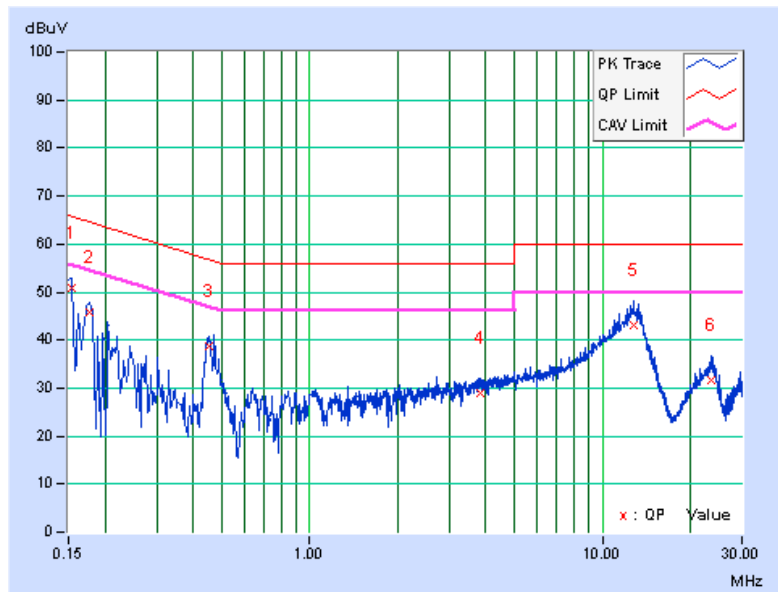


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15760	9.91	40.44	28.47	50.35	38.38	65.59
2	0.22434	10.03	28.25	17.69	38.28	27.72	62.66	52.66	-24.38	-24.94
3	0.45498	9.99	30.90	25.63	40.89	35.62	56.78	46.78	-15.89	-11.16
4	1.81957	10.08	15.40	8.29	25.48	18.37	56.00	46.00	-30.52	-27.63
5	4.45491	10.35	16.50	7.70	26.85	18.05	56.00	46.00	-29.15	-27.95
6	12.80661	10.72	28.72	22.11	39.44	32.83	60.00	50.00	-20.56	-17.17

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

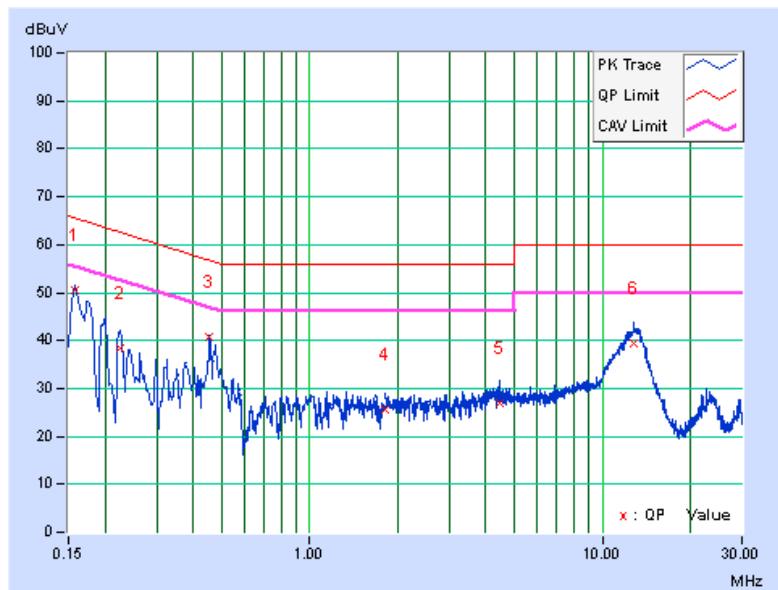


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16181	9.86	32.89	16.46	42.75	26.32	65.37
2	0.29076	9.92	24.22	8.32	34.14	18.24	60.50	50.50	-26.37	-32.27
3	0.38460	9.90	28.95	15.45	38.85	25.35	58.18	48.18	-19.33	-22.83
4	0.64266	9.95	9.97	1.78	19.92	11.73	56.00	46.00	-36.08	-34.27
5	3.77066	10.18	3.15	-1.56	13.33	8.62	56.00	46.00	-42.67	-37.38
6	13.93325	10.78	16.05	10.42	26.83	21.20	60.00	50.00	-33.17	-28.80

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

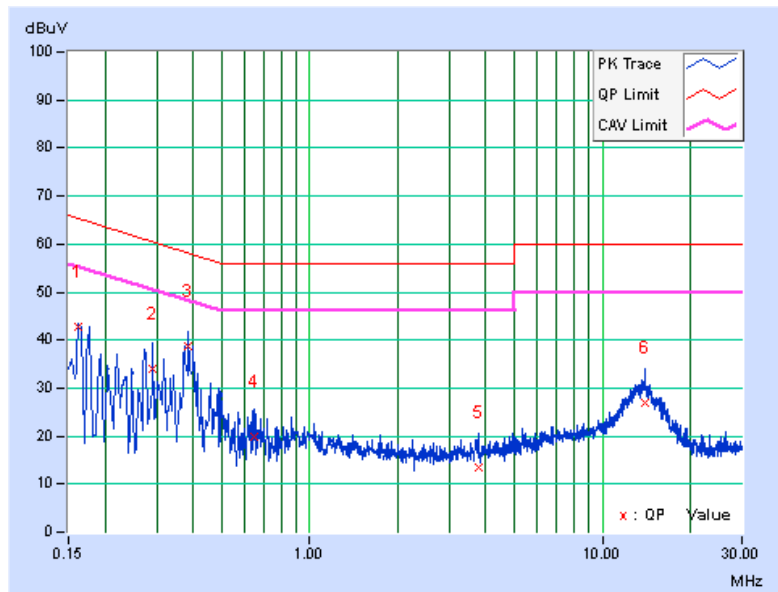


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.90	34.40	26.34	44.30	36.24	65.79
2	0.38808	9.99	33.17	22.74	43.16	32.73	58.10	48.10	-14.94	-15.37
3	0.75214	10.01	5.90	0.41	15.91	10.42	56.00	46.00	-40.09	-35.58
4	1.37383	10.05	5.67	1.77	15.72	11.82	56.00	46.00	-40.28	-34.18
5	4.40799	10.35	6.15	0.02	16.50	10.37	56.00	46.00	-39.50	-35.63
6	13.49483	10.75	16.25	10.36	27.00	21.11	60.00	50.00	-33.00	-28.89

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

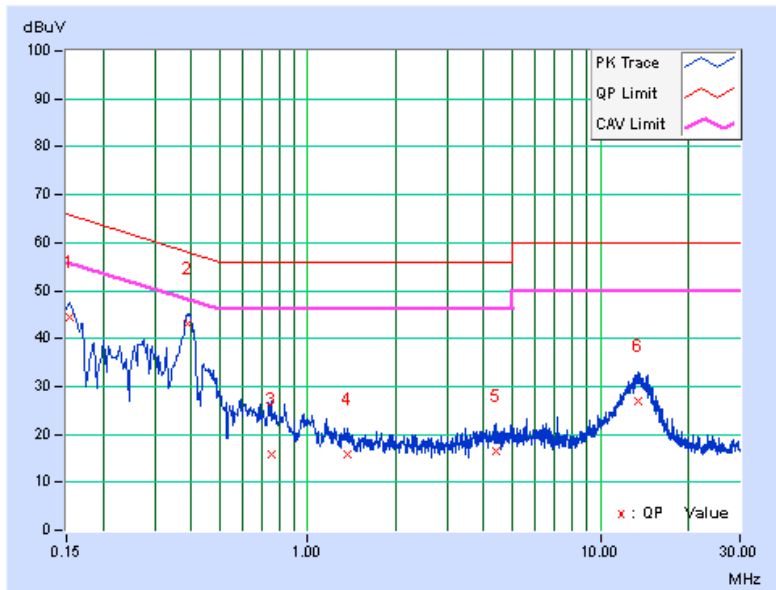

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	-		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	-		250mW (24 dBm) or 11 dBm+10 log B*

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;


Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.


For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup

For Power Output Measurement

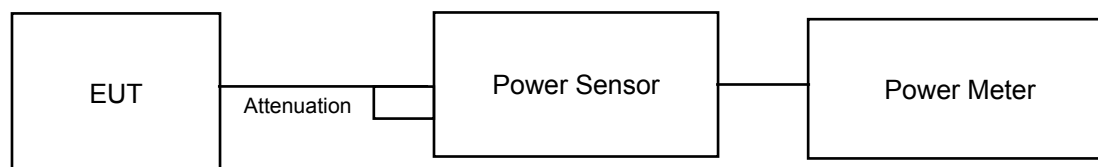

For 26dB and Occupied Bandwidth



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

For Average Power Measurement

For 802.11a, 802.11n (HT20), 802.11n (HT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (VHT80)

- a. Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- b. Set sweep trigger to “free run”.
- c. Set RBW = 1 MHz.
- d. Set VBW \geq 3 MHz
- e. Number of points in sweep \geq 2 Span / RBW.
- f. Sweep time \leq (number of points in sweep) * T
- g. Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- h. Detector = RMS.
- i. Trace mode = max hold.
- j. Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
- k. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Power Output:

802.11a

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	18.20	17.78	126.048	21.01	30	Pass
40	5200	16.87	16.71	95.522	19.80	30	Pass
48	5240	19.47	19.15	170.736	22.32	30	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	18.39	18.04	132.704	21.23	30	Pass
40	5200	18.26	18.40	136.171	21.34	30	Pass
48	5240	19.33	19.04	165.872	22.20	30	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	15.87	15.38	73.151	18.64	30	Pass
46	5230	20.95	20.71	242.212	23.84	30	Pass

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	15.64	15.35	70.921	18.51	30	Pass

26dB Bandwidth:
802.11a

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	21.71	21.65	Pass
40	5200	21.65	21.56	Pass
48	5240	21.68	21.66	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	22.03	21.79	Pass
40	5200	21.95	21.72	Pass
48	5240	22.16	21.81	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
38	5190	41.74	41.18	Pass
46	5230	41.30	41.21	Pass



802.11ac (VHT80)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
42	5210	82.49	82.34	Pass

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

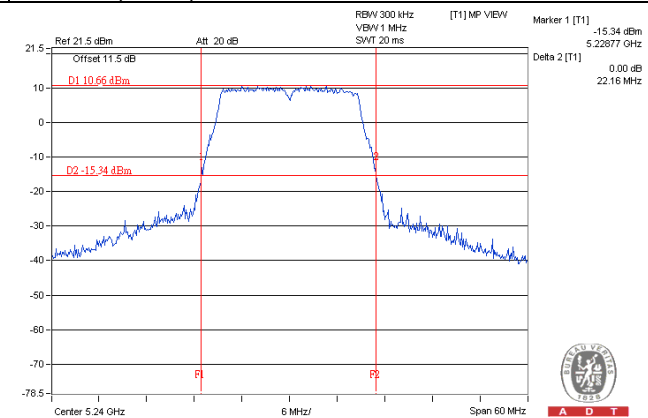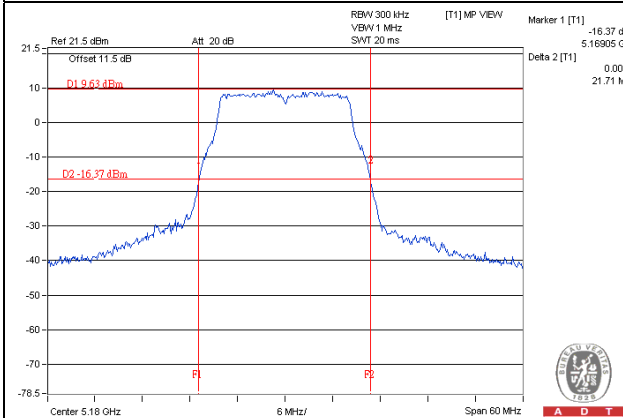

802.11n (HT40)

802.11ac (VHT80)

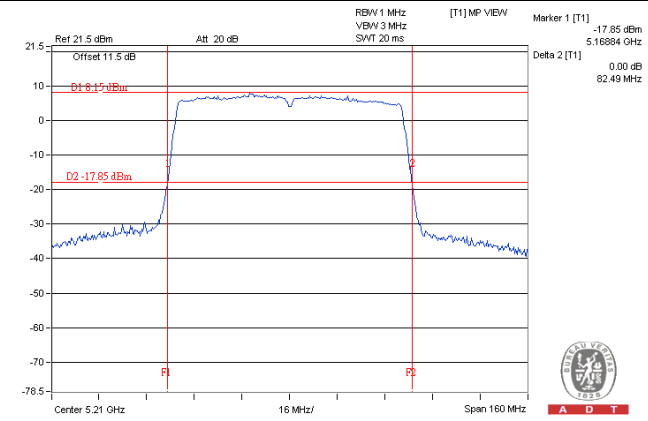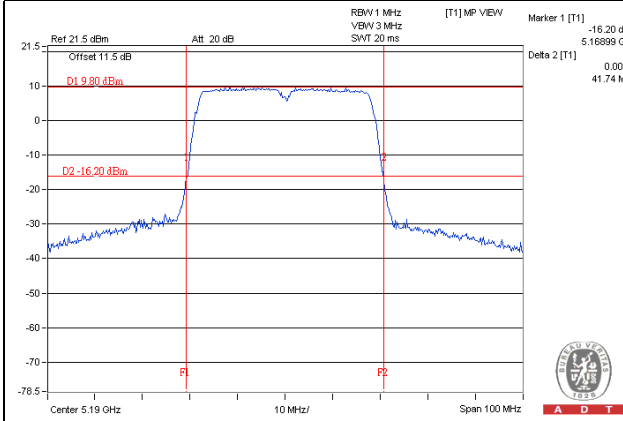

Occupied Bandwidth:
802.11a

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.04	16.92
40	5200	17.04	17.04
48	5240	17.16	17.04

802.11n (HT20)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	18.12	17.88
40	5200	18.12	18.00
48	5240	18.24	18.00

802.11n (HT40)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	36.72	36.72
46	5230	36.96	36.72



802.11ac (VHT80)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	75.84	75.84

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

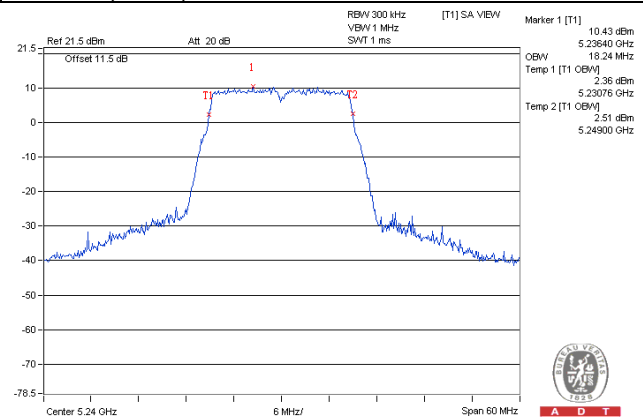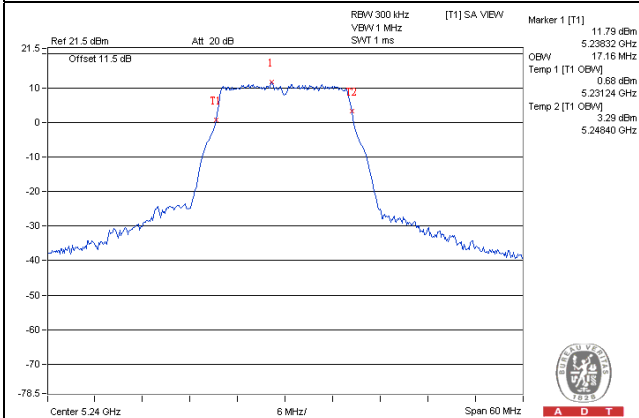

802.11n (HT40)

802.11ac (VHT80)

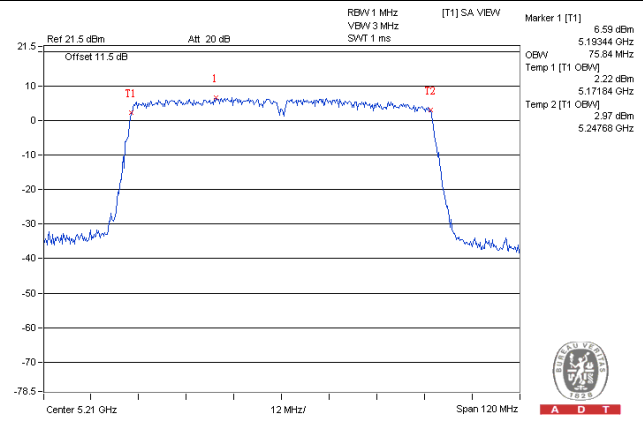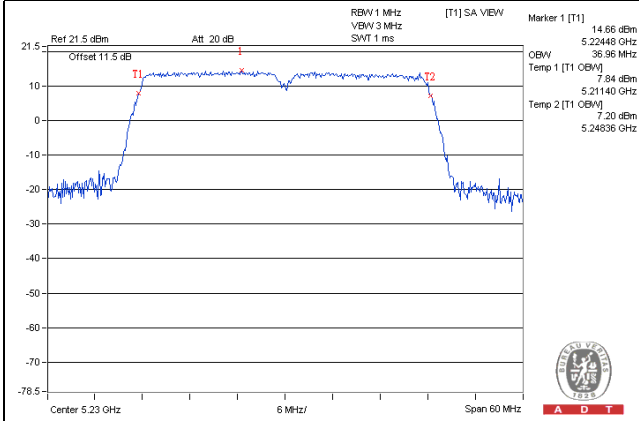


4.4 Peak Power Spectral Density Measurement

4.4.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A	-		11dBm/ MHz
U-NII-2C	-		11dBm/ MHz

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add 10 log (1/duty cycle)

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

802.11a

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
36	5180	5.00	4.30	7.68	0.28	7.96	14.99	Pass
40	5200	3.53	3.05	6.31	0.28	6.59	14.99	Pass
48	5240	5.33	5.17	8.26	0.28	8.54	14.99	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5\text{dBi} + 10\log(2) = 8.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (8.01 - 6) = 14.99\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
36	5180	4.65	4.20	7.44	0.46	7.90	14.99	Pass
40	5200	4.77	4.03	7.43	0.46	7.89	14.99	Pass
48	5240	5.06	4.45	7.78	0.46	8.24	14.99	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5\text{dBi} + 10\log(2) = 8.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (8.01 - 6) = 14.99\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
38	5190	-0.99	-1.78	1.65	0.77	2.42	14.99	Pass
46	5230	3.88	4.01	6.96	0.77	7.73	14.99	Pass

Note:


1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5\text{dBi} + 10\log(2) = 8.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (8.01 - 6) = 14.99\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
42	5210	-2.75	-4.60	-0.57	0.99	0.42	14.99	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 5dBi + 10log(2) = 8.01dBi > 6dBi, so the power density limit shall be reduced to 17-(8.01-6) = 14.99dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

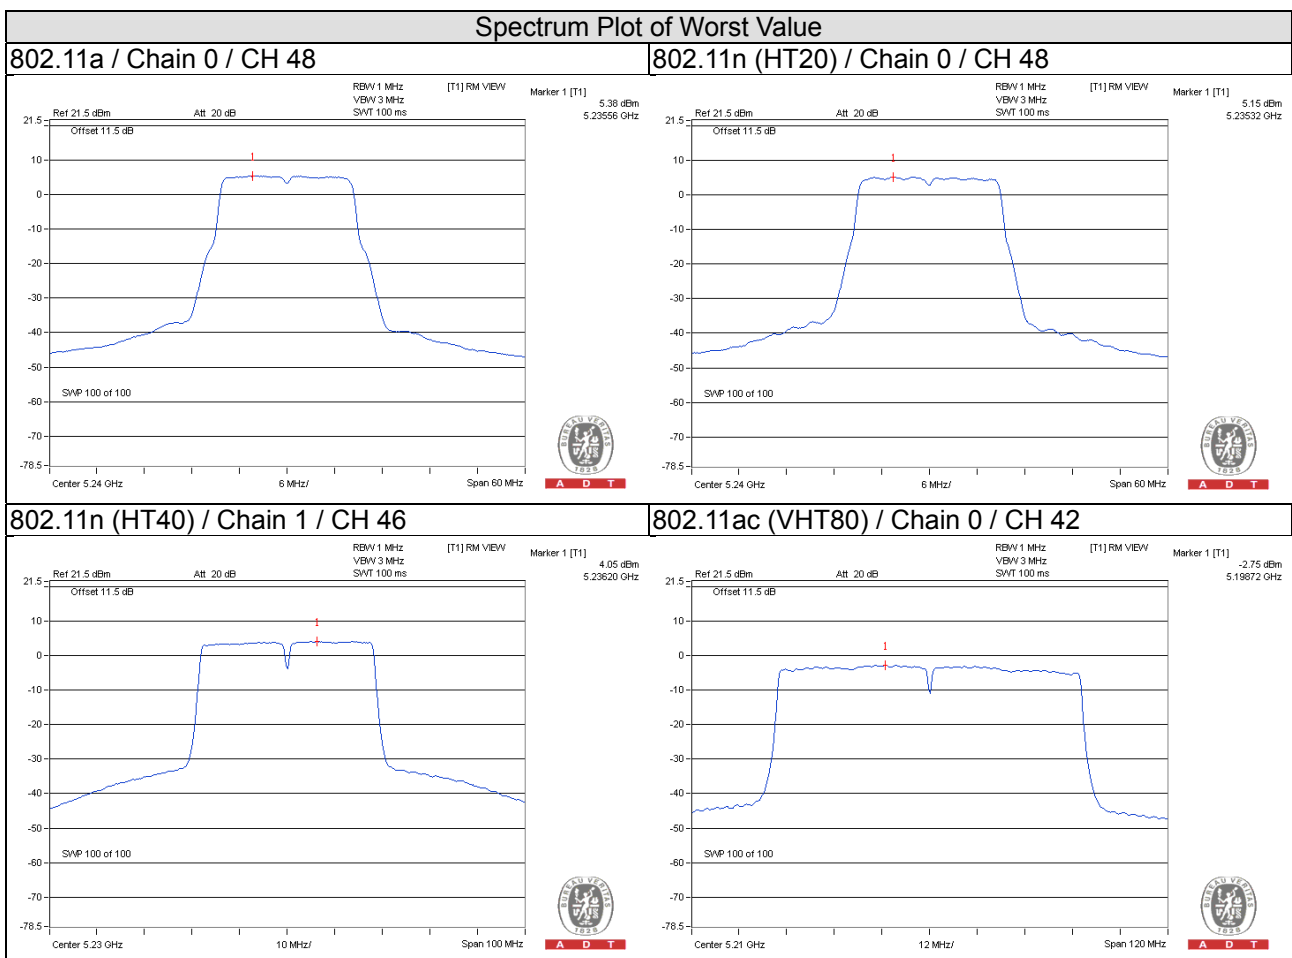


4.5 Frequency Stability

4.5.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.5.2 Test Setup

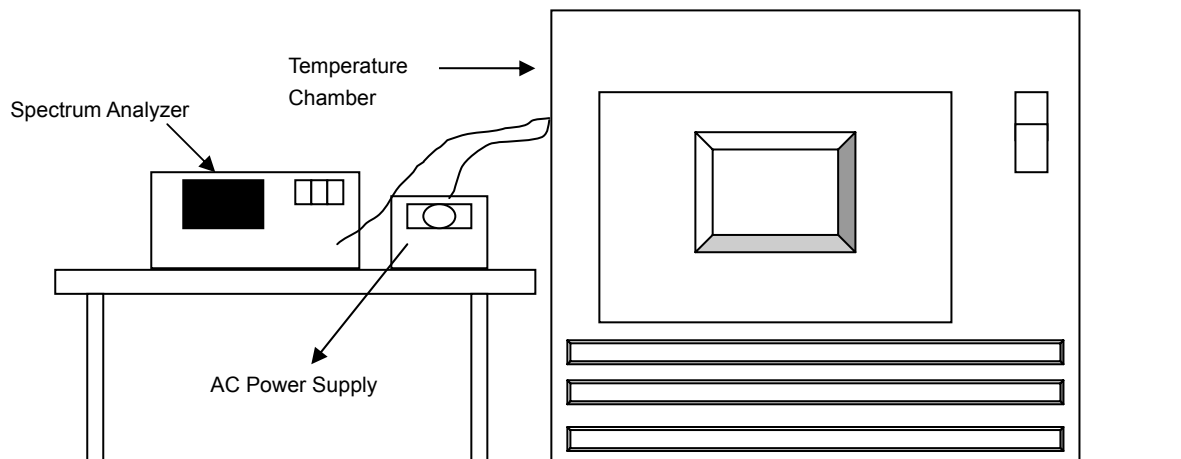

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.5.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5179.9997	-0.00001	5180.0040	0.00008	5180.0027	0.00005	5180.0017	0.00003
40	120	5180.0178	0.00034	5180.0189	0.00036	5180.0216	0.00042	5180.0209	0.00040
30	120	5179.9766	-0.00045	5179.9775	-0.00043	5179.9729	-0.00052	5179.9726	-0.00053
20	120	5180.0201	0.00039	5180.0164	0.00032	5180.0189	0.00036	5180.0190	0.00037
10	120	5180.0171	0.00033	5180.0194	0.00037	5180.0166	0.00032	5180.0164	0.00032
0	120	5179.9787	-0.00041	5179.9825	-0.00034	5179.9791	-0.00040	5179.9802	-0.00038
-10	120	5179.9828	-0.00033	5179.9840	-0.00031	5179.9809	-0.00037	5179.9799	-0.00039
-20	120	5179.9768	-0.00045	5179.9783	-0.00042	5179.9788	-0.00041	5179.9798	-0.00039
-30	120	5180.0082	0.00016	5180.0097	0.00019	5180.0091	0.00018	5180.0080	0.00015

Frequency Stability Versus Temp.									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5180.0201	0.00039	5180.0156	0.00030	5180.0181	0.00035	5180.0188	0.00036
	120	5180.0201	0.00039	5180.0164	0.00032	5180.0189	0.00036	5180.0190	0.00037
	102	5180.0196	0.00038	5180.0173	0.00033	5180.0180	0.00035	5180.0187	0.00036

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---