



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Asustek Computer Inc.
Applicant Address	4F, No. 150, Li-Te Rd., Peitou, Taipei 112, Taiwan
FCC ID	MSQ-RTAC55U
Manufacturer's company	Asustek Computer Inc.
Manufacturer Address	4F, No. 150, Li-Te Rd., Peitou, Taipei 112, Taiwan

Product Name	Dual-band Wireless-AC1200 Gigabit Router
Brand Name	ASUS
Model No.	RT-AC55U
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Apr. 11, 2014
Final Test Date	Aug. 05, 2014
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11n, IEEE 802.11b/g and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r02, KDB 662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table of Source for Flash Memory	5
3.4. Table for Filed Antenna.....	6
3.5. Table for Carrier Frequencies	7
3.6. Table for Test Modes.....	8
3.7. Table for Testing Locations.....	11
3.8. Table for Supporting Units	11
3.9. Table for Parameters of Test Software Setting	11
3.10. EUT Operation during Test	12
3.11. Duty Cycle.....	13
3.12. Test Configurations	14
4. TEST RESULT	16
4.1. AC Power Line Conducted Emissions Measurement.....	16
4.2. Maximum Conducted Output Power Measurement.....	20
4.3. Power Spectral Density Measurement	23
4.4. 6dB Spectrum Bandwidth Measurement	36
4.5. Radiated Emissions Measurement	45
4.6. Emissions Measurement	72
4.7. Antenna Requirements	101
5. LIST OF MEASURING EQUIPMENTS	102
6. MEASUREMENT UNCERTAINTY.....	104
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....	B1 ~ B3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR441133AA	Rev. 01	Initial issue of report	Sep. 05, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : Dual-band Wireless-AC1200 Gigabit Router
Brand Name : ASUS
Model No. : RT-AC55U
Applicant : Asustek Computer Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 11, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

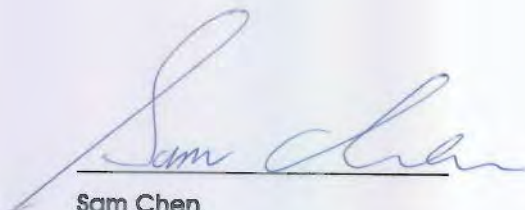

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	20.41 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	3.02 dB
4.3	15.247(e)	Power Spectral Density	Complies	3.96 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	2.22 dB
4.6	15.247(d)	Band Edge Emissions	Complies	1.03 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	<u>For 2.4GHz Band:</u> 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth <u>For 5GHz Band:</u> 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth ; 1 for 80MHz bandwidth
Channel Band Width (99%)	<u>For 2.4GHz Band:</u> MCS0 (HT20): 18 MHz ; MCS0 (HT40): 36.48 MHz <u>For 5GHz Band:</u> 802.11ac MCS0/Nss1 (VHT20): 20.88 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.32 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.80 MHz
Maximum Conducted Output Power	<u>For 2.4GHz Band:</u> MCS0 (HT20): 24.11 dBm ; MCS0 (HT40): 21.03 dBm <u>For 5GHz Band:</u> 802.11ac MCS0/Nss1 (VHT20): 26.92 dBm ; 802.11ac MCS0/Nss1 (VHT40): 26.87 dBm ; 802.11ac MCS0/Nss1 (VHT80): 26.44 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a/b/g

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	11b: 10.00 MHz ; 11g: 16.72 MHz ; 11a: 18.88 MHz
Maximum Conducted Output Power	11b: 23.41 dBm ; 11g: 24.06 dBm ; 11a: 26.98 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Beamforming Function	☐ With beamforming ☒ Without beamforming

Antenna and Band width

Antenna	Two (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11b	V	X	X
IEEE 802.11g	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS0-15
802.11n (HT40)	2	MCS0-15
802.11ac (VHT20)	2	MCS 0-8/Nss1-2
802.11ac (VHT40)	2	MCS 0-9/Nss1-2
802.11ac (VHT80)	2	MCS 0-9/Nss1-2
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80. Note 3: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac		

3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	DVE	DSA-30PFB-12 FUS 120250	Input: 100-240V ~ 50/60Hz 0.8A Output: +12V, 2.5A
Adapter 2	DVE	DSA-24PFD-15 FUS 120200	Input: 100-240V ~ 50/60Hz 0.8A Output: +12V, 2A
Others			
RJ-45 cable*1, Non-Shielded, 1m			

3.3. Table of Source for Flash Memory

There are two sources of flash memory, the detail information as following:

Flash Memory	Brand	Model No.
Main Source	Zentel	A5U1GA31ATS-BC
Second Source	SAMSUNG	K9F1G08U0E

3.4. Table for Filed Antenna

Set	Ant.	Brand	Part No.	Antenna Type	Connector	Gain (dBi)	
						2.4GHz	5GHz
1	1	PSA	RFDPA181300SBLB801	Dipole Antenna	Reverse SMA	4.12	5.64
	2	PSA	RFDPA181300SBLB801	Dipole Antenna	Reverse SMA	4.12	5.64
2	1	PSA	RFDPA181300SBLB803	Dipole Antenna	Reverse SMA	4.12	5.64
	2	PSA	RFDPA181300SBLB803	Dipole Antenna	Reverse SMA	4.12	5.64

Note: The EUT has two sets of antennas and there are two antennas for each set.

The difference between set 1 & set 2 is just model name, so there's only set 1 selected and recorded in the report.

Ant.1 and Ant.2 will transmit/receive the same signal simultaneously.

Ant.1 and Ant.2 be used as transmitting/receiving antennas.



3.5. Table for Carrier Frequencies

For 2.4GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

For 5GHz Band:

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

For 80MHz bandwidth systems, use Channel 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.6. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

For 2.4GHz Band:

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Power Spectral Density	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
6dB Spectrum Bandwidth	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Radiated Emissions Below 1GHz	CTX	-	-	-
Radiated Emissions Above 1GHz	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Band Edge Emissions	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2

For 5GHz Band:

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	11ac VHT20	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	MCS0/Nss1	151/159	1+2
	11ac VHT80	MCS0/Nss1	155	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2
Power Spectral Density	11ac VHT20	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	MCS0/Nss1	151/159	1+2
	11ac VHT80	MCS0/Nss1	155	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2
6dB Spectrum Bandwidth	11ac VHT20	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	MCS0/Nss1	151/159	1+2
	11ac VHT80	MCS0/Nss1	155	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2
Radiated Emissions Below 1GHz	CTX	-	-	-
Radiated Emissions Above 1GHz	11ac VHT20	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	MCS0/Nss1	151/159	1+2
	11ac VHT80	MCS0/Nss1	155	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2

Note: VHT20/VHT40 covers HT20/HT40, due to same modulation.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. CTX EUT with Flash Memory (Main Source)+WLAN 2.4GHz+Adapter 1

Mode 2. CTX EUT with Flash Memory (Main Source)+WLAN 5GHz+Adapter 1

Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode.

Mode 3. CTX EUT with Flash Memory (Main Source)+WLAN 2.4GHz+Adapter 2

Mode 1 has been evaluated to be the worst case between Mode 1~3, thus measurement for Mode 4 will follow this same test mode.

Mode 4. CTX EUT with Flash Memory (second source)+WLAN 2.4GHz+Adapter 1

Mode 4 is the worst case, so it was selected to record in this test report.

For Radiated Emission test below 1GHz:

Radiated Emissions above 1GHz test was performed at its 3-axis (X-axis, Y-axis and Z-axis). Y-axis was the worst case, so Radiated Emission test below 1GHz will follow this same configuration.

Mode 1. CTX- Place EUT in Y-axis with Flash Memory (Main Source)+WLAN 2.4GHz+Adapter 1

Mode 2. CTX- Place EUT in Y-axis with Flash Memory (Main Source)+WLAN 5GHz+Adapter 1

Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode.

Mode 3. CTX- Place EUT in Y-axis with Flash Memory (Main Source)+WLAN 2.4GHz+Adapter 2

Mode 1 has been evaluated to be the worst case between Mode 1~3, thus measurement for Mode 4 will follow this same test mode.

Mode 4. CTX-Place EUT in Y-axis with Flash Memory (second source)+WLAN 2.4GHz+Adapter 1

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission test above 1GHz:

Radiated Emissions above 1GHz test was performed at its 3-axis (X-axis, Y-axis and Z-axis). Y-axis was the worst case, so it's recorded in this report.

Mode 1: CTX-Place EUT in Y axis

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Maximum Permissible Exposure Test Report: FA441133) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.7. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.8. Table for Supporting Units

For Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	DoC

For Test Site No: CO01-CB and TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For 2.4GHz Band

Power Parameters of IEEE 802.11n MCS0 HT20

Test Software Version	DOS		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 HT20	17.5	21.5	17

Power Parameters of IEEE 802.11n MCS0 HT40

Test Software Version	DOS		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 HT40	13.5	18.5	15.5

Power Parameters of IEEE 802.11b/g

Test Software Version	DOS		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	18.5	21	20.5
IEEE 802.11g	18	21.5	17.5

For 5GHz Band

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	ART-GUT 2.3		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0/Nss1 VHT20	27	27	27

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	ART-GUT 2.3	
Frequency	5755 MHz	5795 MHz
MCS0/Nss1 VHT40	27	27

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	ART-GUT 2.3
Frequency	5775 MHz
MCS0/Nss1 VHT80	26

Power Parameters of IEEE 802.11a

Test Software Version	ART-GUT 2.3		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	27	27	27

3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Band	Mode	On Time(ms)	On+Off Time(ms)	Duty Cycle(%)	Duty Factor(dB)	1/T Minimum VBW (kHz)
2.4G	802.11n MCS0 HT20	2.520	2.550	98.82%	0.05	0.01
	802.11n MCS0 HT40	1.228	1.260	97.46%	0.11	0.81
	802.11b	1.000	1.000	100.00%	0.00	0.01
	802.11g	2.700	2.740	98.54%	0.06	0.01
5G	802.11ac MCS0/Nss1 VHT20	1.900	2.030	93.60%	0.29	0.53
	802.11ac MCS0/Nss1 VHT40	0.936	0.996	93.98%	0.27	1.07
	802.11ac MCS0/Nss1 VHT80	0.600	0.652	92.02%	0.36	1.67
	802.11a	2.030	2.070	98.07%	0.08	0.01


3.12. Test Configurations

3.12.1. AC Power Line Conduction Emissions Configuration

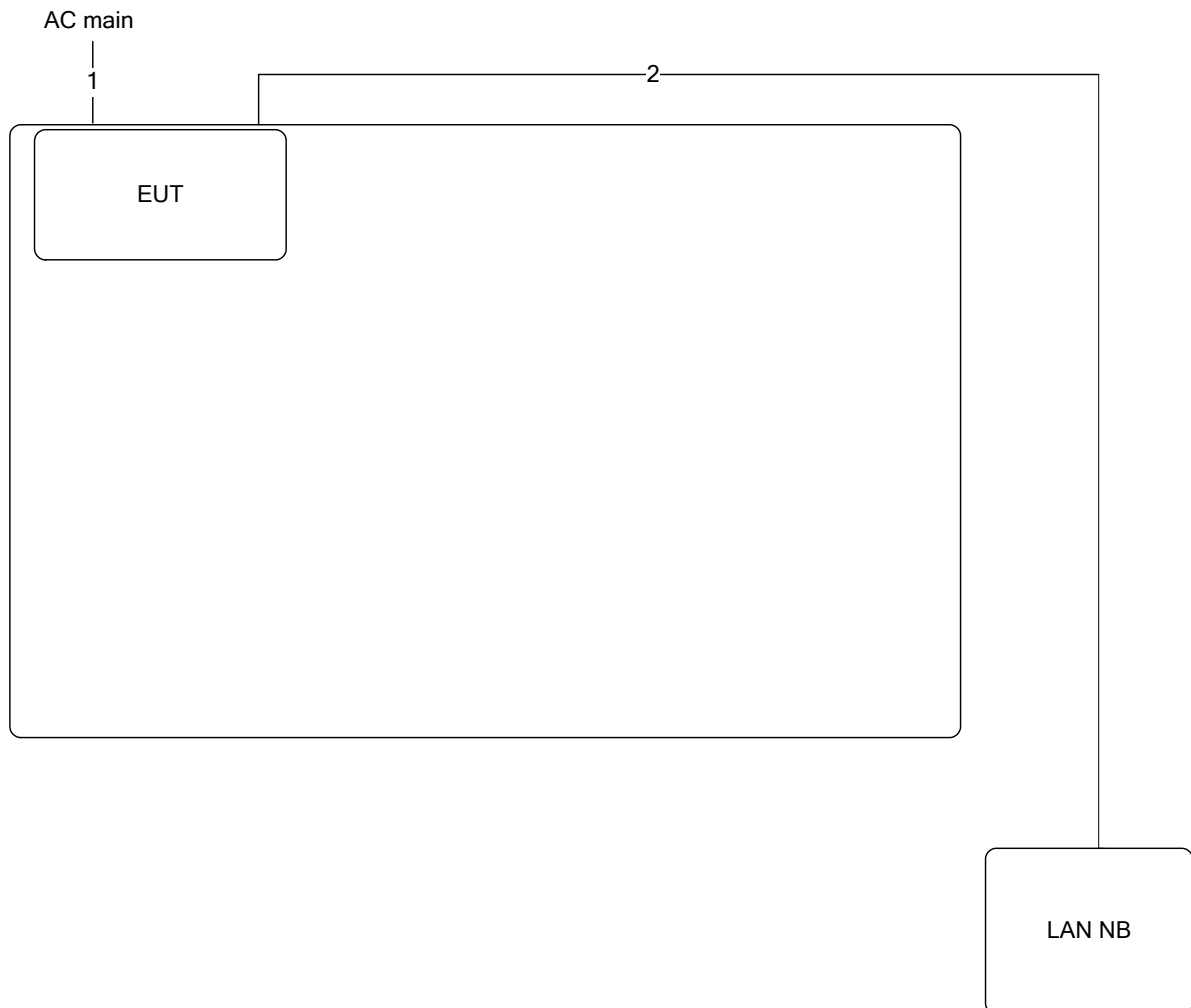

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

3.12.2. Radiation Emissions Test Configuration

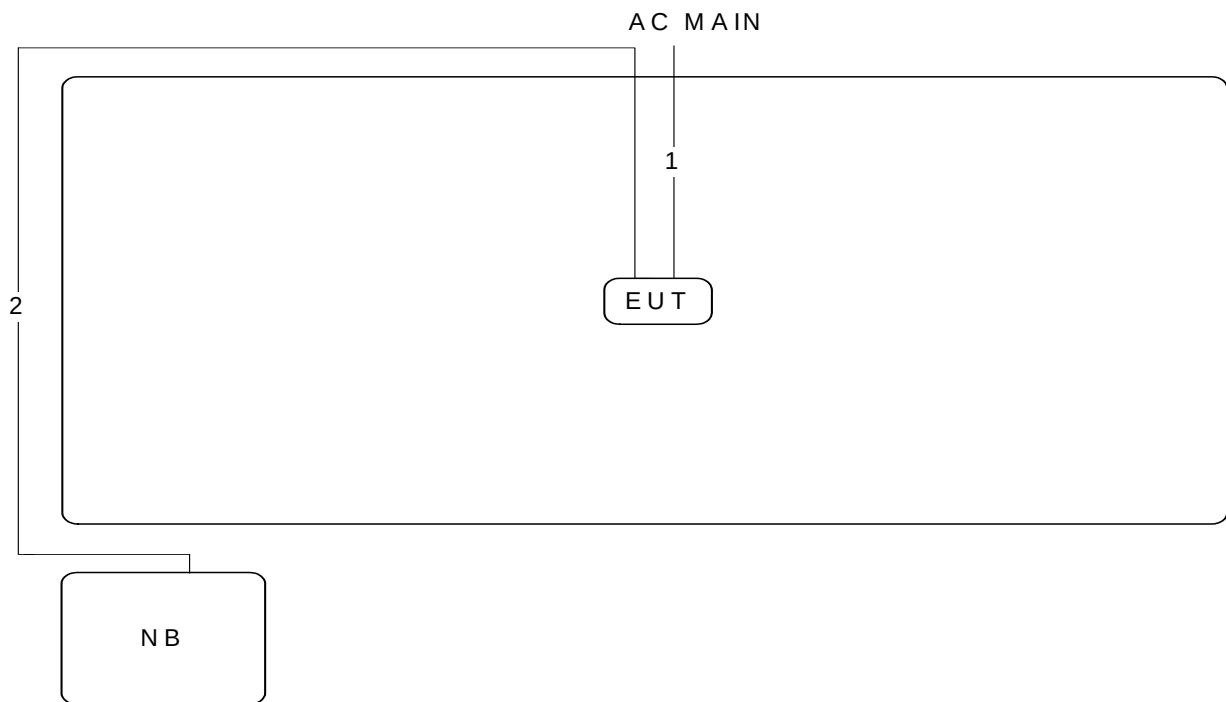

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

[illegible]


- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

There is no deviation with the original standard.

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	54%
Test Engineer	Parody Lin	Phase	Line
Configuration	CTX	Test Mode	Mode 4

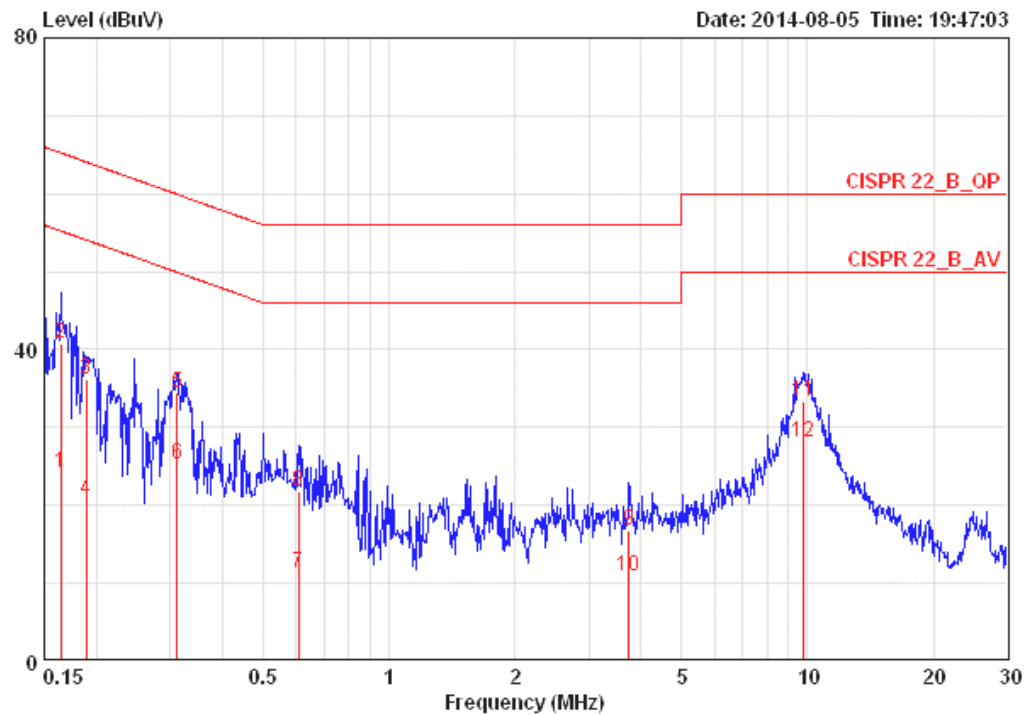

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.16414	24.27	-30.98	55.25	0.10	24.01	0.16	LINE	AVERAGE
2	0.16414	40.84	-24.41	65.25	0.10	40.58	0.16	LINE	QP
3	0.18938	36.16	-27.90	64.06	0.10	35.90	0.16	LINE	QP
4	0.18938	20.72	-33.34	54.06	0.10	20.46	0.16	LINE	AVERAGE
5	0.31163	34.39	-25.53	59.93	0.10	34.12	0.17	LINE	QP
6	0.31163	25.37	-24.55	49.93	0.10	25.10	0.17	LINE	AVERAGE
7	0.60752	11.35	-34.65	46.00	0.11	11.05	0.19	LINE	AVERAGE
8	0.60752	21.80	-34.20	56.00	0.11	21.50	0.19	LINE	QP
9	3.740	16.74	-39.26	56.00	0.20	16.24	0.29	LINE	QP
10	3.740	10.90	-35.10	46.00	0.20	10.40	0.29	LINE	AVERAGE
11	9.757	33.36	-26.64	60.00	0.34	32.64	0.38	LINE	QP
12 B	9.757	28.16	-21.84	50.00	0.34	27.44	0.38	LINE	AVERAGE

Temperature	25°C	Humidity	54%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	CTX	Test Mode	Mode 4

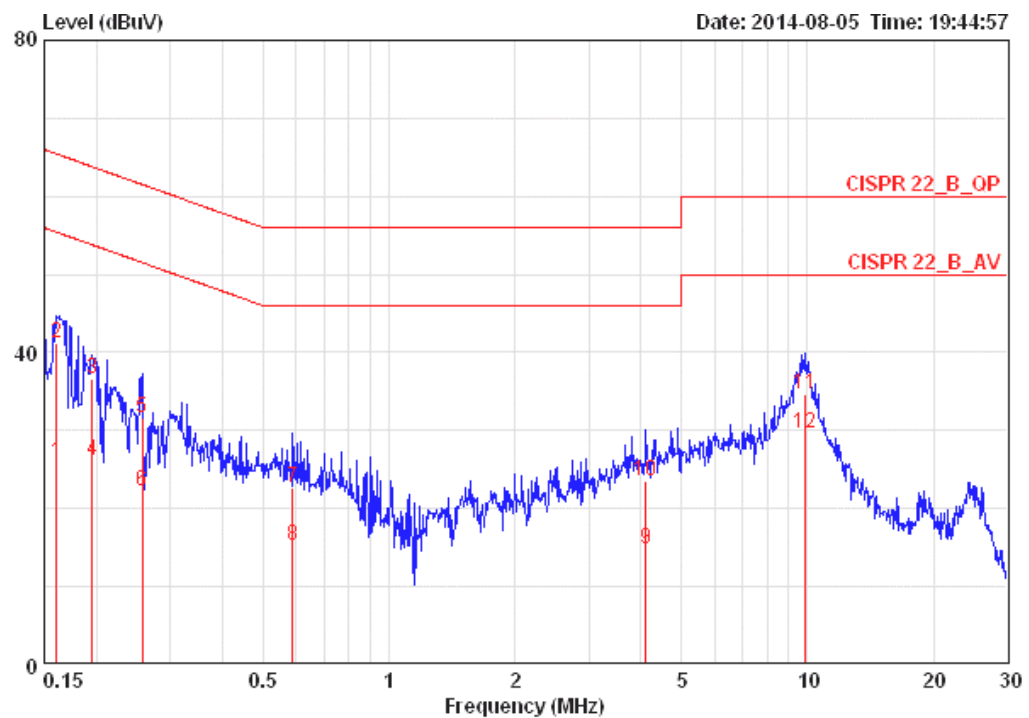

	Freq	Level	Over	Limit	LISN	Read	Cable		
	MHz	dBuV	Limit	Line	Factor	Level	Loss	Pol/Phase	Remark
			dB	dBuV	dB	dBuV	dB		
1	0.16070	25.87	-29.56	55.43	0.09	25.62	0.16	NEUTRAL	AVERAGE
2	0.16070	41.27	-24.16	65.43	0.09	41.02	0.16	NEUTRAL	QP
3	0.19550	36.51	-27.29	63.80	0.09	36.26	0.16	NEUTRAL	QP
4	0.19550	26.22	-27.58	53.80	0.09	25.97	0.16	NEUTRAL	AVERAGE
5	0.25751	31.57	-29.94	61.51	0.09	31.31	0.17	NEUTRAL	QP
6	0.25751	22.13	-29.38	51.51	0.09	21.87	0.17	NEUTRAL	AVERAGE
7	0.58851	22.61	-33.39	56.00	0.10	22.32	0.19	NEUTRAL	QP
8	0.58851	15.33	-30.67	46.00	0.10	15.04	0.19	NEUTRAL	AVERAGE
9	4.114	14.78	-31.22	46.00	0.19	14.28	0.30	NEUTRAL	AVERAGE
10	4.114	23.55	-32.45	56.00	0.19	23.05	0.30	NEUTRAL	QP
11	9.913	34.68	-25.32	60.00	0.32	33.98	0.38	NEUTRAL	QP
12	9.913	29.59	-20.41	50.00	0.32	28.89	0.38	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

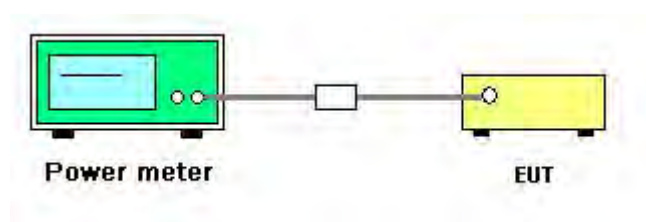

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	52%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n/ac
Test Date	Apr. 30, 2014		

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 HT20

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant.1	Ant.2	Total		
1	2412 MHz	17.28	17.02	20.16	30.00	Complies
6	2437 MHz	21.05	21.15	24.11	30.00	Complies
11	2462 MHz	16.26	15.85	19.07	30.00	Complies

Configuration IEEE 802.11n MCS0 HT40

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant.1	Ant.2	Total		
3	2422 MHz	12.85	12.45	15.66	30.00	Complies
6	2437 MHz	18.22	17.82	21.03	30.00	Complies
9	2452 MHz	15.02	14.15	17.62	30.00	Complies

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant.1	Ant.2	Total		
149	5745 MHz	23.87	23.94	26.92	30.00	Complies
157	5785 MHz	23.65	23.68	26.68	30.00	Complies
165	5825 MHz	23.27	23.42	26.36	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant.1	Ant.2	Total		
151	5755 MHz	23.78	23.94	26.87	30.00	Complies
159	5795 MHz	23.68	23.52	26.61	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant.1	Ant.2	Total		
155	5775 MHz	23.34	23.52	26.44	30.00	Complies

Temperature	20°C	Humidity	52%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a/b/g
Test Date	Apr. 30, 2014		

Configuration IEEE 802.11b

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant.1	Ant.2	Total		
1	2412 MHz	17.92	18.06	21.00	30.00	Complies
6	2437 MHz	20.73	20.04	23.41	30.00	Complies
11	2462 MHz	19.75	19.28	22.53	30.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant.1	Ant.2	Total		
1	2412 MHz	17.46	17.58	20.53	30.00	Complies
6	2437 MHz	21.06	21.03	24.06	30.00	Complies
11	2462 MHz	16.58	16.42	19.51	30.00	Complies

Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant.1	Ant.2	Total		
149	5745 MHz	23.98	23.96	26.98	30.00	Complies
157	5785 MHz	23.88	23.84	26.87	30.00	Complies
165	5825 MHz	23.51	23.54	26.54	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

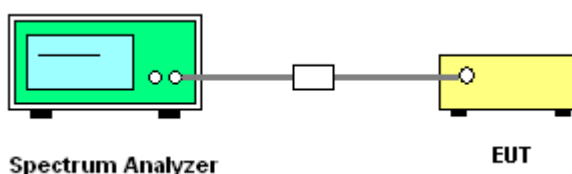

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	52%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n/ac

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 HT20

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant.1	Ant.2	Total		
1	2412 MHz	-8.11	-8.12	-5.10	6.87	Complies
6	2437 MHz	-4.97	-4.60	-1.77	6.87	Complies
11	2462 MHz	-9.13	-9.89	-6.48	6.87	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{freq}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.13\text{dBi} > 6\text{dBi}$, So Band1 Limit = 8-(7.13-6)=6.87dBm/3kHz

Configuration IEEE 802.11n MCS0 HT40

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant.1	Ant.2	Total		
3	2422 MHz	-13.12	-14.27	-10.65	6.87	Complies
6	2437 MHz	-9.68	-10.84	-7.21	6.87	Complies
9	2452 MHz	-11.36	-14.48	-9.64	6.87	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{freq}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.13\text{dBi} > 6\text{dBi}$, So Band1 Limit = 8-(7.13-6)=6.87dBm/3kHz

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant.1	Ant.2	Total		
149	5745 MHz	-3.38	-2.74	-0.04	5.35	Complies
157	5785 MHz	-2.83	-2.75	0.22	5.35	Complies
165	5825 MHz	-3.39	-2.41	0.14	5.35	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{freq}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.65\text{dBi} > 6\text{dBi}$, So Band1 Limit = 8-(8.65-6)=5.35dBm/3kHz

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant.1	Ant.2	Total		
151	5755 MHz	-6.17	-5.02	-2.55	5.35	Complies
159	5795 MHz	-6.93	-5.35	-3.06	5.35	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{CH}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 8.65\text{dBi} > 6\text{dBi}$, So Band1 Limit = 8-(8.65-6)=5.35dBm/3kHz

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result Total
		Ant.1	Ant.2	Total		
155	5775 MHz	-9.86	-9.16	-6.49	5.35	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{CH}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 8.65\text{dBi} > 6\text{dBi}$, So Band1 Limit = 8-(8.65-6)=5.35dBm/3kHz

Temperature	20°C	Humidity	52%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a/b/g

Configuration IEEE 802.11b

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant.1	Ant.2	Total		
1	2412 MHz	-3.03	-4.01	-0.48	6.87	Complies
6	2437 MHz	-1.18	-0.66	2.10	6.87	Complies
11	2462 MHz	-1.90	-3.15	0.53	6.87	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ant}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 7.13\text{dBi} > 6\text{dBi}$, So Band1 Limit = 8-(7.13-6)=6.87dBm/3kHz

Configuration IEEE 802.11g

Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant.1	Ant.2	Total		
1	2412 MHz	-7.57	-8.21	-4.87	6.87	Complies
6	2437 MHz	-3.83	-5.04	-1.38	6.87	Complies
11	2462 MHz	-8.11	-8.25	-5.17	6.87	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ant}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 7.13\text{dBi} > 6\text{dBi}$, So Band1 Limit = 8-(7.13-6)=6.87dBm/3kHz

Configuration IEEE 802.11a


Channel	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Ant.1	Ant.2	Total		
149	5745 MHz	-1.94	-1.32	1.39	5.35	Complies
157	5785 MHz	-3.04	-2.35	0.33	5.35	Complies
165	5825 MHz	-2.67	-0.83	1.36	5.35	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left\{ \sum_{k=1}^{N_{ant}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 8.65\text{dBi} > 6\text{dBi}$, So Band1 Limit = 8-(8.65-6)=5.35dBm/3kHz

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant.1

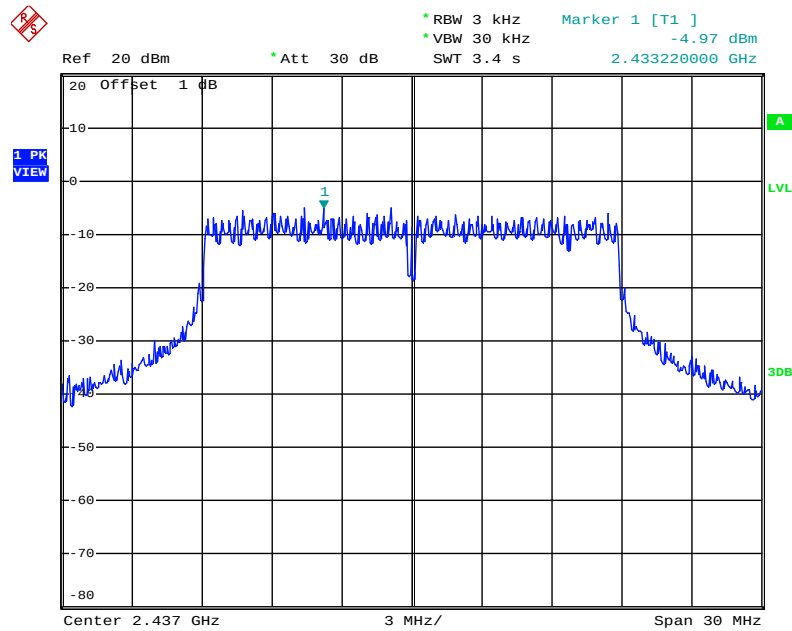


Date: 30.APR.2014 11:22:49

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant.2

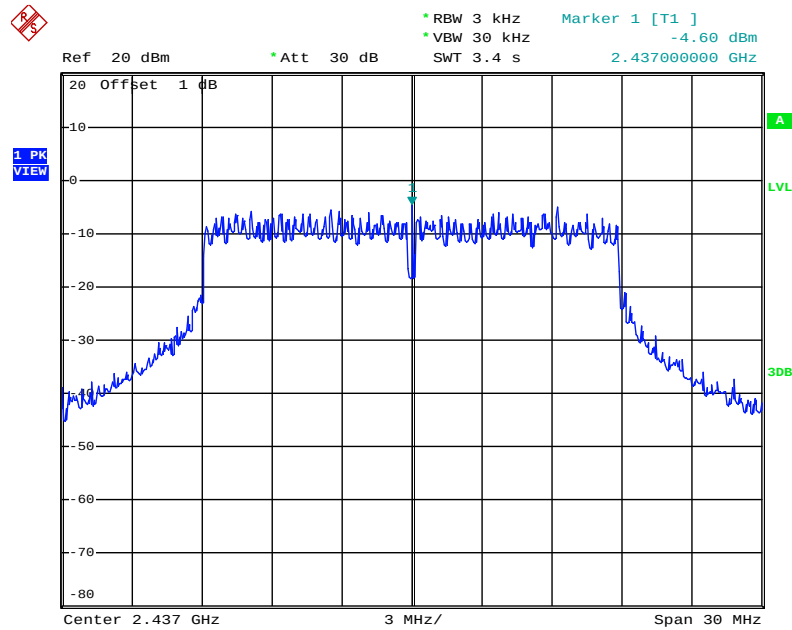


Date: 30.APR.2014 11:22:04

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant.1

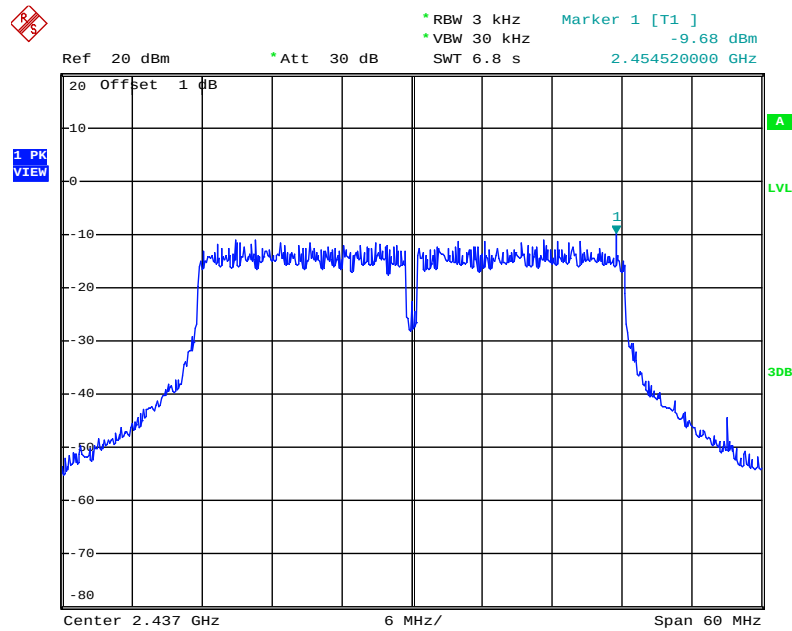


Date: 30.APR.2014 11:28:05

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant.2

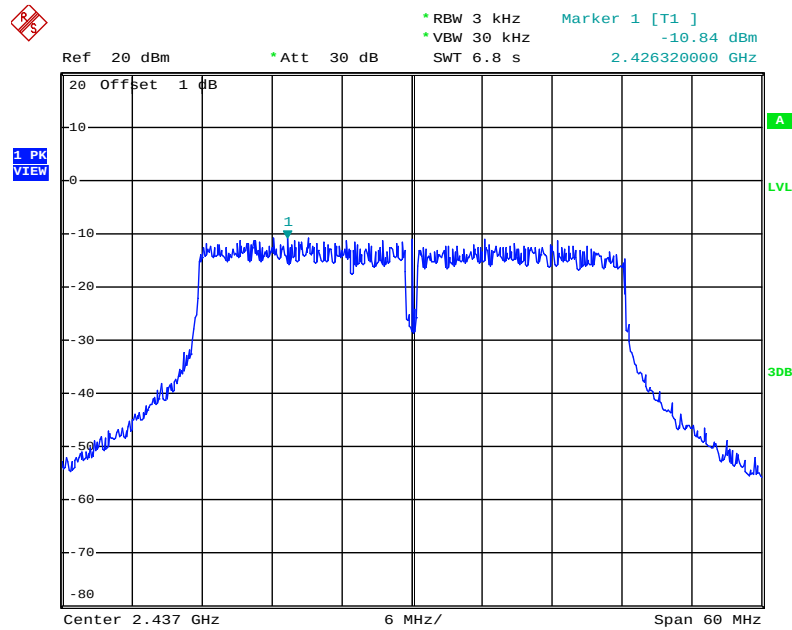


Date: 30.APR.2014 11:29:12

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5785 MHz / Ant.1

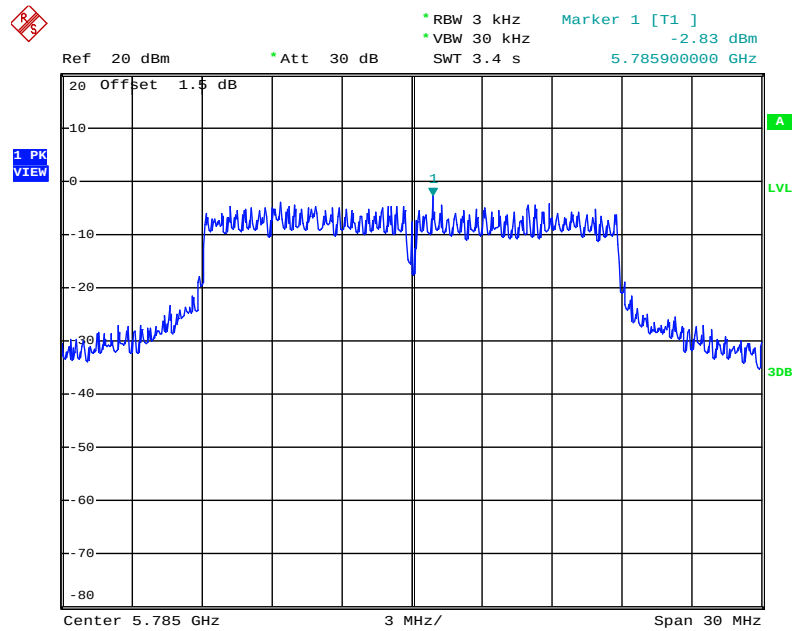


Date: 30.APR.2014 11:43:39

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5785 MHz / Ant.2

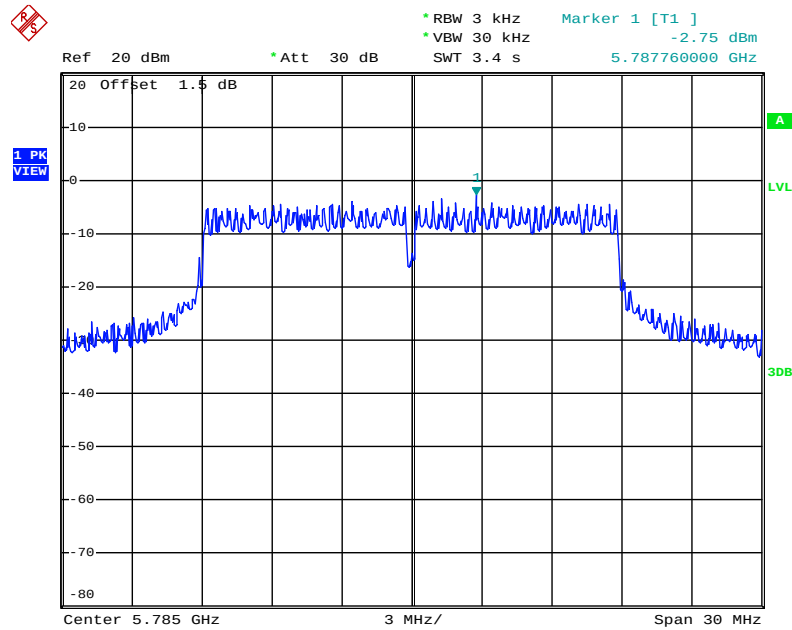


Date: 30.APR.2014 11:42:58

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Ant.1

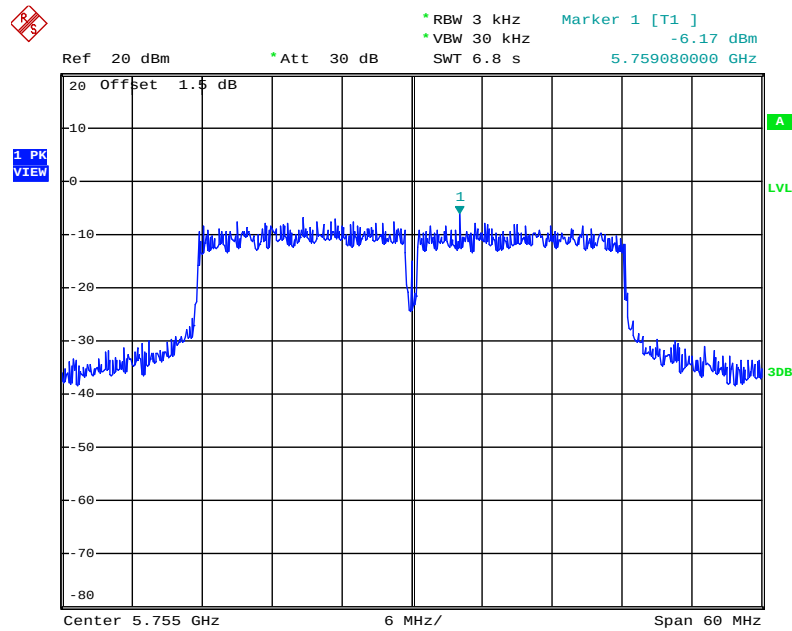


Date: 30.APR.2014 11:47:26

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Ant.2

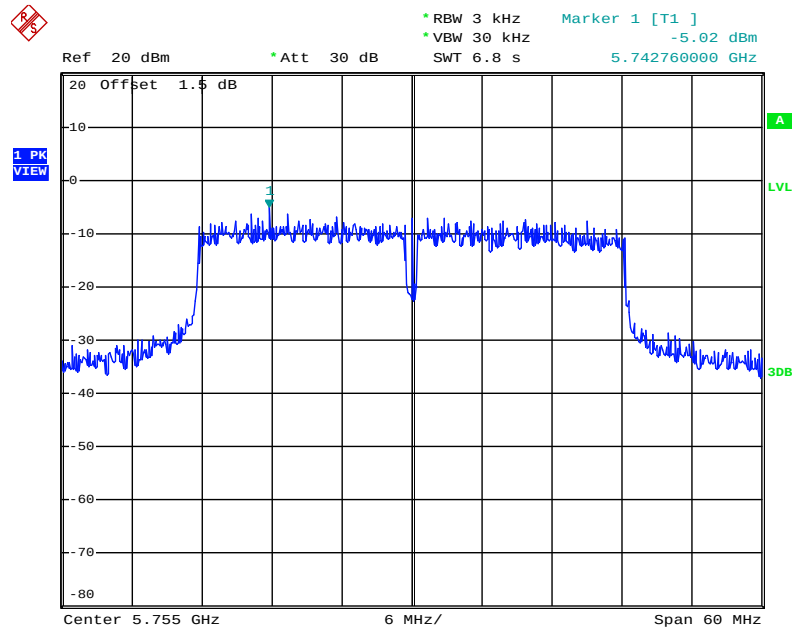


Date: 30.APR.2014 11:46:36

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant.1

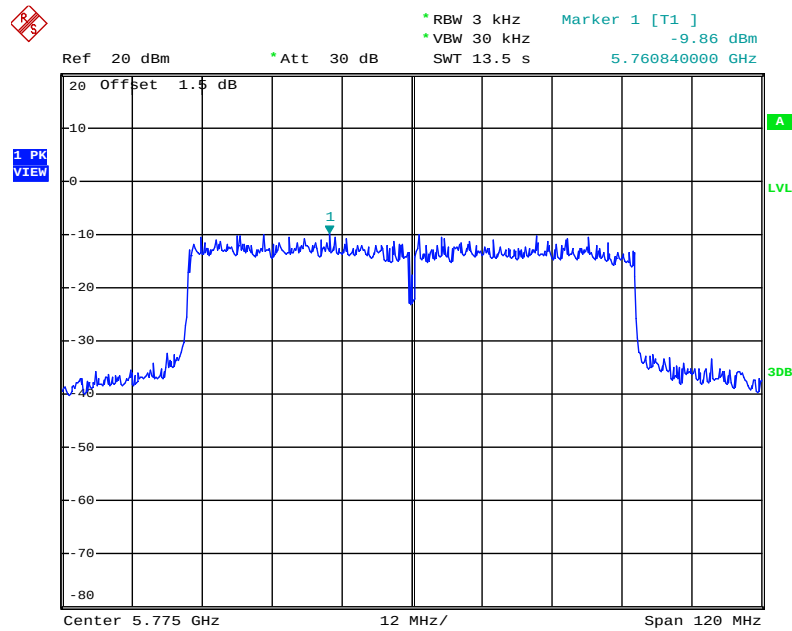


Date: 30.APR.2014 11:52:27

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant.2

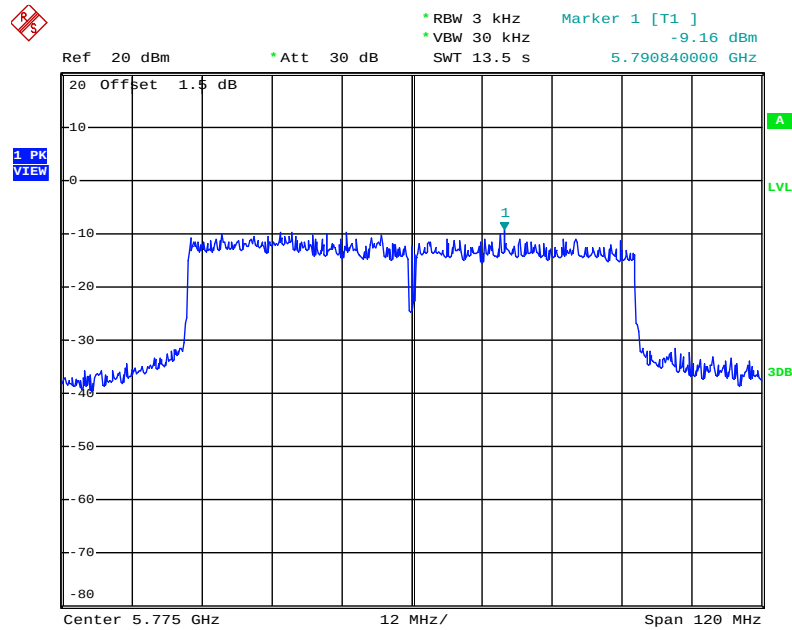


Date: 30.APR.2014 11:51:14

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Ant.1

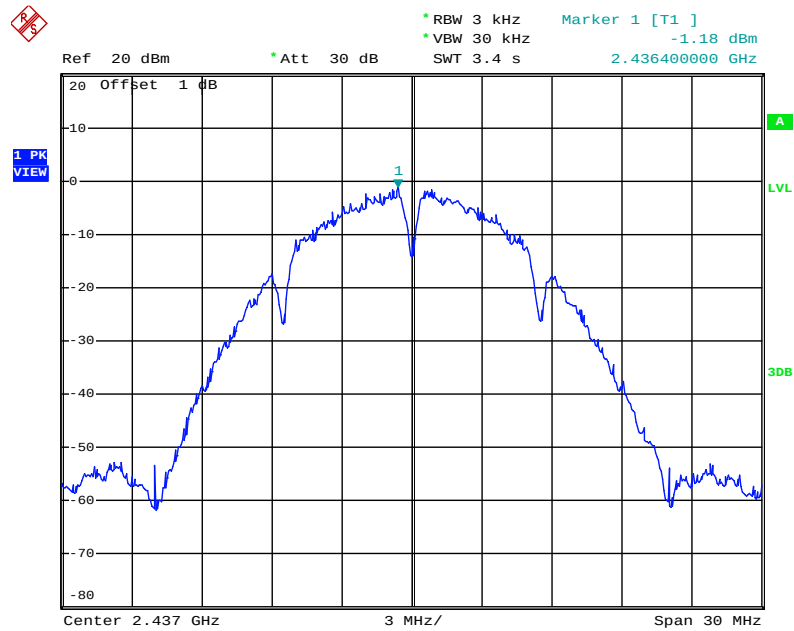


Date: 30.APR.2014 11:08:57

Power Density Plot on Configuration IEEE 802.11b / 2437MHz / Ant.2

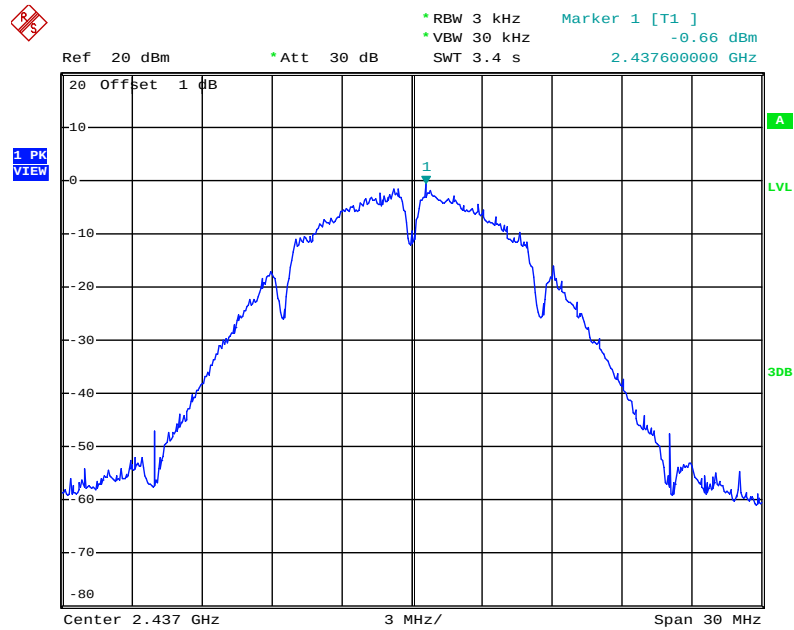


Date: 30.APR.2014 11:07:23

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant.1

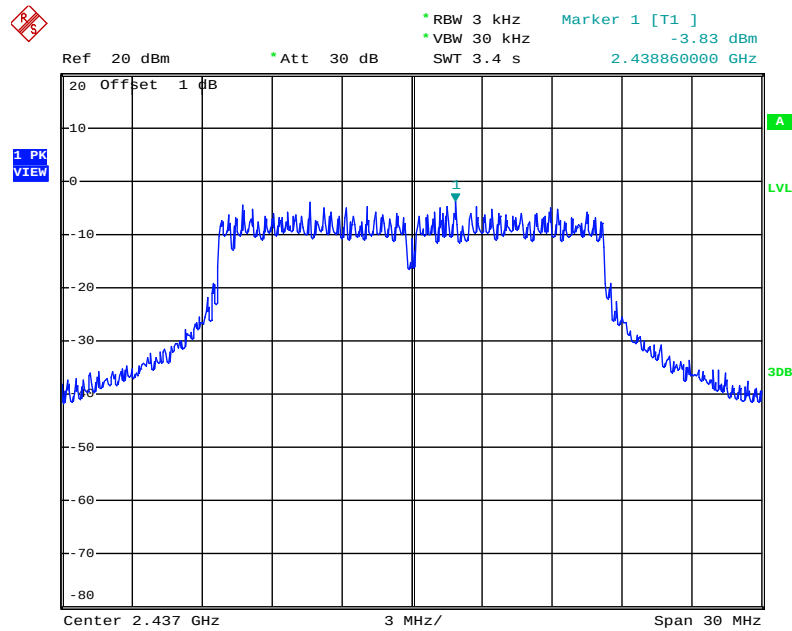


Date: 30.APR.2014 11:16:49

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant.2

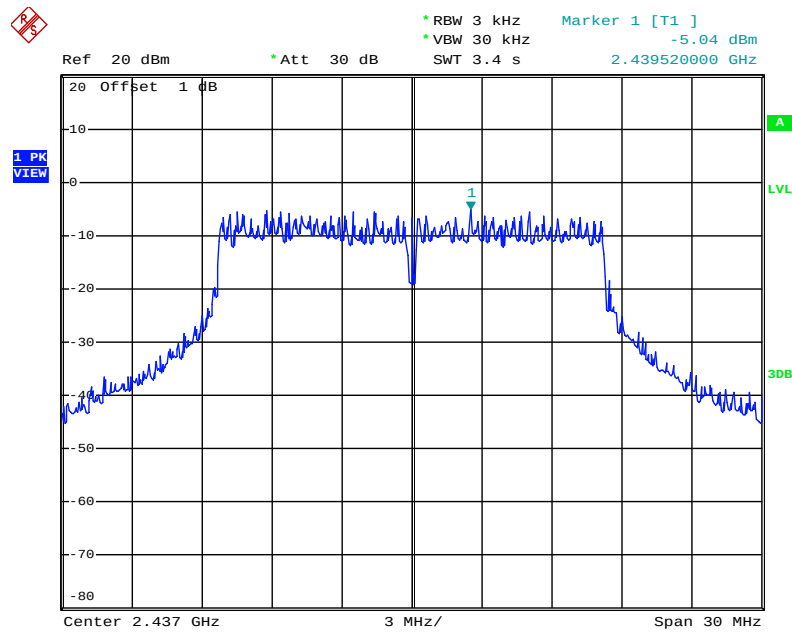


Date: 30.APR.2014 11:17:40

Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Ant.1

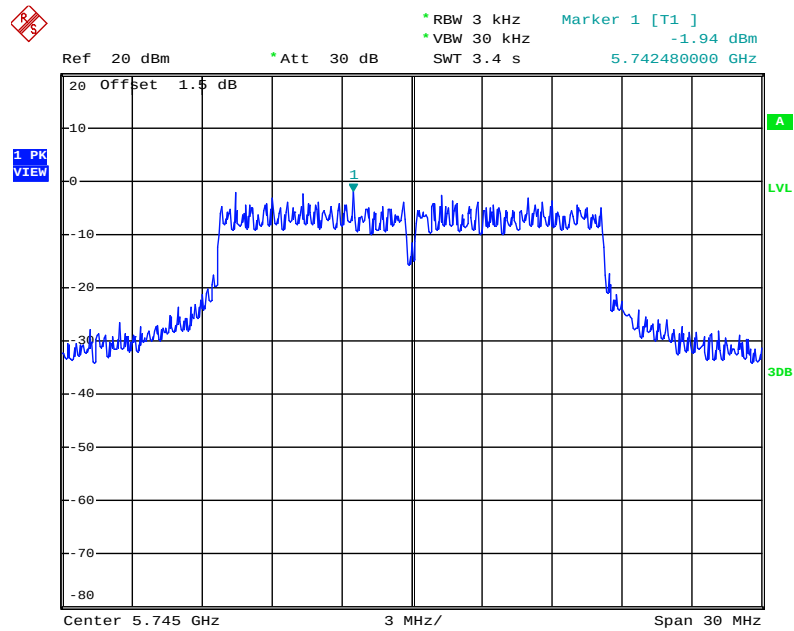

Date: 30.APR.2014 11:36:59

Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Ant.2

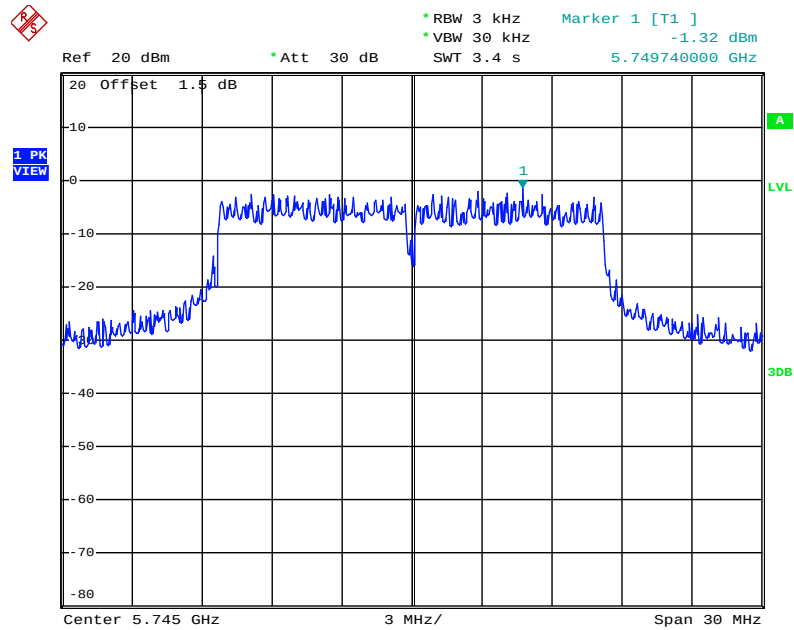

Date: 30.APR.2014 11:36:03

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth=> 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	20°C	Humidity	52%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n/ac

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 HT20 / Ant.1 + Ant.2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.60	18.00	500	Complies
6	2437 MHz	17.60	18.00	500	Complies
11	2462 MHz	17.60	18.00	500	Complies

Configuration IEEE 802.11n MCS0 HT40 / Ant.1 + Ant.2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.16	36.48	500	Complies
6	2437 MHz	36.32	36.48	500	Complies
9	2452 MHz	36.16	36.48	500	Complies

For 5GHz Band

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant.1 + Ant.2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	17.60	19.84	500	Complies
157	5785 MHz	16.88	20.88	500	Complies
165	5825 MHz	17.60	20.16	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant.1 + Ant.2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	35.04	36.16	500	Complies
159	5795 MHz	35.04	36.32	500	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant.1 + Ant.2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
155	5775 MHz	69.44	76.80	500	Complies

Temperature	20°C	Humidity	52%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a/b/g

Configuration IEEE 802.11b / Ant.1 + Ant.2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	6.56	10.00	500	Complies
6	2437 MHz	6.24	10.00	500	Complies
11	2462 MHz	7.04	9.92	500	Complies

Configuration IEEE 802.11g / Ant.1 + Ant.2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.32	16.64	500	Complies
6	2437 MHz	16.32	16.72	500	Complies
11	2462 MHz	16.40	16.72	500	Complies


Configuration IEEE 802.11a / Ant.1 + Ant.2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	15.04	18.88	500	Complies
157	5785 MHz	15.92	17.92	500	Complies
165	5825 MHz	16.32	17.60	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant.1 + Ant.2

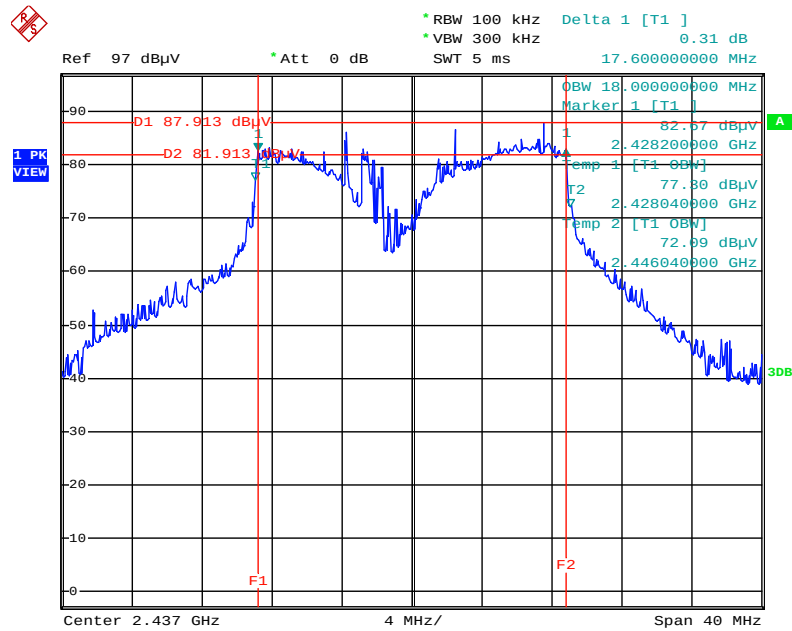


Date: 30.APR.2014 10:52:27

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Ant.1 + Ant.2

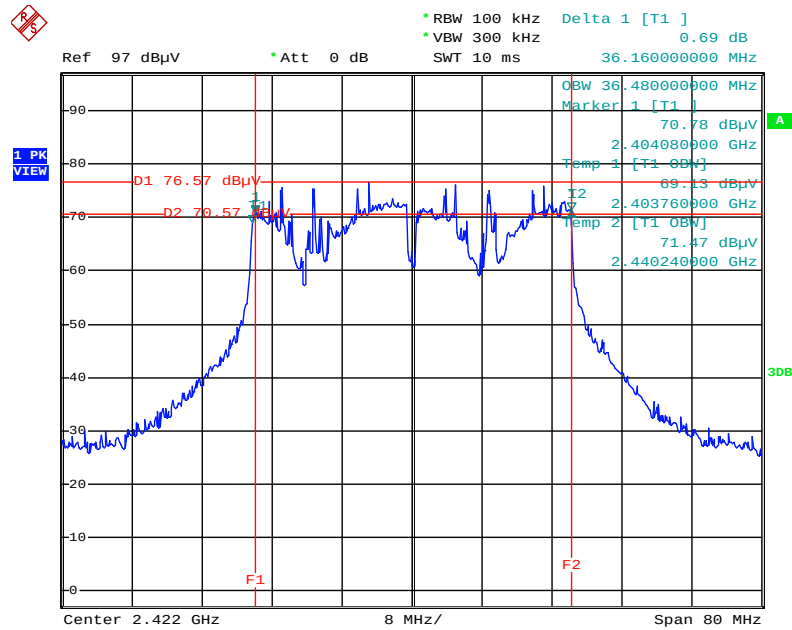


Date: 30.APR.2014 10:55:19

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5785 MHz / Ant.1 + Ant.2

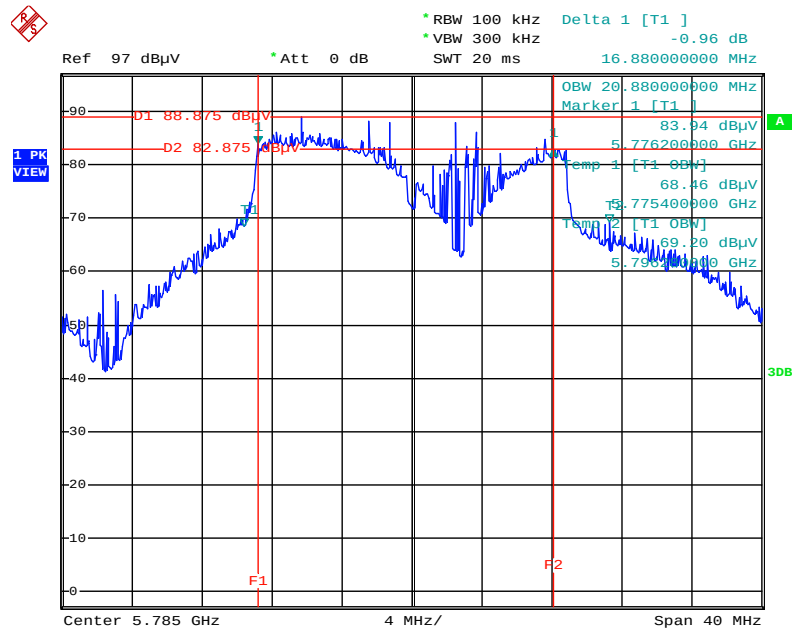


Date: 30.APR.2014 11:58:28

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795MHz / Ant.1 + Ant.2

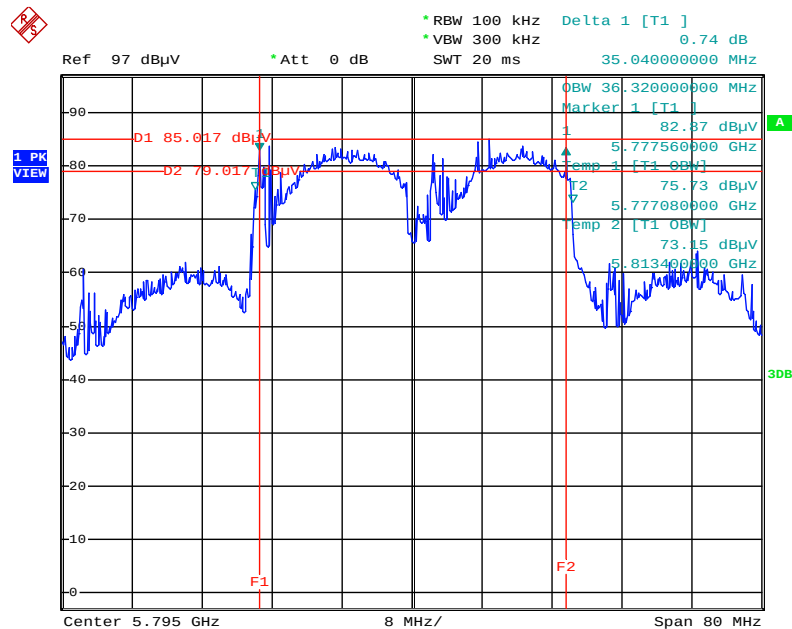


Date: 30.APR.2014 12:00:45

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant.1 + Ant.2

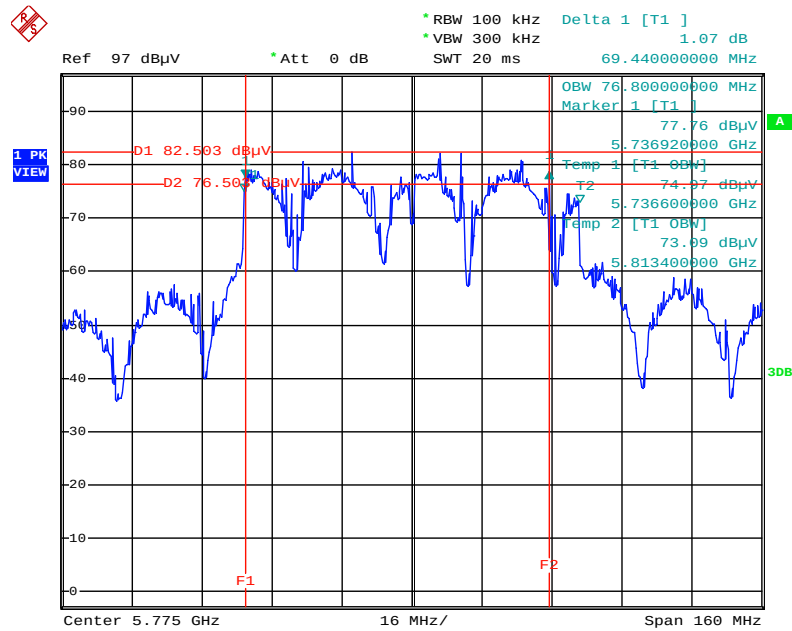


Date: 30.APR.2014 12:01:35

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Ant.1+Ant.2

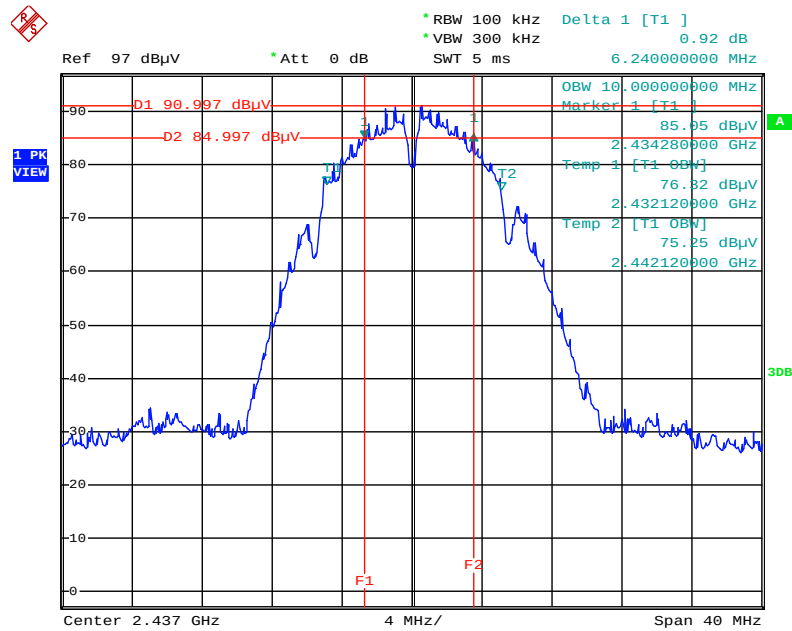


Date: 30.APR.2014 10:47:04

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Ant.1 + Ant.2

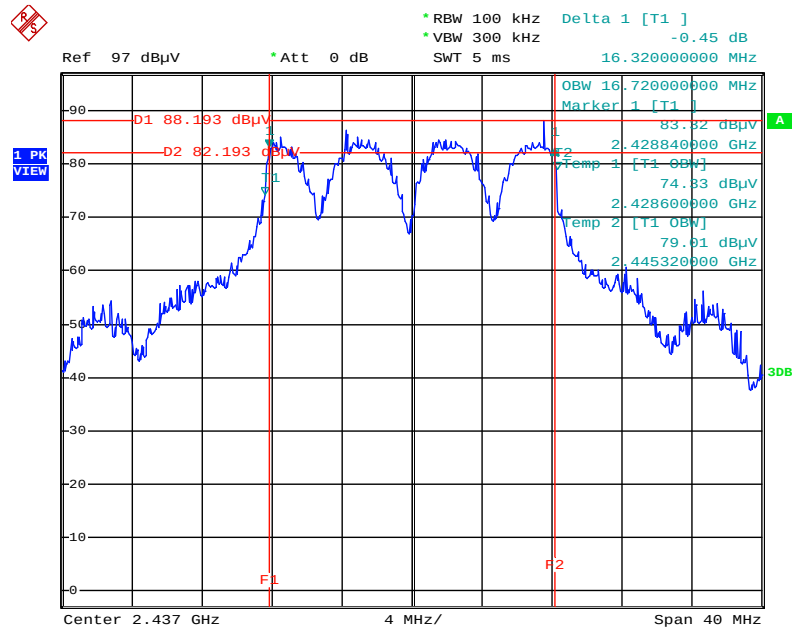

Date: 30.APR.2014 10:49:20

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5745 MHz / Ant.1 + Ant.2

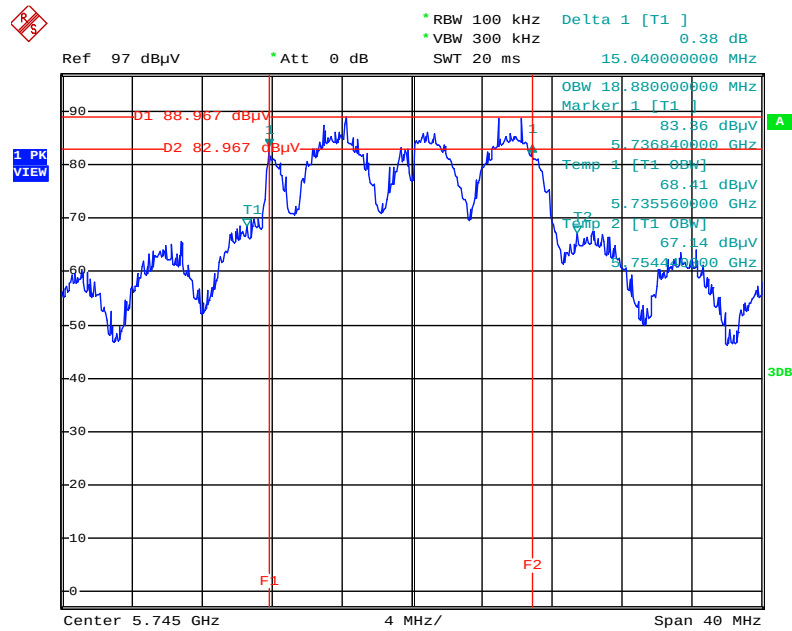

Date: 30.APR.2014 11:55:09

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1GHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

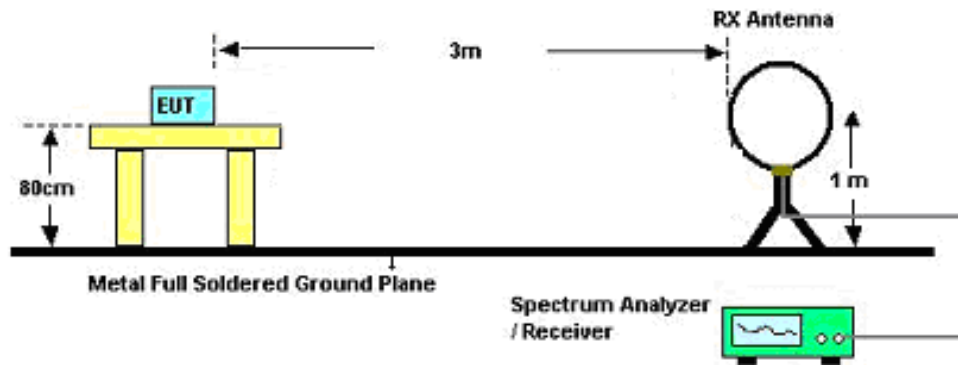

For Radiated Emissions: 30MHz~1GHz

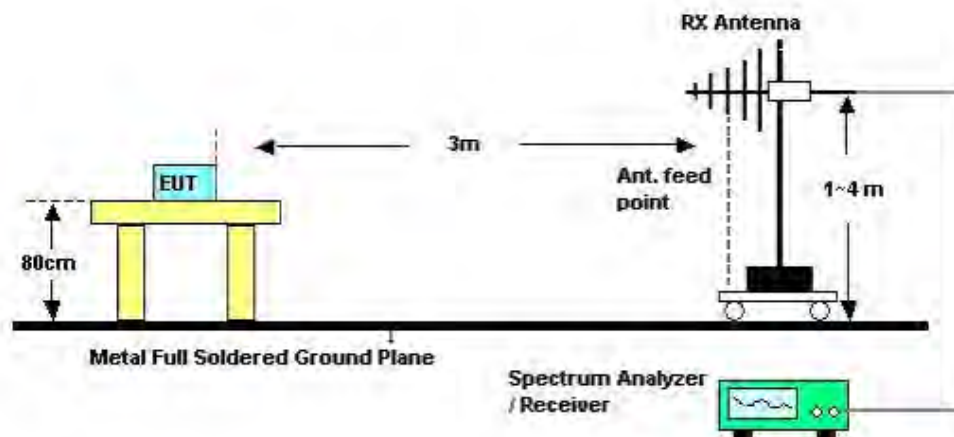

For Radiated Emissions: Above 1GHz

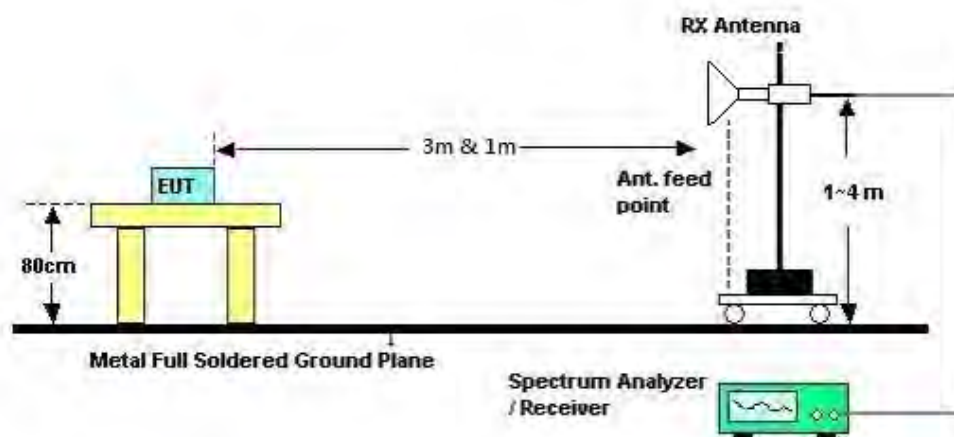

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	CTX
Test Date	Jul. 30, 2014		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	CTX
Test Mode	Mode 1		

Horizontal

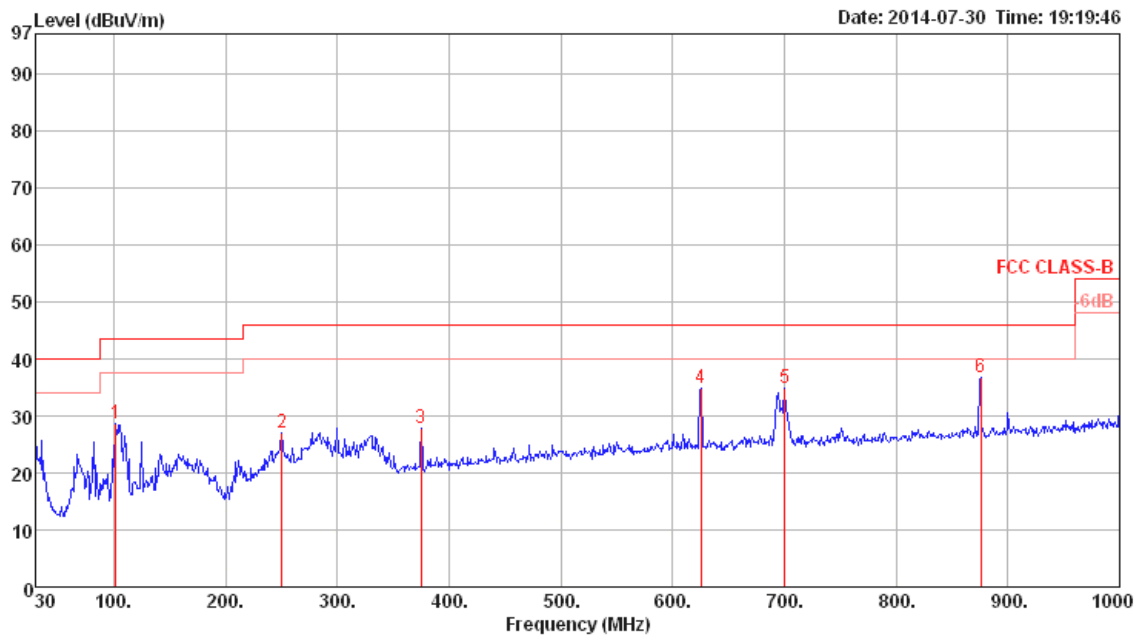

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	101.78	28.77	43.50	-14.73	44.04	1.18	11.14	27.59	Peak	100	0	HORIZONTAL
2	250.19	27.00	46.00	-19.00	39.45	1.78	12.77	27.00	Peak	100	0	HORIZONTAL
3	375.32	27.75	46.00	-18.25	37.58	2.20	15.40	27.43	Peak	100	0	HORIZONTAL
4	625.58	34.83	46.00	-11.17	41.15	2.90	18.85	28.07	Peak	100	0	HORIZONTAL
5	700.27	34.83	46.00	-11.17	40.63	3.10	19.09	27.99	Peak	100	0	HORIZONTAL
6	875.84	36.87	46.00	-9.13	40.51	3.46	20.35	27.45	Peak	100	0	HORIZONTAL

Vertical

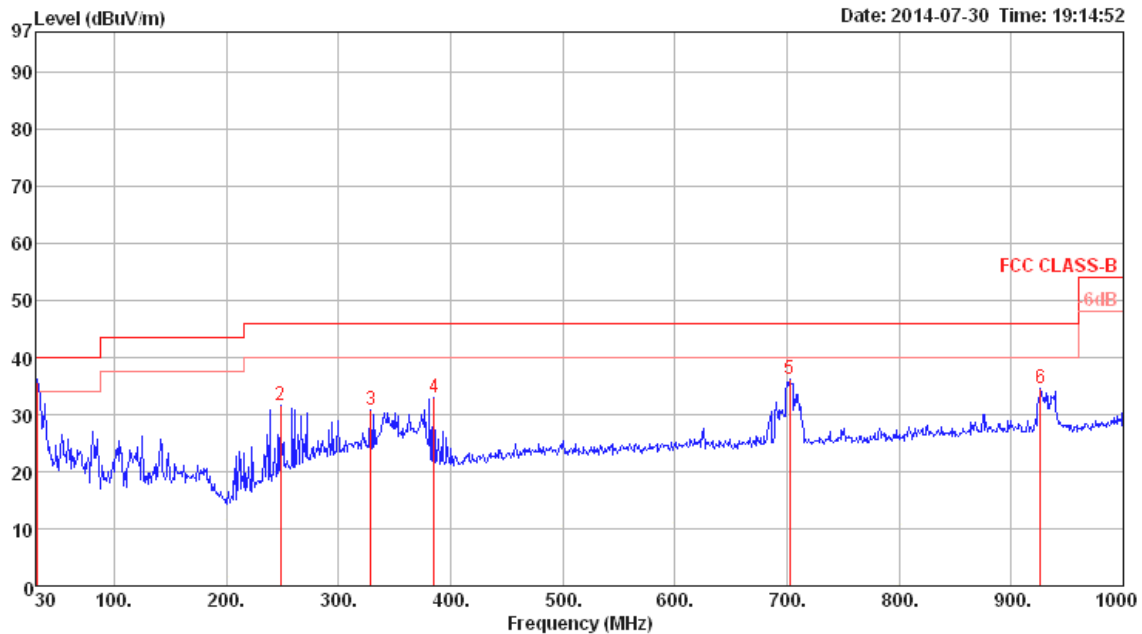

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	30.97	35.77	40.00	-4.23	44.72	0.63	18.22	27.80	QP	100	253	VERTICAL
2	248.25	31.69	46.00	-14.31	44.28	1.78	12.63	27.00	Peak	400	0	VERTICAL
3	328.76	30.82	46.00	-15.18	41.70	2.07	14.15	27.10	Peak	400	0	VERTICAL
4	385.02	32.92	46.00	-13.08	42.50	2.24	15.67	27.49	Peak	400	0	VERTICAL
5	702.21	36.10	46.00	-9.90	41.89	3.10	19.10	27.99	Peak	400	0	VERTICAL
6	926.28	34.62	46.00	-11.38	37.65	3.53	20.73	27.29	Peak	400	0	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Ant.1 + Ant.2
Test Date	Apr. 22, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4823.96	33.28	54.00	-20.72	29.22	5.87	33.39	35.20	Average	100	165 HORIZONTAL
2	4833.88	44.10	74.00	-29.90	40.03	5.88	33.39	35.20	Peak	100	165 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4825.04	35.15	54.00	-18.85	31.09	5.87	33.39	35.20	Average	100	318 VERTICAL
2	4825.08	48.29	74.00	-25.71	44.23	5.87	33.39	35.20	Peak	100	318 VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Ant.1 + Ant.2
Test Date	Apr. 22, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4869.32	47.63	74.00	-26.37	43.46	5.92	33.45	35.20 Peak	127	331	HORIZONTAL
2	4873.92	37.12	54.00	-16.88	32.92	5.92	33.48	35.20 Average	127	331	HORIZONTAL
3	7313.96	38.42	54.00	-15.58	30.21	7.13	36.51	35.43 Average	100	84	HORIZONTAL
4	7320.40	52.29	74.00	-21.71	44.07	7.14	36.51	35.43 Peak	100	84	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.36	39.76	54.00	-14.24	35.56	5.92	33.48	35.20 Average	100	306	VERTICAL
2	4874.92	54.63	74.00	-19.37	50.43	5.92	33.48	35.20 Peak	100	306	VERTICAL
3	7313.68	59.32	74.00	-14.68	51.11	7.13	36.51	35.43 Peak	114	6	VERTICAL
4	7314.00	43.77	54.00	-10.23	35.56	7.13	36.51	35.43 Average	114	6	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Ant.1 + Ant.2
Test Date	Apr. 22, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4921.84	45.86	74.00	-28.14	41.51	5.97	33.58	35.20	100	189	HORIZONTAL
2	4924.16	33.25	54.00	-20.75	28.90	5.97	33.58	35.20	100	189	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4925.24	35.55	54.00	-18.45	31.20	5.97	33.58	35.20	100	44	VERTICAL
2	4928.00	45.86	74.00	-28.14	41.51	5.97	33.58	35.20	100	44	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Ant.1 + Ant.2
Test Date	Apr. 22, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4844.10	33.53	54.00	-20.47	29.43	5.88	33.42	35.20	Average	100	179 HORIZONTAL
2	4844.14	44.35	74.00	-29.65	40.25	5.88	33.42	35.20	Peak	100	179 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4842.22	44.93	74.00	-29.07	40.83	5.88	33.42	35.20	Peak	100	19 VERTICAL
2	4847.76	32.34	54.00	-21.66	28.24	5.88	33.42	35.20	Average	100	19 VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Ant.1 + Ant.2
Test Date	Apr. 22, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4871.12	45.45	74.00	-28.55	41.25	5.92	33.48	35.20	100	51	HORIZONTAL
2	4873.76	34.01	54.00	-19.99	29.81	5.92	33.48	35.20	100	51	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.84	34.27	54.00	-19.73	30.07	5.92	33.48	35.20	135	253	VERTICAL
2	4877.76	44.90	74.00	-29.10	40.70	5.92	33.48	35.20	135	253	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Ant.1 + Ant.2
Test Date	Apr. 22, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4845.68	32.22	54.00	-21.78	28.12	5.88	33.42	35.20 Average	100	2	HORIZONTAL
2	4846.29	44.73	74.00	-29.27	40.63	5.88	33.42	35.20 Peak	100	2	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4843.22	45.03	74.00	-28.97	40.93	5.88	33.42	35.20 Peak	100	108	VERTICAL
2	4844.68	32.36	54.00	-21.64	28.26	5.88	33.42	35.20 Average	100	108	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Ant.1 + Ant.2
Test Date	Apr. 23, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	11488.76	60.18	74.00	-13.82	50.73	5.11	39.39	35.05	Peak	111	252 HORIZONTAL
2	11490.80	47.33	54.00	-6.67	37.88	5.11	39.39	35.05	Average	111	252 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	11490.48	43.12	54.00	-10.88	33.67	5.11	39.39	35.05	Average	100	89 VERTICAL
2	11496.40	53.37	74.00	-20.63	43.91	5.12	39.39	35.05	Peak	100	89 VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Ant.1 + Ant.2
Test Date	Apr. 23, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11570.00	48.81	54.00	-5.19	39.29	5.14	39.44	35.06	Average	100	243	HORIZONTAL
2	11571.20	62.93	74.00	-11.07	53.41	5.14	39.44	35.06	Peak	100	243	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11570.00	44.27	54.00	-9.73	34.75	5.14	39.44	35.06	Average	100	90	VERTICAL
2	11573.00	53.70	74.00	-20.30	44.18	5.14	39.44	35.06	Peak	100	90	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Ant.1 + Ant.2
Test Date	Apr. 23, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11649.10	48.12	54.00	-5.88	38.56	5.16	39.48	35.08	Average	115	245	HORIZONTAL
2	11649.10	59.23	74.00	-14.77	49.67	5.16	39.48	35.08	Peak	115	245	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11649.10	42.95	54.00	-11.05	33.39	5.16	39.48	35.08	Average	100	17	VERTICAL
2	11653.40	53.93	74.00	-20.07	44.36	5.16	39.49	35.08	Peak	100	17	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Ant.1 + Ant.2
Test Date	Apr. 23, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11506.20	57.25	74.00	-16.75	47.78	5.12	39.40	35.05	100	253	HORIZONTAL
2	11512.52	45.16	54.00	-8.84	35.69	5.12	39.40	35.05	100	253	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11503.92	51.75	74.00	-22.25	42.28	5.12	39.40	35.05	100	18	VERTICAL
2	11512.56	42.02	54.00	-11.98	32.55	5.12	39.40	35.05	100	18	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Ant.1 + Ant.2
Test Date	Apr. 23, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11589.40	45.30	54.00	-8.70	35.77	5.14	39.45	35.06	Average	100	240	HORIZONTAL
2	11590.50	57.08	74.00	-16.92	47.55	5.14	39.45	35.06	Peak	100	240	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11590.70	53.70	74.00	-20.30	44.17	5.14	39.45	35.06	Peak	100	41	VERTICAL
2	11590.80	42.38	54.00	-11.62	32.85	5.14	39.45	35.06	Average	100	41	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Ant.1 + Ant.2
Test Date	Apr. 23, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11550.80	43.01	54.00	-10.99	33.51	5.13	39.43	35.06	Average	100	248	HORIZONTAL
2	11553.20	55.91	74.00	-18.09	46.41	5.13	39.43	35.06	Peak	100	248	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11549.20	52.46	74.00	-21.54	42.96	5.13	39.43	35.06	Peak	100	47	VERTICAL
2	11551.00	40.67	54.00	-13.33	31.17	5.13	39.43	35.06	Average	100	47	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11b CH 1 / Ant.1 +Ant.2
Test Date	Jul. 19, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.93	47.08	74.00	-26.92	45.24	3.31	33.56	35.03	Peak	100	339	HORIZONTAL
2	4823.96	41.08	54.00	-12.92	39.24	3.31	33.56	35.03	Average	100	339	HORIZONTAL
3	7235.20	35.09	54.00	-18.91	29.95	4.06	36.48	35.40	Average	100	342	HORIZONTAL
4	7236.00	47.83	74.00	-26.17	42.69	4.06	36.48	35.40	Peak	100	342	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.95	39.34	54.00	-14.66	37.50	3.31	33.56	35.03	Average	100	168	VERTICAL
2	4824.03	46.26	74.00	-27.74	44.42	3.31	33.56	35.03	Peak	100	168	VERTICAL
3	7235.32	37.11	54.00	-16.89	31.97	4.06	36.48	35.40	Average	100	355	VERTICAL
4	7236.00	47.83	74.00	-26.17	42.69	4.06	36.48	35.40	Peak	100	355	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11b CH 6 / Ant.1 +Ant.2
Test Date	Jul. 19, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.94	45.03	54.00	-8.97	43.07	3.33	33.66	35.03	Average	138	334	HORIZONTAL
2	4873.95	49.46	74.00	-24.54	47.50	3.33	33.66	35.03	Peak	138	334	HORIZONTAL
3	7309.16	45.32	54.00	-8.68	40.02	4.06	36.64	35.40	Average	100	117	HORIZONTAL
4	7309.16	51.04	74.00	-22.96	45.74	4.06	36.64	35.40	Peak	100	117	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4873.90	49.09	54.00	-4.91	47.13	3.33	33.66	35.03	Average	111	212	VERTICAL
2	4874.02	52.41	74.00	-21.59	50.45	3.33	33.66	35.03	Peak	111	212	VERTICAL
3	7309.16	51.78	54.00	-2.22	46.48	4.06	36.64	35.40	Average	104	354	VERTICAL
4	7309.40	57.17	74.00	-16.83	51.87	4.06	36.64	35.40	Peak	104	354	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11b CH 11 / Ant.1 +Ant.2
Test Date	Jul. 19, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	
1	4917.44	56.19	74.00	-17.81	54.13	3.35	33.73	35.02	Peak	112	210	HORIZONTAL
2	4924.00	46.60	54.00	-7.40	44.50	3.35	33.76	35.01	Average	112	210	HORIZONTAL
3	7376.92	48.32	54.00	-5.68	42.85	4.06	36.81	35.40	Average	112	218	HORIZONTAL
4	7379.36	60.89	74.00	-13.11	55.42	4.06	36.81	35.40	Peak	112	218	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	
1	4923.93	48.41	74.00	-25.59	46.31	3.35	33.76	35.01	Peak	100	211	VERTICAL
2	4923.97	42.82	54.00	-11.18	40.72	3.35	33.76	35.01	Average	100	211	VERTICAL
3	7387.20	50.78	54.00	-3.22	45.27	4.06	36.85	35.40	Average	111	3	VERTICAL
4	7387.44	57.23	74.00	-16.77	51.72	4.06	36.85	35.40	Peak	111	3	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11g CH 1 / Ant.1 + Ant.2
Test Date	Apr. 22, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4824.04	33.30	54.00	-20.70	29.24	5.87	33.39	35.20	100	137	HORIZONTAL
2	4825.12	44.50	74.00	-29.50	40.44	5.87	33.39	35.20	100	137	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4823.94	35.18	54.00	-18.82	31.12	5.87	33.39	35.20	106	353	VERTICAL
2	4825.48	45.34	74.00	-28.66	41.28	5.87	33.39	35.20	106	353	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11g CH 6 / Ant.1 + Ant.2
Test Date	Apr. 22, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4875.64	36.73	54.00	-17.27	32.53	5.92	33.48	35.20	Average	143	2	HORIZONTAL
2	4877.60	49.00	74.00	-25.00	44.80	5.92	33.48	35.20	Peak	143	2	HORIZONTAL
3	7305.30	38.54	54.00	-15.46	30.35	7.13	36.48	35.42	Average	100	89	HORIZONTAL
4	7323.20	51.99	74.00	-22.01	43.77	7.14	36.51	35.43	Peak	100	89	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4876.16	52.23	74.00	-21.77	48.03	5.92	33.48	35.20	Peak	100	312	VERTICAL
2	4876.24	39.70	54.00	-14.30	35.50	5.92	33.48	35.20	Average	100	312	VERTICAL
3	7307.10	43.13	54.00	-10.87	34.95	7.13	36.48	35.43	Average	112	19	VERTICAL
4	7320.80	57.69	74.00	-16.31	49.47	7.14	36.51	35.43	Peak	112	19	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11g CH 11 / Ant.1 + Ant.2
Test Date	Apr. 22, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4921.55	45.38	74.00	-28.62	41.07	5.97	33.54	35.20	Peak	100	235	HORIZONTAL
2	4925.04	32.99	54.00	-21.01	28.64	5.97	33.58	35.20	Average	100	235	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4922.90	34.73	54.00	-19.27	30.38	5.97	33.58	35.20	Average	100	156	VERTICAL
2	4925.00	47.48	74.00	-26.52	43.13	5.97	33.58	35.20	Peak	100	156	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11a CH 149 / Ant.1 + Ant.2
Test Date	Apr. 23, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
						dB	dB/m	dB			Pol/Phase
1	11490.04	47.78	54.00	-6.22	38.33	5.11	39.39	35.05	Average	118	250 HORIZONTAL
2	11490.40	58.49	74.00	-15.51	49.04	5.11	39.39	35.05	Peak	118	250 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
						dB	dB/m	dB			Pol/Phase
1	11489.71	55.98	74.00	-18.02	46.53	5.11	39.39	35.05	Peak	100	215 VERTICAL
2	11490.72	40.72	54.00	-13.28	31.27	5.11	39.39	35.05	Average	100	215 VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11a CH 157 / Ant.1 + Ant.2
Test Date	Apr. 23, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11570.00	48.81	54.00	-5.19	39.29	5.14	39.44	35.06	Average	100	243	HORIZONTAL
2	11571.20	62.93	74.00	-11.07	53.41	5.14	39.44	35.06	Peak	100	243	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11570.00	44.27	54.00	-9.73	34.75	5.14	39.44	35.06	Average	100	90	VERTICAL
2	11573.00	53.70	74.00	-20.30	44.18	5.14	39.44	35.06	Peak	100	90	VERTICAL

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11a CH 165 / Ant.1 + Ant.2
Test Date	Apr. 23, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11649.10	48.12	54.00	-5.88	38.56	5.16	39.48	35.08	Average	115	245	HORIZONTAL
2	11649.10	59.23	74.00	-14.77	49.67	5.16	39.48	35.08	Peak	115	245	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11649.10	42.95	54.00	-11.05	33.39	5.16	39.48	35.08	Average	100	17	VERTICAL
2	11653.40	53.93	74.00	-20.07	44.36	5.16	39.49	35.08	Peak	100	17	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
2. The radiated emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Ant.1 + Ant.2
Test date	Apr. 22, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	52.84	54.00	-1.16	20.70	4.09	28.05	0.00 Average	127	10	VERTICAL
2	2390.00	72.25	74.00	-1.75	40.11	4.09	28.05	0.00 Peak	127	10	VERTICAL
3	2405.20	116.03			83.83	4.11	28.09	0.00 Peak	127	10	VERTICAL
4	2406.40	105.24			73.04	4.11	28.09	0.00 Average	127	10	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2351.20	67.72	74.00	-6.28	35.69	4.06	27.97	0.00 Peak	123	13	VERTICAL
2	2359.60	52.81	54.00	-1.19	20.77	4.07	27.97	0.00 Average	123	13	VERTICAL
3	2430.60	109.17			76.92	4.12	28.13	0.00 Average	123	13	VERTICAL
4	2431.40	119.79			87.54	4.12	28.13	0.00 Peak	123	13	VERTICAL
5	2483.50	49.72	54.00	-4.28	17.30	4.16	28.26	0.00 Average	123	13	VERTICAL
6	2484.70	64.20	74.00	-9.80	31.78	4.16	28.26	0.00 Peak	123	13	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2460.40	103.55			71.19	4.14	28.22	0.00 Average	127	25	VERTICAL
2	2460.80	115.66			83.30	4.14	28.22	0.00 Peak	127	25	VERTICAL
3	2483.50	50.54	54.00	-3.46	18.12	4.16	28.26	0.00 Average	127	25	VERTICAL
4	2483.50	72.56	74.00	-1.44	40.14	4.16	28.26	0.00 Peak	127	25	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Ant.1 + Ant.2
Test date	Apr. 22, 2014		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.20	69.04	74.00	-4.96	36.90	4.09	28.05	0.00	Peak	129	21	VERTICAL
2	2390.00	52.55	54.00	-1.45	20.41	4.09	28.05	0.00	Average	129	21	VERTICAL
3	2430.80	109.15			76.90	4.12	28.13	0.00	Peak	129	21	VERTICAL
4	2433.20	98.32			66.07	4.12	28.13	0.00	Average	129	21	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.80	71.20	74.00	-2.80	39.06	4.09	28.05	0.00	Peak	126	43	VERTICAL
2	2390.00	52.96	54.00	-1.04	20.82	4.09	28.05	0.00	Average	126	43	VERTICAL
3	2447.40	113.90			81.59	4.13	28.18	0.00	Peak	126	43	VERTICAL
4	2448.60	103.23			70.92	4.13	28.18	0.00	Average	126	43	VERTICAL
5	2483.50	72.19	74.00	-1.81	39.77	4.16	28.26	0.00	Peak	126	43	VERTICAL
6	2486.30	52.39	54.00	-1.61	19.93	4.16	28.30	0.00	Average	126	43	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2443.20	99.59			67.28	4.13	28.18	0.00	Average	126	44	VERTICAL
2	2443.20	110.13			77.82	4.13	28.18	0.00	Peak	126	44	VERTICAL
3	2483.50	52.79	54.00	-1.21	20.37	4.16	28.26	0.00	Average	126	44	VERTICAL
4	2483.50	71.00	74.00	-3.00	38.58	4.16	28.26	0.00	Peak	126	44	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11b CH 1, 6, 11 / Ant.1+Ant.2
Test Date	Jul. 19, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2331.20	67.60	74.00	-6.40	37.06	2.18	28.36	0.00	Peak	128	189 VERTICAL
2	2372.80	52.58	54.00	-1.42	21.91	2.21	28.46	0.00	Average	128	189 VERTICAL
3	2412.80	116.83			86.08	2.22	28.53	0.00	Average	128	189 VERTICAL
4	2412.80	121.11			90.36	2.22	28.53	0.00	Peak	128	189 VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2356.40	67.60	74.00	-6.40	36.99	2.19	28.42	0.00	Peak	128	190 VERTICAL
2	2390.00	51.09	54.00	-2.91	20.38	2.22	28.49	0.00	Average	128	190 VERTICAL
3	2436.20	119.89			89.10	2.23	28.56	0.00	Average	128	190 VERTICAL
4	2437.80	123.92			93.09	2.23	28.60	0.00	Peak	128	190 VERTICAL
5	2515.90	64.26	74.00	-9.74	33.23	2.27	28.76	0.00	Peak	128	190 VERTICAL
6	2520.30	51.06	54.00	-2.94	20.01	2.29	28.76	0.00	Average	128	190 VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2300.00	49.99	54.00	-4.01	19.53	2.17	28.29	0.00	Average	112	219 VERTICAL
2	2385.00	63.74	74.00	-10.26	33.07	2.21	28.46	0.00	Peak	112	219 VERTICAL
3	2464.00	111.50			80.63	2.24	28.63	0.00	Average	112	219 VERTICAL
4	2464.00	116.50			85.63	2.24	28.63	0.00	Peak	112	219 VERTICAL
5	2483.50	49.16	54.00	-4.84	18.23	2.26	28.67	0.00	Average	112	219 VERTICAL
6	2483.50	59.94	74.00	-14.06	29.01	2.26	28.67	0.00	Peak	112	219 VERTICAL

Item 3, 4 are the fundamental frequency at 2462 MHz.

Temperature	24°C	Humidity	57%
Test Engineer	Serway Li	Configurations	IEEE 802.11g CH 1, 6, 11 / Ant.1 + Ant.2
Test Date	Apr. 22, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2387.40	72.97	74.00	-1.03	40.83	4.09	28.05	0.00	Peak	128	20	VERTICAL
2	2390.00	51.95	54.00	-2.05	19.81	4.09	28.05	0.00	Average	128	20	VERTICAL
3	2407.00	105.83			73.63	4.11	28.09	0.00	Average	128	20	VERTICAL
4	2407.40	115.59			83.39	4.11	28.09	0.00	Peak	128	20	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2358.80	67.50	74.00	-6.50	35.46	4.07	27.97	0.00	Peak	124	13	VERTICAL
2	2359.60	52.87	54.00	-1.13	20.83	4.07	27.97	0.00	Average	124	13	VERTICAL
3	2433.00	109.38			77.13	4.12	28.13	0.00	Average	124	13	VERTICAL
4	2443.80	119.97			87.66	4.13	28.18	0.00	Peak	124	13	VERTICAL
5	2483.50	51.07	54.00	-2.93	18.65	4.16	28.26	0.00	Average	124	13	VERTICAL
6	2483.50	64.19	74.00	-9.81	31.77	4.16	28.26	0.00	Peak	124	13	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2469.20	114.98			82.58	4.14	28.26	0.00	Peak	123	23	VERTICAL
2	2469.40	105.39			72.99	4.14	28.26	0.00	Average	123	23	VERTICAL
3	2483.50	51.33	54.00	-2.67	18.91	4.16	28.26	0.00	Average	123	23	VERTICAL
4	2485.10	72.73	74.00	-1.27	40.27	4.16	28.30	0.00	Peak	123	23	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

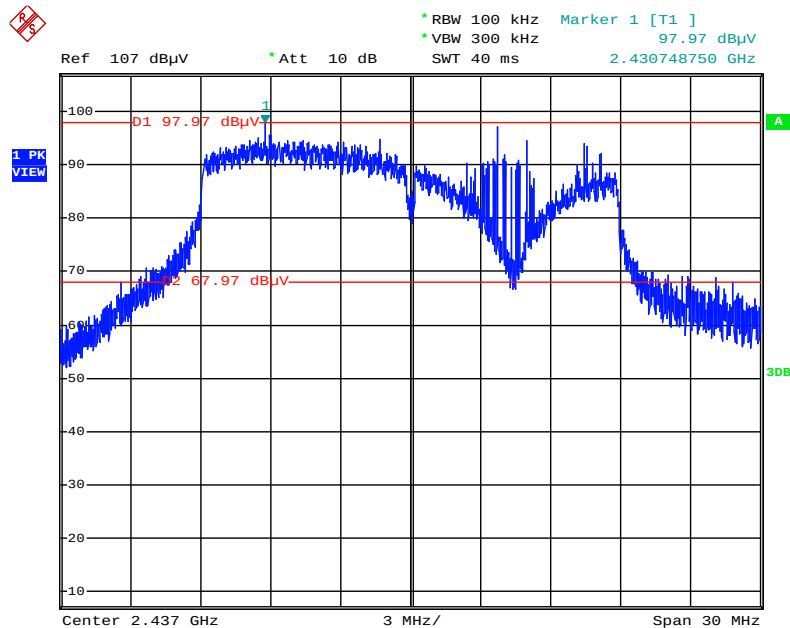


Date: 22.APR.2014 02:31:56

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

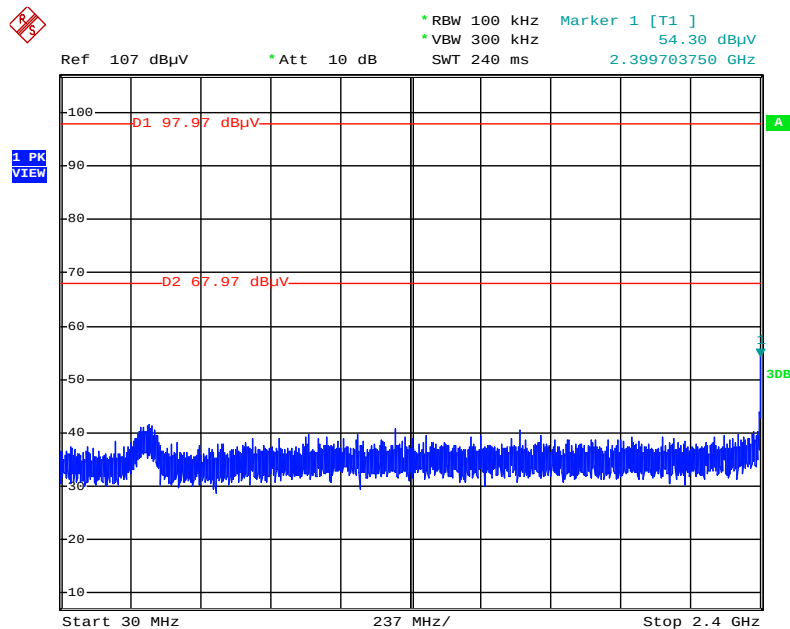


Date: 22.APR.2014 02:32:45

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

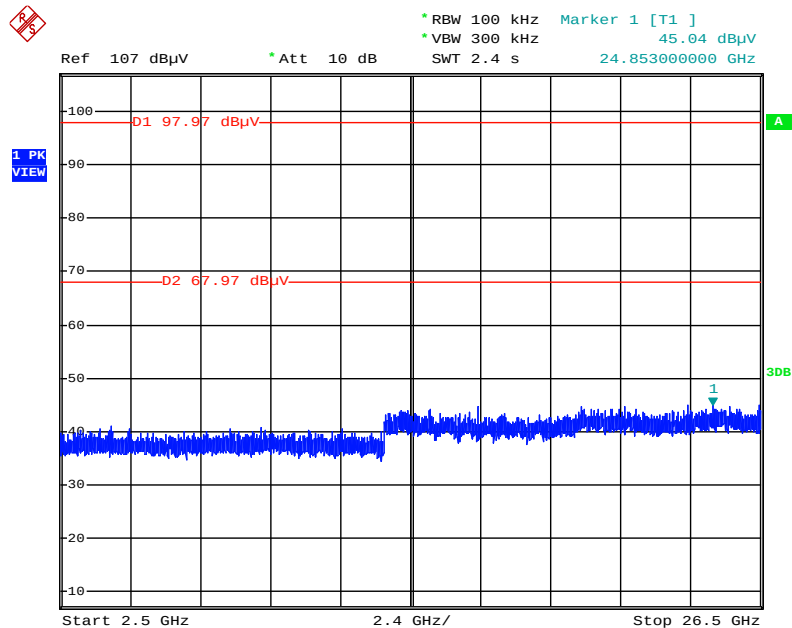


Date: 22.APR.2014 02:33:19

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

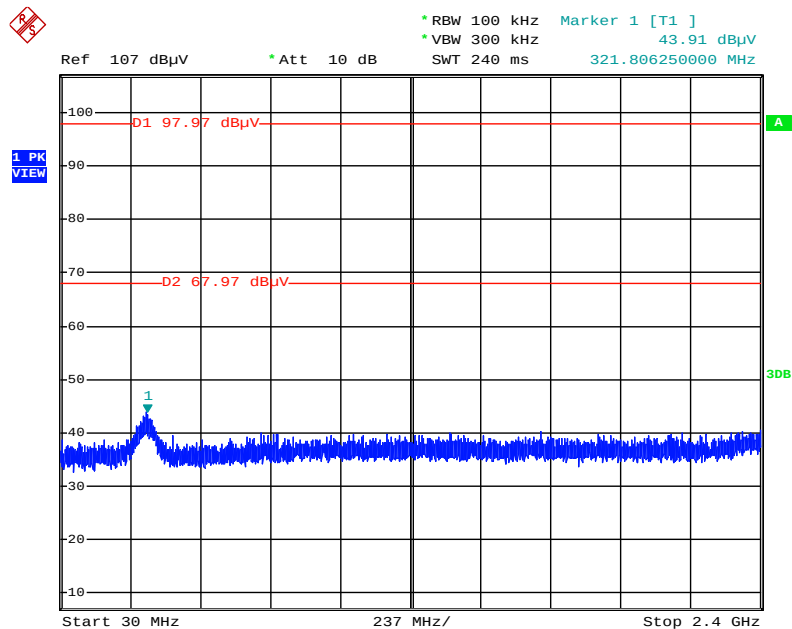


Date: 22.APR.2014 02:34:14

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

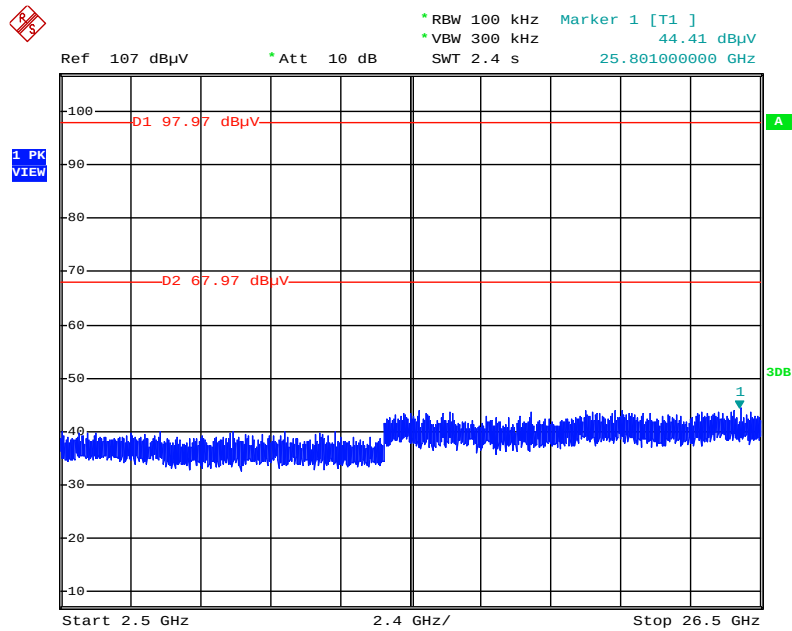


Date: 22.APR.2014 02:33:48

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

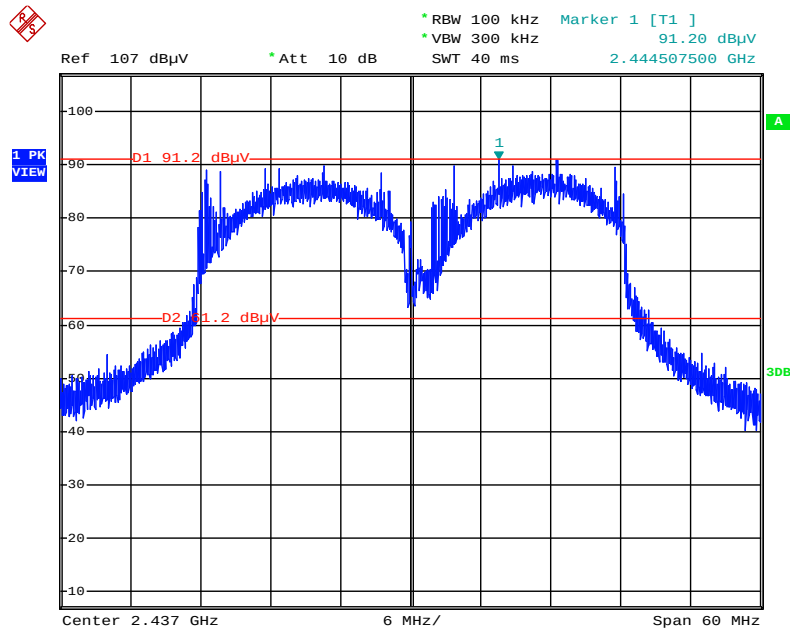


Date: 22.APR.2014 02:35:58

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

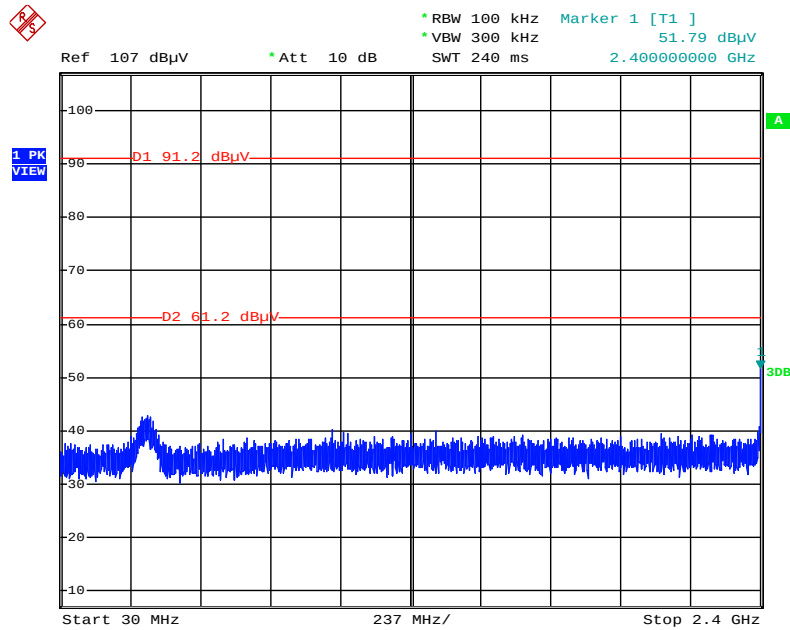


Date: 22.APR.2014 02:37:01

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

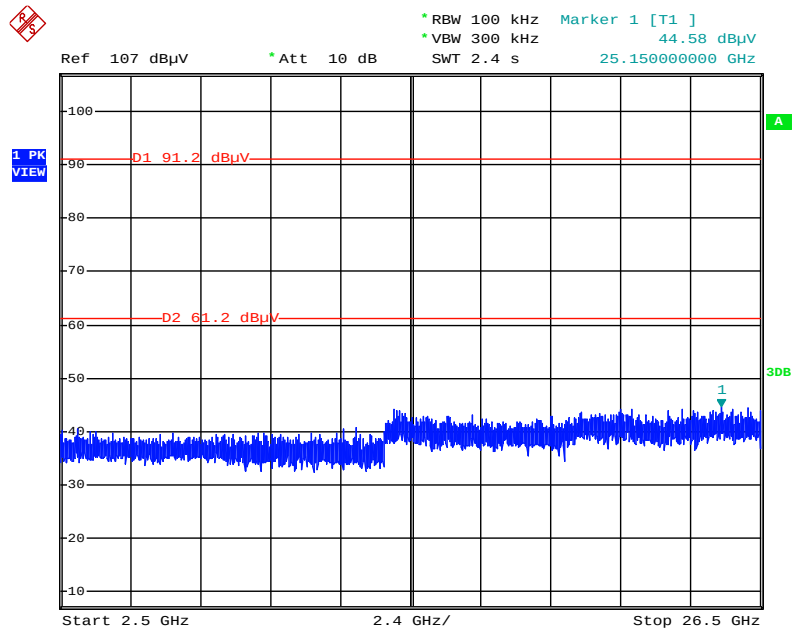


Date: 22.APR.2014 02:37:19

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

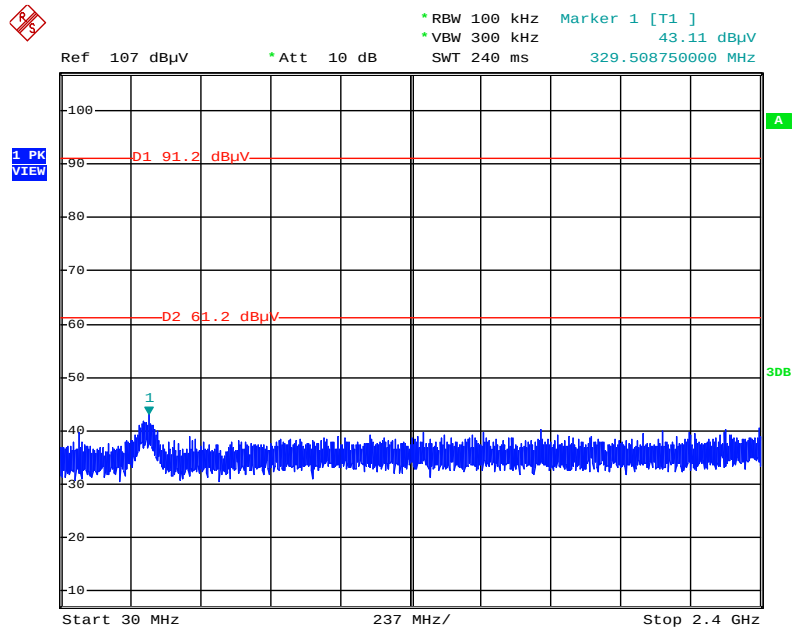


Date: 22.APR.2014 02:38:04

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

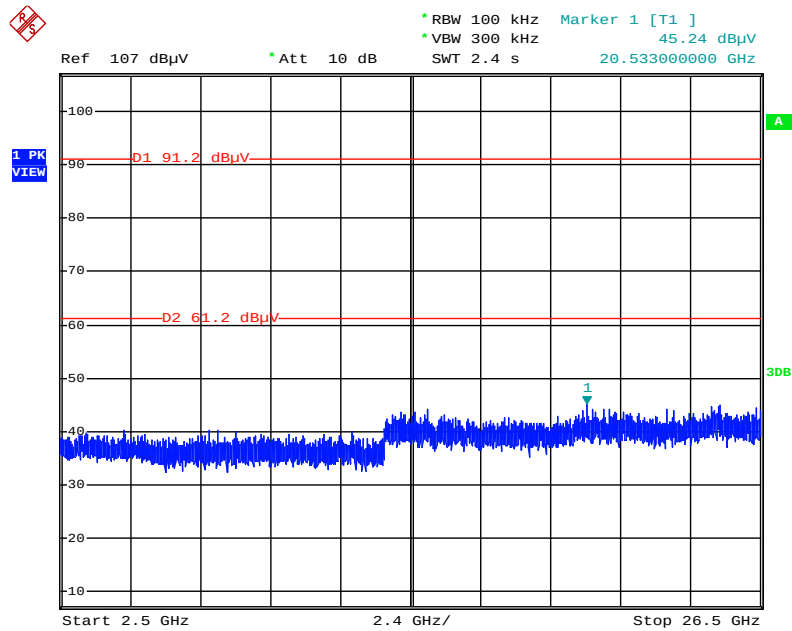


Date: 22.APR.2014 02:37:43

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

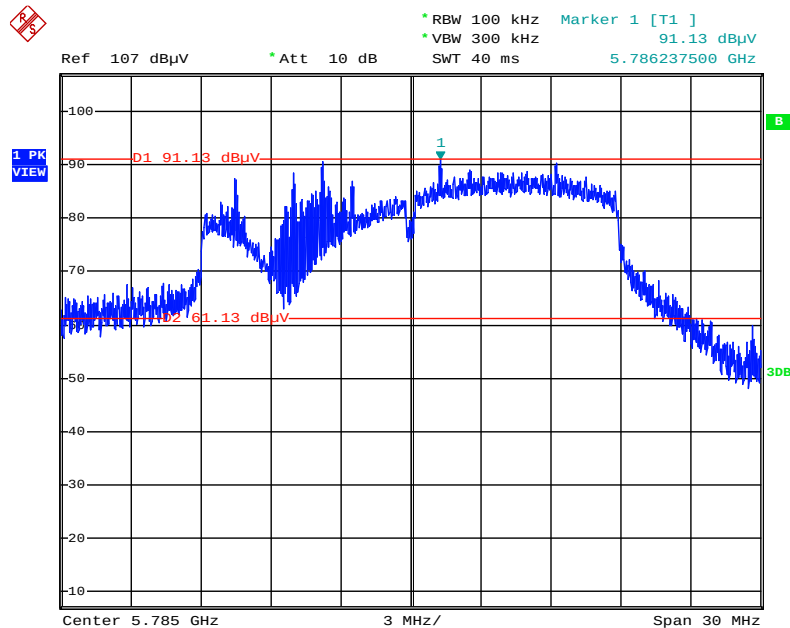


Date: 23.APR.2014 18:29:35

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 30MHz~5725MHz (down 30dBc)

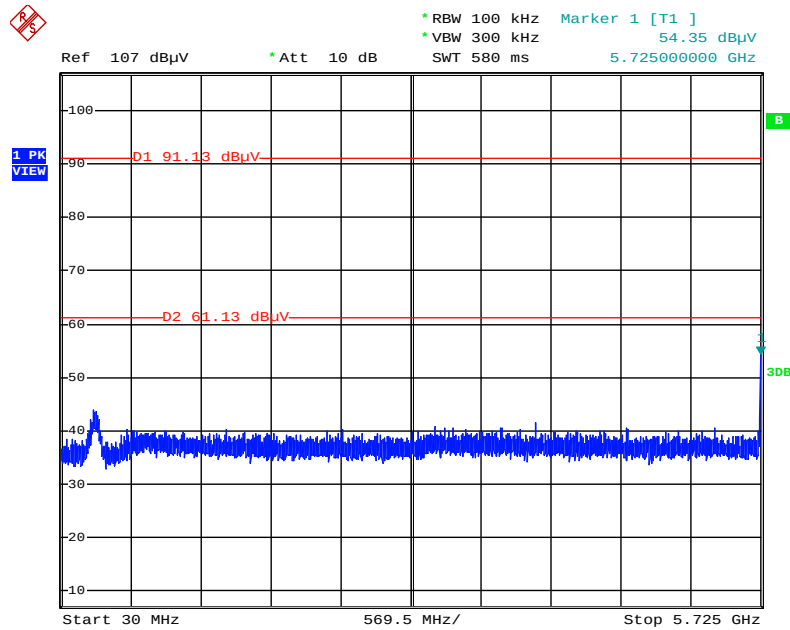


Date: 23.APR.2014 18:30:27

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 5850MHz~40000MHz (down 30dBc)

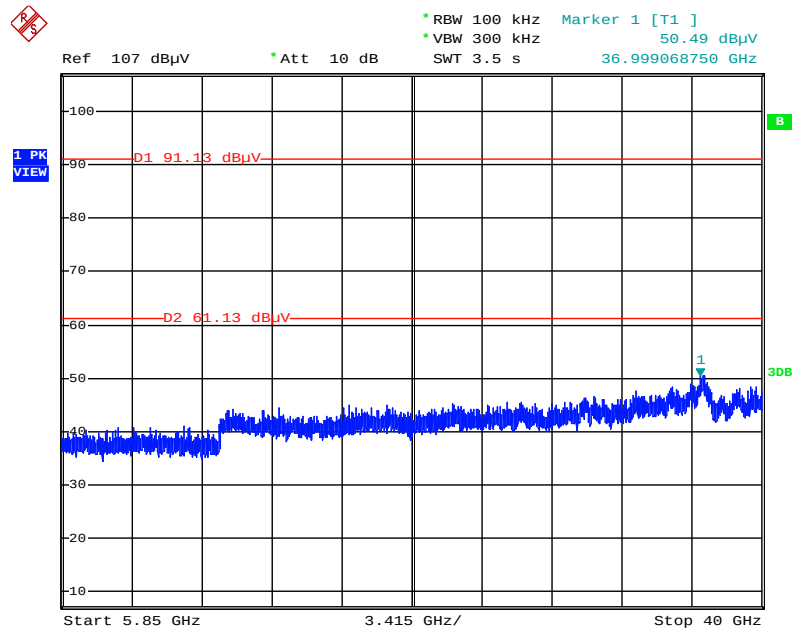


Date: 23.APR.2014 18:31:39

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 30MHz~5725MHz (down 30dBc)

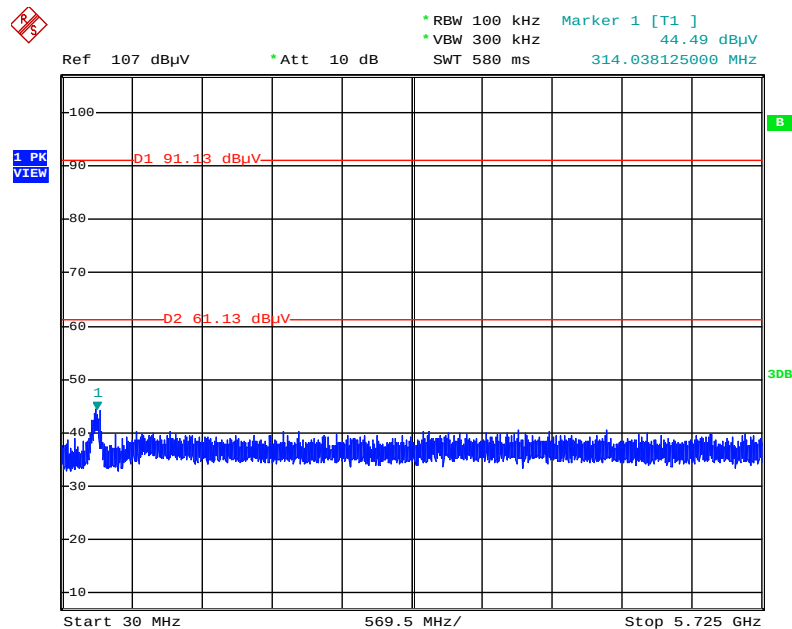


Date: 23.APR.2014 18:32:49

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 5850MHz~40000MHz (down 30dBc)

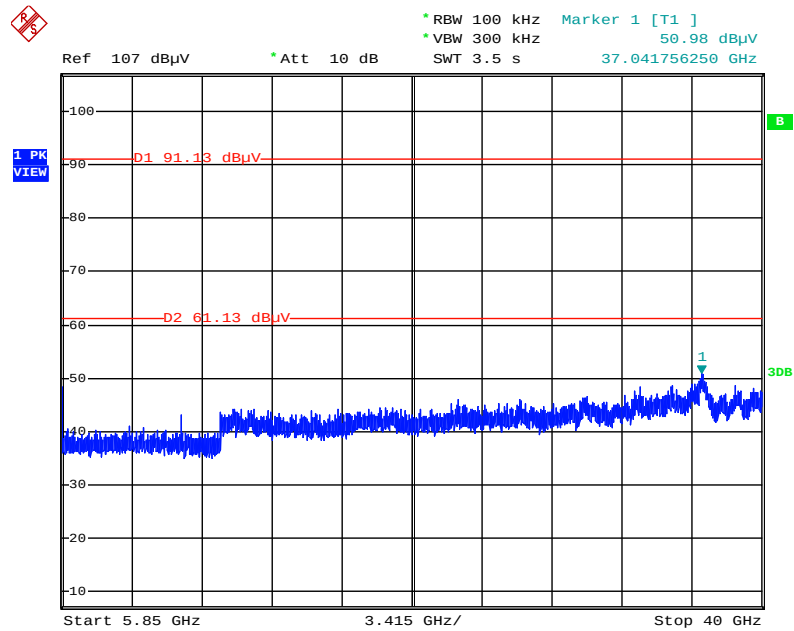


Date: 23.APR.2014 18:32:20

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

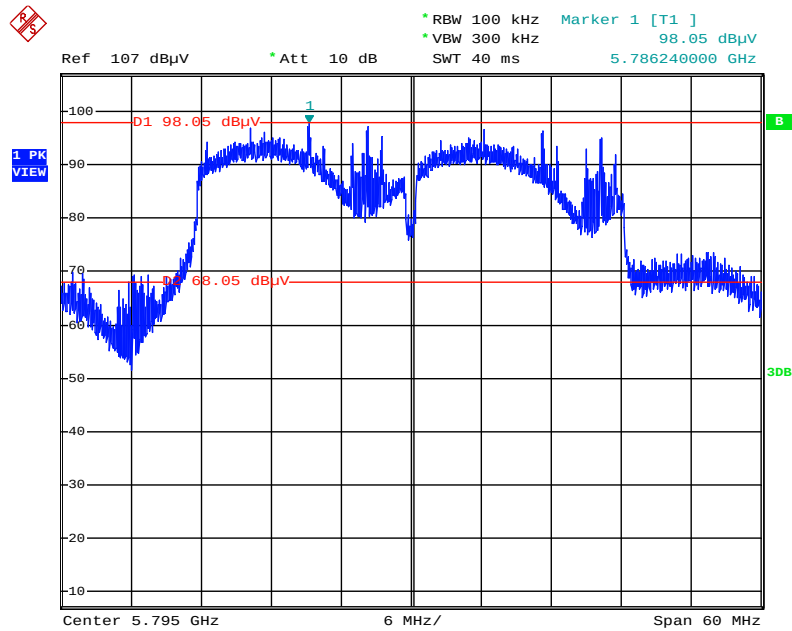


Date: 23.APR.2014 18:19:17

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 30MHz~5725MHz (down 30dBc)

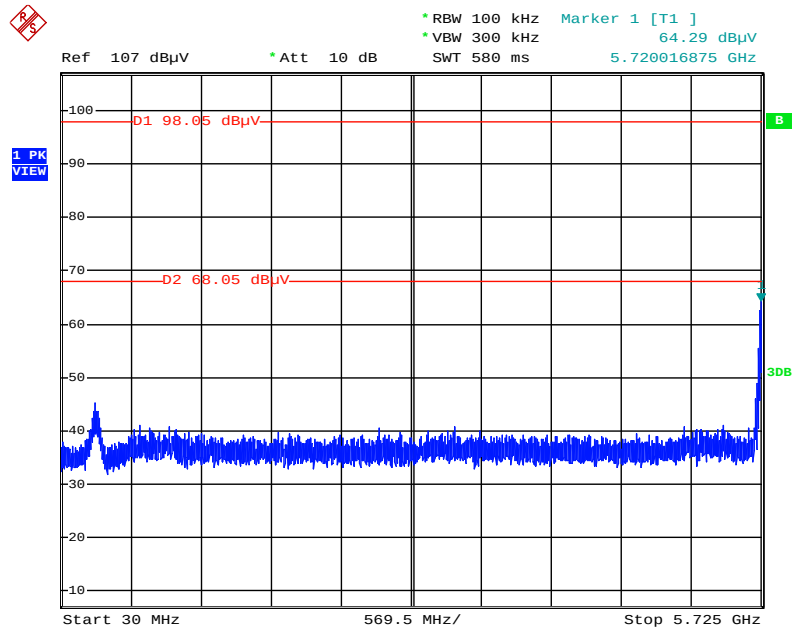


Date: 23.APR.2014 18:21:45

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 5850MHz~40000MHz (down 30dBc)

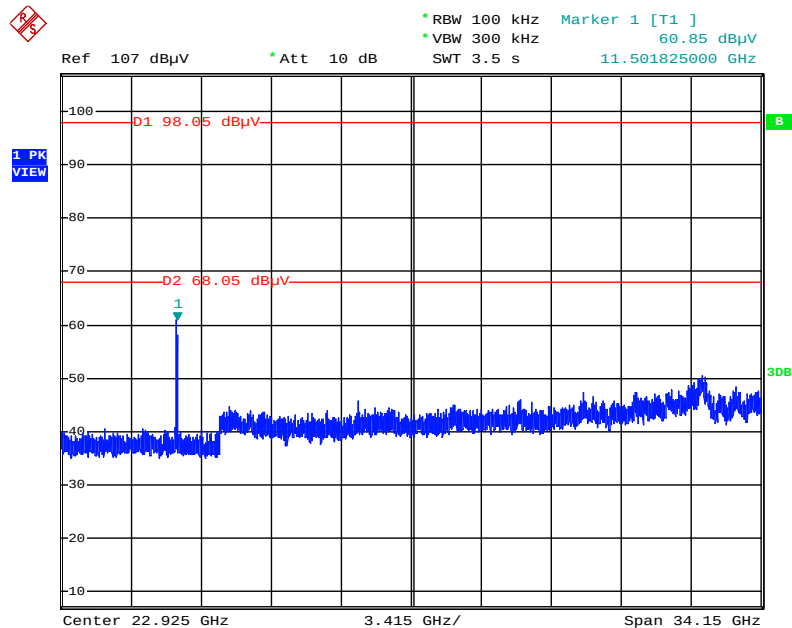


Date: 23.APR.2014 18:21:27

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 30MHz~5725MHz (down 30dBc)

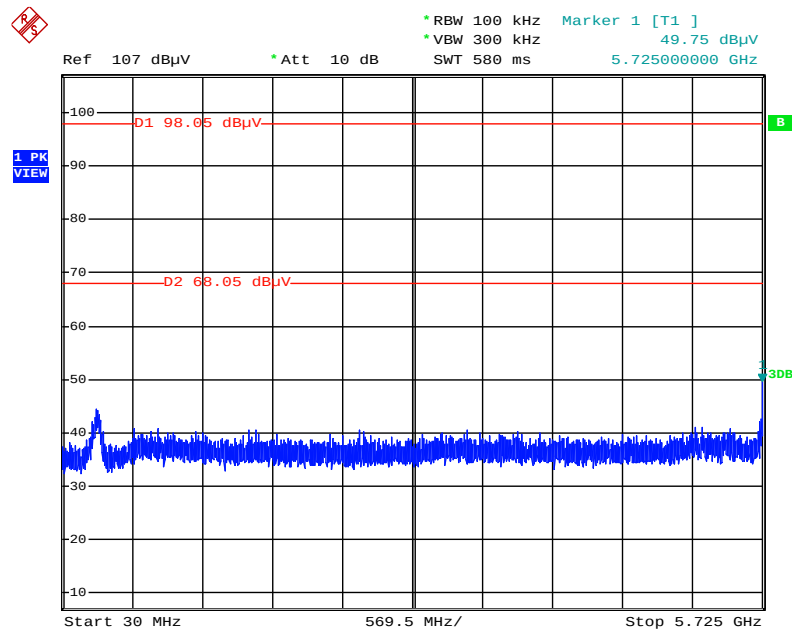


Date: 23.APR.2014 18:19:39

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 5850MHz~40000MHz (down 30dBc)

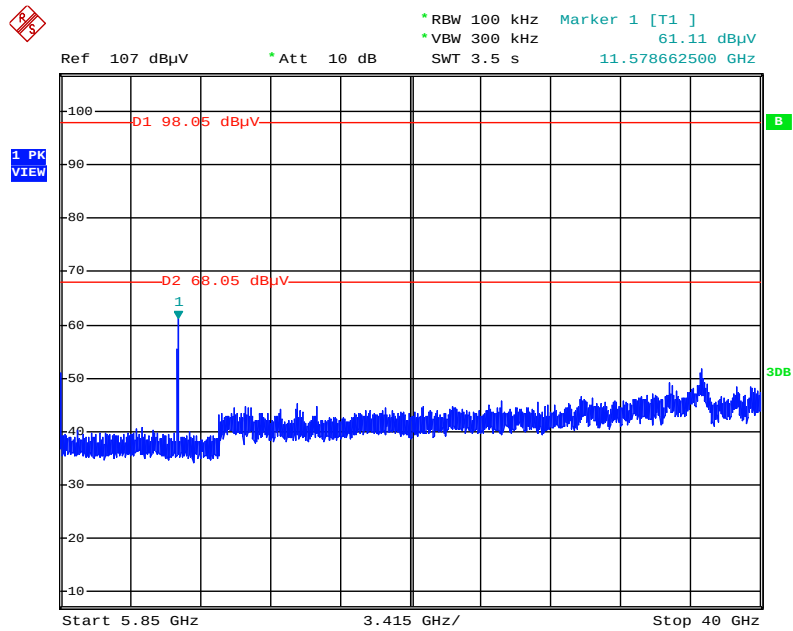


Date: 23.APR.2014 18:20:11

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Reference Level

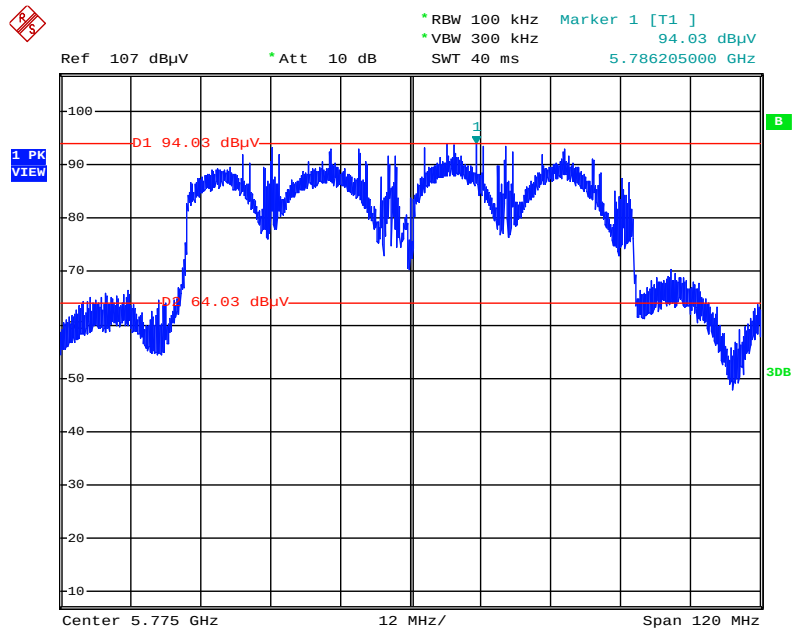


Date: 23.APR.2014 18:16:19

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 30MHz~5725MHz (down 30dBc)

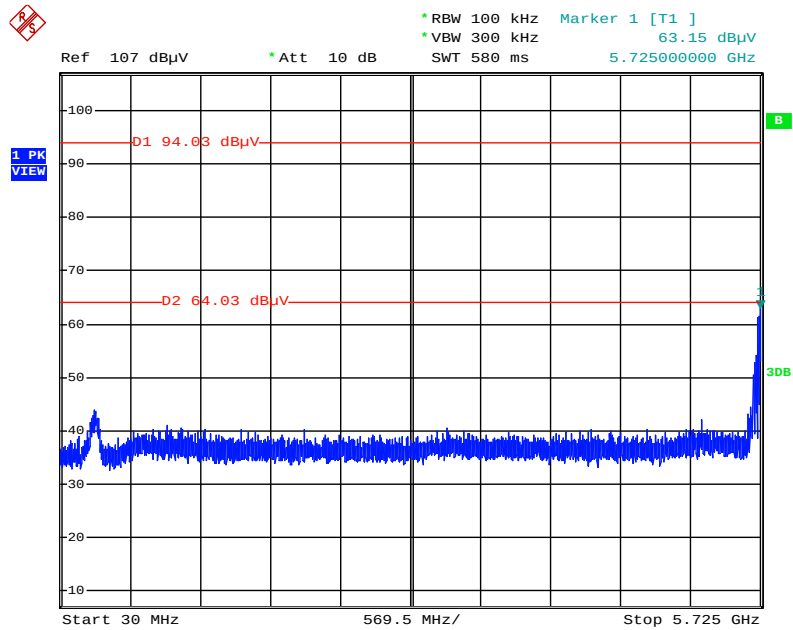


Date: 23.APR.2014 18:16:48

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 5850MHz~40000MHz (down 30dBc)

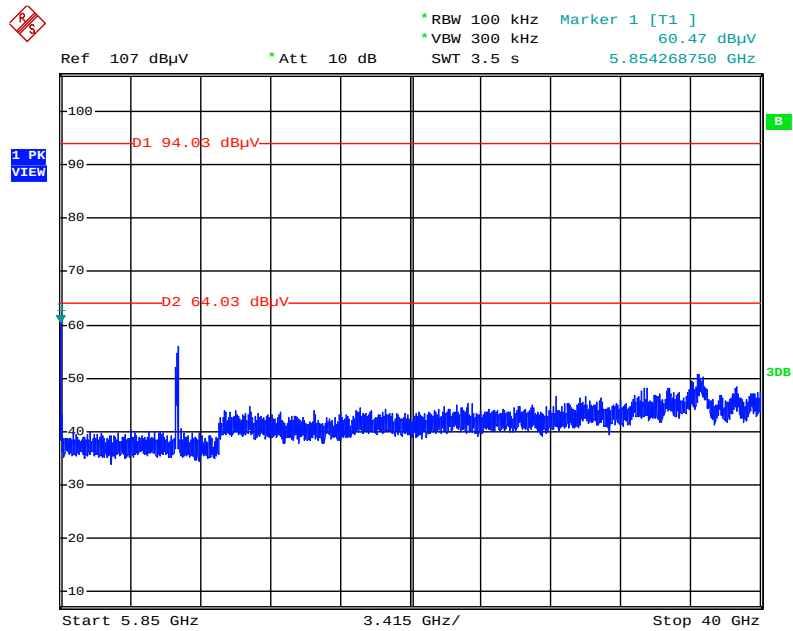


Date: 23.APR.2014 18:17:17

Plot on Configuration IEEE 802.11b / Reference Level

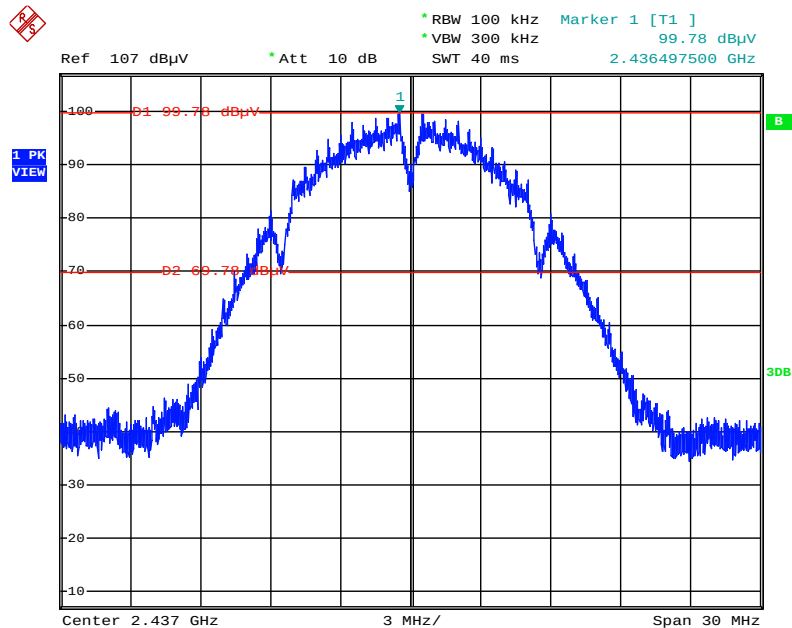


Date: 22.APR.2014 06:03:10

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

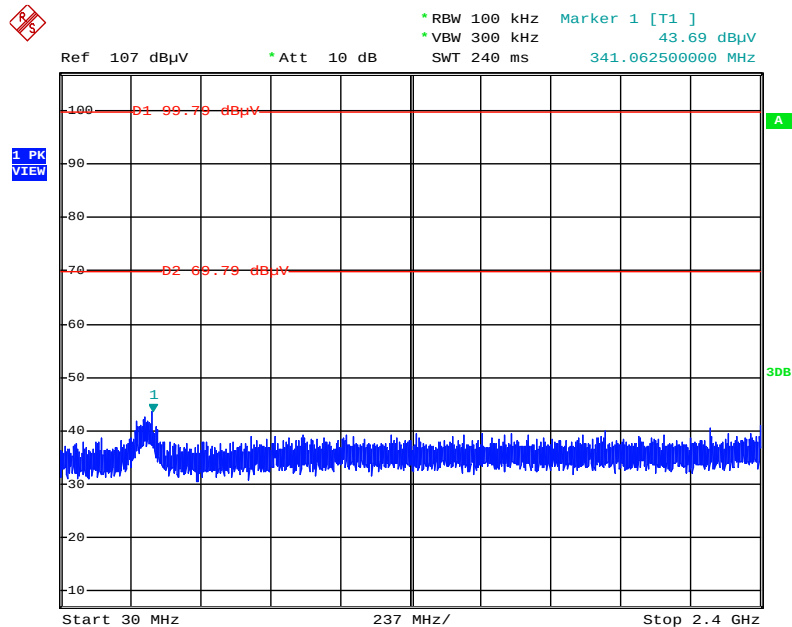


Date: 22.APR.2014 02:24:04

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

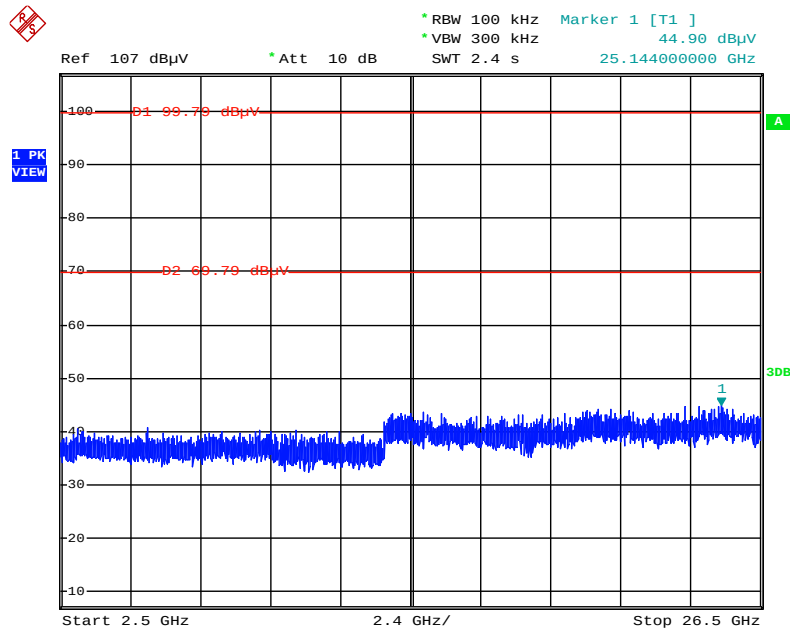


Date: 22.APR.2014 02:25:15

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

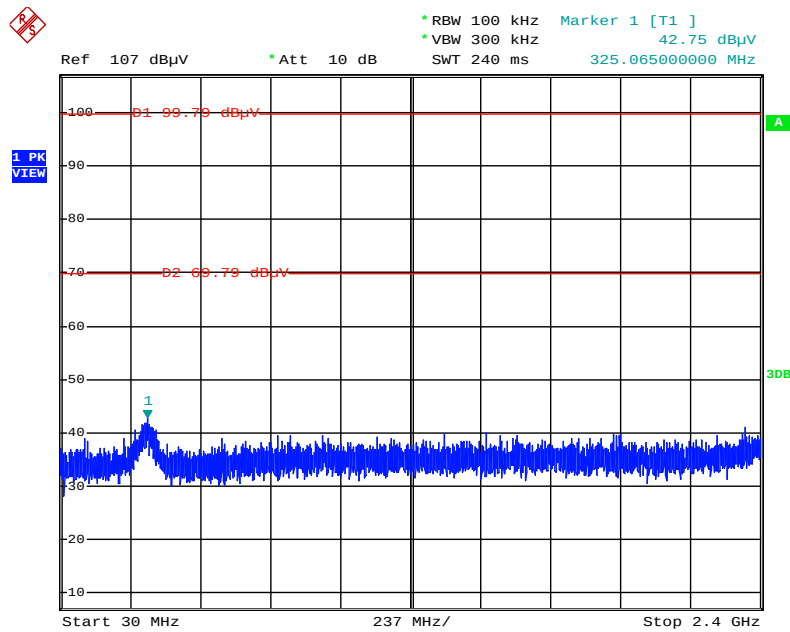


Date: 22.APR.2014 02:26:32

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

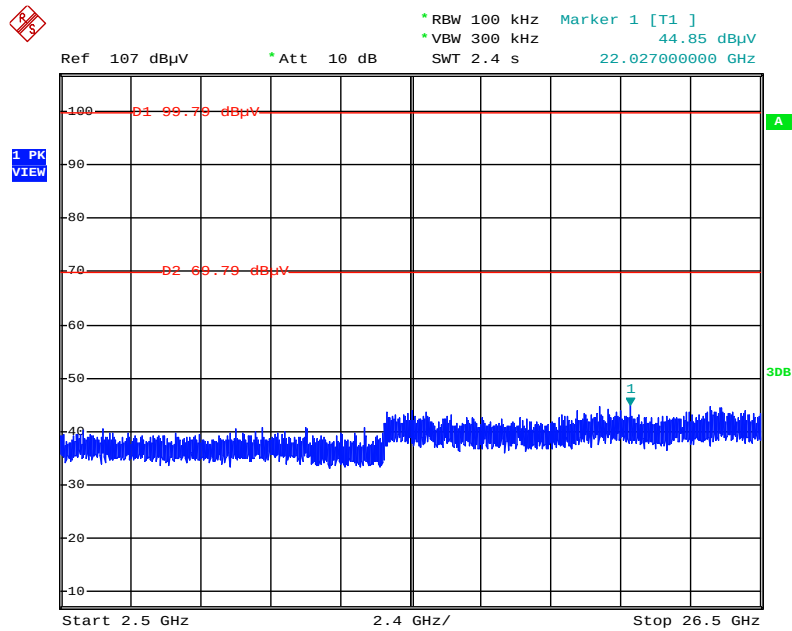


Date: 22.APR.2014 02:26:11

Plot on Configuration IEEE 802.11g / Reference Level

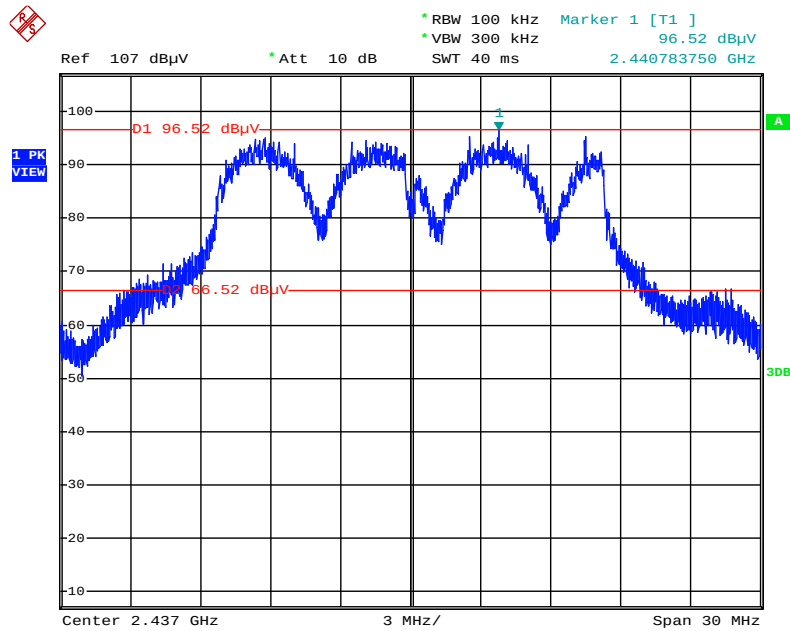


Date: 22.APR.2014 02:28:08

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

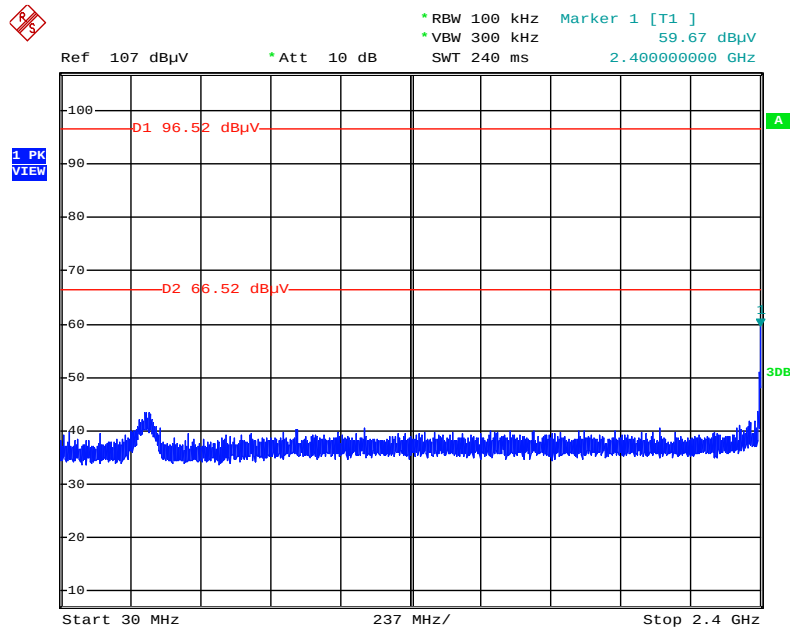


Date: 22.APR.2014 02:29:04

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

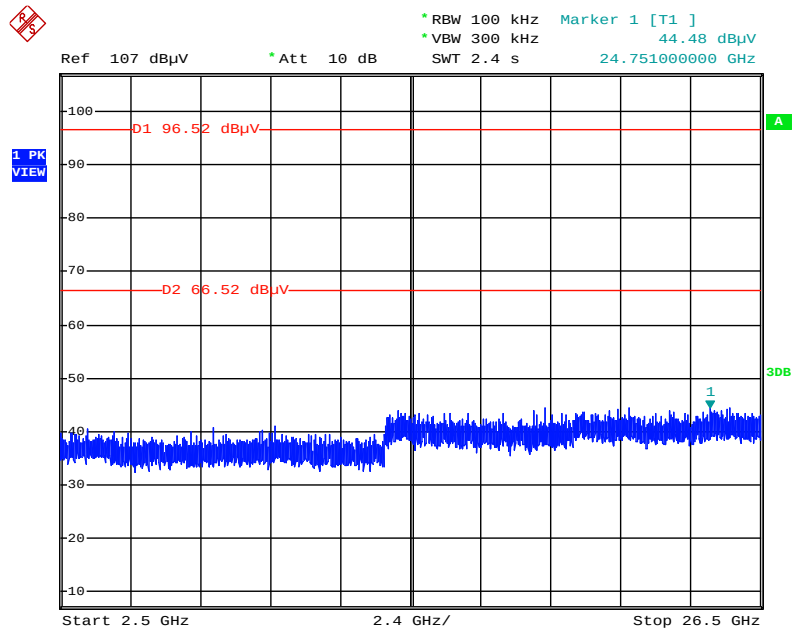


Date: 22.APR.2014 02:29:55

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

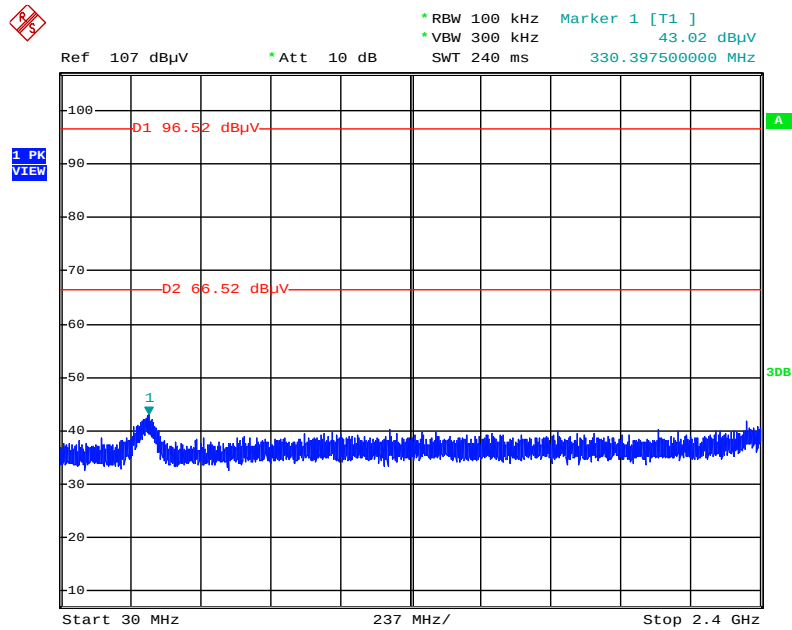


Date: 22.APR.2014 02:30:57

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

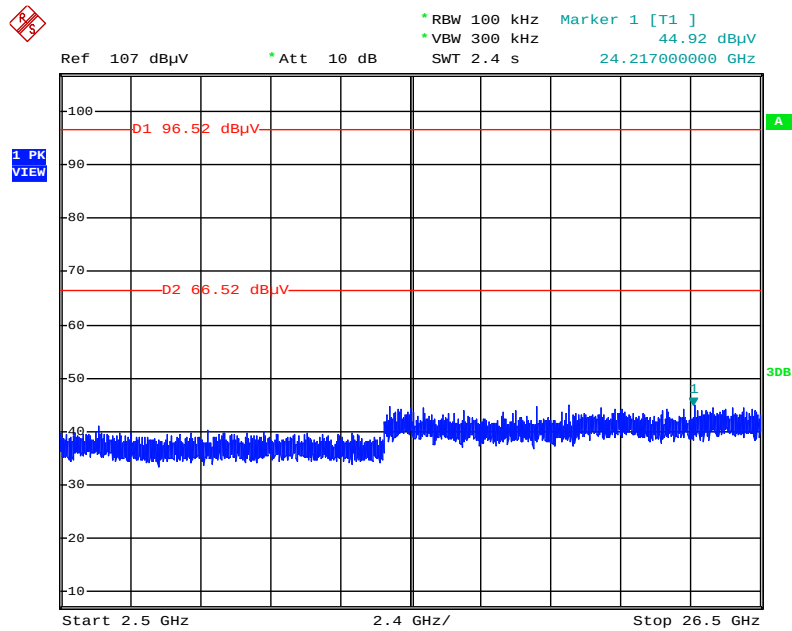


Date: 22.APR.2014 02:30:32

Plot on Configuration IEEE 802.11a / Reference Level

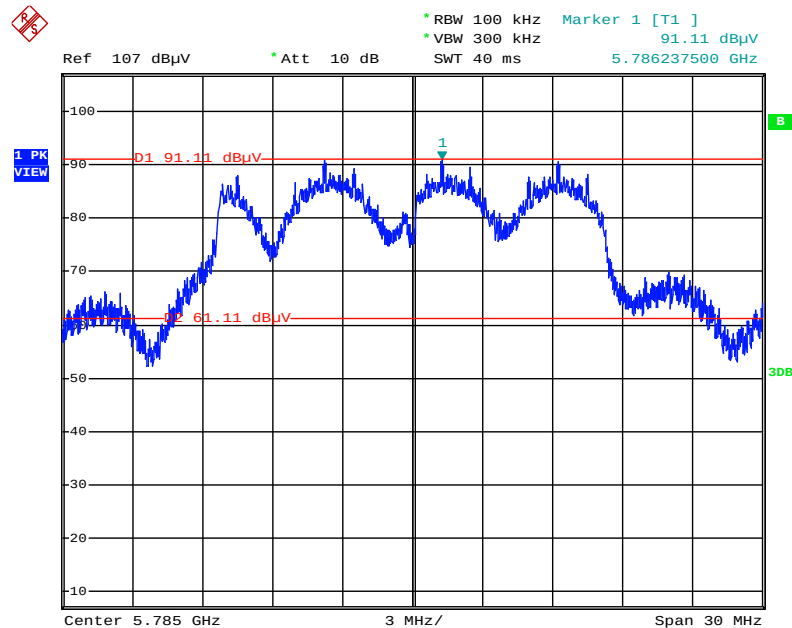


Date: 23.APR.2014 18:34:52

Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc)

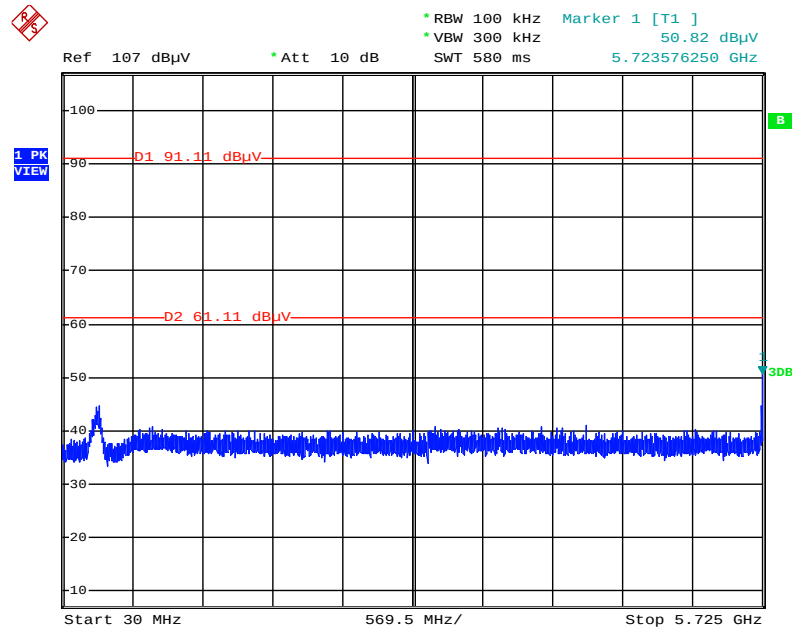


Date: 23.APR.2014 18:38:00

Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc)

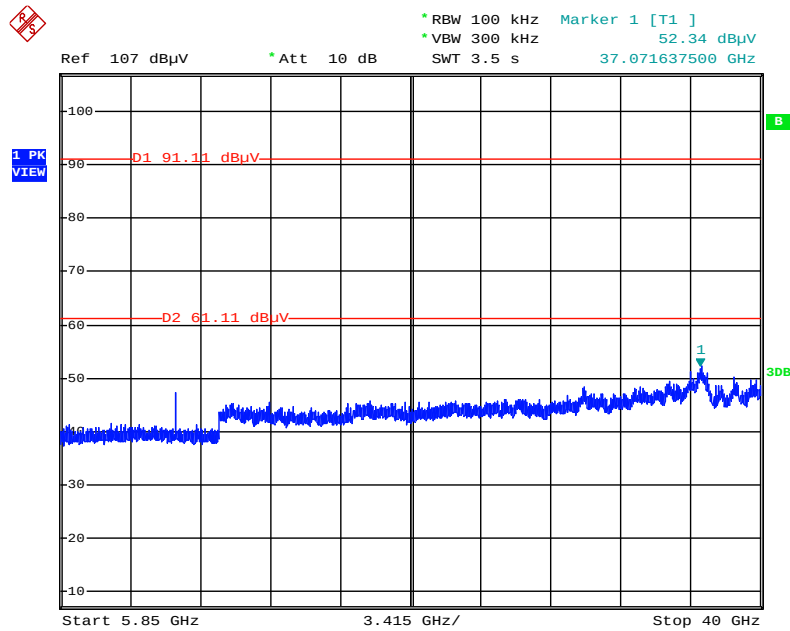


Date: 23.APR.2014 18:43:19

Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc)

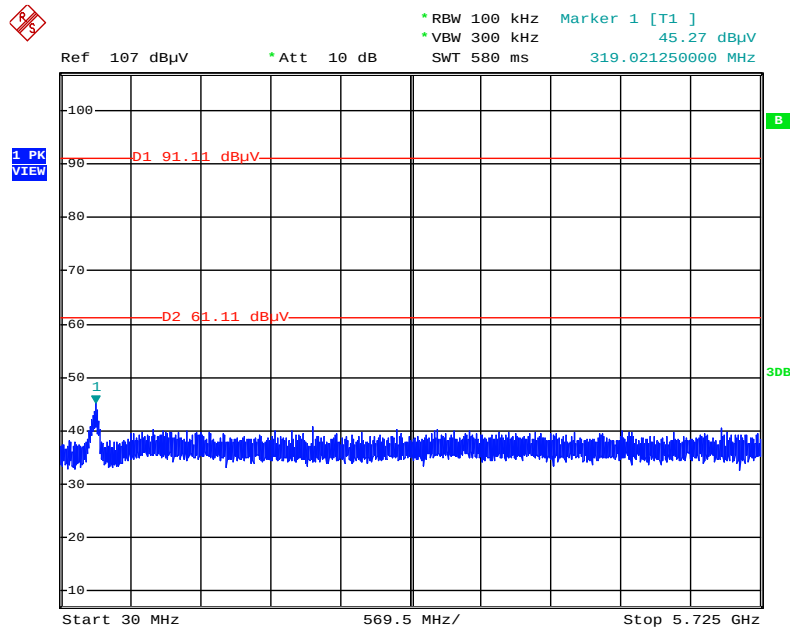

Date: 23.APR.2014 18:46:38

Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~40000MHz (down 30dBc)

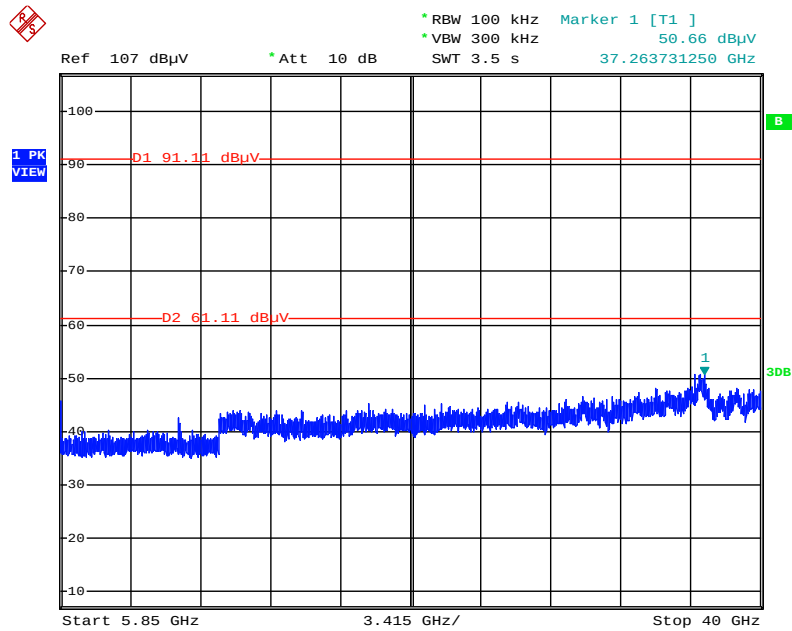

Date: 23.APR.2014 18:45:51

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
BILOG ANTENNA	Schaffner	CBL6112B	2928	30MHz ~ 2GHz	Dec. 27, 2013	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%