


Appendix D. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	61%
Test Engineer	James Chou	Configurations	2.4GHz + 5GHz

Horizontal

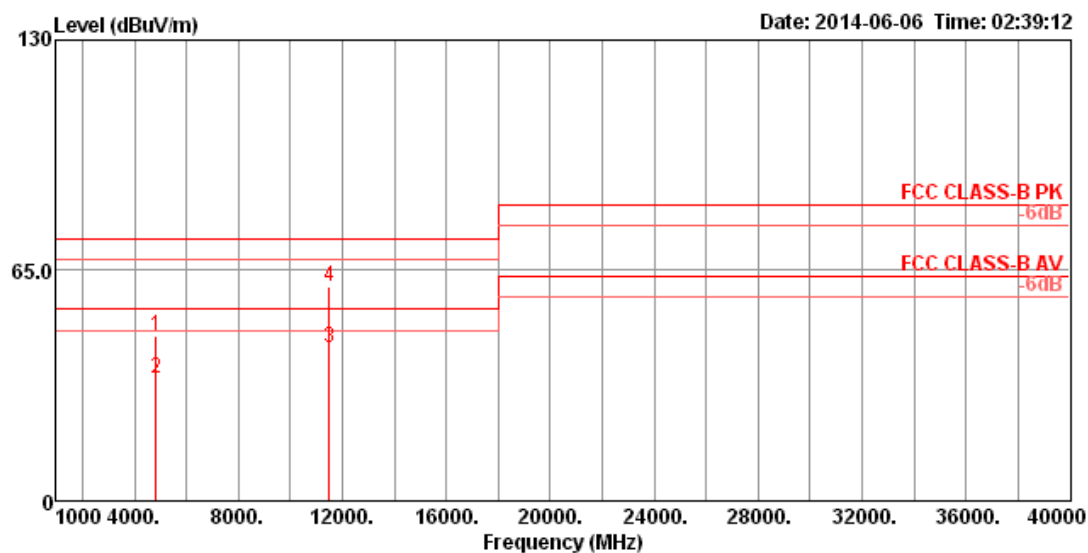

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4822.72	46.50	74.00	-27.50	43.36	5.68	32.76	35.30	100	162	HORIZONTAL Peak
2	4828.49	34.35	54.00	-19.65	31.19	5.69	32.77	35.30	100	162	HORIZONTAL Average
3	11490.63	43.28	54.00	-10.72	29.94	9.09	39.10	34.85	100	211	HORIZONTAL Average
4	11490.63	60.39	74.00	-13.61	47.05	9.09	39.10	34.85	100	211	HORIZONTAL Peak

Vertical

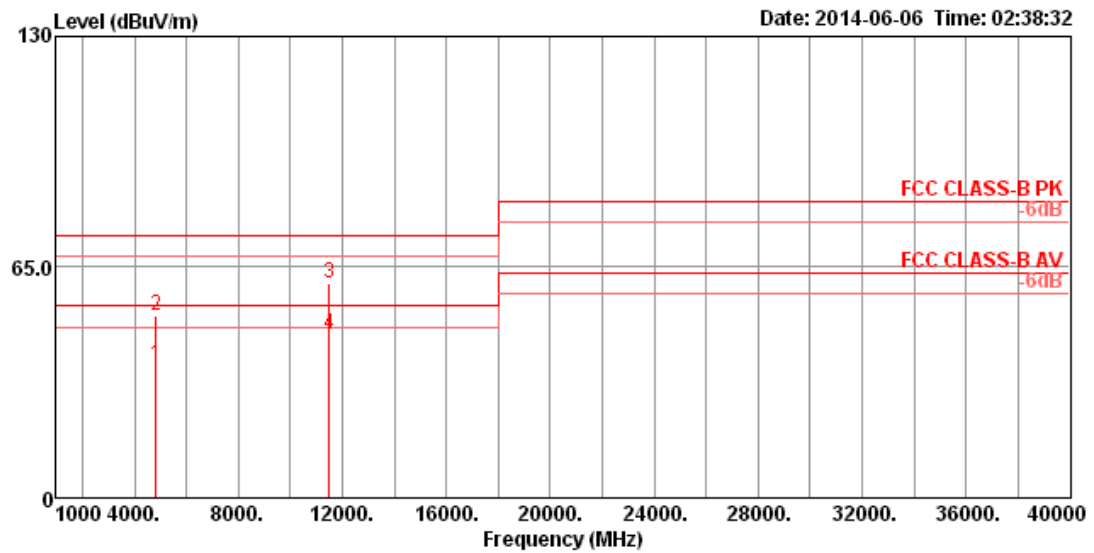

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	cm	deg		
1	4823.20	37.41	54.00	-16.59	34.27	5.68	32.76	35.30	100	151	VERTICAL	Average
2	4823.34	51.28	74.00	-22.72	48.14	5.68	32.76	35.30	100	151	VERTICAL	Peak
3	11490.63	60.39	74.00	-13.61	47.05	9.09	39.10	34.85	104	235	VERTICAL	Peak
4	11494.53	46.20	54.00	-7.80	32.85	9.10	39.10	34.85	104	235	VERTICAL	Average