




## Appendix B. Radiated Emission Co-location Report

### 1. Results of Radiated Emissions for Co-located


Temperature	26°C	Humidity	64%
Test Engineer	Gino Huang	Configurations	2.4GHz + 5GHz

Horizontal

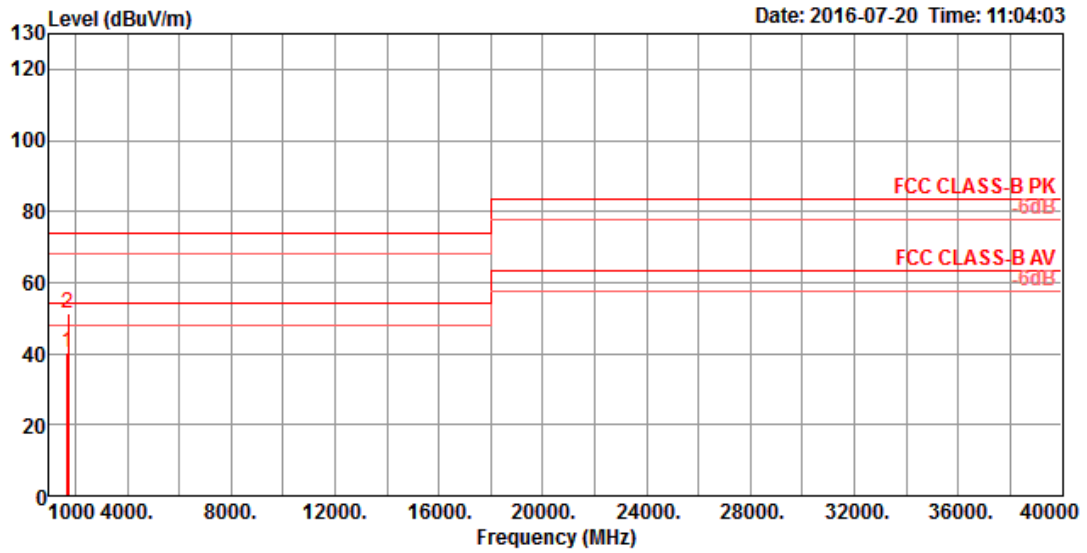

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1711.85	40.23	54.00	-13.77	44.29	4.12	25.67	33.85	101	156	Average	HORIZONTAL
2	1714.23	51.38	74.00	-22.62	55.44	4.12	25.67	33.85	101	156	Peak	HORIZONTAL

Vertical

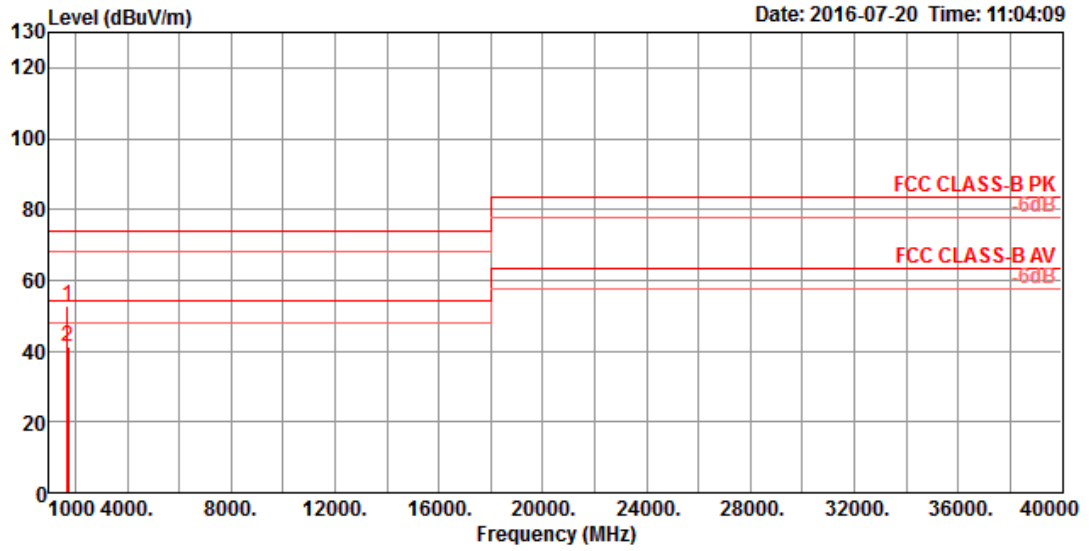

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1710.73	52.84	74.00	-21.16	56.90	4.12	25.67	33.85	121	139 Peak	VERTICAL
2	1712.97	41.19	54.00	-12.81	45.25	4.12	25.67	33.85	121	139 Average	VERTICAL