



Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 1: Tx_ADP: AD890326010-2LF_CDD Mode (802.11 a)		
Date of Test	2017/02/26	Test Site	SR10-H

802.11a(ANT 0)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
149	5745	16.340	≥ 0.5	Pass
157	5785	16.370	≥ 0.5	Pass
165	5825	16.360	≥ 0.5	Pass


Channel 149 (5745MHz)

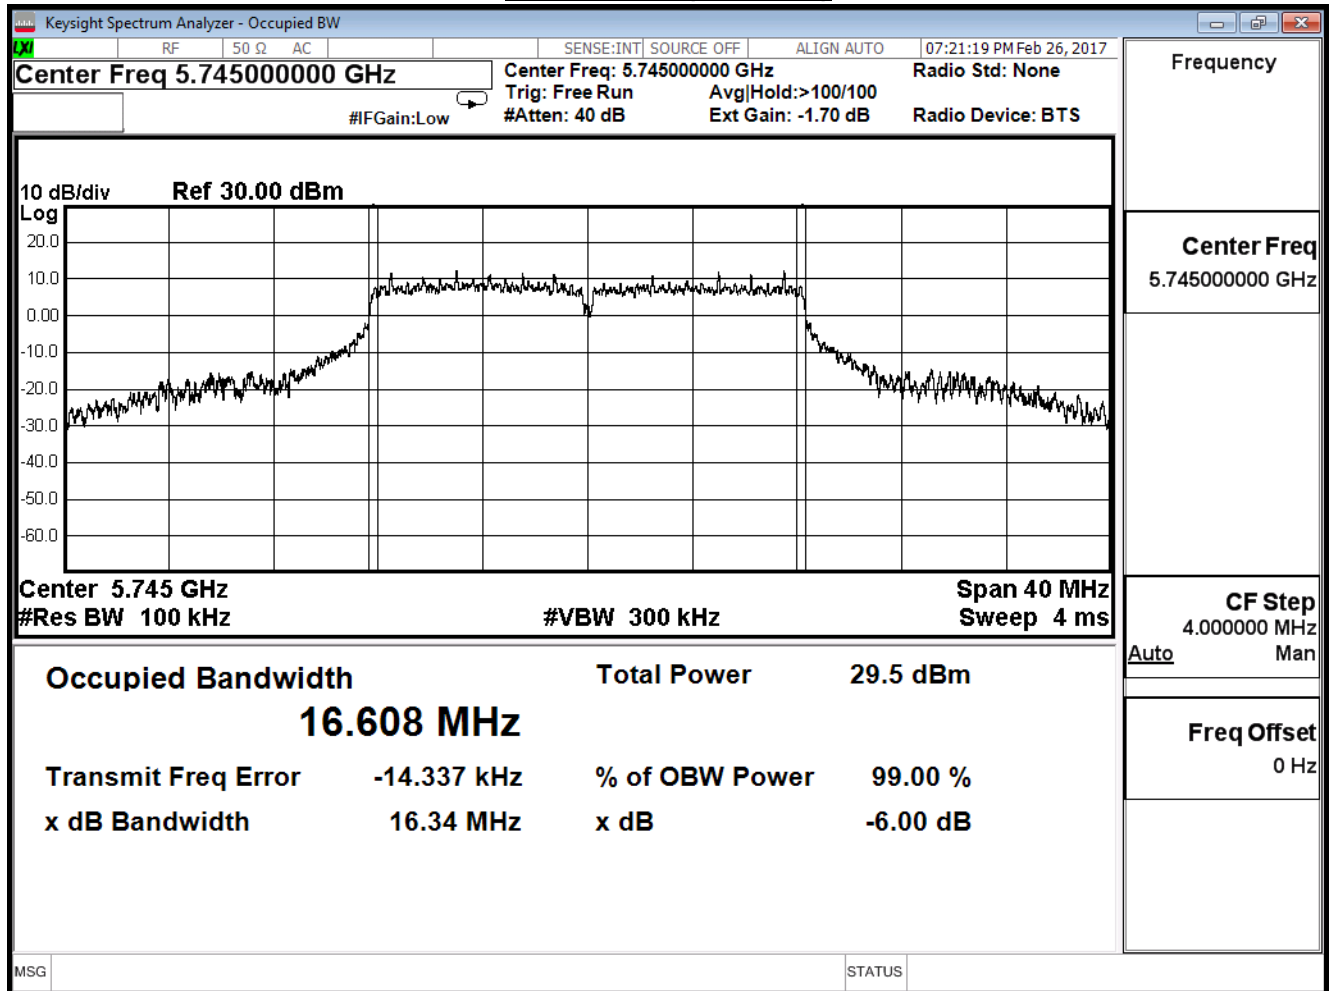

Channel 157 (5785MHz)

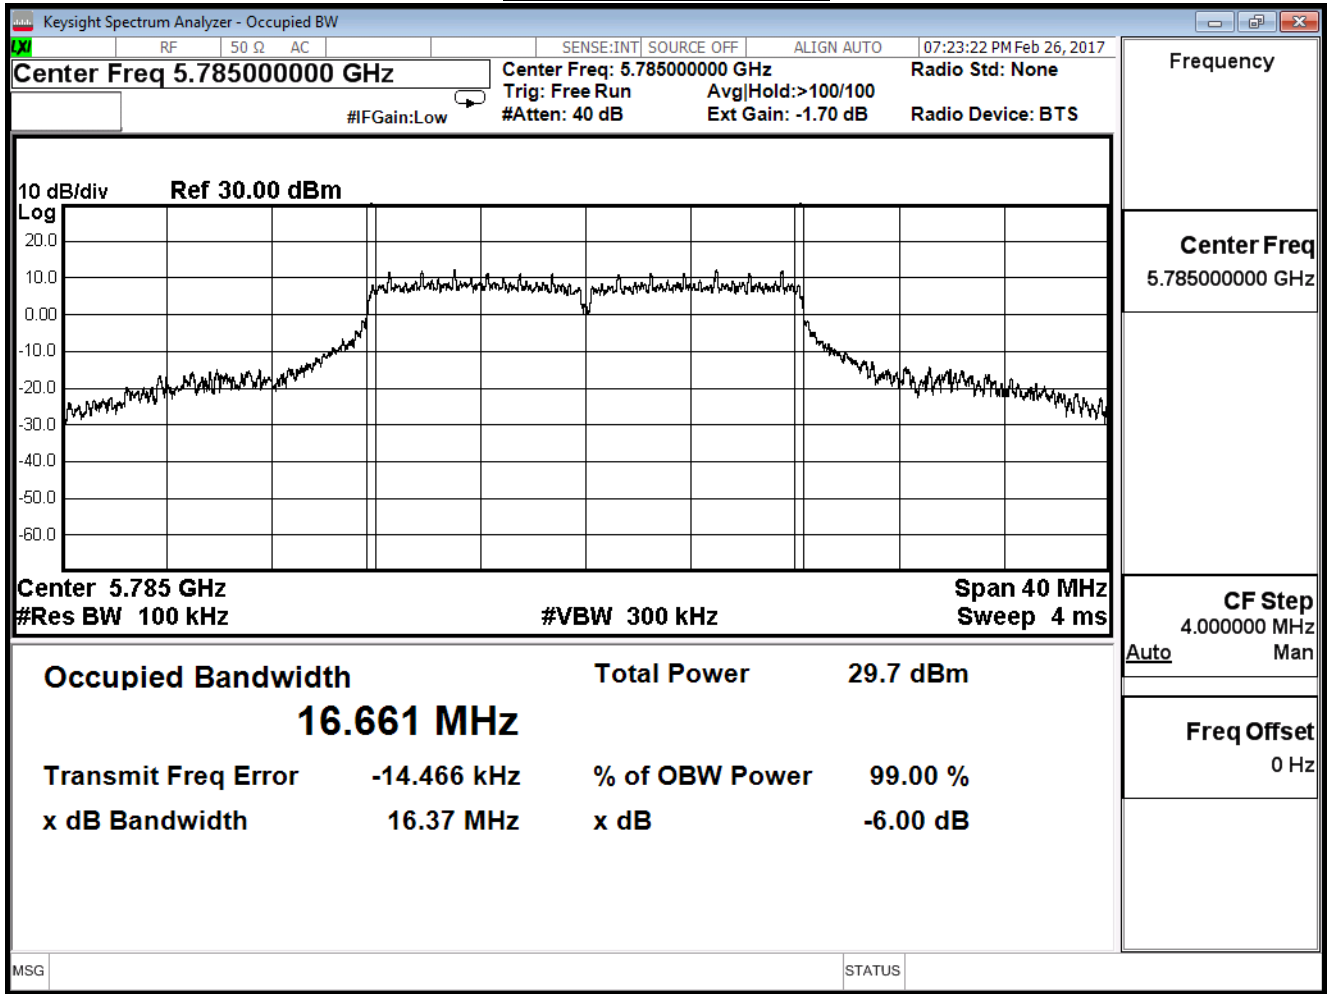


Channel 165 (5825MHz)

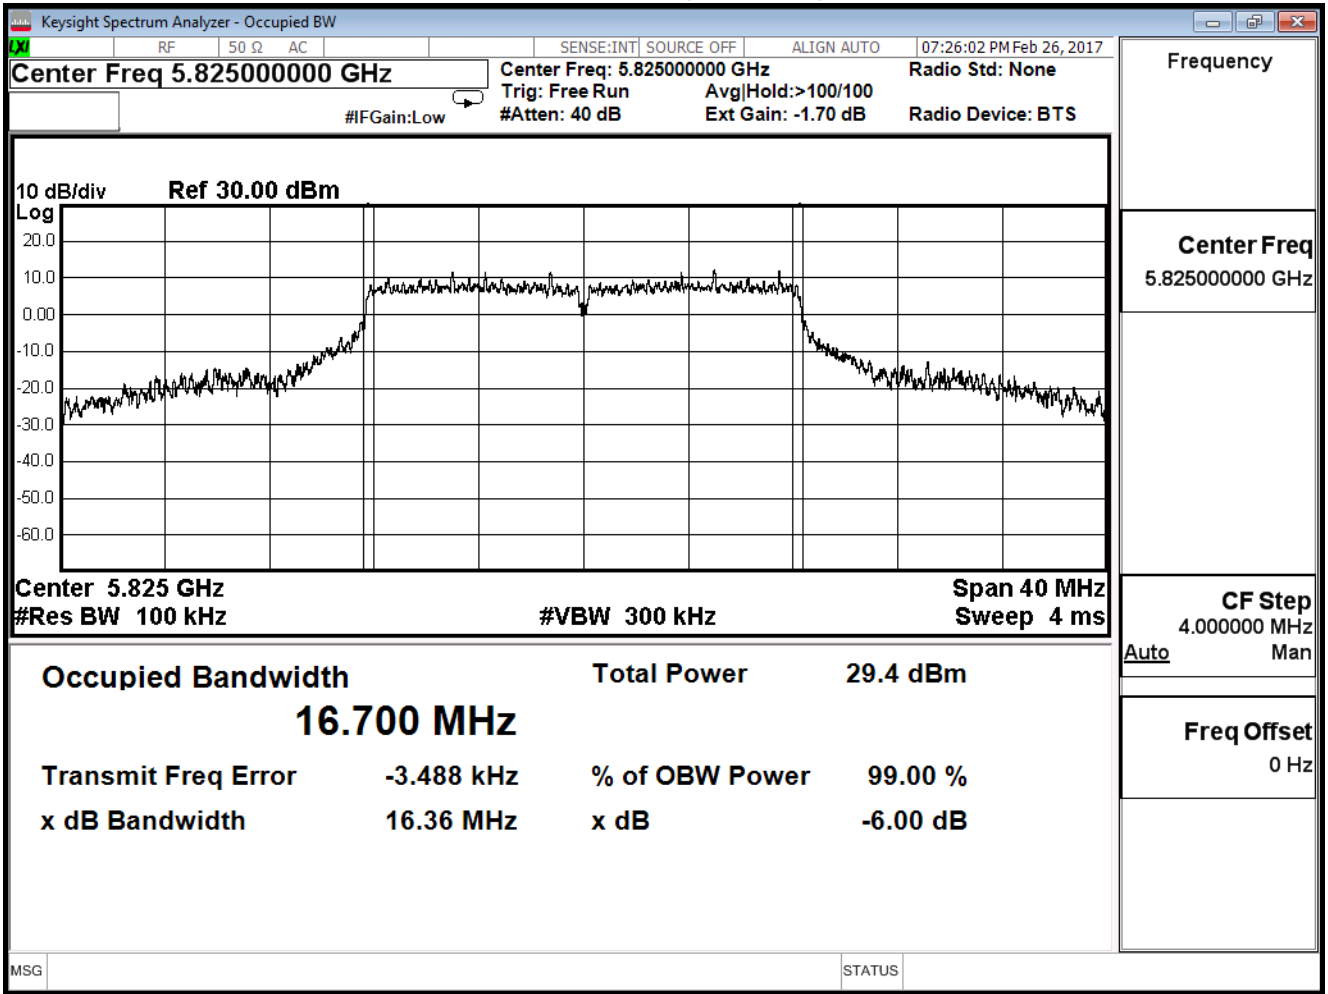


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 1: Tx_AD P: AD890326010-2LF_ CDD Mode (802.11 a)		
Date of Test	2017/02/26	Test Site	SR10-H

802.11a(ANT 1)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
149	5745	16.350	≥ 0.5	Pass
157	5785	16.430	≥ 0.5	Pass
165	5825	16.340	≥ 0.5	Pass


Channel 149 (5745MHz)

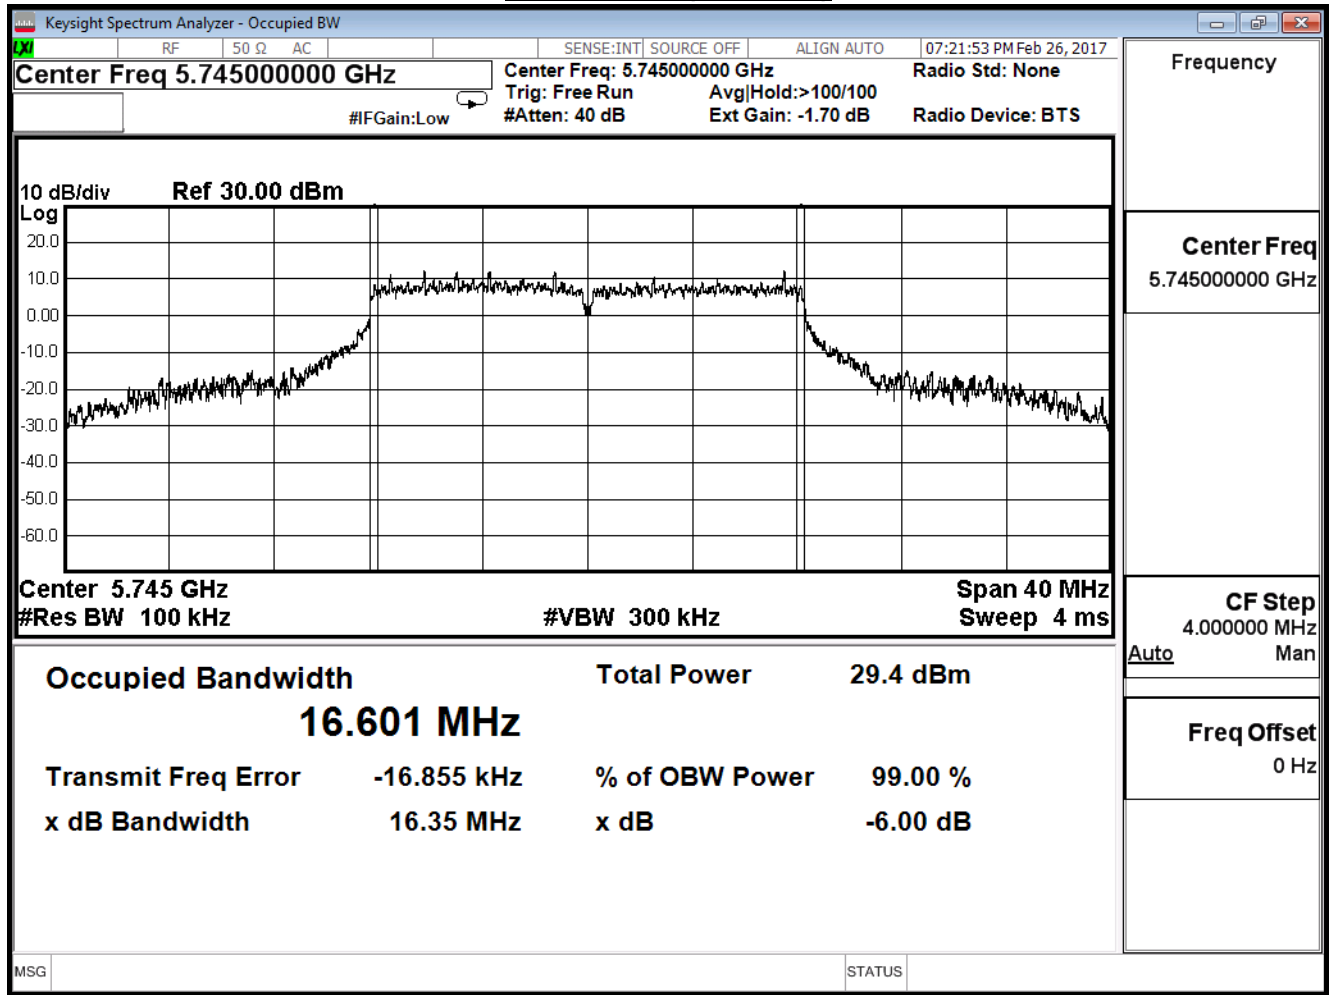

Channel 157 (5785MHz)

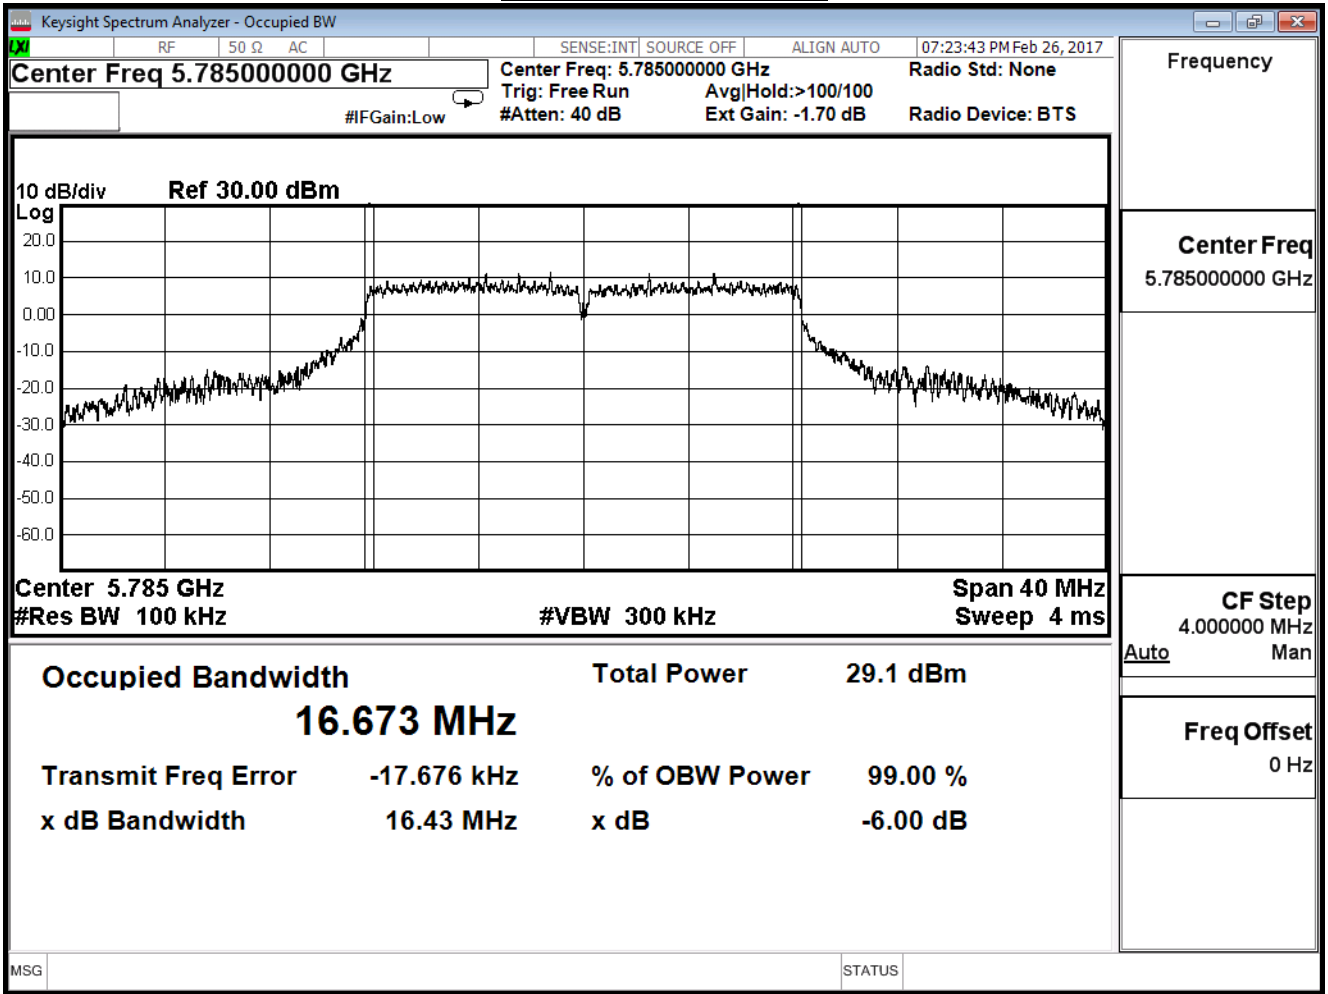


Channel 165 (5825MHz)

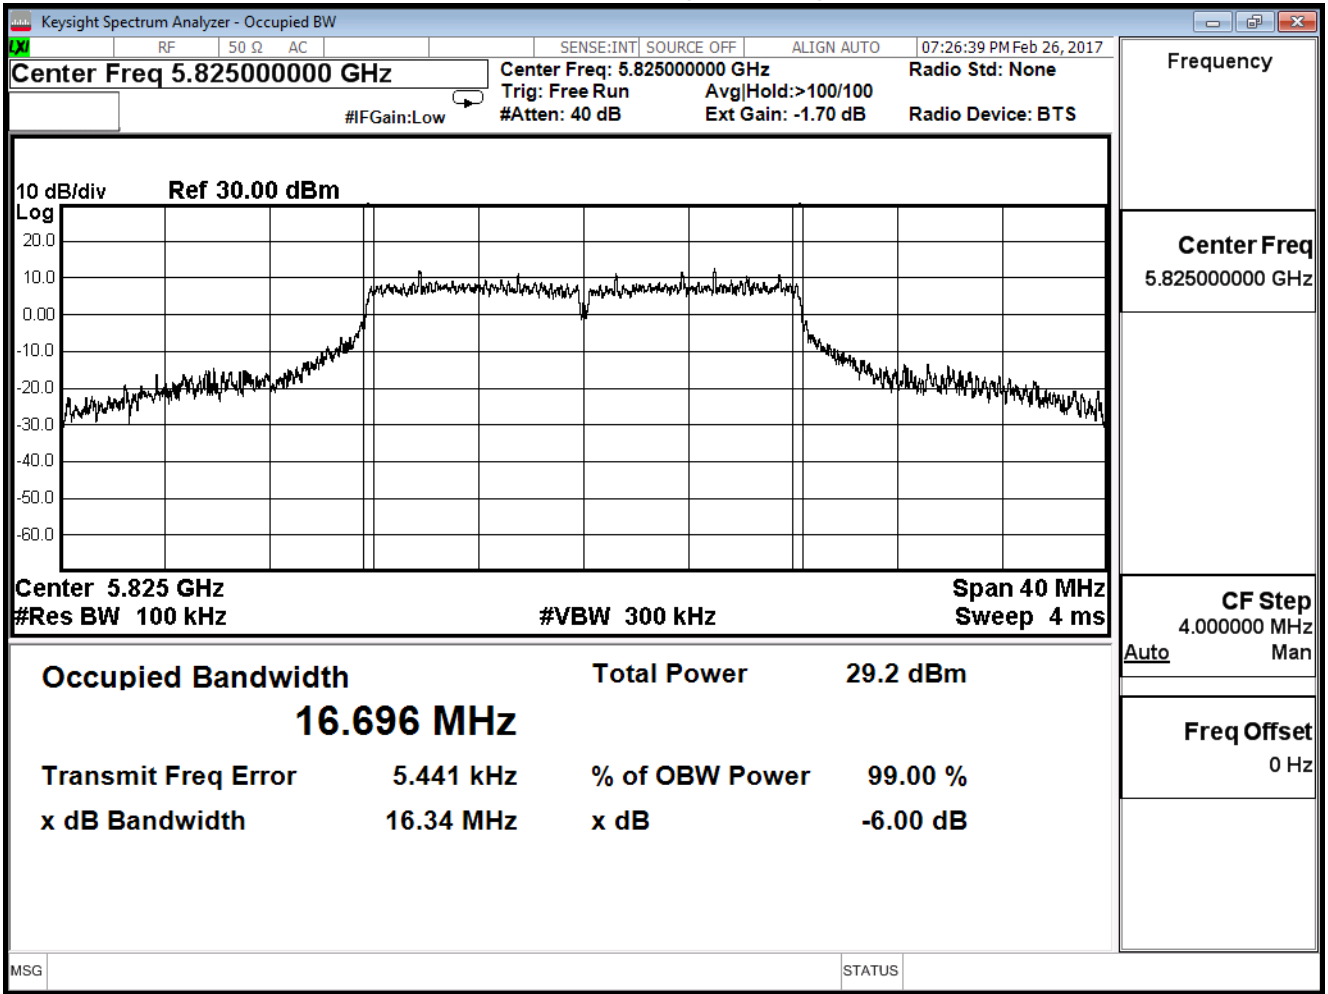


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 1: Tx_AD P: AD890326010-2LF_ CDD Mode (802.11 a)		
Date of Test	2017/02/26	Test Site	SR10-H

802.11a(ANT 2)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
149	5745	16.370	≥ 0.5	Pass
157	5785	16.350	≥ 0.5	Pass
165	5825	16.340	≥ 0.5	Pass


Channel 149 (5745MHz)

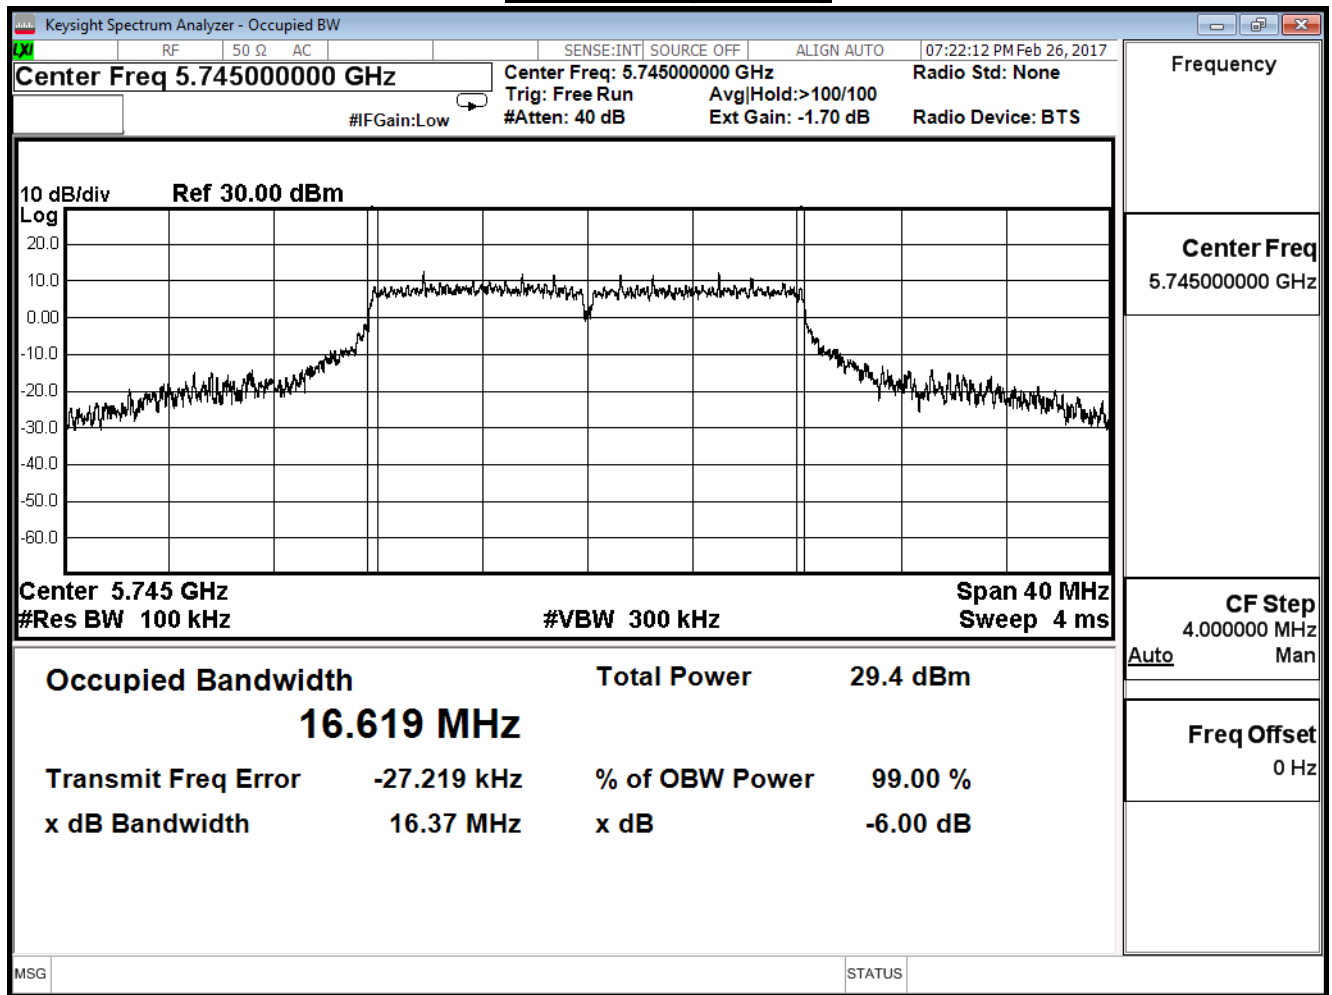

Channel 157 (5785MHz)

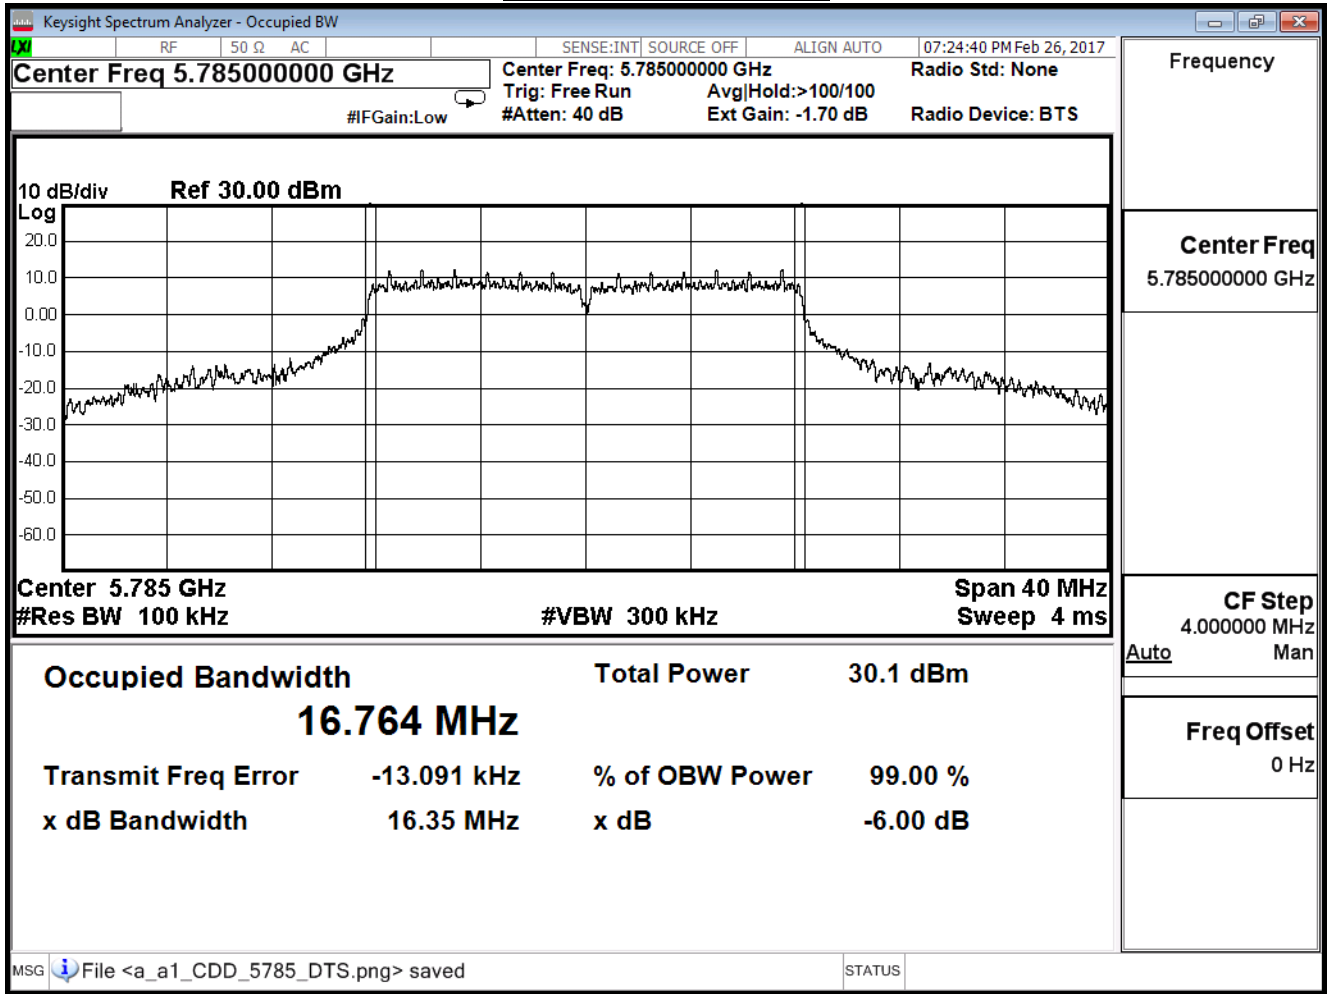


Channel 165 (5825MHz)

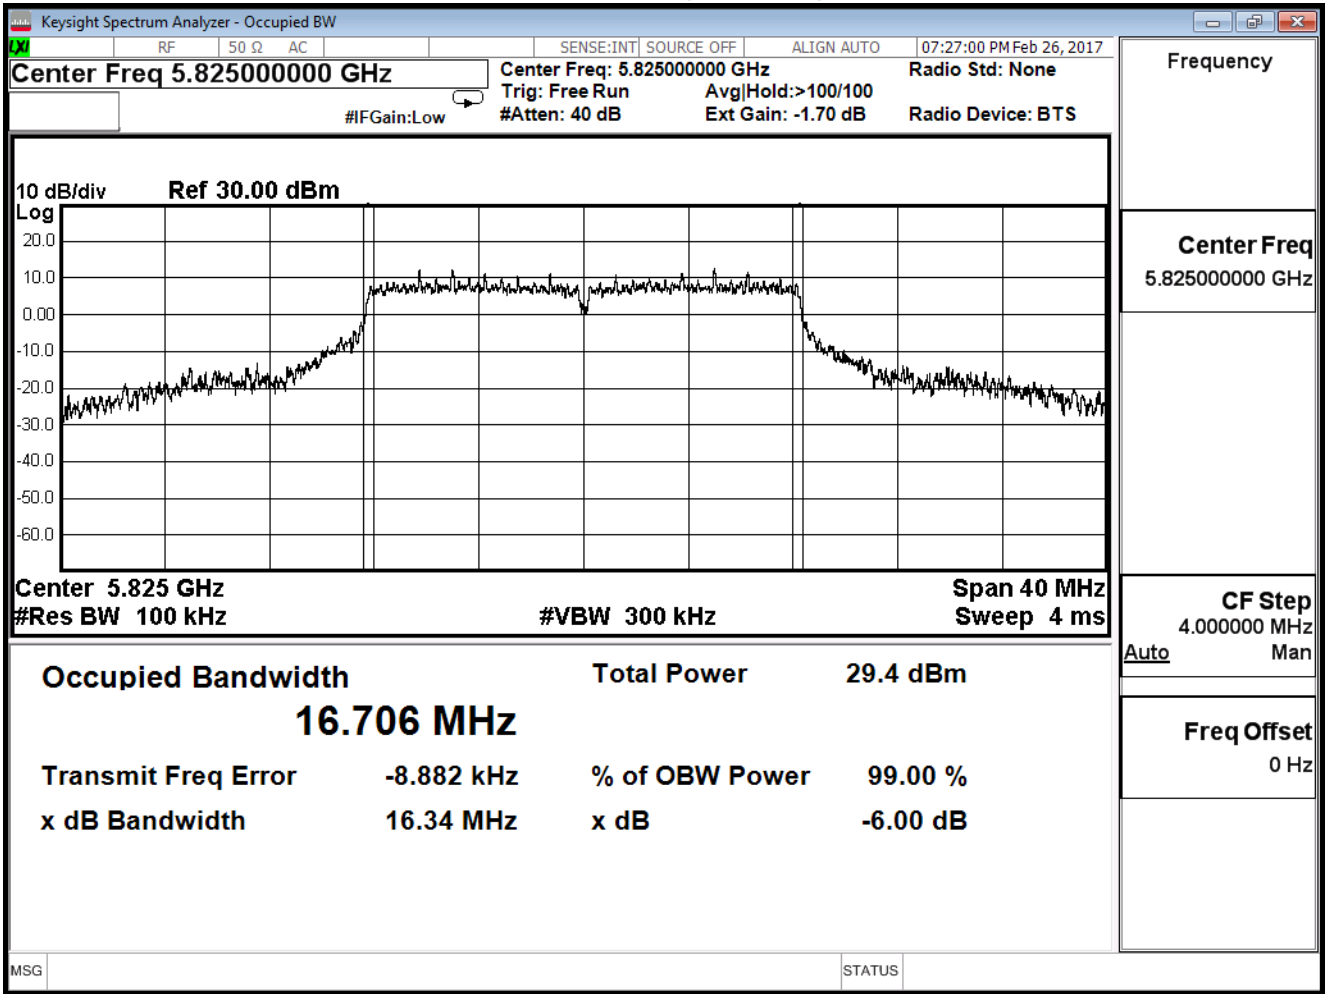


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 1: Tx_AD P: AD890326010-2LF_ CDD Mode (802.11 a)		
Date of Test	2017/02/26	Test Site	SR10-H

802.11a(ANT 3)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
149	5745	16.350	≥ 0.5	Pass
157	5785	16.340	≥ 0.5	Pass
165	5825	16.330	≥ 0.5	Pass


Channel 149 (5745MHz)

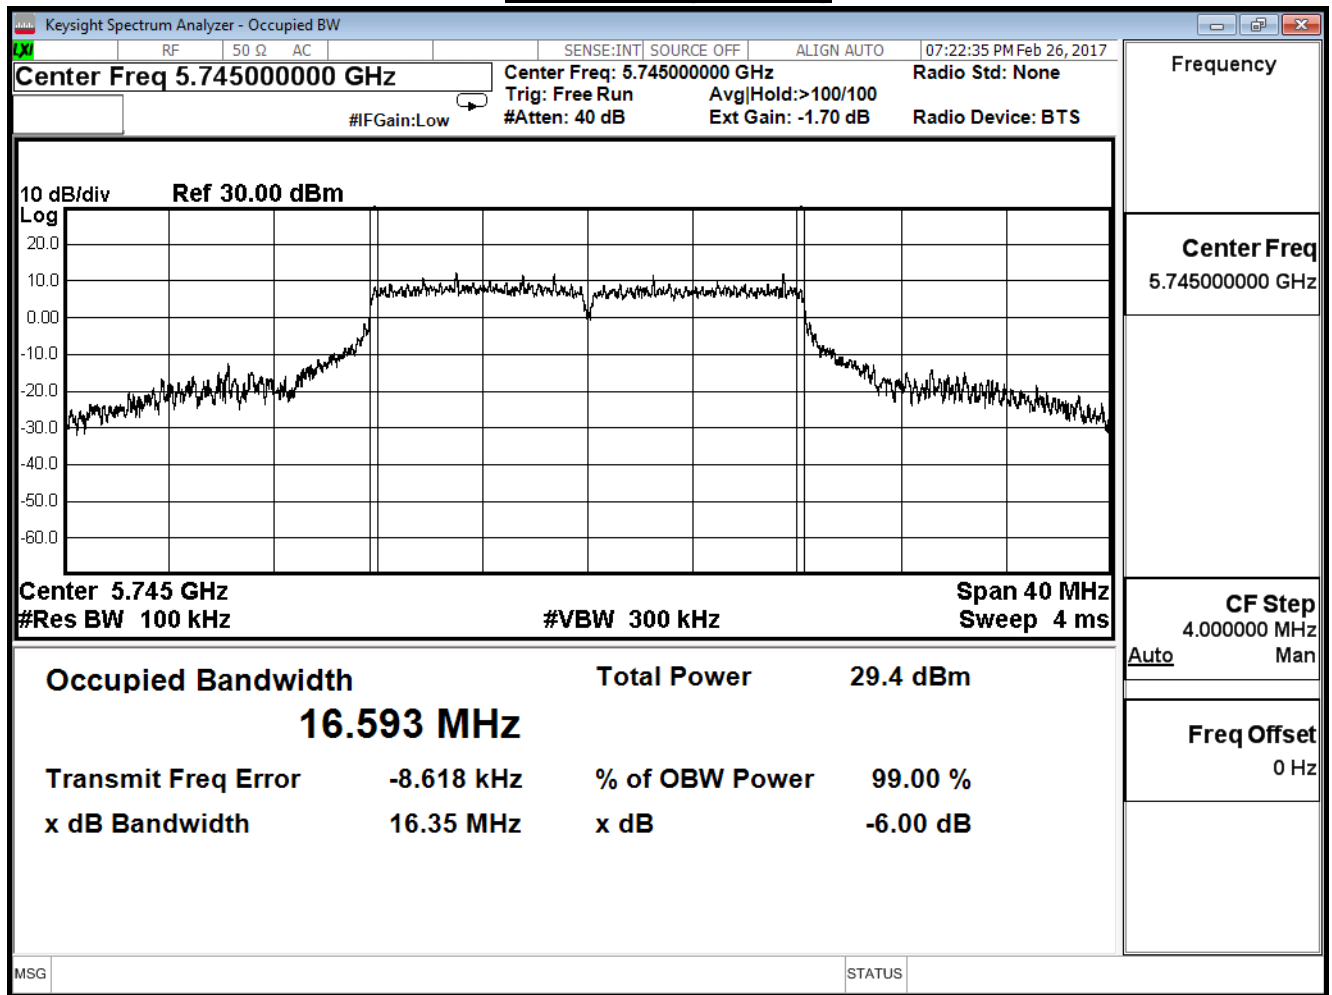

Channel 157 (5785MHz)

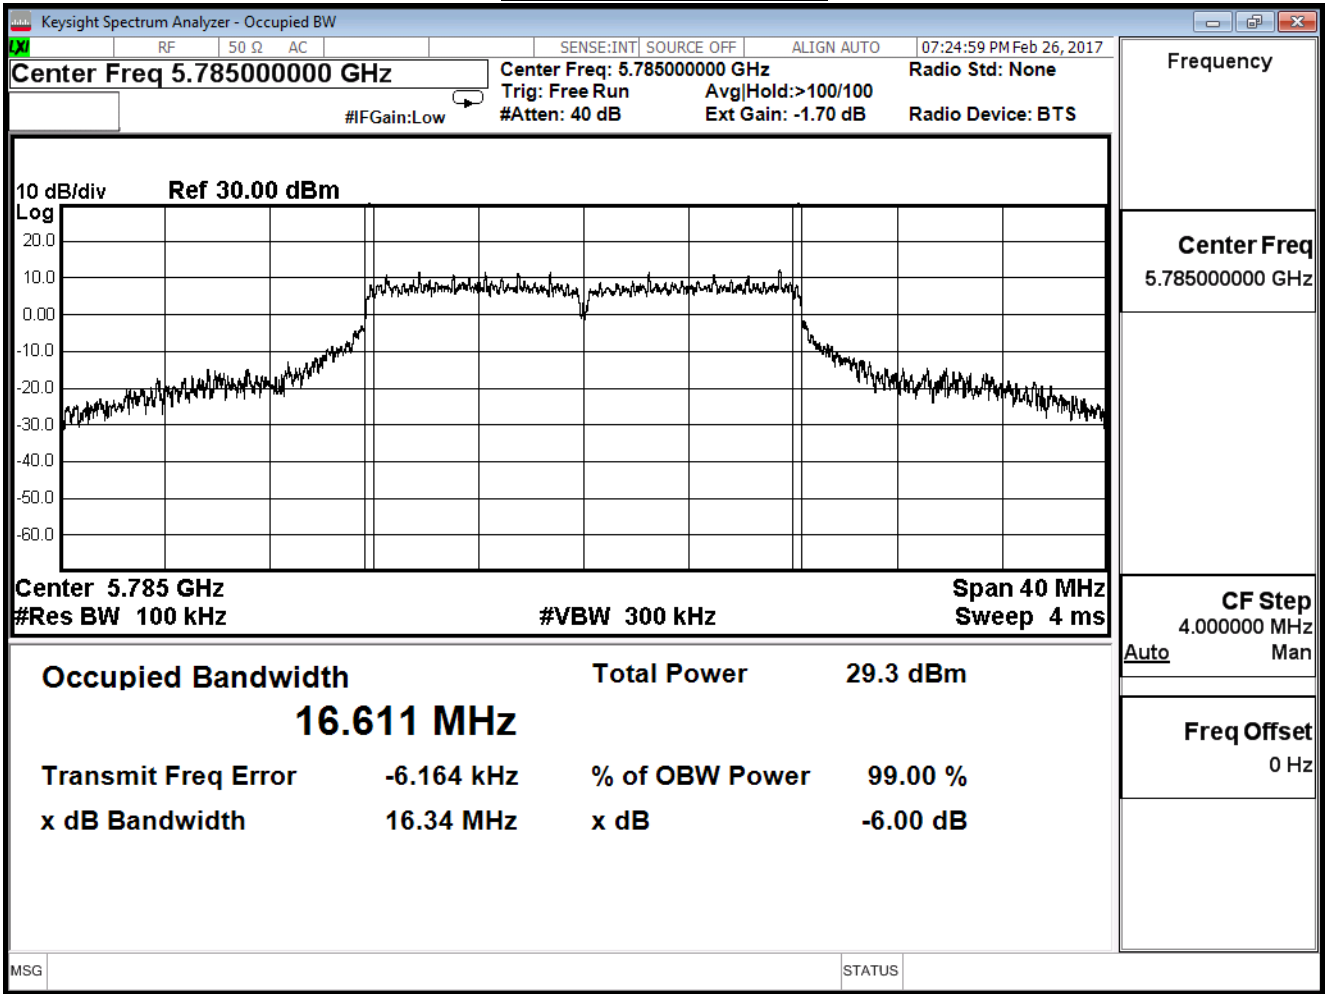


Channel 165 (5825MHz)

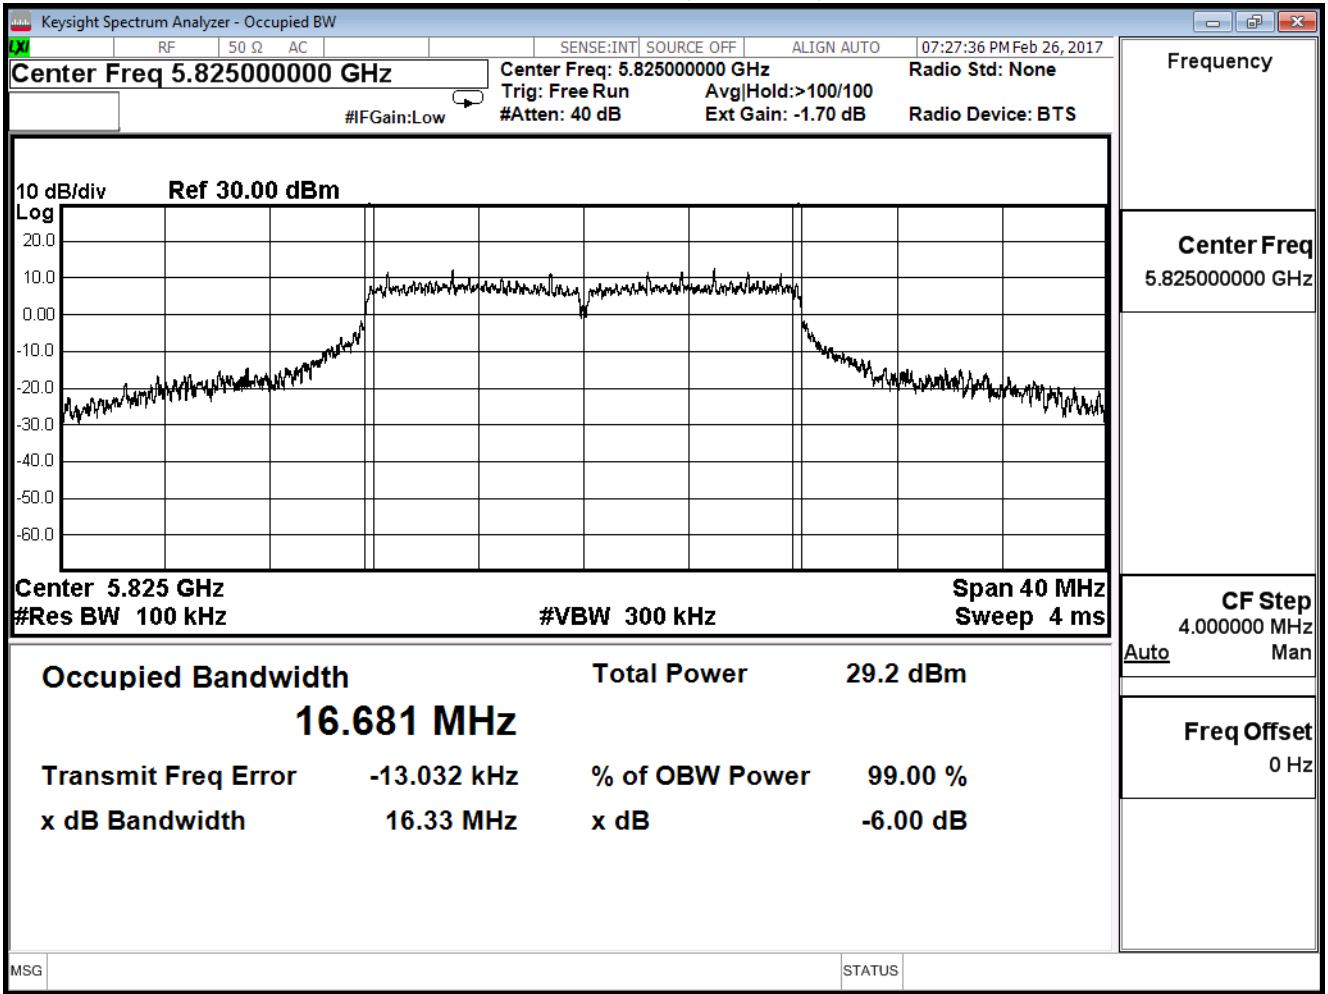


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/02/26	Test Site	SR10-H

802.11n_20M(ANT 0)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
149	5745	17.620	≥ 0.5	Pass
157	5785	17.590	≥ 0.5	Pass
165	5825	17.600	≥ 0.5	Pass


Channel 149 (5745MHz)

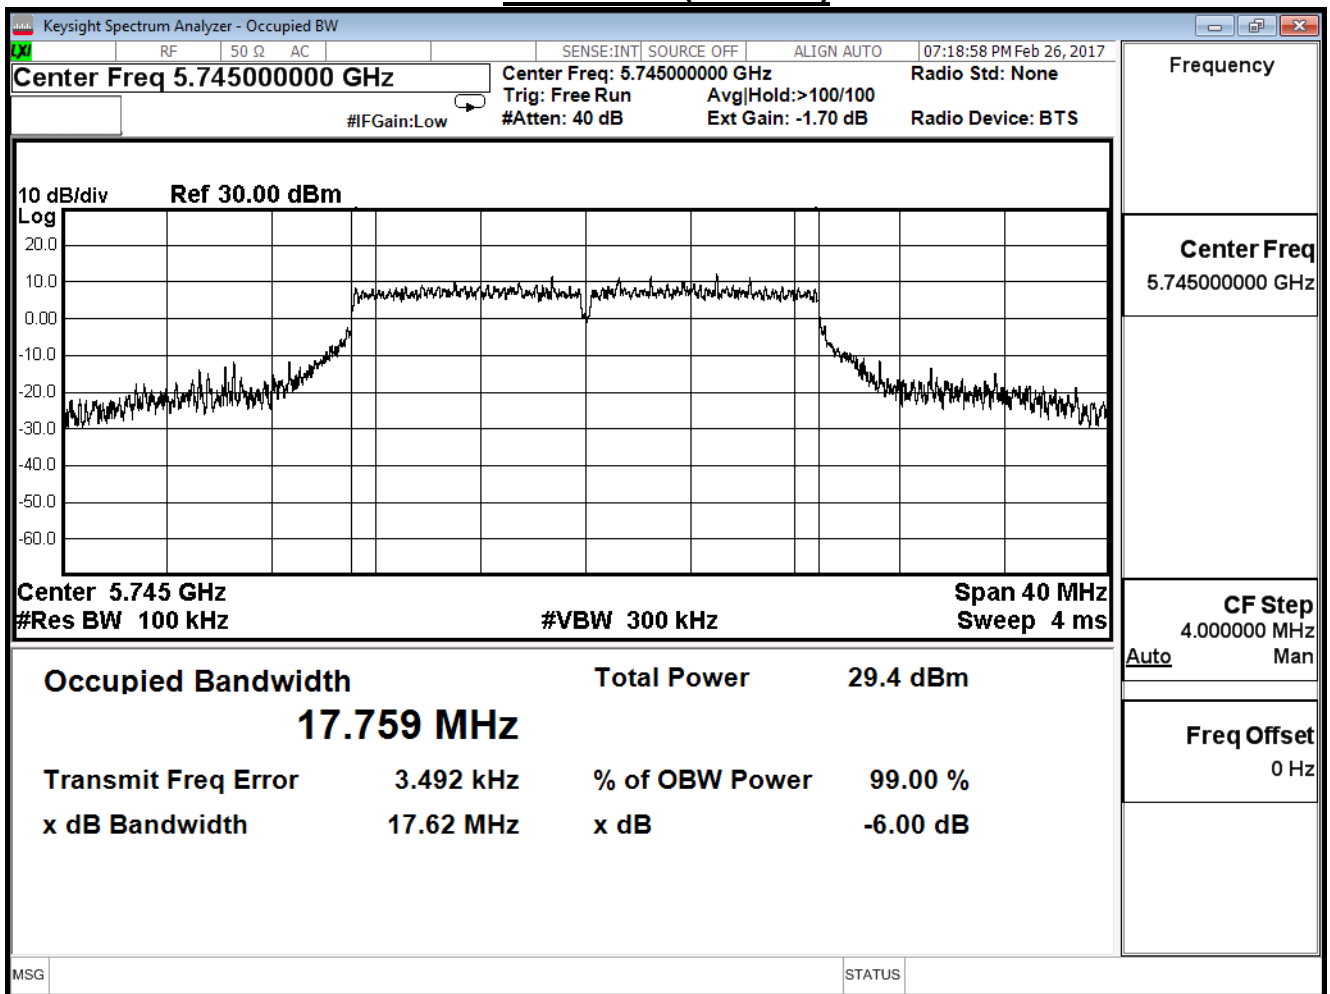

Channel 157 (5785MHz)

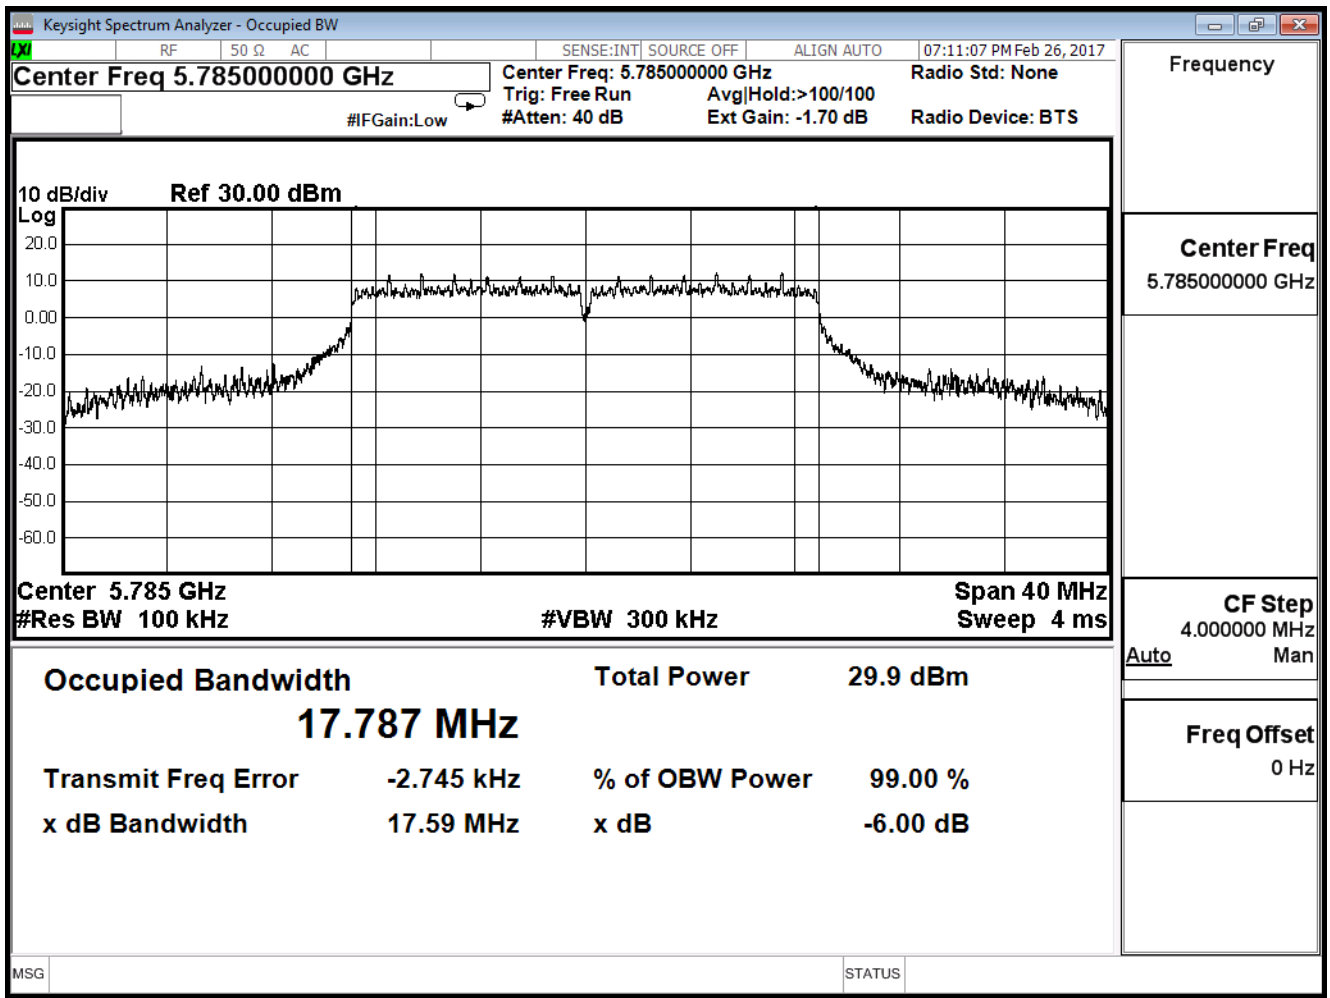

Channel 165 (5825MHz)

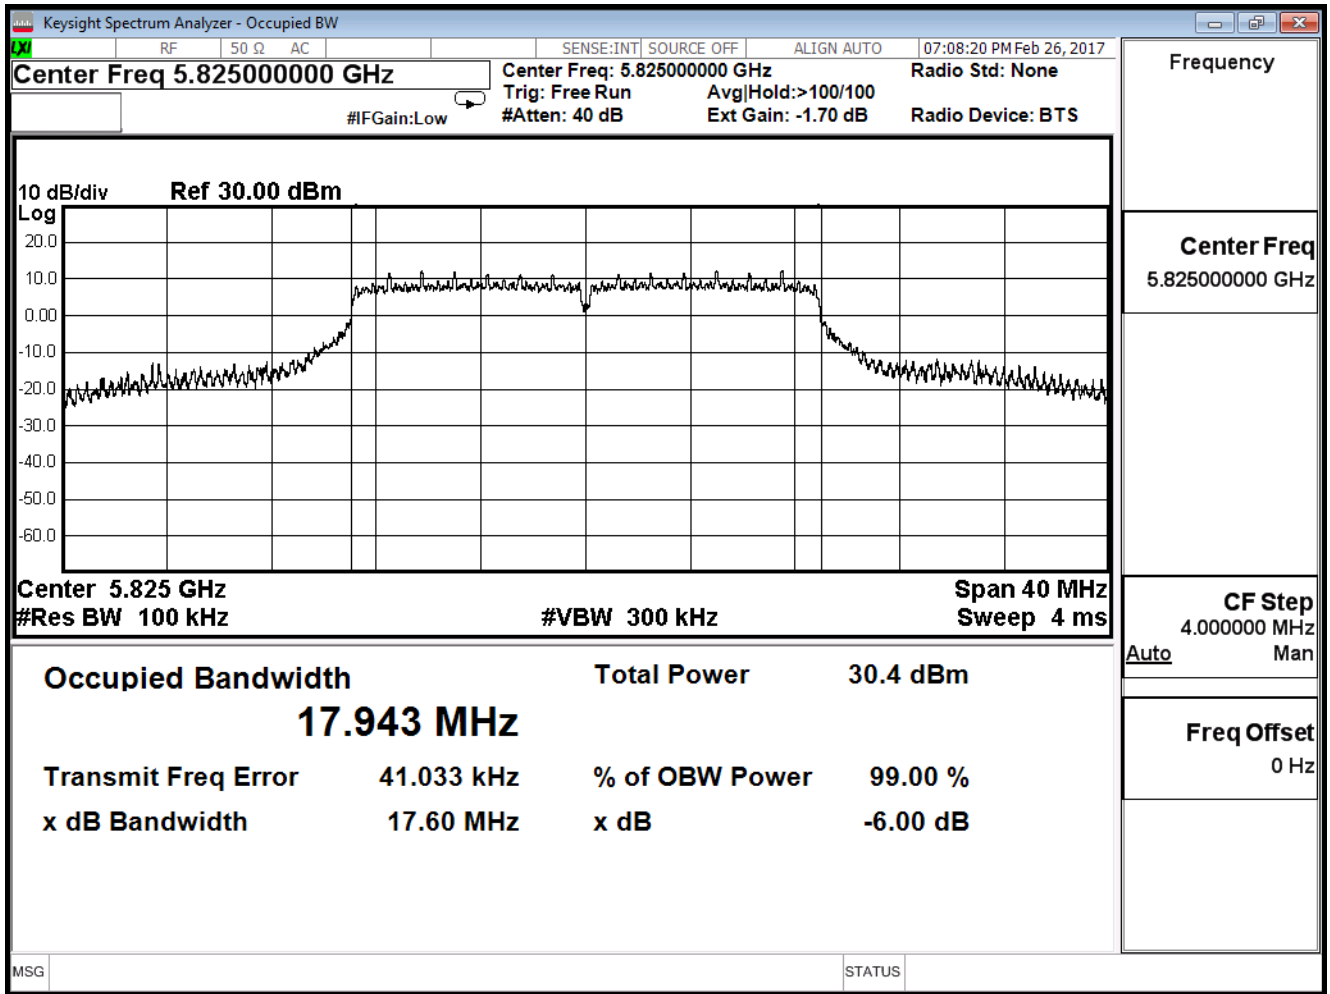


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/02/26	Test Site	SR10-H


802.11n_20M(ANT 1)

Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
149	5745	17.590	≥ 0.5	Pass
157	5785	17.600	≥ 0.5	Pass
165	5825	17.590	≥ 0.5	Pass


Channel 149 (5745MHz)

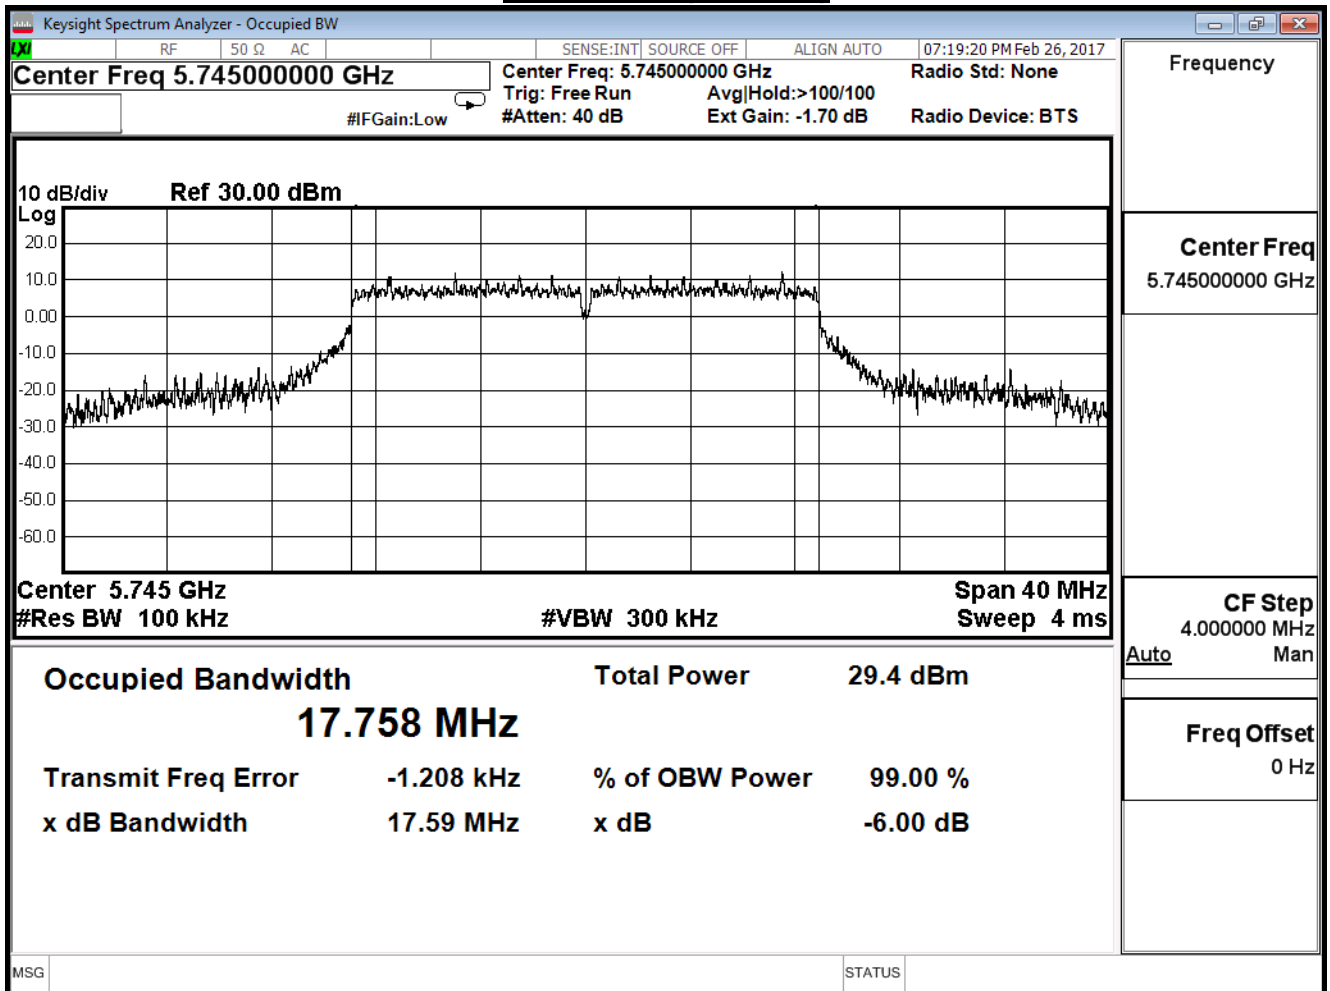

Channel 157 (5785MHz)

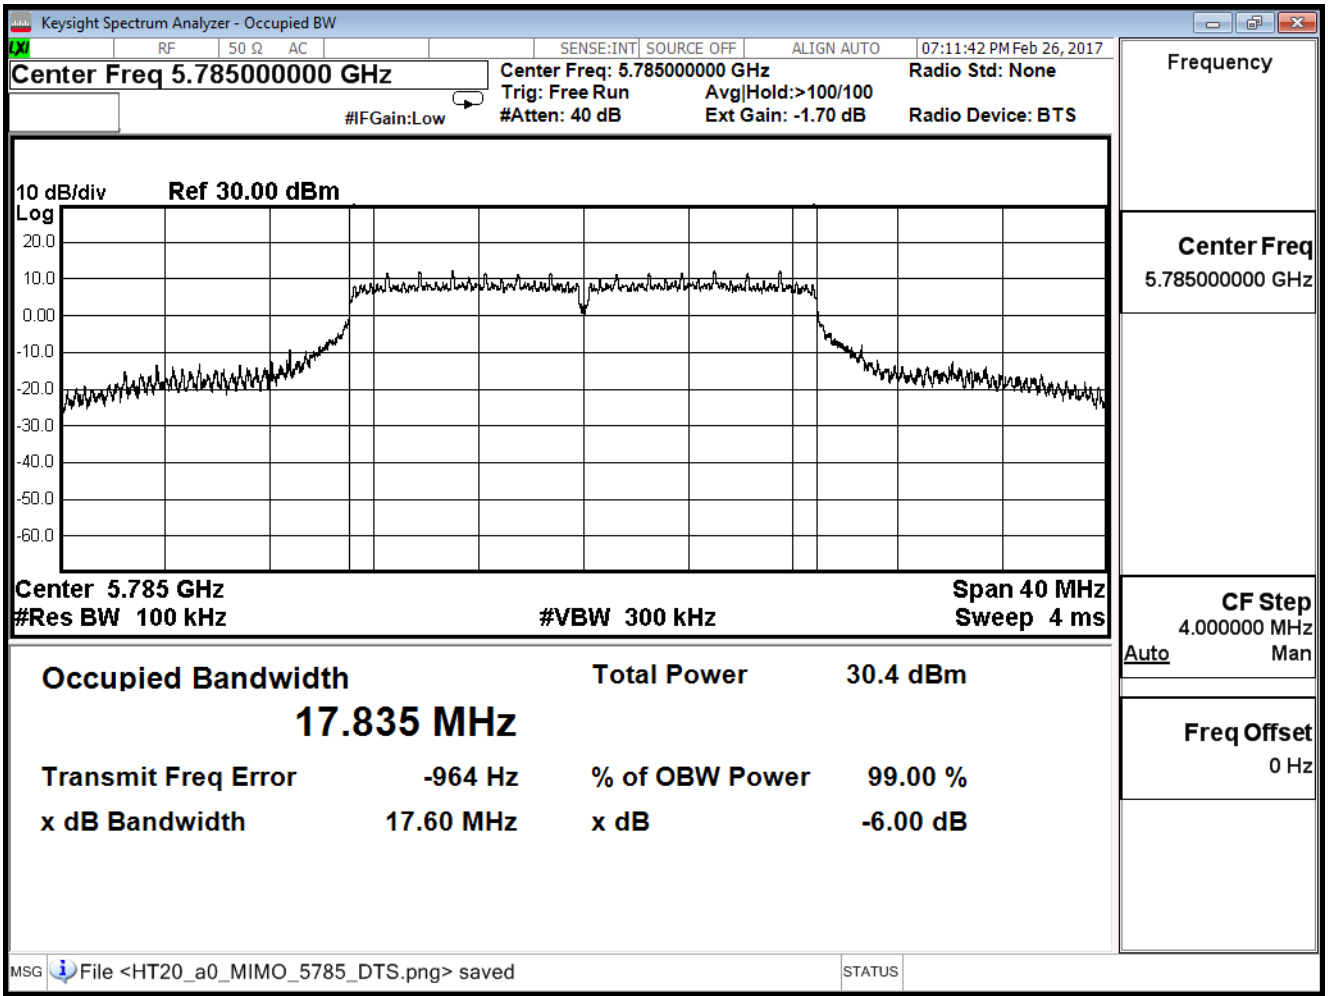

Channel 165 (5825MHz)

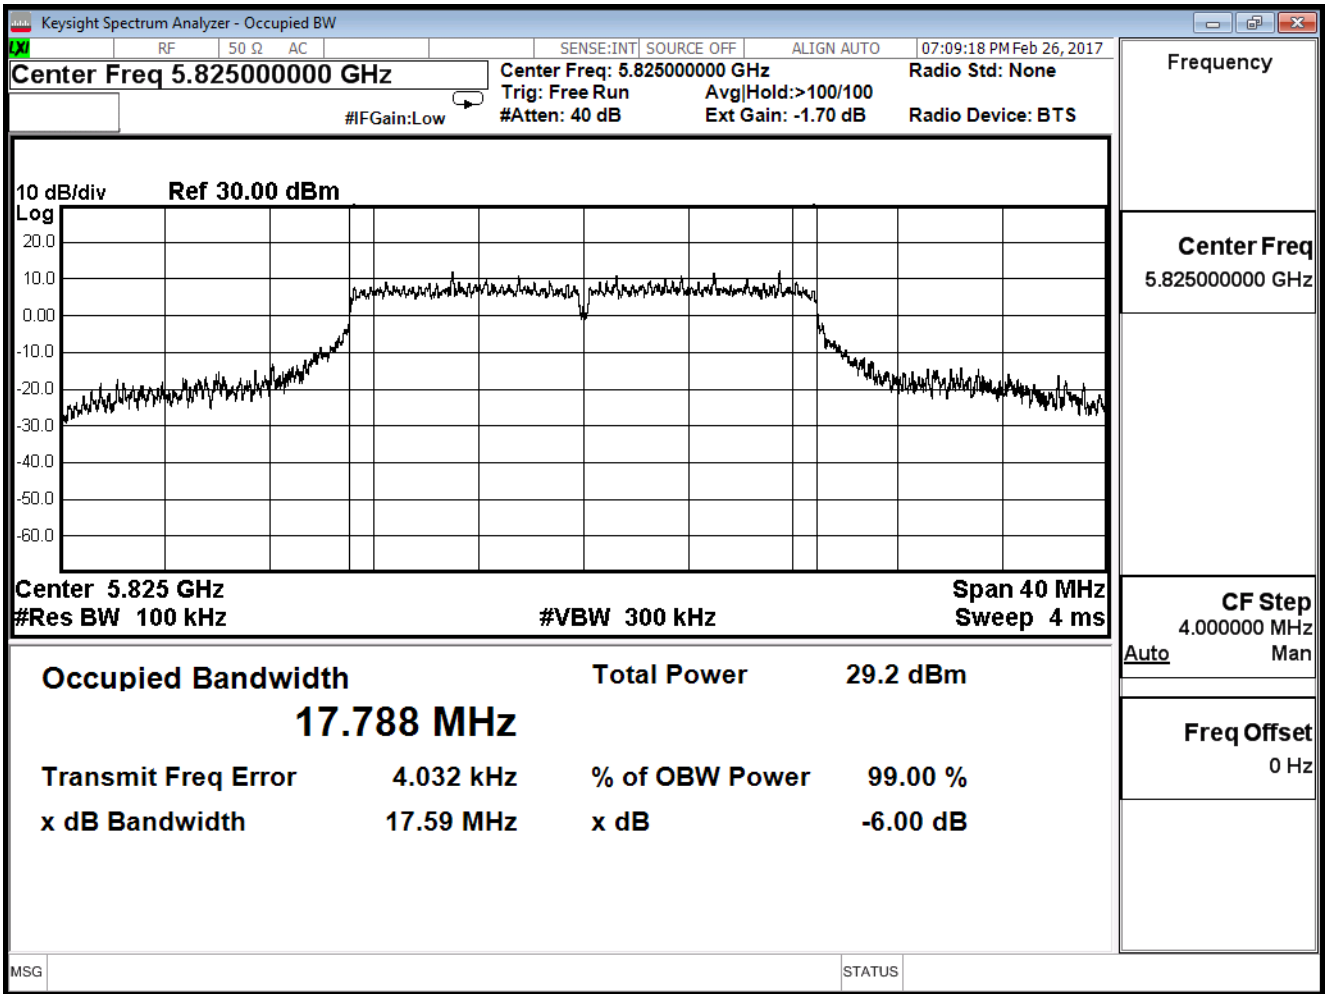


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/02/26	Test Site	SR10-H


802.11n_20M(ANT 2)

Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
149	5745	17.590	≥ 0.5	Pass
157	5785	17.580	≥ 0.5	Pass
165	5825	17.570	≥ 0.5	Pass


Channel 149 (5745MHz)

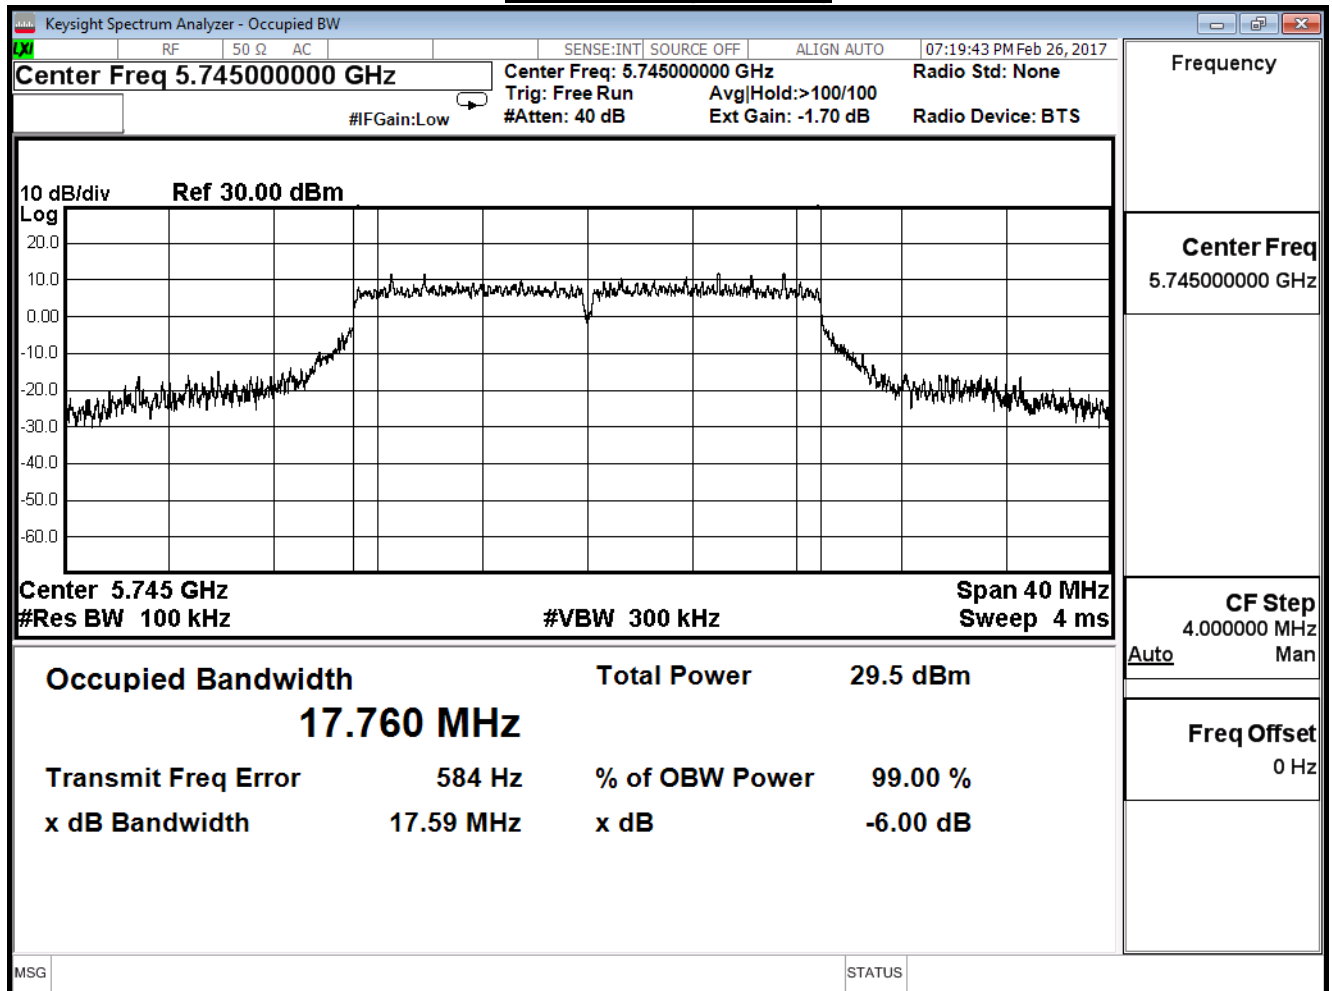

Channel 157 (5785MHz)

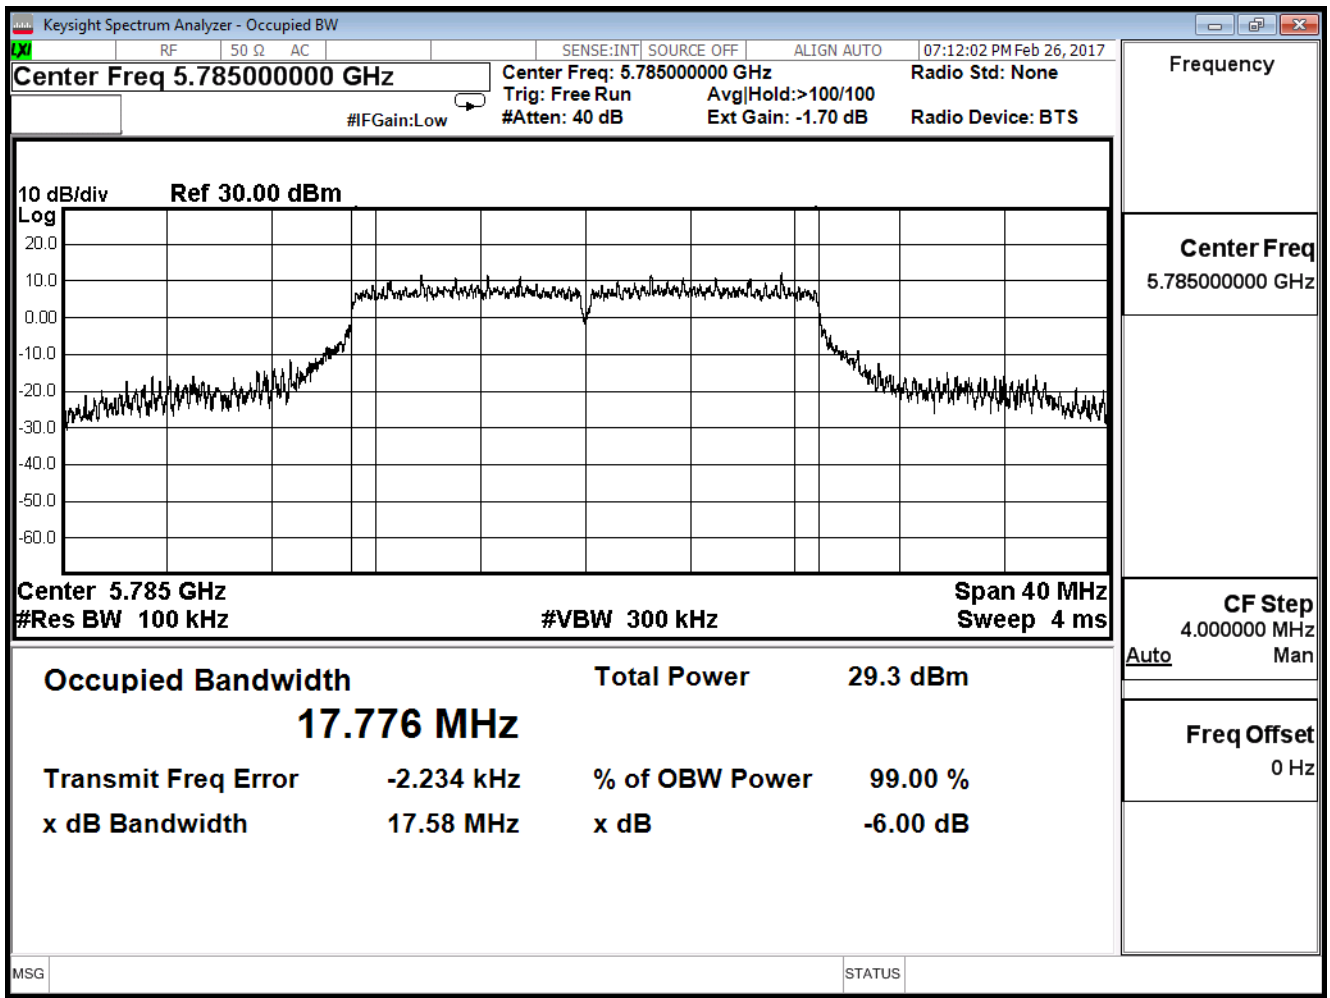

Channel 165 (5825MHz)

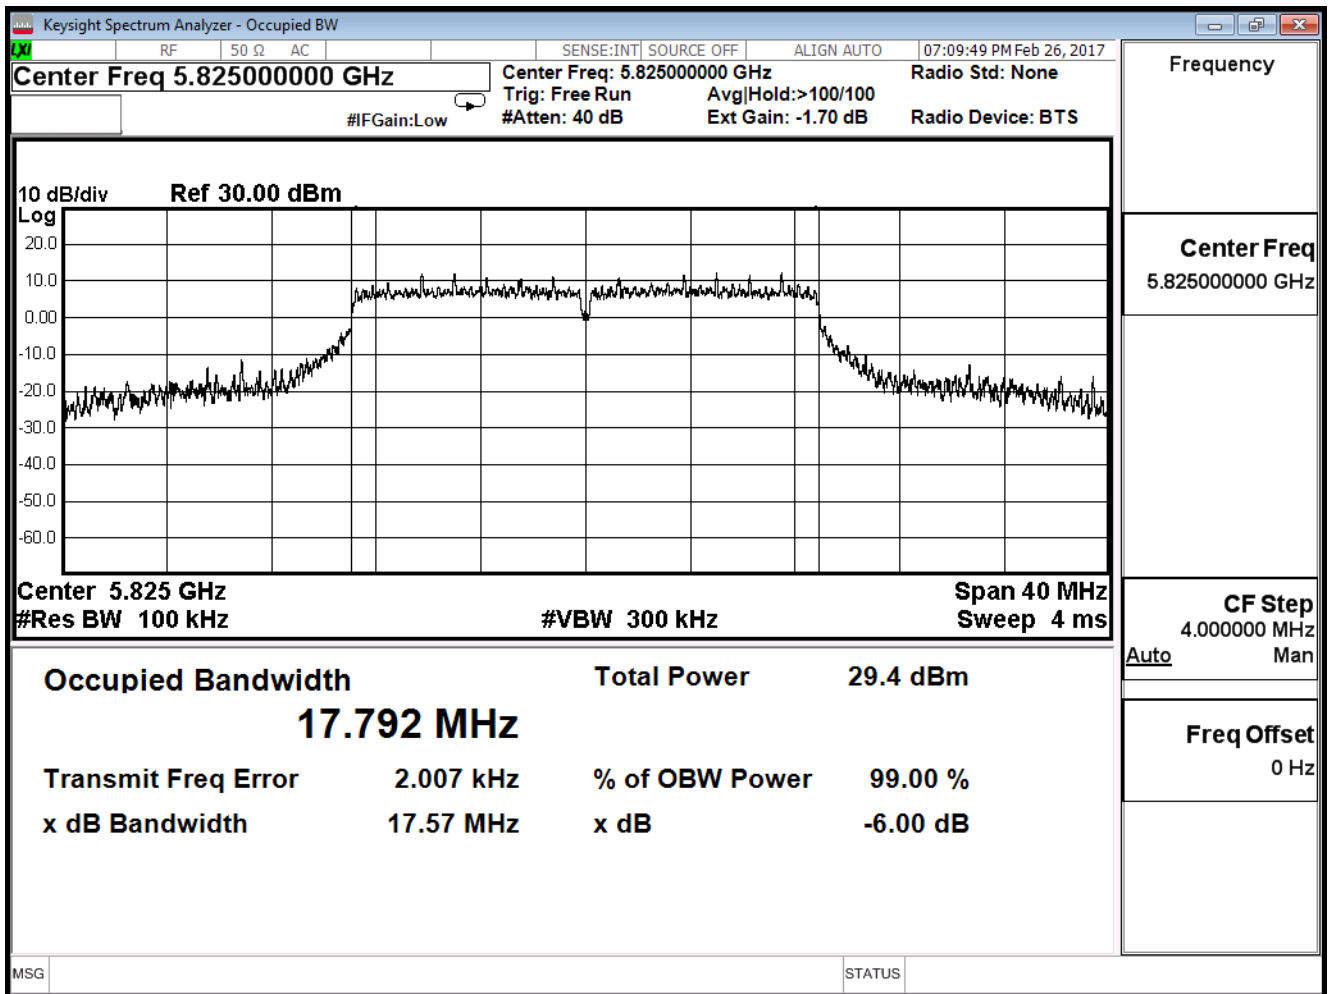


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/02/26	Test Site	SR10-H


802.11n_20M(ANT 3)

Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
149	5745	17.600	≥ 0.5	Pass
157	5785	17.590	≥ 0.5	Pass
165	5825	17.610	≥ 0.5	Pass


Channel 149 (5745MHz)

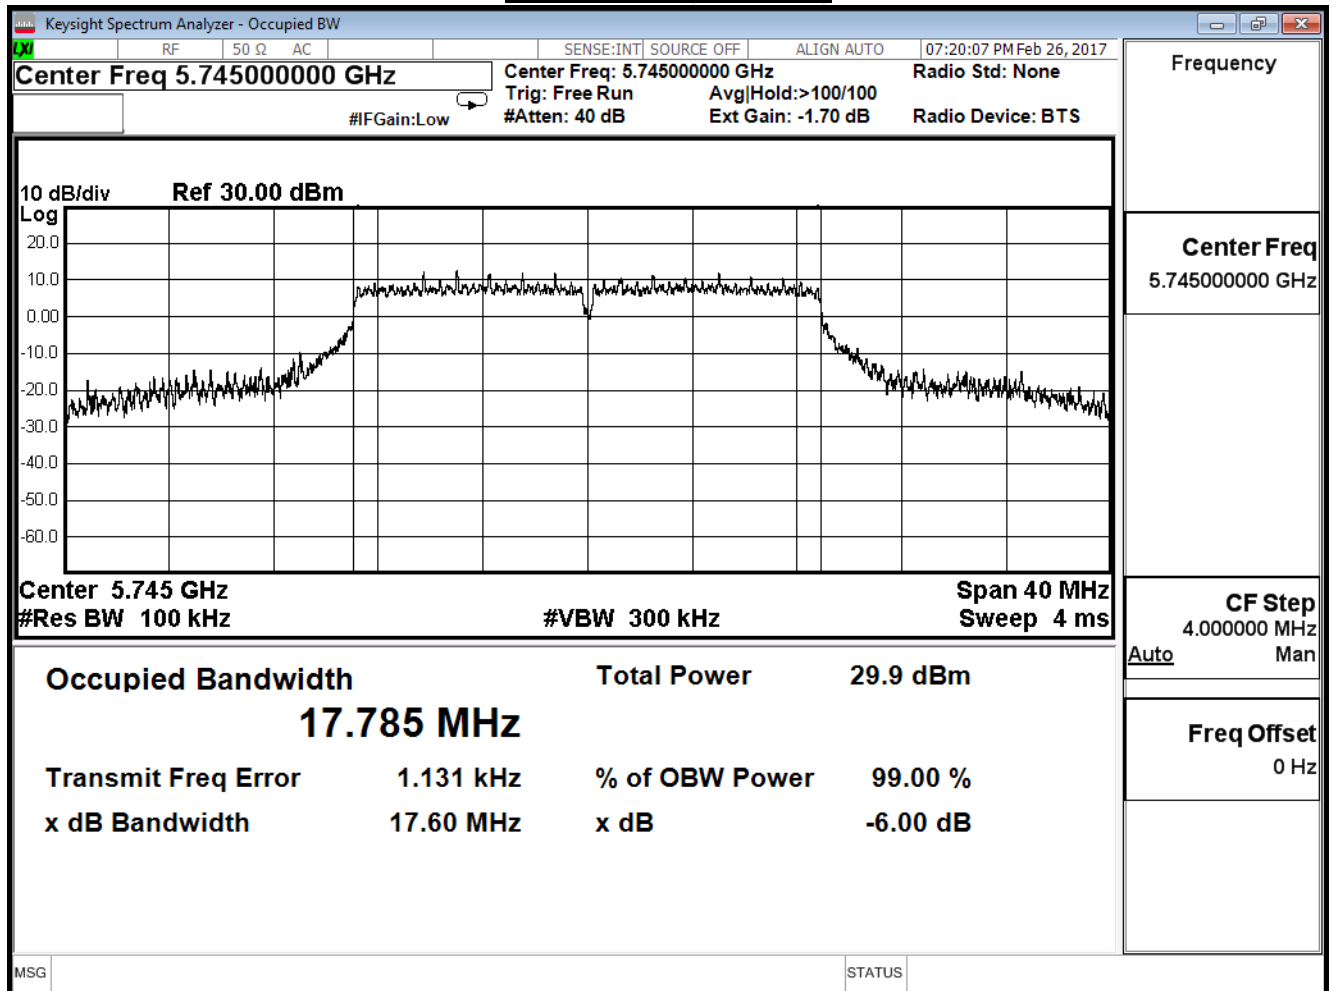

Channel 157 (5785MHz)

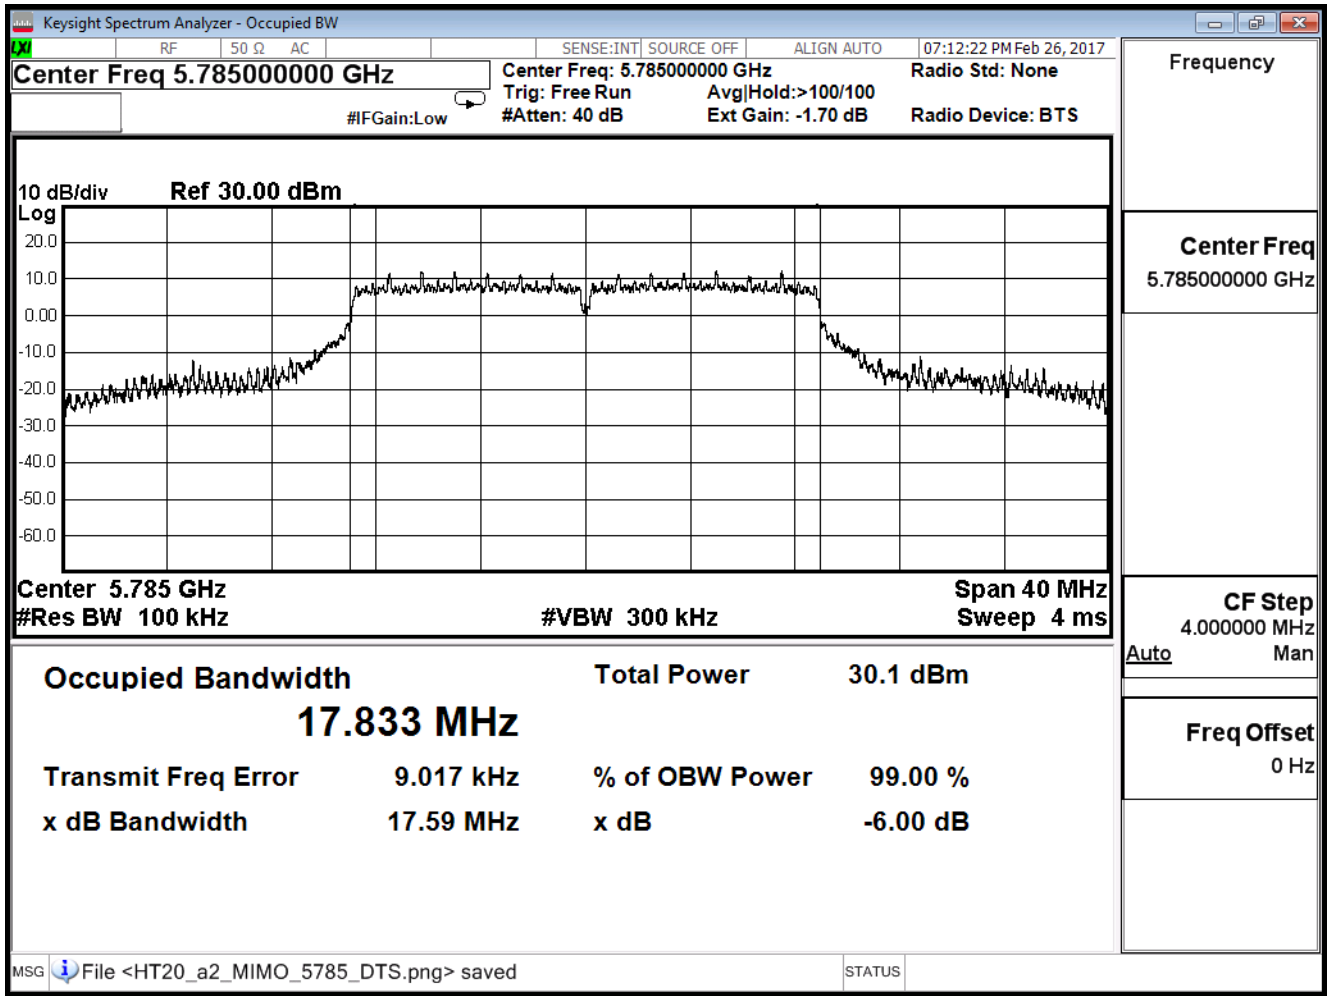

Channel 165 (5825MHz)

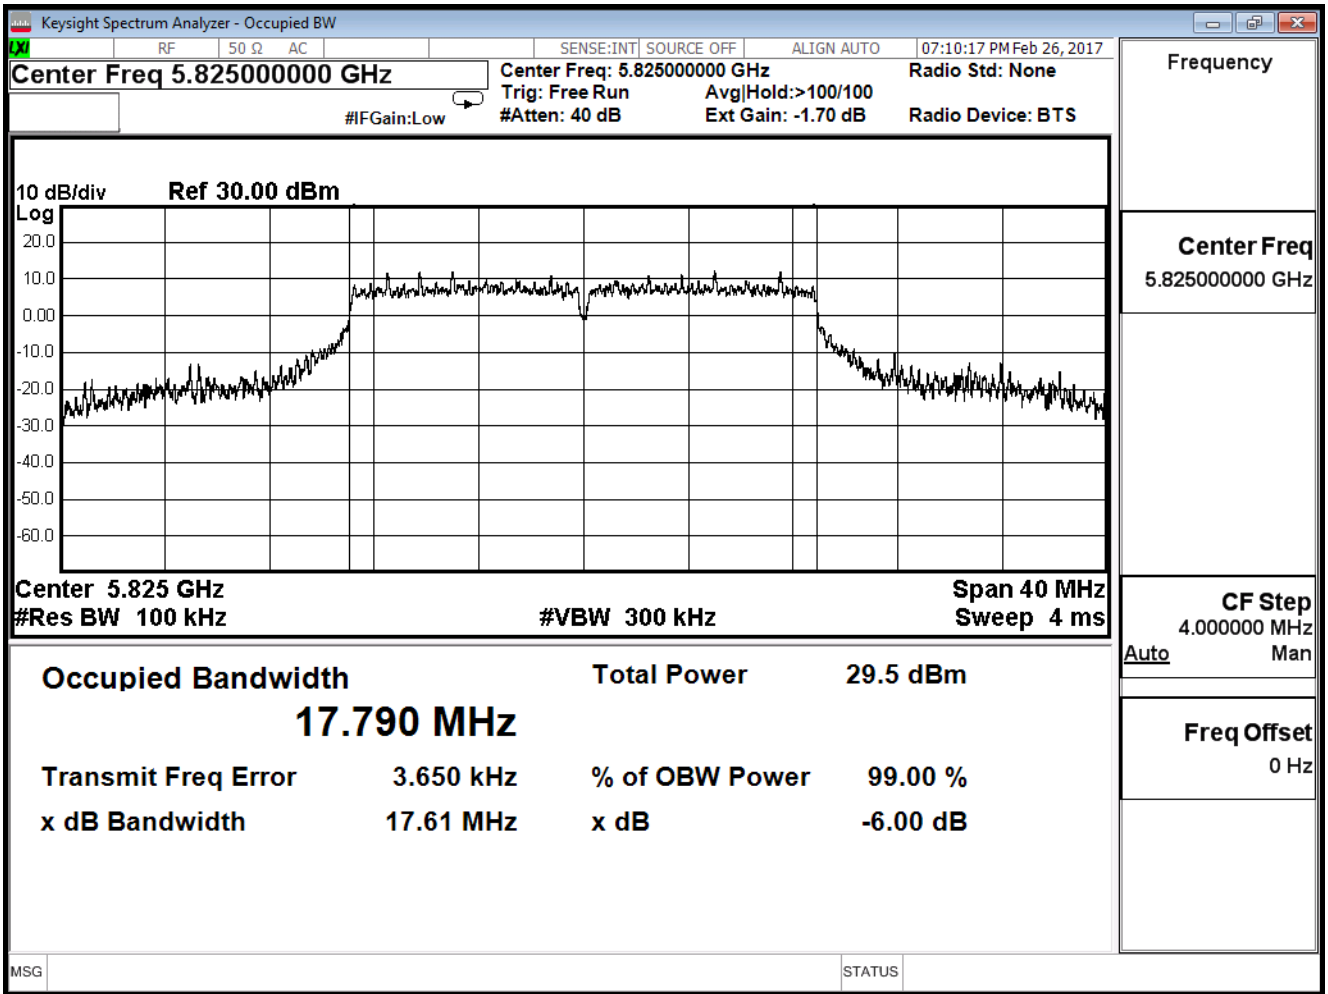


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/02/26	Test Site	SR10-H


802.11n_40M(ANT 0)

Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
151	5755	36.340	≥ 0.5	Pass
159	5795	36.340	≥ 0.5	Pass

Channel 151 (5755MHz)

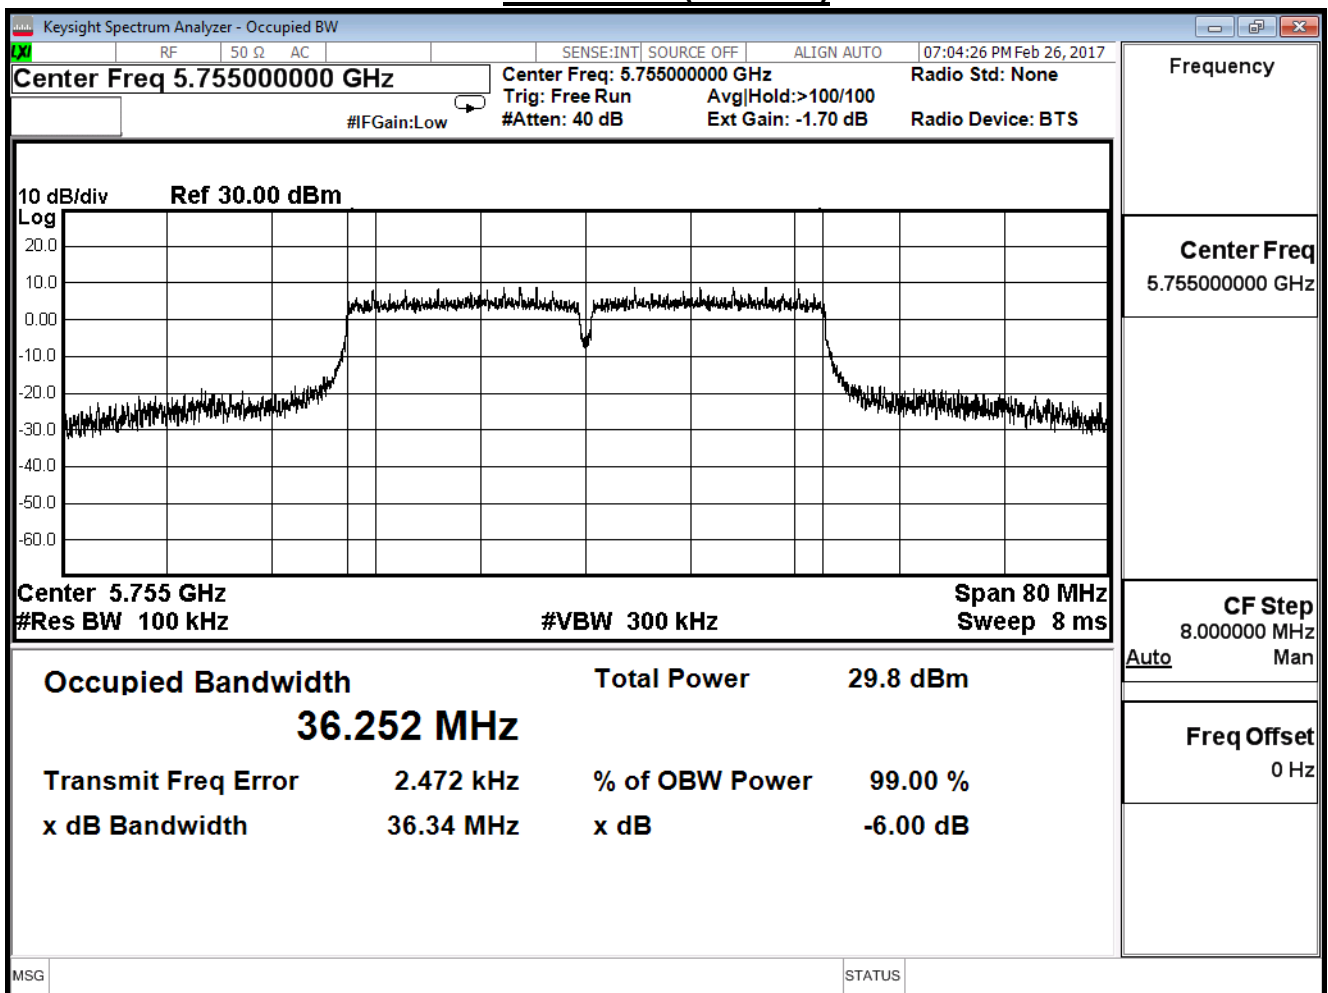


Channel 159 (5795MHz)

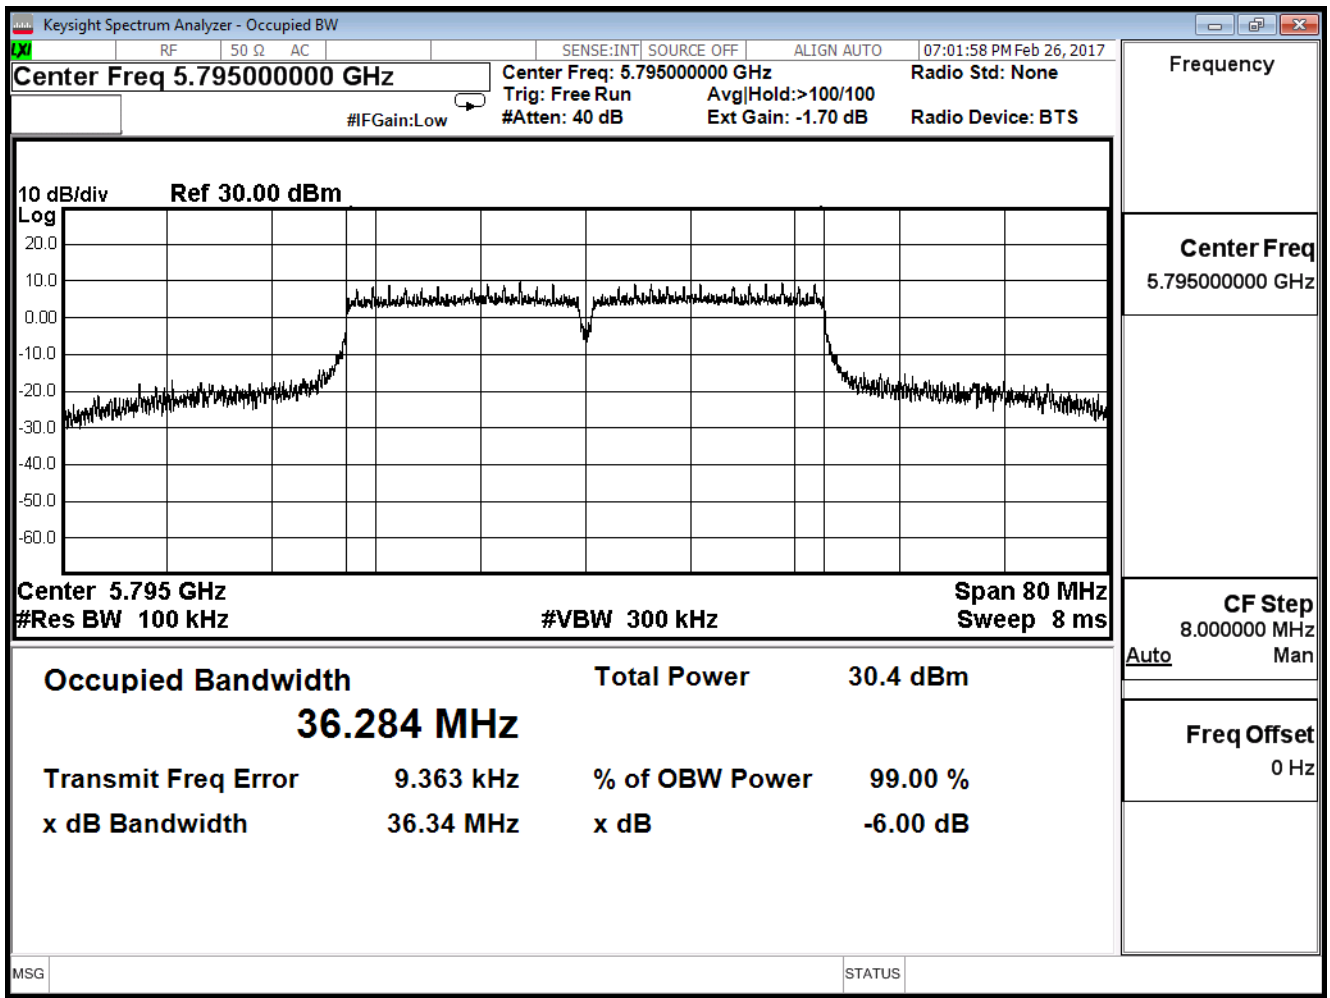


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/02/26	Test Site	SR10-H

802.11n_40M(ANT 1)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
151	5755	36.330	≥ 0.5	Pass
159	5795	36.350	≥ 0.5	Pass

Channel 151 (5755MHz)

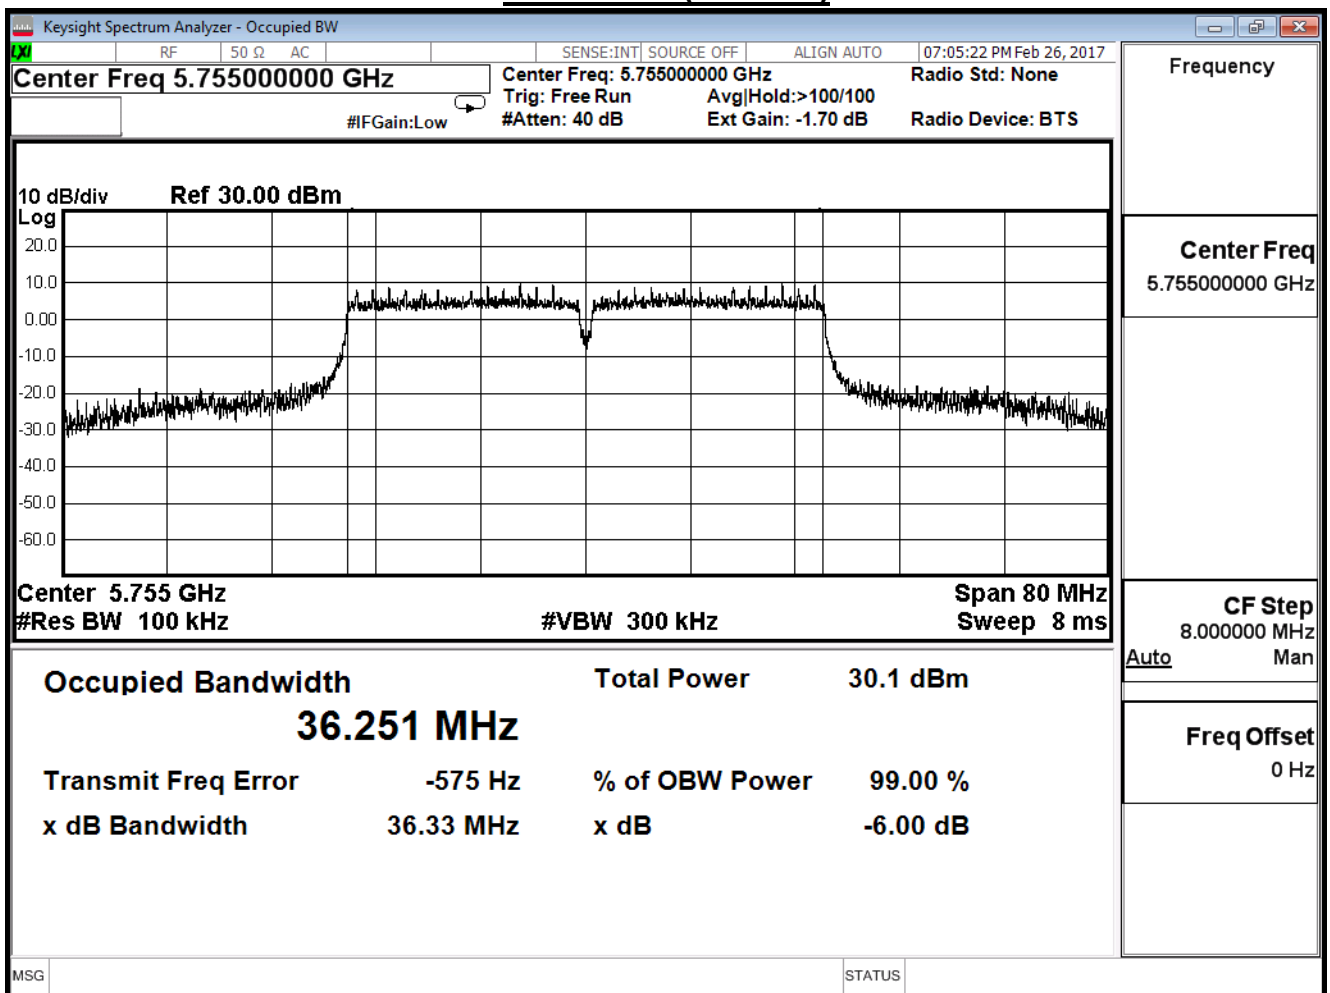


Channel 159 (5795MHz)

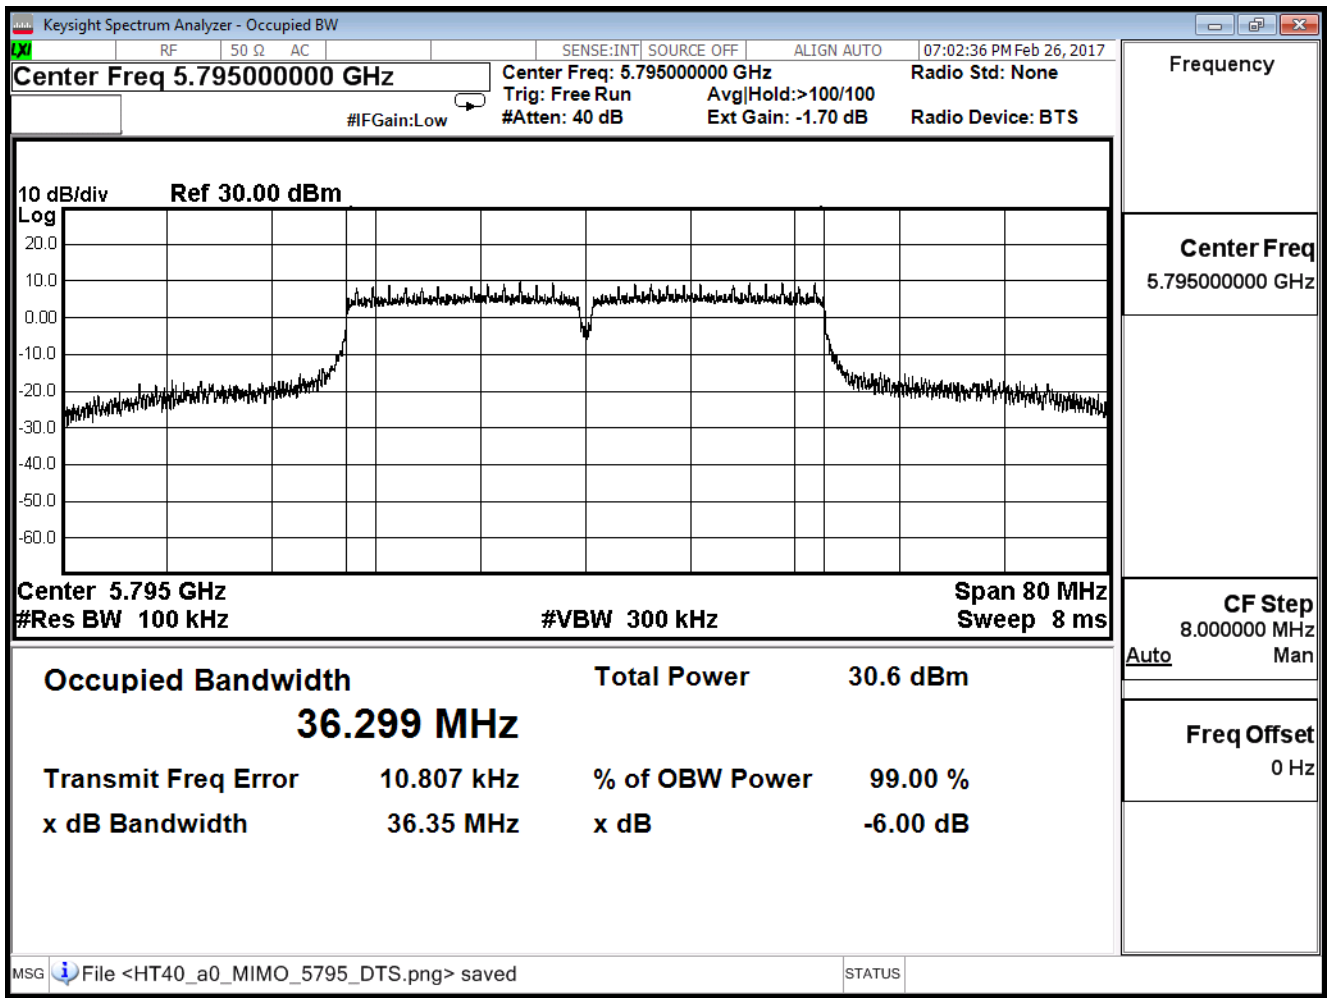


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Tx_ADP: AD890326010-2LF_MIMO Mode (802.11 n20/40)		
Date of Test	2017/02/26	Test Site	SR10-H

802.11n_40M(ANT 2)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
151	5755	36.350	≥ 0.5	Pass
159	5795	36.330	≥ 0.5	Pass

Channel 151 (5755MHz)

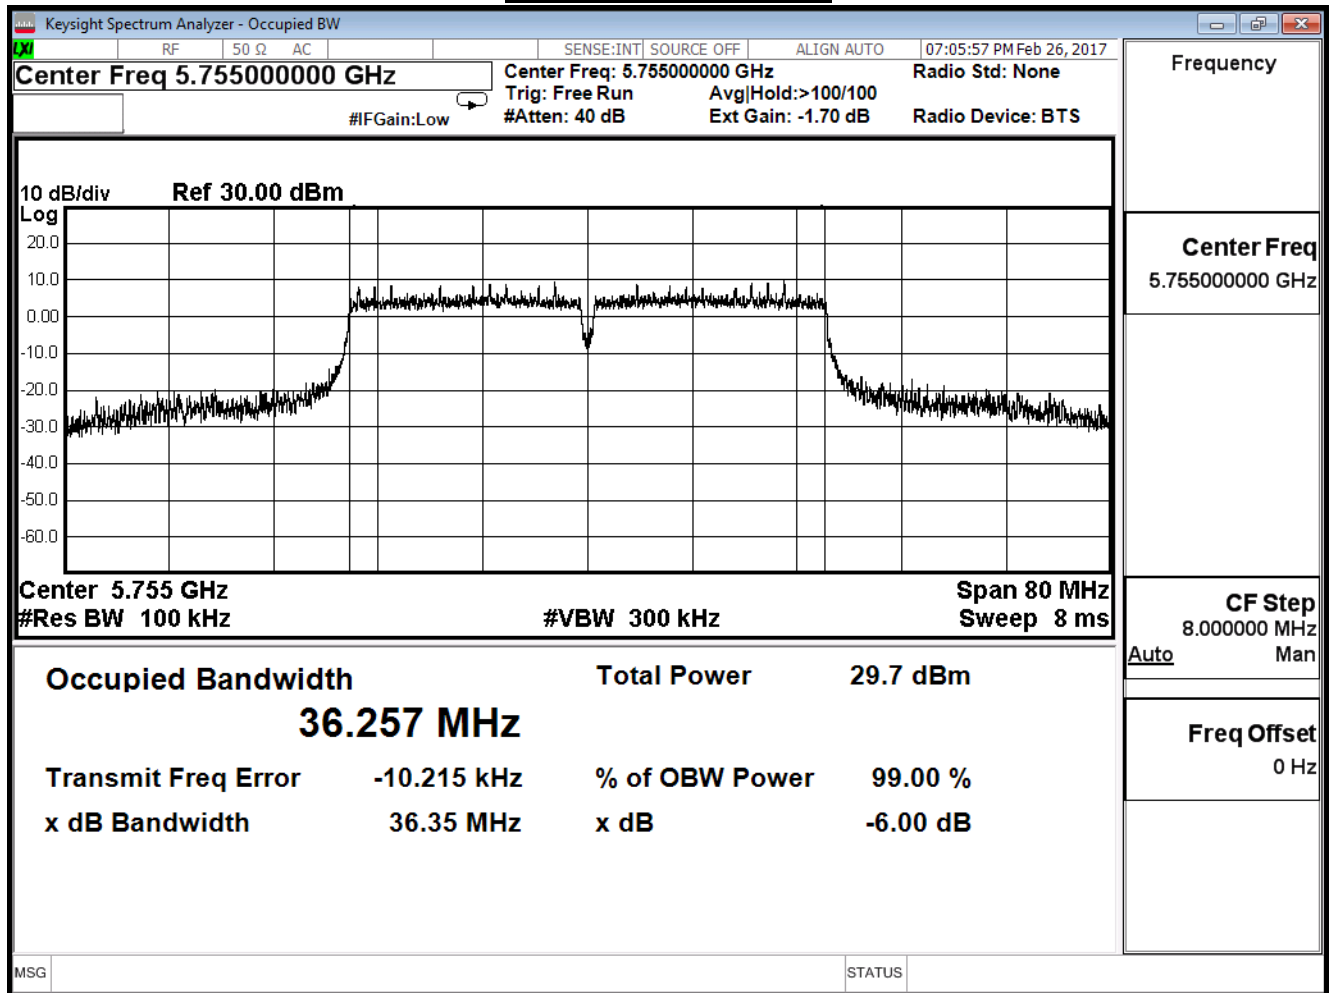

Channel 159 (5795MHz)

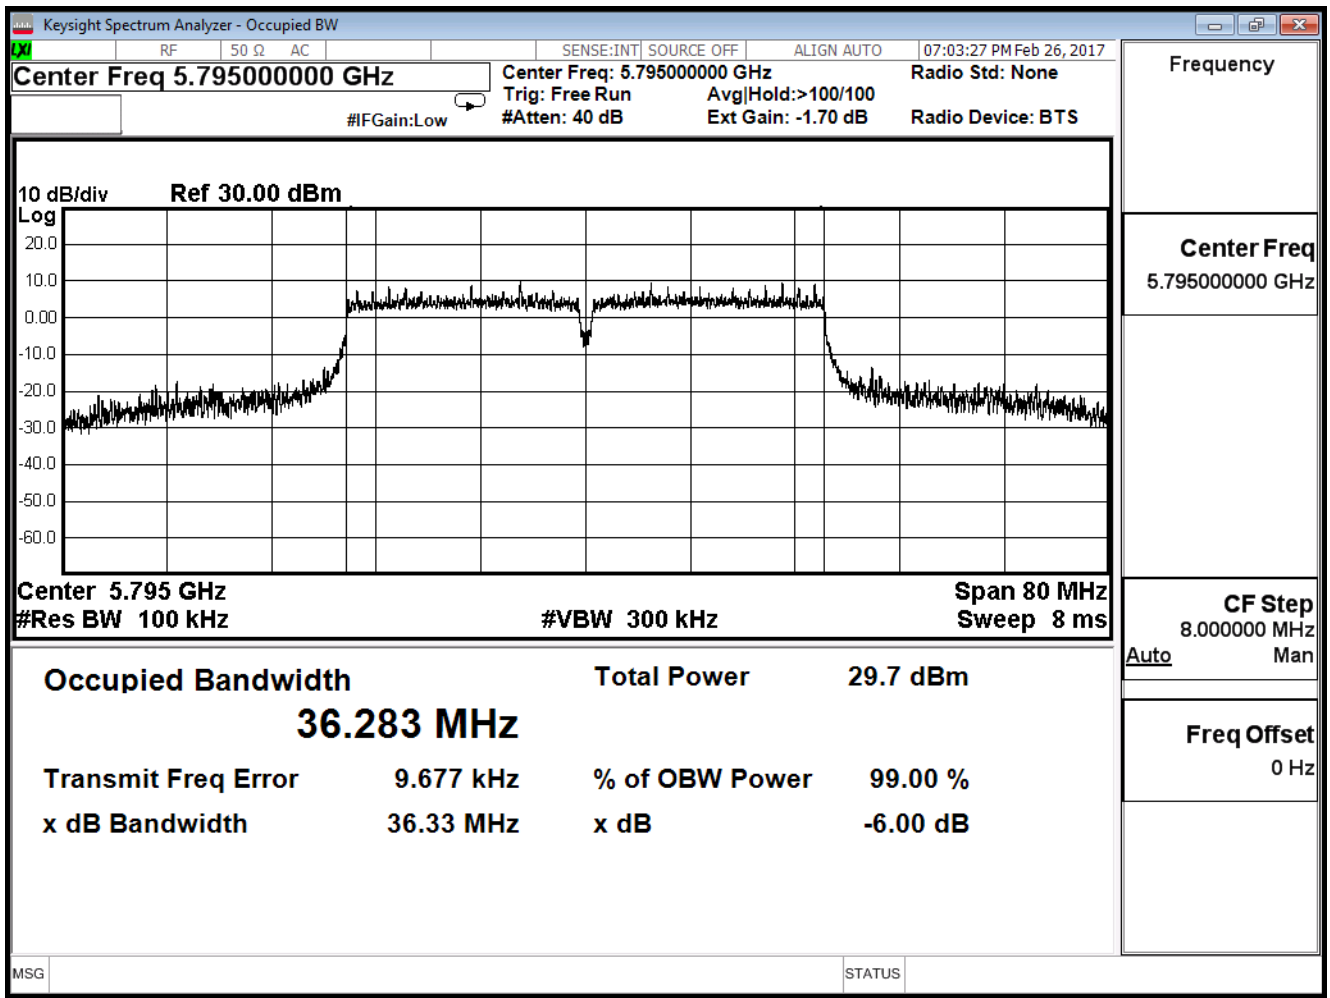


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/02/26	Test Site	SR10-H


802.11n_40M(ANT 3)

Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
151	5755	36.360	≥ 0.5	Pass
159	5795	36.340	≥ 0.5	Pass

Channel 151 (5755MHz)

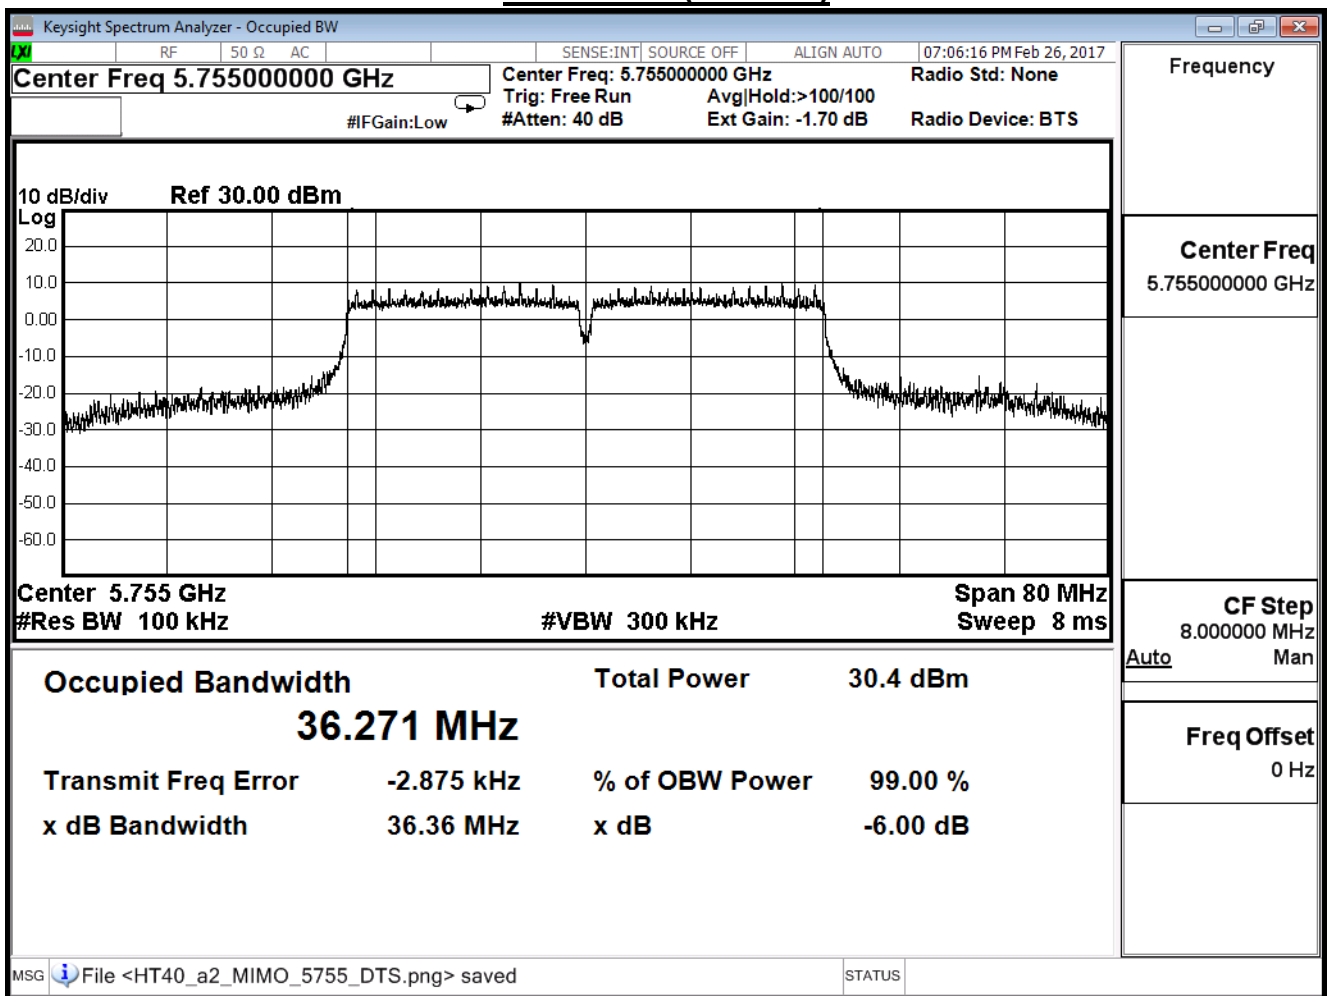


Channel 159 (5795MHz)

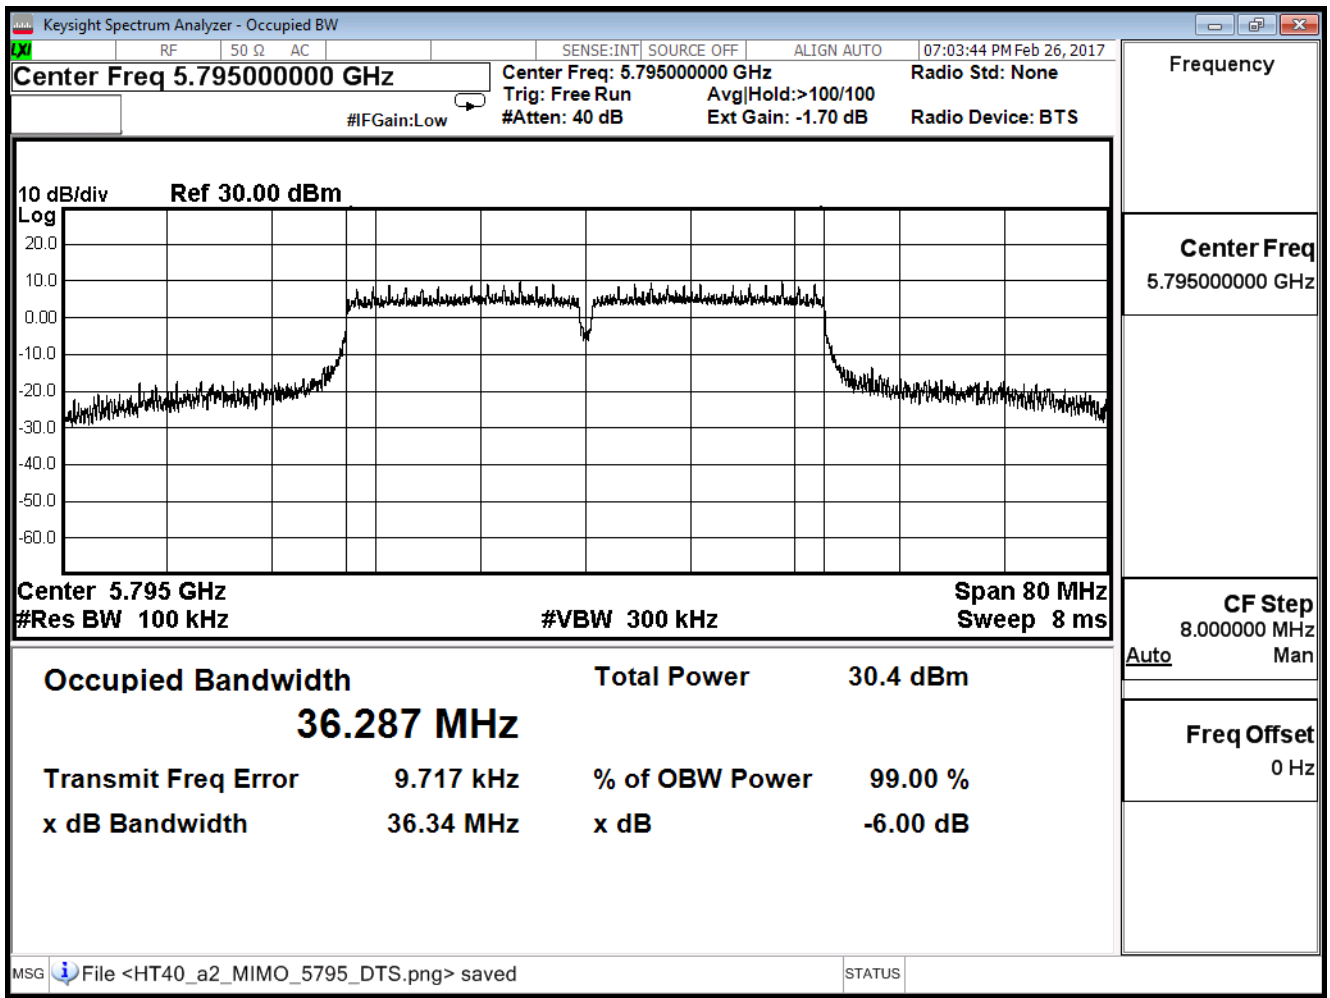

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/02/26	Test Site	SR10-H

802.11ac_80M(ANT 0)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
155	5775	76.320	≥ 0.5	Pass


Channel 155 (5775MHz)

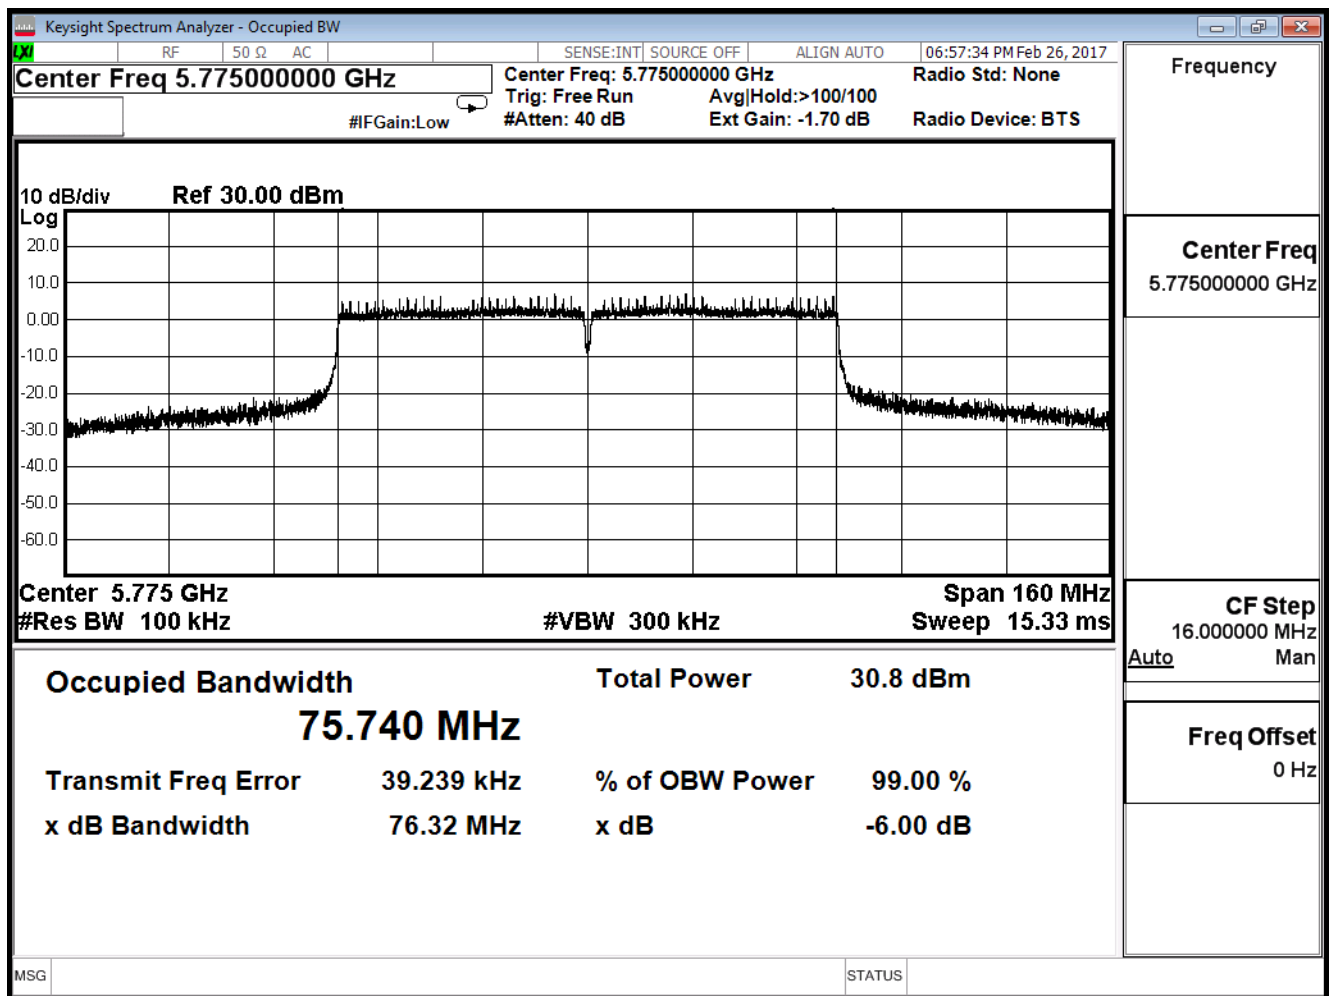

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/02/26	Test Site	SR10-H

802.11ac_80M(ANT 1)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
155	5775	76.290	≥ 0.5	Pass


Channel 155 (5775MHz)

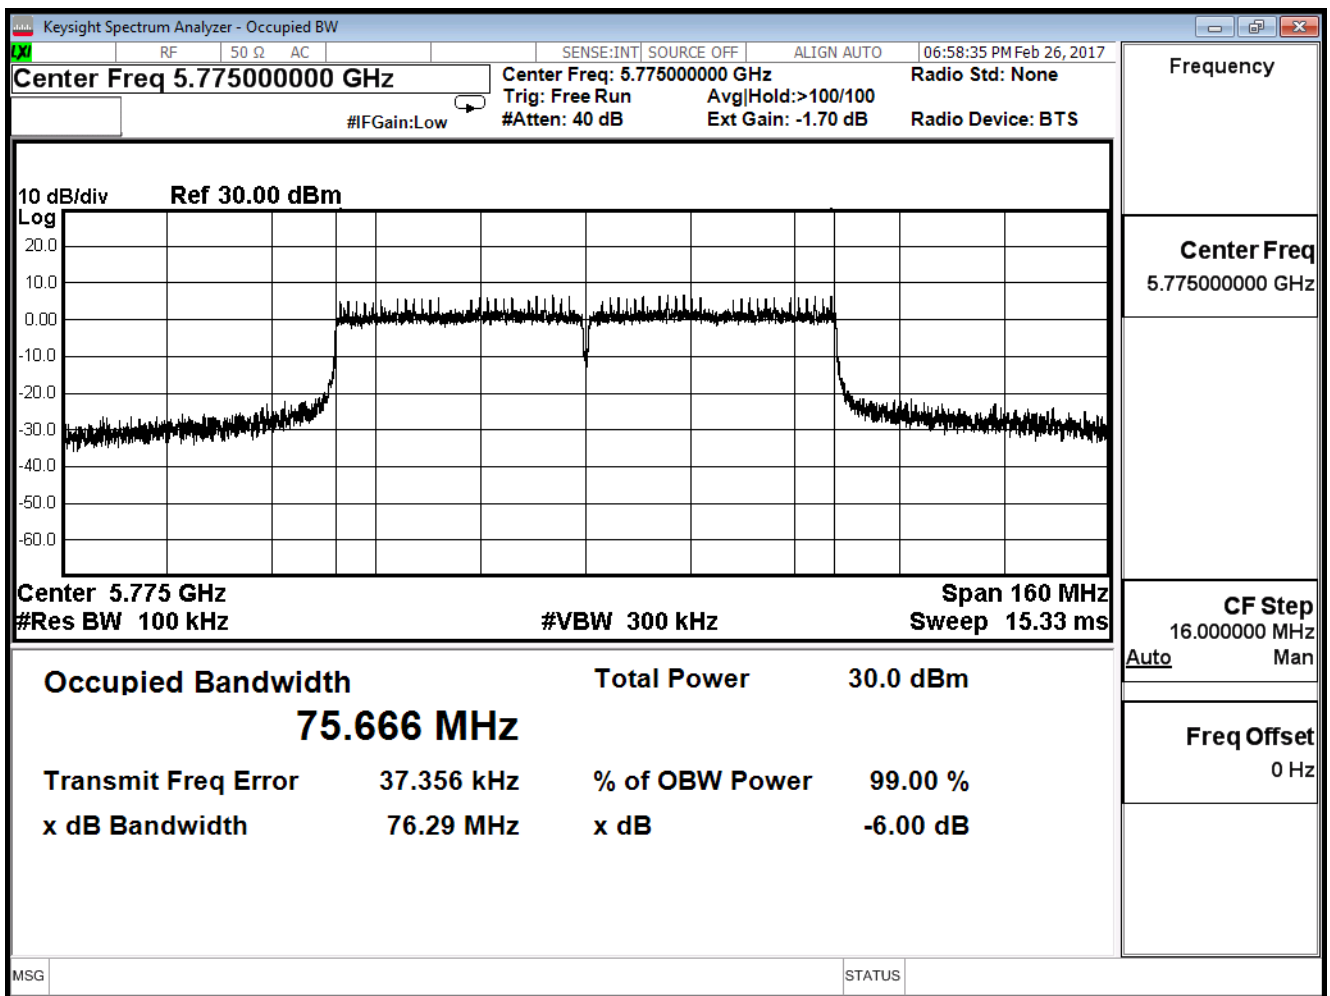

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/02/26	Test Site	SR10-H

802.11ac_80M(ANT 2)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
155	5775	75.940	≥ 0.5	Pass


Channel 155 (5775MHz)

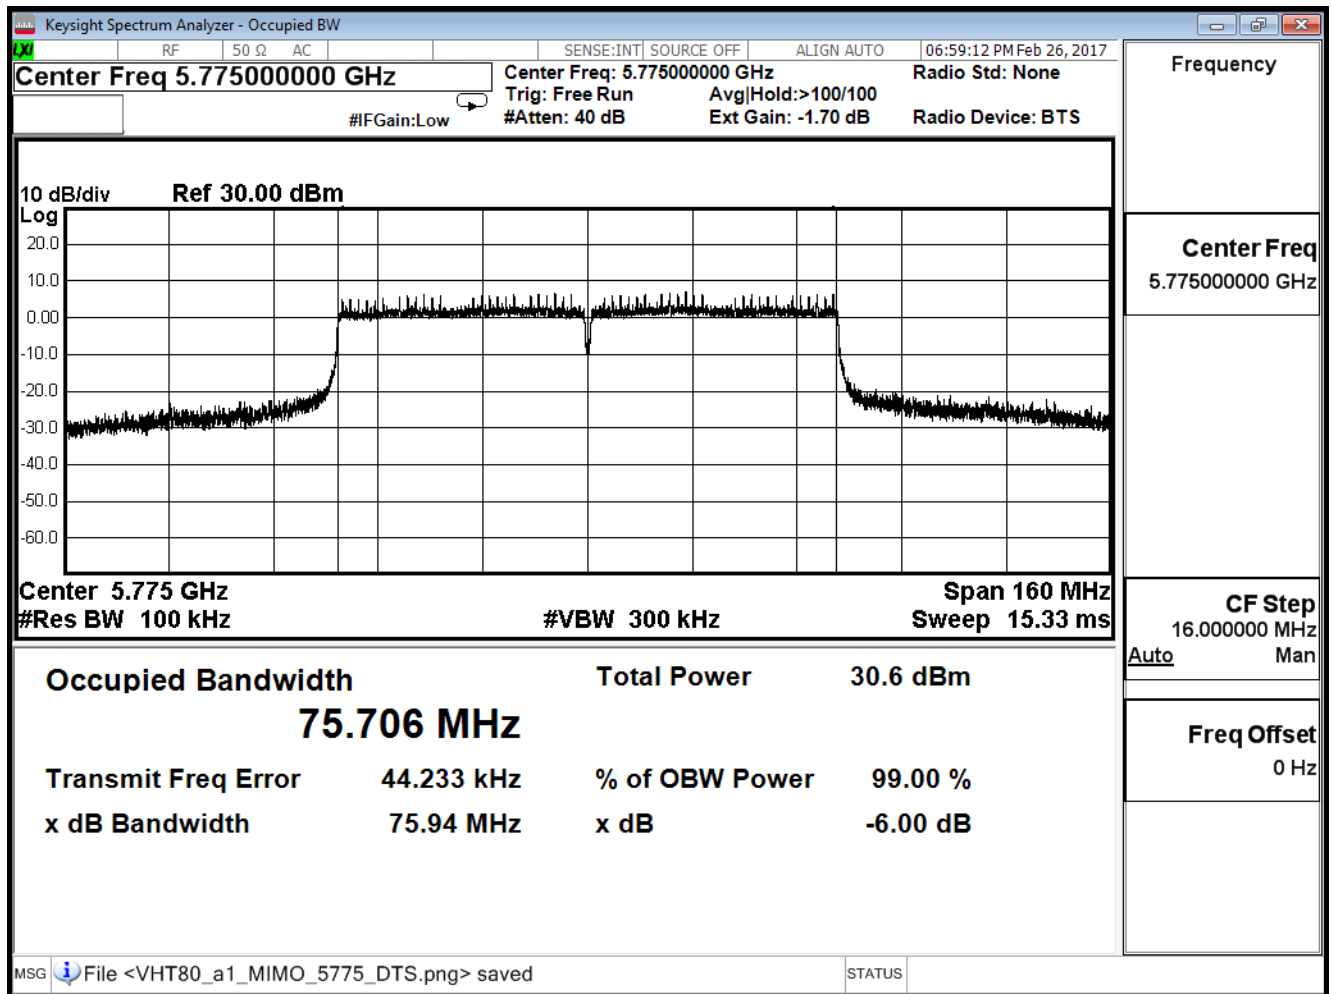

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Tx_ADP: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/02/26	Test Site	SR10-H

802.11ac_80M(ANT 3)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
155	5775	76.310	≥ 0.5	Pass

Channel 155 (5775MHz)

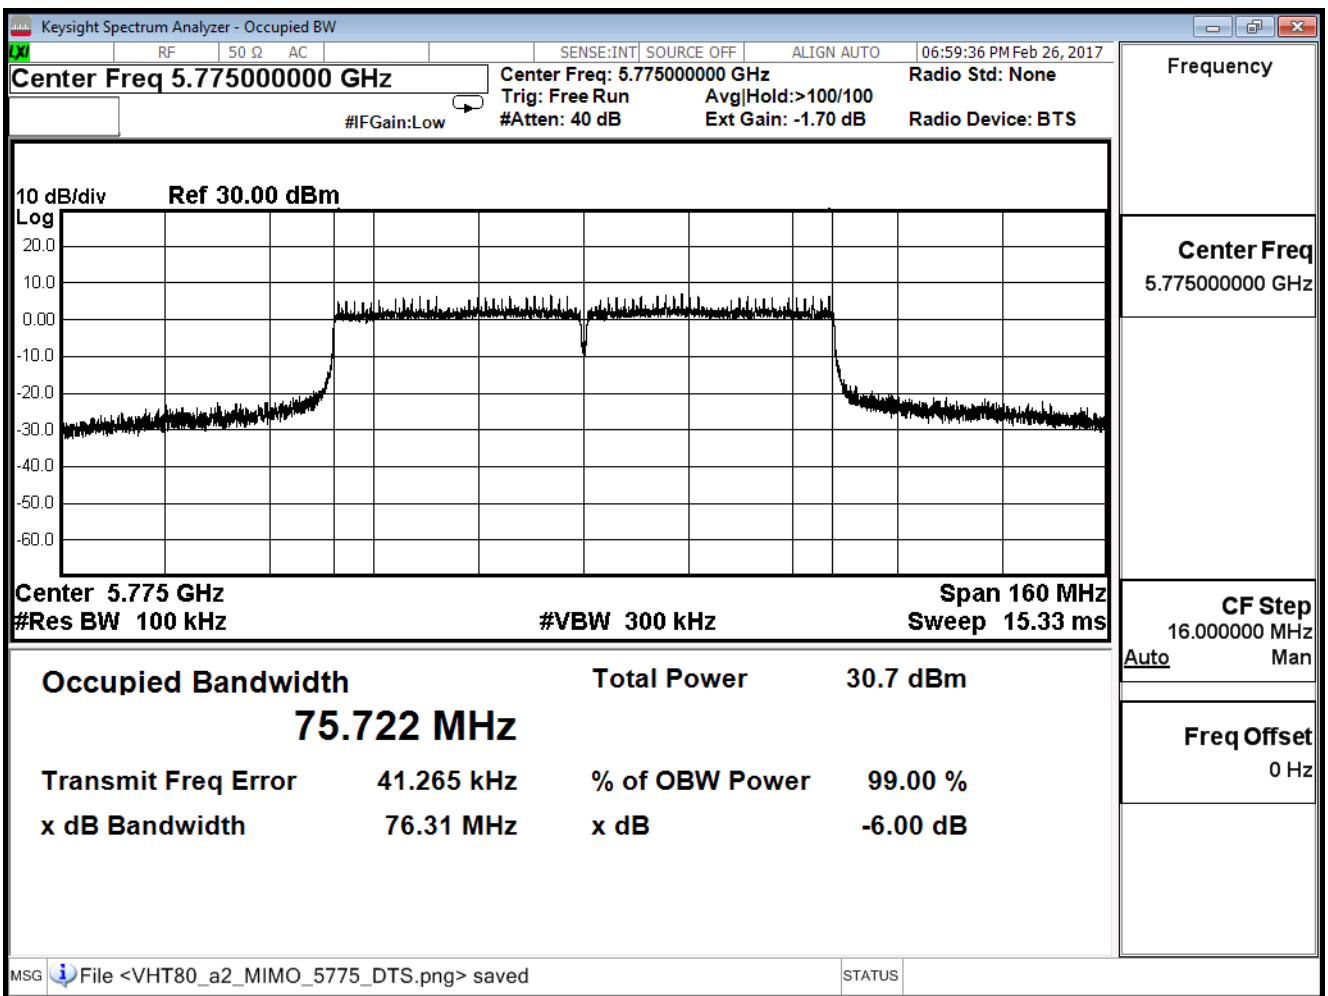

4. Peak Transmit Output

4.1. Test Equipment


The following test equipments are used during the radiated emission tests:

Peak Transmit Output / SR10-H

Instrument	Manufacturer	Model No.	Serial No	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	US47140172	2017/08/08

Note: All equipments that need to calibrate are with calibration period of 1 year.

4.2. Test Setup

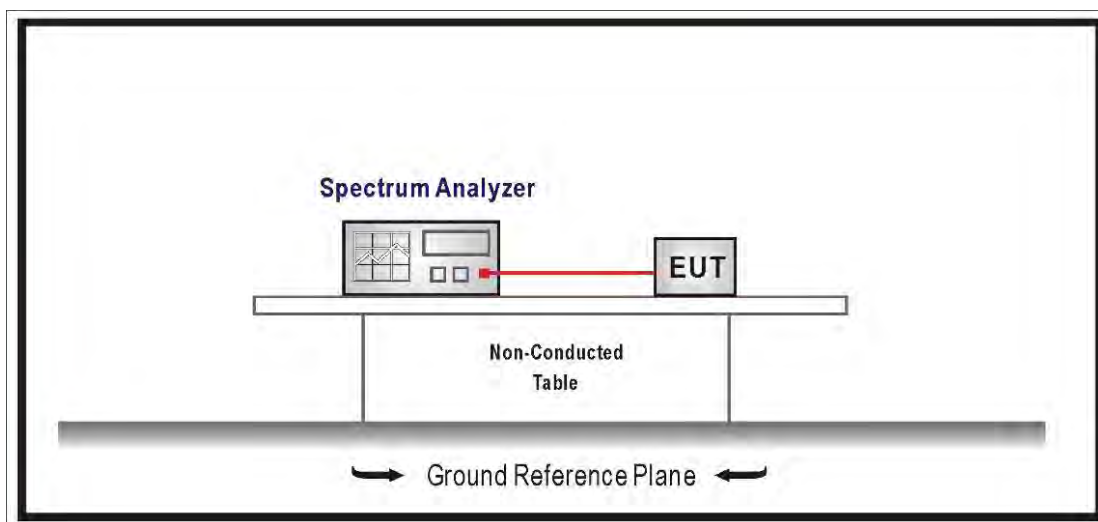

4.3. Limits

1. For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 1W. If transmitting antenna of directional gain greater than 6 dBi are used, the peak transmit power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
2. For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. The maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250 mW. If transmitting antenna of directional gain greater than 6 dBi are used, the peak transmit power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
4. For the band 5.725-5.850 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 1W. If transmitting antenna of directional gain greater than 6 dBi are used, the peak transmit power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.

4.4. Test Procedure

The EUT was setup to ANSI C63.10: 2013; tested to U-NII test procedure of 789033 D02 V01R02 for compliance to FCC 47CFR Subpart E requirements. The Method SA-1 of the Maximum conducted output power was used.

Set RBW=1MHz, VBW=3MHz with RMS detector and trace average 100 traces in power averaging mode. Set span to encompass the entire emission bandwidth (EBW) of the signal. Compute power by integrating the spectrum across the 26 dB EBW of the signal.

4.5. Uncertainty

The measurement uncertainty is defined as ± 1.27 dB

4.6. Test Result

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Tx_AD P: AD890326010-2LF_ CDD Mode (802.11 a)		
Date of Test	2017/03/02	Test Site	SR10-H


802.11a (ANT 0)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	19.710	≤30
44	5220	21.540	≤30
48	5240	21.810	≤30


The worst emission of data rate is 6 Mbps.

Peak Power Output (dBm)									
Channel No	Frequency (MHz)	Data Rate							Required Limit
		6	12	18	24	36	48	54	
36	5180	19.710	--	--	--	--	--	--	≤30dBm
44	5220	21.540	21.500	21.480	21.400	21.320	21.280	21.200	
48	5240	21.810	--	--	--	--	--	--	


Peak transmit Power - Channel 36

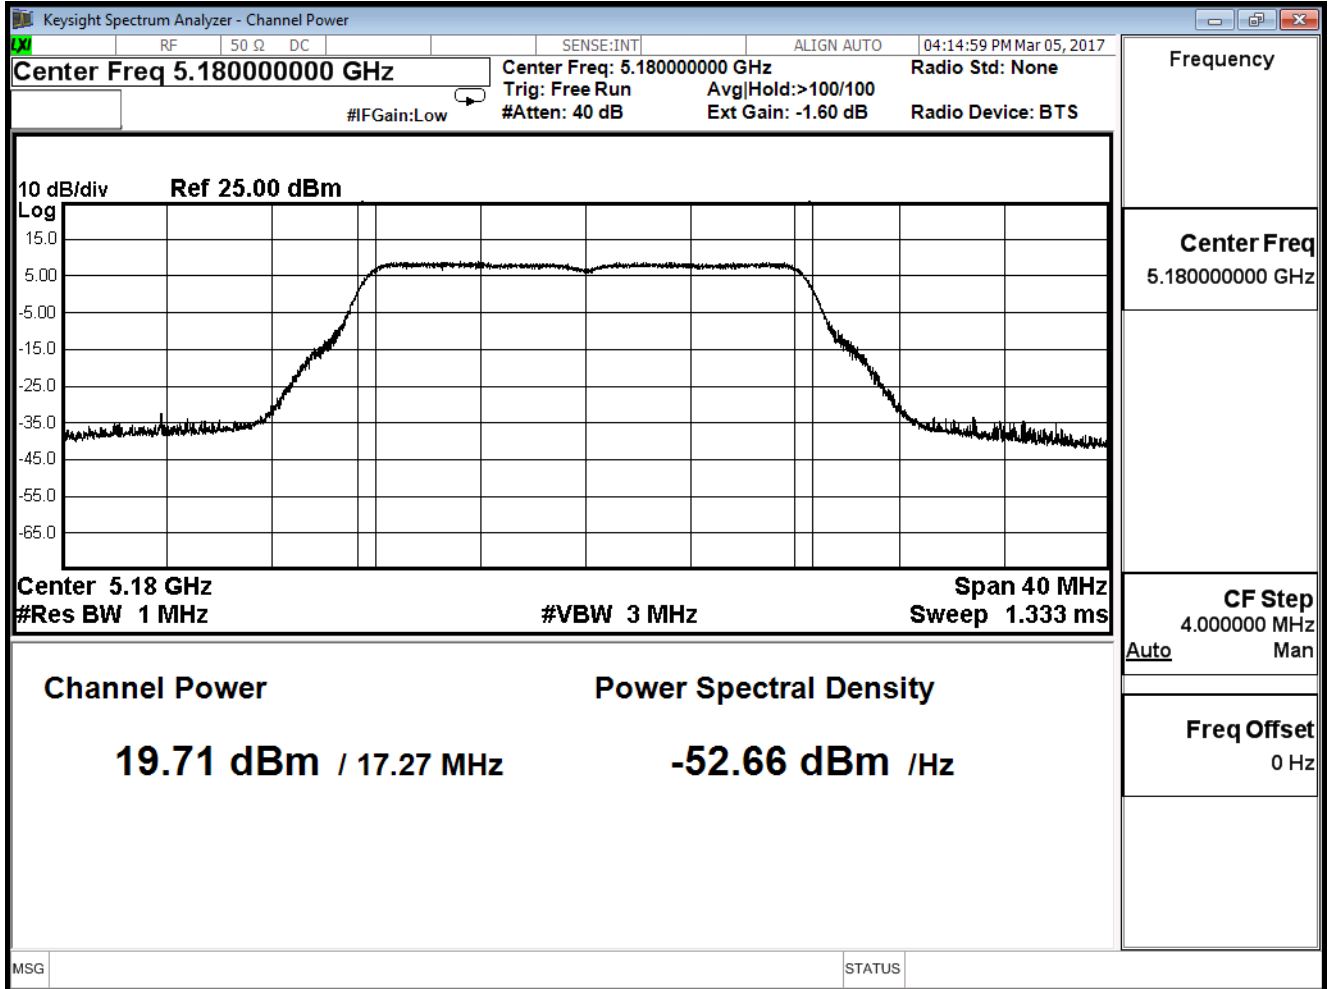

Peak transmit Power - Channel 44

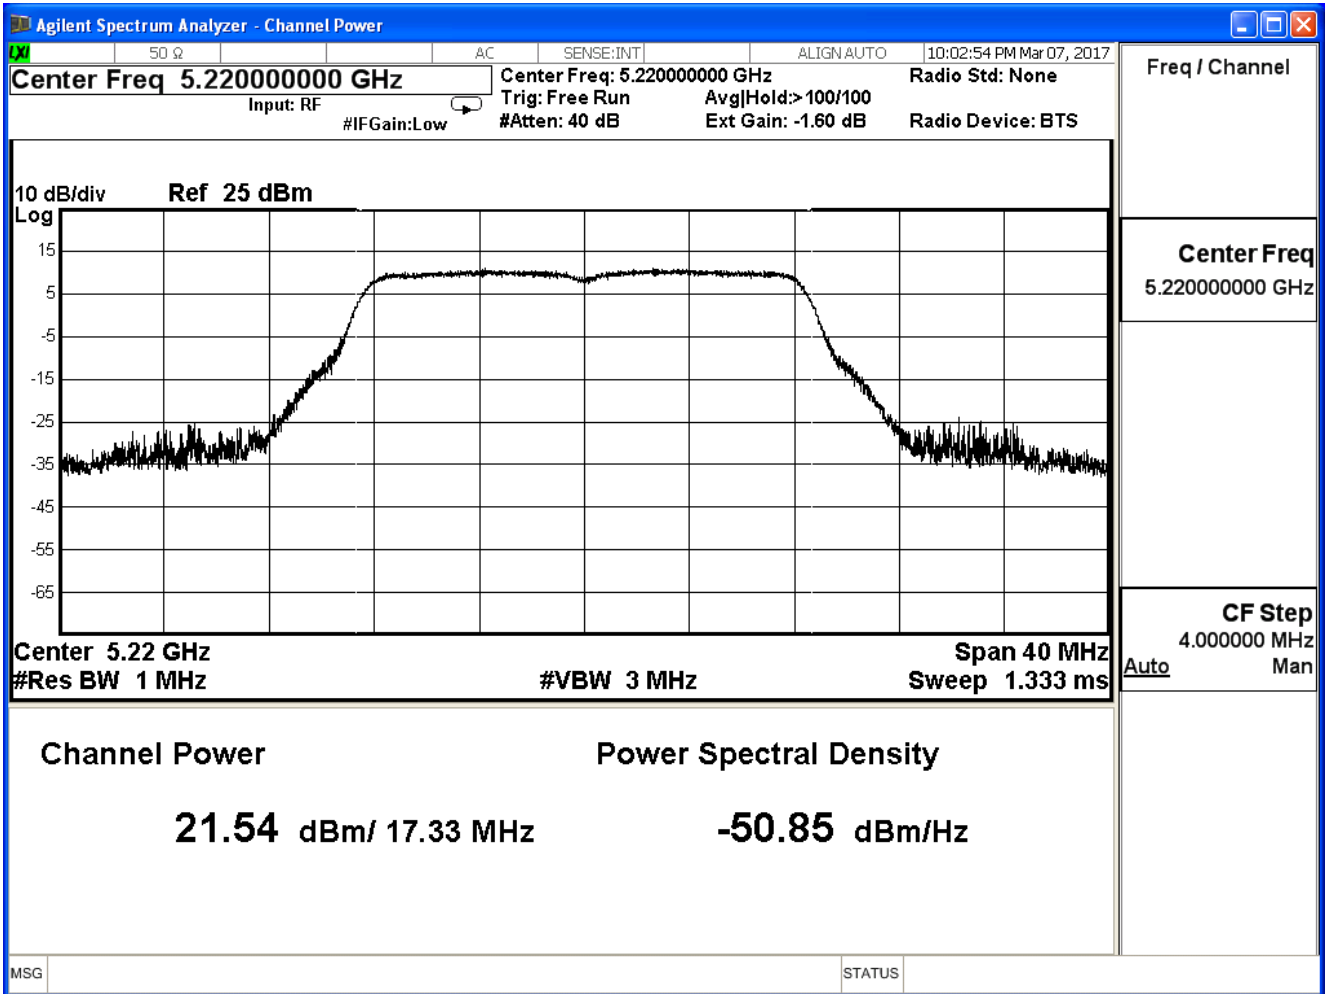

Peak transmit Power - Channel 48

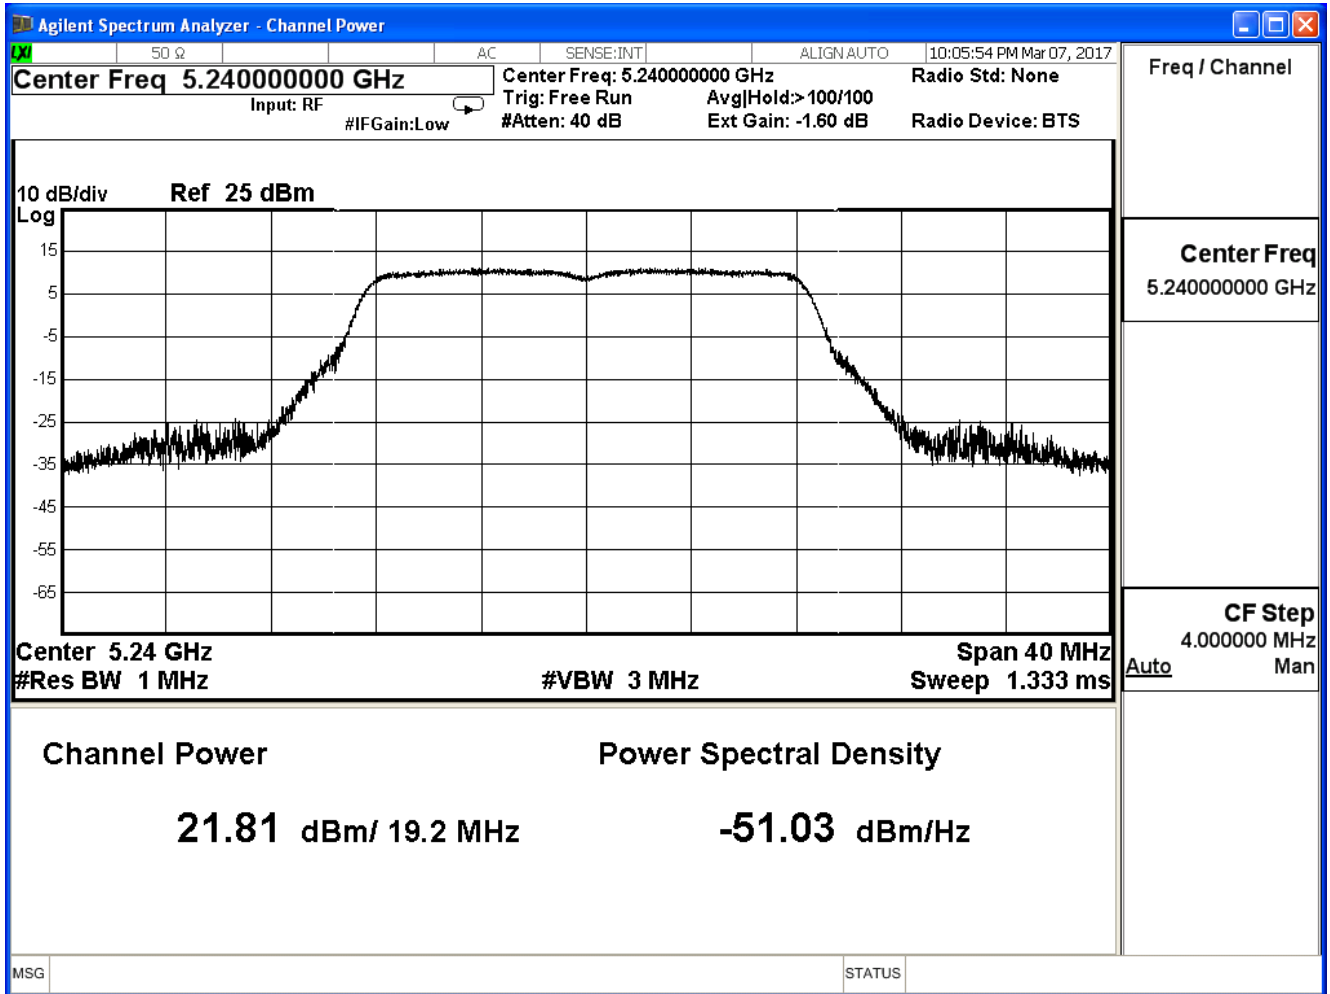

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Tx_ADP: AD890326010-2LF_ CDD Mode (802.11 a)		
Date of Test	2017/03/02	Test Site	SR10-H


802.11a (ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	19.600	≤30
44	5220	21.580	≤30
48	5240	21.830	≤30


The worst emission of data rate is 6 Mbps.

Peak Power Output (dBm)									
Channel No	Frequency (MHz)	Data Rate							Required Limit
		6	12	18	24	36	48	54	
36	5180	19.600	--	--	--	--	--	--	≤30dBm
44	5220	21.580	21.500	21.380	21.300	21.210	21.180	21.100	
48	5240	21.830	--	--	--	--	--	--	


Peak transmit Power - Channel 36

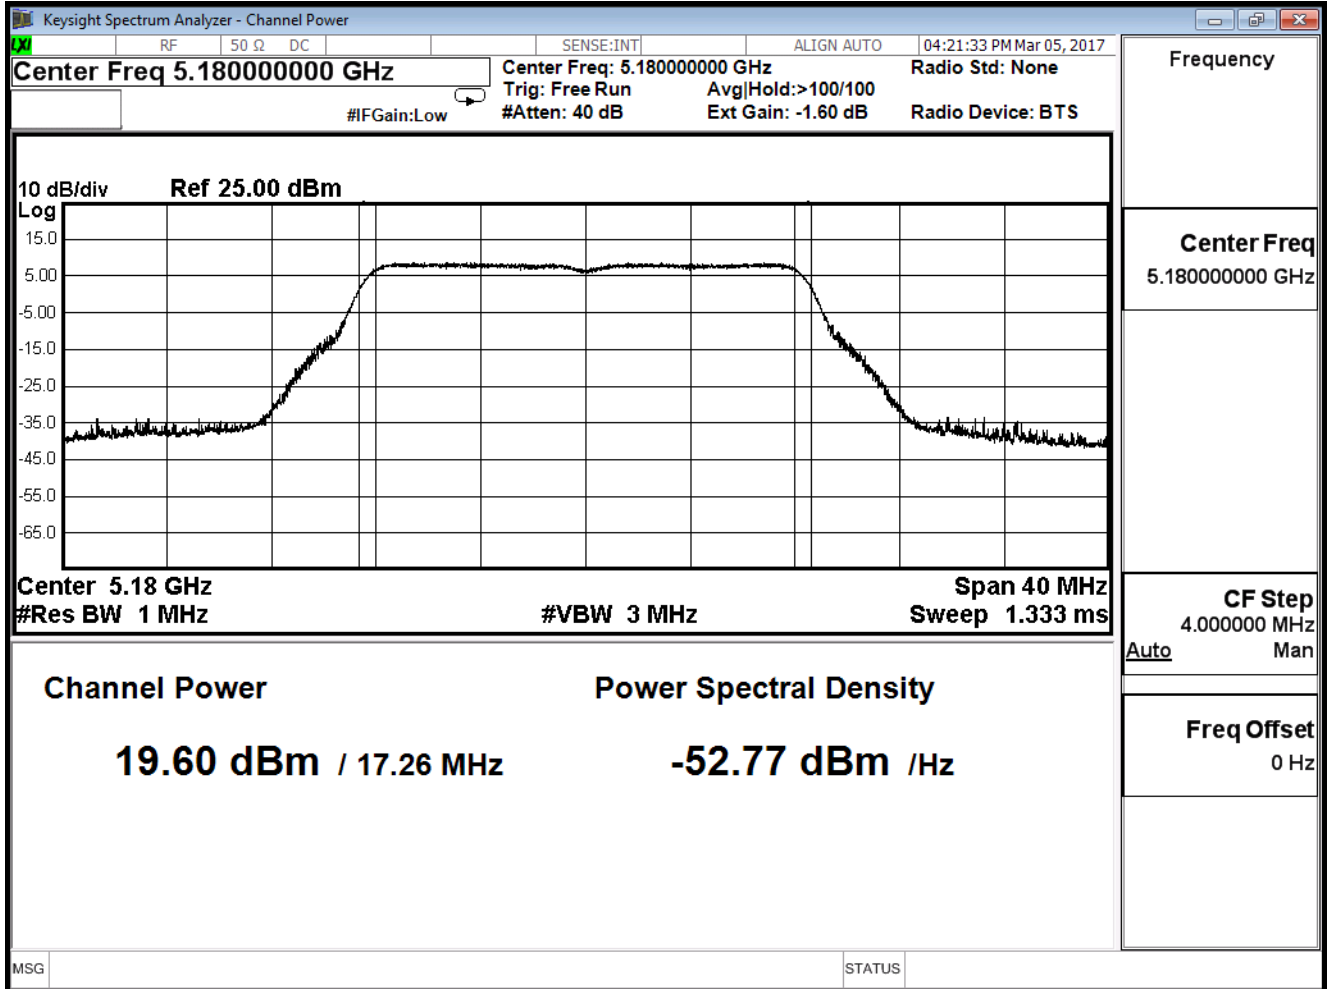

Peak transmit Power - Channel 44

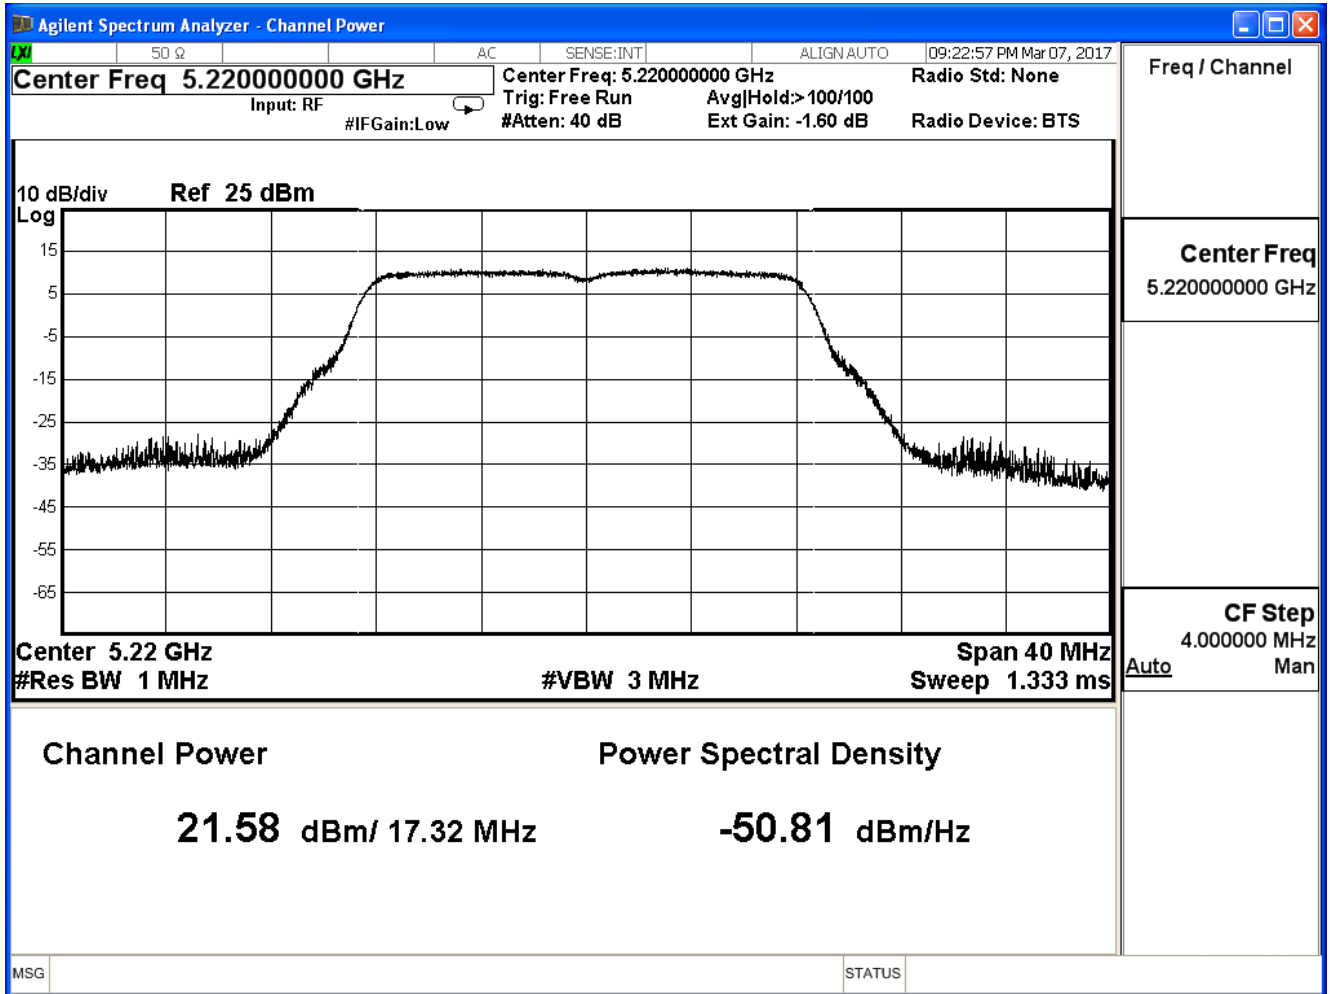

Peak transmit Power - Channel 48

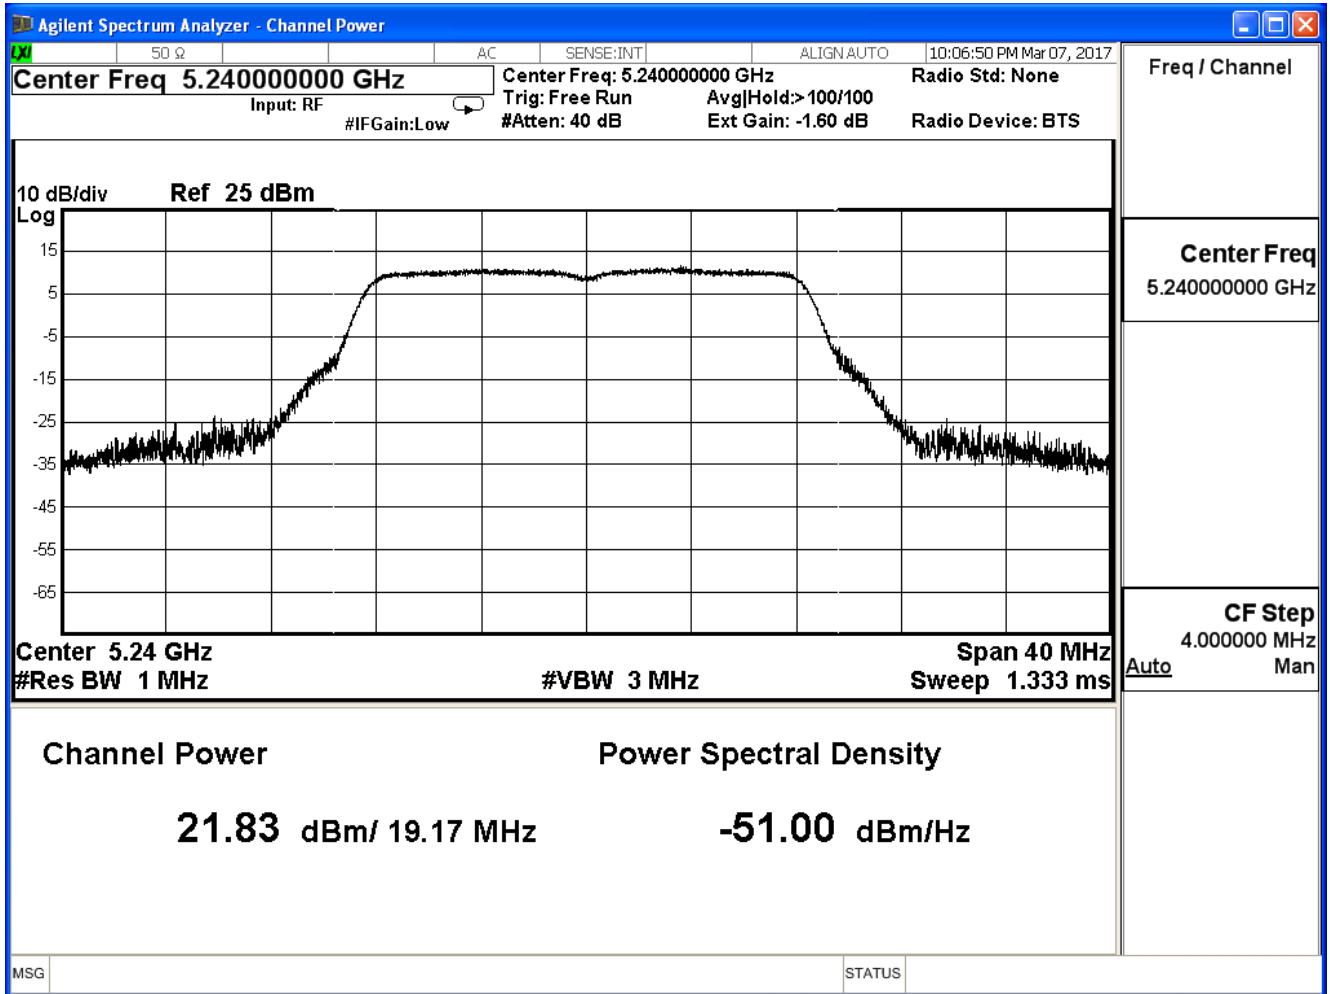

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Tx_AD P: AD890326010-2LF_ CDD Mode (802.11 a)		
Date of Test	2017/03/02	Test Site	SR10-H


802.11a (ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	19.610	≤30
44	5220	21.520	≤30
48	5240	21.800	≤30


The worst emission of data rate is 6 Mbps.

Peak Power Output (dBm)									
Channel No	Frequency (MHz)	Data Rate							Required Limit
		6	12	18	24	36	48	54	
36	5180	19.610	--	--	--	--	--	--	≤30dBm
44	5220	21.520	21.440	21.320	21.280	21.200	21.170	21.110	
48	5240	21.800	--	--	--	--	--	--	


Peak transmit Power - Channel 36

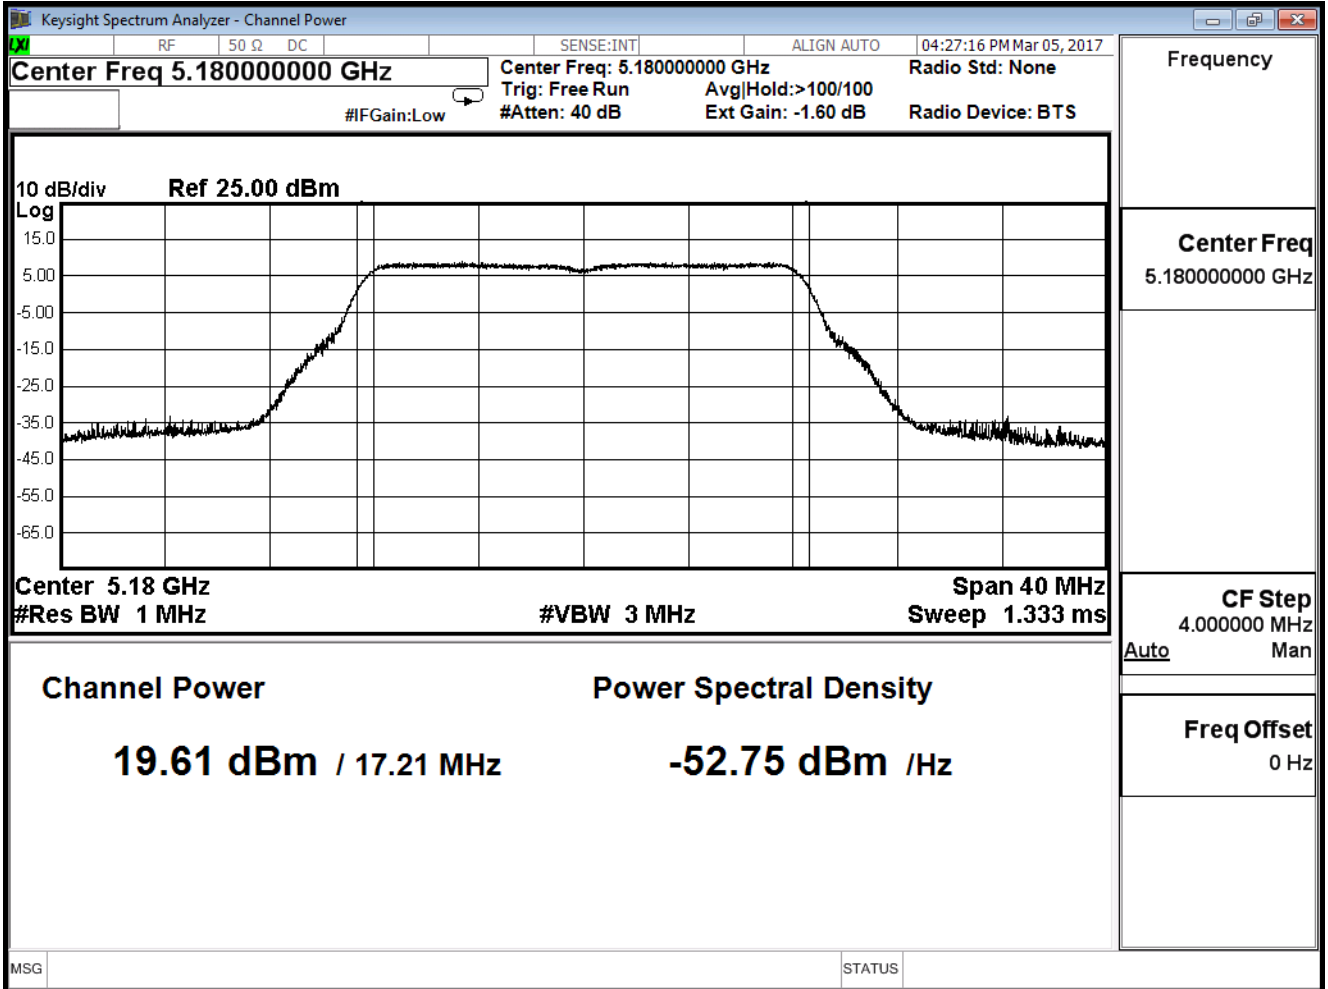

Peak transmit Power - Channel 44

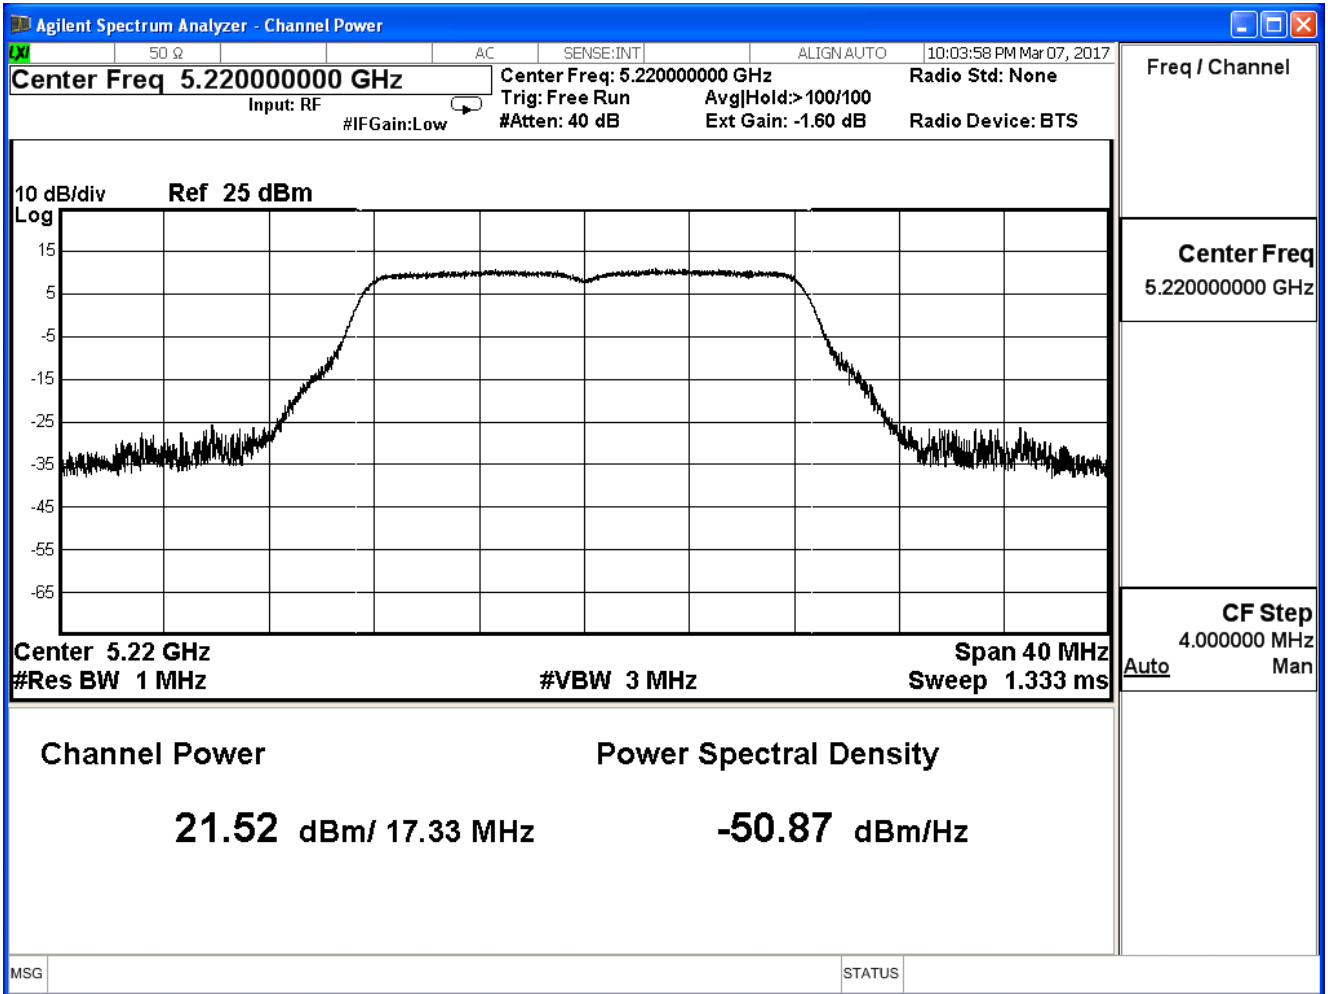

Peak transmit Power - Channel 48

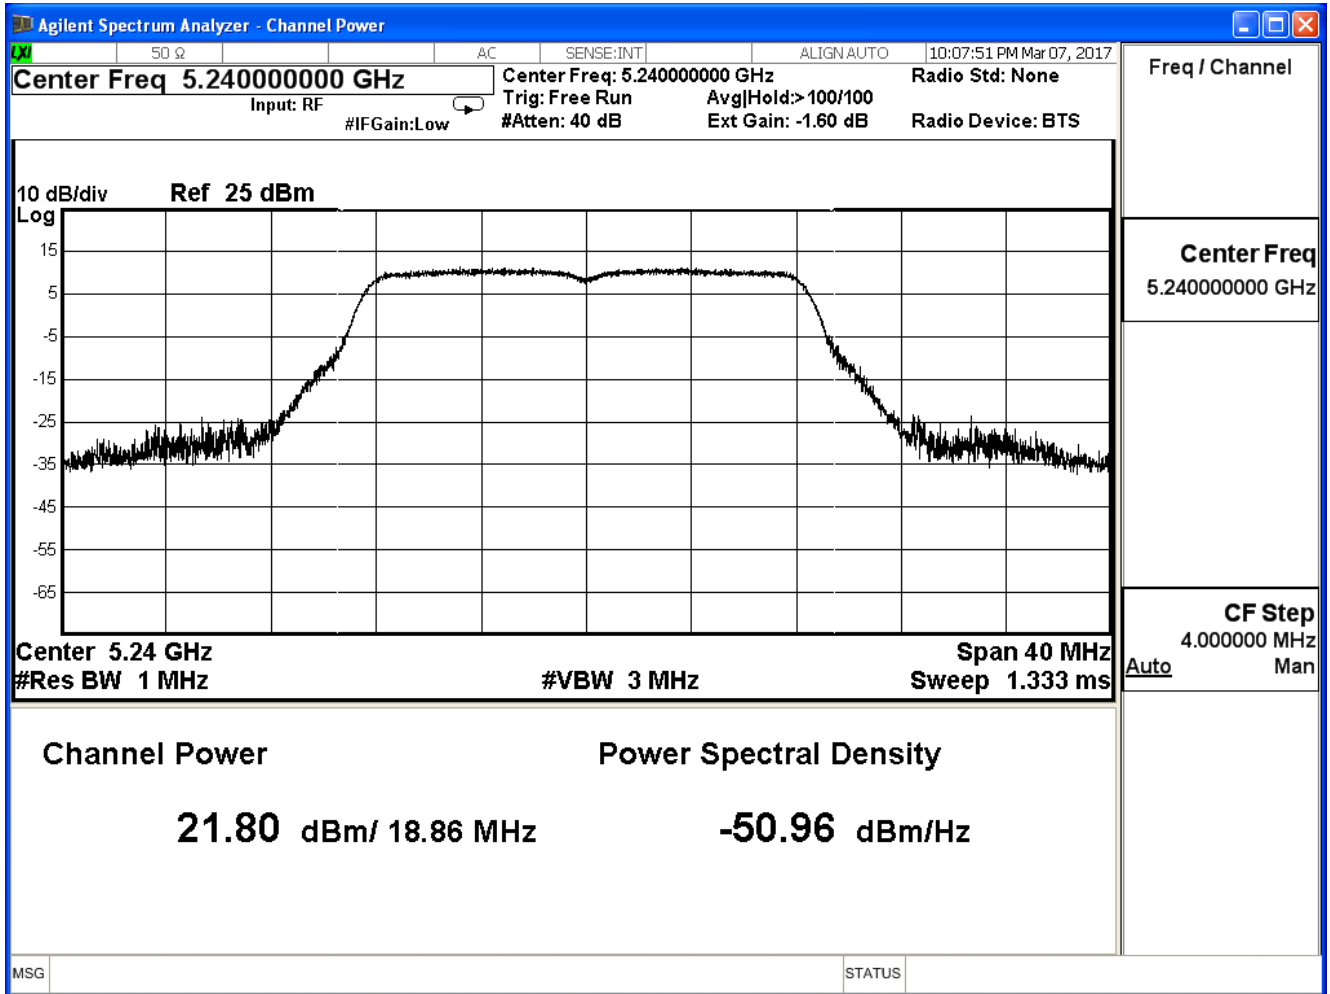

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Tx_ADP: AD890326010-2LF_ CDD Mode (802.11 a)		
Date of Test	2017/03/02	Test Site	SR10-H


802.11a (ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	19.630	≤30
44	5220	21.570	≤30
48	5240	21.850	≤30


The worst emission of data rate is 6 Mbps.

Peak Power Output (dBm)									
Channel No	Frequency (MHz)	Data Rate							Required Limit
		6	12	18	24	36	48	54	
36	5180	19.630	--	--	--	--	--	--	≤30dBm
44	5220	21.570	21.500	21.420	21.320	21.270	21.680	21.600	
48	5240	21.850	--	--	--	--	--	--	


Peak transmit Power - Channel 36

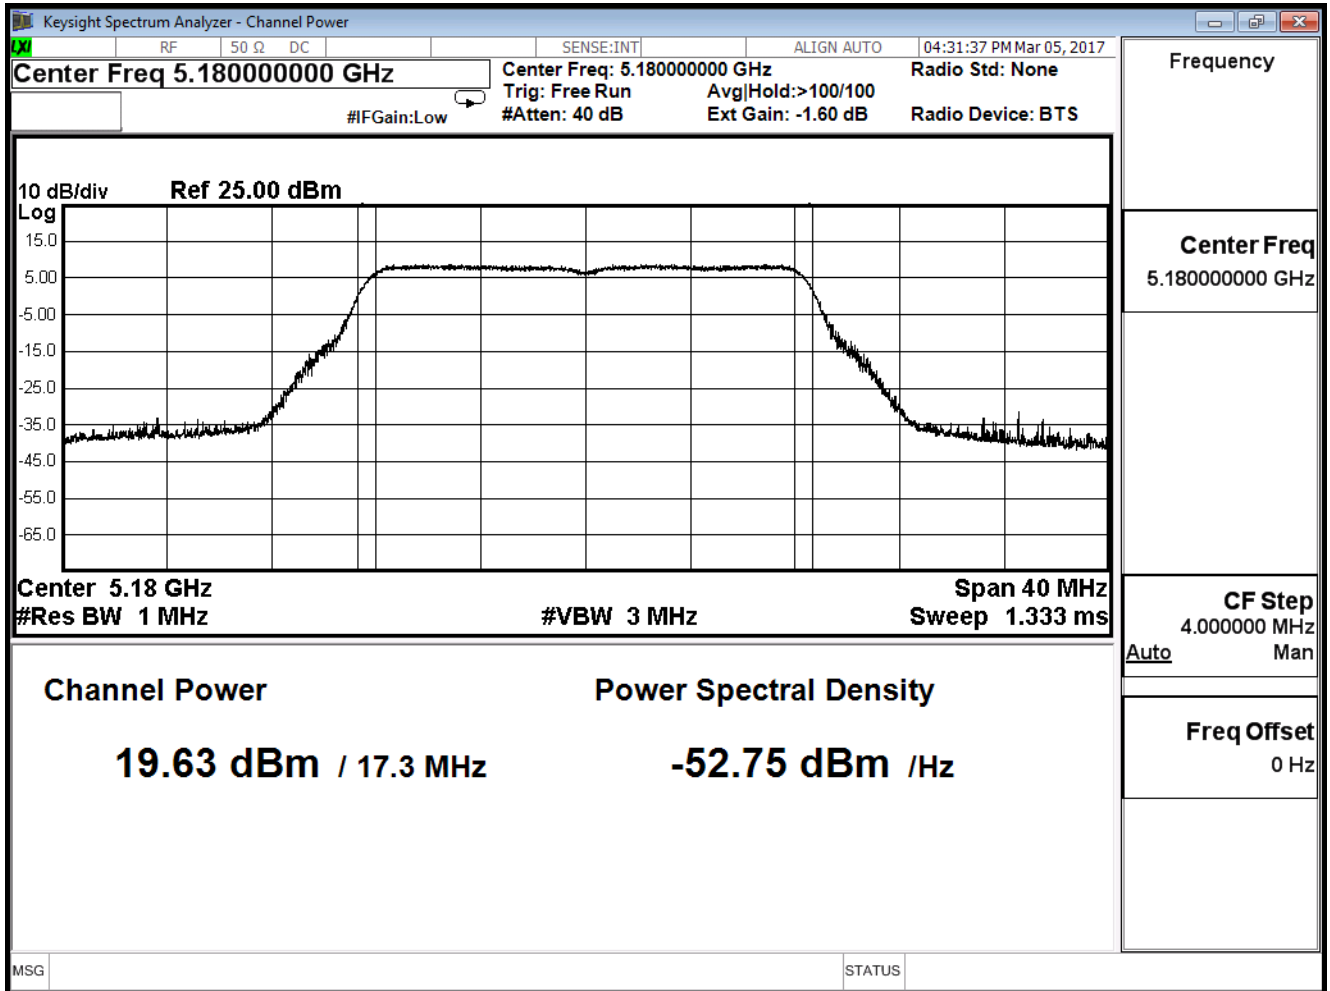

Peak transmit Power - Channel 44

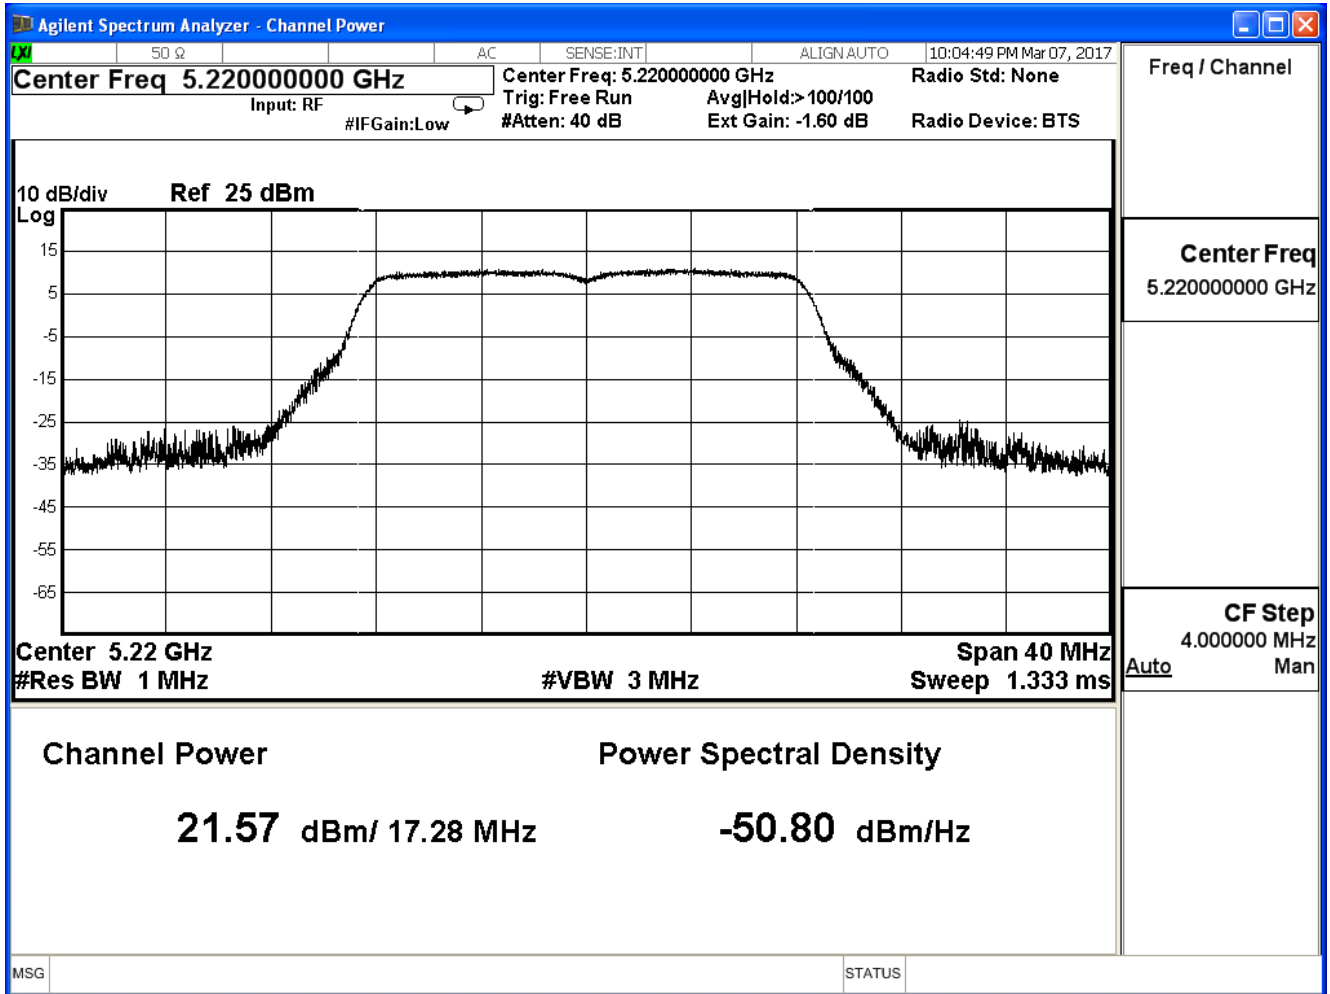

Peak transmit Power - Channel 48

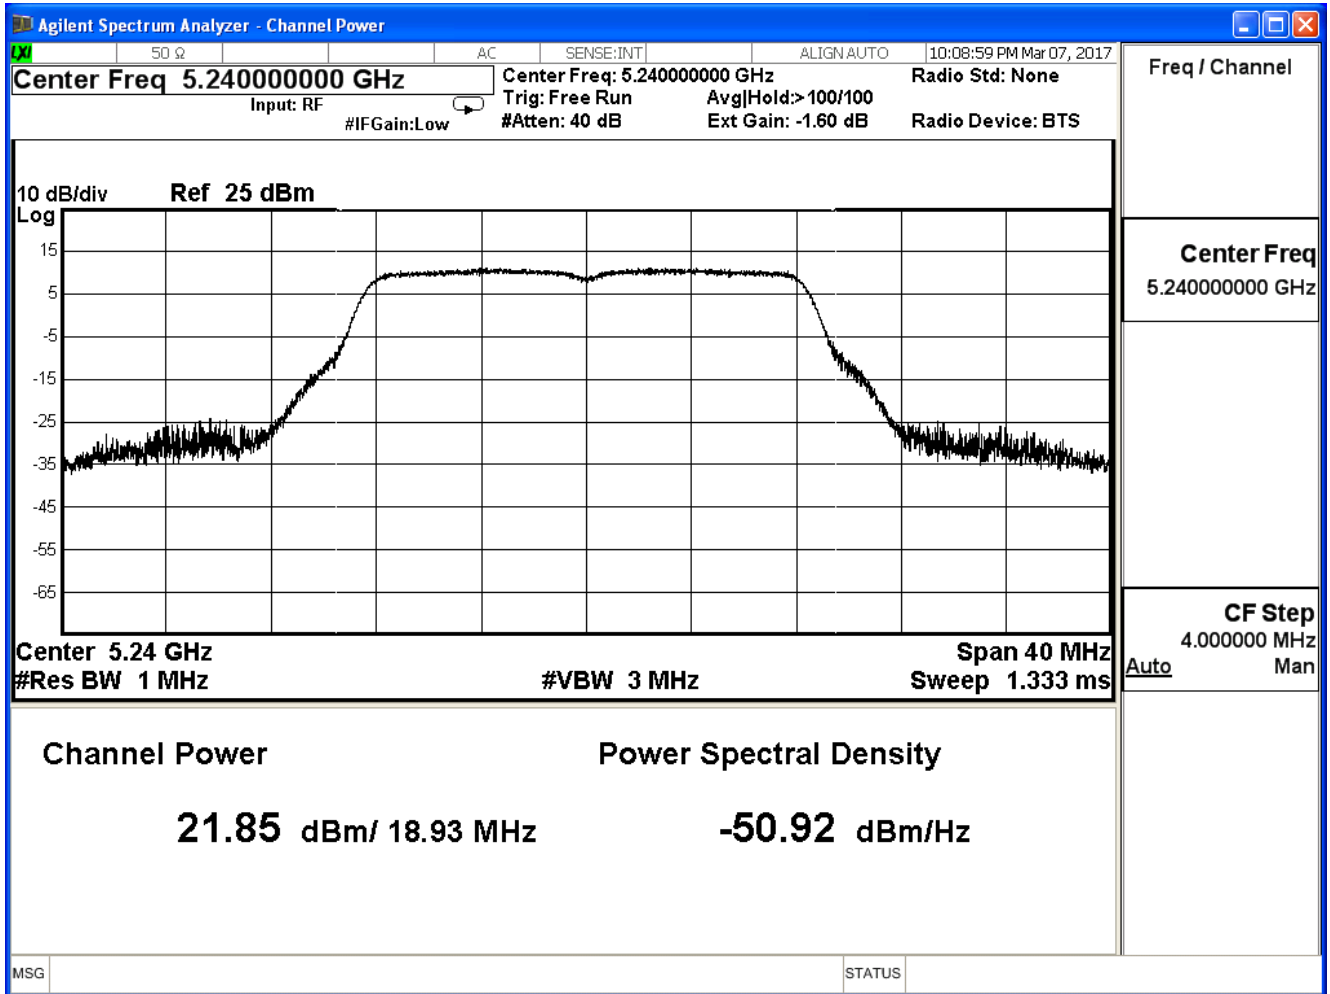

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Tx_AD P: AD890326010-2LF_ CDD Mode (802.11 a)		
Date of Test	2017/03/02	Test Site	SR10-H

802.11a (ANT 0+1+2+3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	25.658	≤30
44	5220	27.573	≤30
48	5240	27.843	≤30

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H


IEEE 802.11n(20MHz)(ANT 0)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	19.270	≤30
44	5220	21.730	≤30
48	5240	22.020	≤30


The worst emission of data rate is MCS24.

Channel No	Frequency (MHz)	MCS Index								Required Limit
		24	25	26	27	28	29	30	31	
36	5180	19.270	--	--	--	--	--	--	--	≤30dBm
44	5220	21.730	21.680	21.600	21.550	21.500	21.420	21.330	21.280	
48	5240	22.020	--	--	--	--	--	--	--	


Peak transmit Power - Channel 36

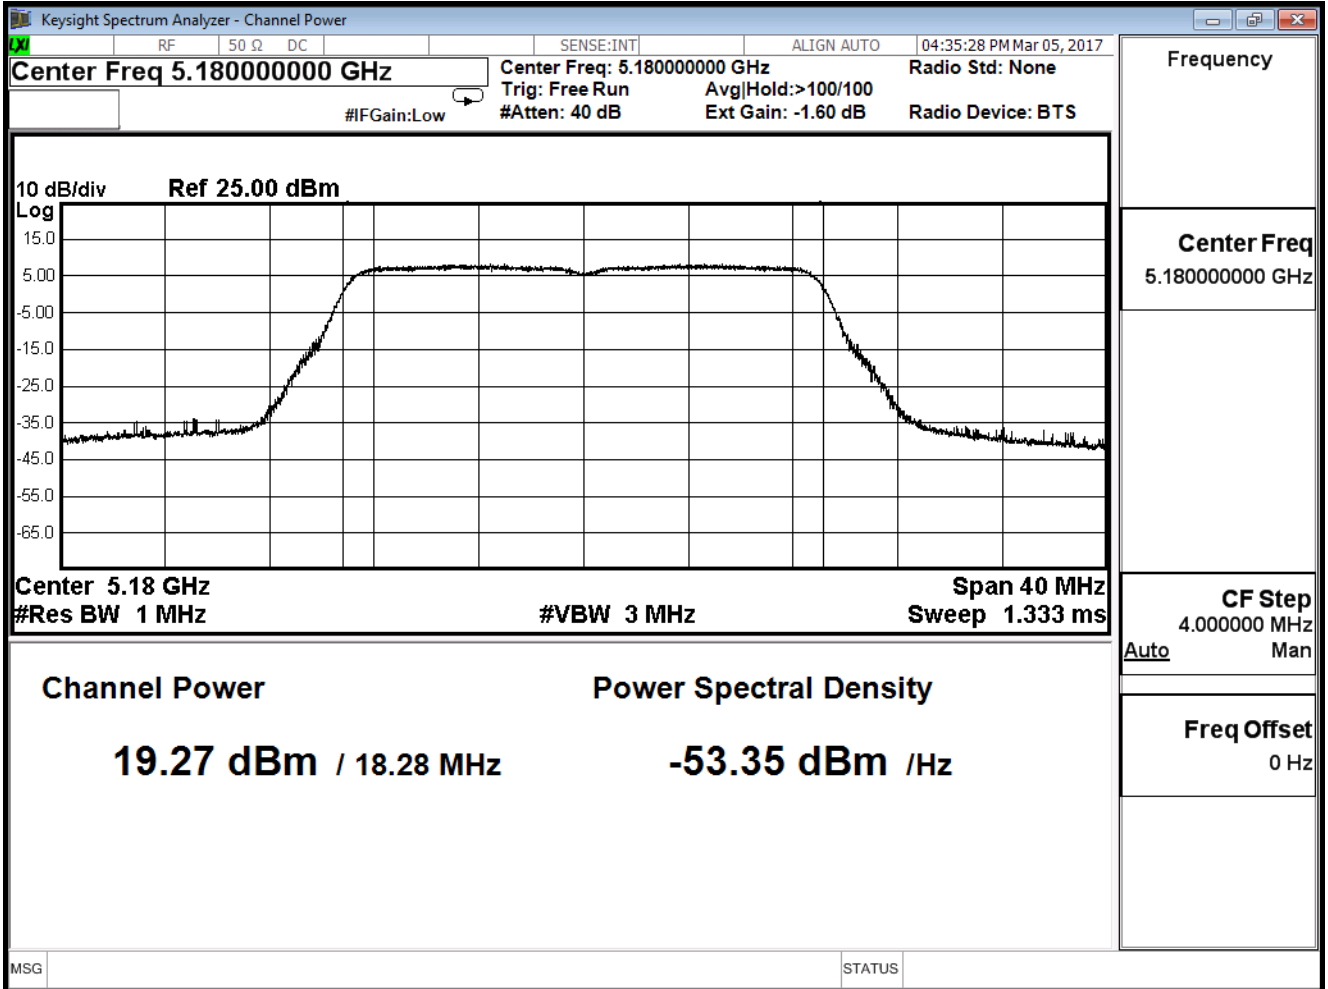

Peak transmit Power - Channel 44

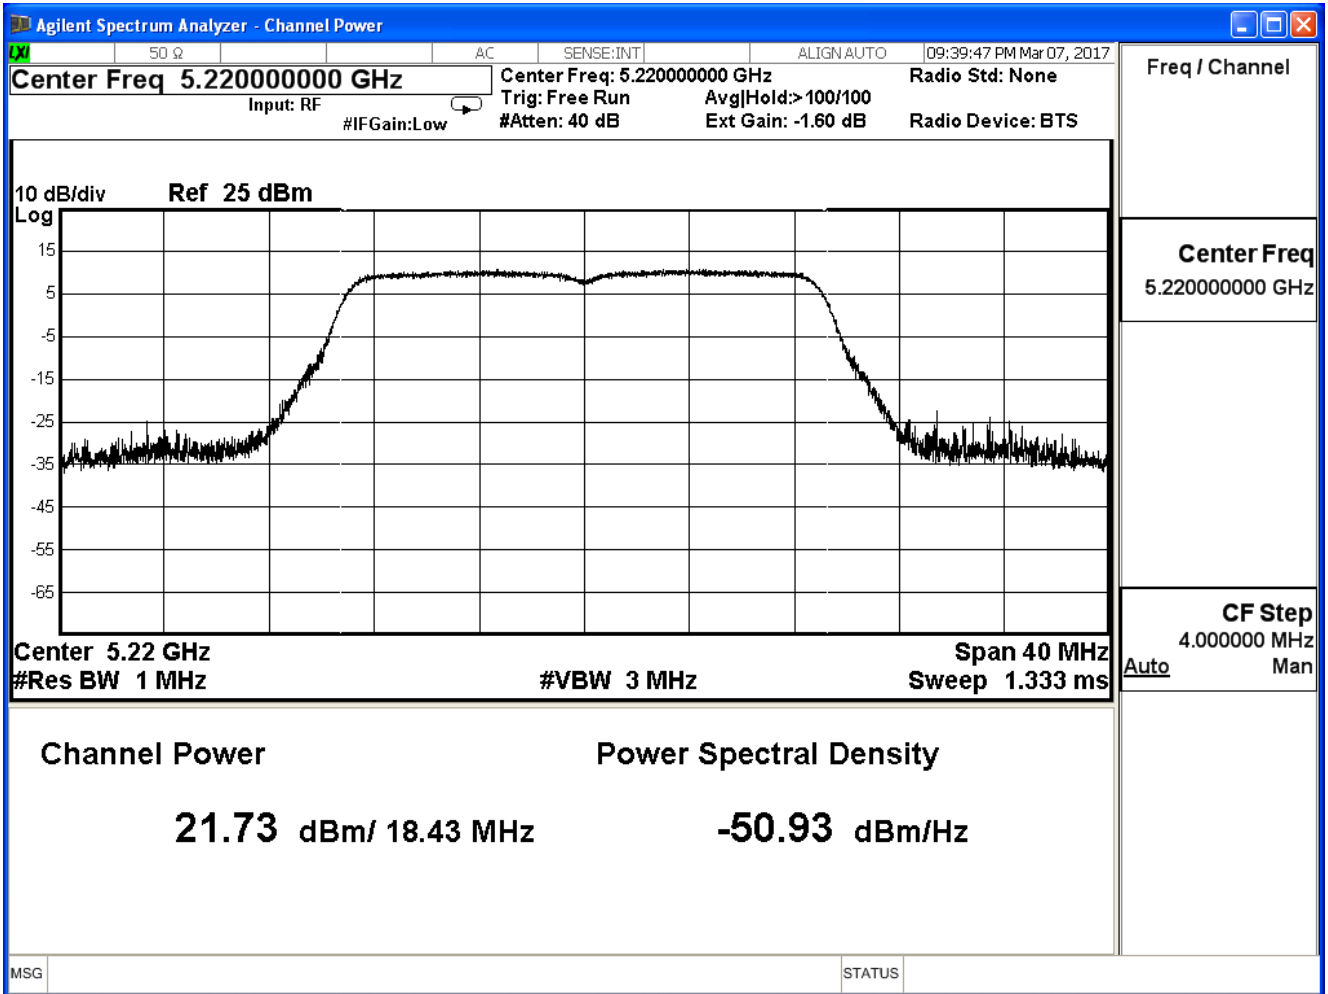

Peak transmit Power - Channel 48

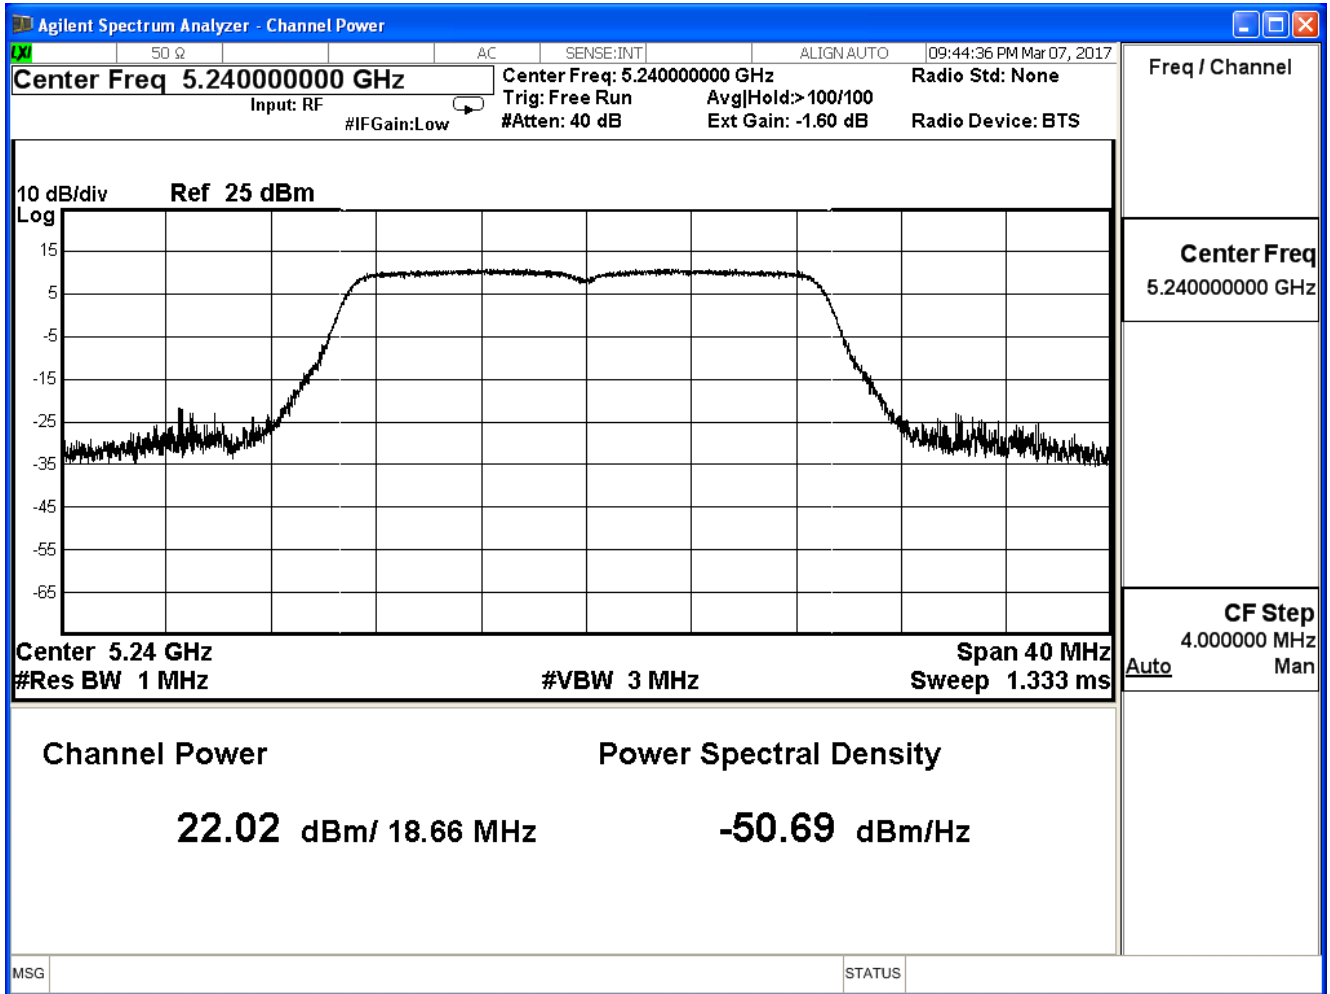

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H


IEEE 802.11n(20MHz)(ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	19.230	≤30
44	5220	21.680	≤30
48	5240	22.050	≤30


The worst emission of data rate is MCS24.

Channel No	Frequency (MHz)	MCS Index								Required Limit
		24	25	26	27	28	29	30	31	
36	5180	19.230	--	--	--	--	--	--	--	≤30dBm
44	5220	21.680	21.600	21.520	21.440	21.370	21.300	21.220	21.160	
48	5240	22.050	--	--	--	--	--	--	--	


Peak transmit Power - Channel 36

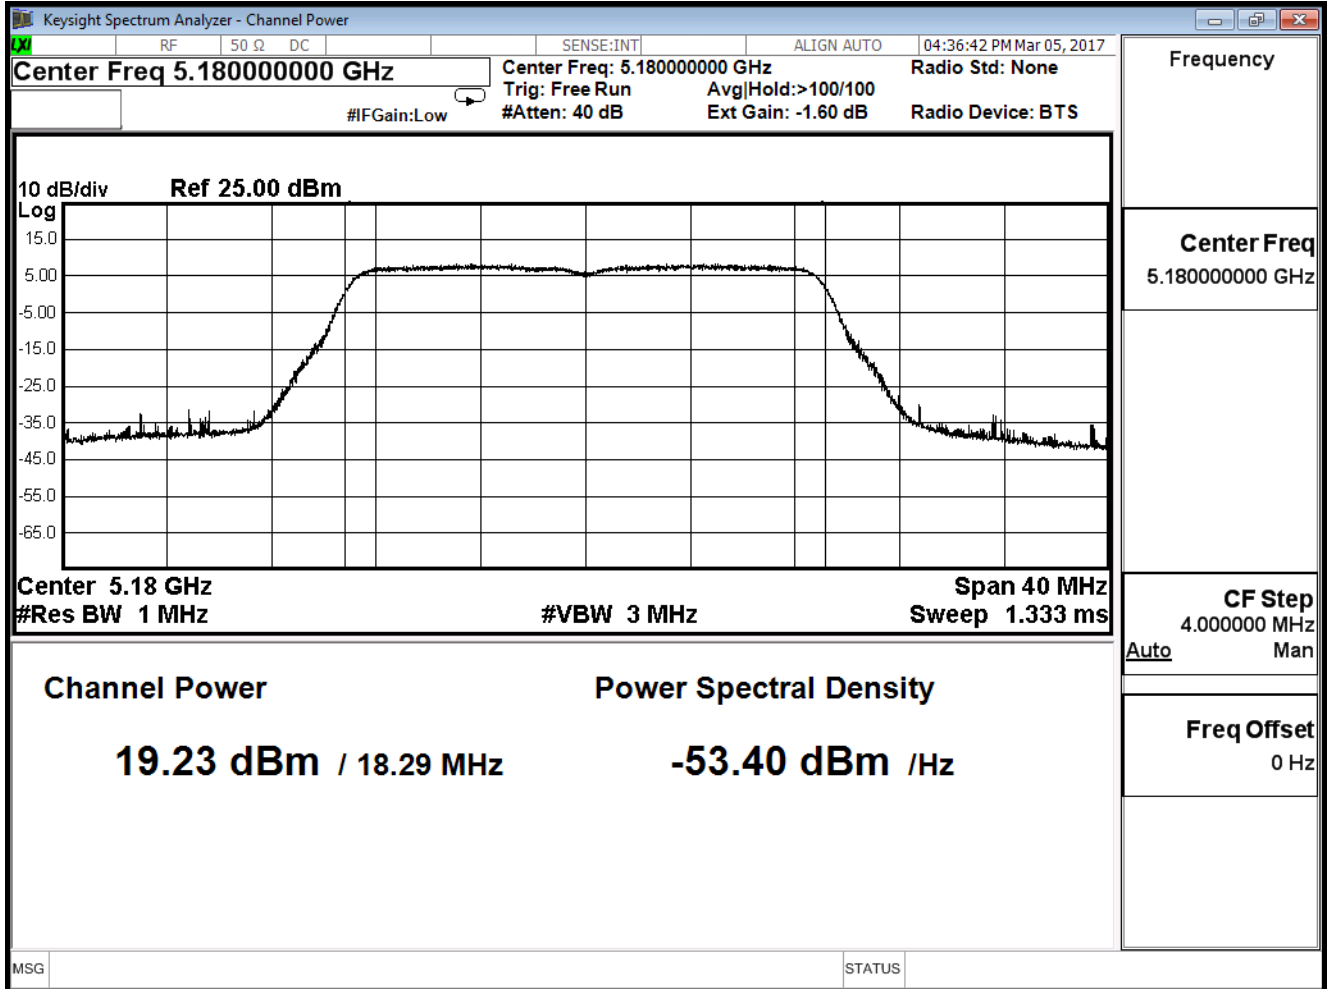

Peak transmit Power - Channel 44

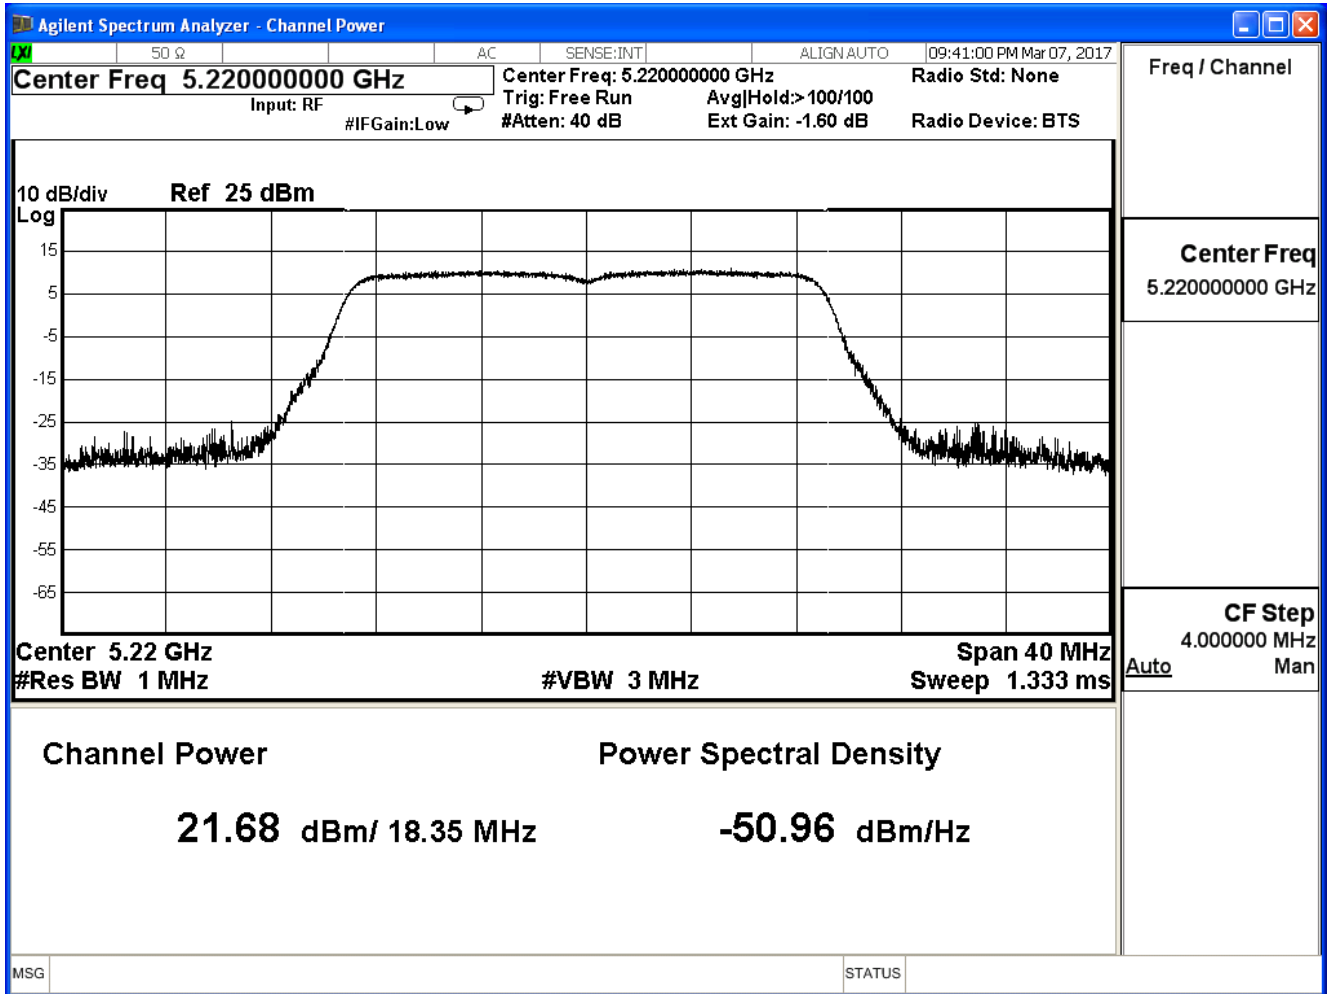

Peak transmit Power - Channel 48

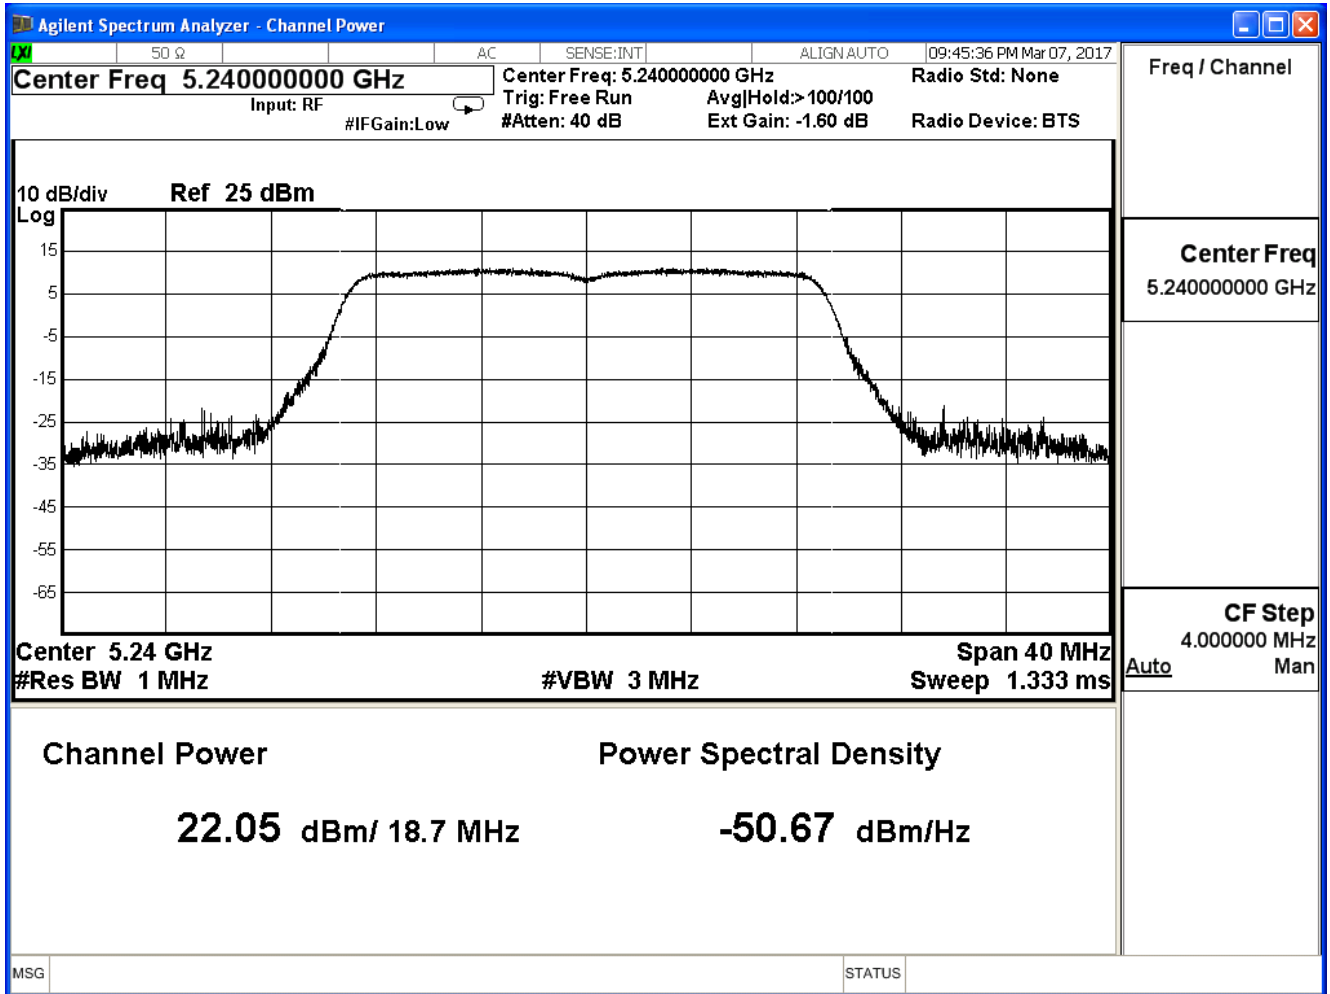

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H


IEEE 802.11n(20MHz)(ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	19.240	≤30
44	5220	21.720	≤30
48	5240	22.040	≤30


The worst emission of data rate is MCS24.

Channel No	Frequency (MHz)	MCS Index								Required Limit
		24	25	26	27	28	29	30	31	
36	5180	19.240	--	--	--	--	--	--	--	≤30dBm
44	5220	21.720	21.660	21.600	21.550	21.480	21.420	21.330	21.240	
48	5240	22.040	--	--	--	--	--	--	--	


Peak transmit Power - Channel 36

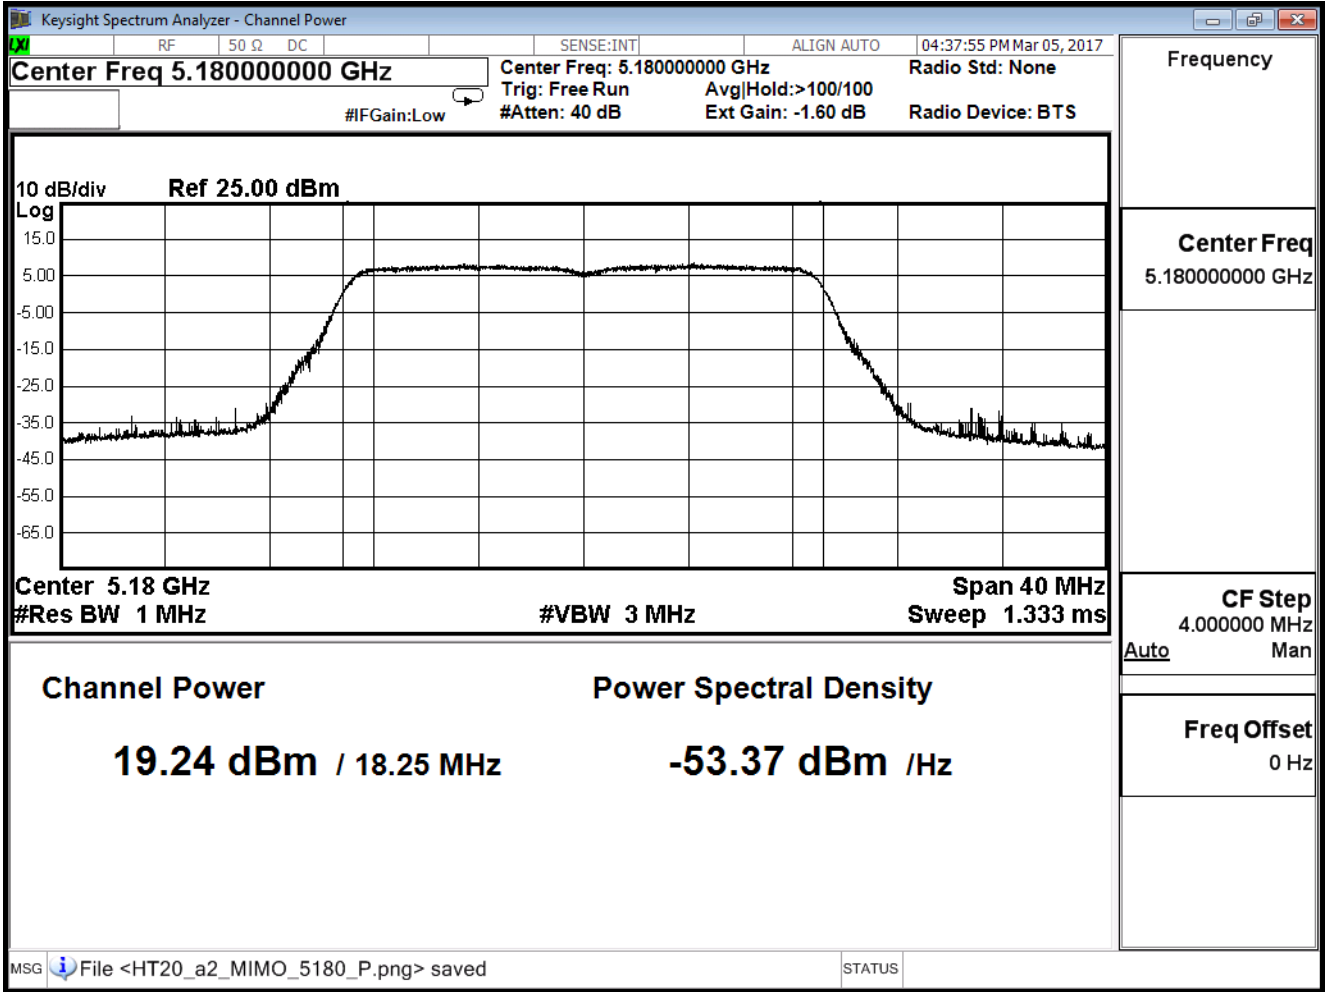

Peak transmit Power - Channel 44

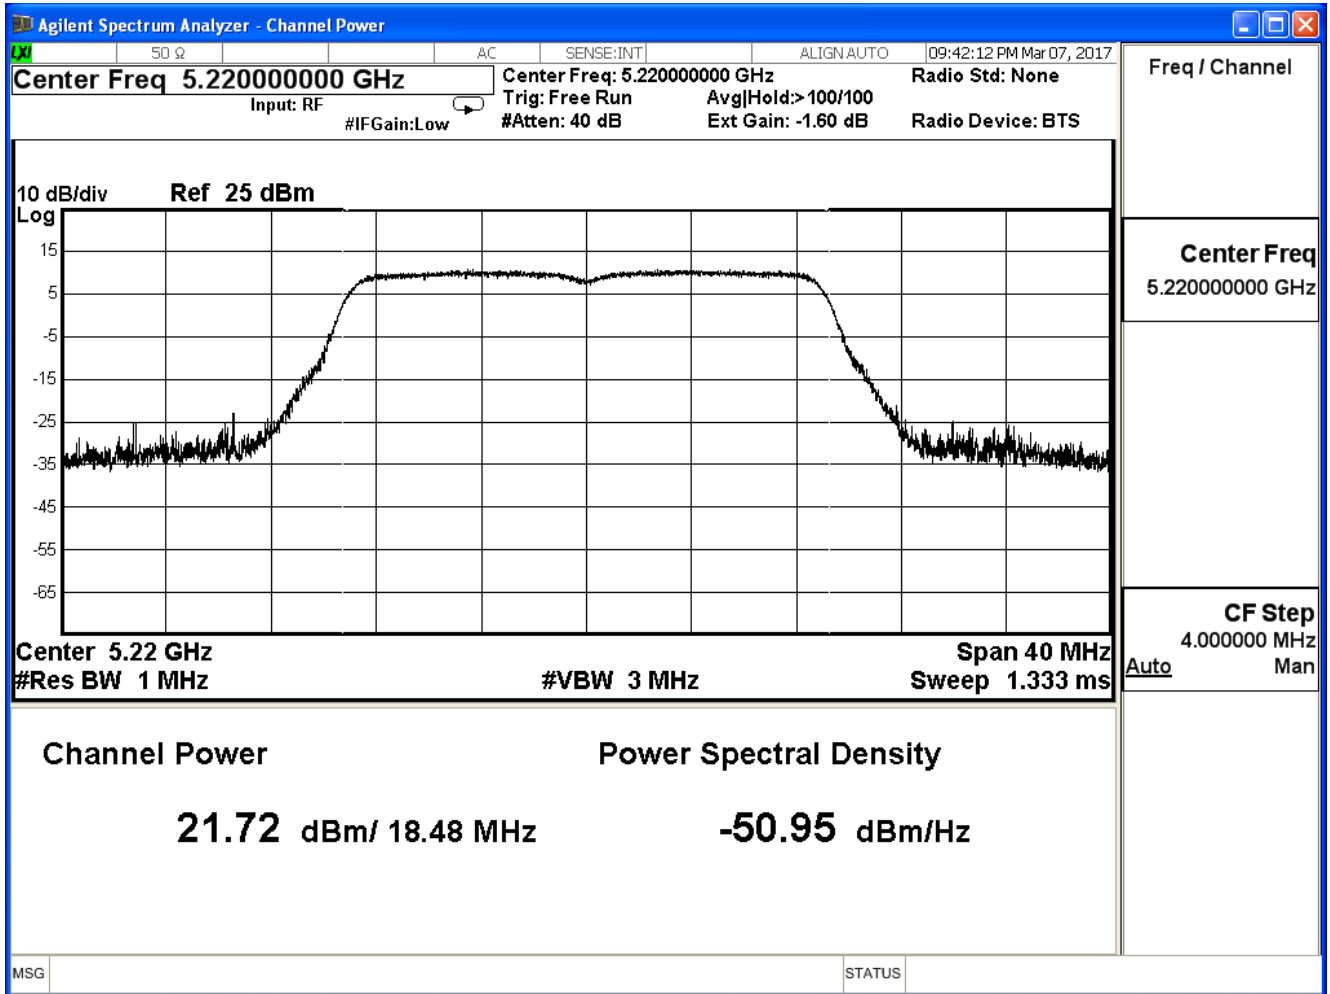

Peak transmit Power - Channel 48

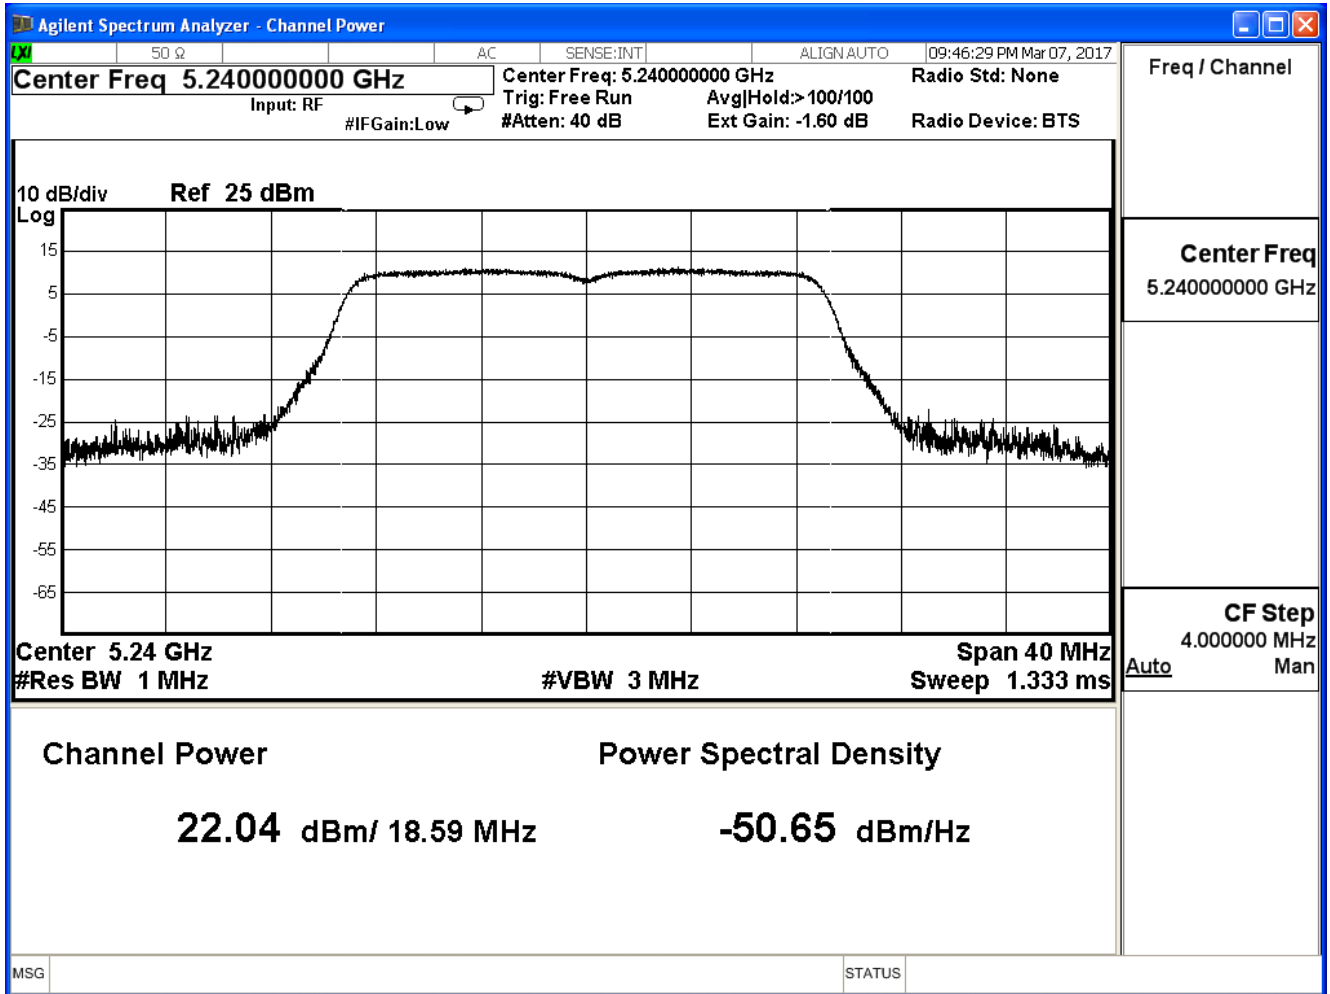

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H


IEEE 802.11n(20MHz)(ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	19.220	≤30
44	5220	21.750	≤30
48	5240	22.010	≤30


The worst emission of data rate is MCS24.

Channel No	Frequency (MHz)	MCS Index								Required Limit
		24	25	26	27	28	29	30	31	
36	5180	19.220	--	--	--	--	--	--	--	≤30dBm
44	5220	21.750	21.700	21.660	21.610	21.540	21.440	21.320	21.260	
48	5240	22.010	--	--	--	--	--	--	--	


Peak transmit Power - Channel 36

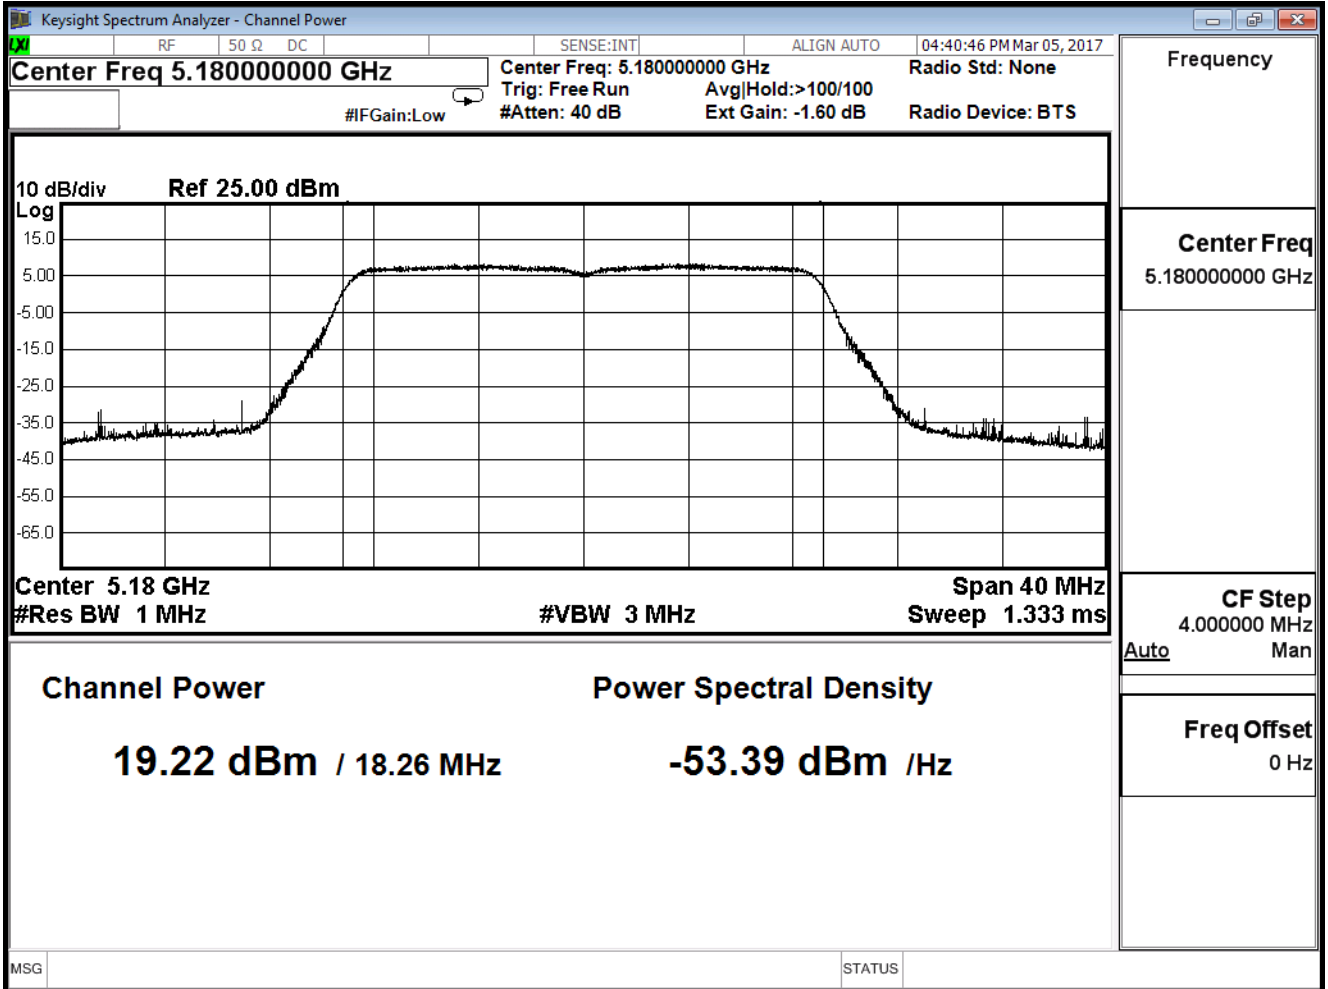

Peak transmit Power - Channel 44

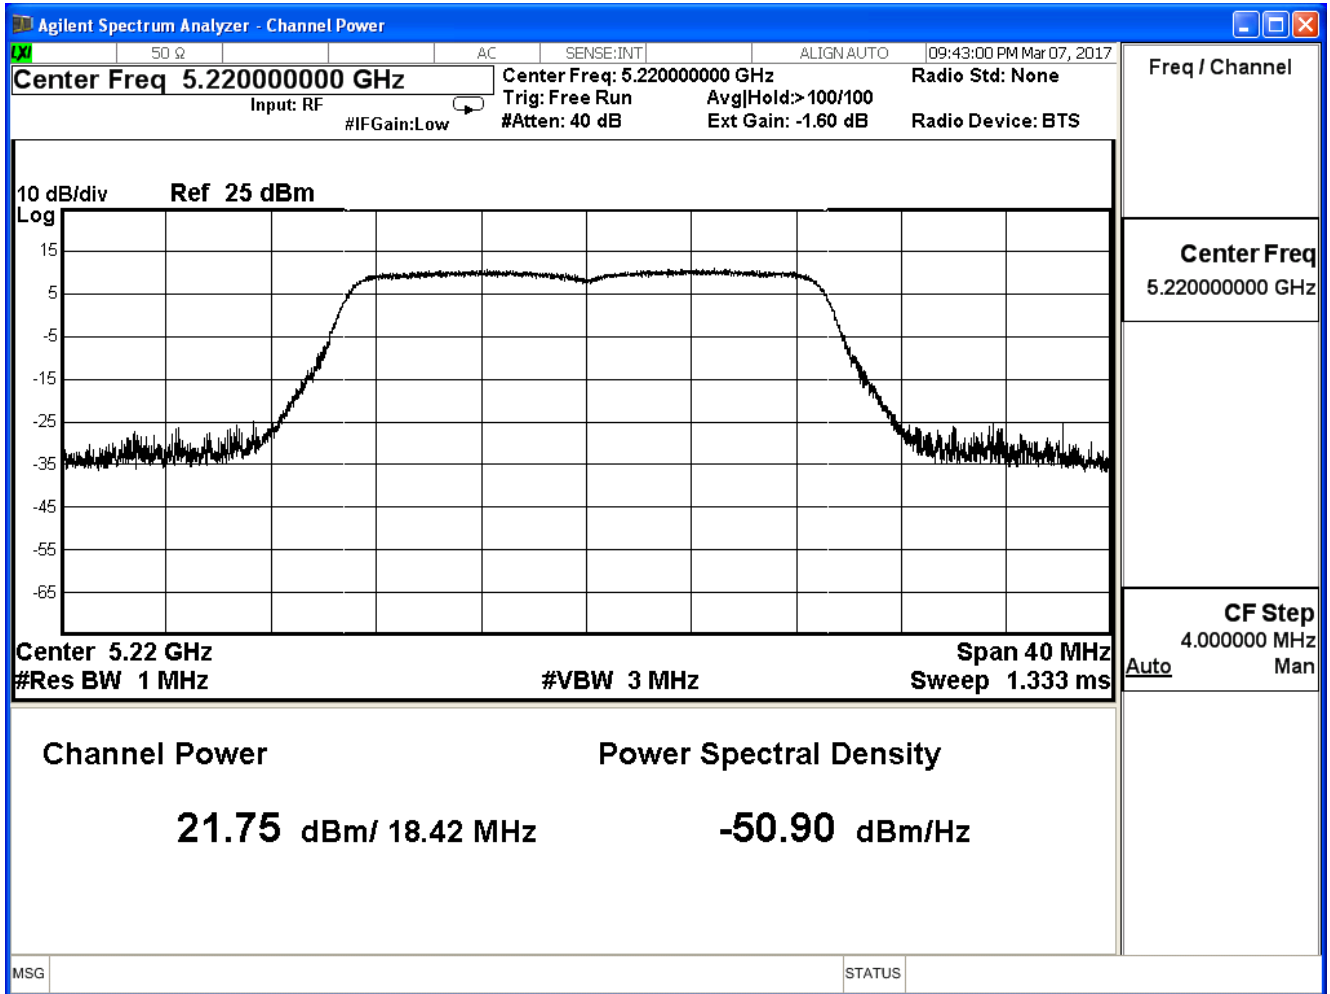

Peak transmit Power - Channel 48

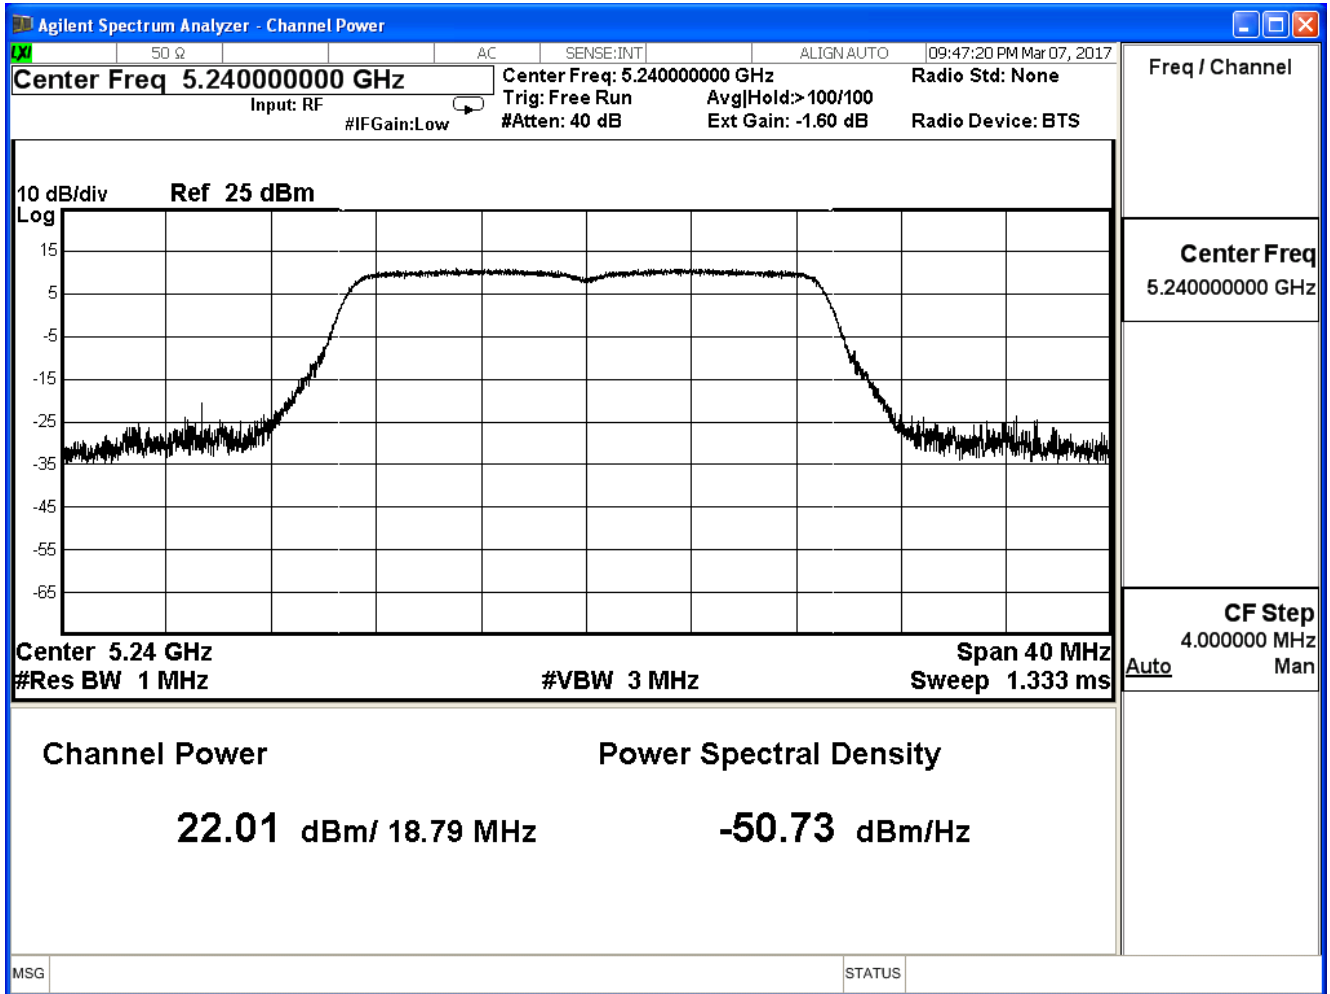

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 0+1+2+3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	25.261	≤30
44	5220	27.741	≤30
48	5240	28.051	≤30

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/05	Test Site	SR10-H


IEEE 802.11n(40MHz)(ANT 0)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.560	≤30
46	5230	22.160	≤30


The worst emission of data rate is MCS 24

Channel No	Frequency (MHz)	MCS Index								Required Limit
		24	25	26	27	28	29	30	31	
38	5190	16.560	--	--	--	--	--	--	--	≤30dBm
46	5230	22.160	22.020	21.900	21.810	21.620	21.530	21.410	21.220	

Peak transmit Power - Channel 38

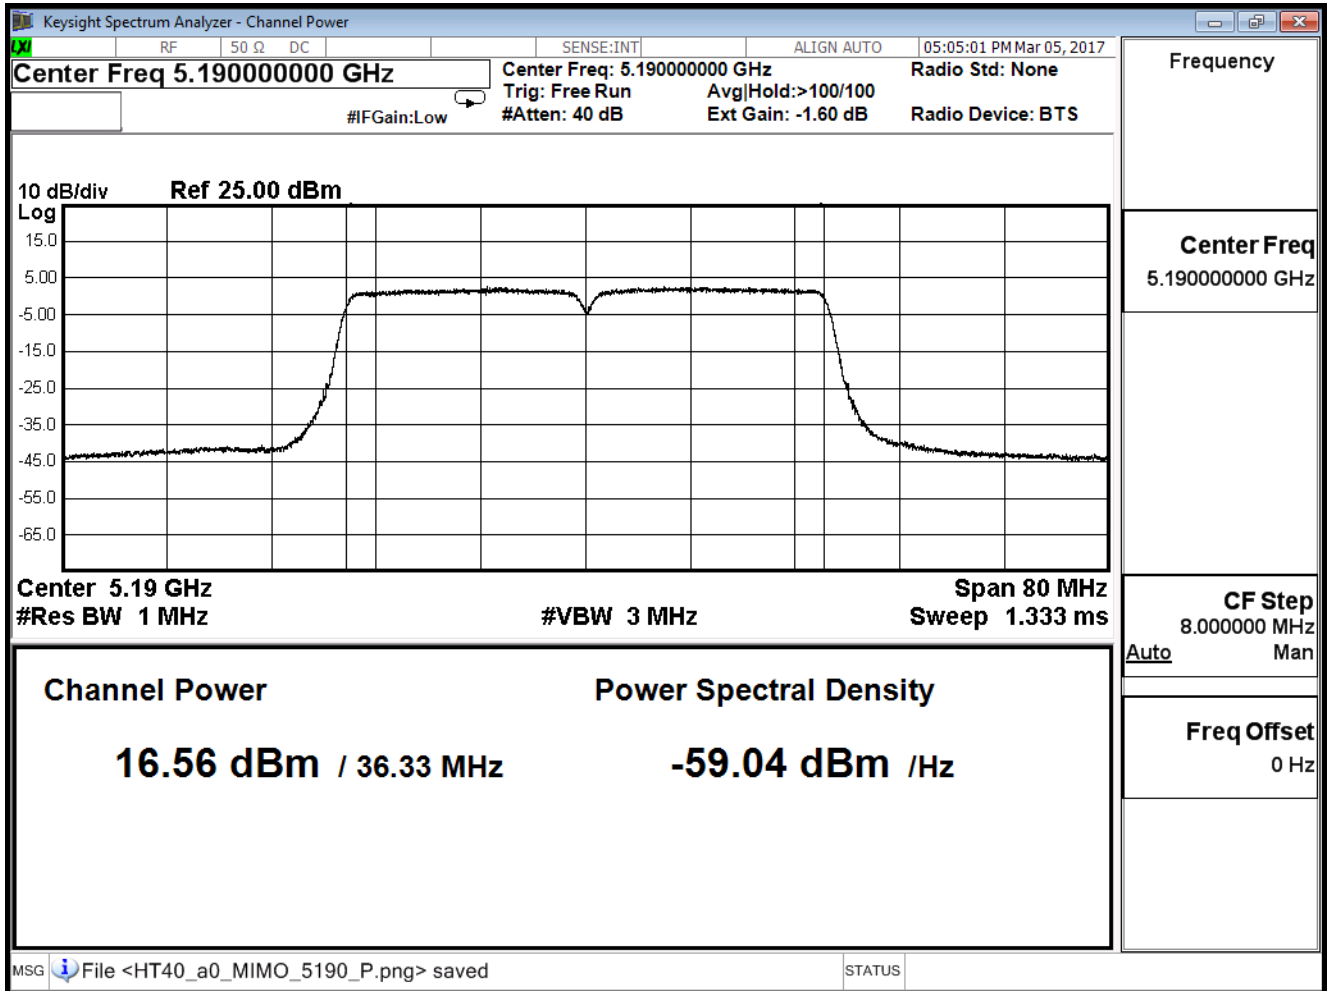

Peak transmit Power - Channel 46

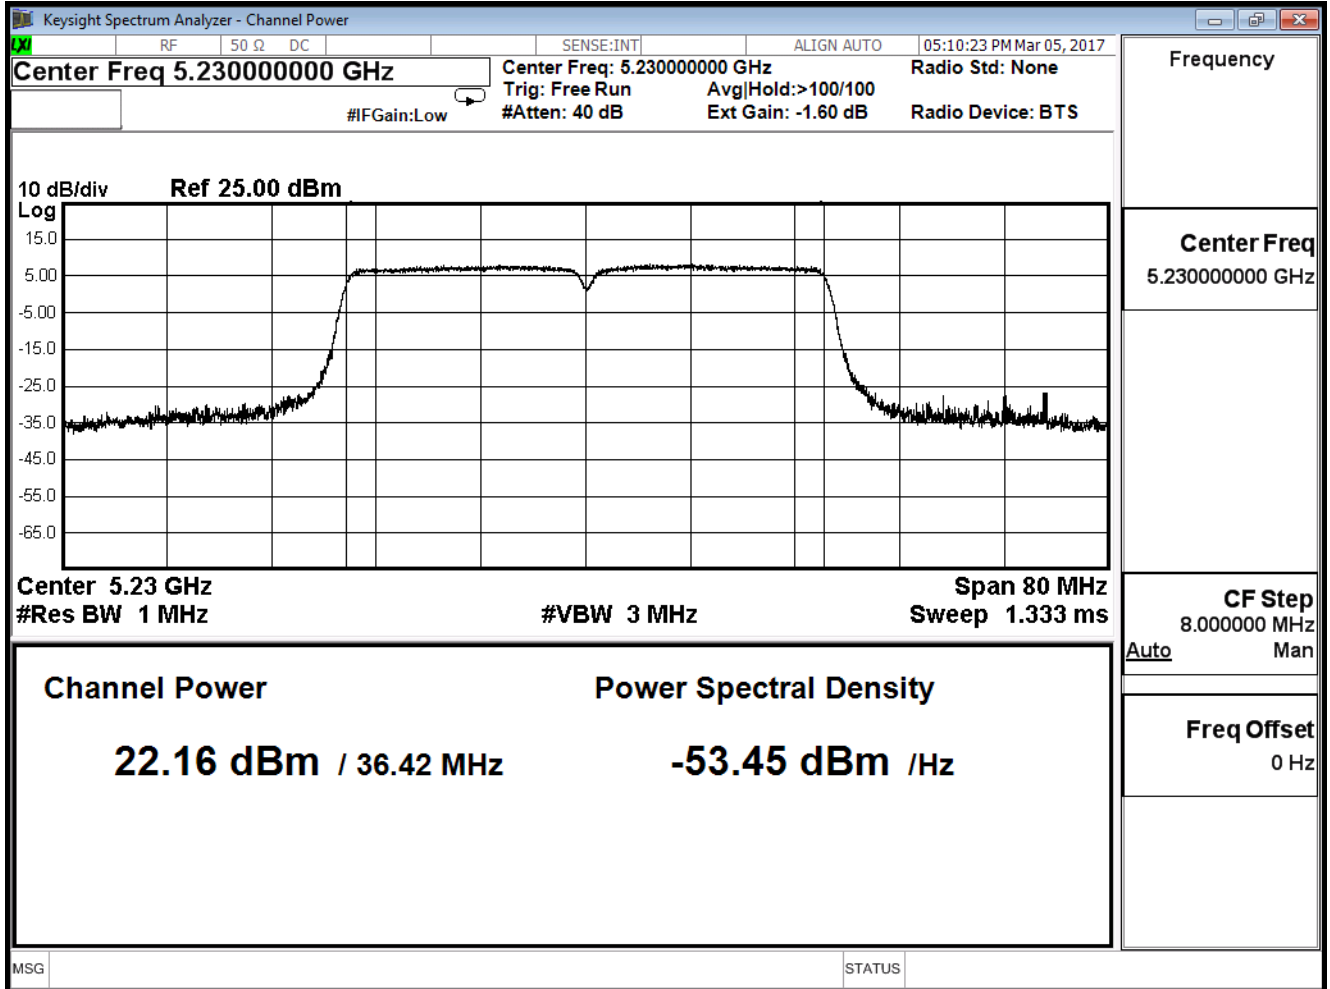

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/05	Test Site	SR10-H


IEEE 802.11n(40MHz)(ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.580	≤30
46	5230	22.210	≤30


The worst emission of data rate is MCS 24

Channel No	Frequency (MHz)	MCS Index								Required Limit
		24	25	26	27	28	29	30	31	
38	5190	16.580	--	--	--	--	--	--	--	≤30dBm
46	5230	22.210	21.120	21.020	21.920	20.810	20.660	20.430	20.120	

Peak transmit Power - Channel 38

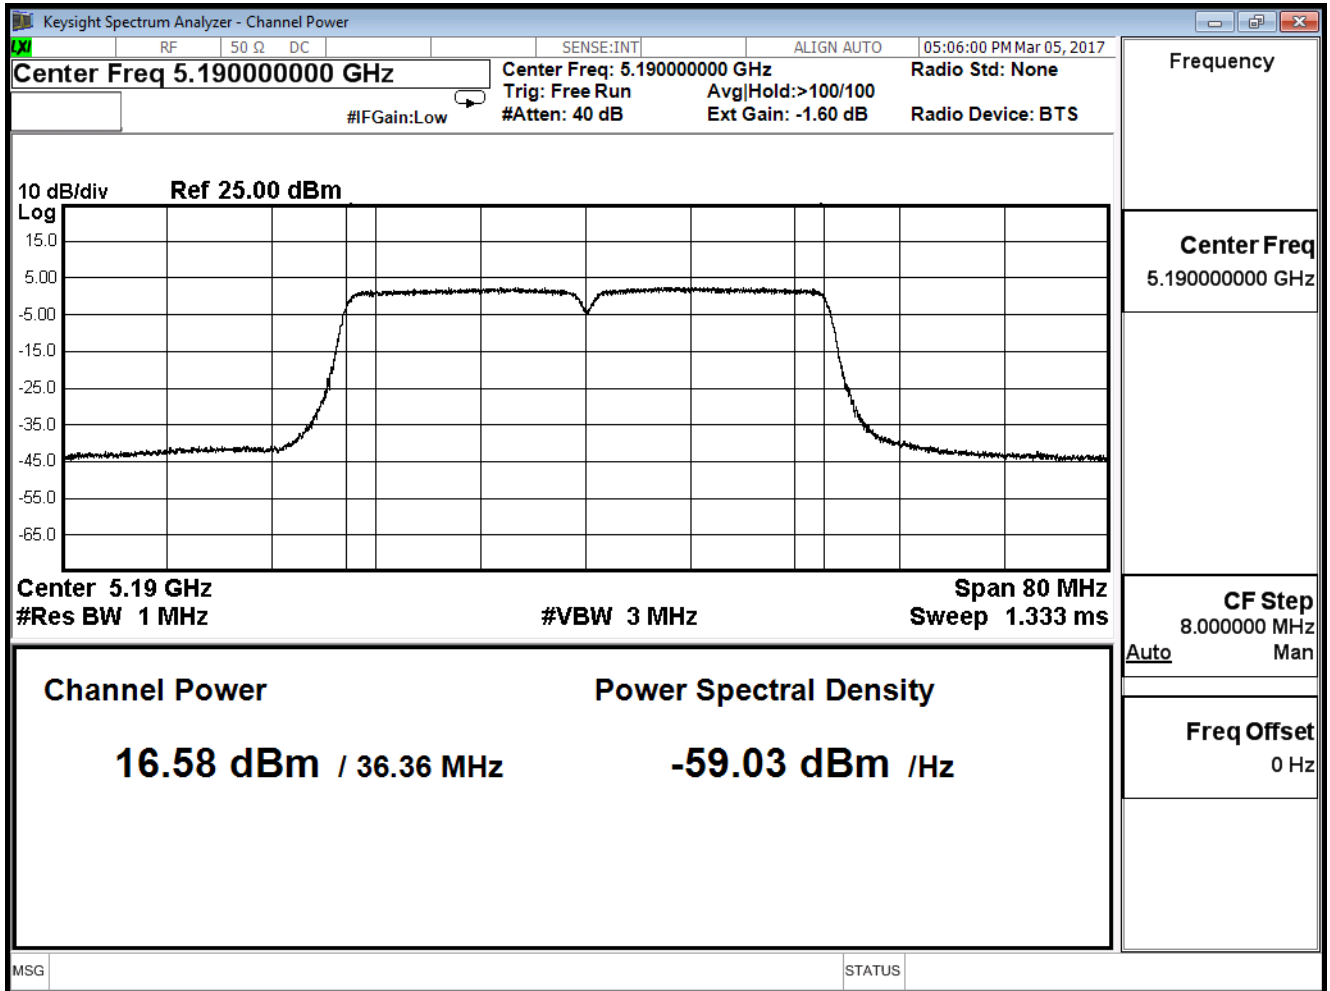

Peak transmit Power - Channel 46

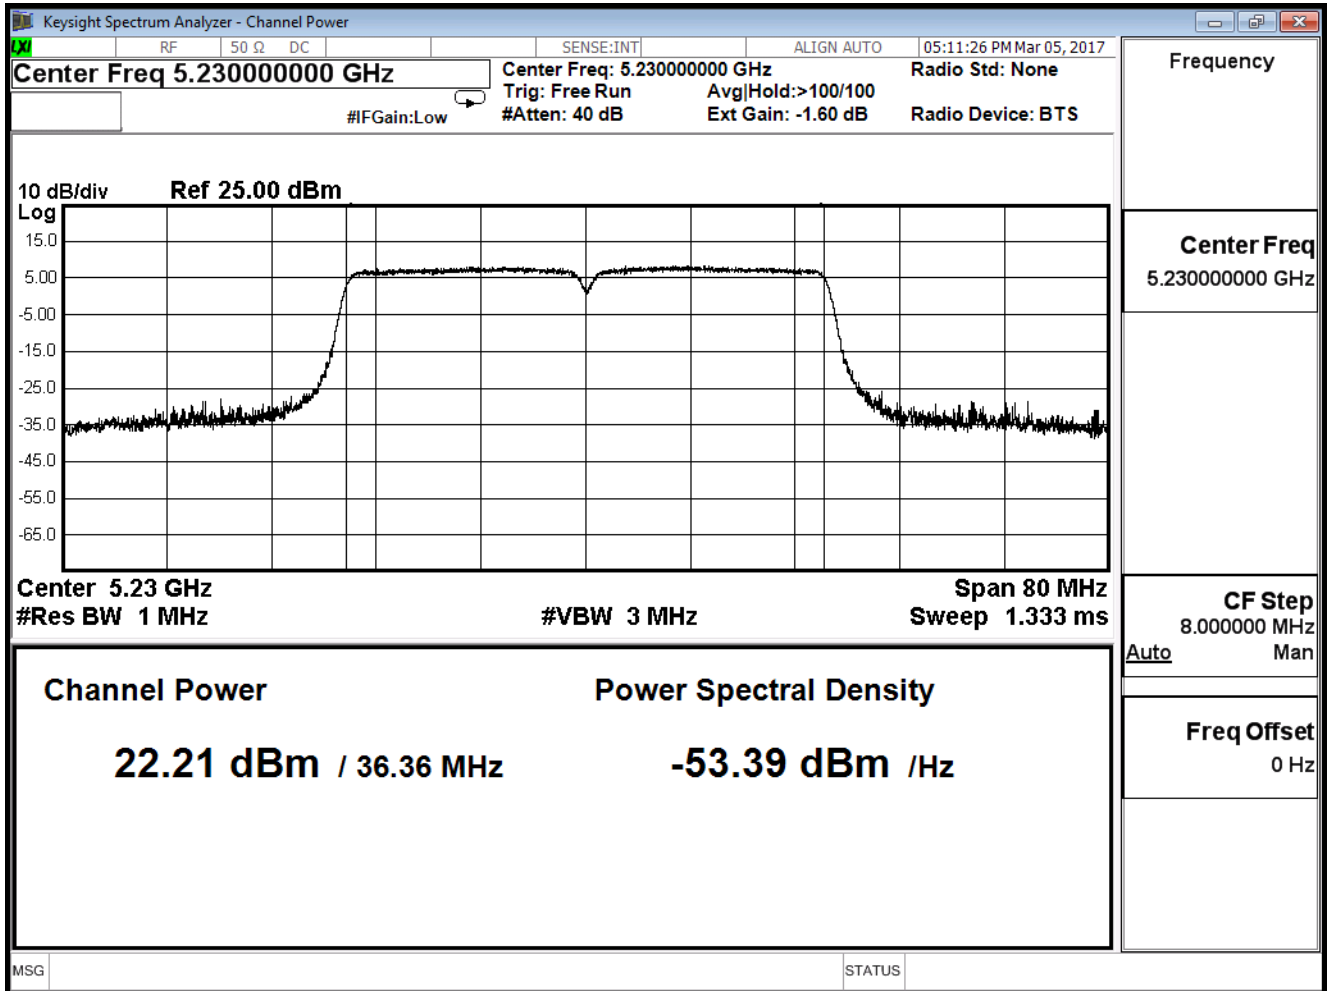

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/05	Test Site	SR10-H


IEEE 802.11n(40MHz)(ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.600	≤30
46	5230	22.140	≤30


The worst emission of data rate is MCS 24

Channel No	Frequency (MHz)	MCS Index								Required Limit
		24	25	26	27	28	29	30	31	
38	5190	16.600	--	--	--	--	--	--	--	≤30dBm
46	5230	22.140	22.010	21.910	21.800	21.660	21.430	21.210	21.030	

Peak transmit Power - Channel 38

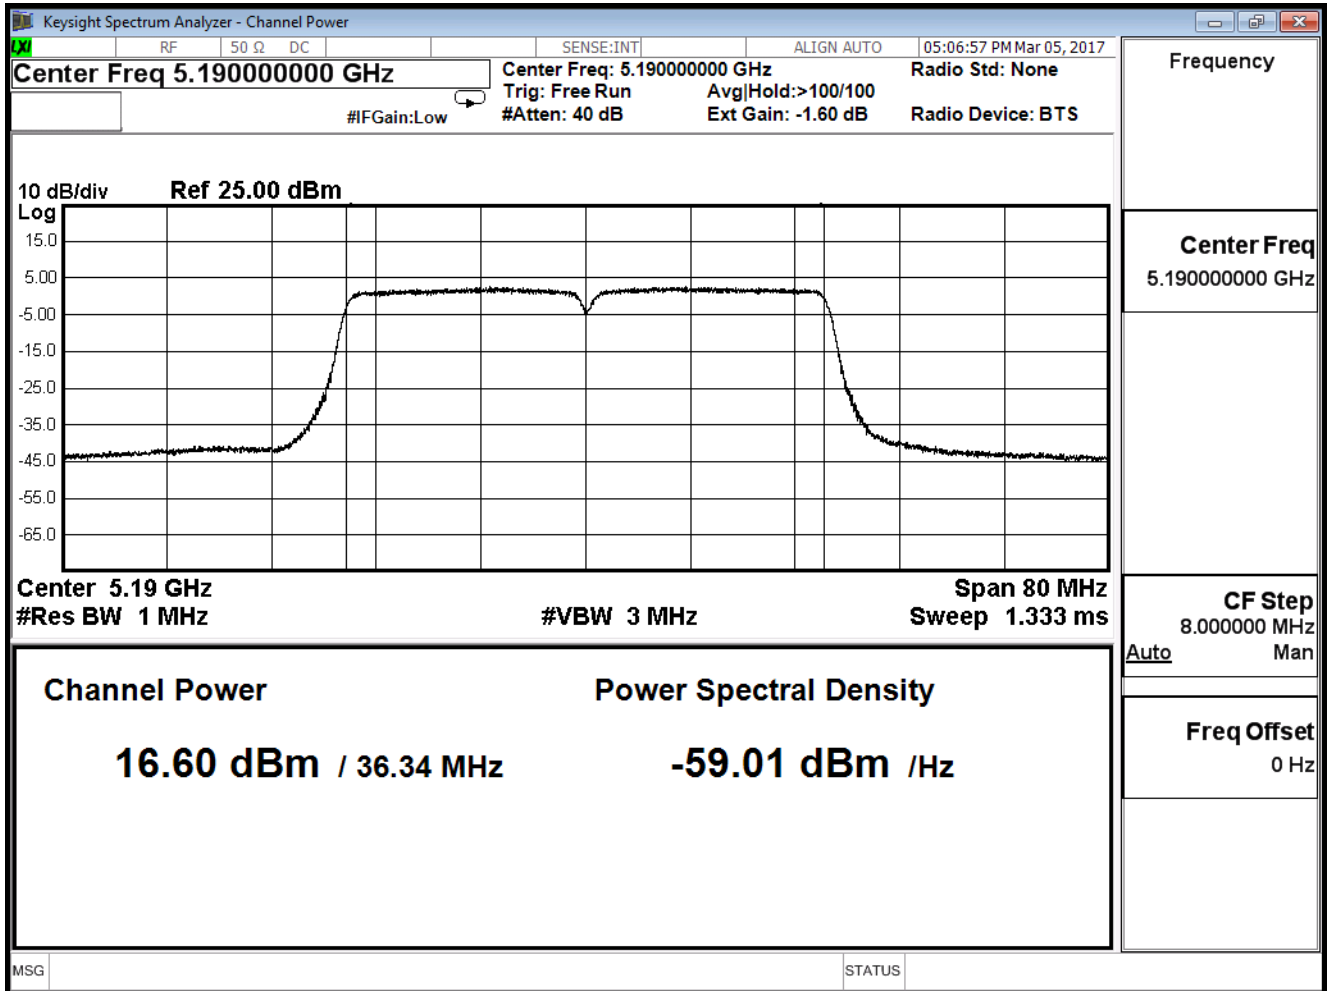

Peak transmit Power - Channel 46

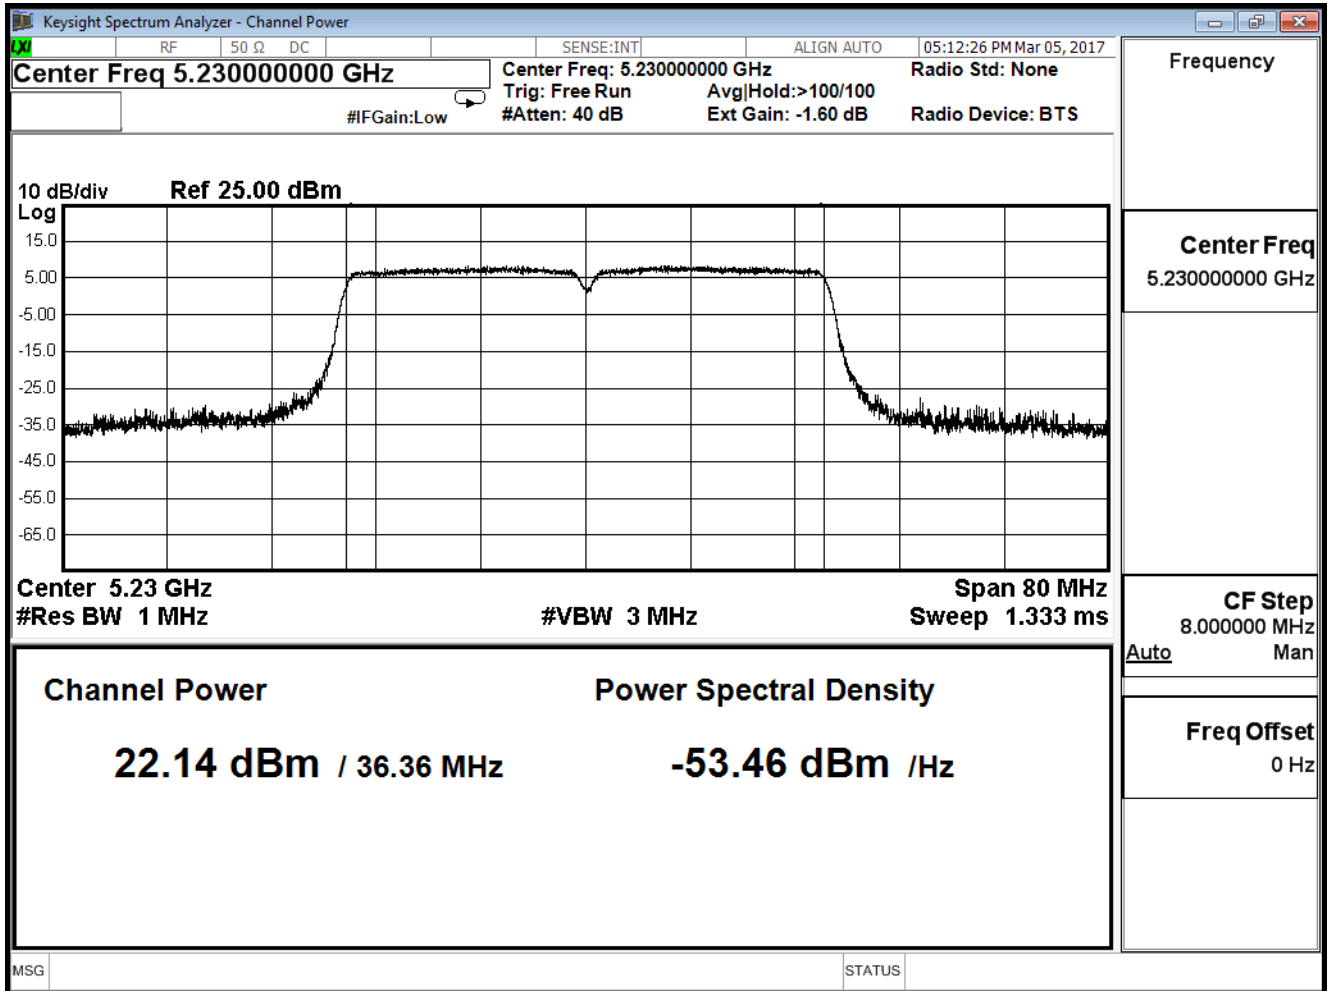

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/05	Test Site	SR10-H


IEEE 802.11n(40MHz)(ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	16.580	≤30
46	5230	22.130	≤30


The worst emission of data rate is MCS 24

Channel No	Frequency (MHz)	MCS Index								Required Limit
		24	25	26	27	28	29	30	31	
38	5190	16.580	--	--	--	--	--	--	--	≤30dBm
46	5230	22.130	22.010	21.900	21.710	21.530	21.320	21.210	21.080	

Peak transmit Power - Channel 38

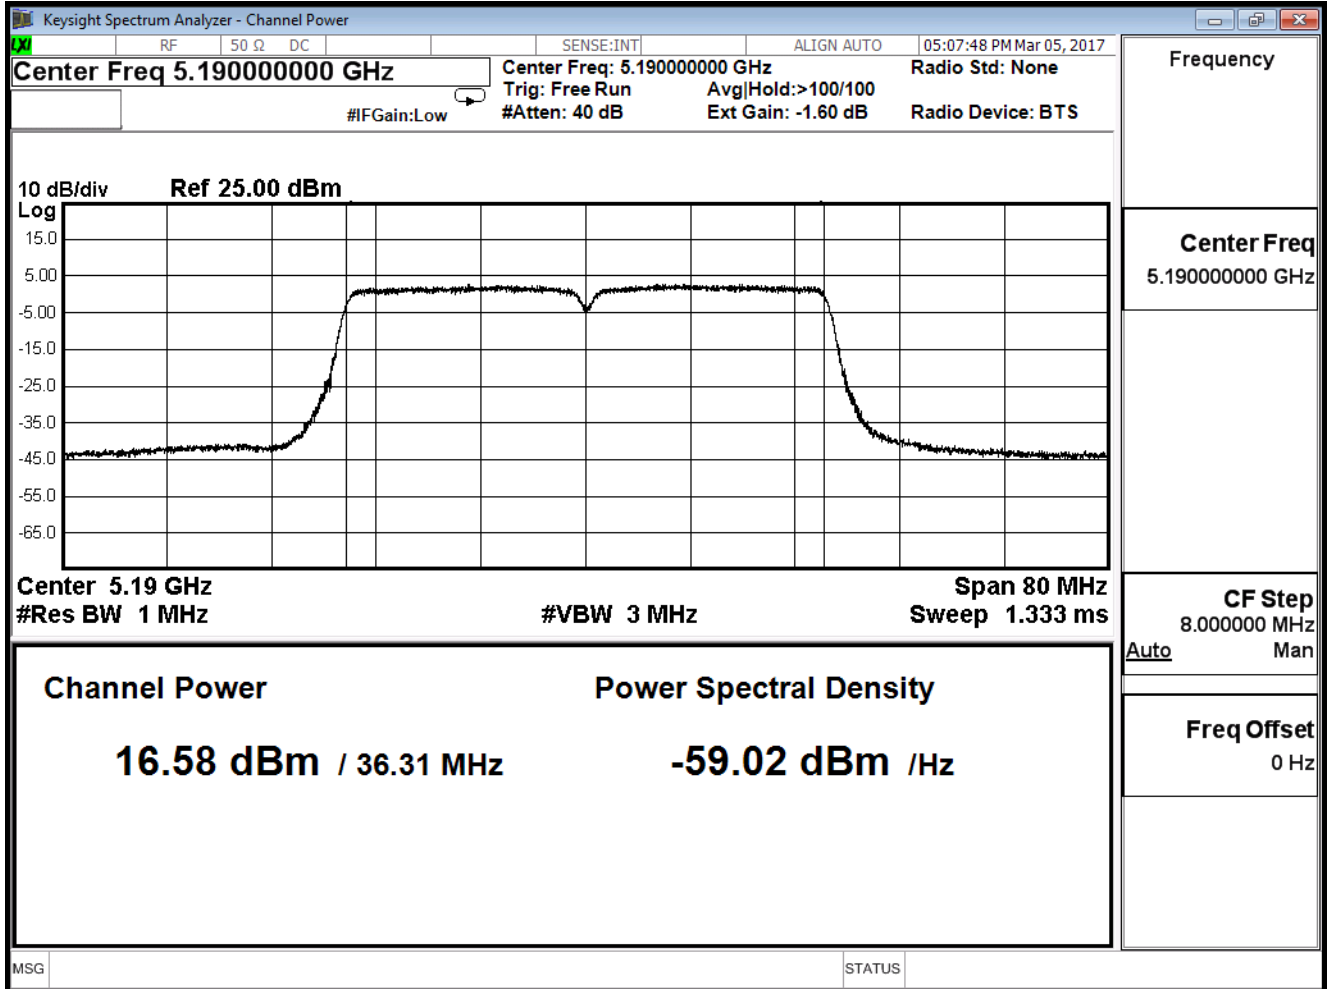

Peak transmit Power - Channel 46

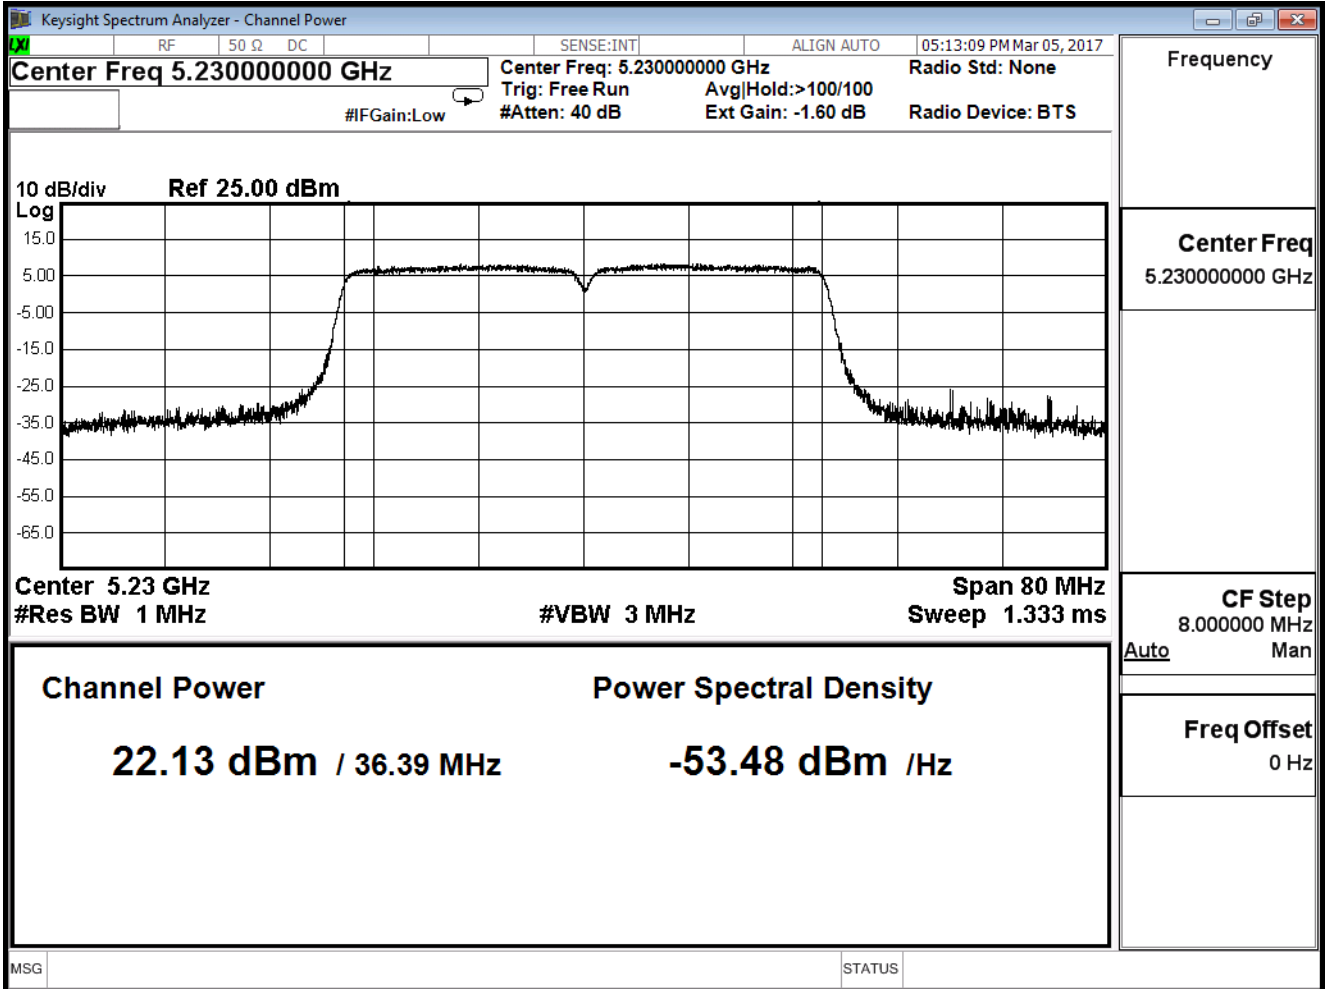

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/05	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 0+1+2+3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	22.601	≤30
46	5230	28.181	≤30

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/05	Test Site	SR10-H


IEEE 802.11ac(80MHz) (ANT 0)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	17.590	≤30

The worst emission of data rate is MCS0

Channel No	Frequency (MHz)	MCS Index										Required Limit
		0	1	2	3	4	5	6	7	8	9	
42	5210	17.590	17.320	17.180	17.020	16.890	16.70	16.500	16.330	16.080	15.920	≤30dBm

Peak transmit Power - Channel 42

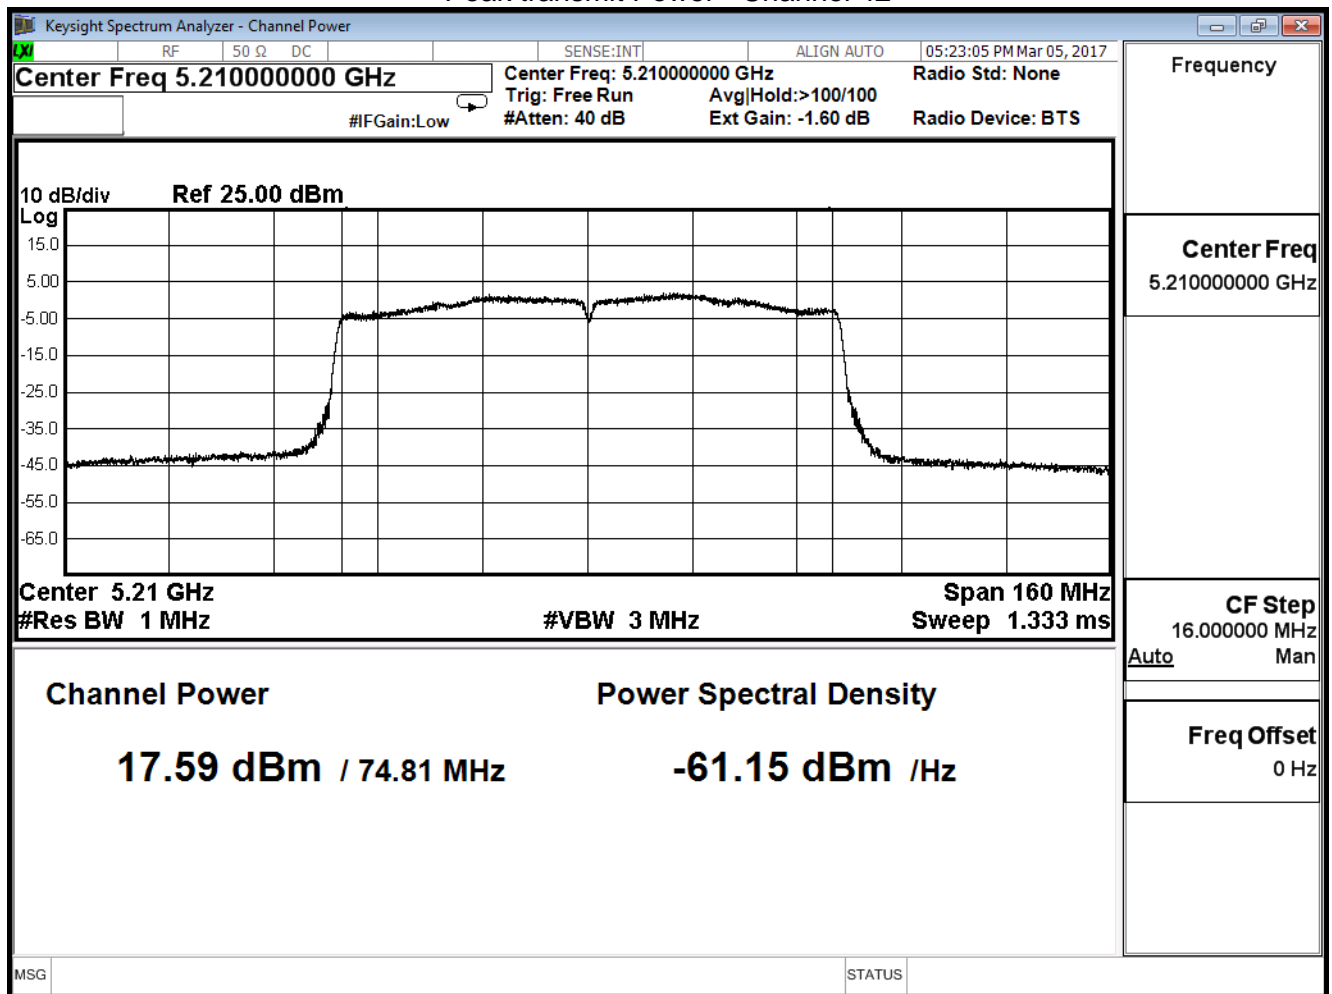

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/05	Test Site	SR10-H


IEEE 802.11ac(80MHz) (ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	17.630	≤30

The worst emission of data rate is MCS0

Channel No	Frequency (MHz)	MCS Index										Required Limit
		0	1	2	3	4	5	6	7	8	9	
42	5210	17.630	17.430	17.180	17.020	16.930	16.720	16.580	16.320	16.110	15.920	≤30dBm

Peak transmit Power - Channel 42

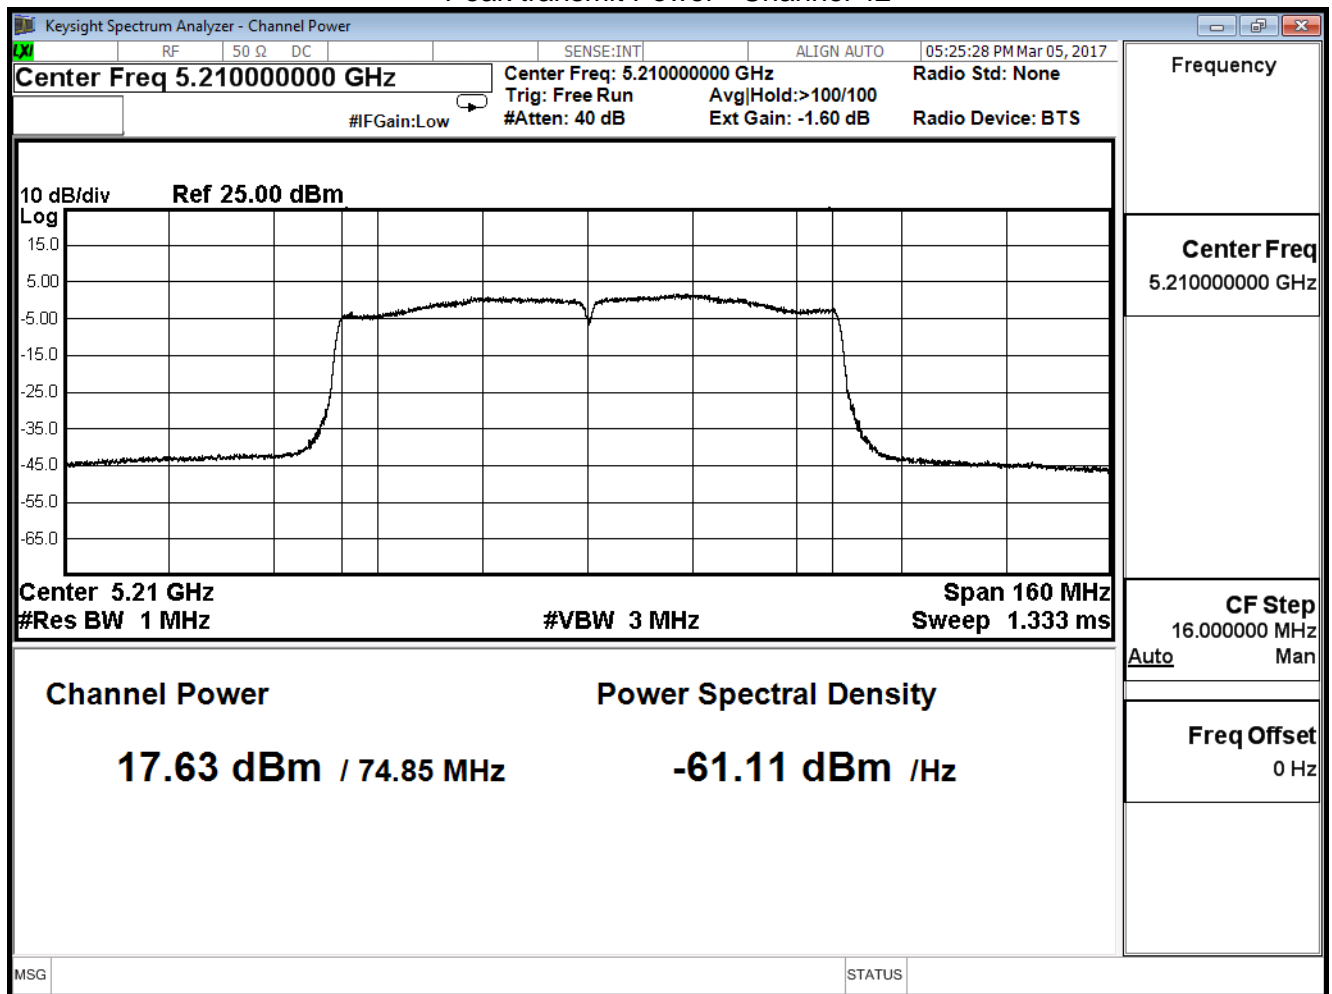

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/05	Test Site	SR10-H


IEEE 802.11ac(80MHz) (ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	17.630	≤30

The worst emission of data rate is MCS0

Channel No	Frequency (MHz)	MCS Index										Required Limit
		0	1	2	3	4	5	6	7	8	9	
42	5210	17.630	17.510	17.330	17.100	16.920	16.820	16.530	16.230	16.080	15.820	≤30dBm

Peak transmit Power - Channel 42

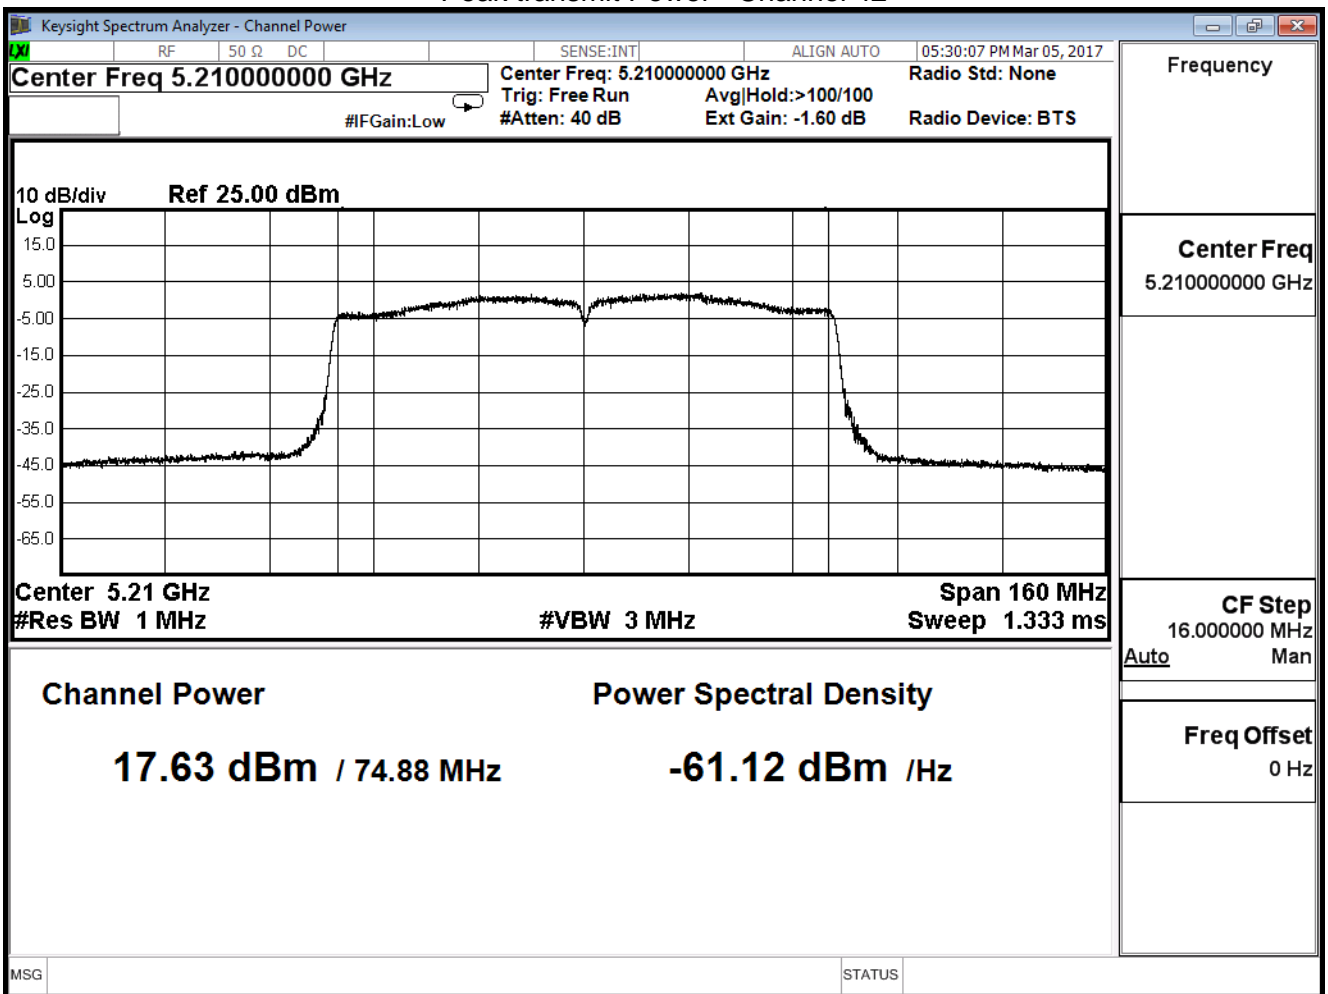

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/05	Test Site	SR10-H


IEEE 802.11ac(80MHz) (ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	17.590	≤30

The worst emission of data rate is MCS0

Channel No	Frequency (MHz)	MCS Index										Required Limit
		0	1	2	3	4	5	6	7	8	9	
42	5210	17.590	17.220	17.030	16.890	16.660	16.320	16.180	15.990	15.780	15.580	≤30dBm

Peak transmit Power - Channel 42

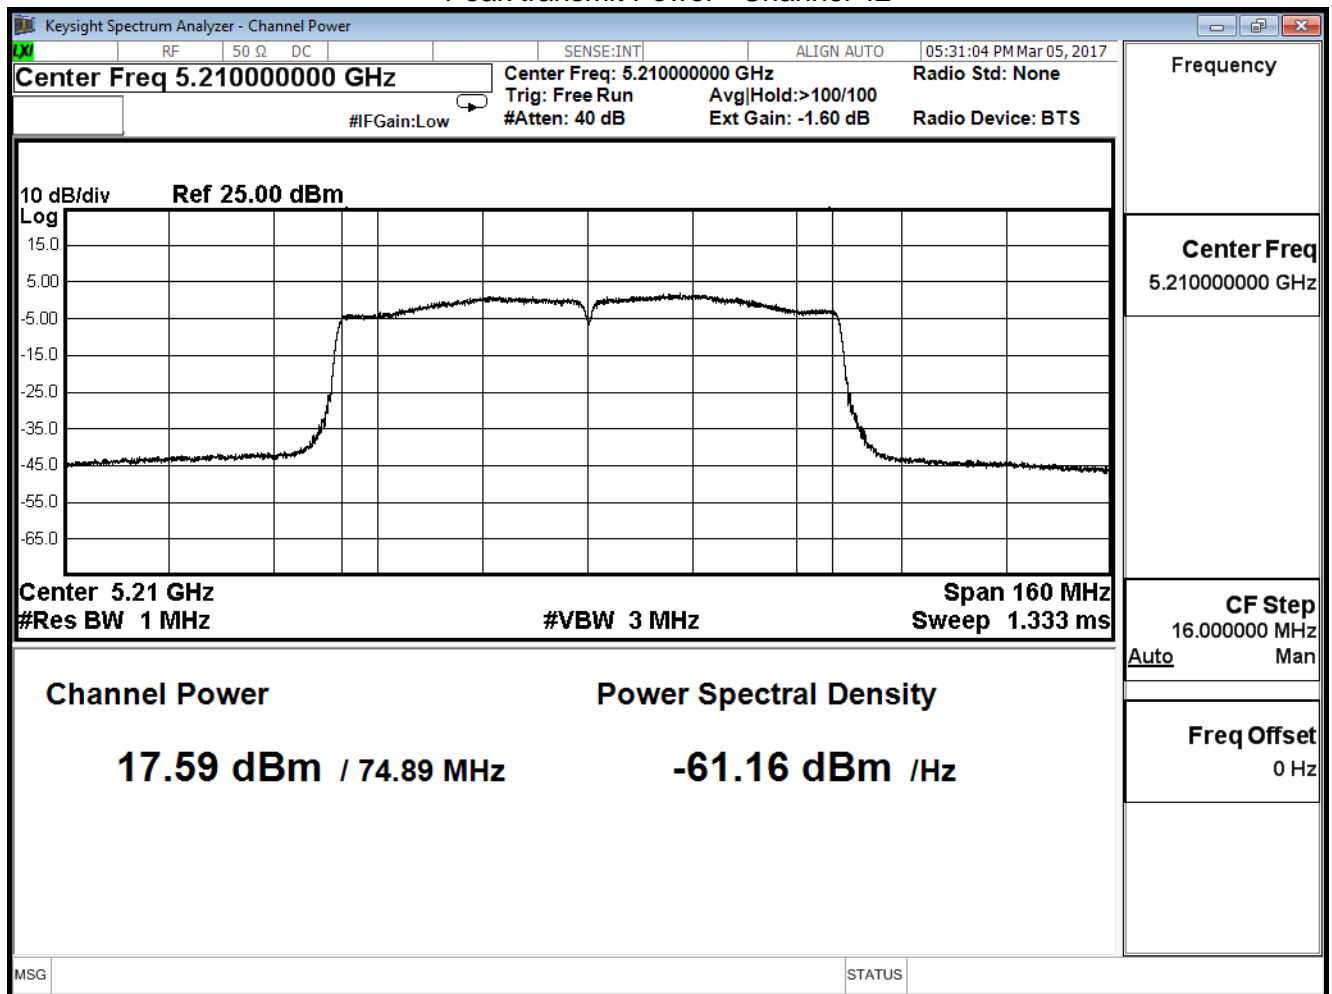

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/03/05	Test Site	SR10-H

IEEE 802.11ac(80MHz)(ANT 0+1+2+3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	23.631	≤30

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 0)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	18.550	≤29.66
44	5220	21.730	≤29.66
48	5240	22.020	≤29.66


The worst emission of data rate is MCS 0

Peak Power Output (dBm)										
Channel No	Frequency (MHz)	MCS Index								Required Limit (dBm)
		0	1	2	3	4	5	6	7	
36	5180	18.550	--	--	--	--	--	--	--	≤29.66
44	5220	21.730	21.620	21.550	21.500	21.420	21.330	21.240	21.130	
48	5240	22.020	--	--	--	--	--	--	--	


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm


Peak transmit Power - Channel 36

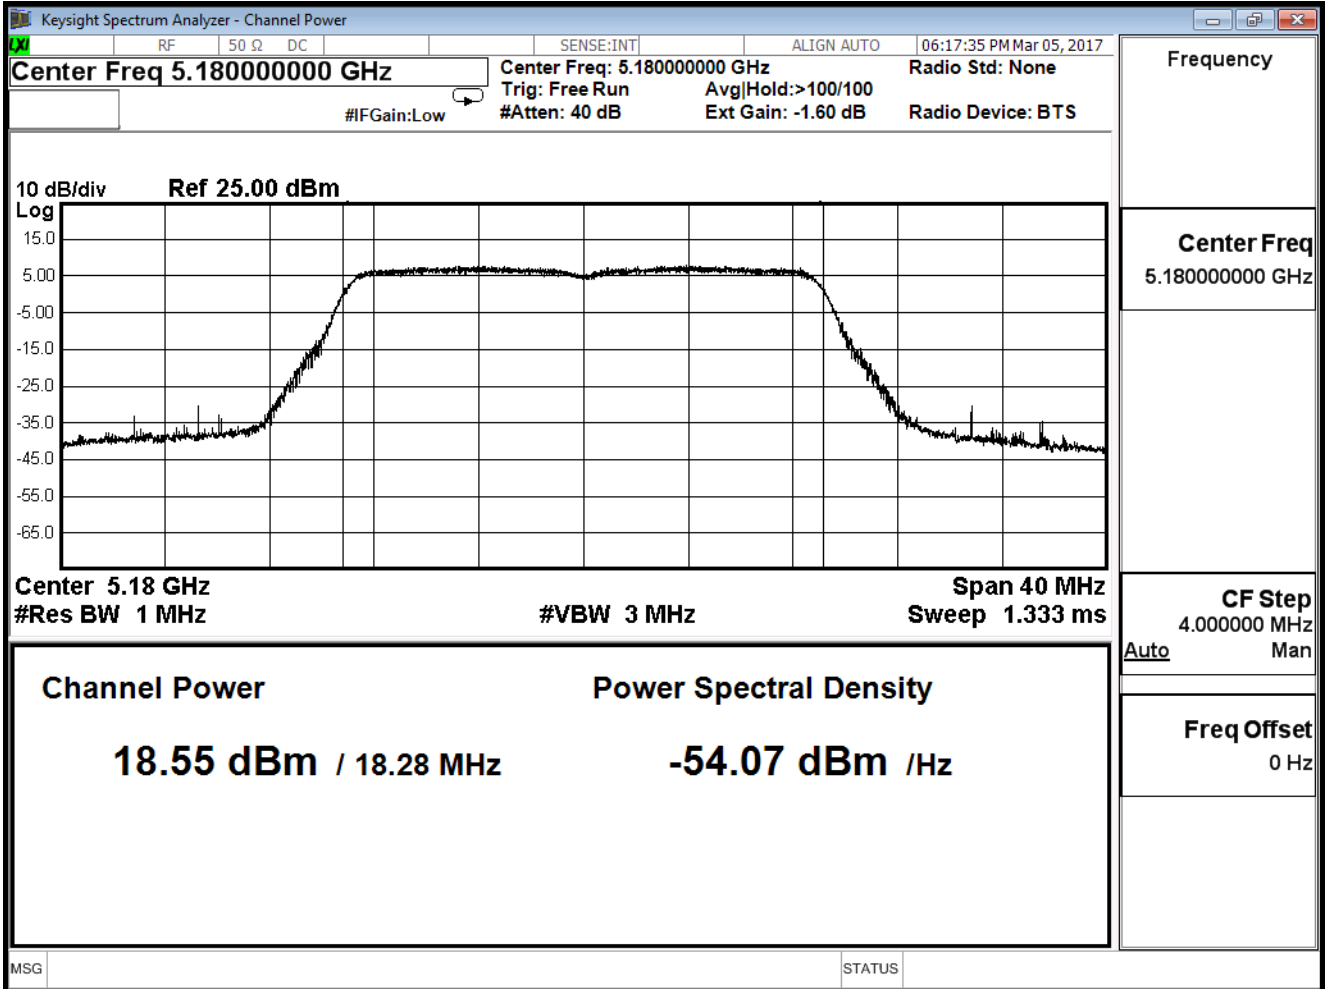

Peak transmit Power - Channel 44

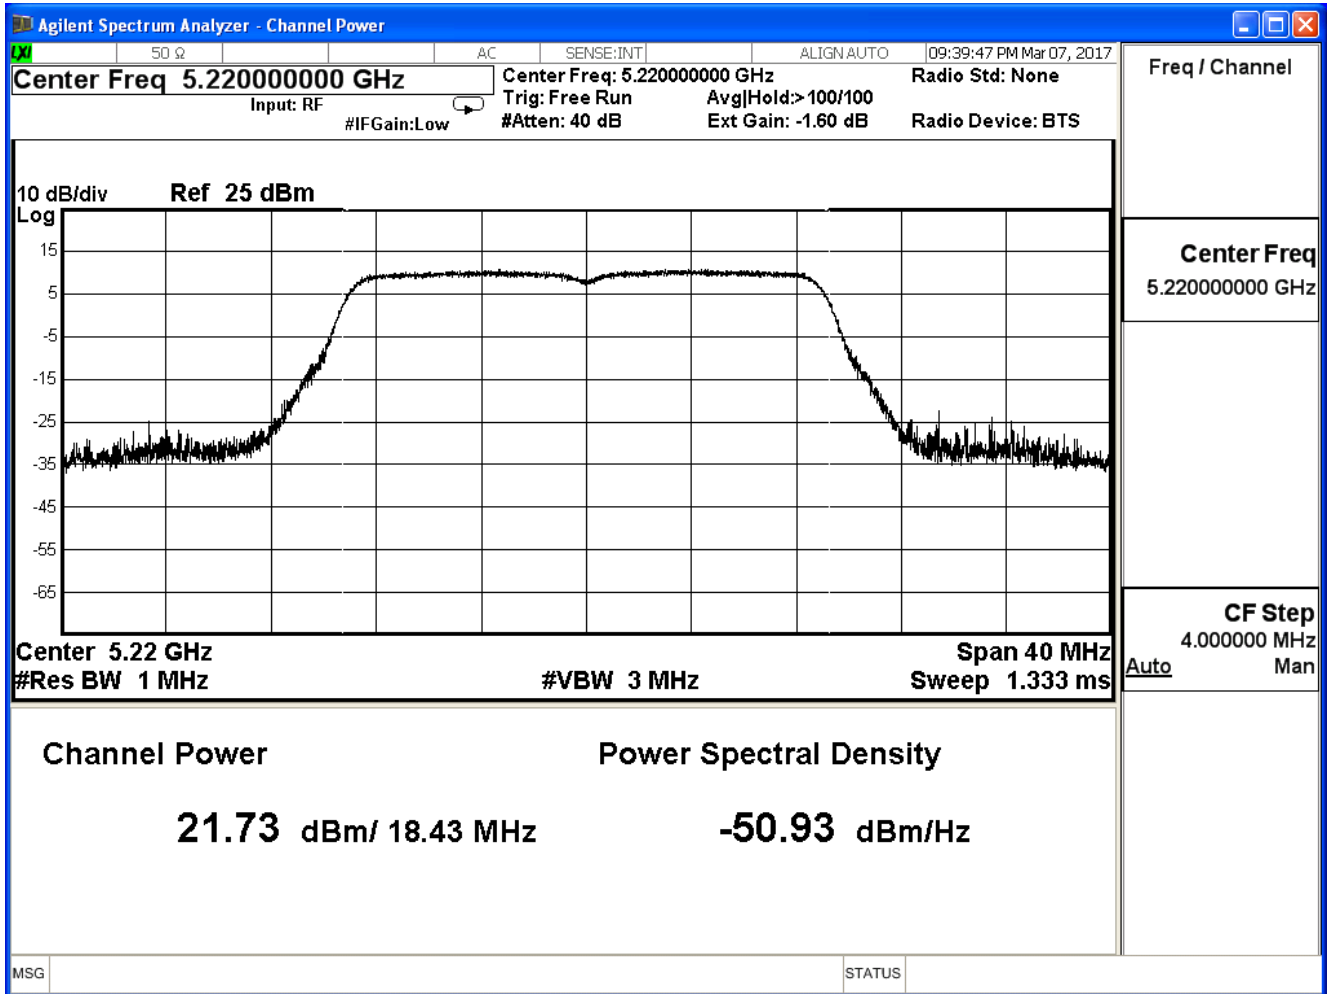

Peak transmit Power - Channel 48

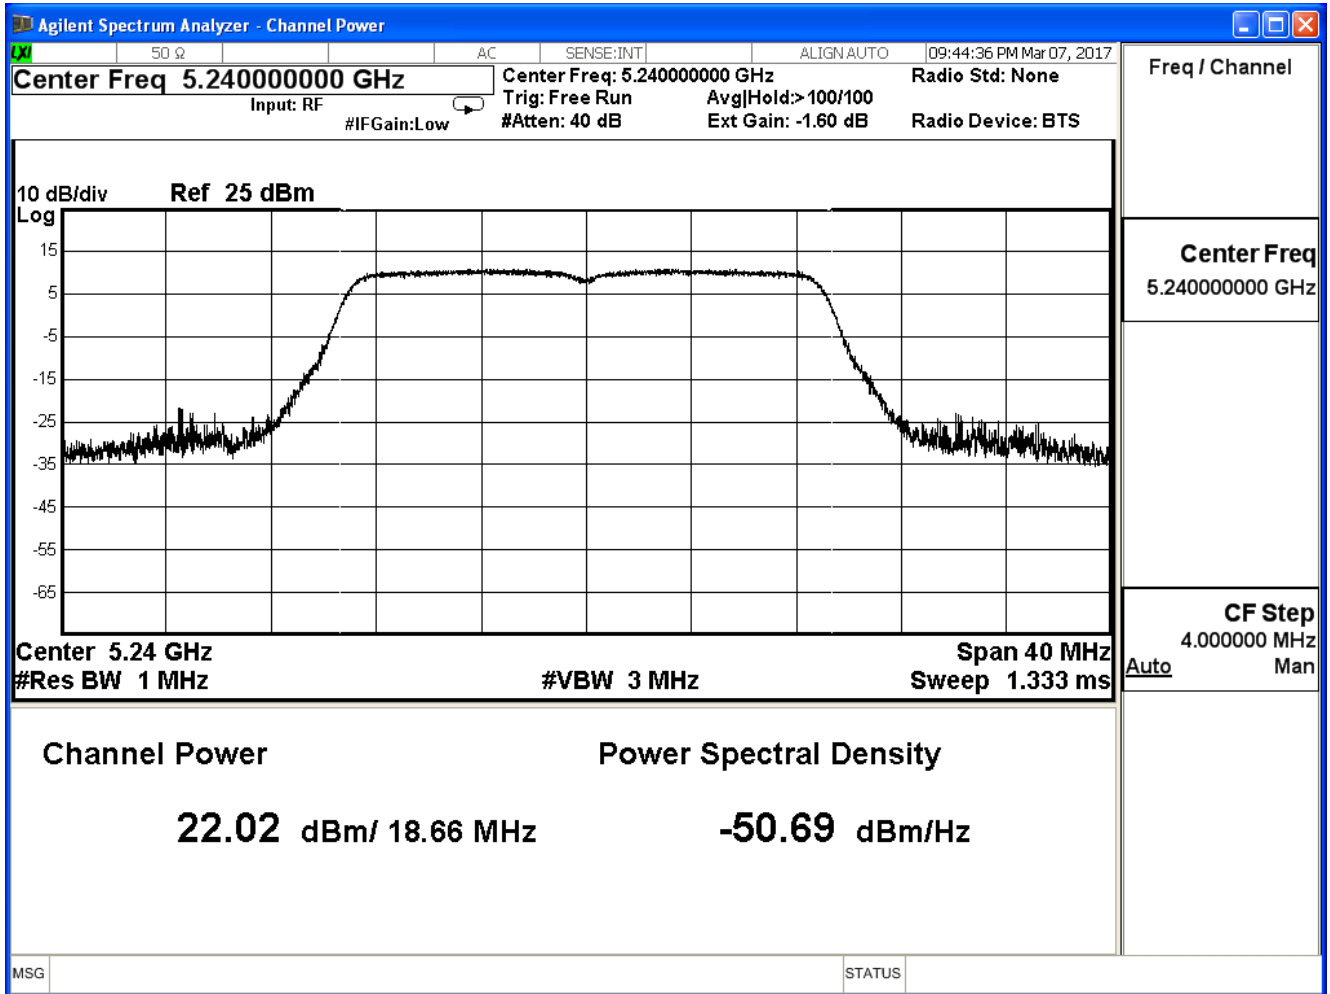

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	18.520	≤29.66
44	5220	21.680	≤29.66
48	5240	22.050	≤29.66


The worst emission of data rate is MCS 0

Peak Power Output (dBm)										
Channel No	Frequency (MHz)	MCS Index								Required Limit (dBm)
		0	1	2	3	4	5	6	7	
36	5180	18.520	--	--	--	--	--	--	--	≤29.66
44	5220	21.680	21.600	21.510	21.390	21.300	21.220	21.110	21.030	
48	5240	22.050	--	--	--	--	--	--	--	


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm


Peak transmit Power - Channel 36

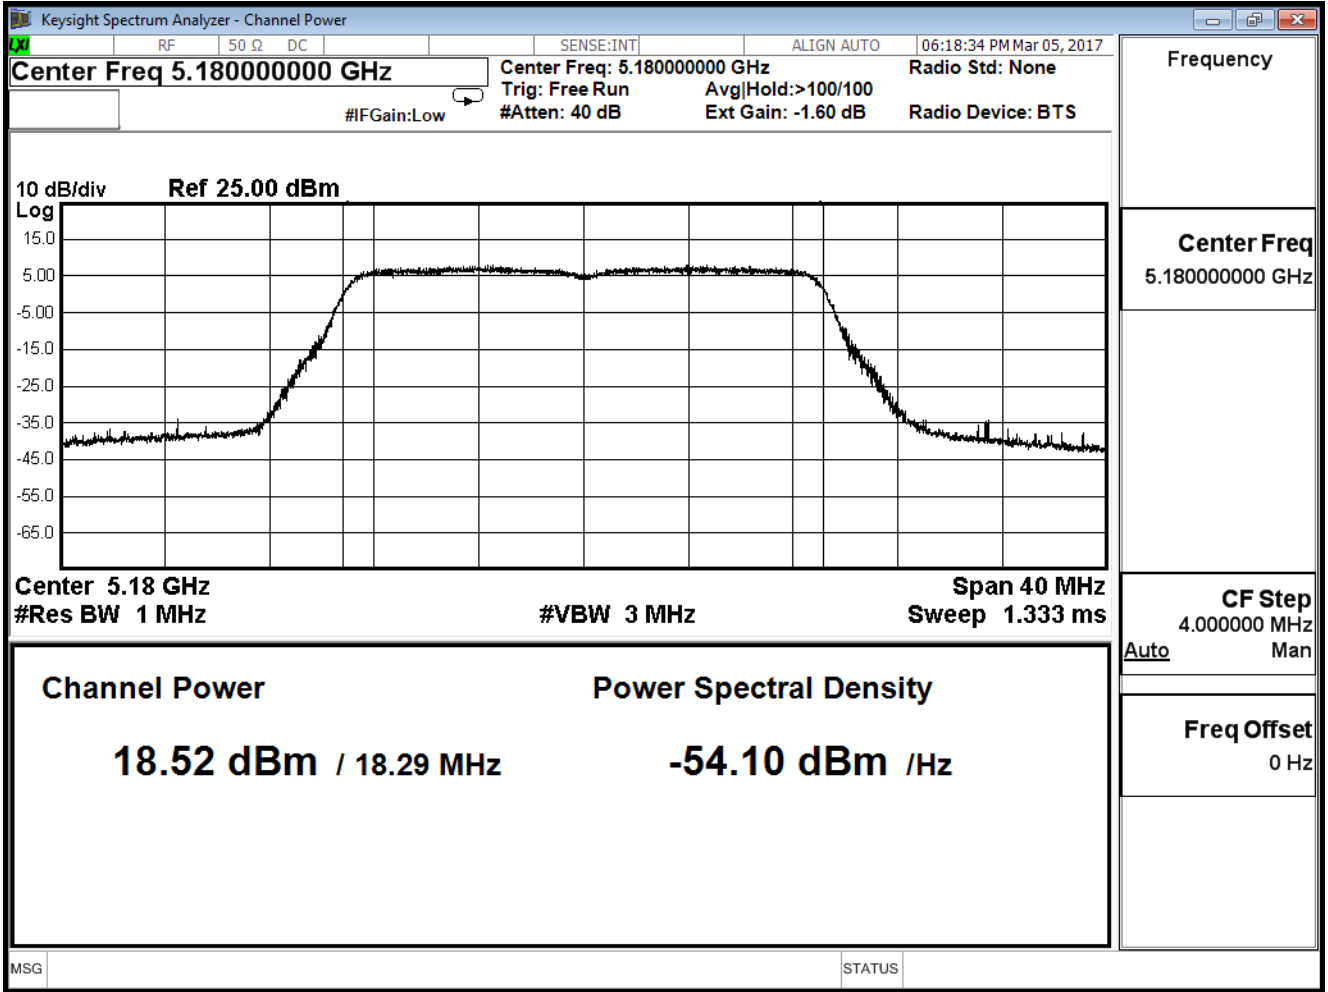

Peak transmit Power - Channel 44

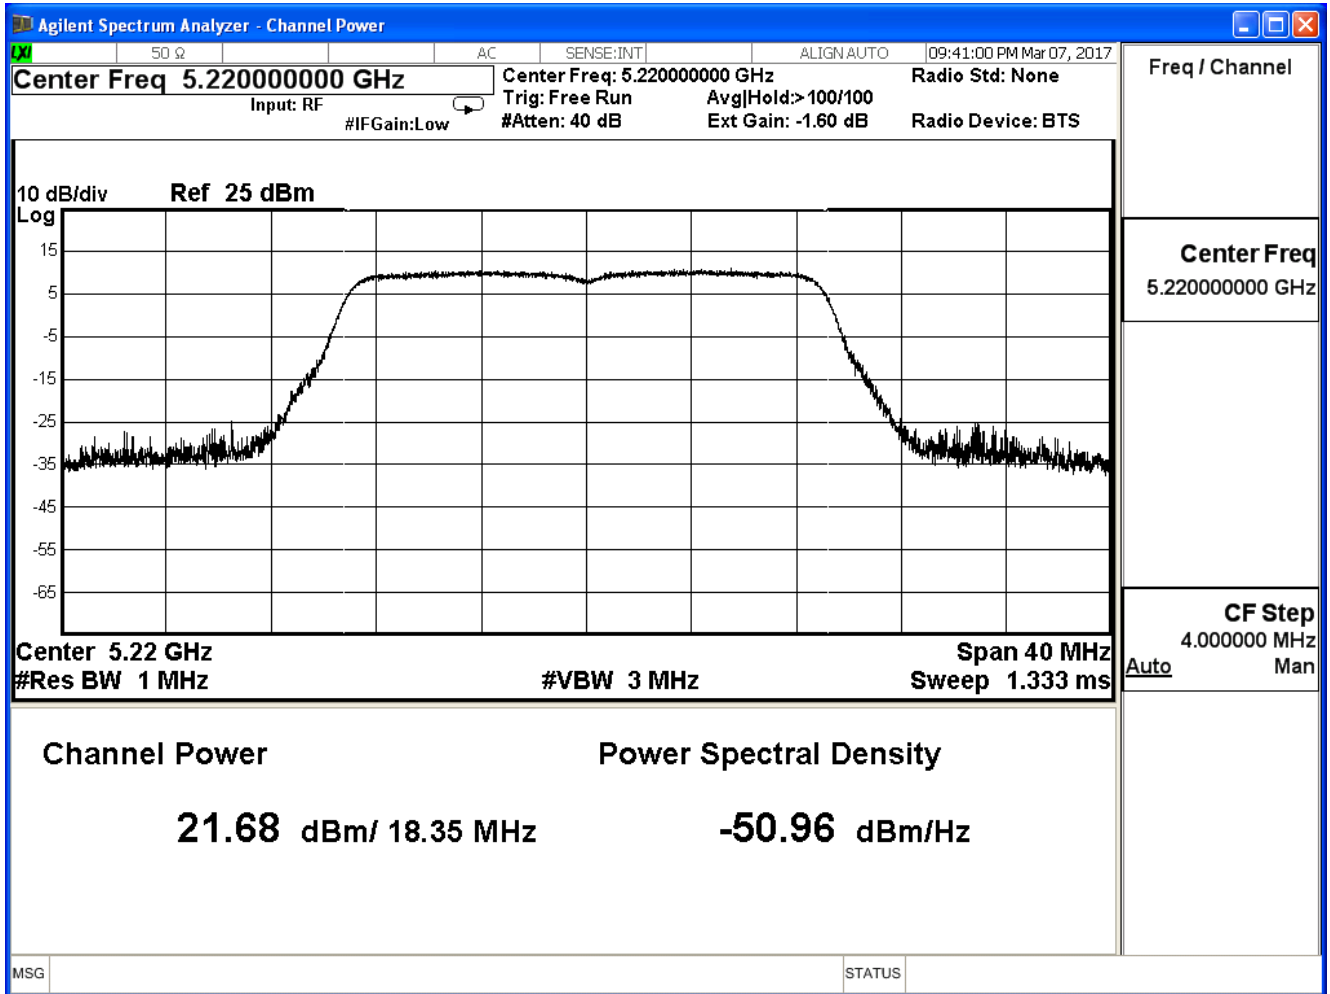

Peak transmit Power - Channel 48

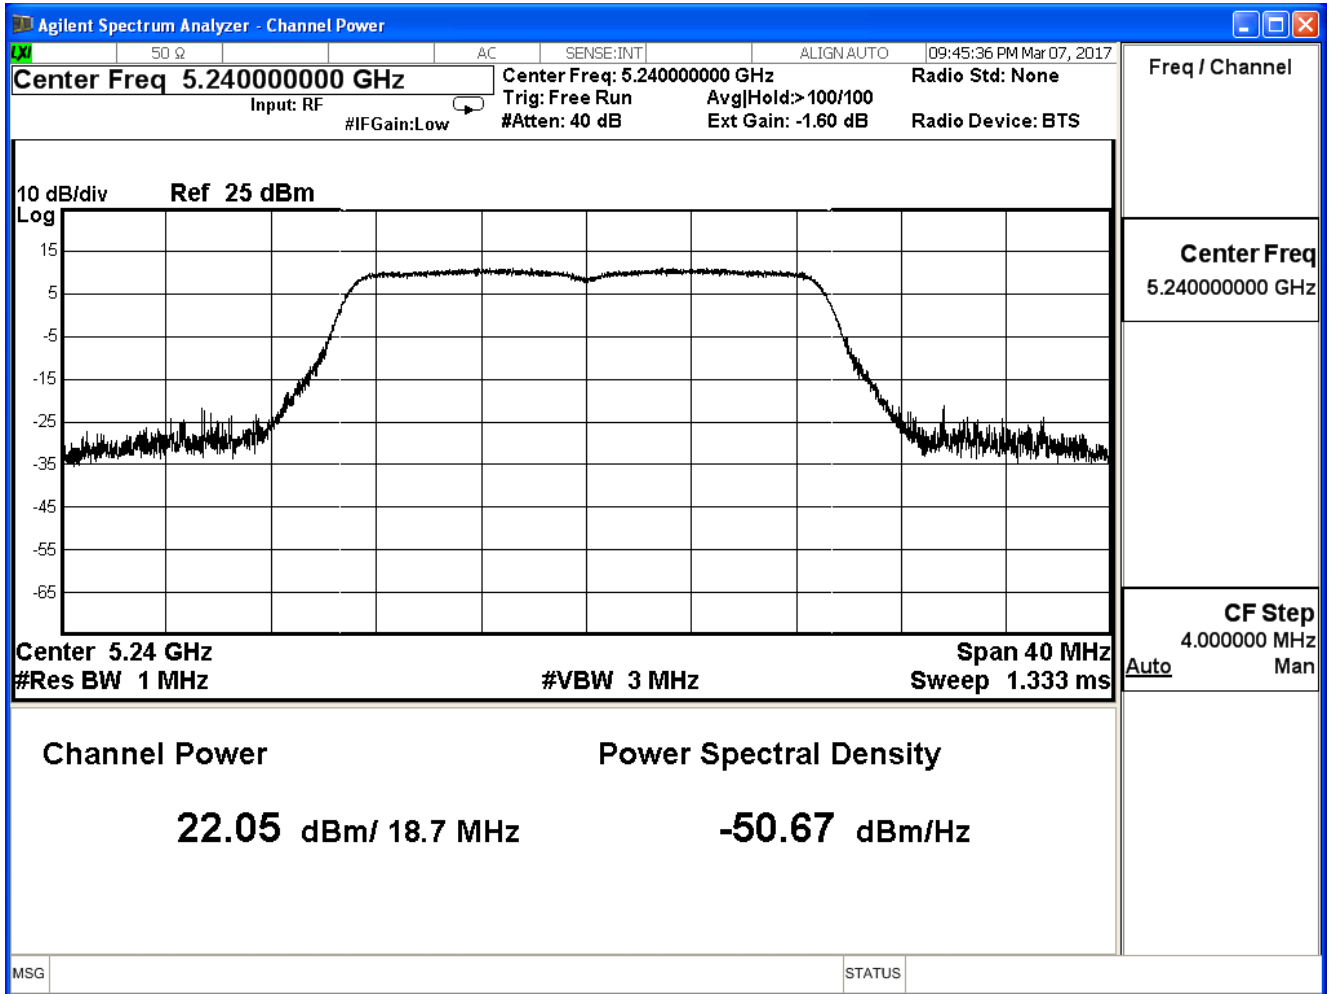

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	18.570	≤29.66
44	5220	21.720	≤29.66
48	5240	22.040	≤29.66


The worst emission of data rate is MCS 0

Peak Power Output (dBm)										
Channel No	Frequency (MHz)	MCS Index								Required Limit (dBm)
		0	1	2	3	4	5	6	7	
36	5180	18.570	--	--	--	--	--	--	--	≤29.66
44	5220	21.720	21.600	21.550	21.420	21.330	21.20	21.040	20.920	
48	5240	22.040	--	--	--	--	--	--	--	


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm


Peak transmit Power - Channel 36

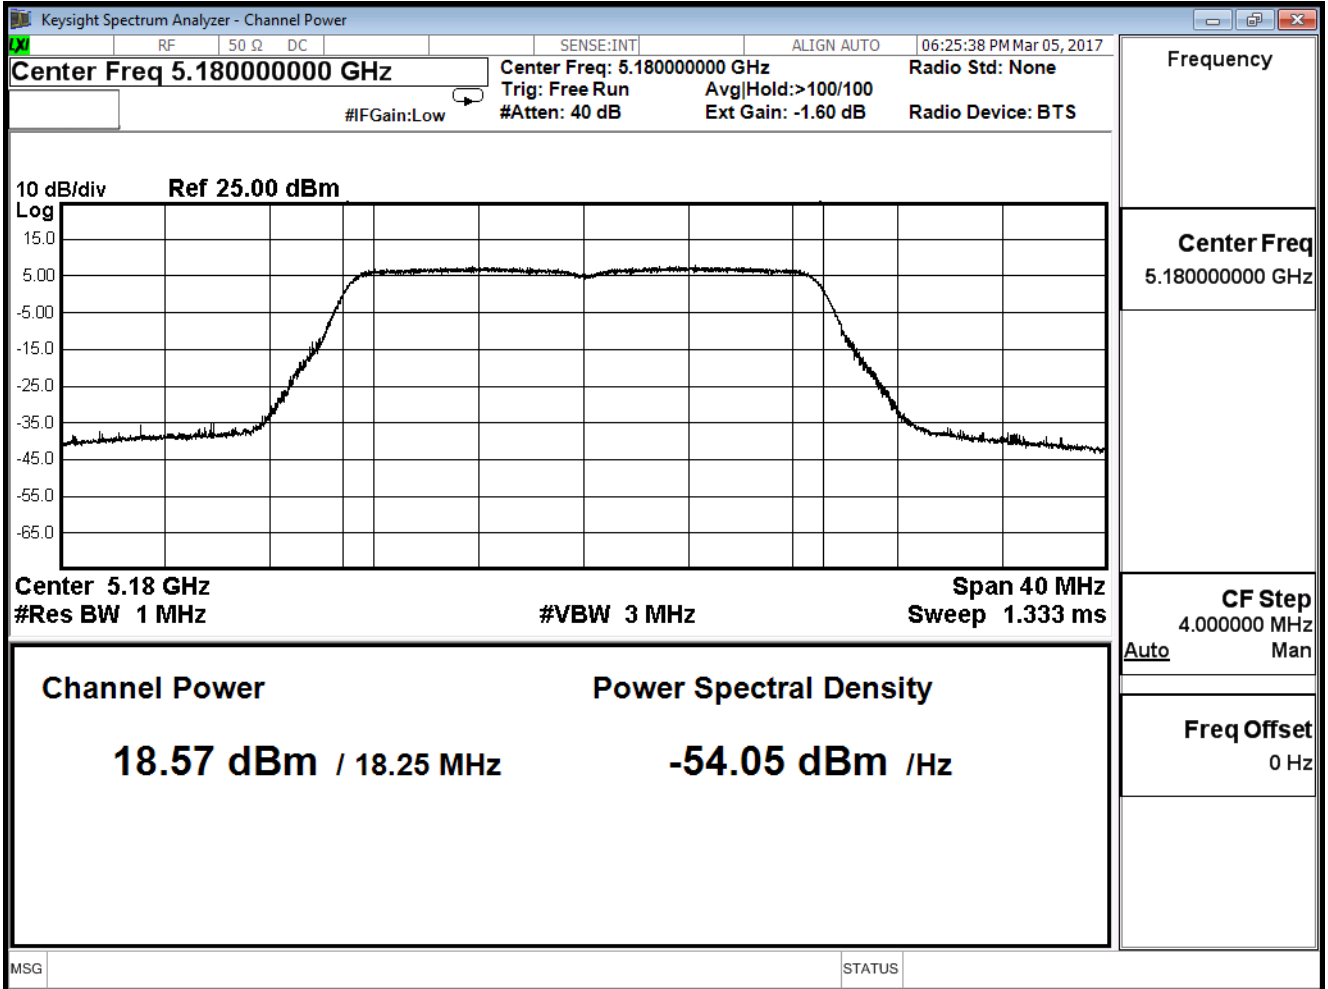

Peak transmit Power - Channel 44

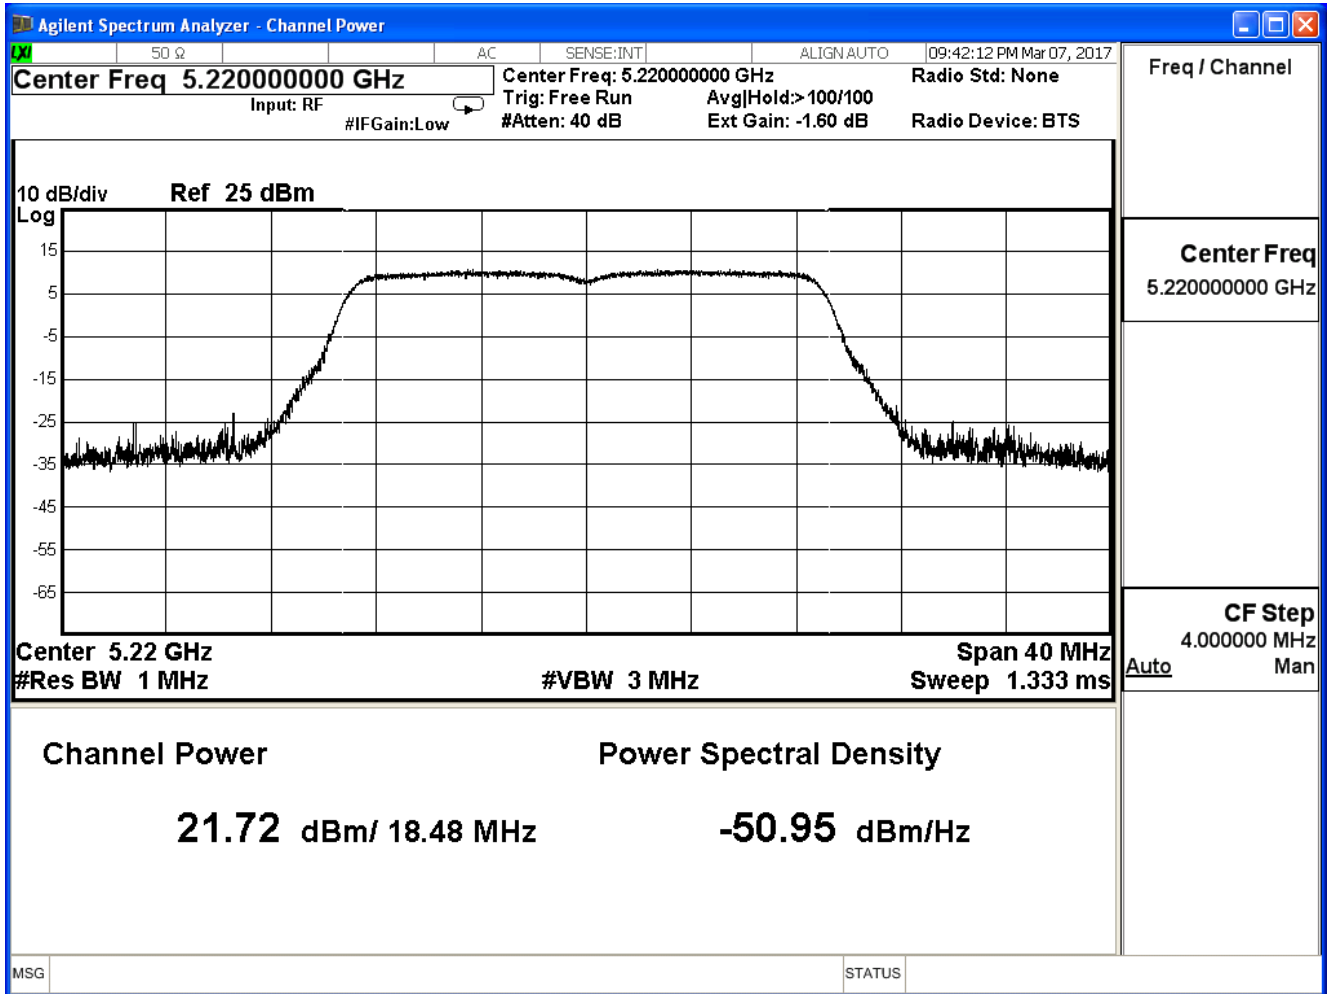

Peak transmit Power - Channel 48

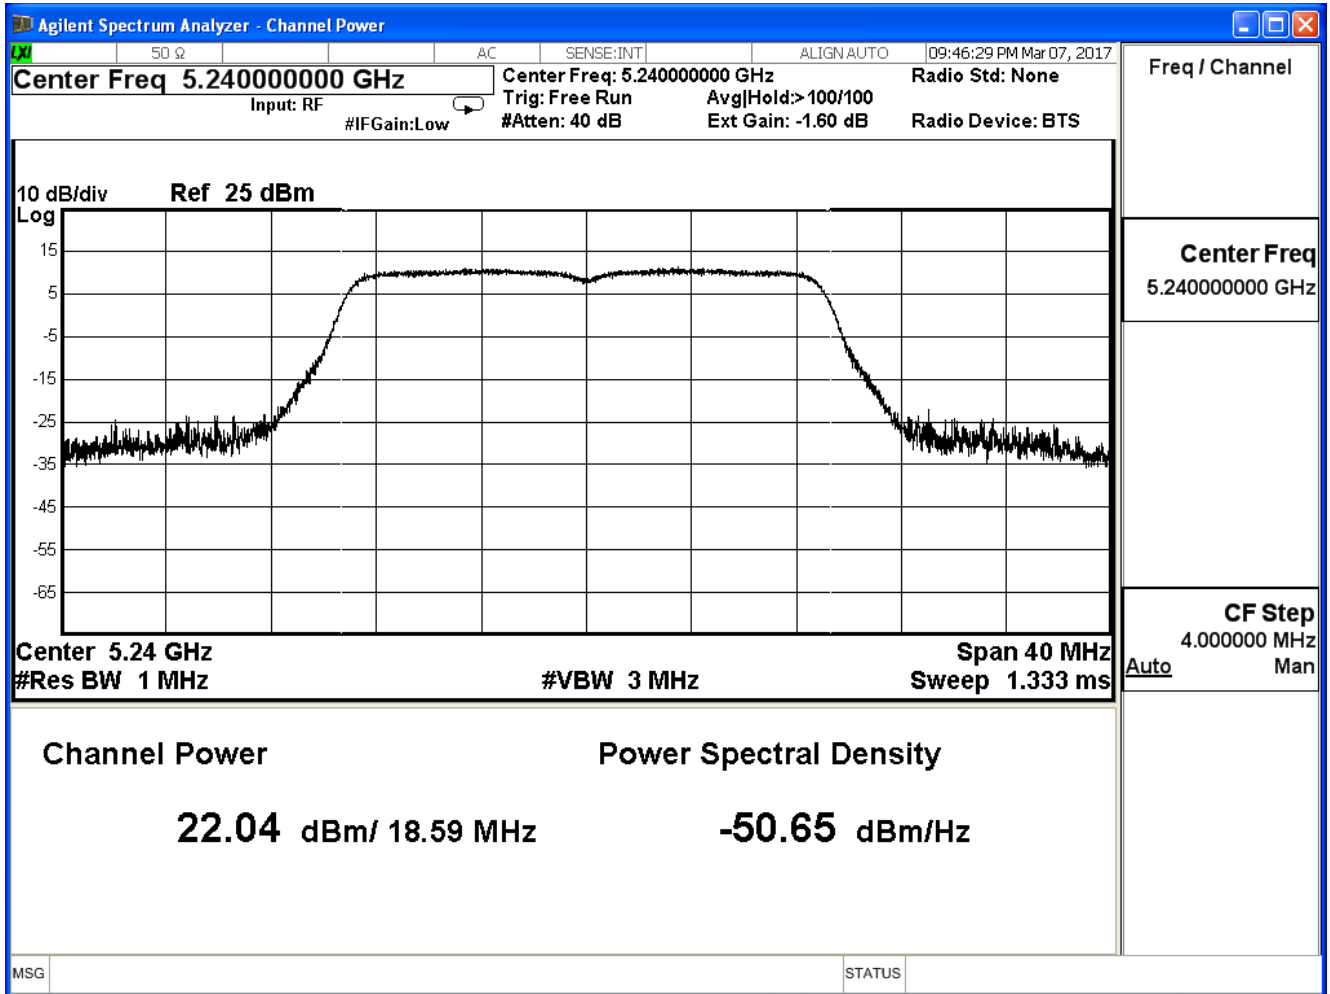

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	18.580	≤29.66
44	5220	21.750	≤29.66
48	5240	22.010	≤29.66


The worst emission of data rate is MCS 0

Peak Power Output (dBm)										
Channel No	Frequency (MHz)	MCS Index								Required Limit (dBm)
		0	1	2	3	4	5	6	7	
36	5180	18.580	--	--	--	--	--	--	--	≤29.66
44	5220	21.750	21.620	21.580	21.500	21.440	21.320	21.190	21.010	
48	5240	22.010	--	--	--	--	--	--	--	


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm


Peak transmit Power - Channel 36

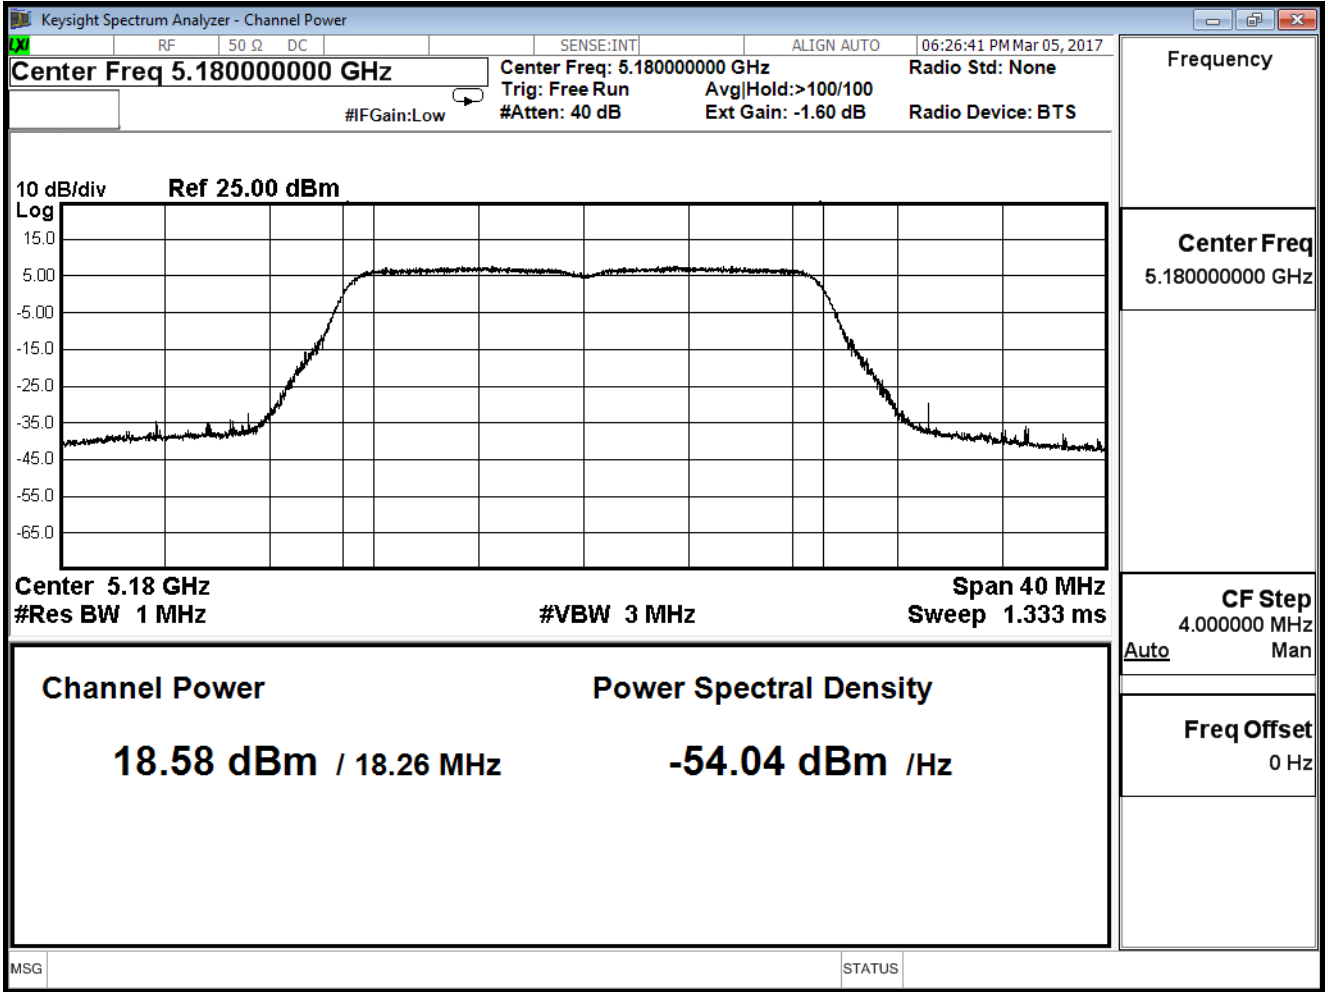

Peak transmit Power - Channel 44

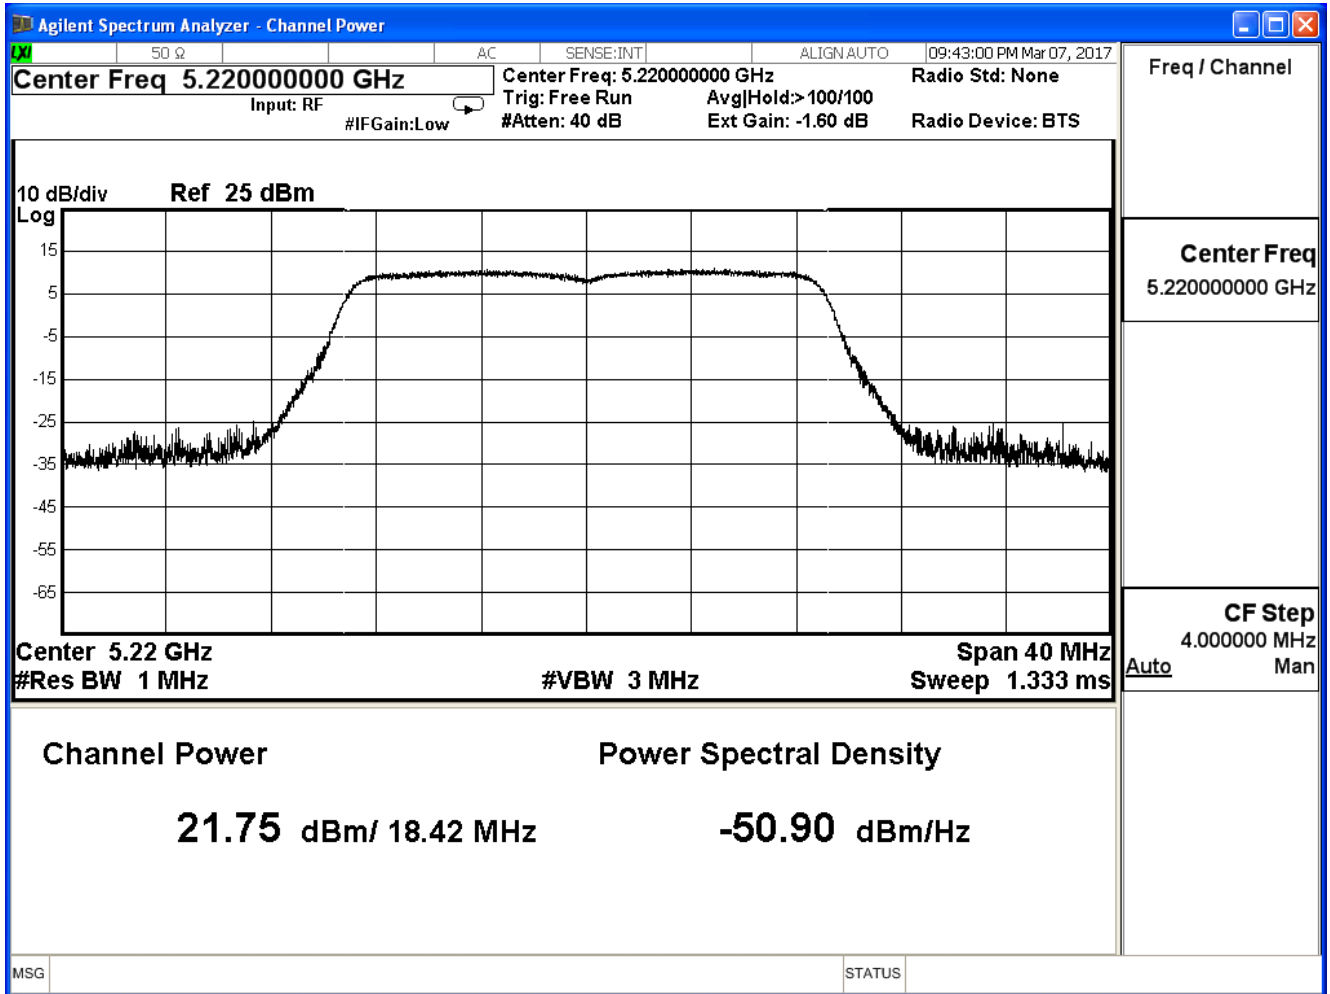

Peak transmit Power - Channel 48

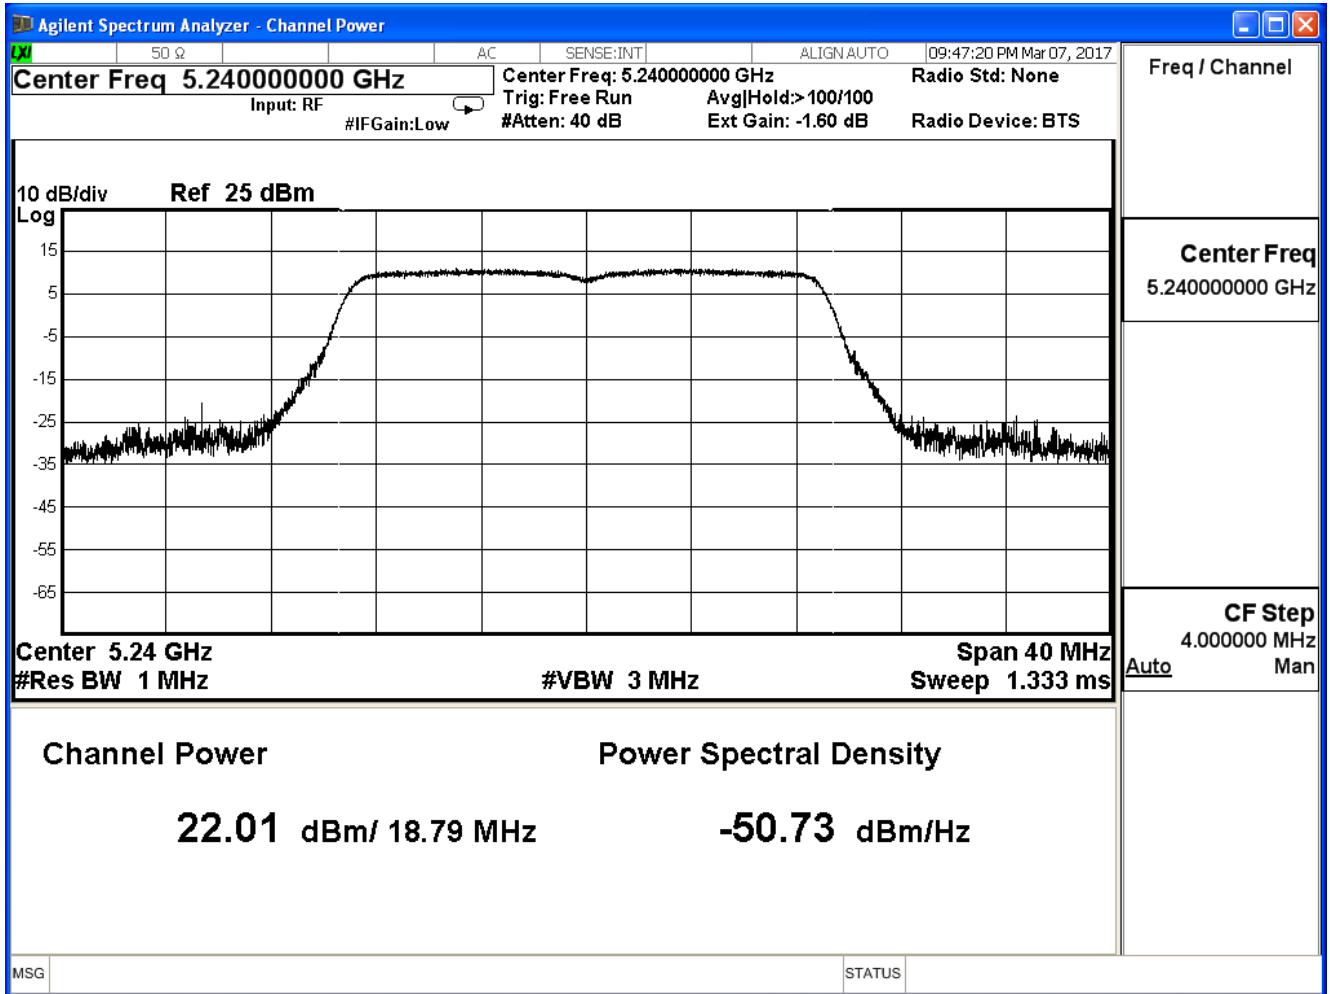

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 0+1+2+3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
36	5180	24.576	≤29.66
44	5220	27.741	≤29.66
48	5240	28.051	≤29.66

Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_ADP: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 0)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	14.880	≤29.66
46	5230	20.730	≤29.66


The worst emission of data rate is MCS 0

Channel No	Frequency (MHz)	MCS Index								Required Limit (dBm)
		0	1	2	3	4	5	6	7	
38	5190	14.880	--	--	--	--	--	--	--	≤29.66
46	5230	20.730	20.620	20.550	20.320	20.180	21.010	20.910	20.790	


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 38

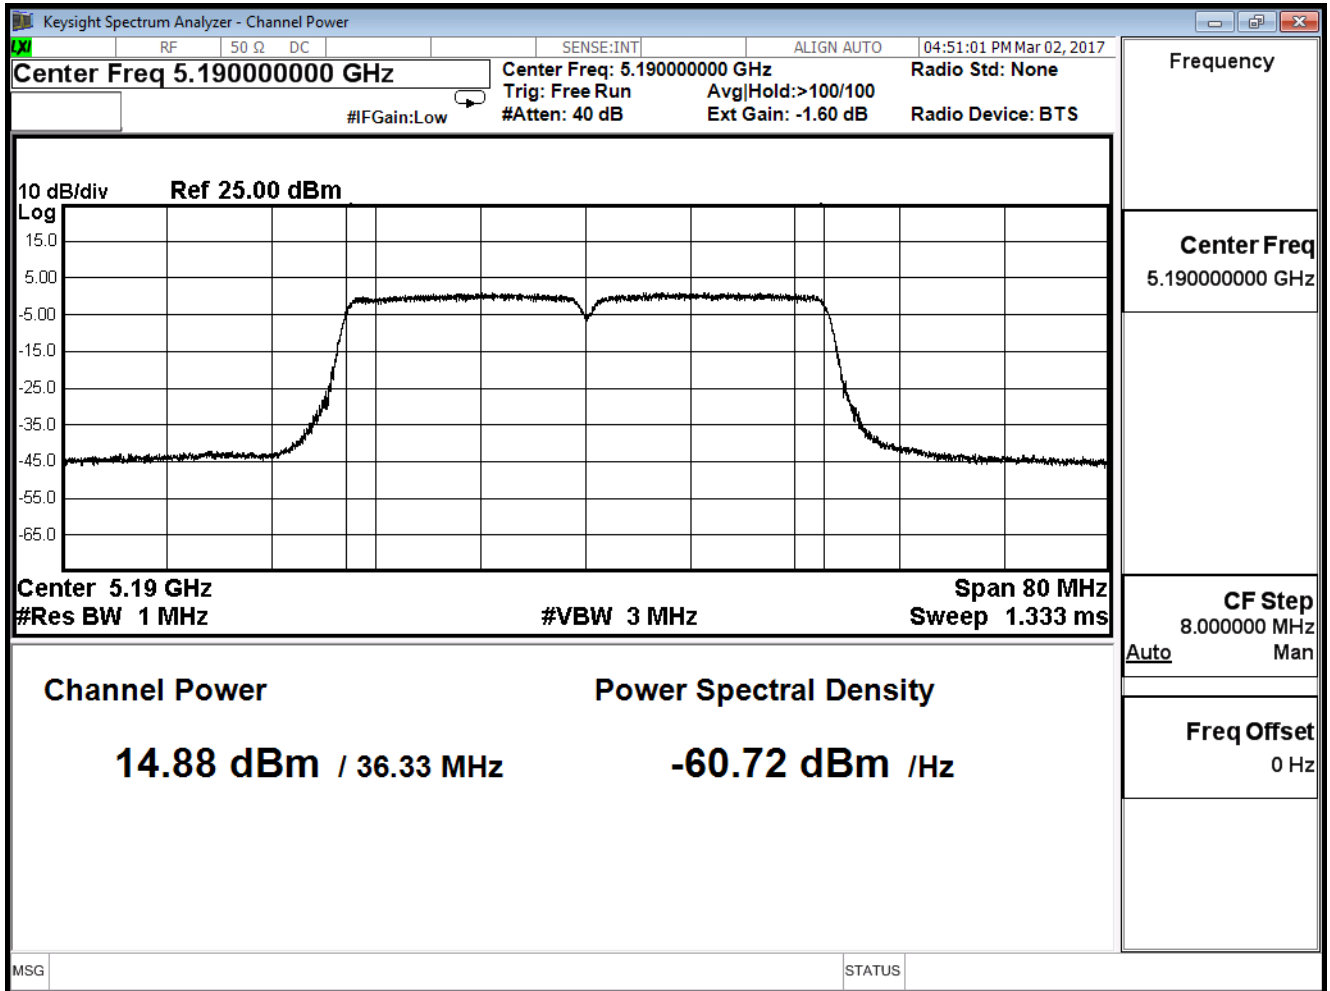

Peak transmit Power - Channel 46

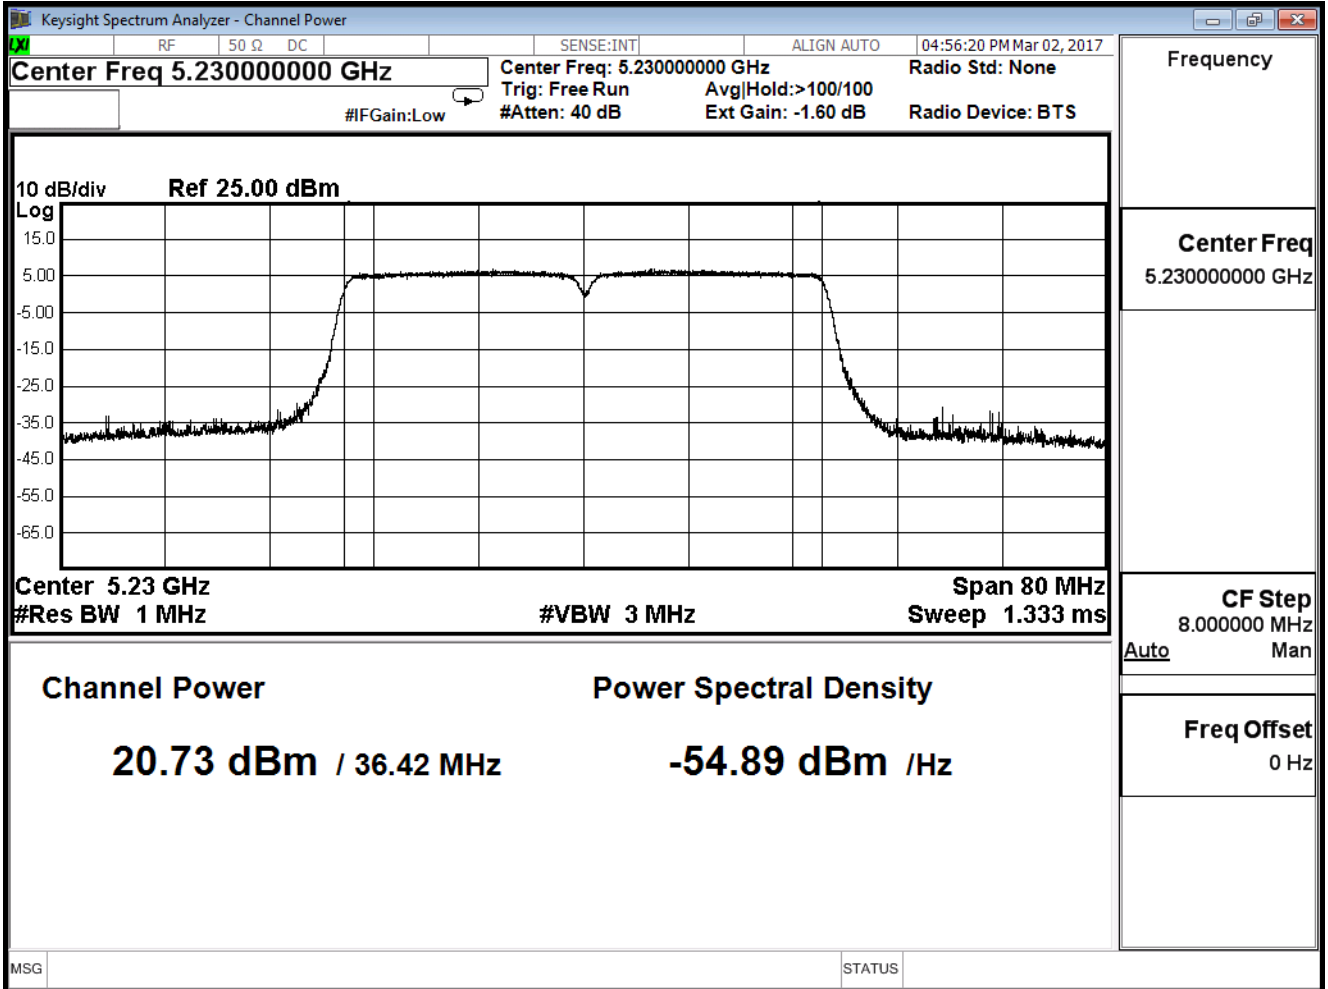

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_ADP: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	14.970	≤29.66
46	5230	20.690	≤29.66


The worst emission of data rate is MCS 0

Channel No	Frequency (MHz)	MCS Index								Required Limit (dBm)
		0	1	2	3	4	5	6	7	
38	5190	14.970	--	--	--	--	--	--	--	≤29.66
46	5230	20.690	20.550	20.420	20.220	20.110	20.010	19.890	19.770	


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 38

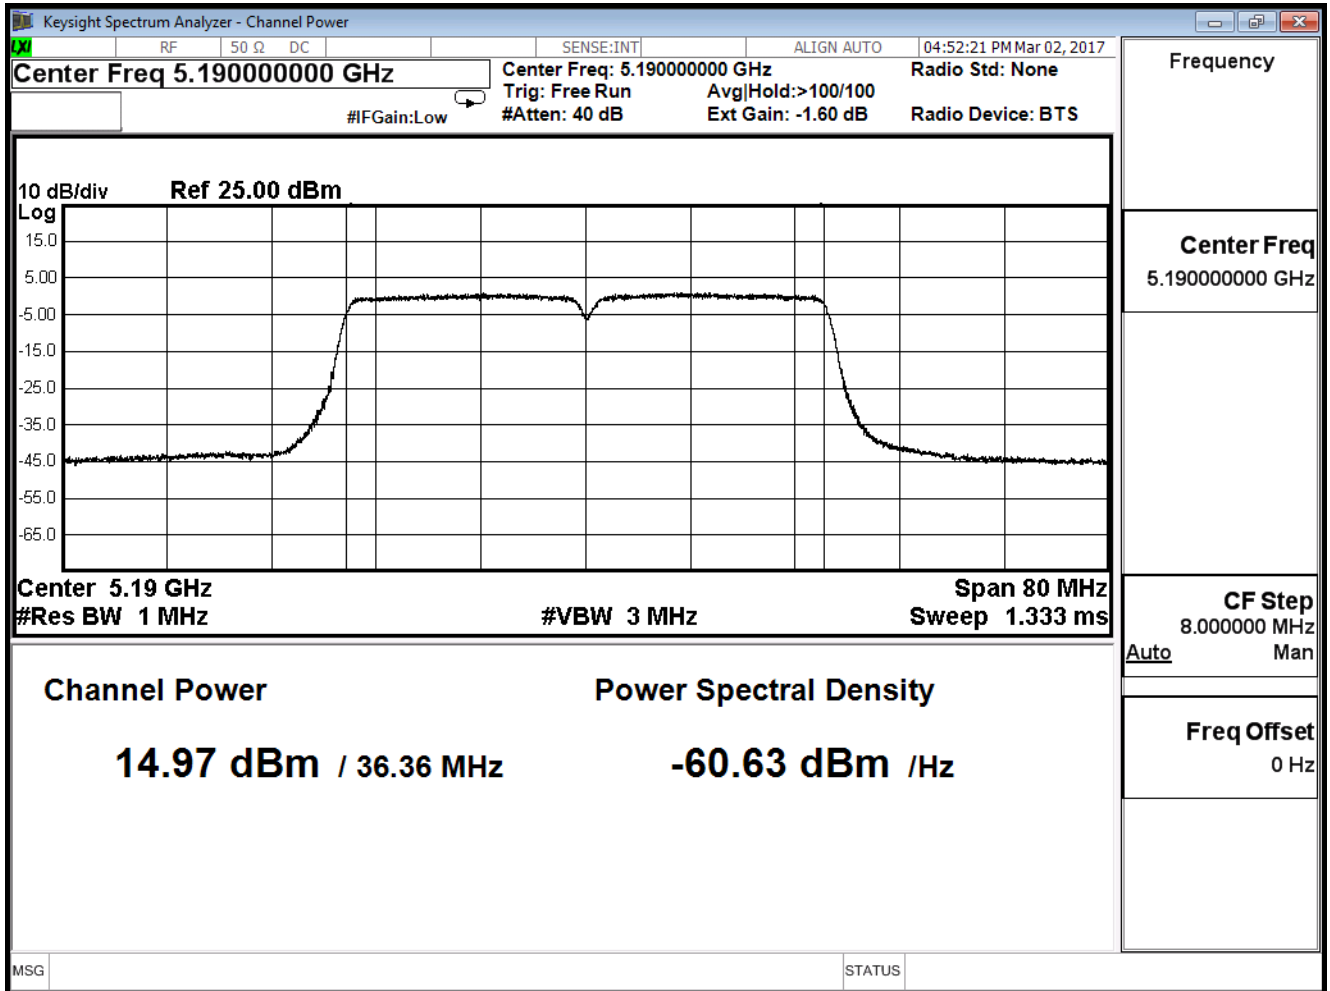

Peak transmit Power - Channel 46

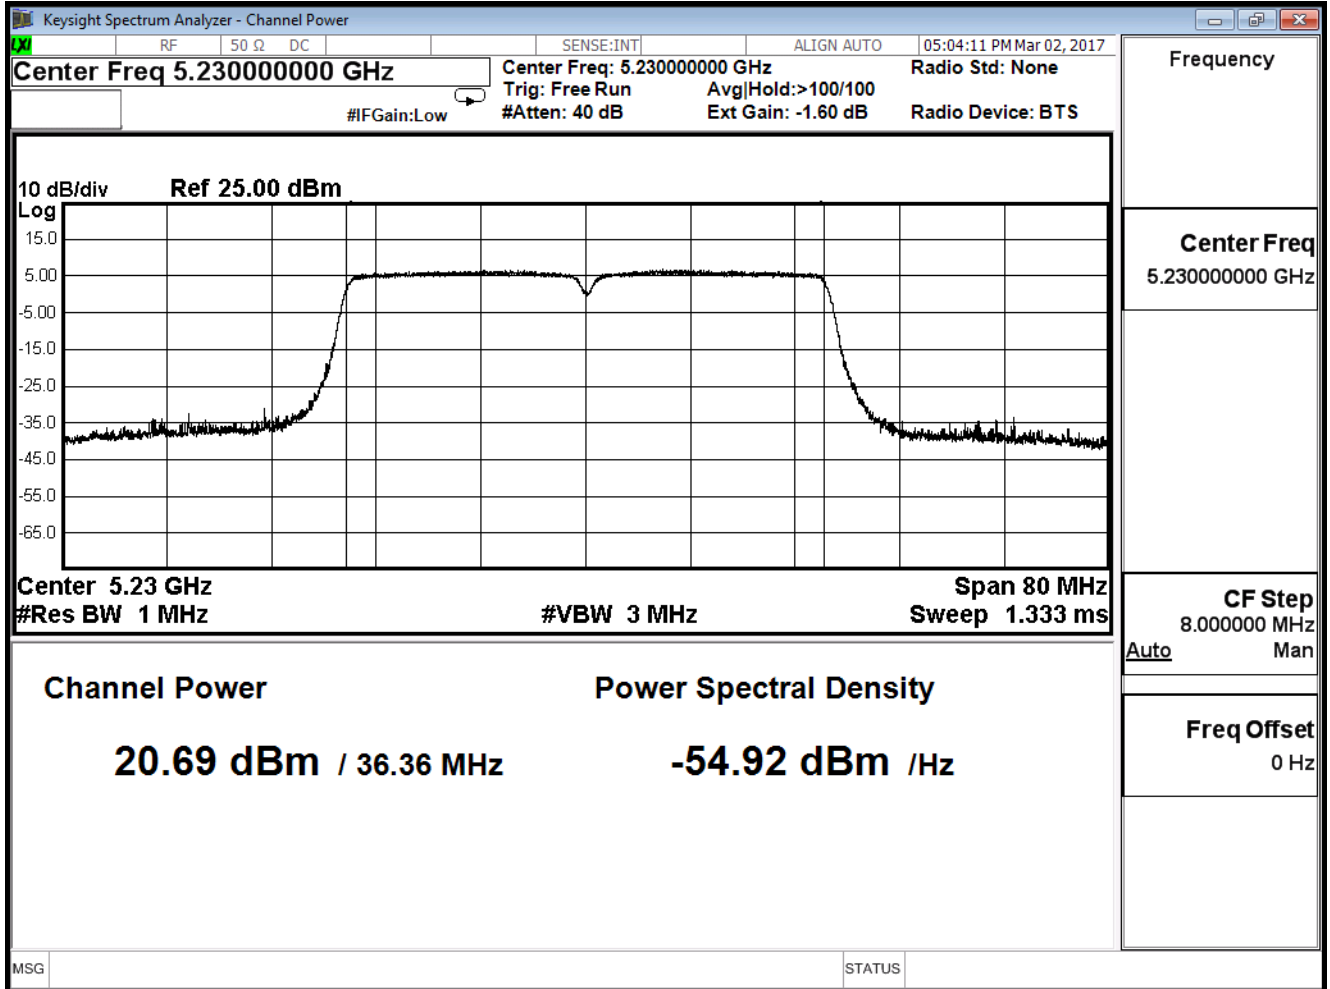

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	14.920	≤29.66
46	5230	20.670	≤29.66


The worst emission of data rate is MCS 0

Channel No	Frequency (MHz)	MCS Index								Required Limit (dBm)
		0	1	2	3	4	5	6	7	
38	5190	14.920	--	--	--	--	--	--	--	≤29.66
46	5230	20.670	20.550	20.440	20.130	20.020	19.890	19.720	19.660	


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 38

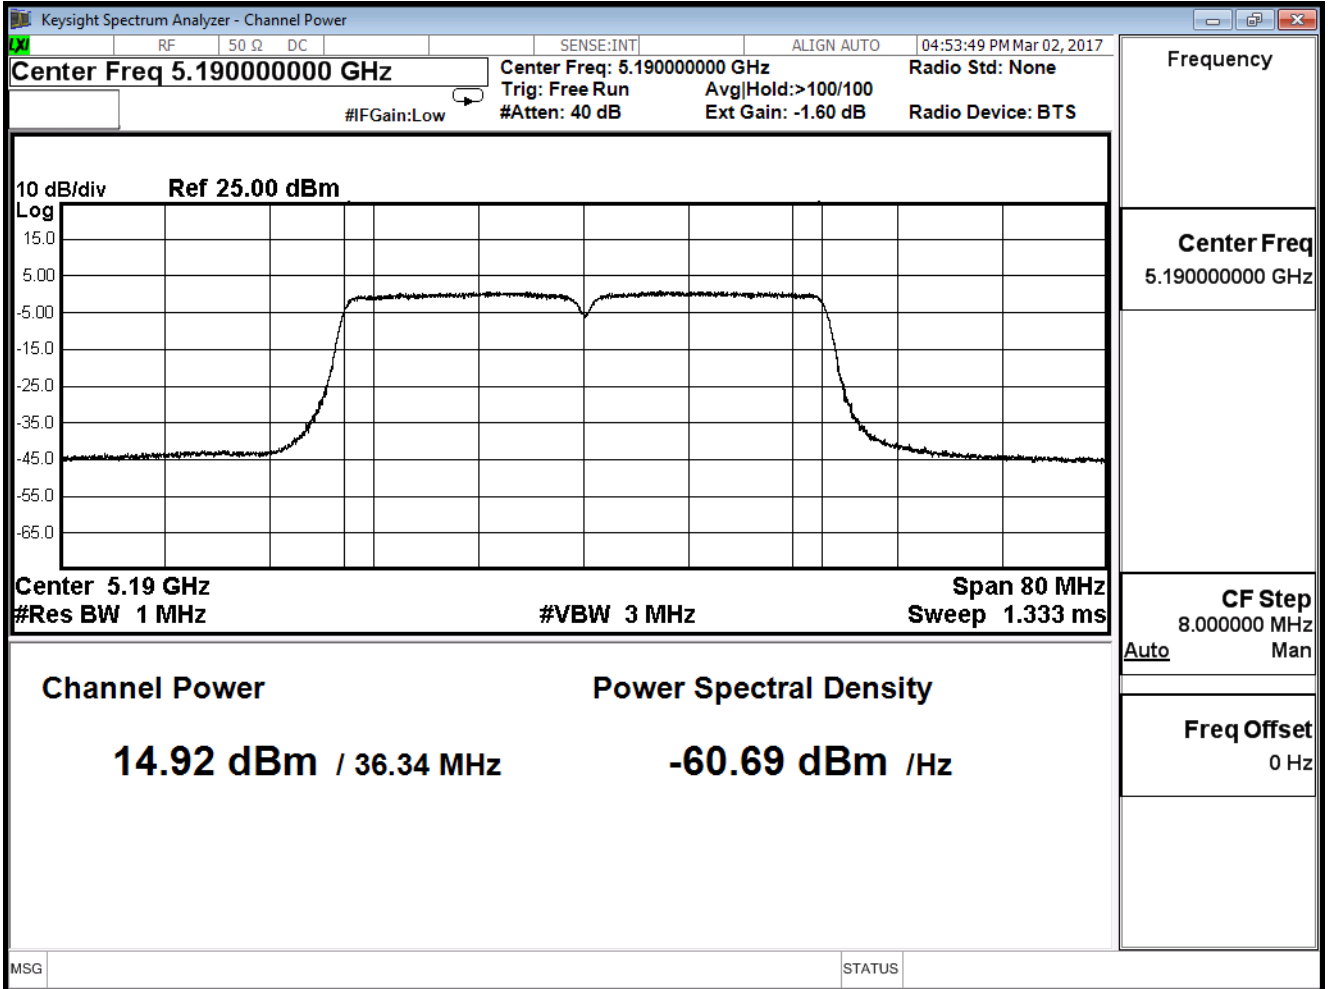

Peak transmit Power - Channel 46

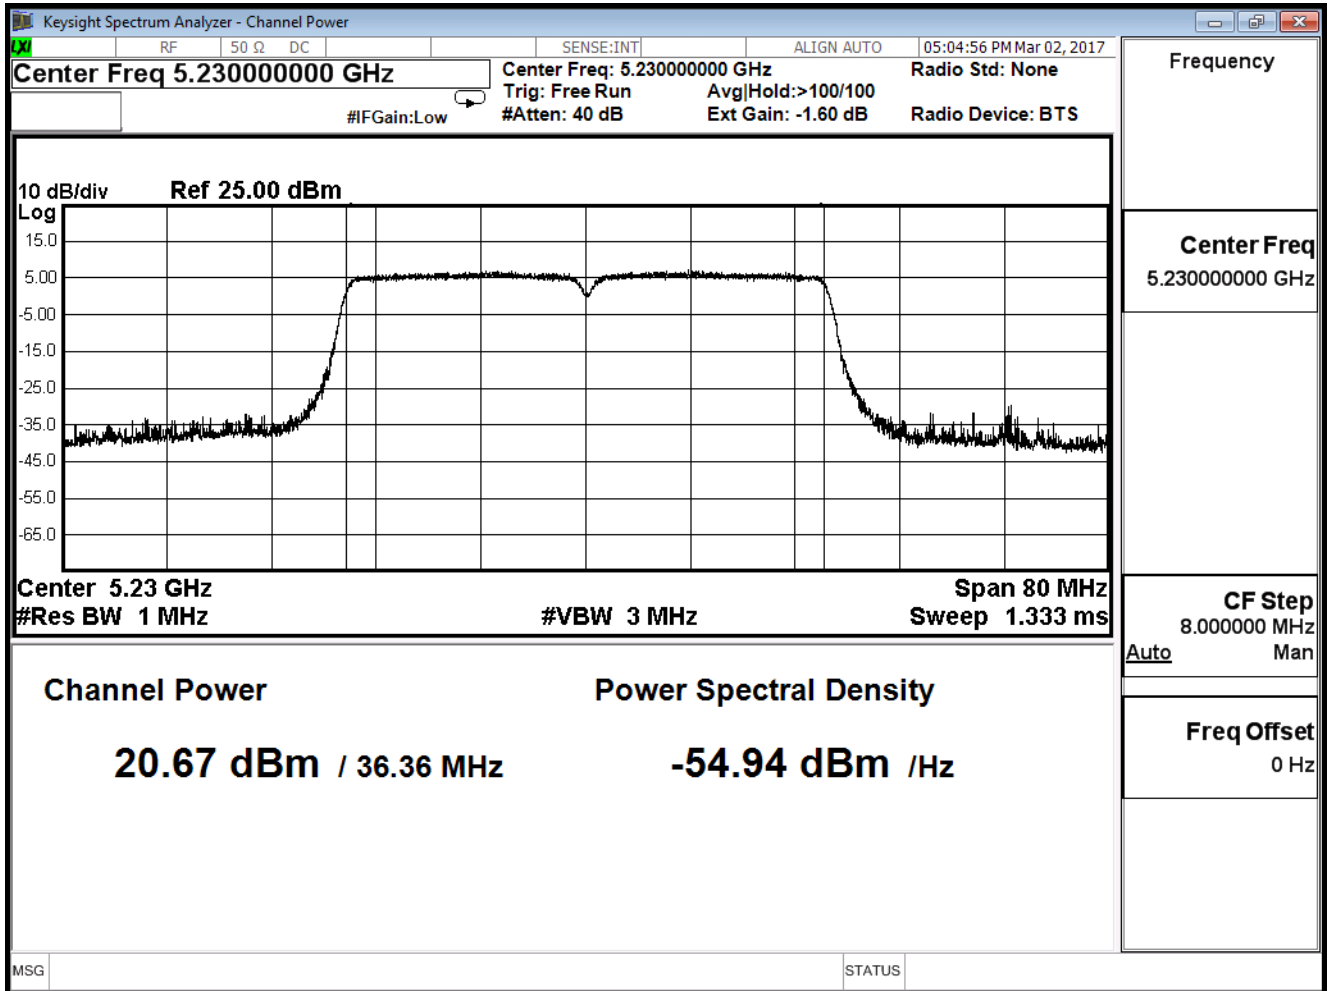

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_ADP: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	14.900	≤29.66
46	5230	20.660	≤29.66


The worst emission of data rate is MCS 0

Channel No	Frequency (MHz)	MCS Index								Required Limit (dBm)
		0	1	2	3	4	5	6	7	
38	5190	14.900	--	--	--	--	--	--	--	≤29.66
46	5230	20.660	20.600	20.440	20.320	20.110	20.020	19.900	19.770	


Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 38

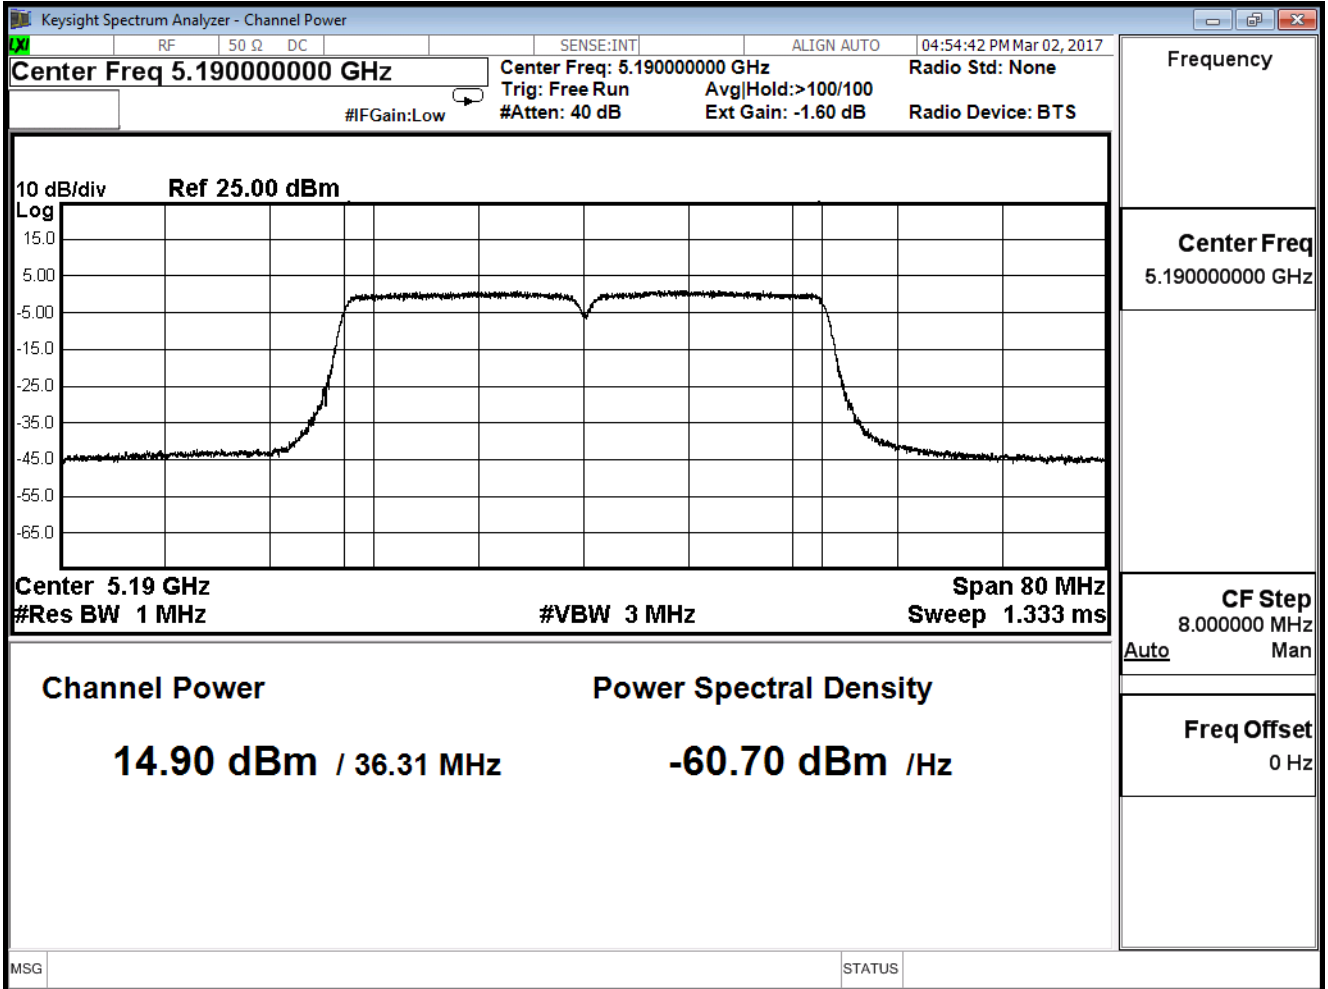

Peak transmit Power - Channel 46

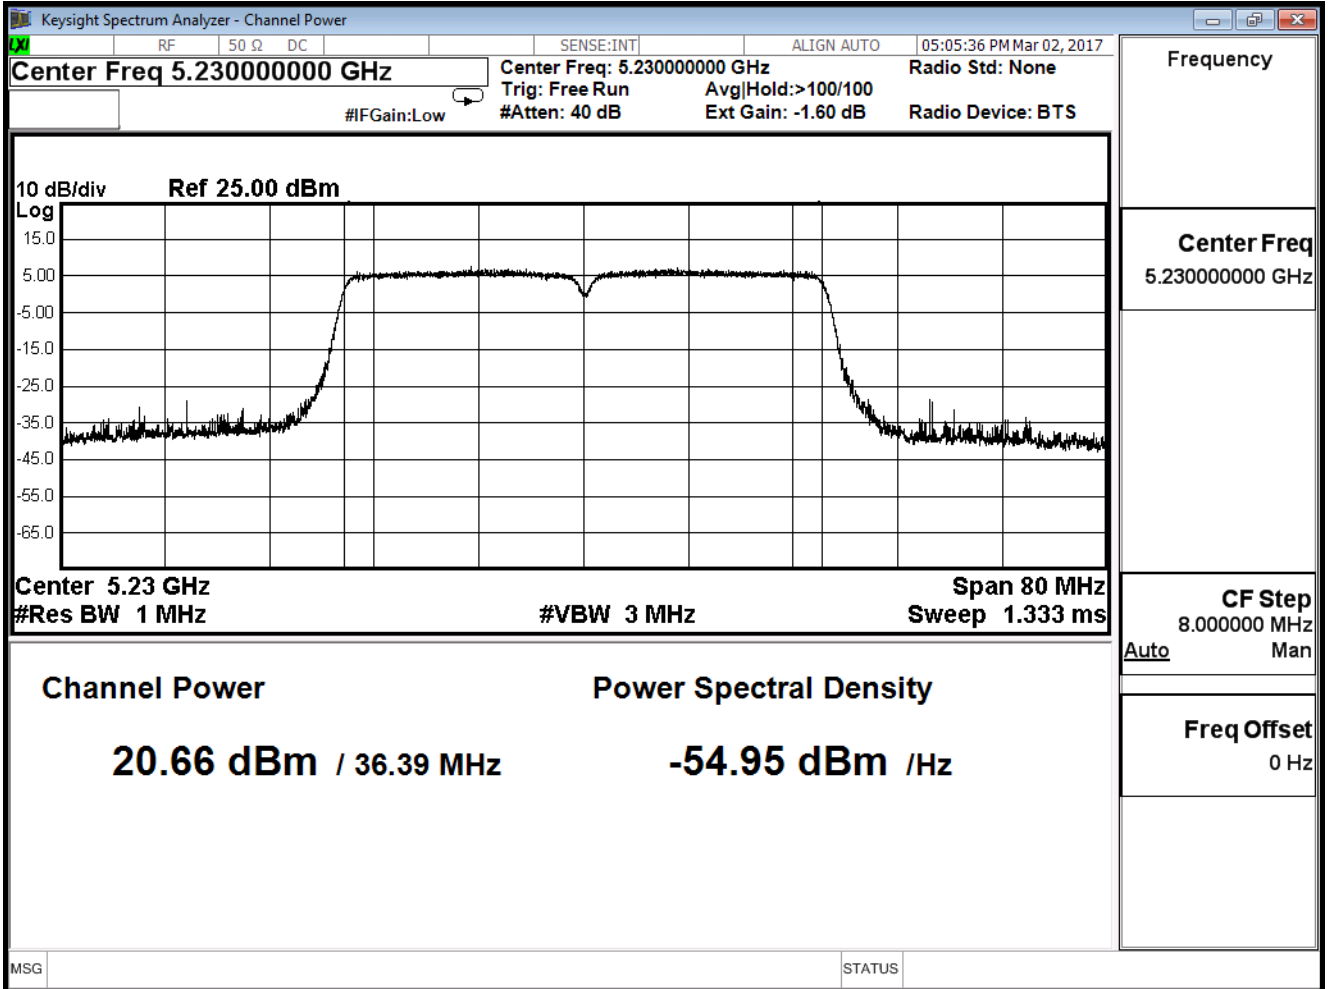

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 0+1+2+3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
38	5190	20.938	≤29.66
46	5230	26.708	≤29.66

Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11ac(80MHz) (ANT 0)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	15.070	≤29.66


The worst emission of data rate is MCS0

Channel No	Frequency (MHz)	MCS Index										Required Limit (dBm)
		0	1	2	3	4	5	6	7	8	9	
42	5210	15.070	14.920	14.720	14.550	14.320	14.110	14.000	13.880	13.710	13.550	≤29.66

Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 42

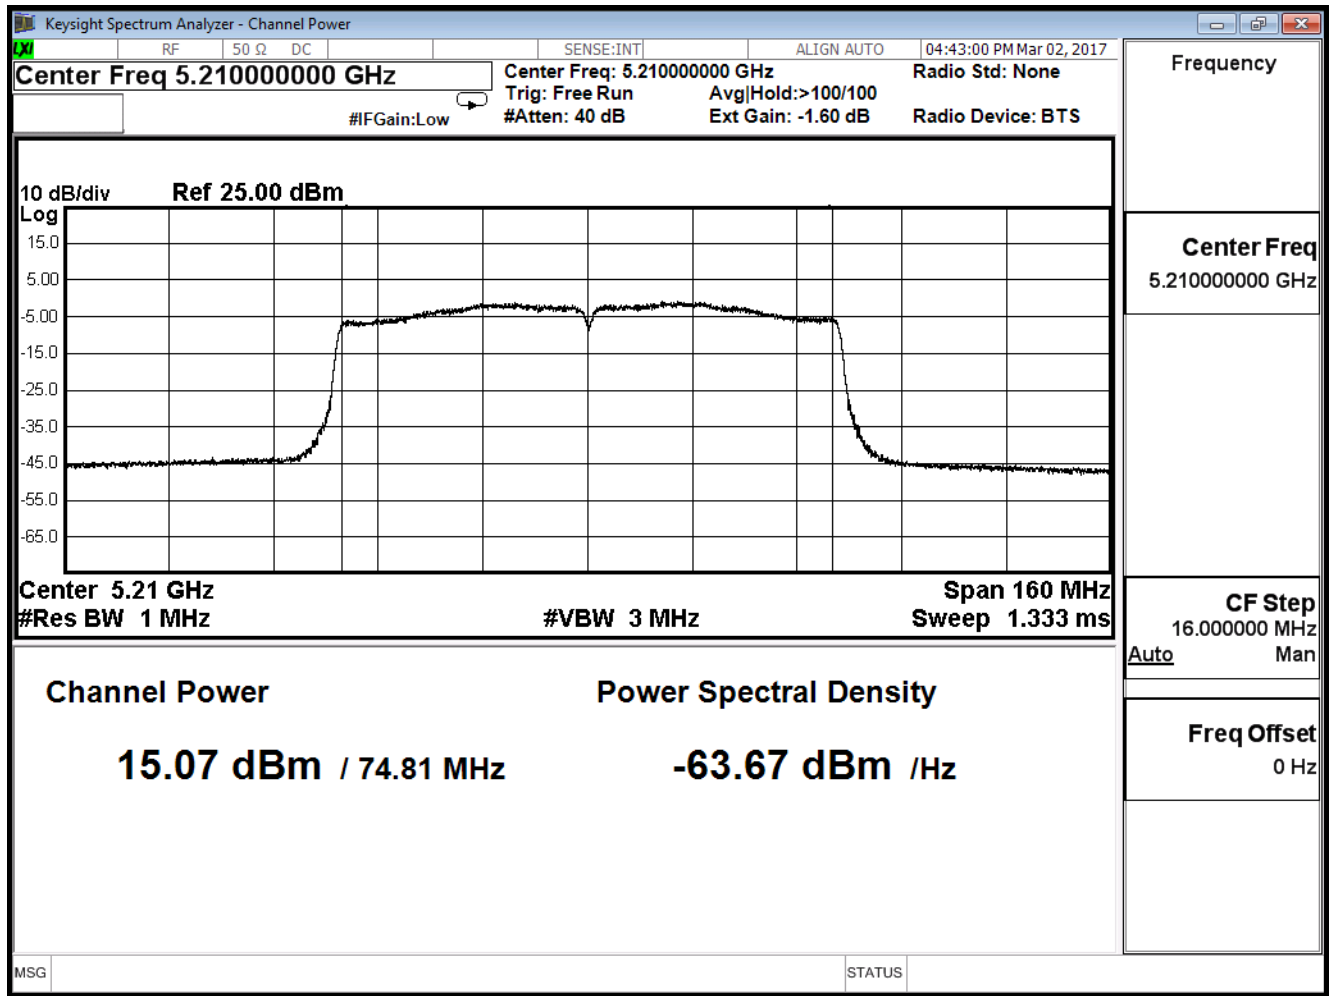

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11ac(80MHz) (ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	15.110	≤29.66


The worst emission of data rate is MCS0

Channel No	Frequency (MHz)	MCS Index										Required Limit (dBm)
		0	1	2	3	4	5	6	7	8	9	
42	5210	15.110	15.020	14.890	14.680	14.320	14.110	14.020	13.900	13.680	13.550	≤29.66

Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 42

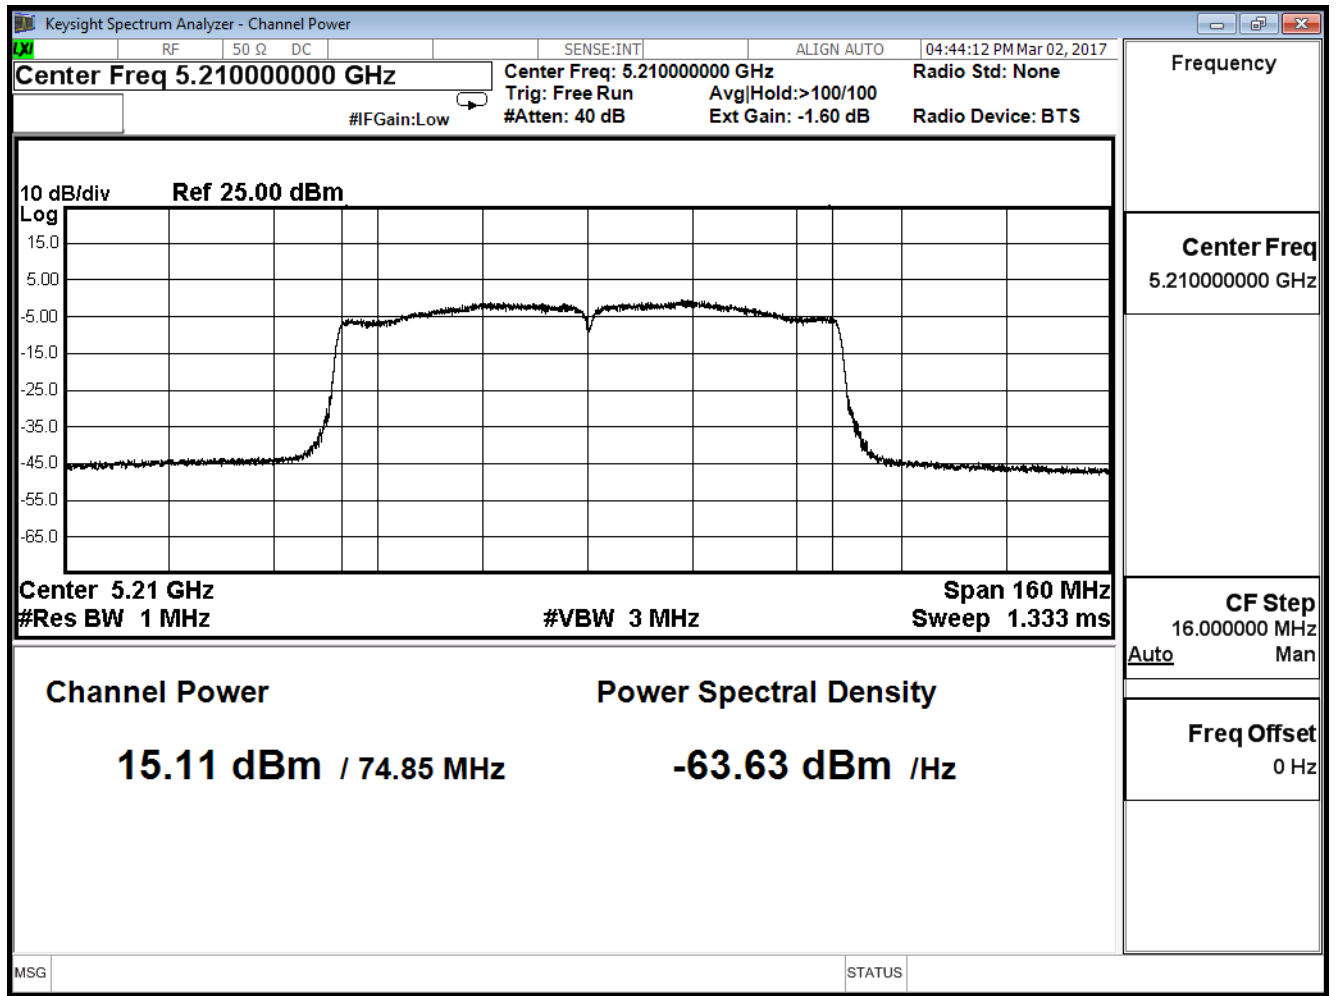

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11ac(80MHz) (ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	15.150	≤29.66


The worst emission of data rate is MCS0

Channel No	Frequency (MHz)	MCS Index										Required Limit (dBm)
		0	1	2	3	4	5	6	7	8	9	
42	5210	15.150	15.010	14.890	14.700	14.510	14.330	14.080	13.920	13.770	13.550	≤29.66

Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 42

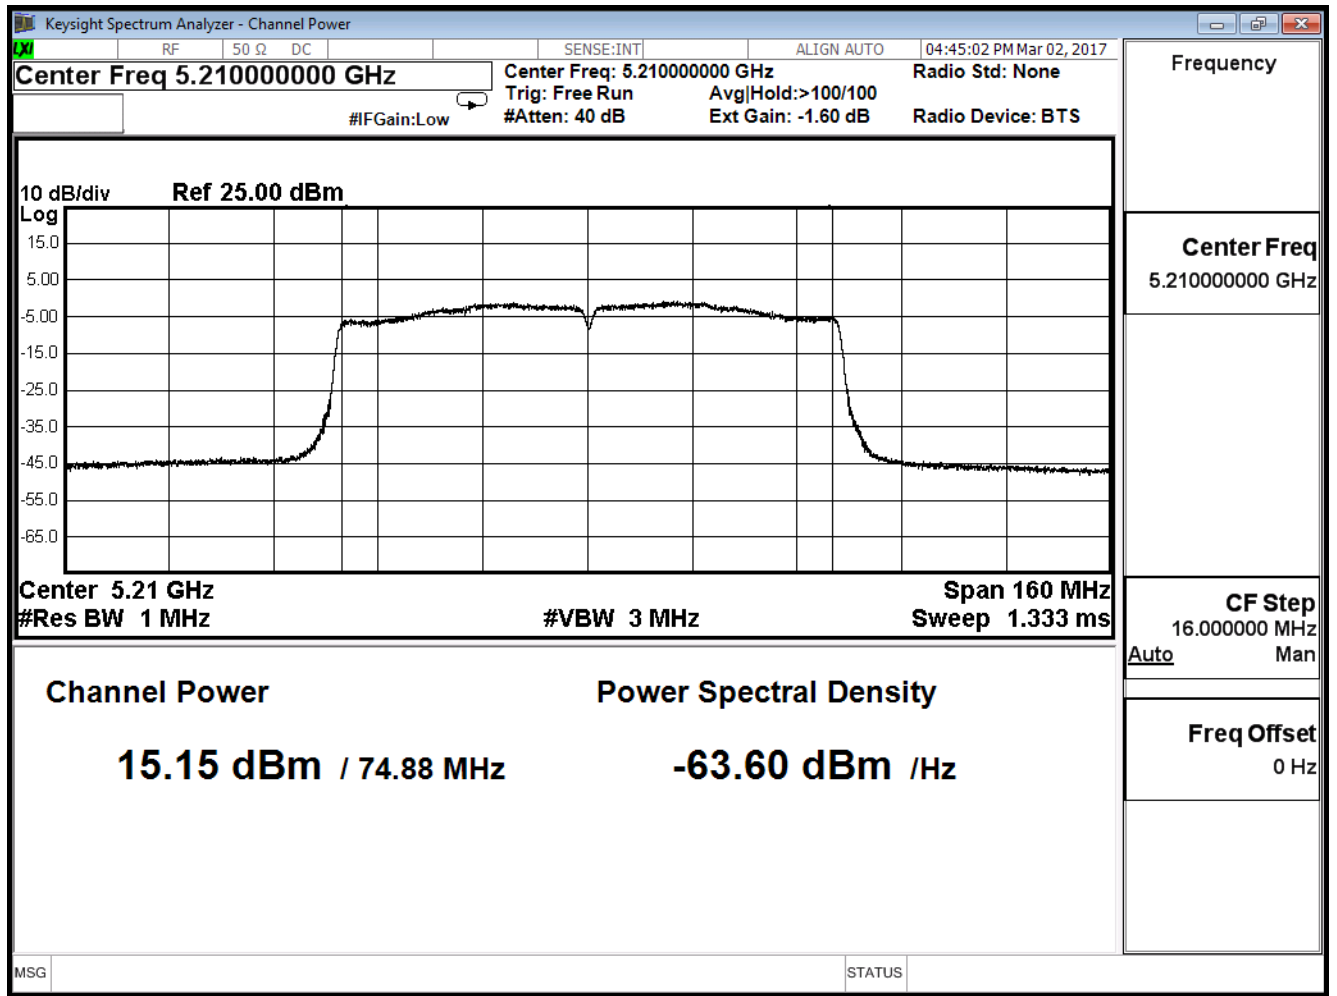

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11ac(80MHz) (ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	15.190	≤29.66


The worst emission of data rate is MCS0

Channel No	Frequency (MHz)	MCS Index										Required Limit (dBm)
		0	1	2	3	4	5	6	7	8	9	
42	5210	15.190	15.000	14.900	14.770	14.580	14.320	14.180	14.000	13.920	13.760	≤29.66

Directional gain=10log(ANT N)+Gain=4.77+1.57=6.34

Limit =30dBm-(6.34dBi-6dBi)=29.66dBm

Peak transmit Power - Channel 42

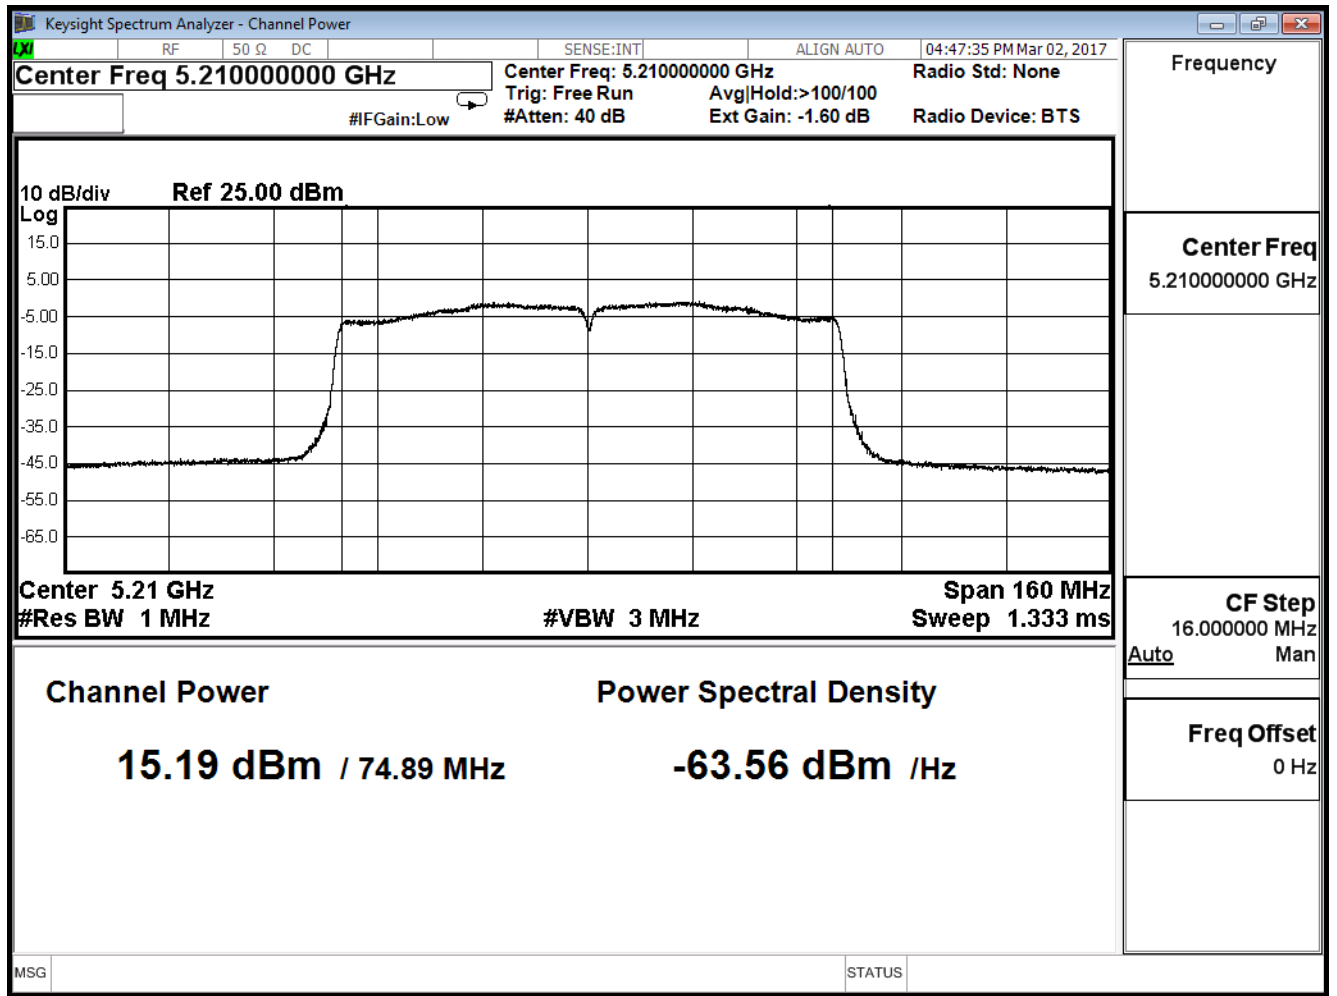

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/03/02	Test Site	SR10-H

IEEE 802.11ac(80MHz)(ANT 0+1+2+3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
42	5210	21.151	≤29.66

$$\text{Directional gain} = 10 \log(\text{ANT N}) + \text{Gain} = 4.77 + 1.57 = 6.34$$

$$\text{Limit} = 30 \text{dBm} - (6.34 \text{dBi} - 6 \text{dBi}) = 29.66 \text{dBm}$$


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Tx_AD P: AD890326010-2LF_ CDD Mode (802.11 a)		
Date of Test	2017/05/23	Test Site	SR10-H

802.11a (ANT 0)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	15.300	≤ 24
60	5300	15.720	≤ 24
64	5320	15.900	≤ 24

The worst emission of data rate is 6 Mbps.

Channel 52 (5260MHz)

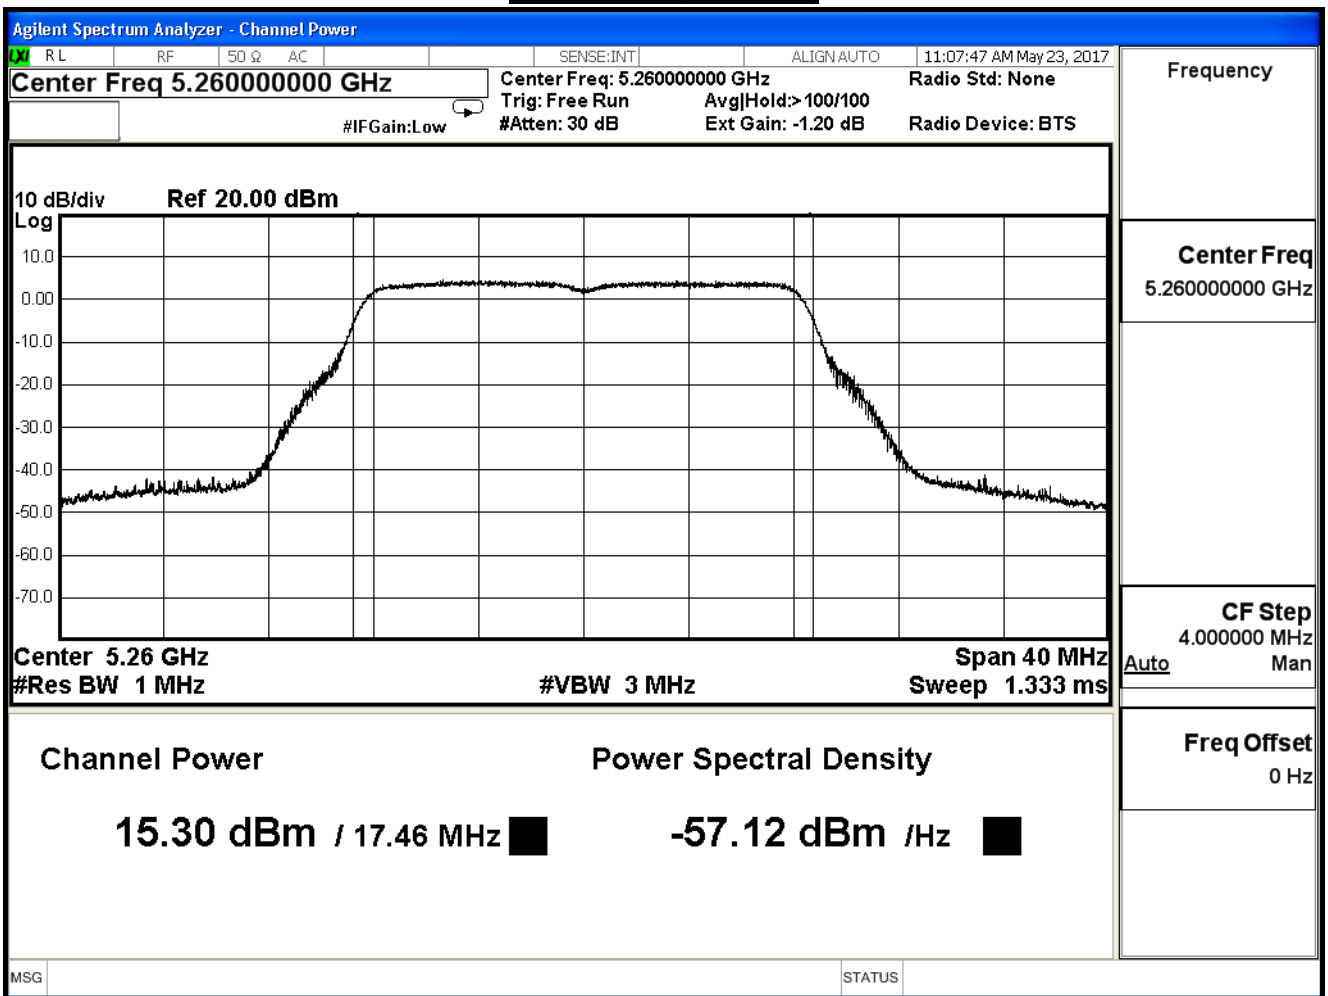


Channel 60 (5300MHz)

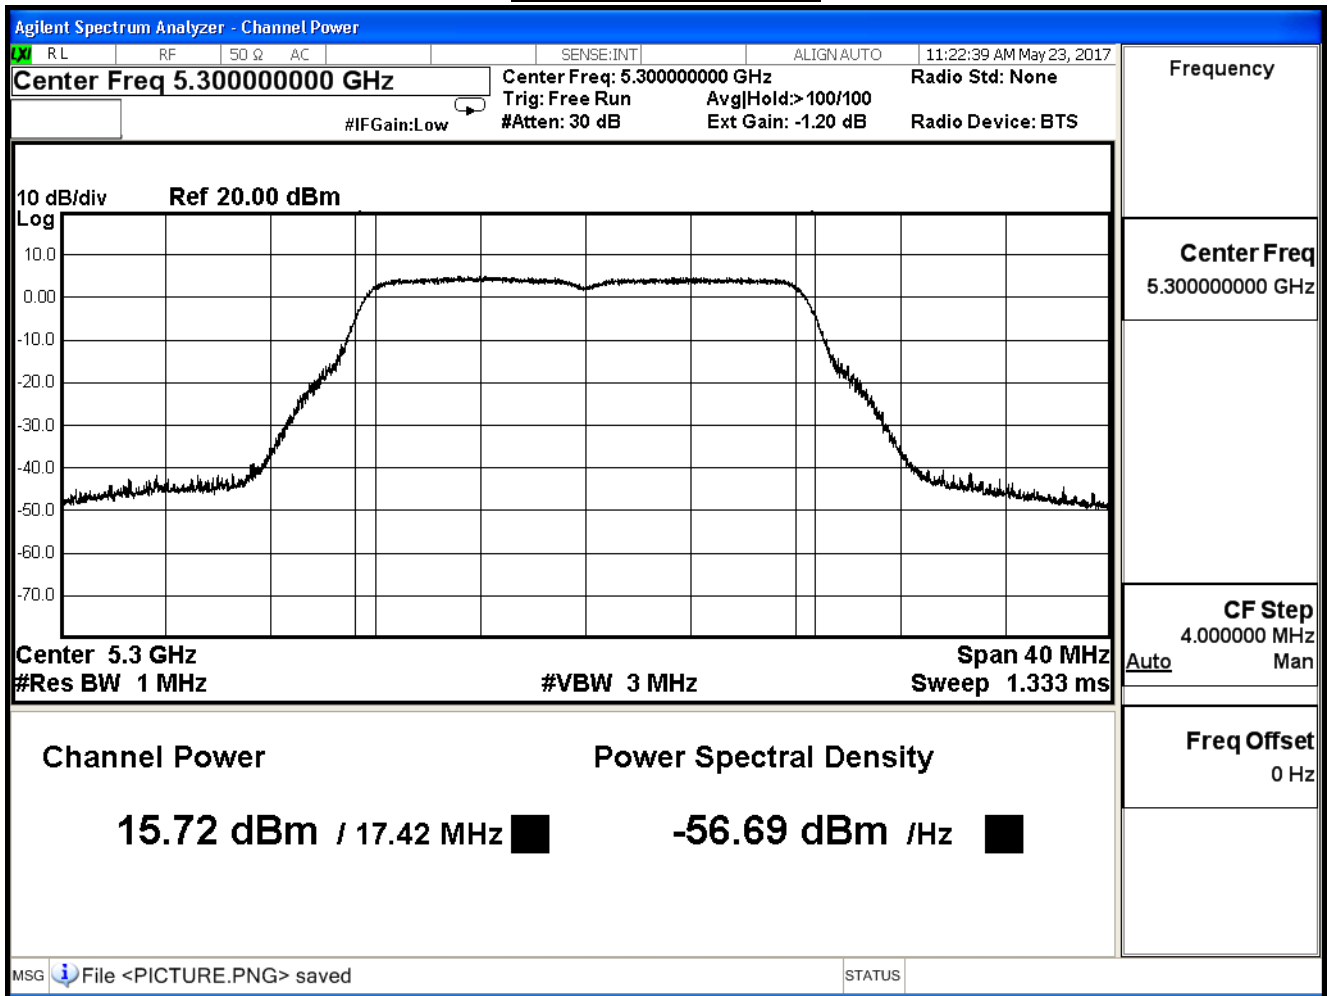

Frequency
Center Freq 5.300000000 GHz
CF Step 4.000000 MHz Auto Man
Freq Offset 0 Hz

Channel 64 (5320MHz)

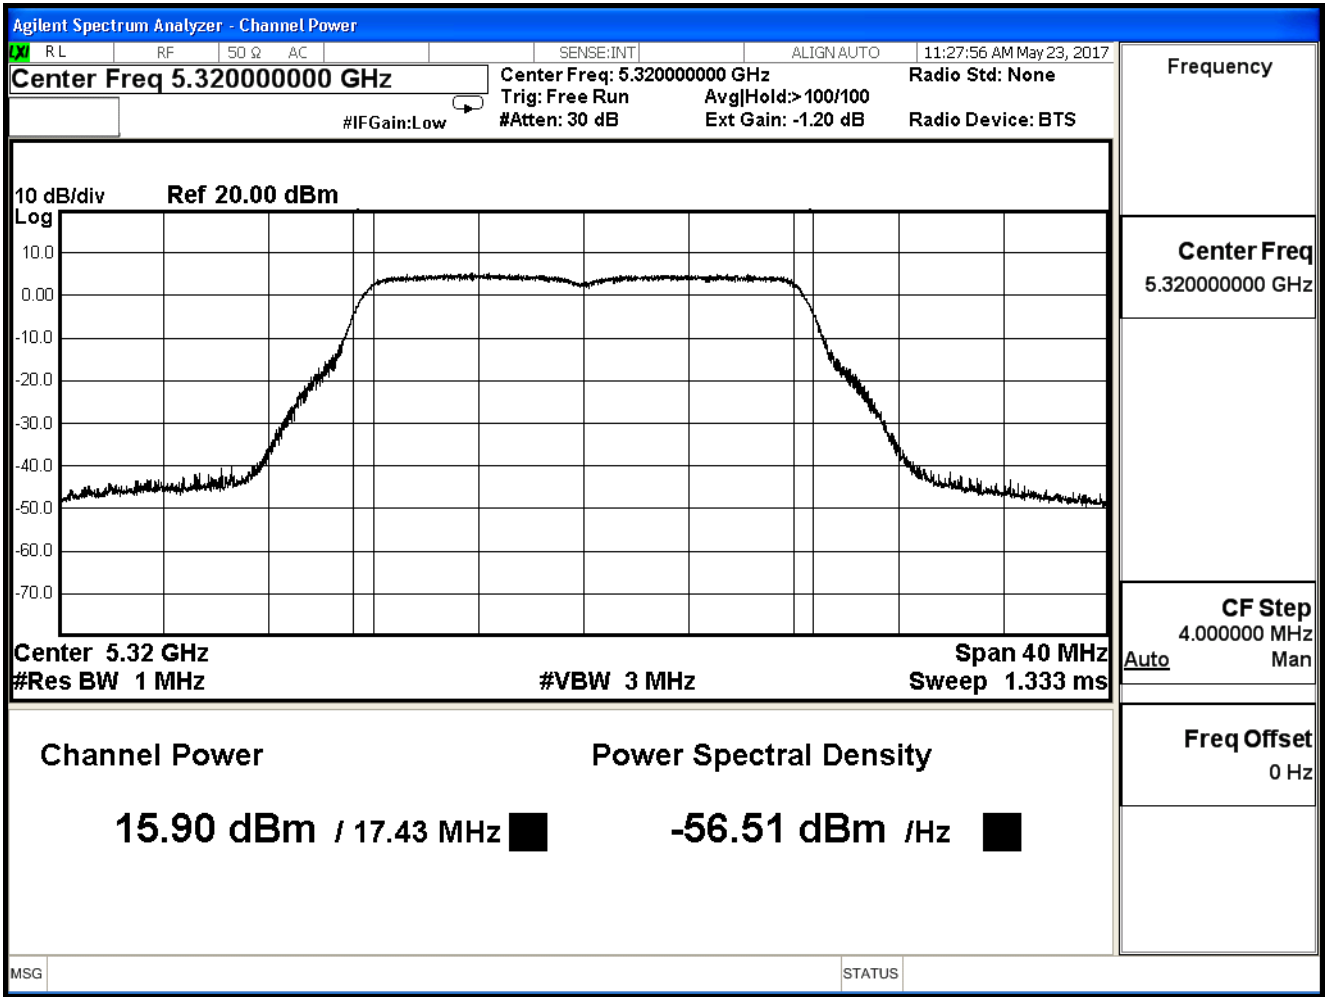


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Tx_ADP: AD890326010-2LF_ CDD Mode (802.11 a)		
Date of Test	2017/05/23	Test Site	SR10-H

802.11a (ANT 1)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	15.280	≤ 24
60	5300	15.760	≤ 24
64	5320	16.020	≤ 24

The worst emission of data rate is 6 Mbps.


Channel 52 (5260MHz)

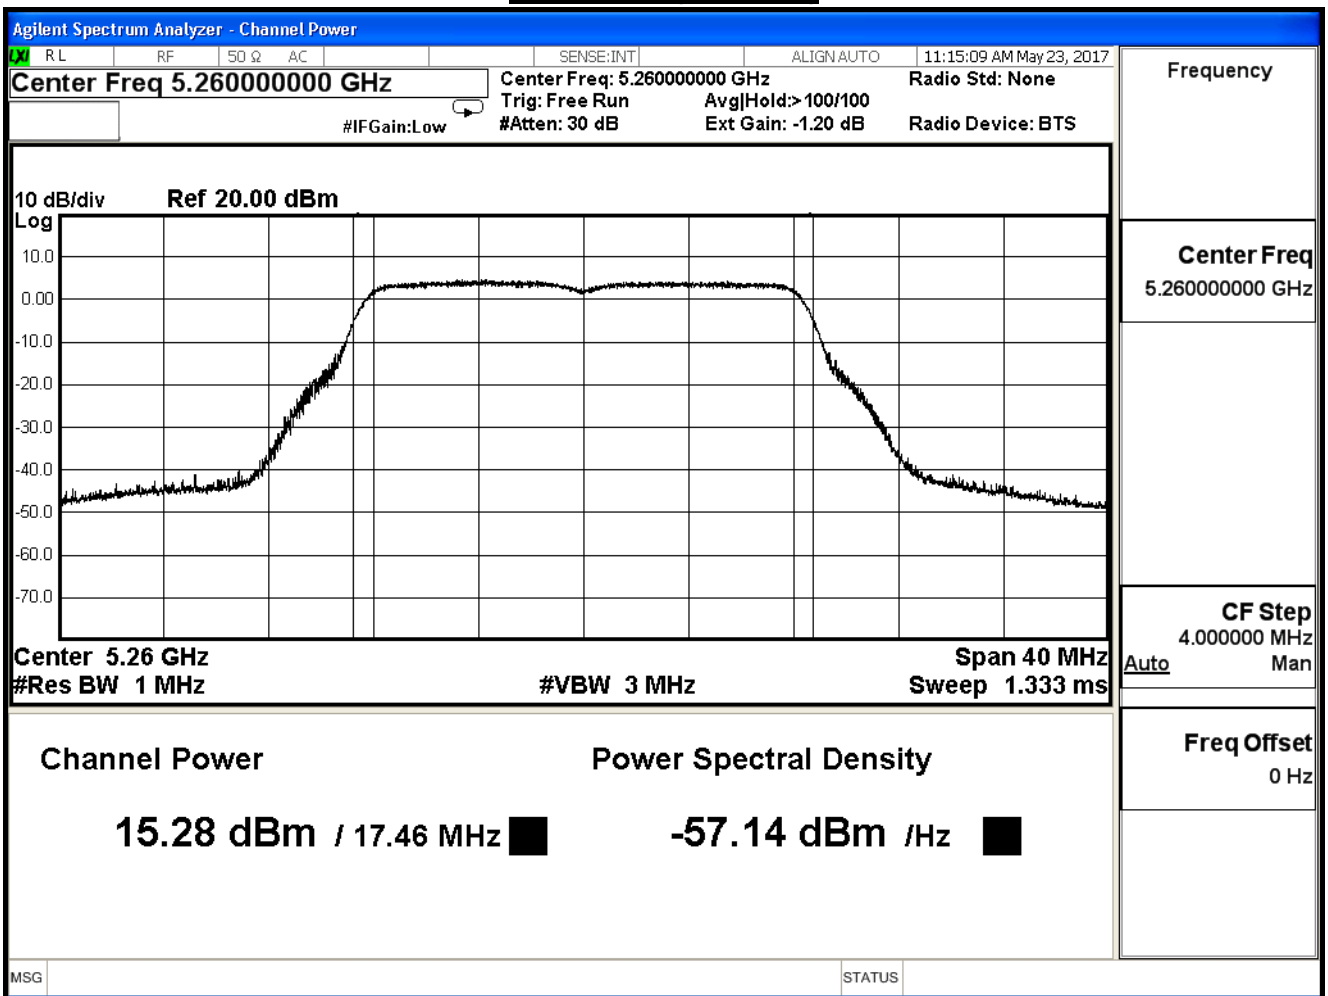

Channel 60 (5300MHz)

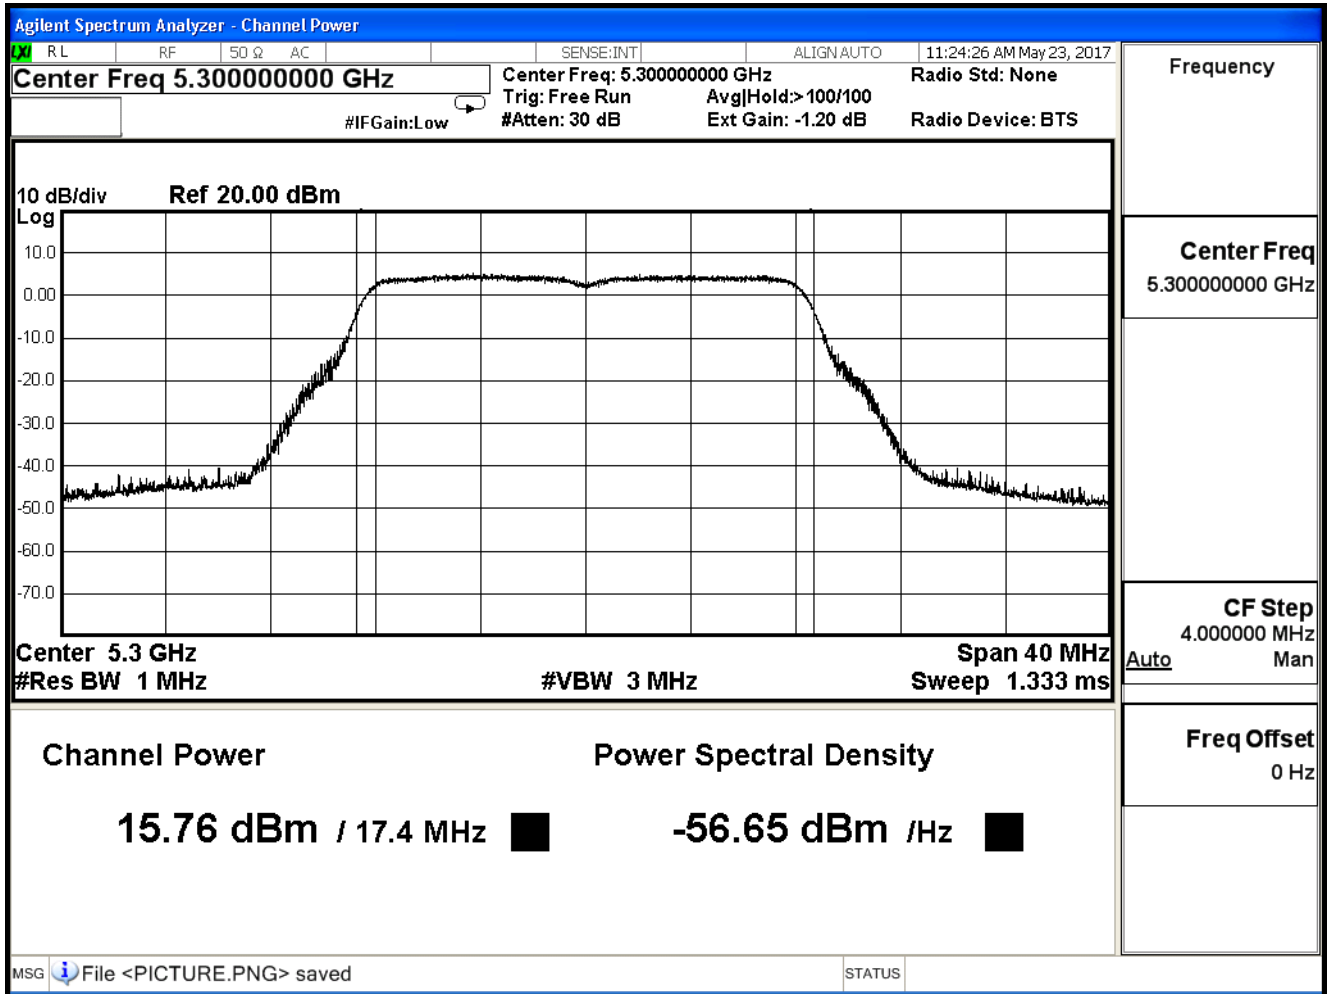

Channel 64 (5320MHz)

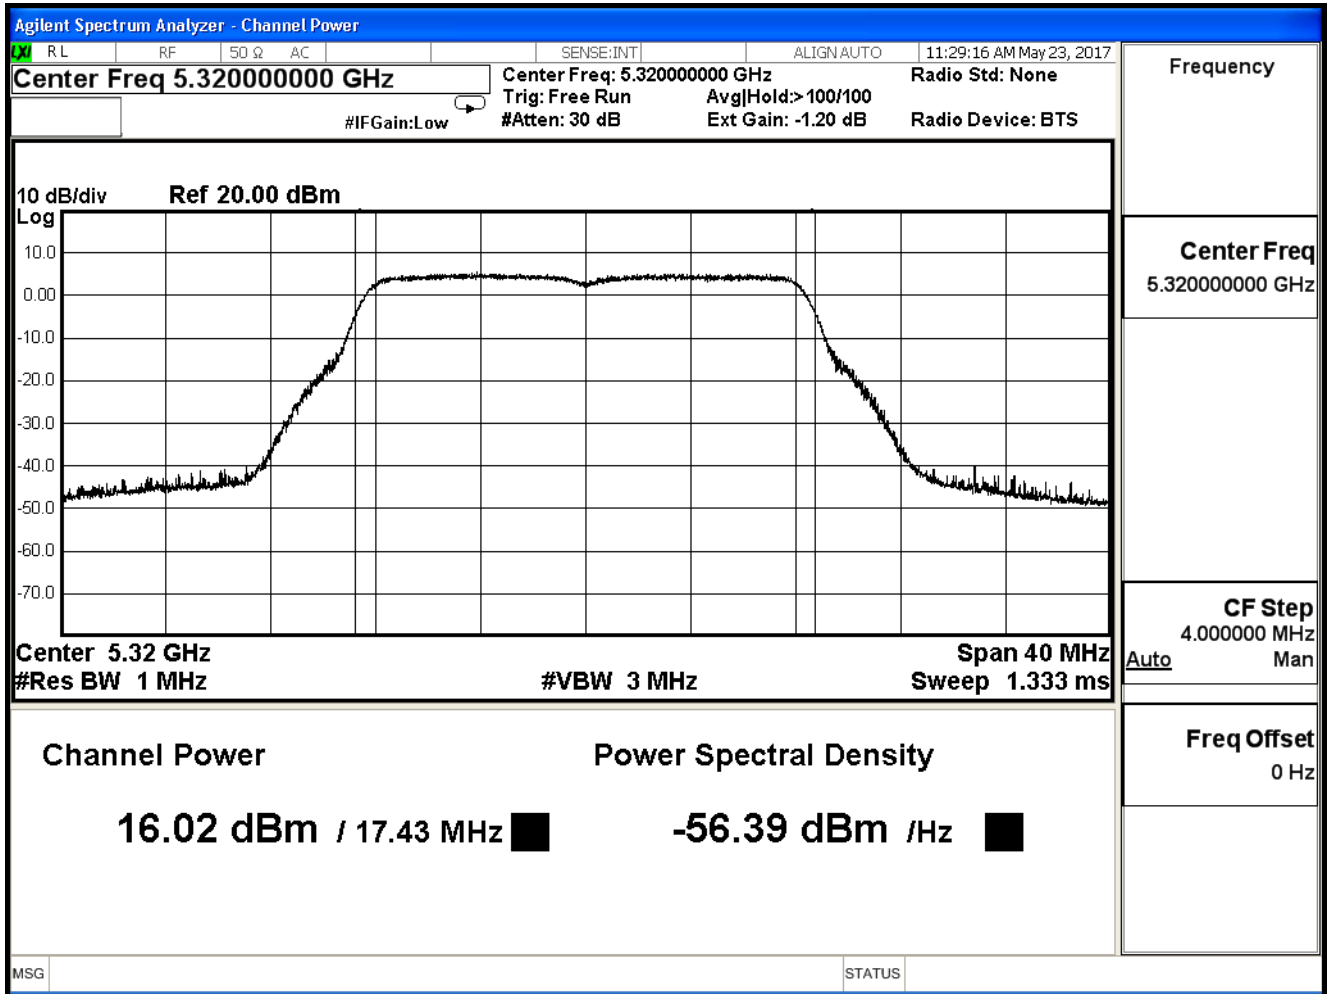


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Tx_AD P: AD890326010-2LF_ CDD Mode (802.11 a)		
Date of Test	2017/05/23	Test Site	SR10-H

802.11a (ANT 2)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	15.310	≤ 24
60	5300	15.740	≤ 24
64	5320	15.970	≤ 24

The worst emission of data rate is 6 Mbps.


Channel 52 (5260MHz)

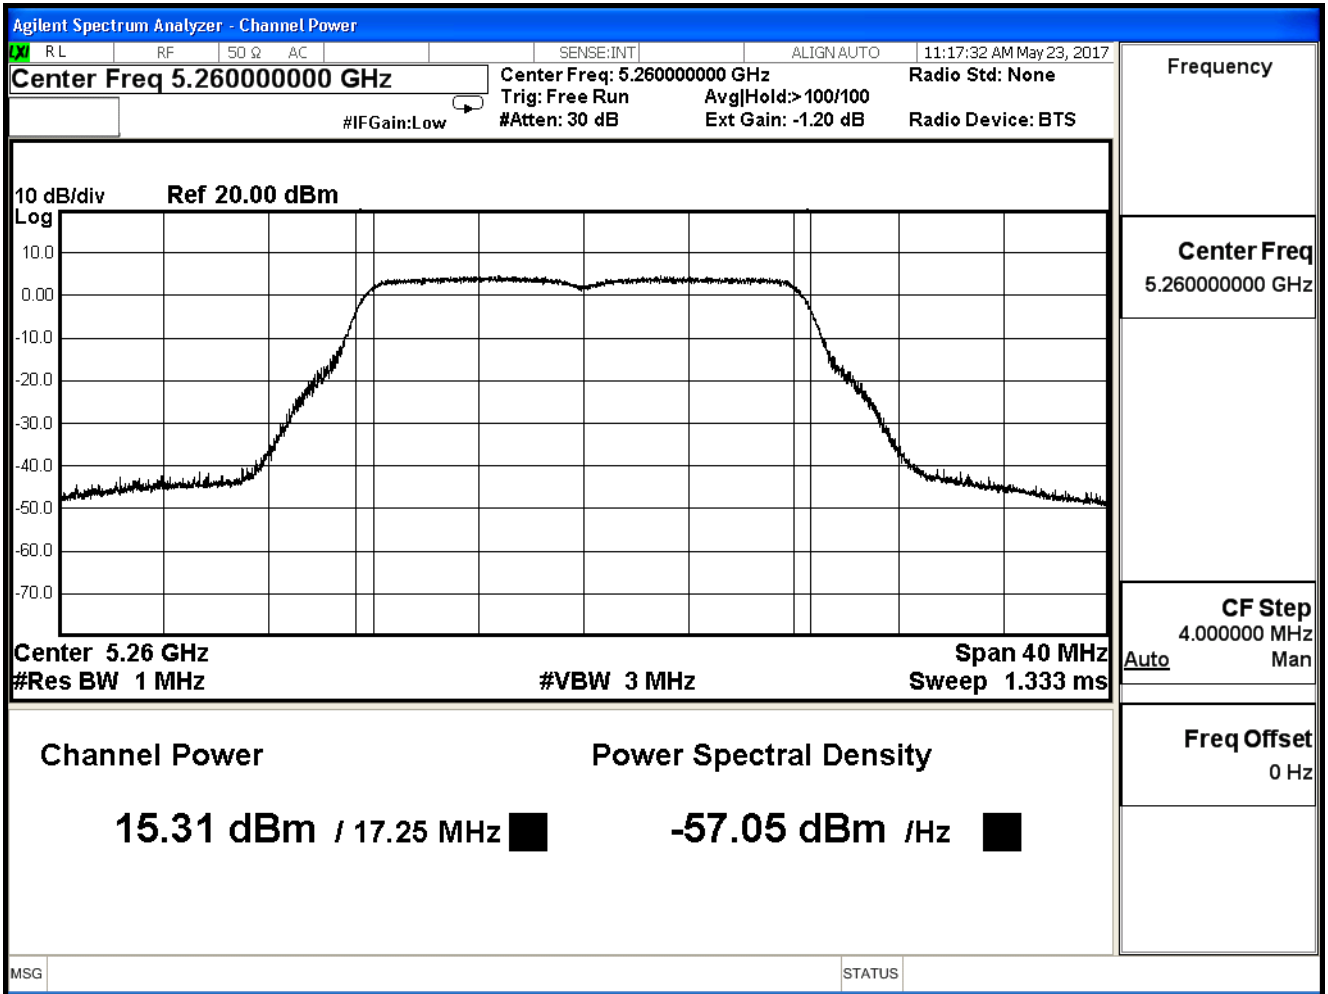

Channel 60 (5300MHz)

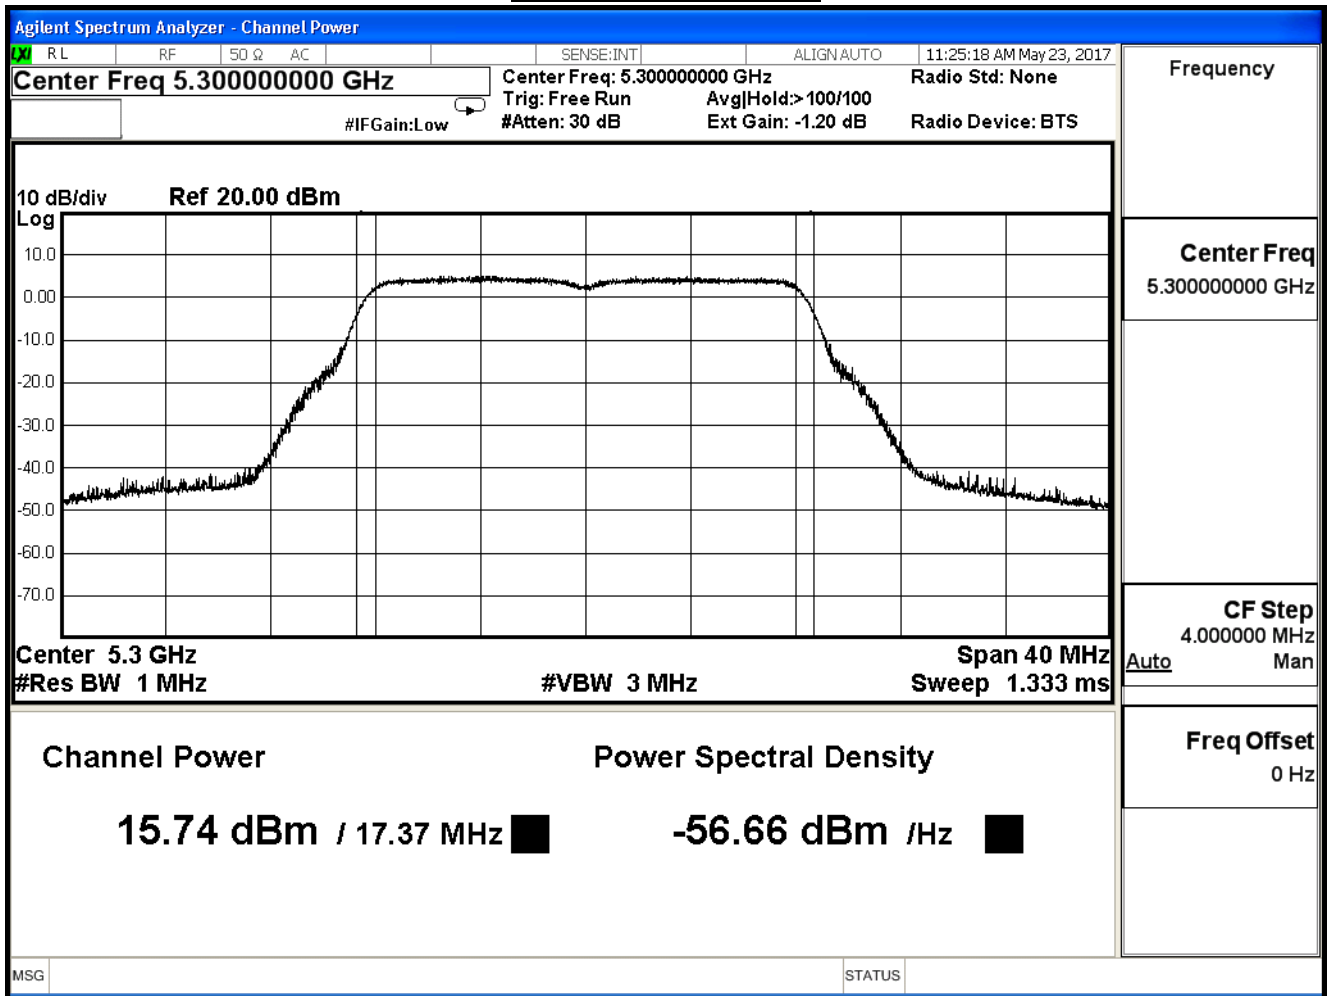

Channel 64 (5320MHz)

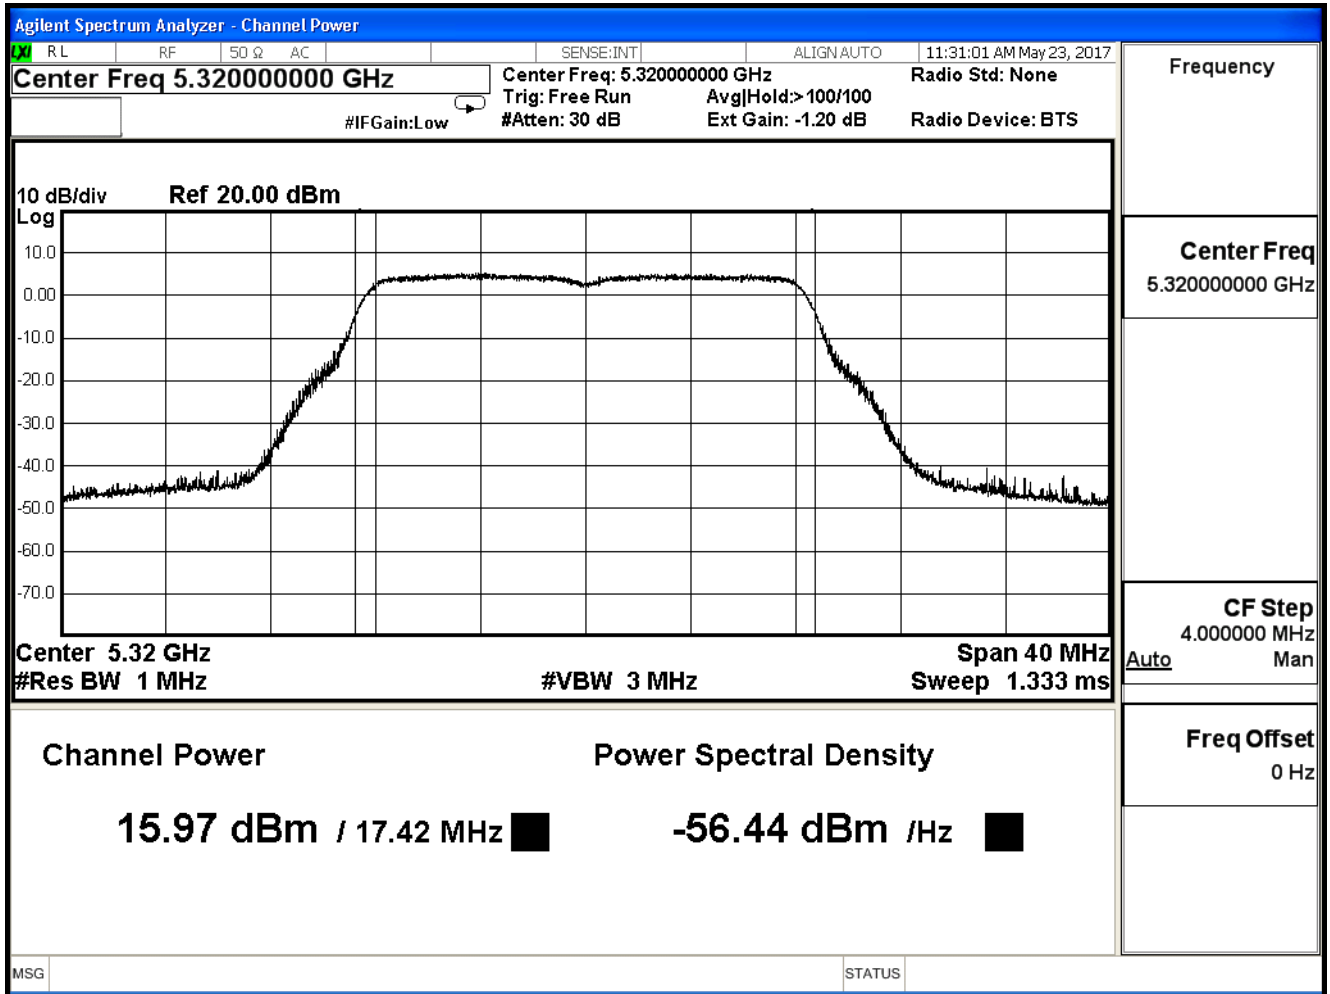


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Tx_ADP: AD890326010-2LF_ CDD Mode (802.11 a)		
Date of Test	2017/05/23	Test Site	SR10-H

802.11a (ANT 3)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	15.280	≤ 24
60	5300	15.780	≤ 24
64	5320	15.890	≤ 24

The worst emission of data rate is 6 Mbps.


Channel 52 (5260MHz)

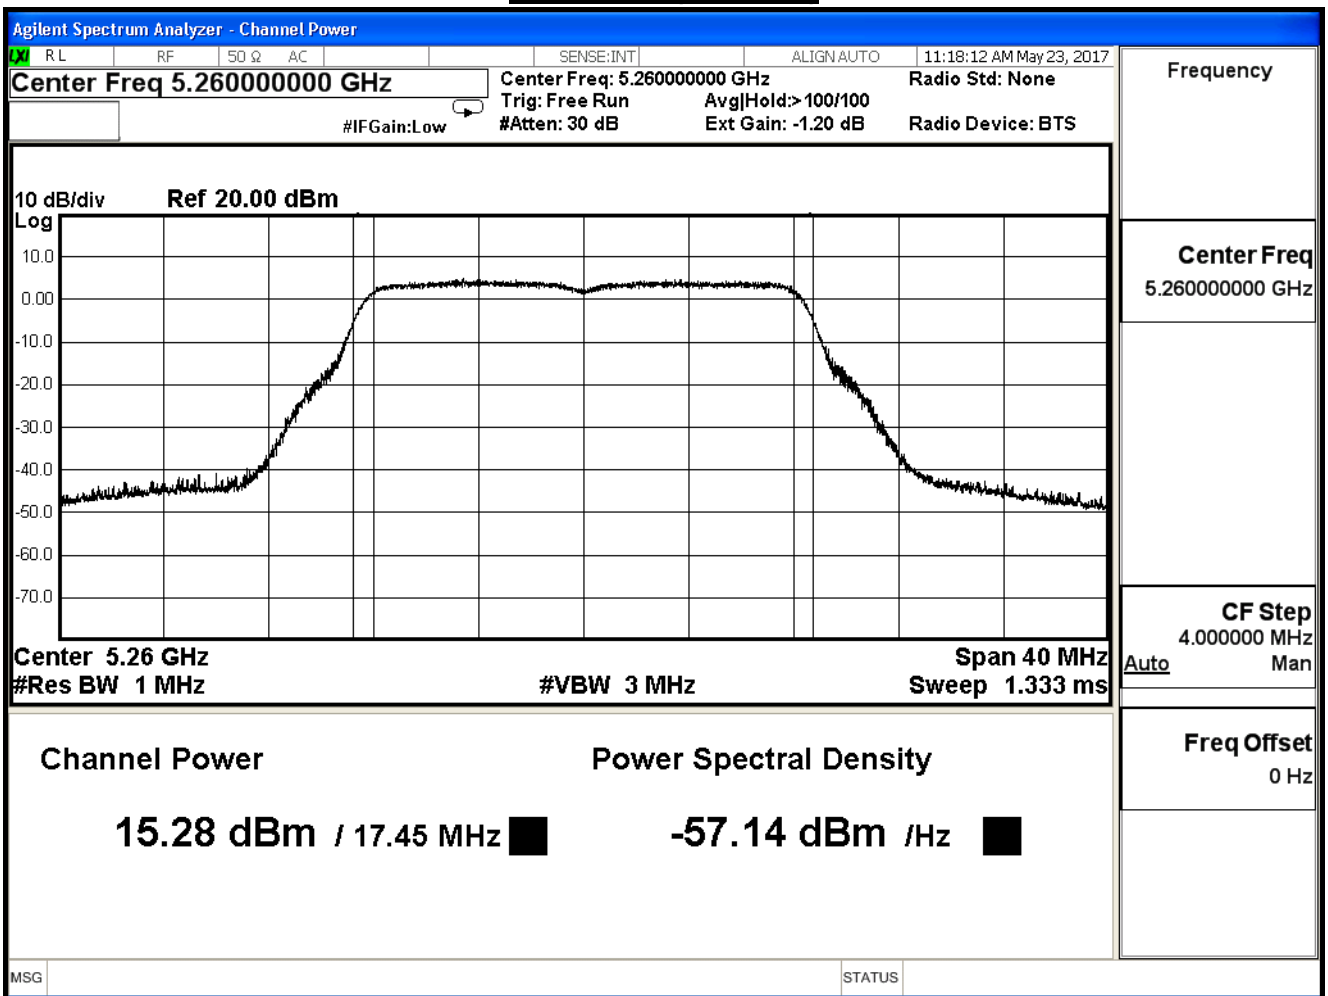

Channel 60 (5300MHz)

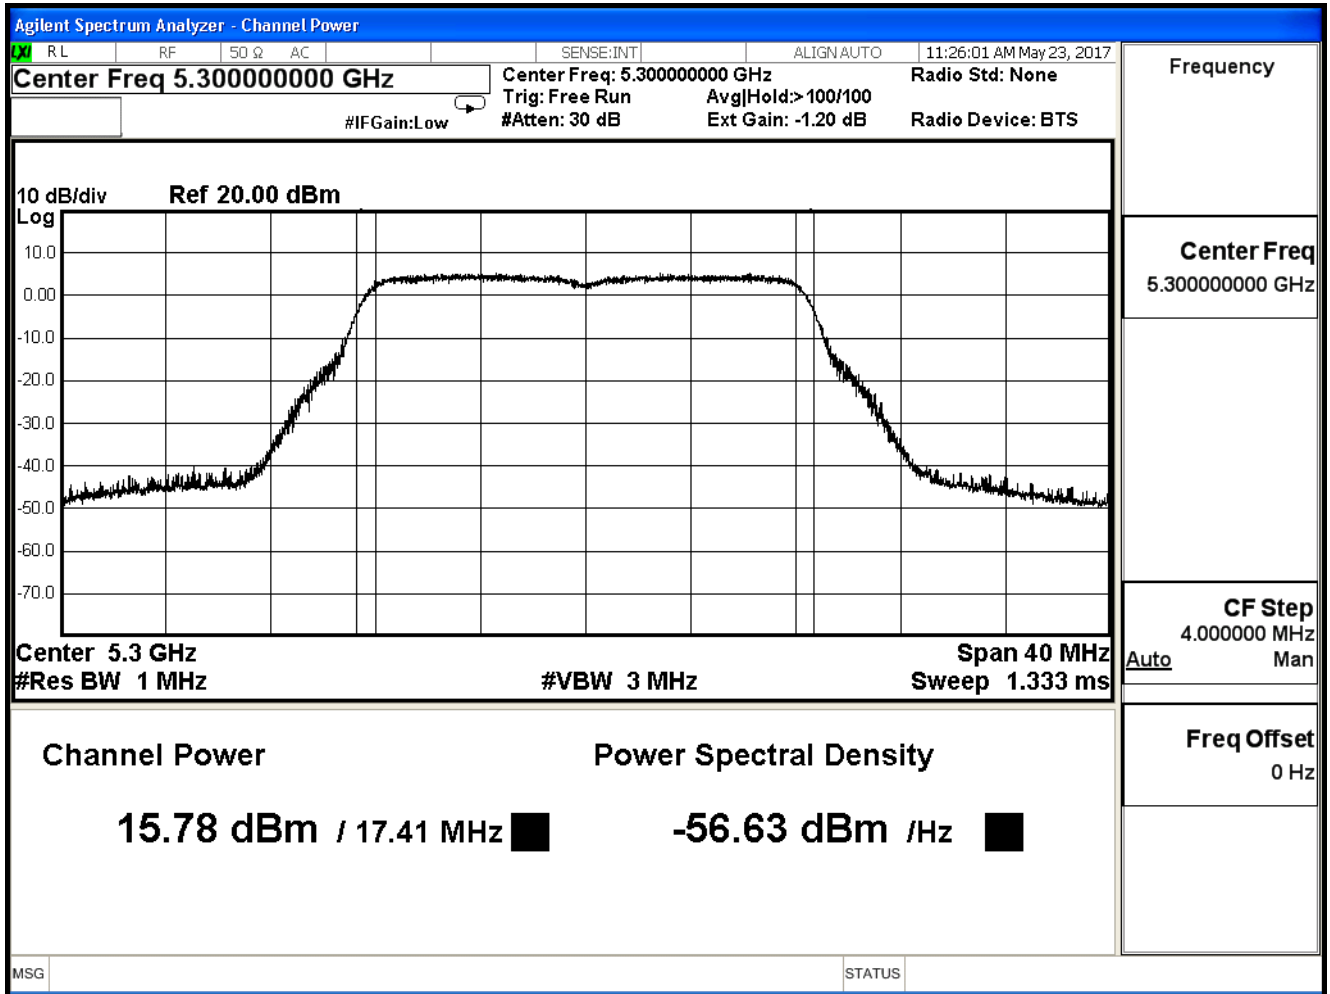

Channel 64 (5320MHz)

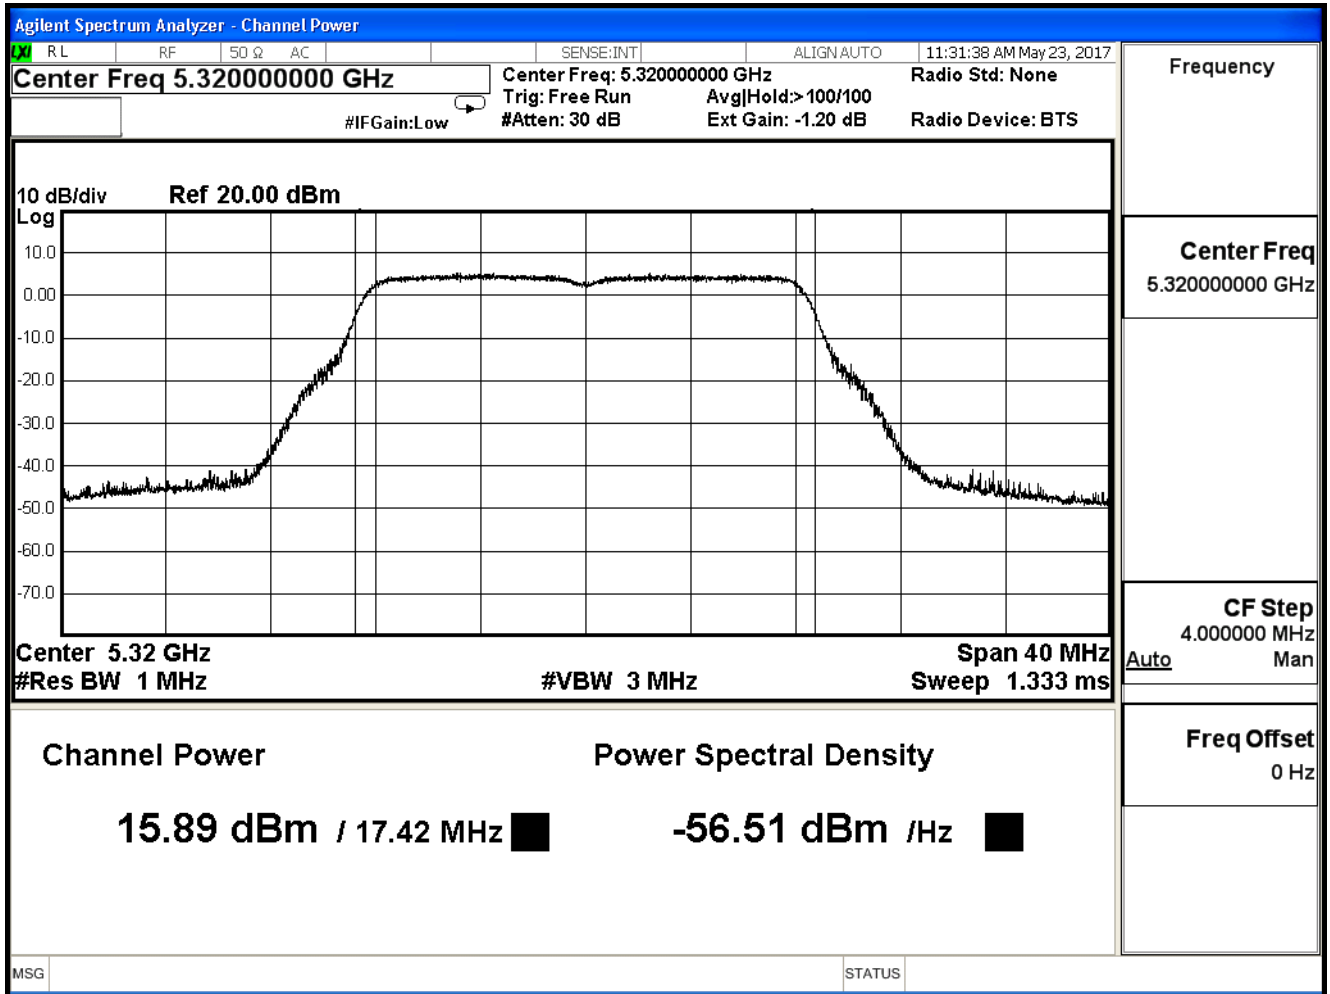

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 1: Tx_AD P: AD890326010-2LF_ CDD Mode (802.11 a)		
Date of Test	2017/05/23	Test Site	SR10-H

802.11a (ANT 0+1+2+3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	21.313	≤ 24
60	5300	21.771	≤ 24
64	5320	21.966	≤ 24


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/05/23	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 0)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	16.190	≤ 24
60	5300	16.020	≤ 24
64	5320	15.840	≤ 24

The worst emission of data rate is MCS24.


Channel 52 (5260MHz)

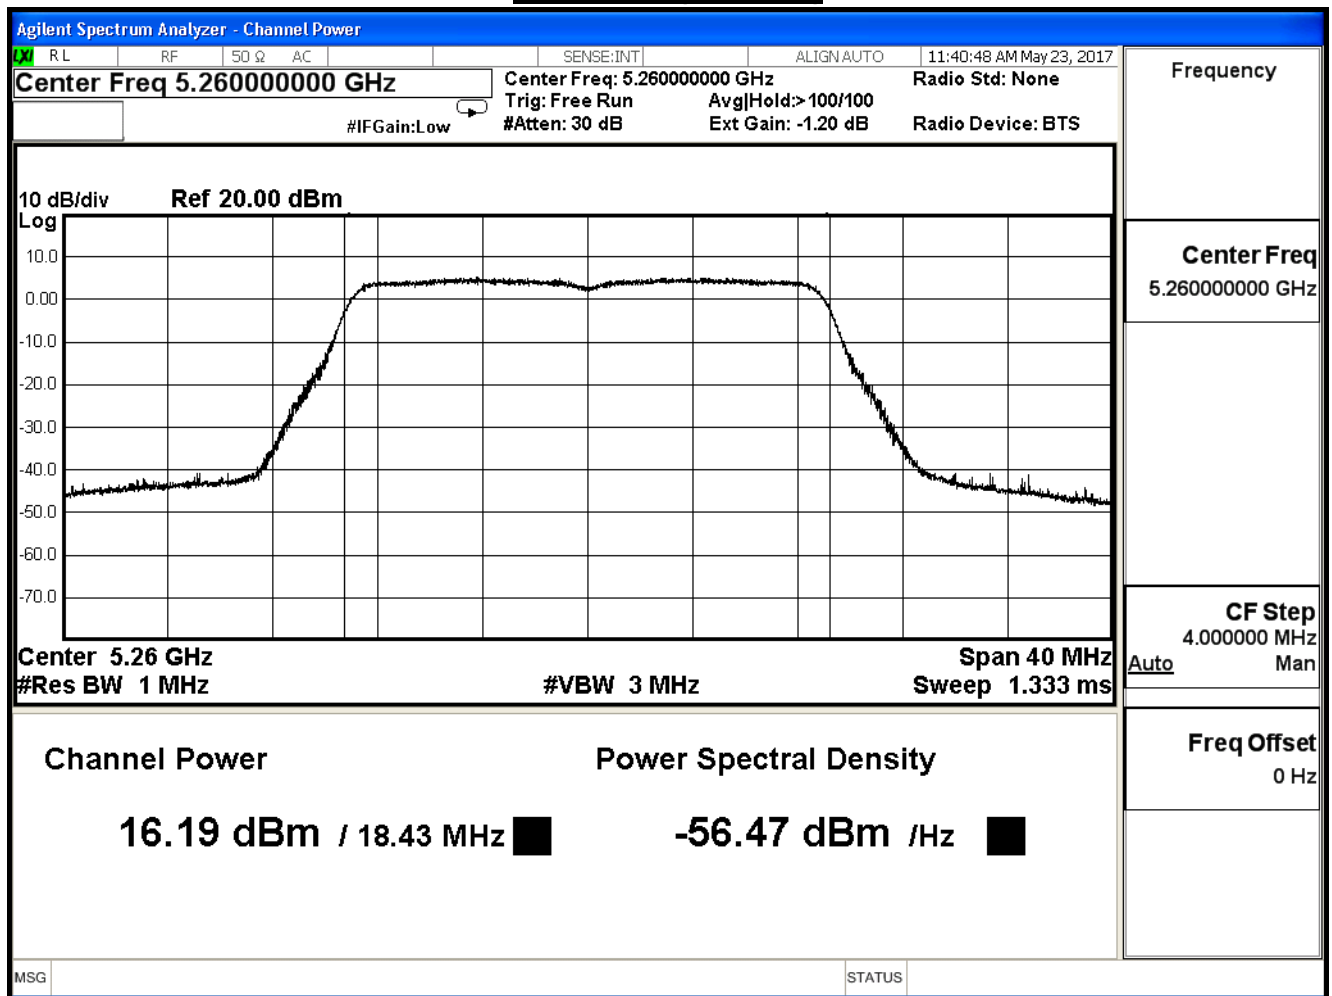

Channel 60 (5300MHz)

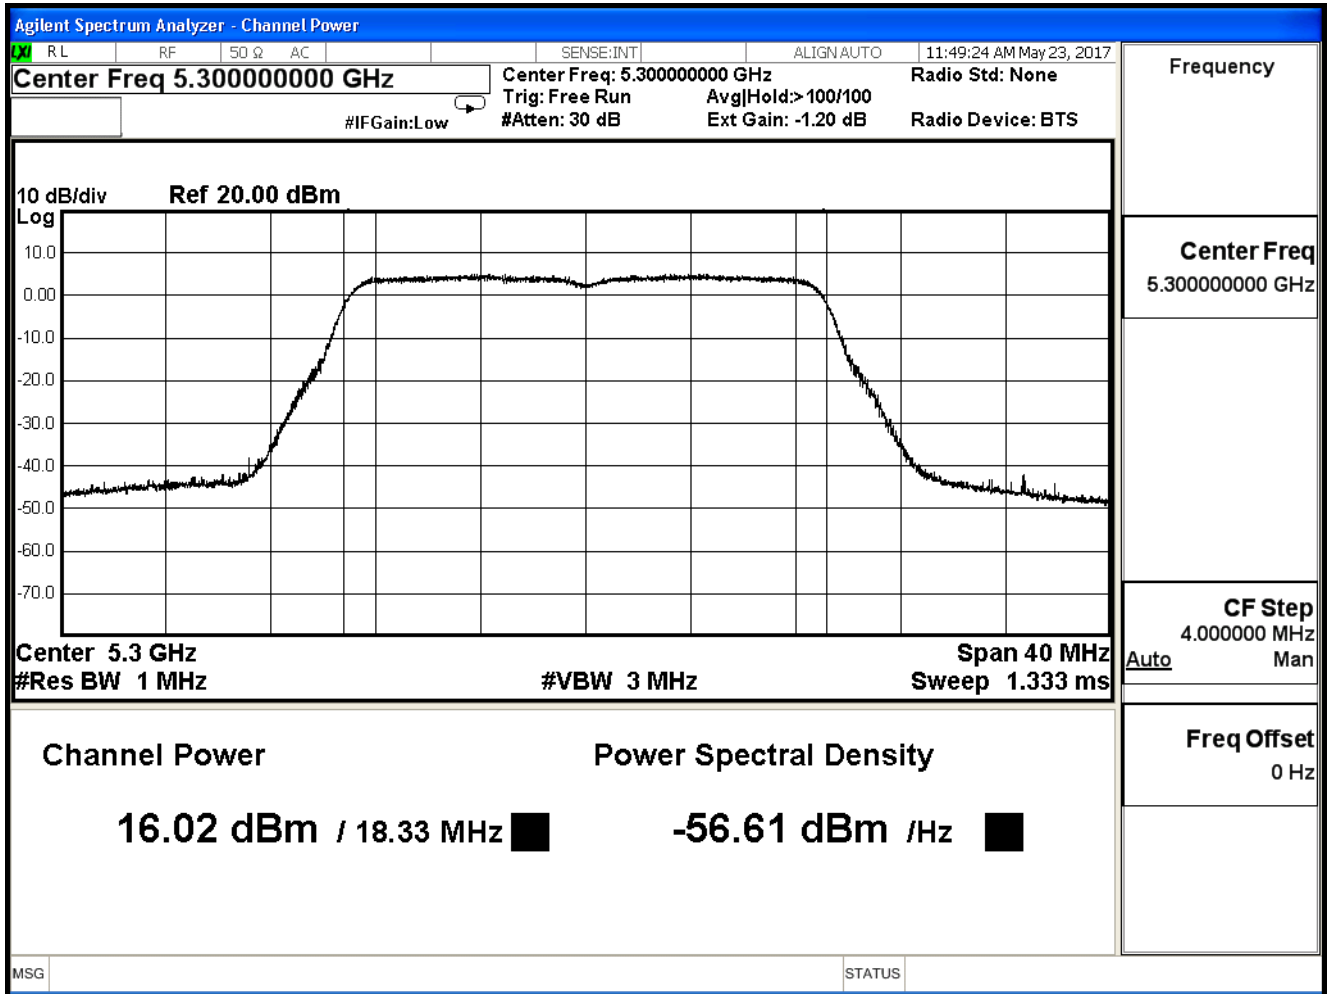

Channel 64 (5320MHz)

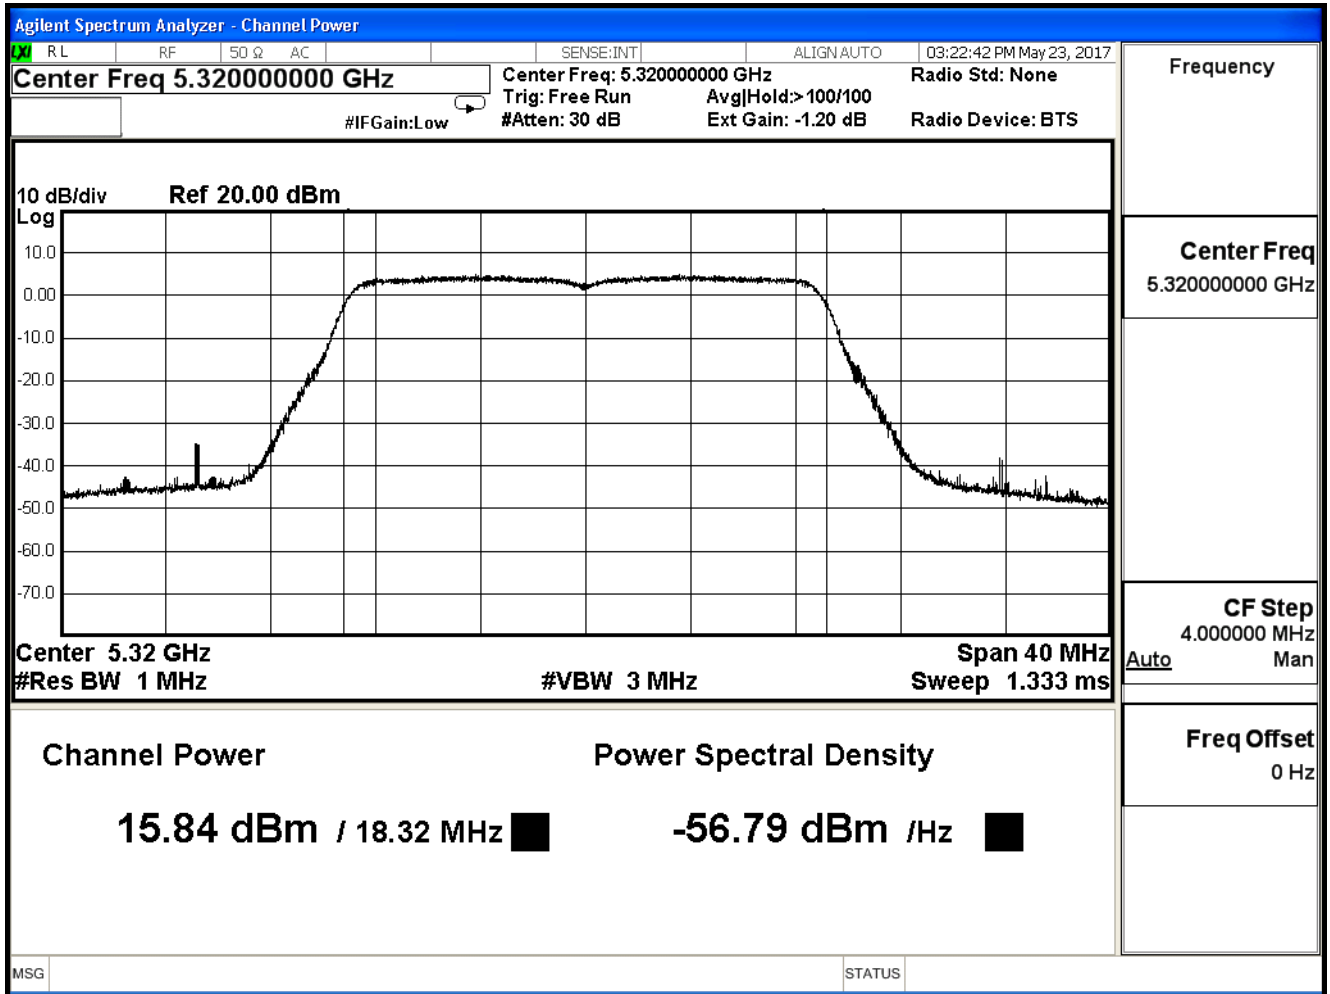


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/05/23	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 1)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	16.110	≤ 24
60	5300	16.000	≤ 24
64	5320	15.800	≤ 24

The worst emission of data rate is MCS24.


Channel 52 (5260MHz)

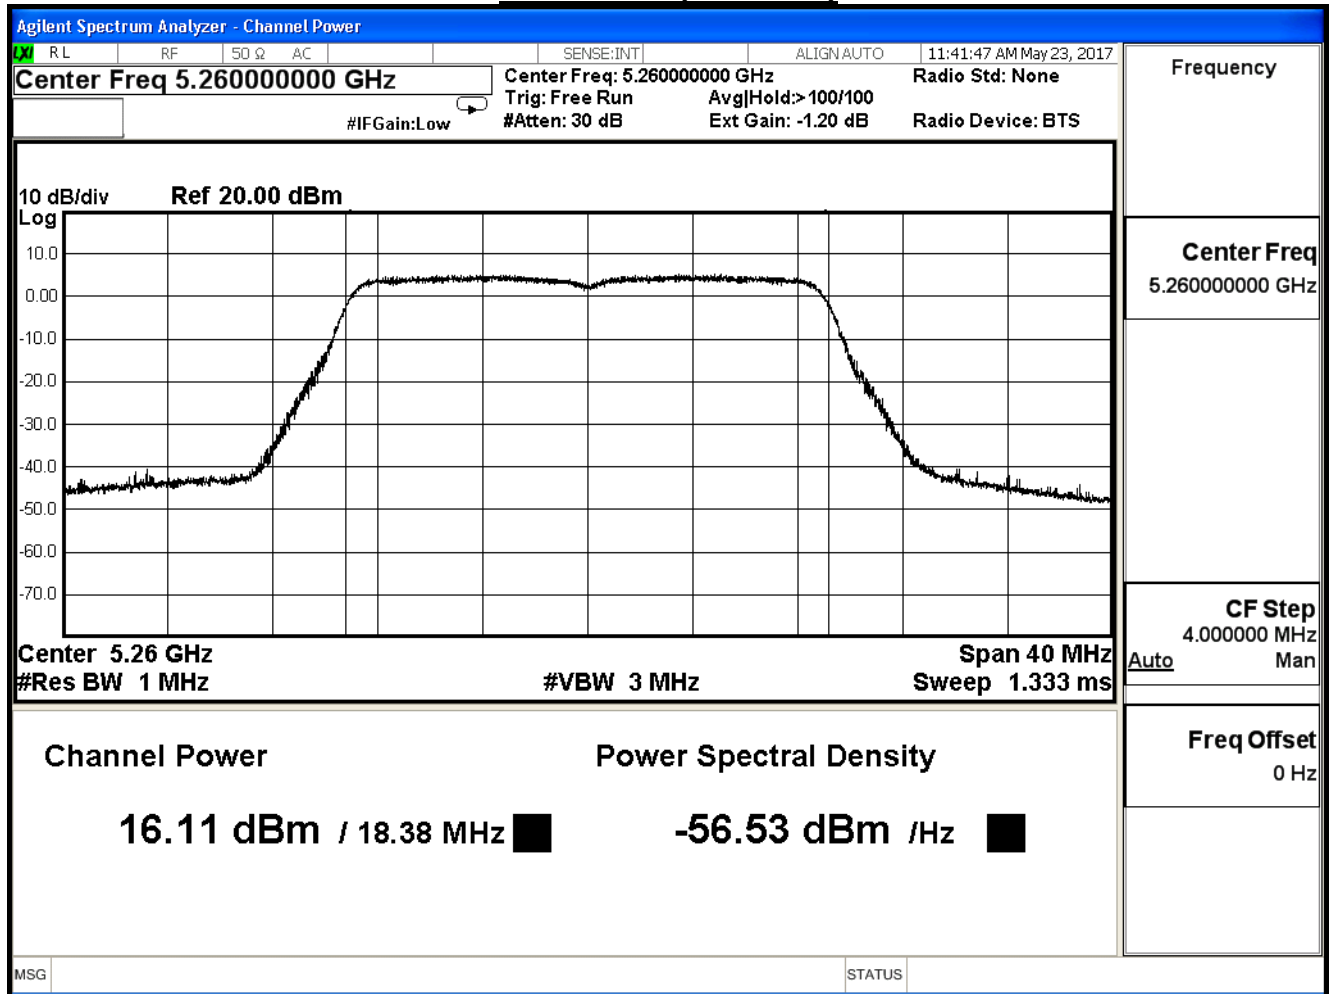

Channel 60 (5300MHz)

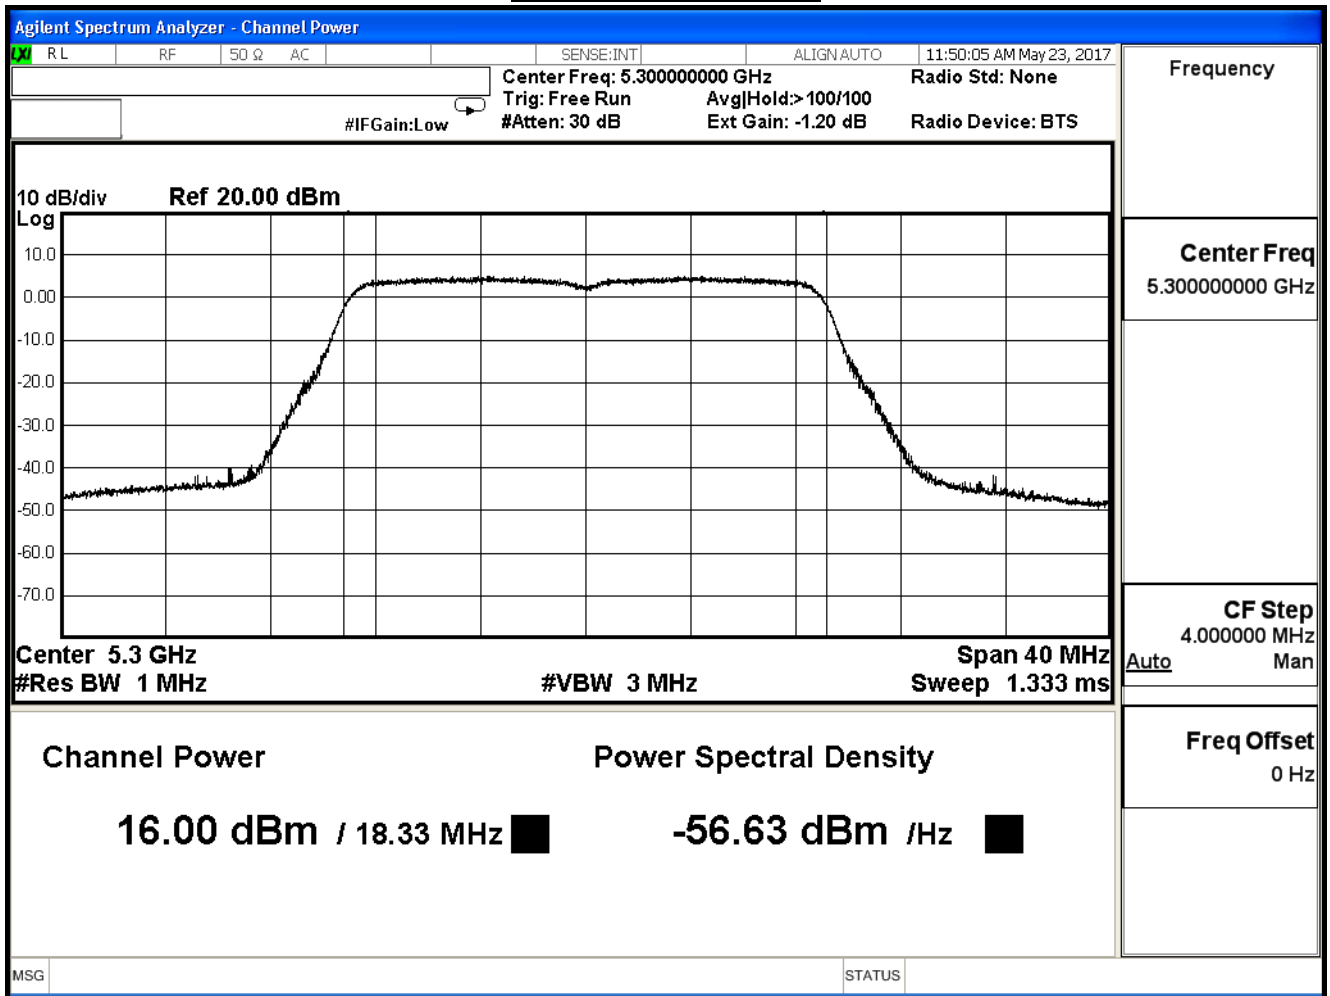

Channel 64 (5320MHz)

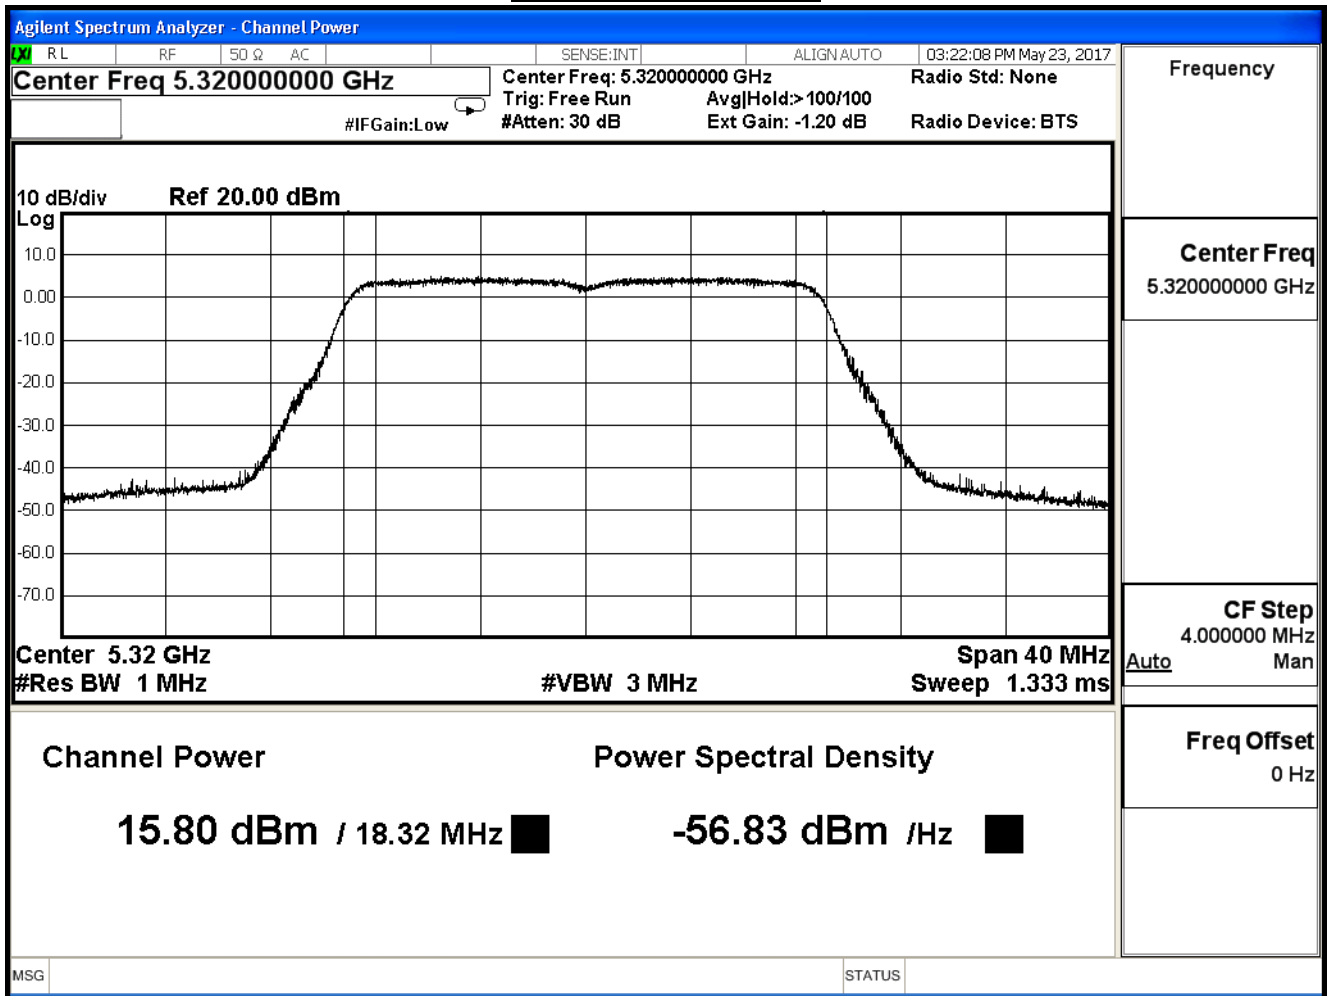


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/05/23	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 2)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	16.080	≤ 24
60	5300	16.010	≤ 24
64	5320	15.860	≤ 24

The worst emission of data rate is MCS24.


Channel 52 (5260MHz)

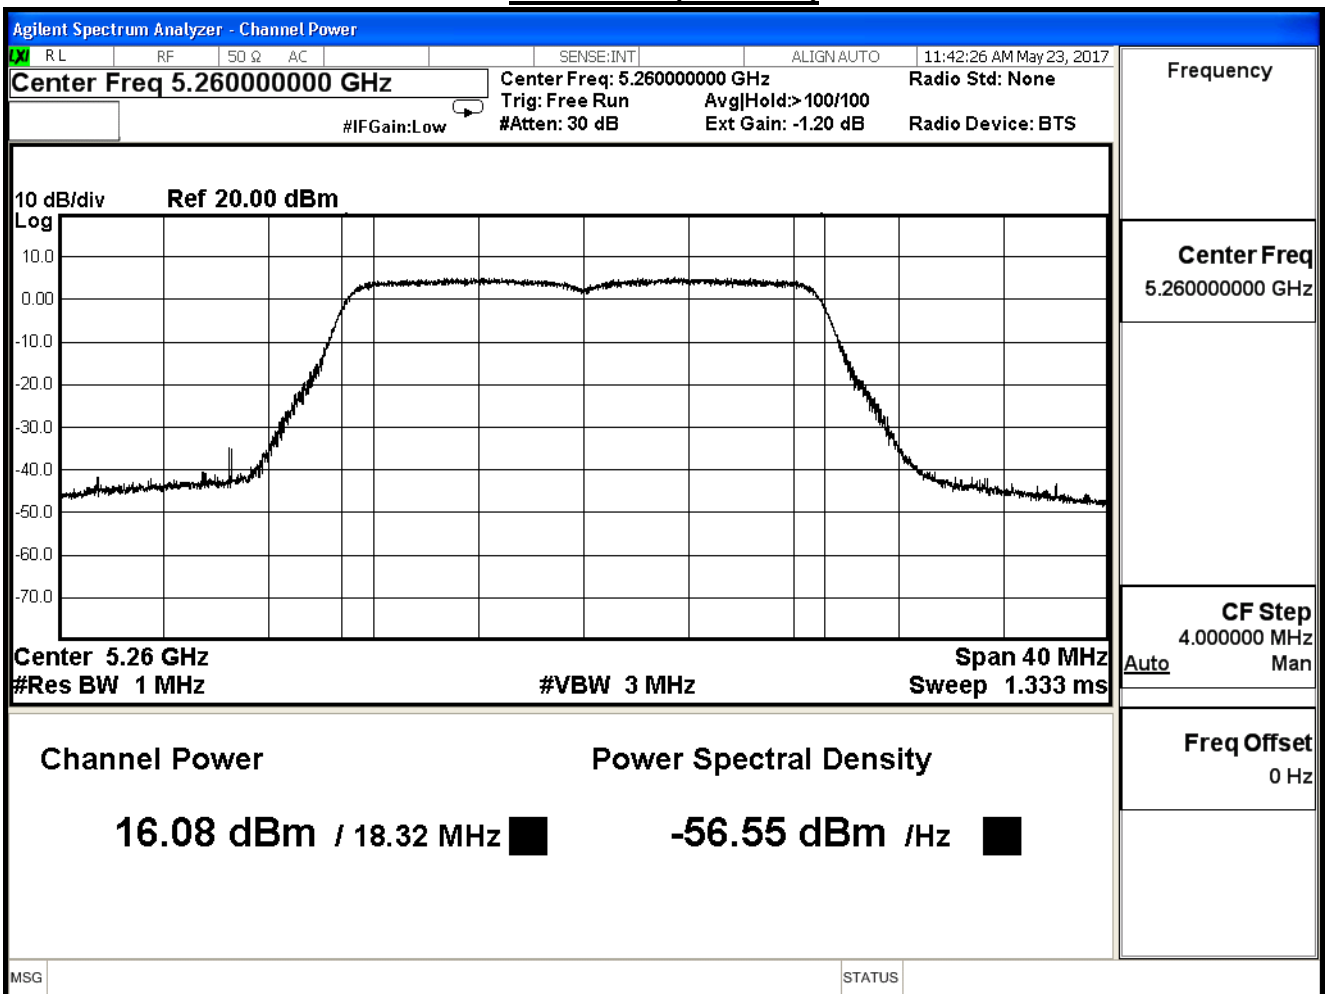

Channel 60 (5300MHz)

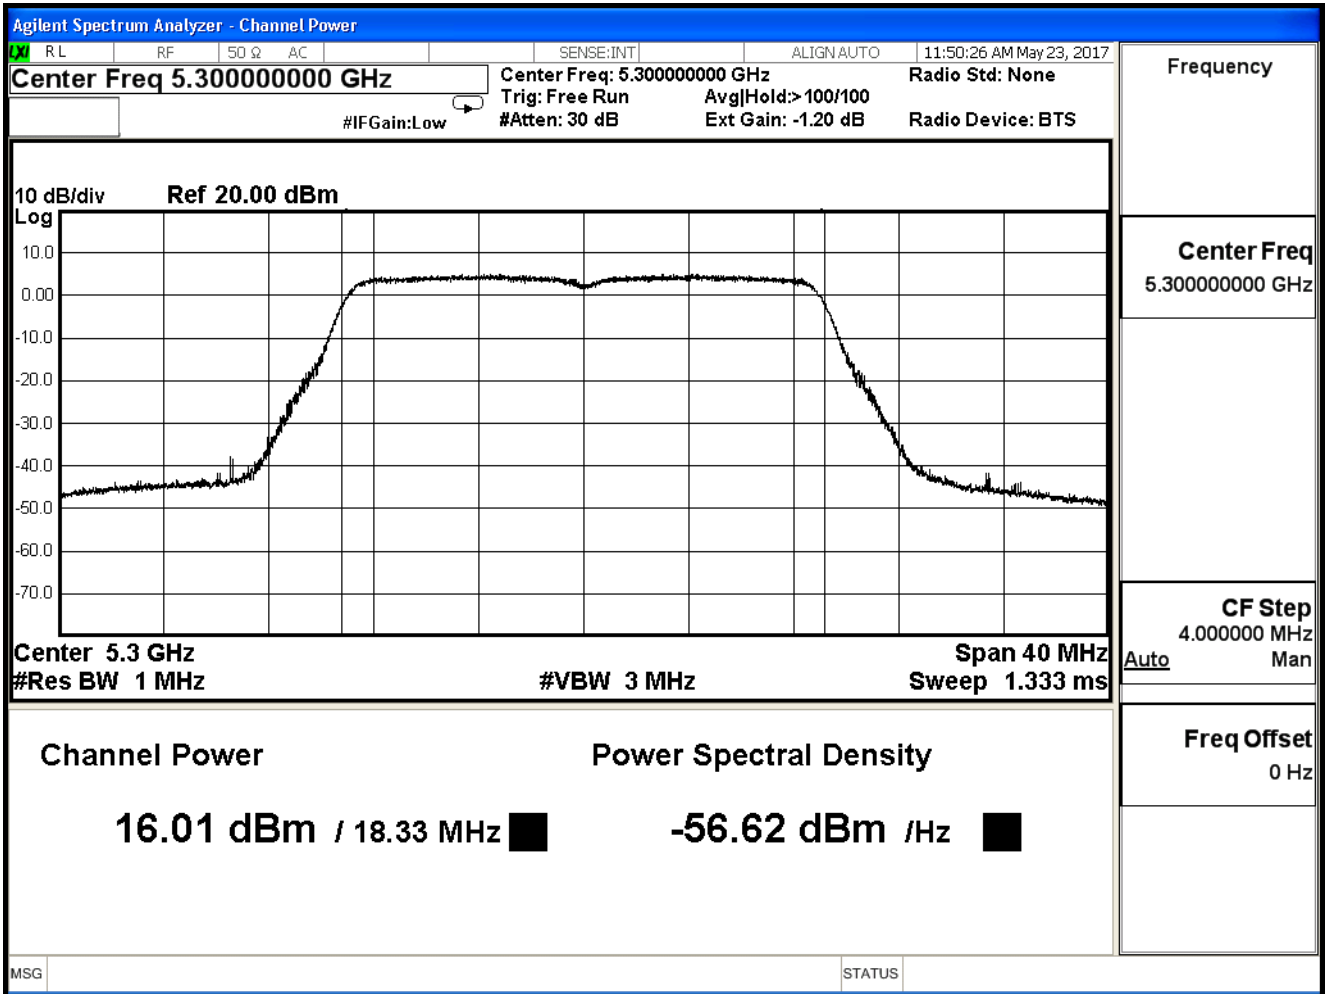

Channel 64 (5320MHz)

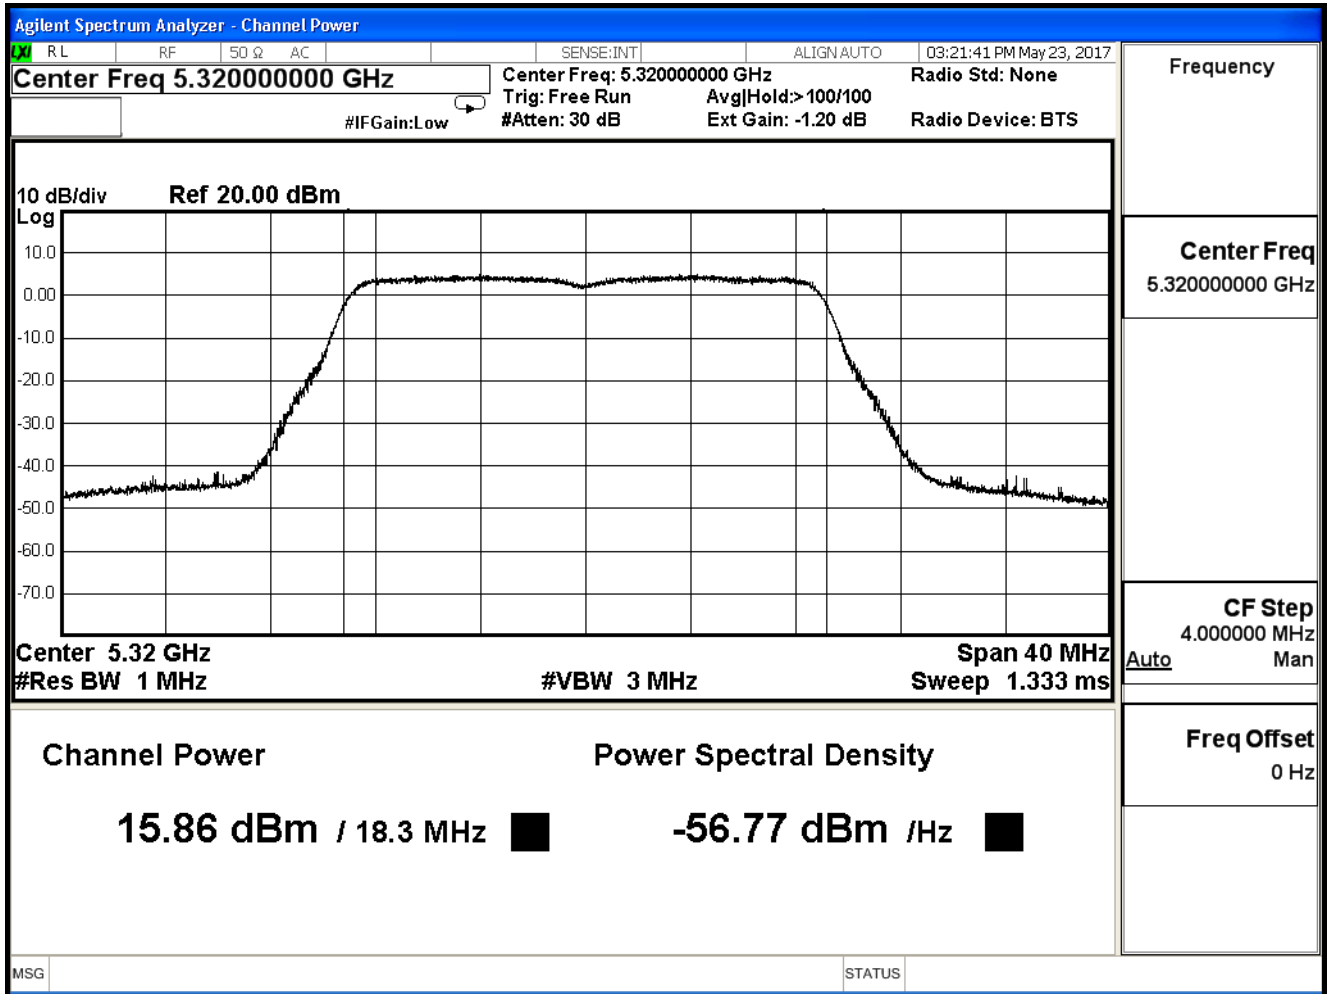


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/05/23	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 3)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	16.040	≤ 24
60	5300	16.010	≤ 24
64	5320	15.890	≤ 24

The worst emission of data rate is MCS24.


Channel 52 (5260MHz)

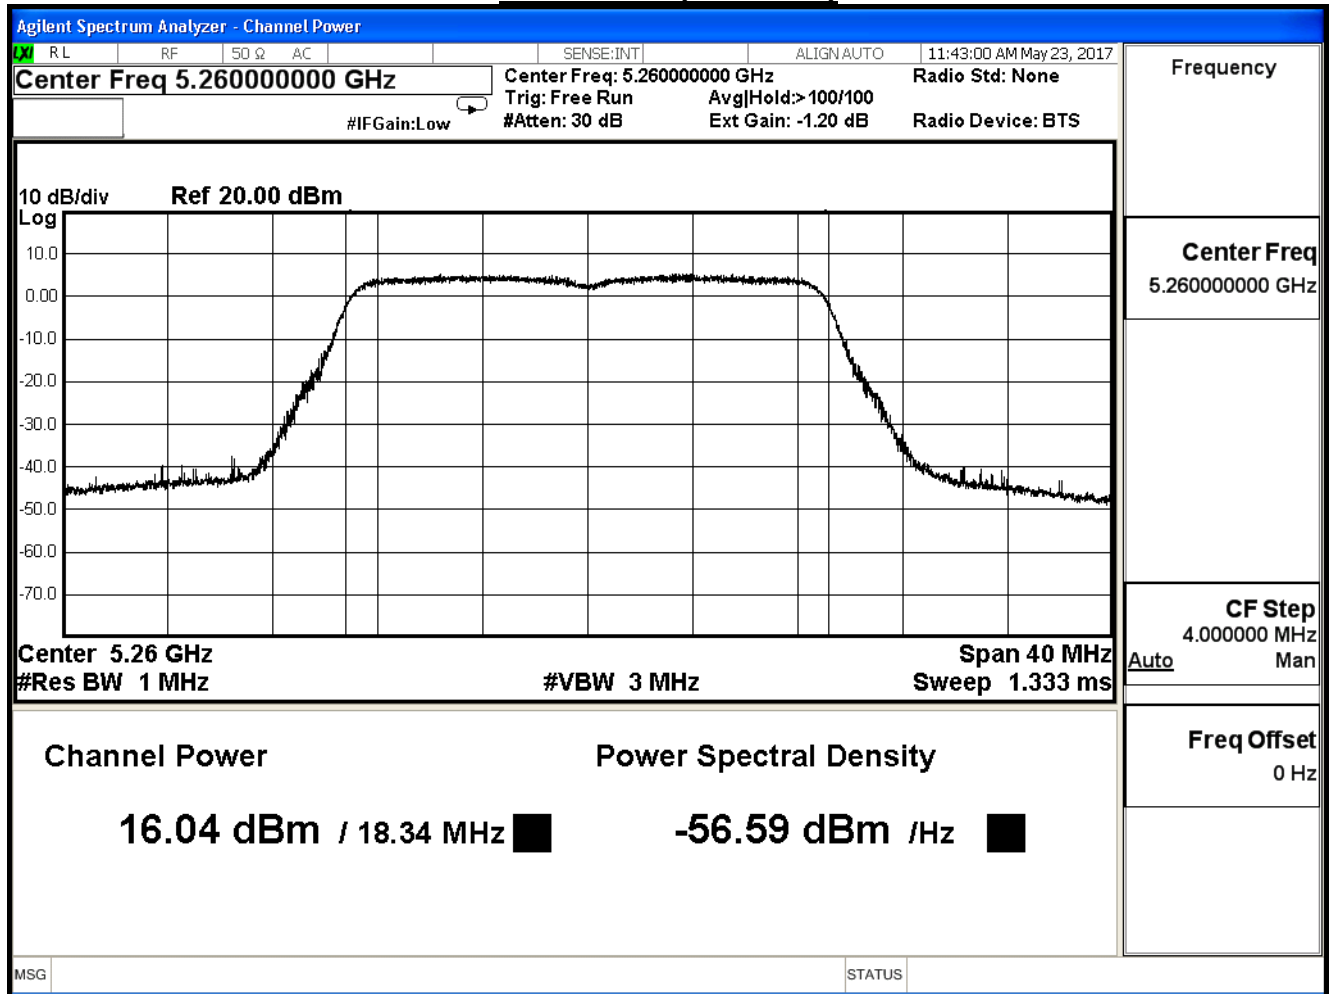

Channel 60 (5300MHz)

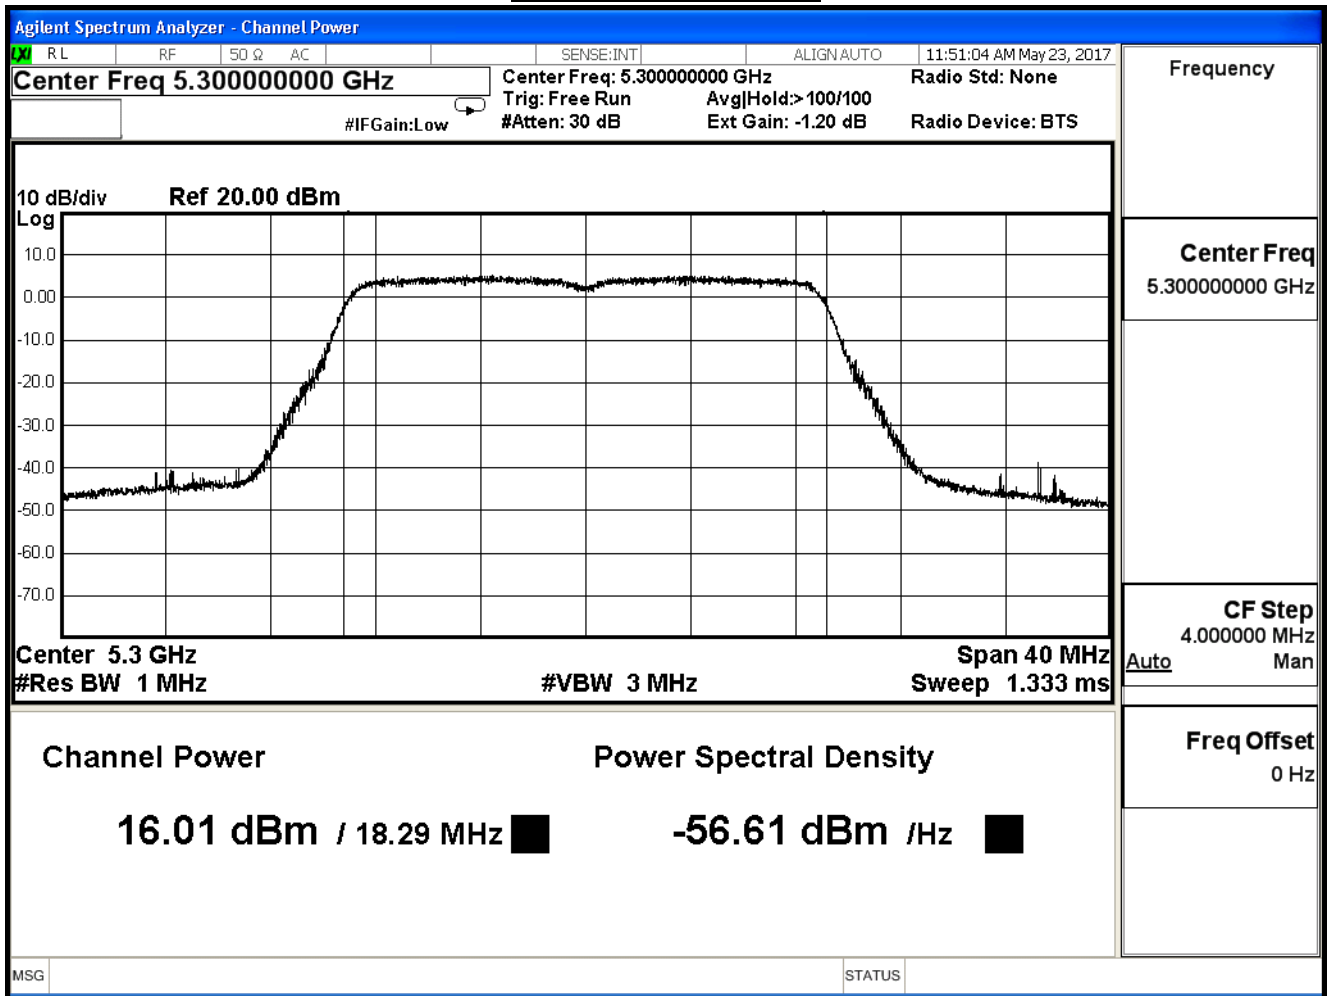

Channel 64 (5320MHz)

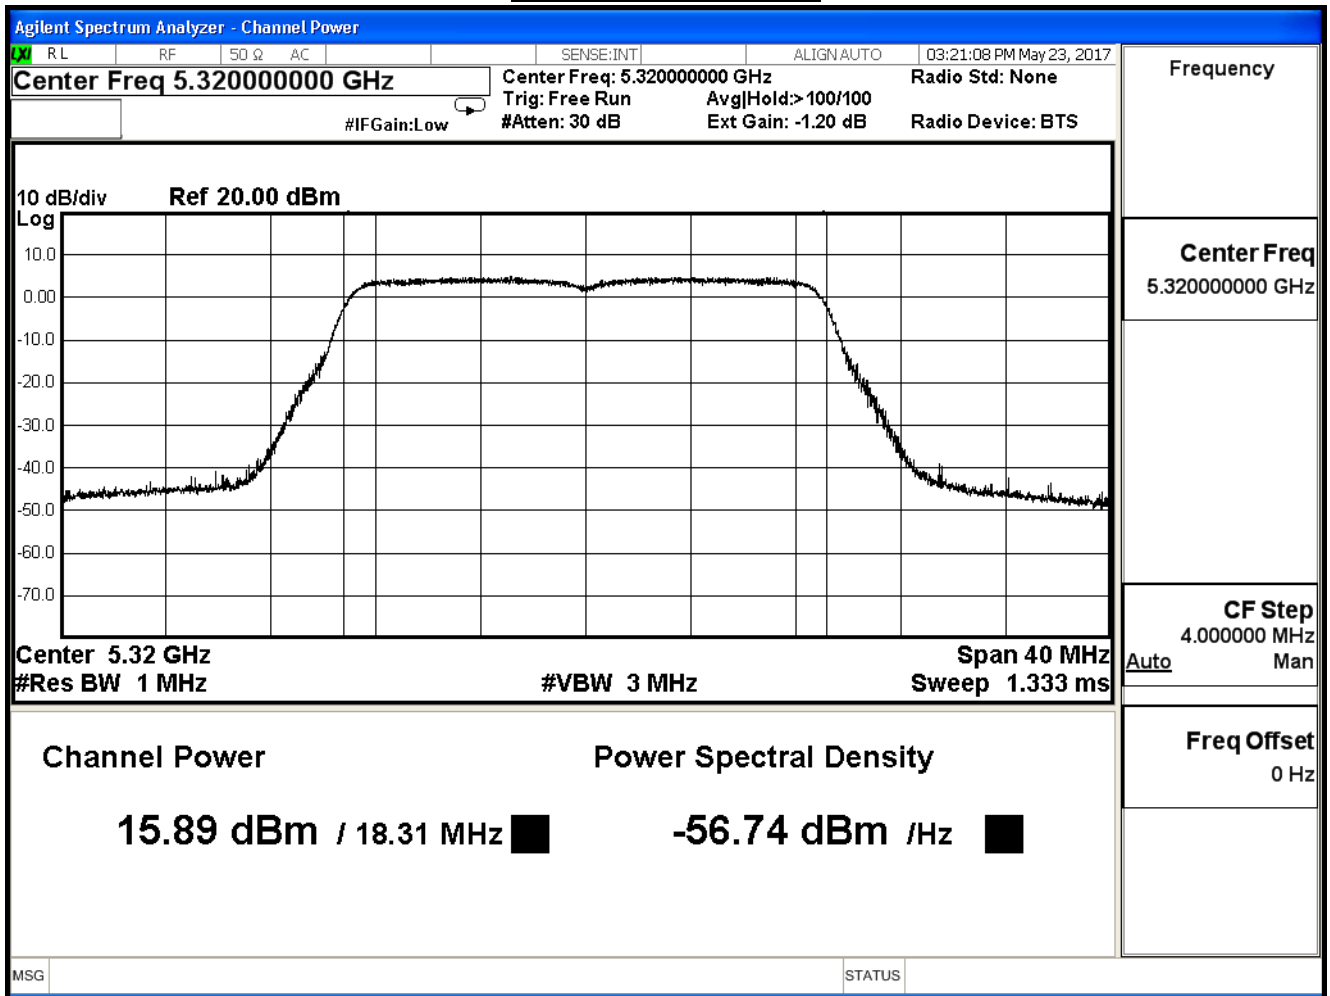

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/05/23	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 0+1+2+3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	22.126	≤ 24
60	5300	22.031	≤ 24
64	5320	21.868	≤ 24


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/05/19	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 0)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
54	5270	17.870	≤ 24
62	5310	15.420	≤ 24

The worst emission of data rate is MCS 24

Channel 54 (5270MHz)

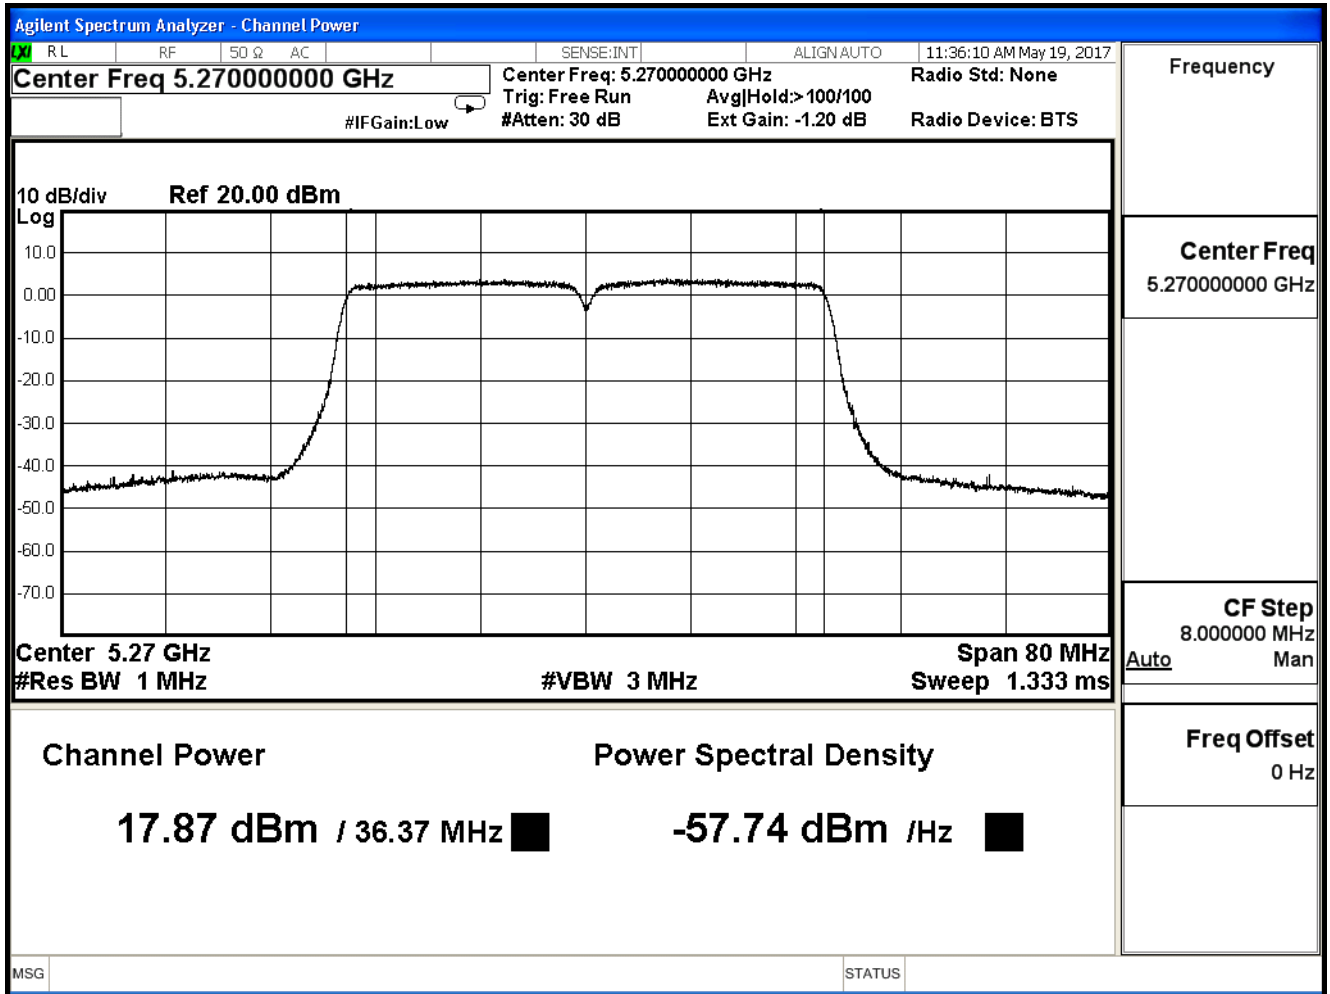

Channel 62 (5310MHz)

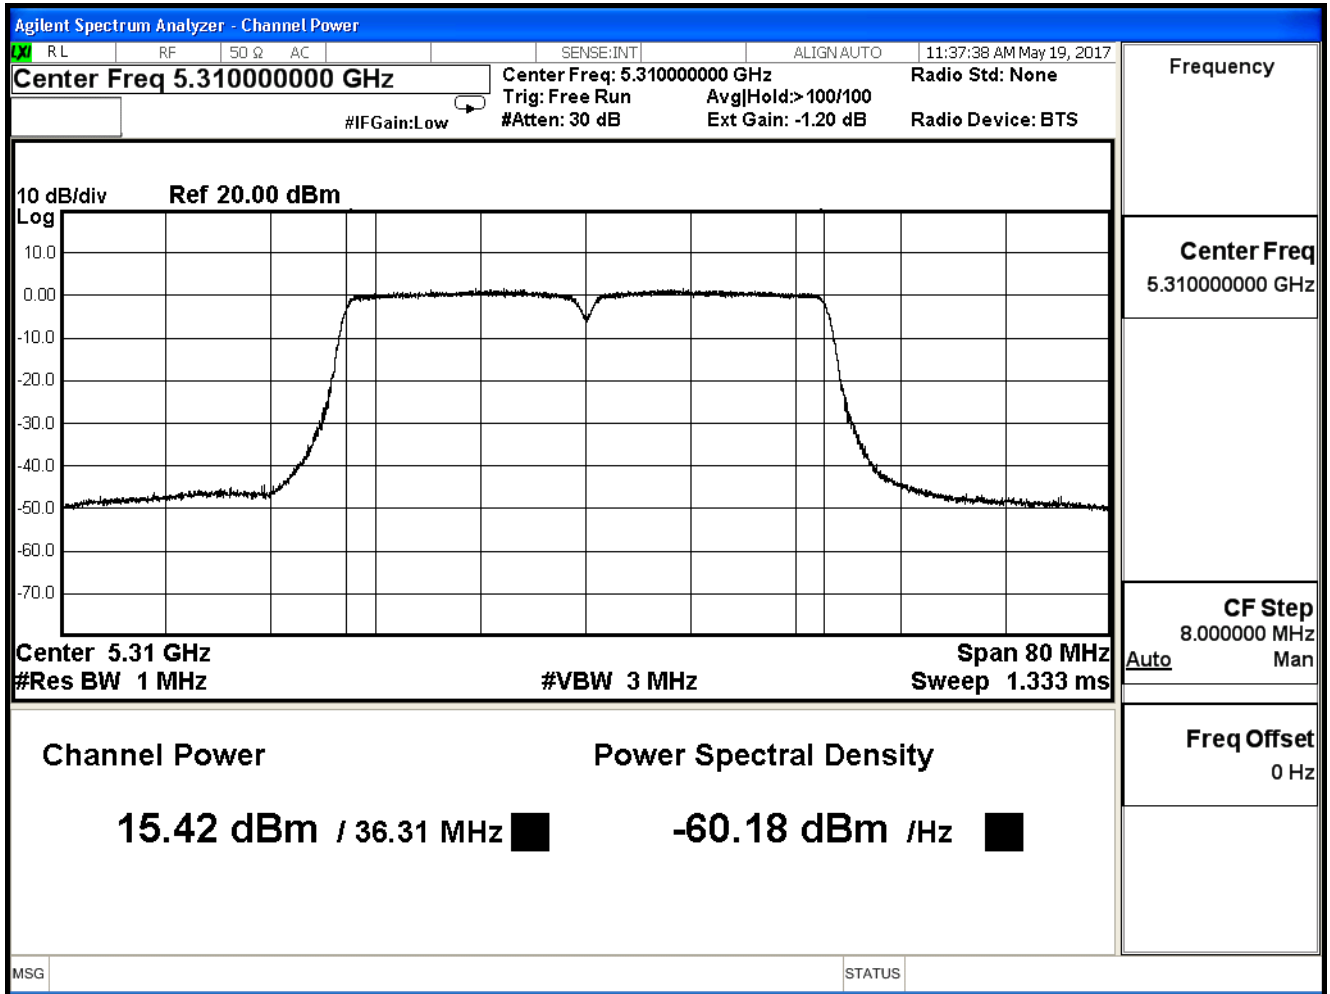


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/05/19	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 1)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
54	5270	17.870	≤ 24
62	5310	15.490	≤ 24

The worst emission of data rate is MCS 24

Channel 54 (5270MHz)

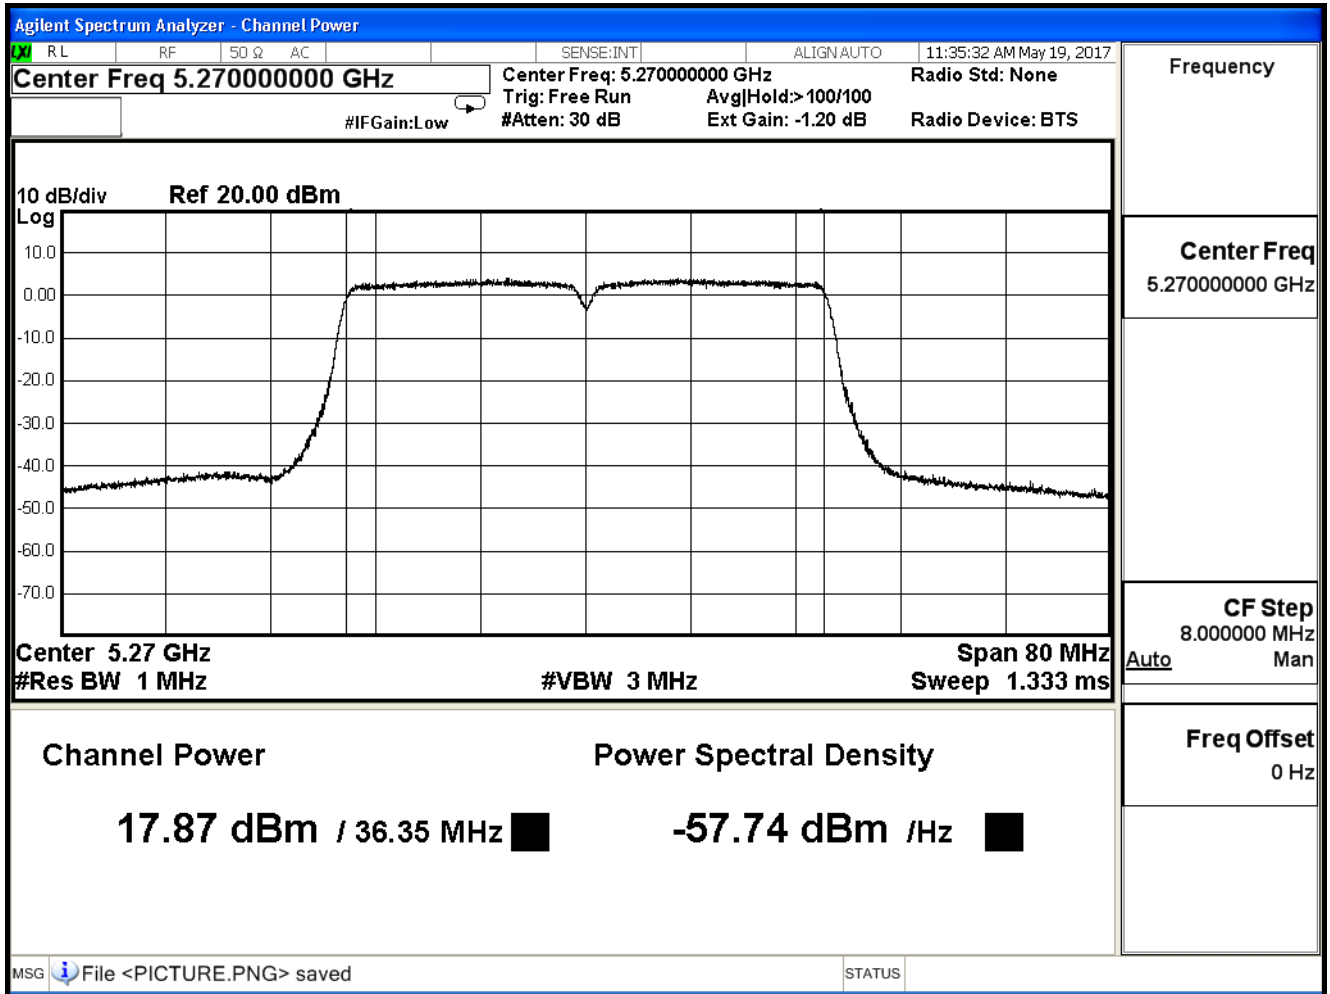

Channel 62 (5310MHz)

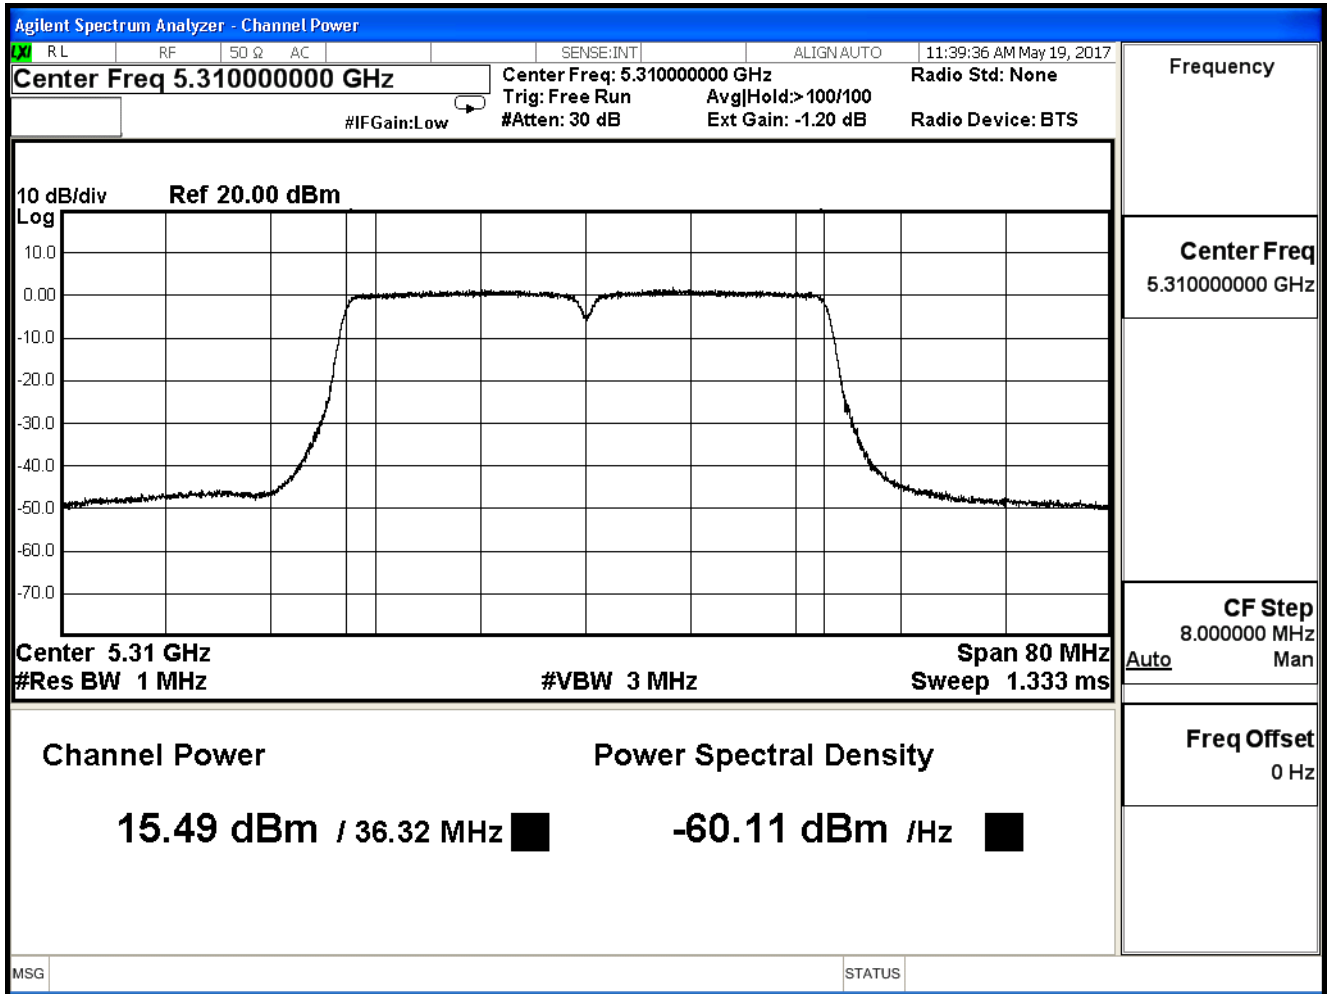

Frequency

Center Freq
5.31000000 GHz

CF Step
8.000000 MHz
Auto Man

Freq Offset
0 Hz


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/05/19	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 2)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
54	5270	17.880	≤ 24
62	5310	15.490	≤ 24

The worst emission of data rate is MCS 24

Channel 54 (5270MHz)

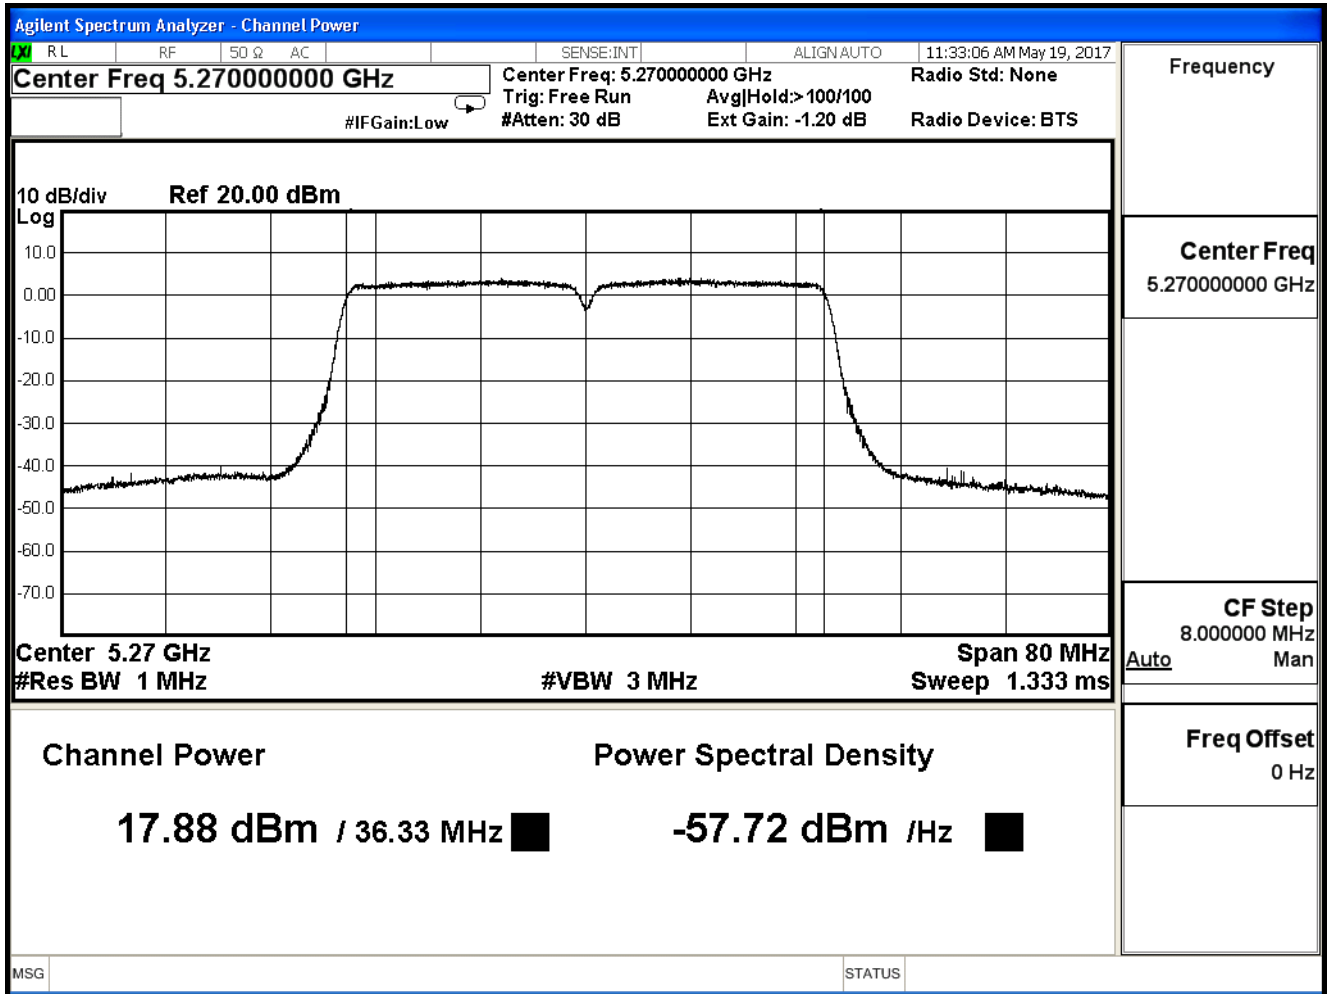

Channel 62 (5310MHz)

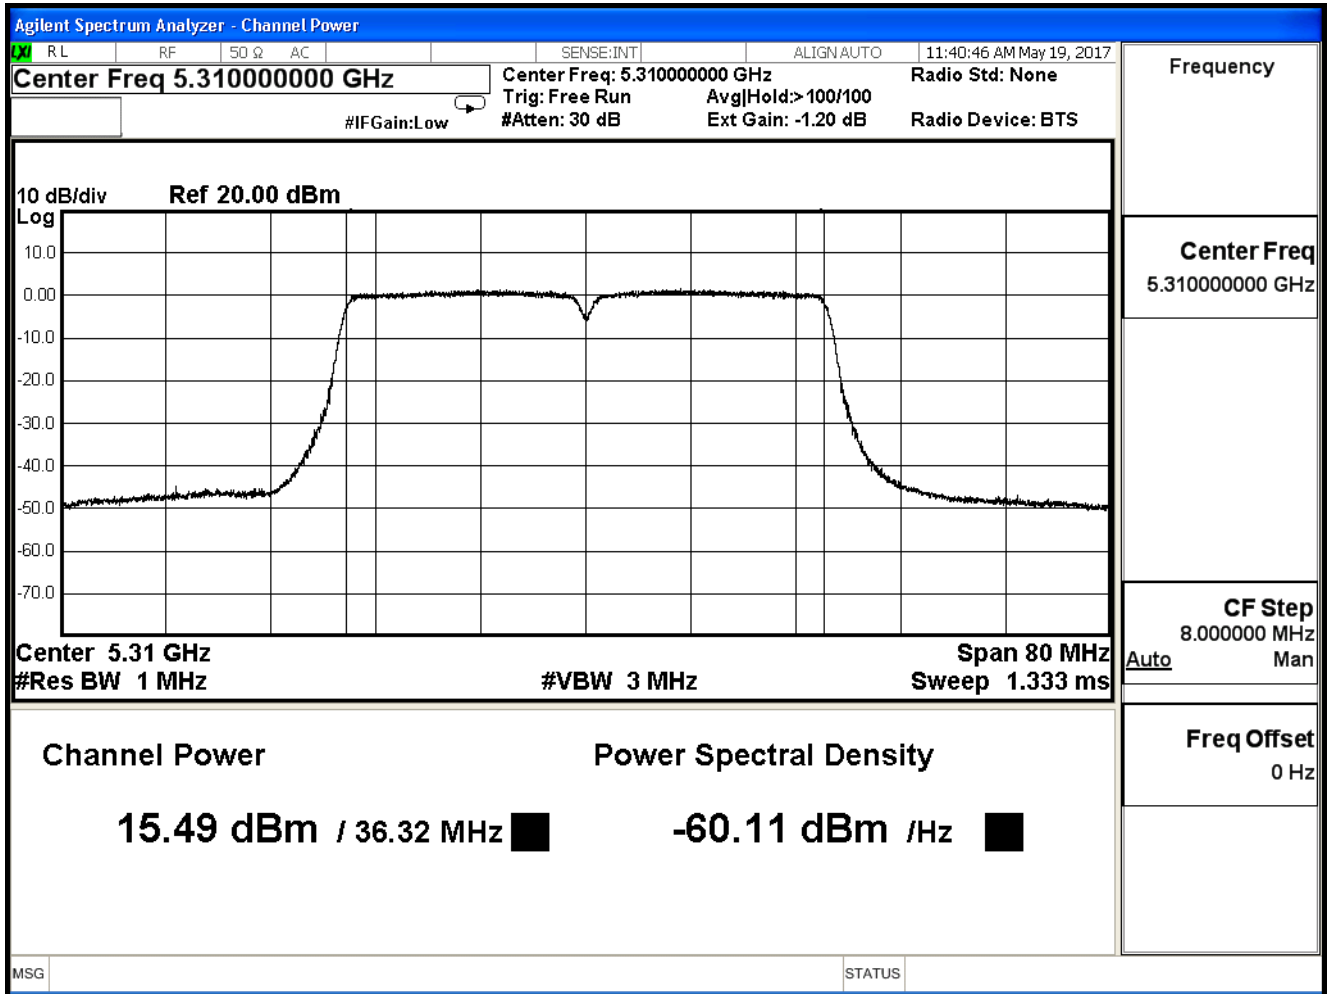


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/05/19	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 3)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
54	5270	17.950	≤ 24
62	5310	15.510	≤ 24

The worst emission of data rate is MCS 24

Channel 54 (5270MHz)

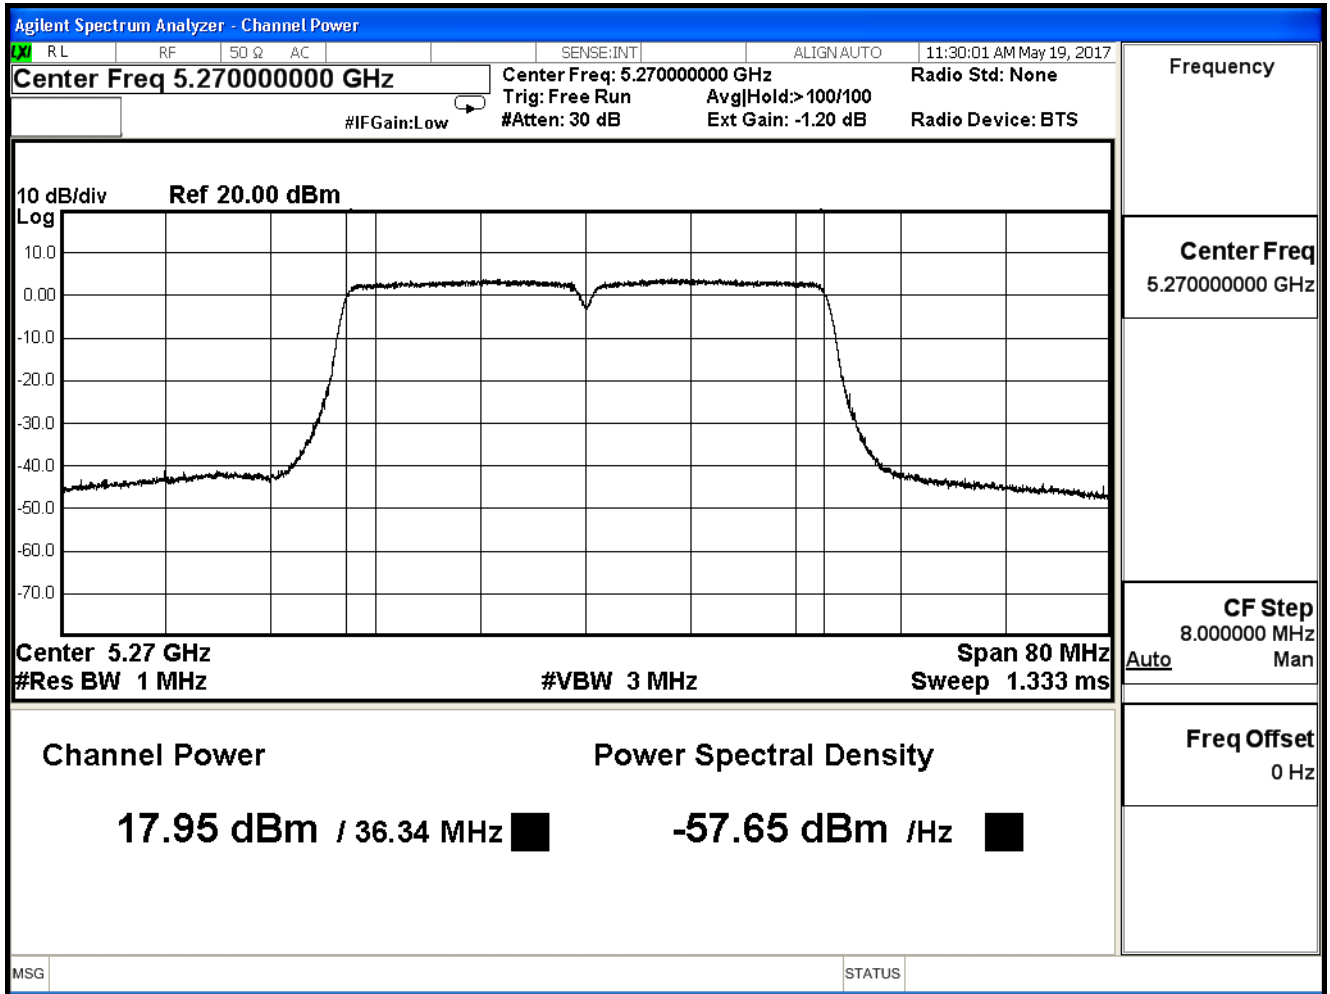

Channel 62 (5310MHz)

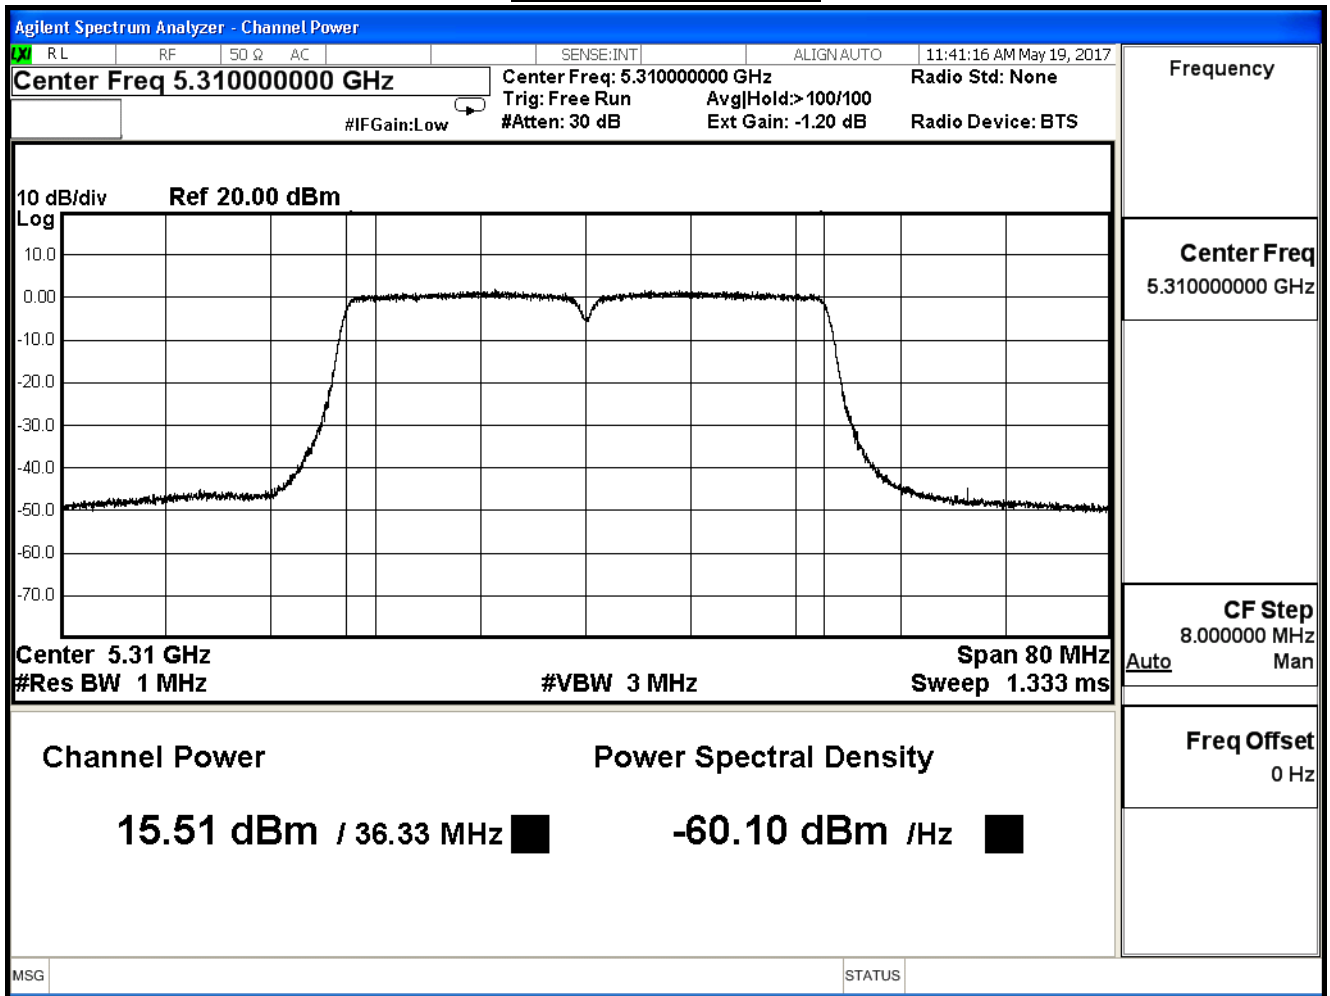

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/05/19	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 0+1+2+3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
54	5270	23.913	≤ 24
62	5310	21.498	≤ 24


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11ac(80MHz) (ANT 0)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
58	5290	14.750	≤ 24

The worst emission of data rate is MCS0

Channel 58 (5290MHz)

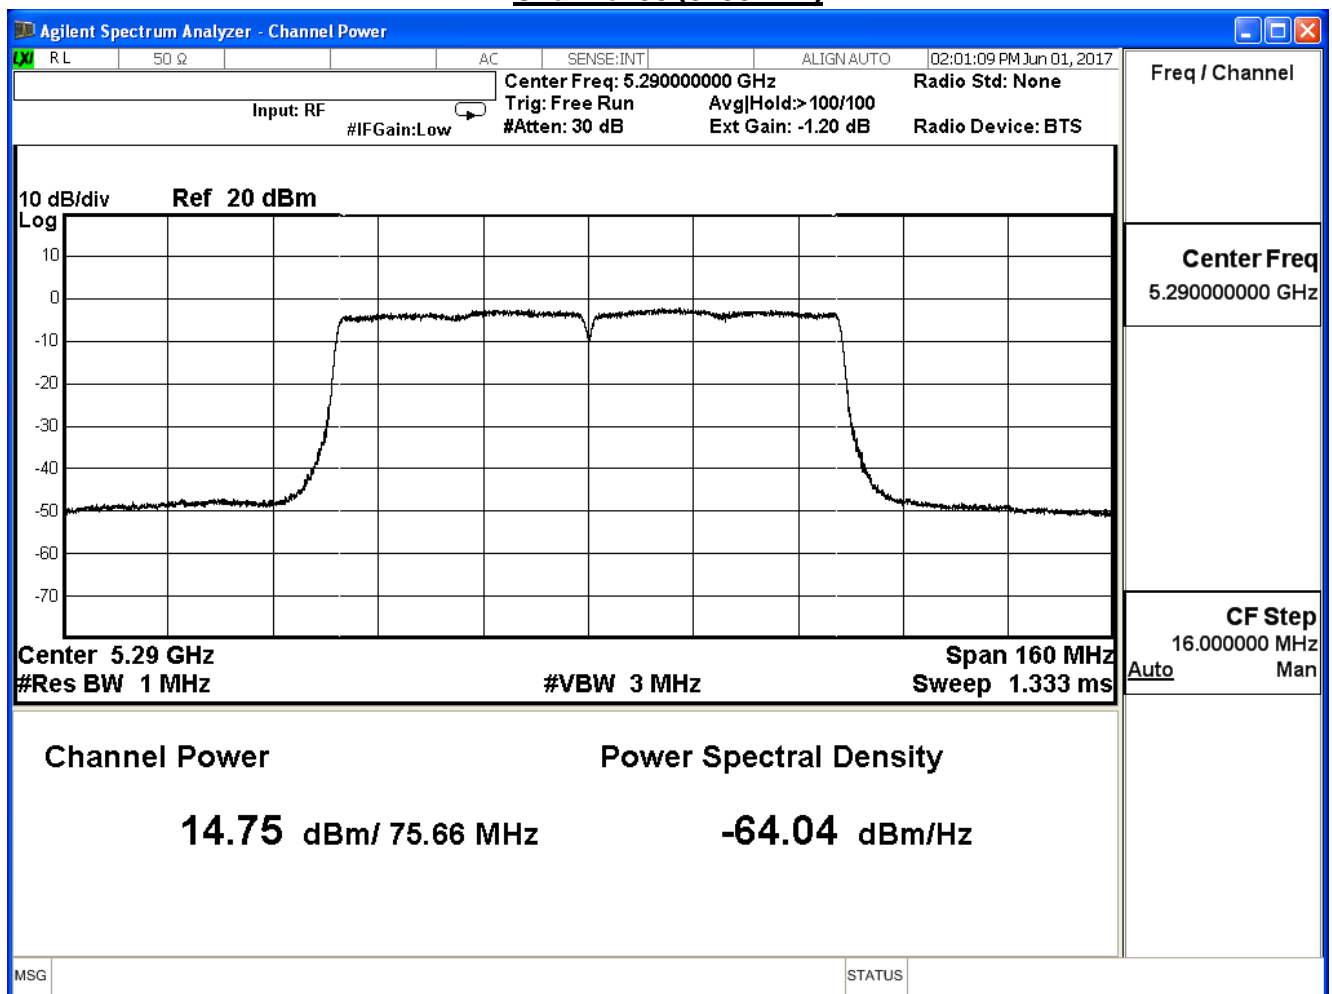


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11ac(80MHz) (ANT 1)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
58	5290	14.720	≤ 24

The worst emission of data rate is MCS0

Channel 58 (5290MHz)

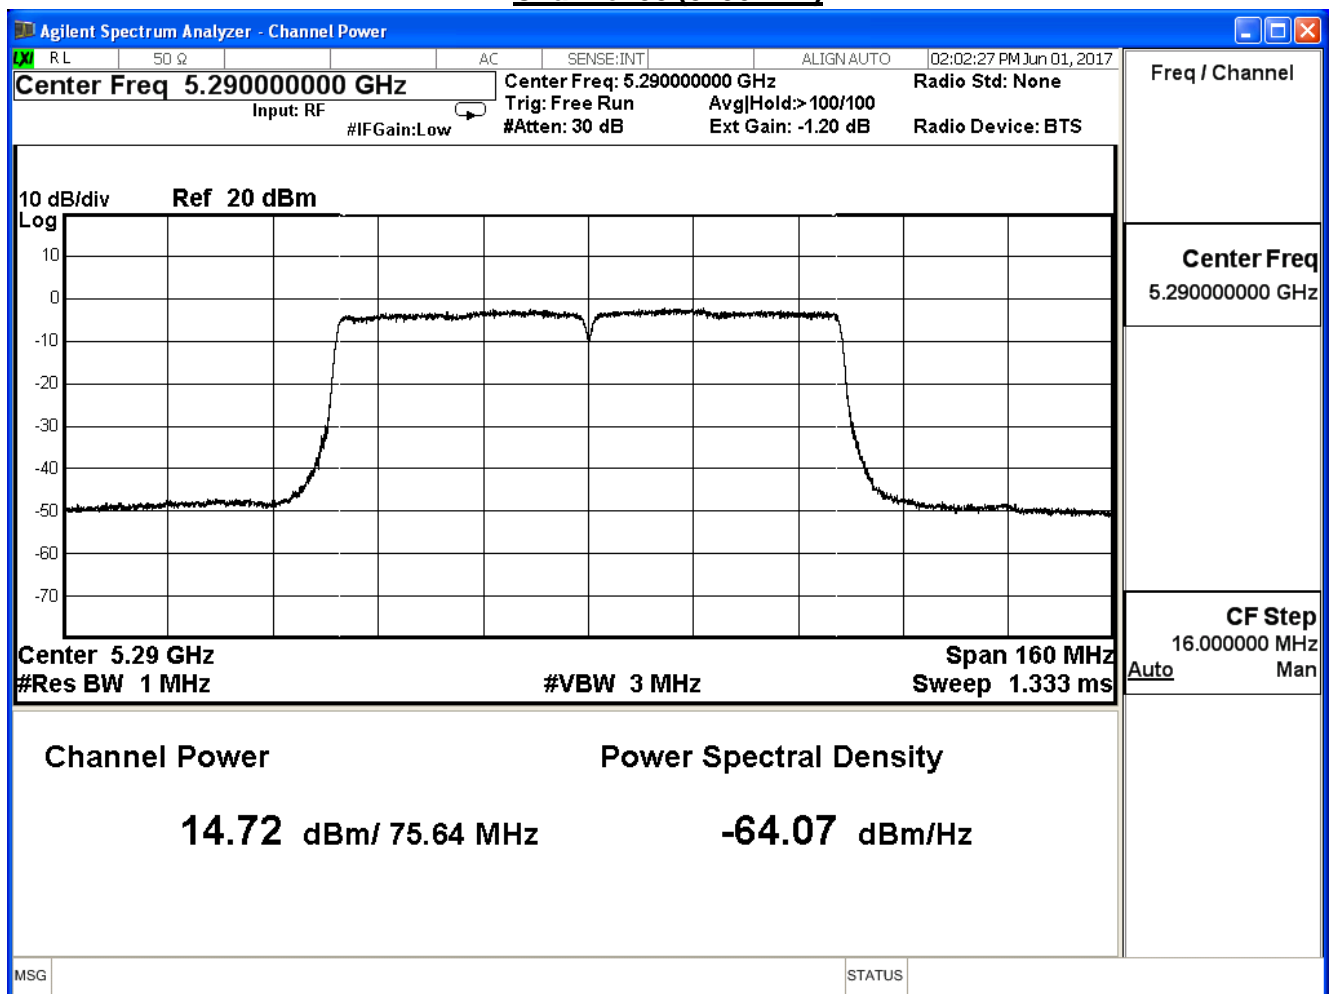


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11ac(80MHz) (ANT 2)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
58	5290	14.740	≤24

The worst emission of data rate is MCS0

Channel 58 (5290MHz)

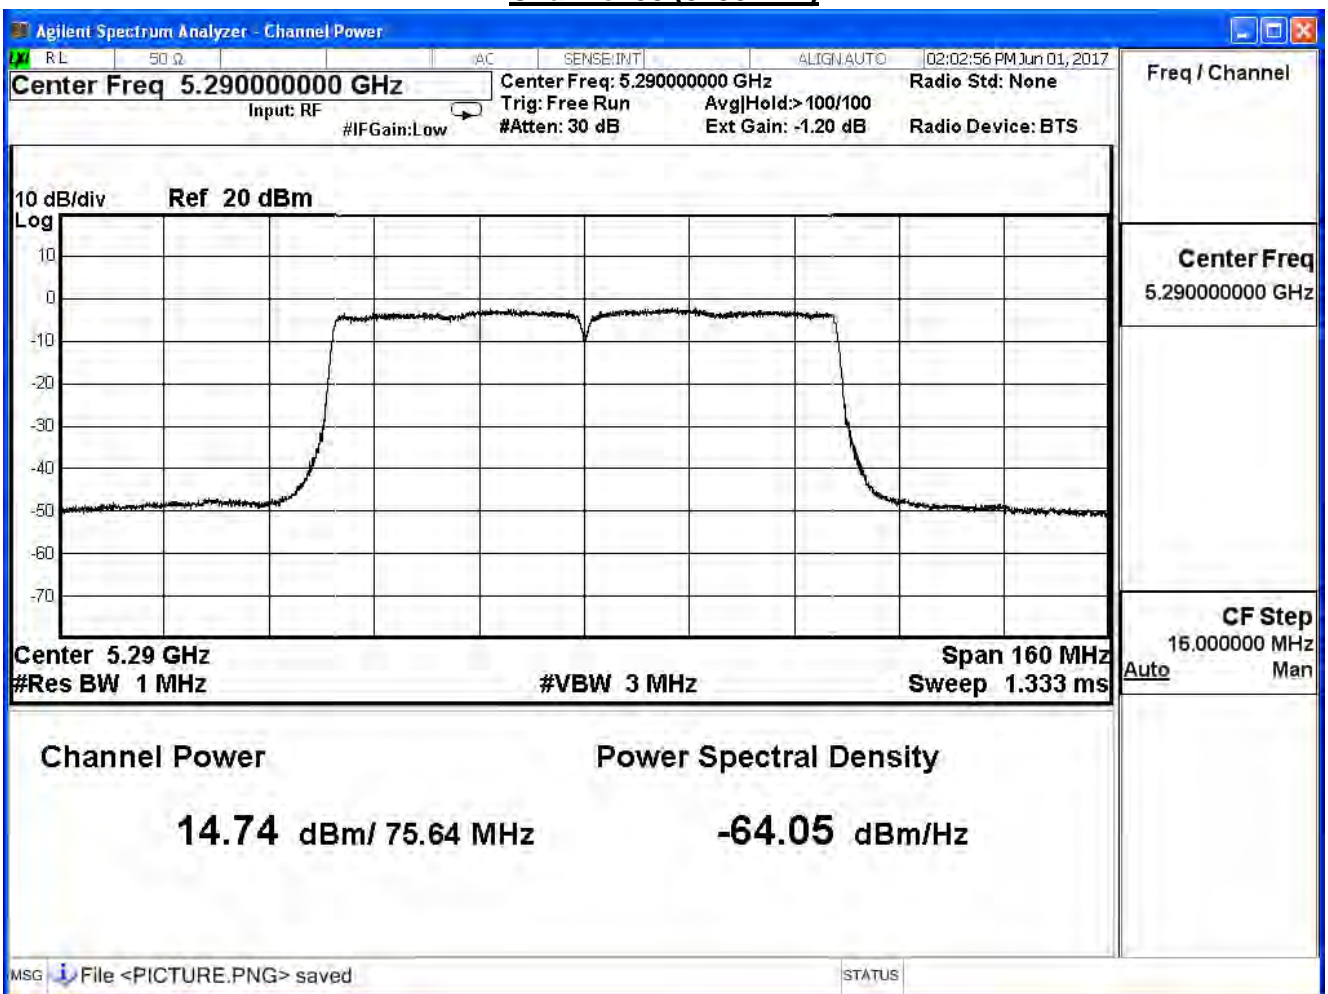


Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11ac(80MHz) (ANT 3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
58	5290	14.700	≤24

The worst emission of data rate is MCS0

Channel 58 (5290MHz)

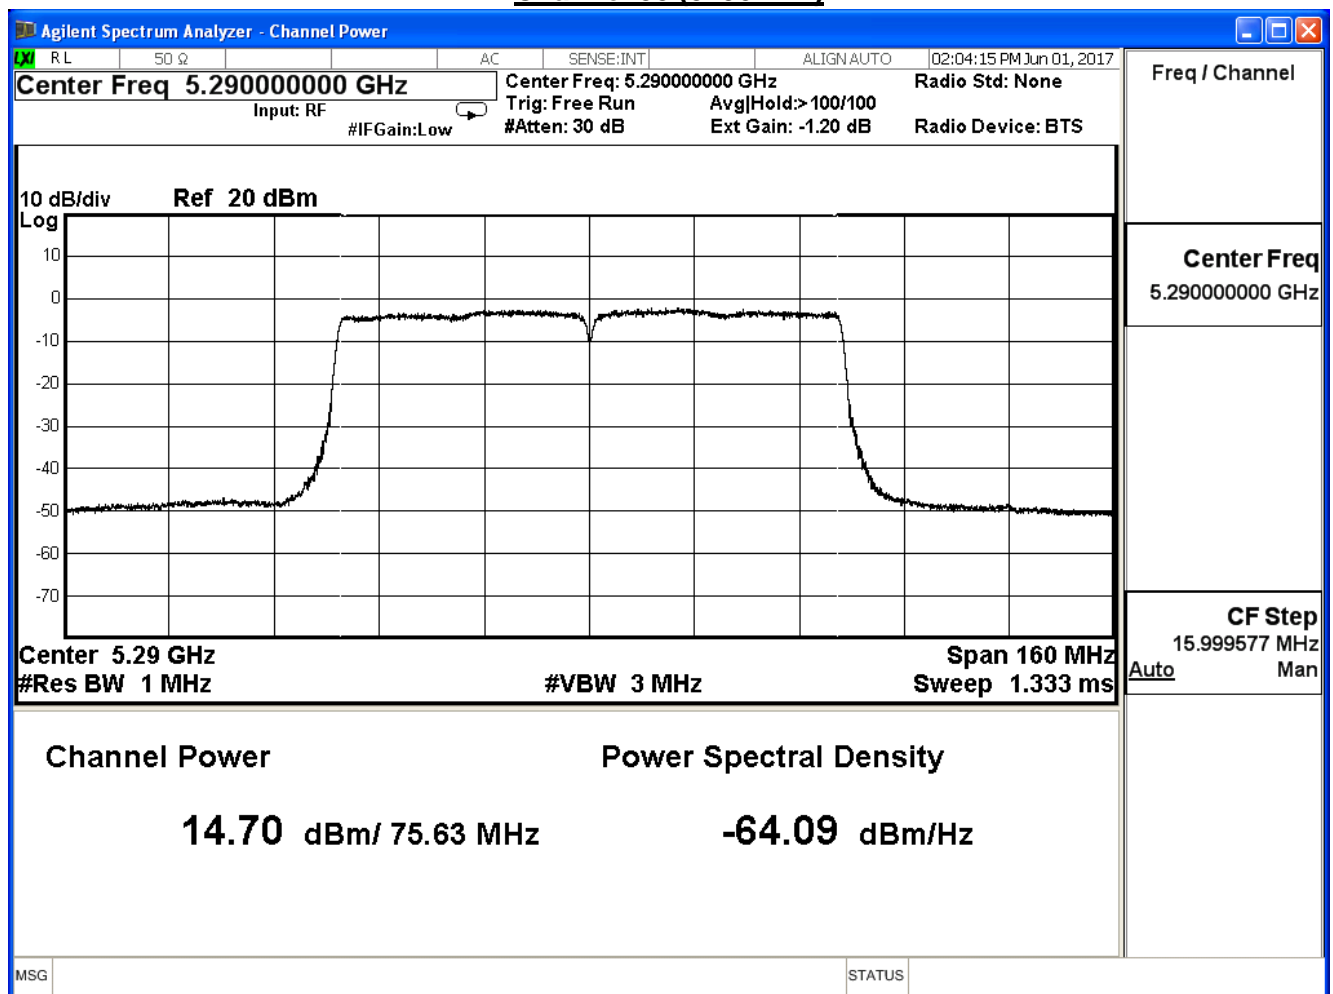

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 2: Tx_AD P: AD890326010-2LF_ MIMO Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11ac(80MHz)(ANT 0+1+2+3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
58	5290	20.748	≤ 24

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/05/23	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 0)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	16.190	≤ 23.629
60	5300	16.020	≤ 23.629
64	5320	14.520	≤ 23.629

The worst emission of data rate is MCS 0


Directional gain= $10\log(\text{ANT N})+\text{Gain}=4.77+1.601=6.371$

Limit = $24\text{dBm}-(6.371\text{dBi}-6\text{dBi})=23.629\text{dBm}$


Channel 52 (5260MHz)

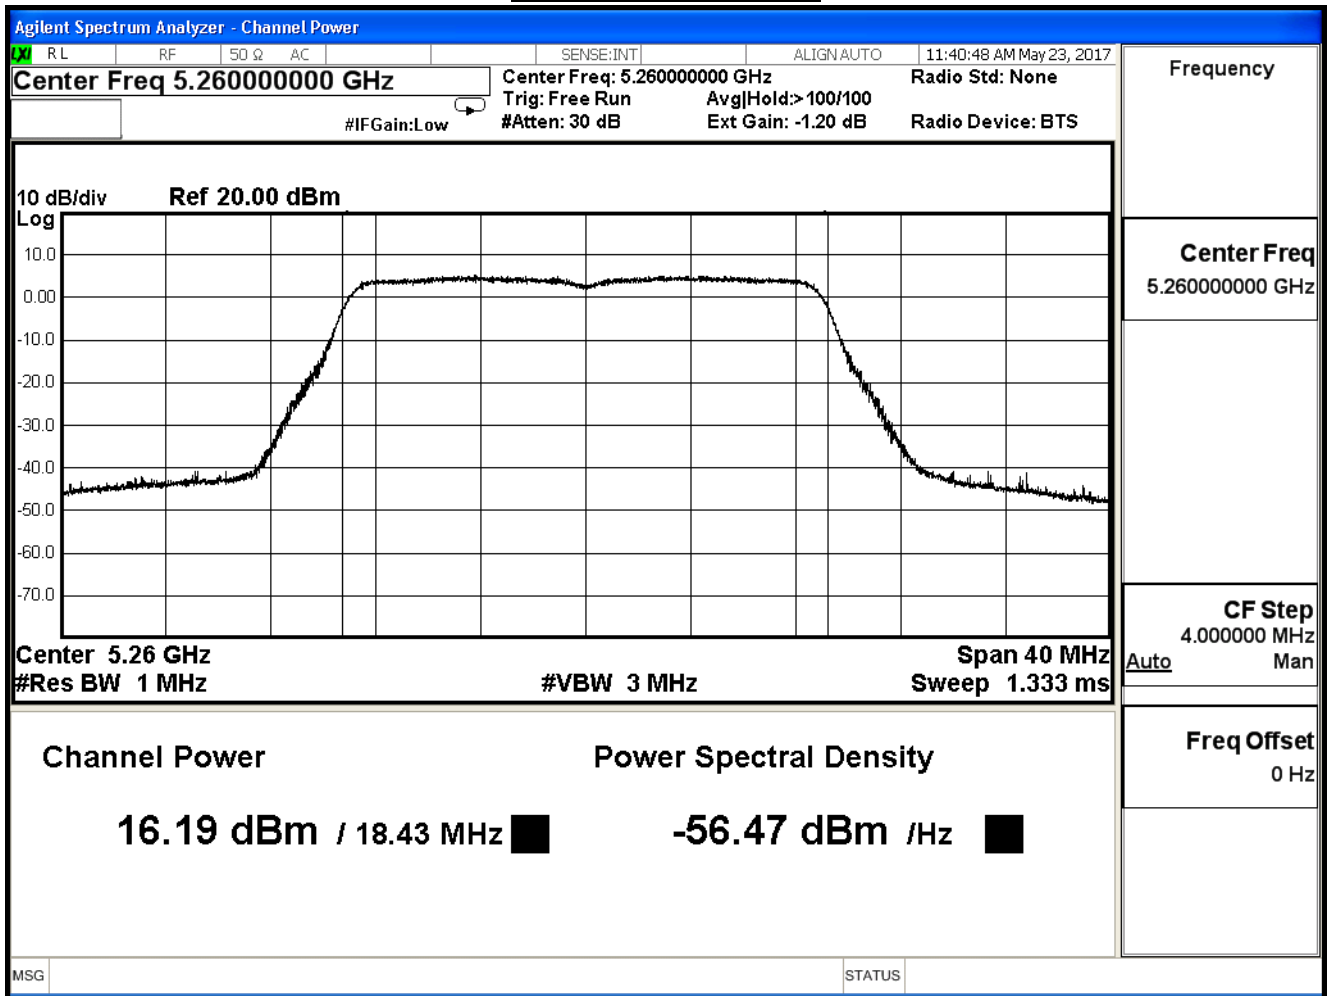

Channel 60 (5300MHz)

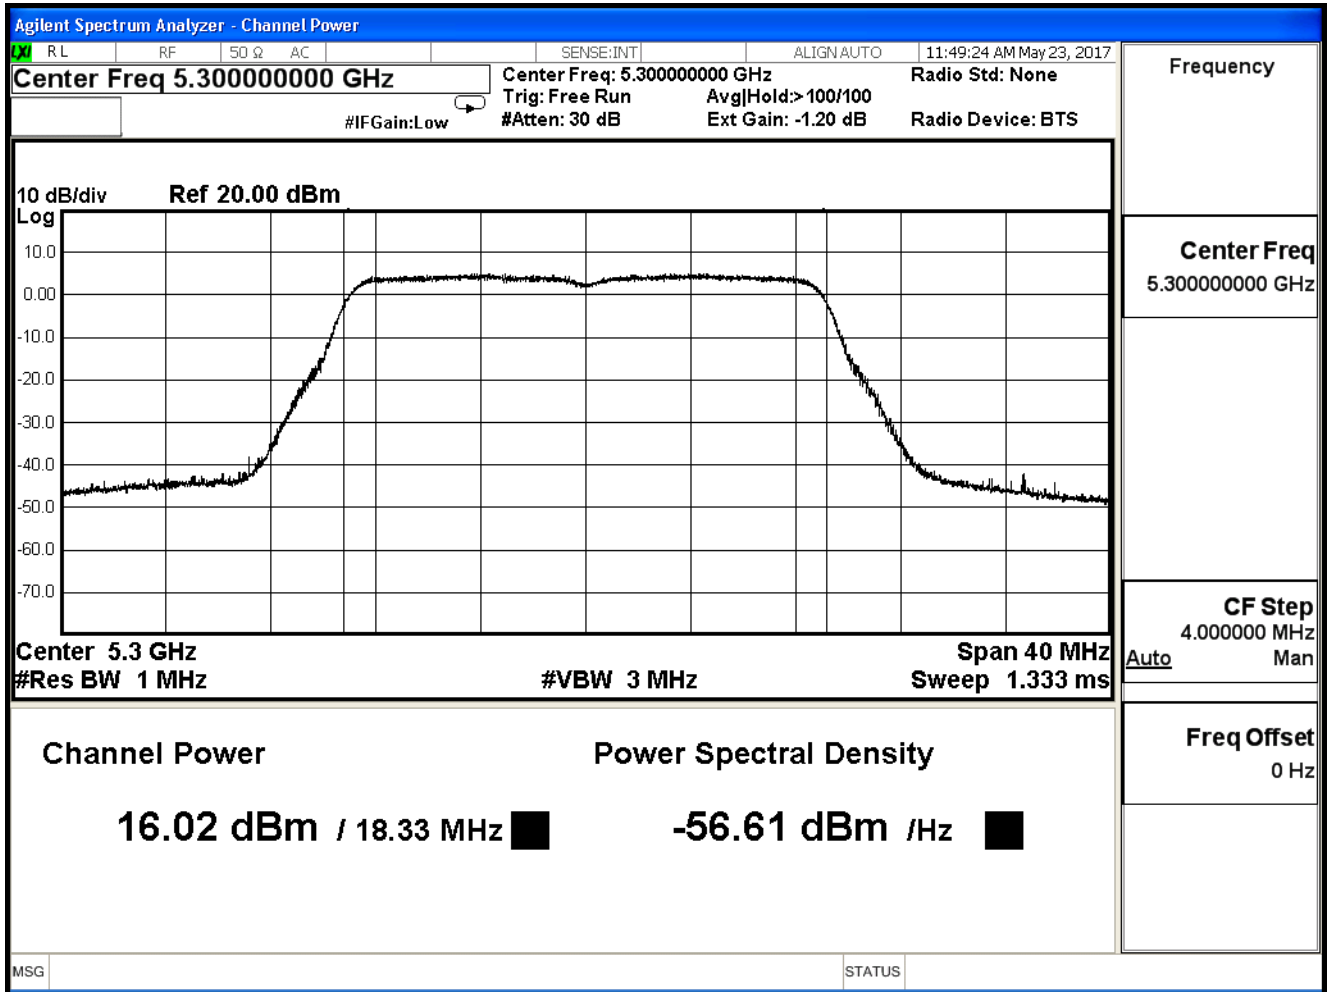

Channel 64 (5320MHz)

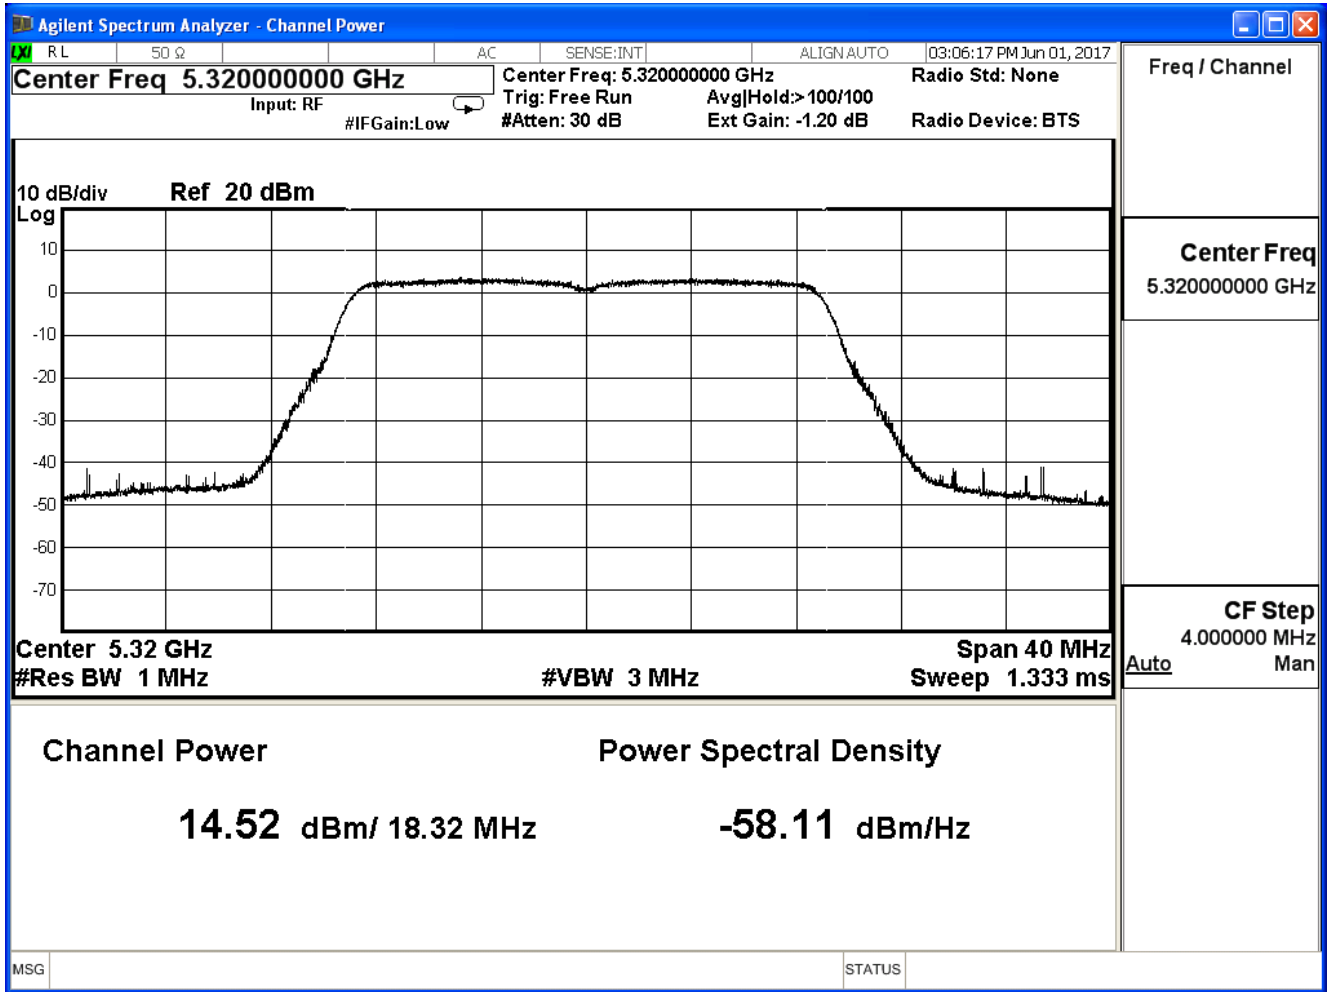

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/05/23	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 1)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	16.110	≤ 23.629
60	5300	16.000	≤ 23.629
64	5320	14.590	≤ 23.629

The worst emission of data rate is MCS 0


Directional gain= $10\log(\text{ANT N})+\text{Gain}=4.77+1.601=6.371$

Limit = $24\text{dBm}-(6.371\text{dBi}-6\text{dBi})=23.629\text{dBm}$


Channel 52 (5260MHz)

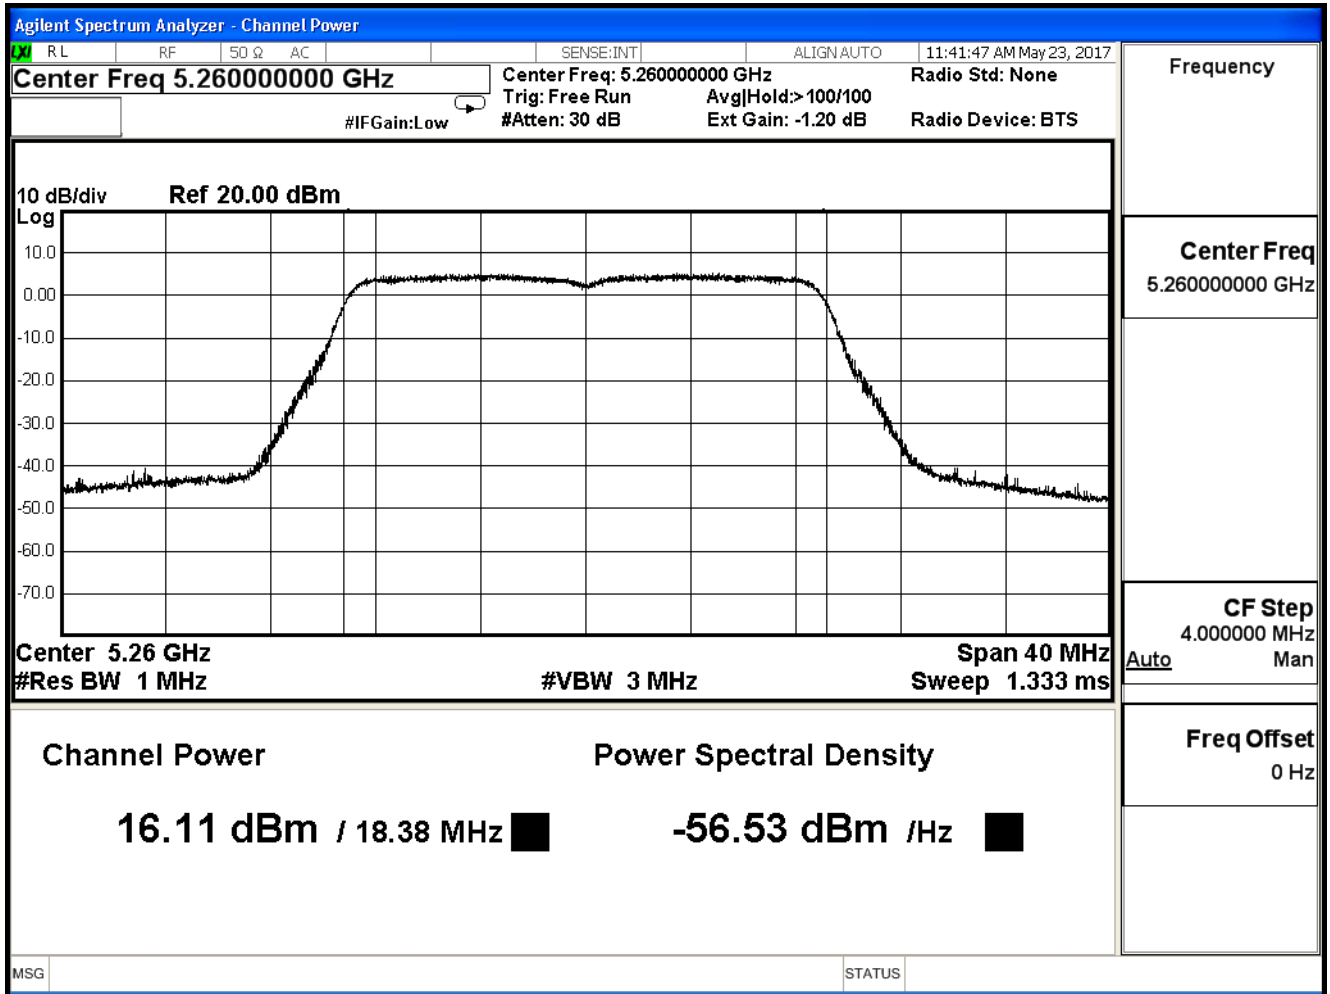

Channel 60 (5300MHz)

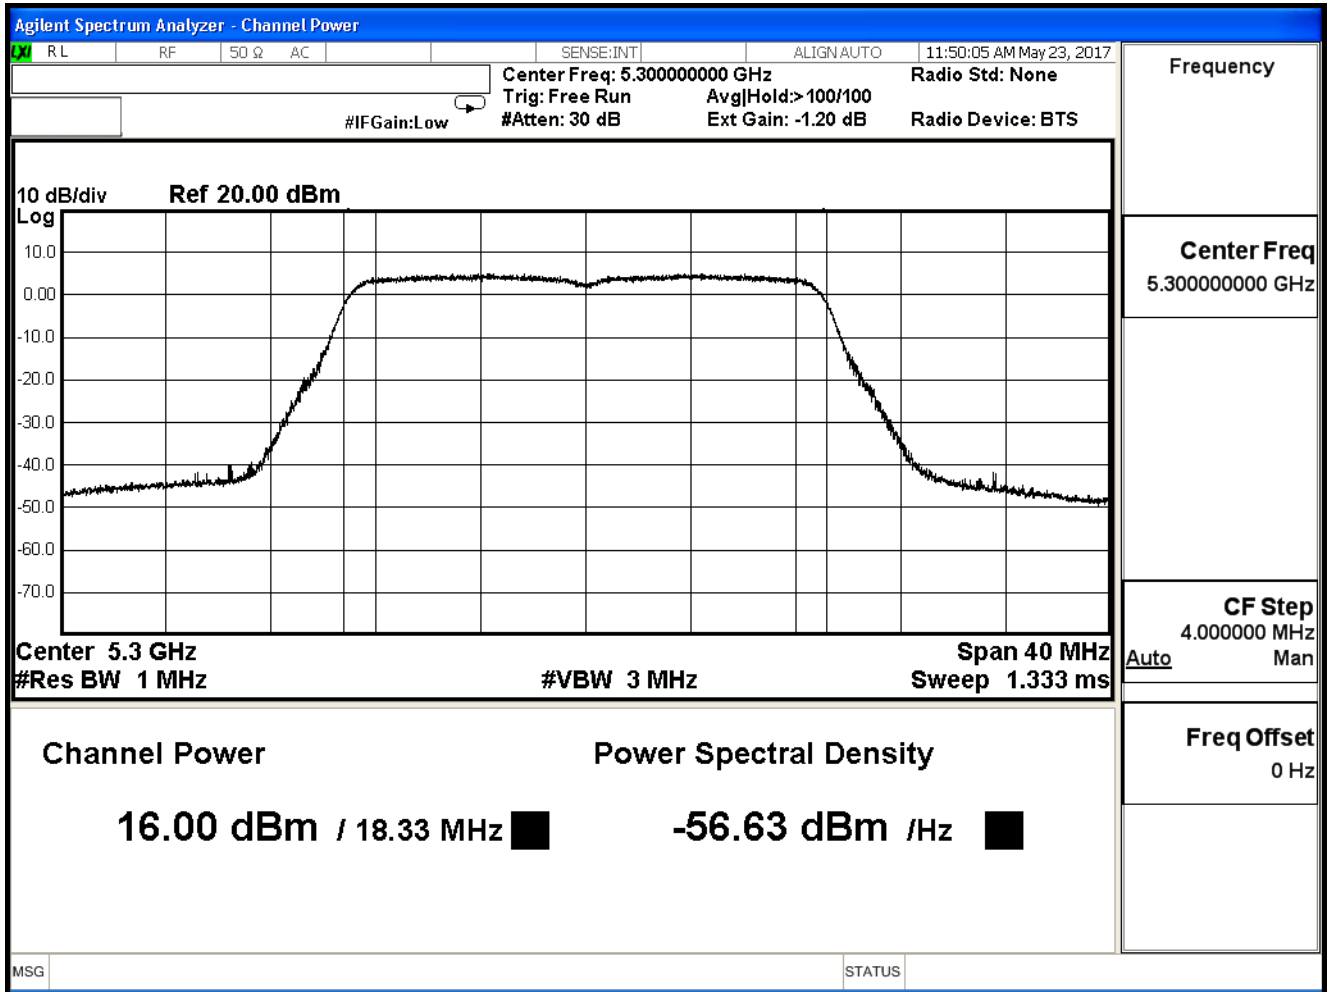

Channel 64 (5320MHz)

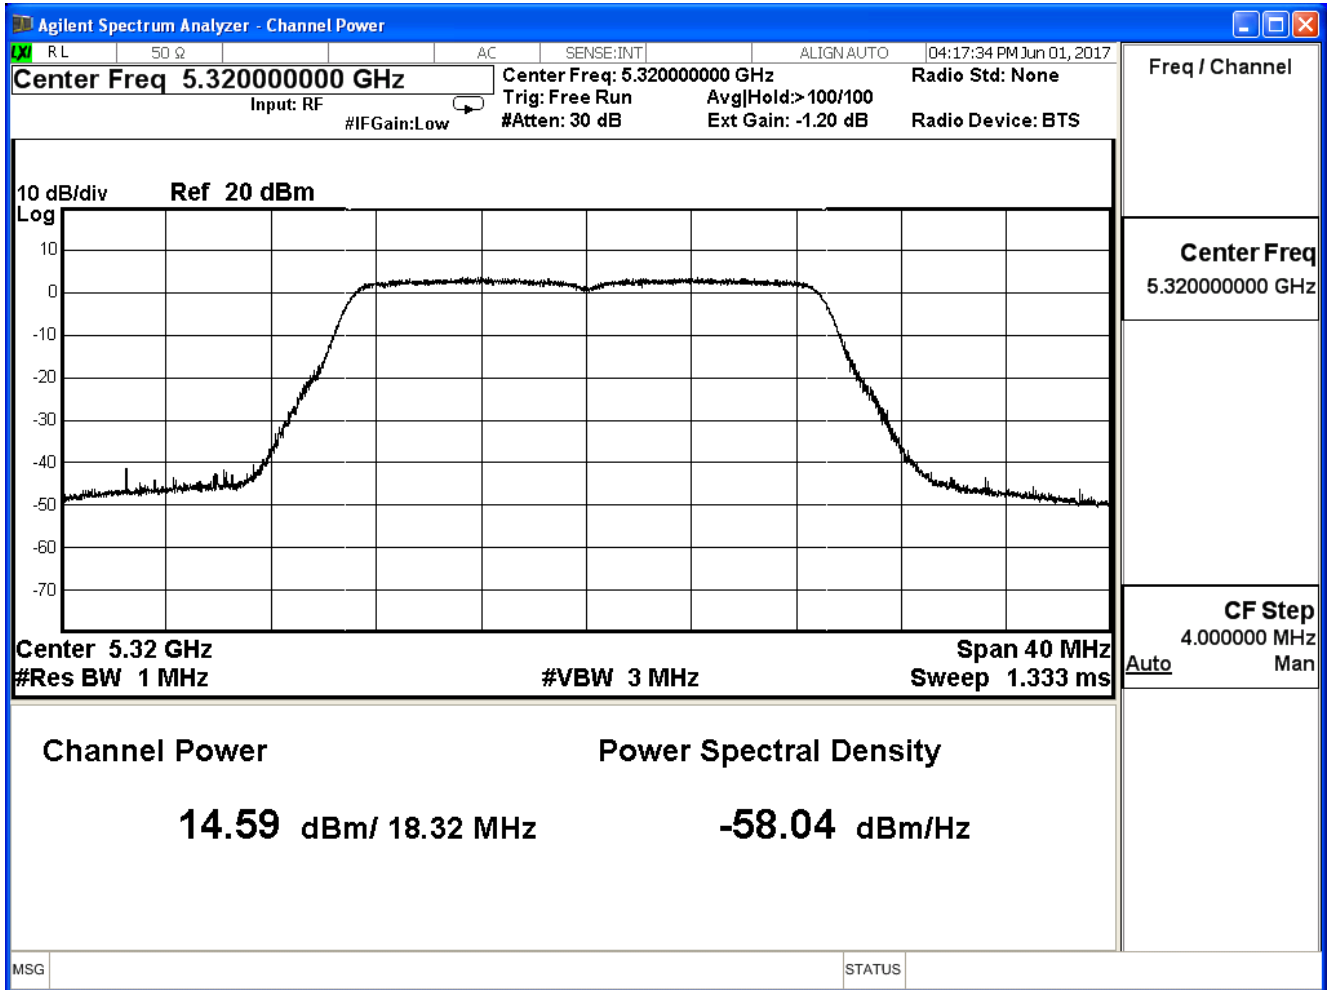

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/05/23	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 2)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	16.080	≤ 23.629
60	5300	16.010	≤ 23.629
64	5320	14.580	≤ 23.629

The worst emission of data rate is MCS 0


Directional gain= $10\log(\text{ANT N})+\text{Gain}=4.77+1.601=6.371$

Limit = $24\text{dBm}-(6.371\text{dBi}-6\text{dBi})=23.629\text{dBm}$


Channel 52 (5260MHz)

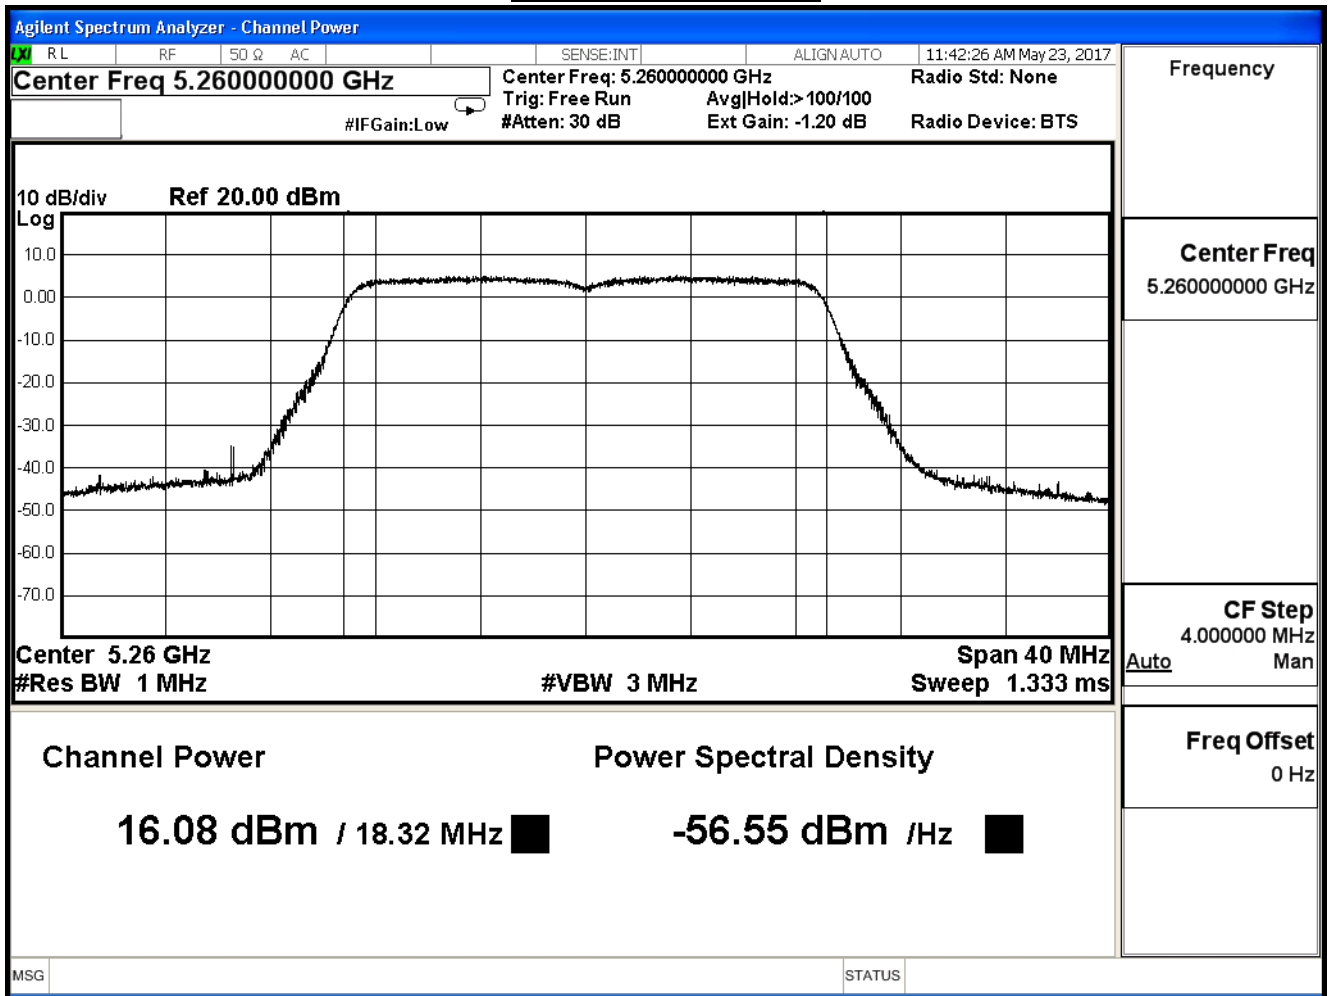

Channel 60 (5300MHz)

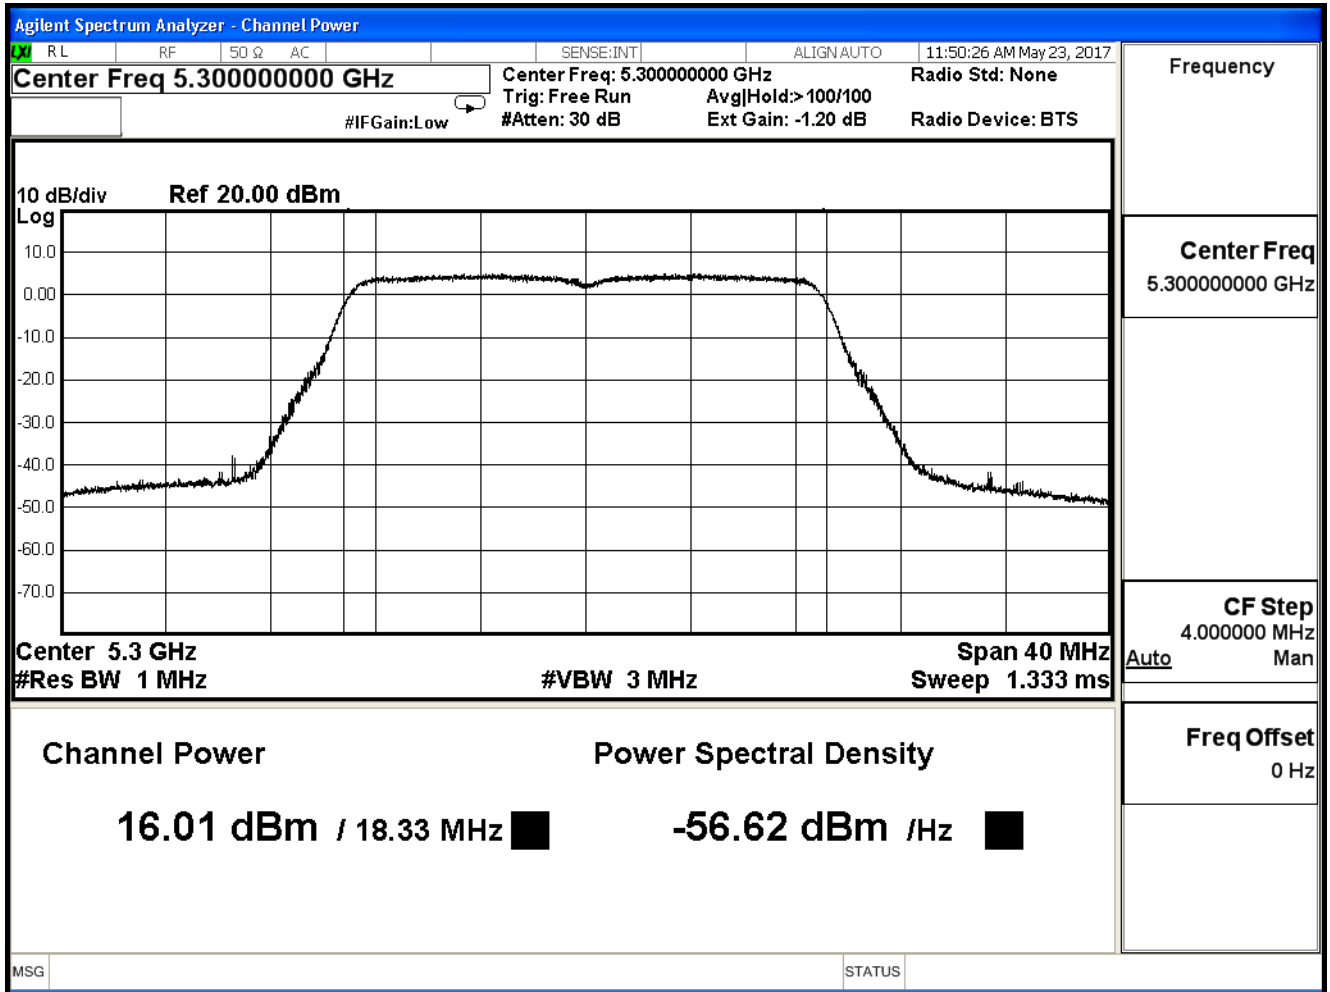

Channel 64 (5320MHz)

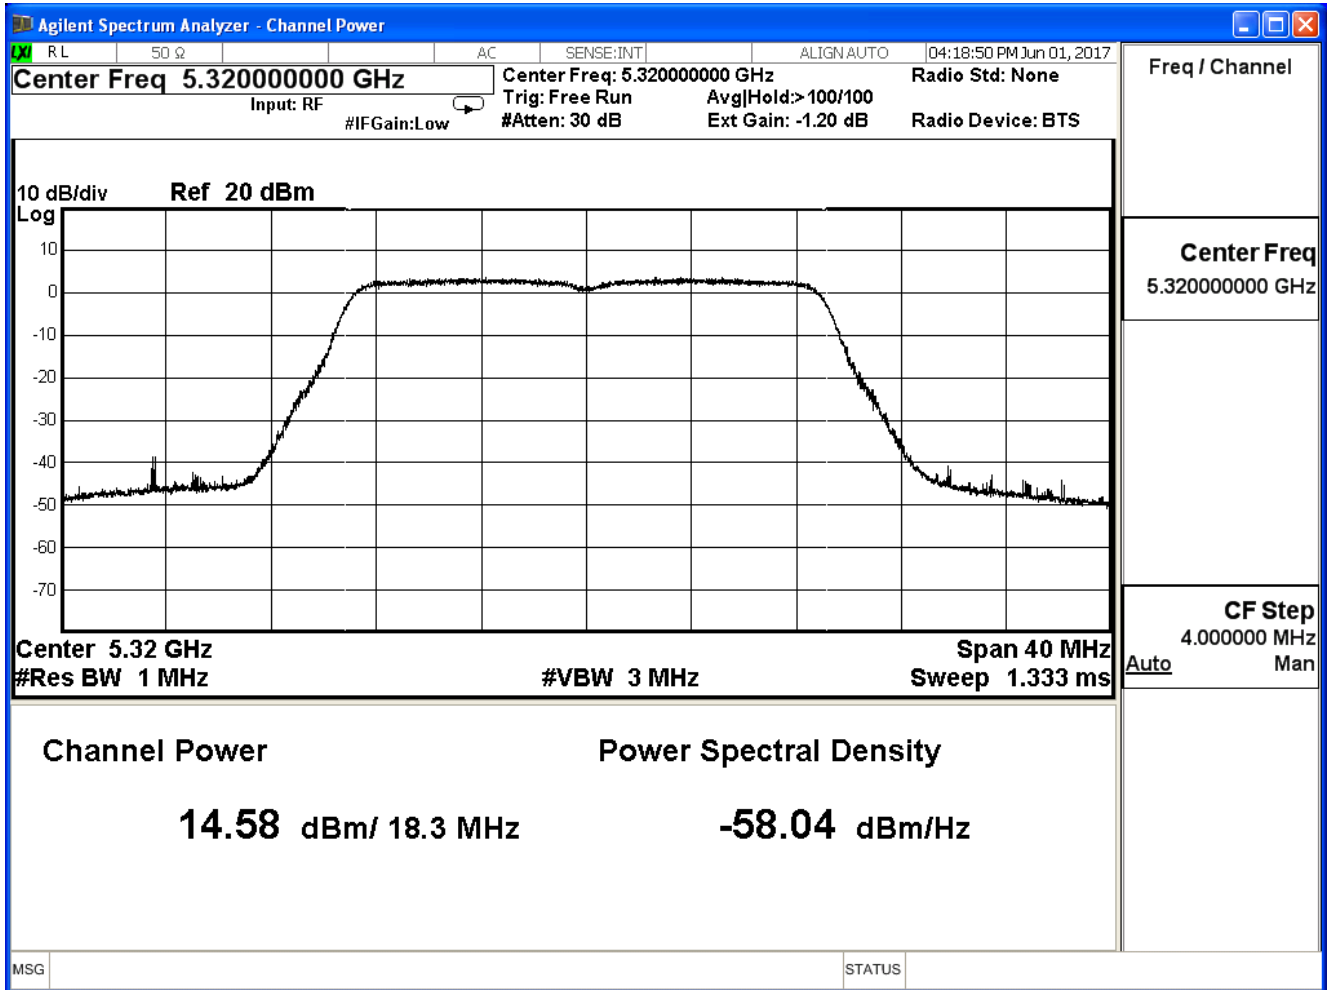

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/05/23	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 3)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	16.040	≤ 23.629
60	5300	16.010	≤ 23.629
64	5320	14.560	≤ 23.629

The worst emission of data rate is MCS 0


Directional gain= $10\log(\text{ANT N})+\text{Gain}=4.77+1.601=6.371$

Limit = $24\text{dBm}-(6.371\text{dBi}-6\text{dBi})=23.629\text{dBm}$


Channel 52 (5260MHz)

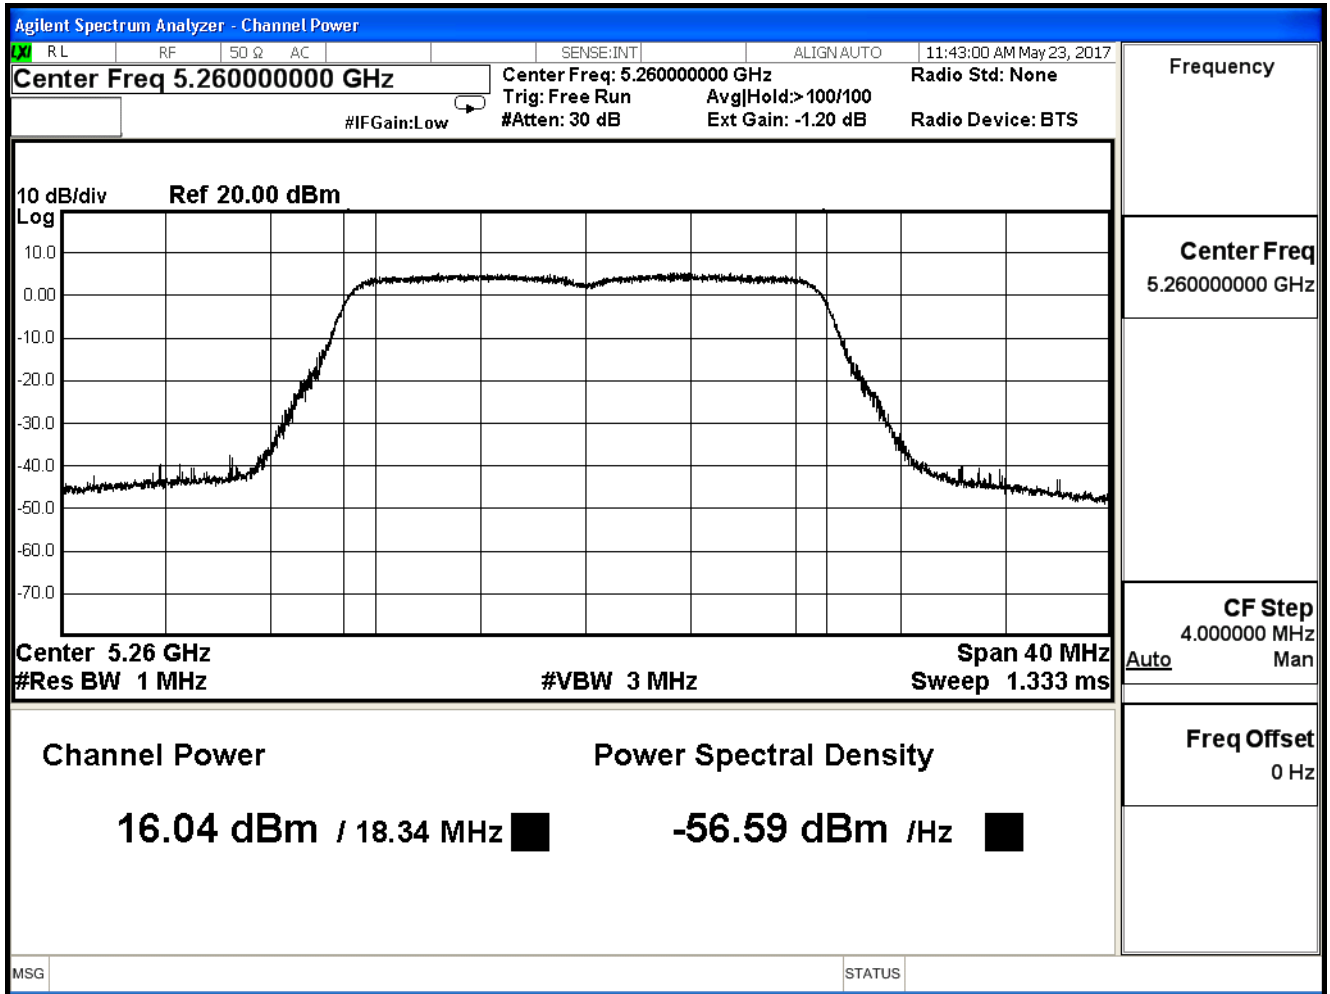

Channel 60 (5300MHz)

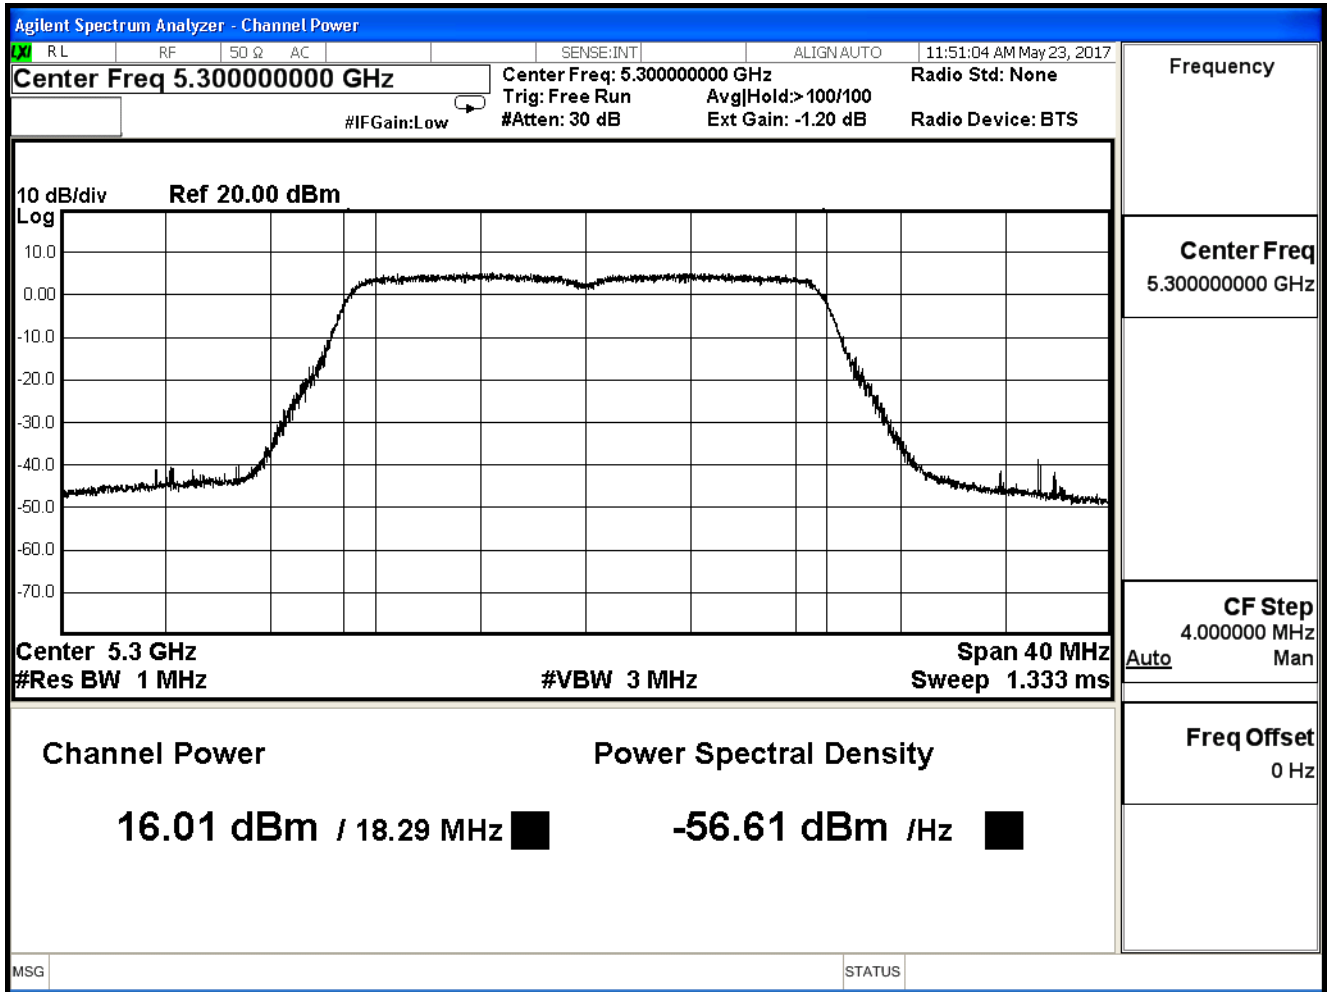

Channel 64 (5320MHz)

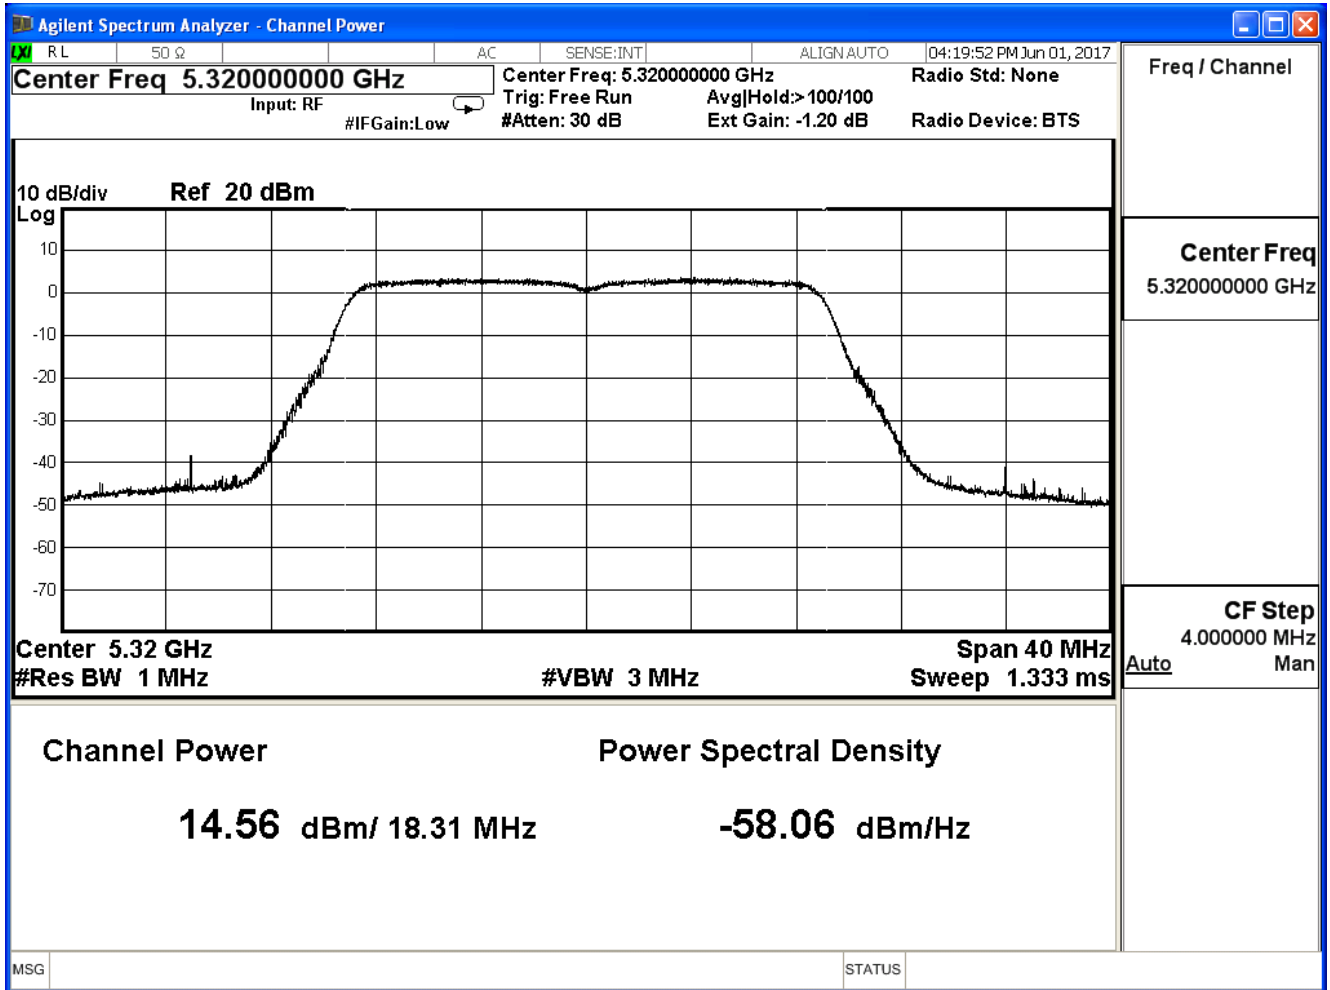

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/05/23	Test Site	SR10-H

IEEE 802.11n(20MHz)(ANT 0+1+2+3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
52	5260	22.126	≤ 23.629
60	5300	22.031	≤ 23.629
64	5320	20.583	≤ 23.629

Directional gain= $10\log(\text{ANT N}) + \text{Gain} = 4.77 + 1.601 = 6.371$

Limit = $24\text{dBm} - (6.371\text{dBi} - 6\text{dBi}) = 23.629\text{dBm}$

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 0)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
54	5270	16.620	≤ 23.629
62	5310	12.700	≤ 23.629

The worst emission of data rate is MCS 0


Directional gain= $10\log(\text{ANT N})+\text{Gain}=4.77+1.601=6.371$

Limit = $24\text{dBm}-(6.371\text{dBi}-6\text{dBi})=23.629\text{dBm}$

Channel 54 (5270MHz)

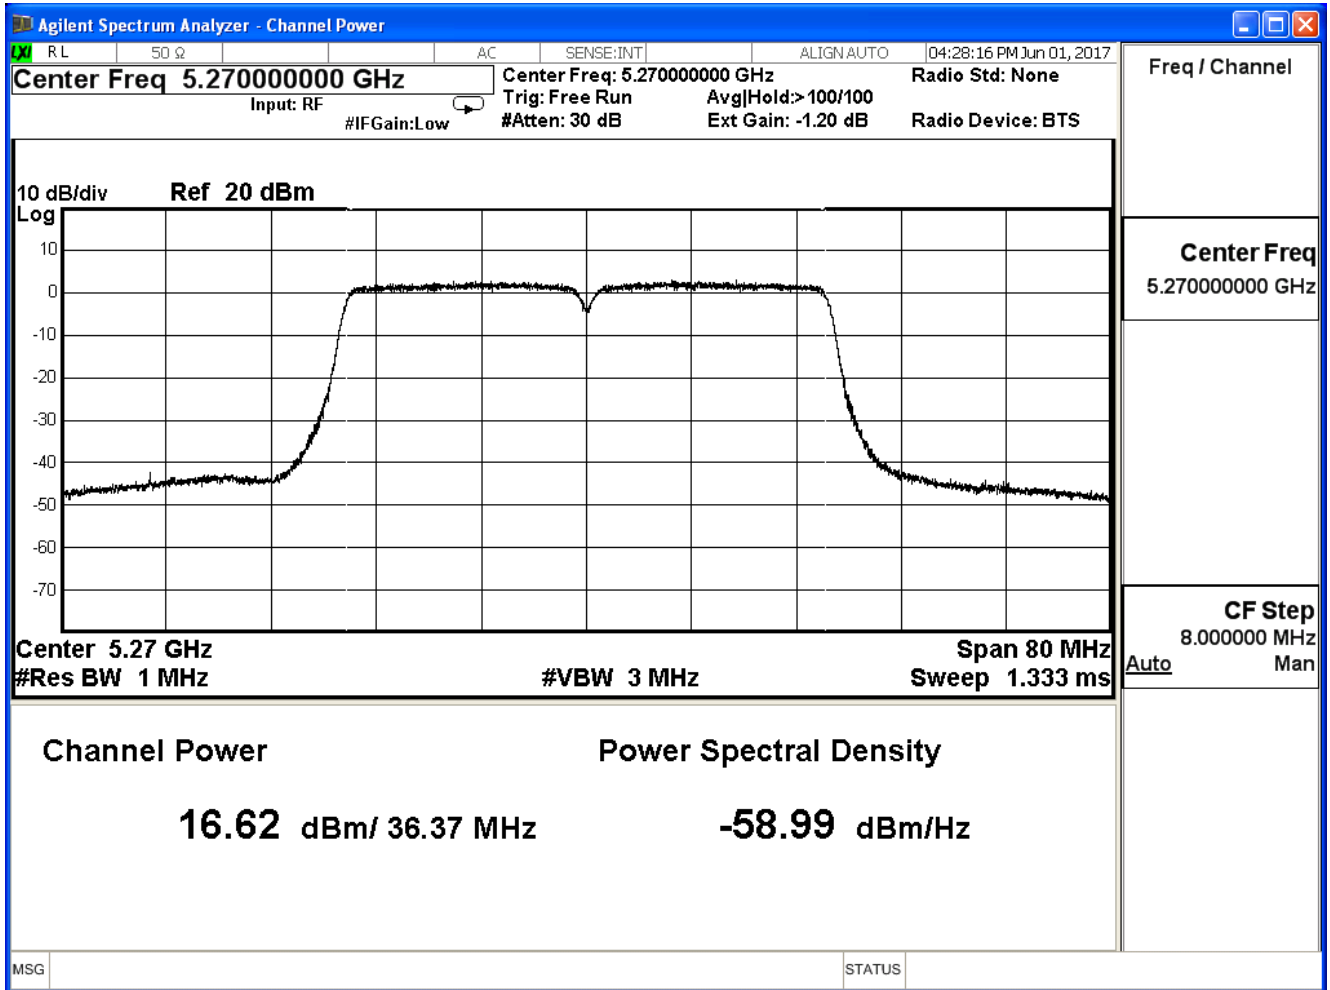

Channel 62 (5310MHz)

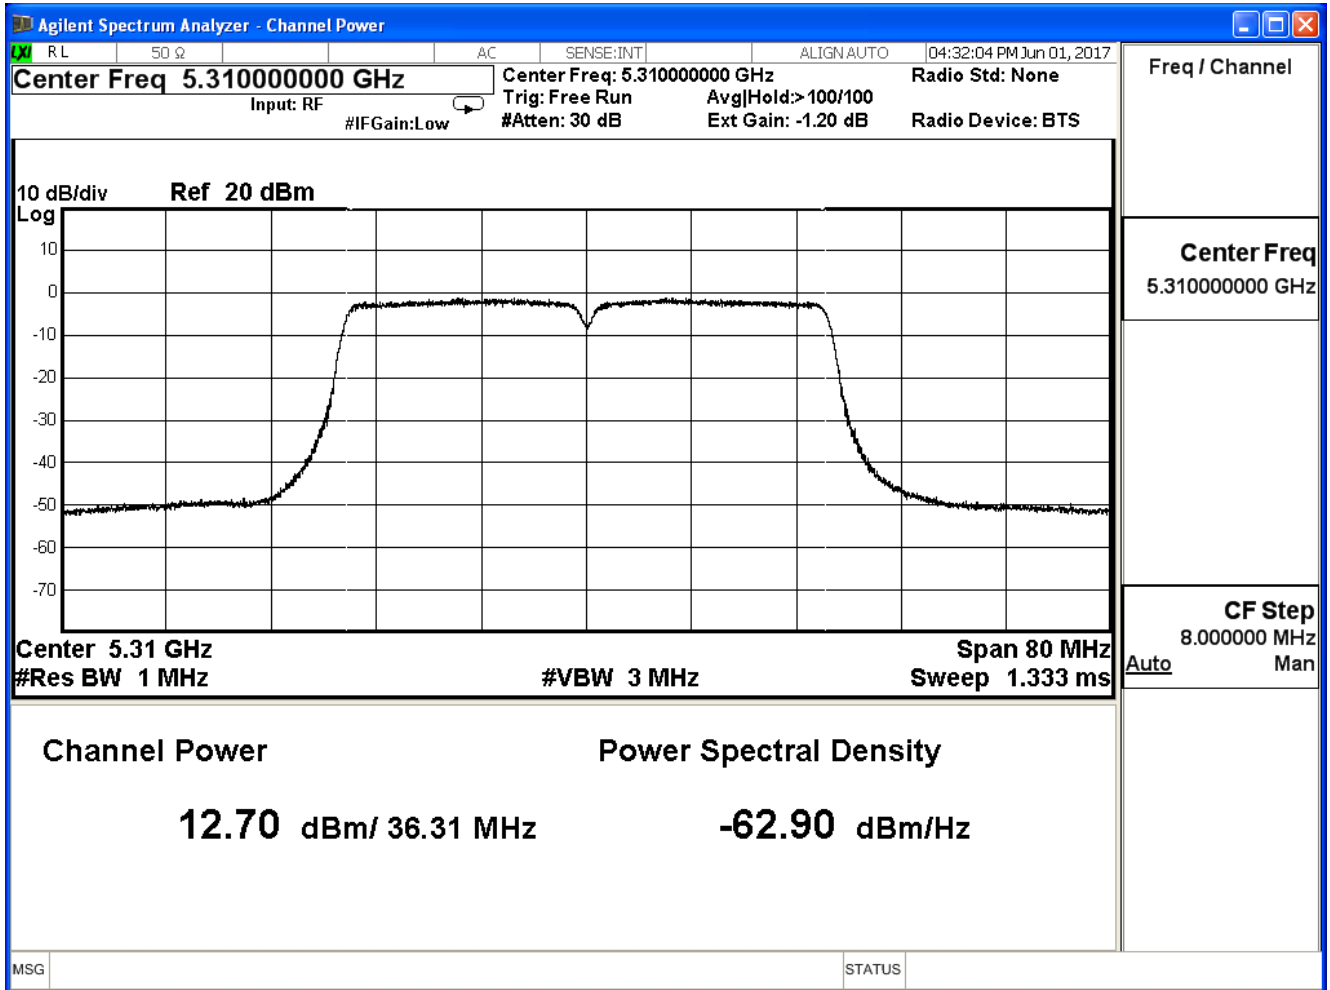

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 1)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
54	5270	16.650	≤ 23.629
62	5310	12.660	≤ 23.629

The worst emission of data rate is MCS 0


Directional gain= $10\log(\text{ANT N})+\text{Gain}=4.77+1.601=6.371$

Limit = $24\text{dBm}-(6.371\text{dBi}-6\text{dBi})=23.629\text{dBm}$

Channel 54 (5270MHz)

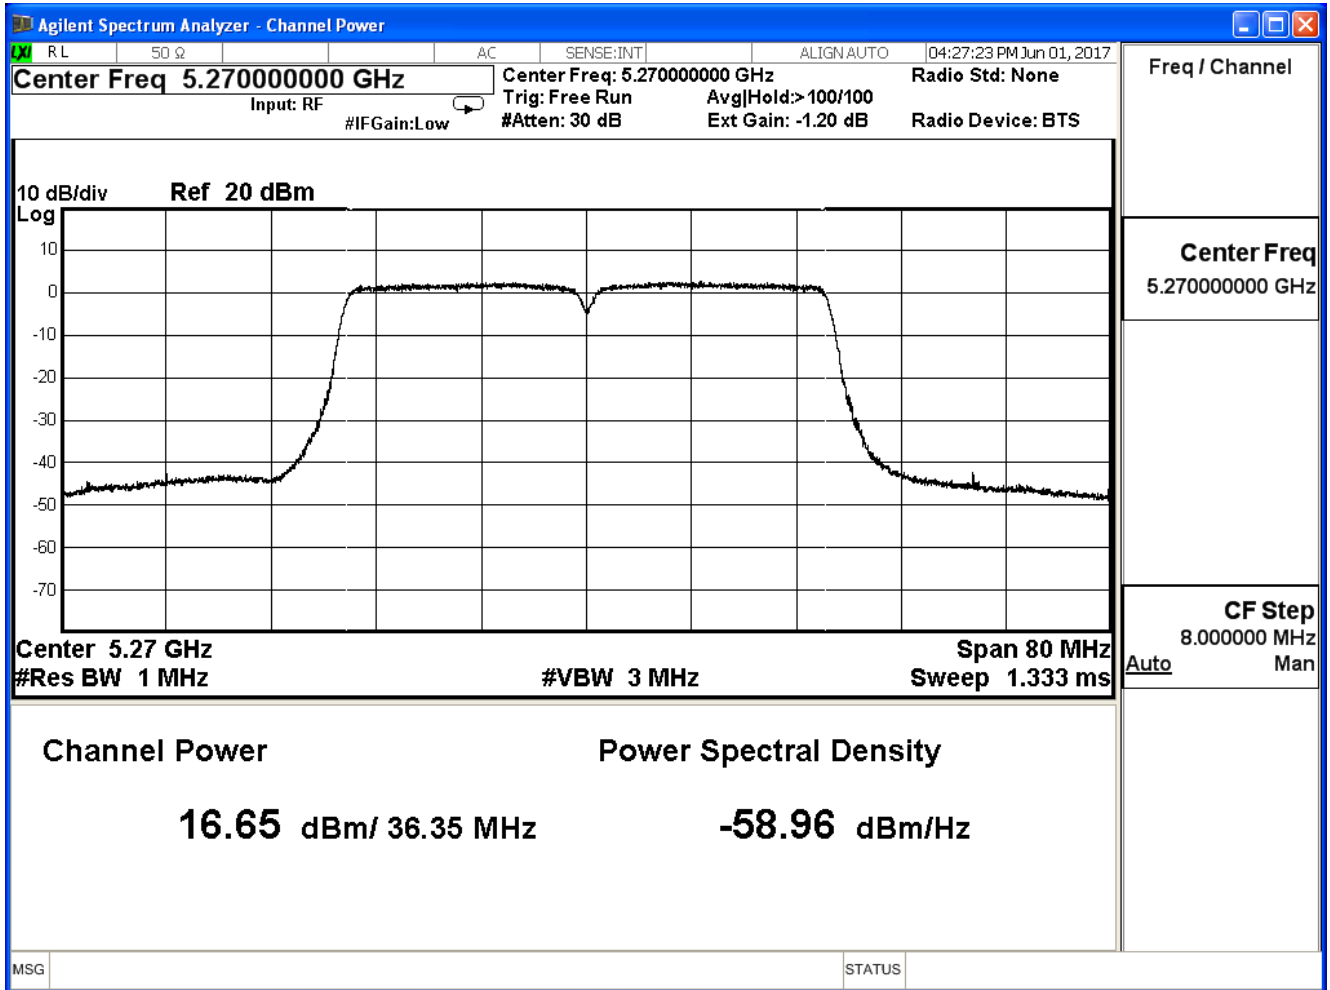

Channel 62 (5310MHz)

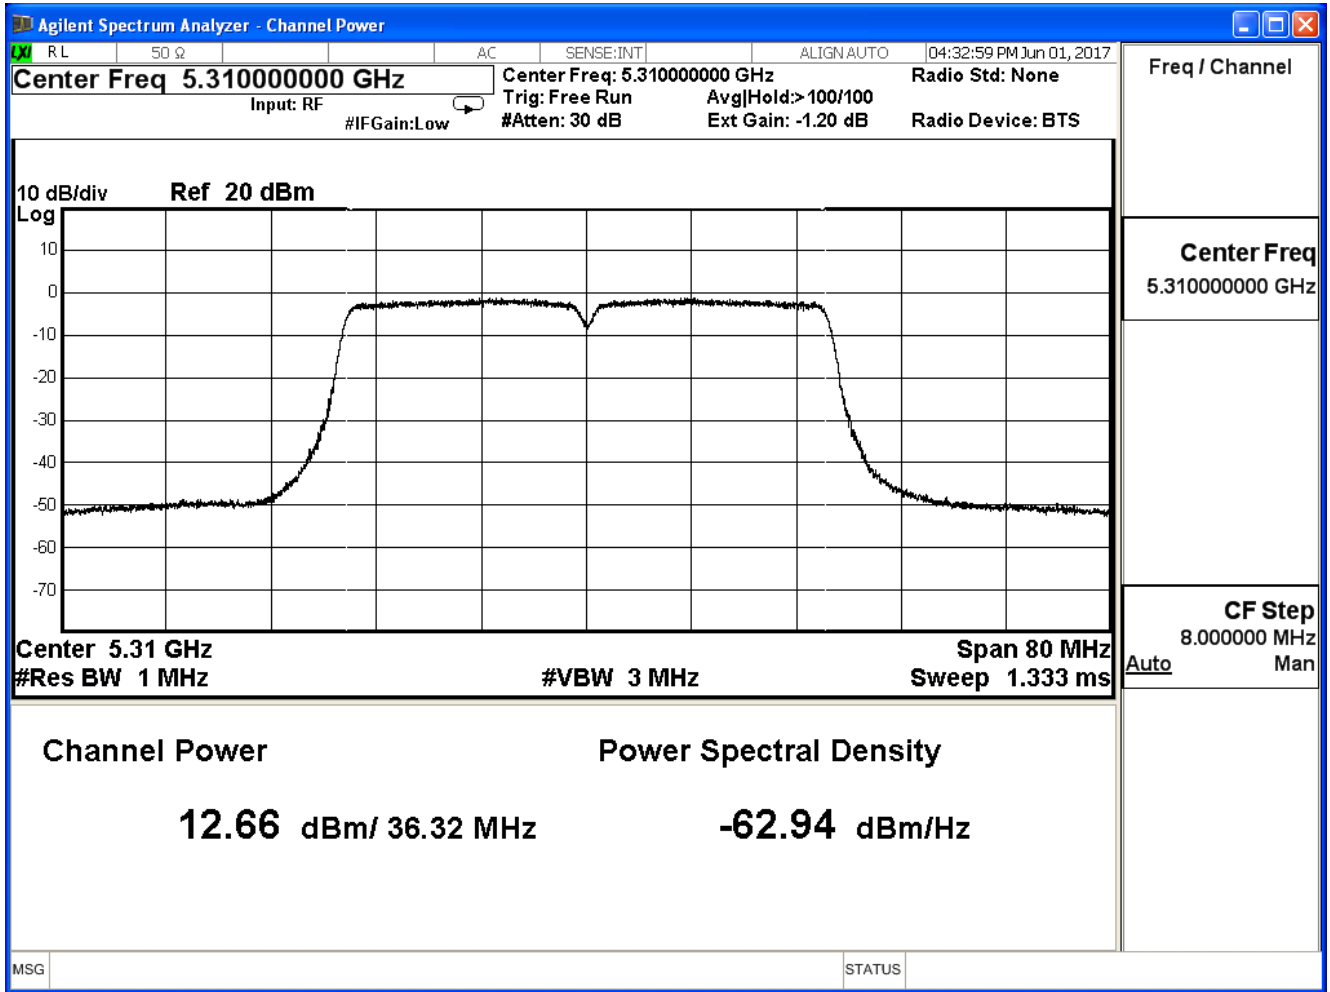

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 2)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
54	5270	16.640	≤ 23.629
62	5310	12.650	≤ 23.629

The worst emission of data rate is MCS 0


Directional gain= $10\log(\text{ANT N})+\text{Gain}=4.77+1.601=6.371$

Limit = $24\text{dBm}-(6.371\text{dBi}-6\text{dBi})=23.629\text{dBm}$

Channel 54 (5270MHz)

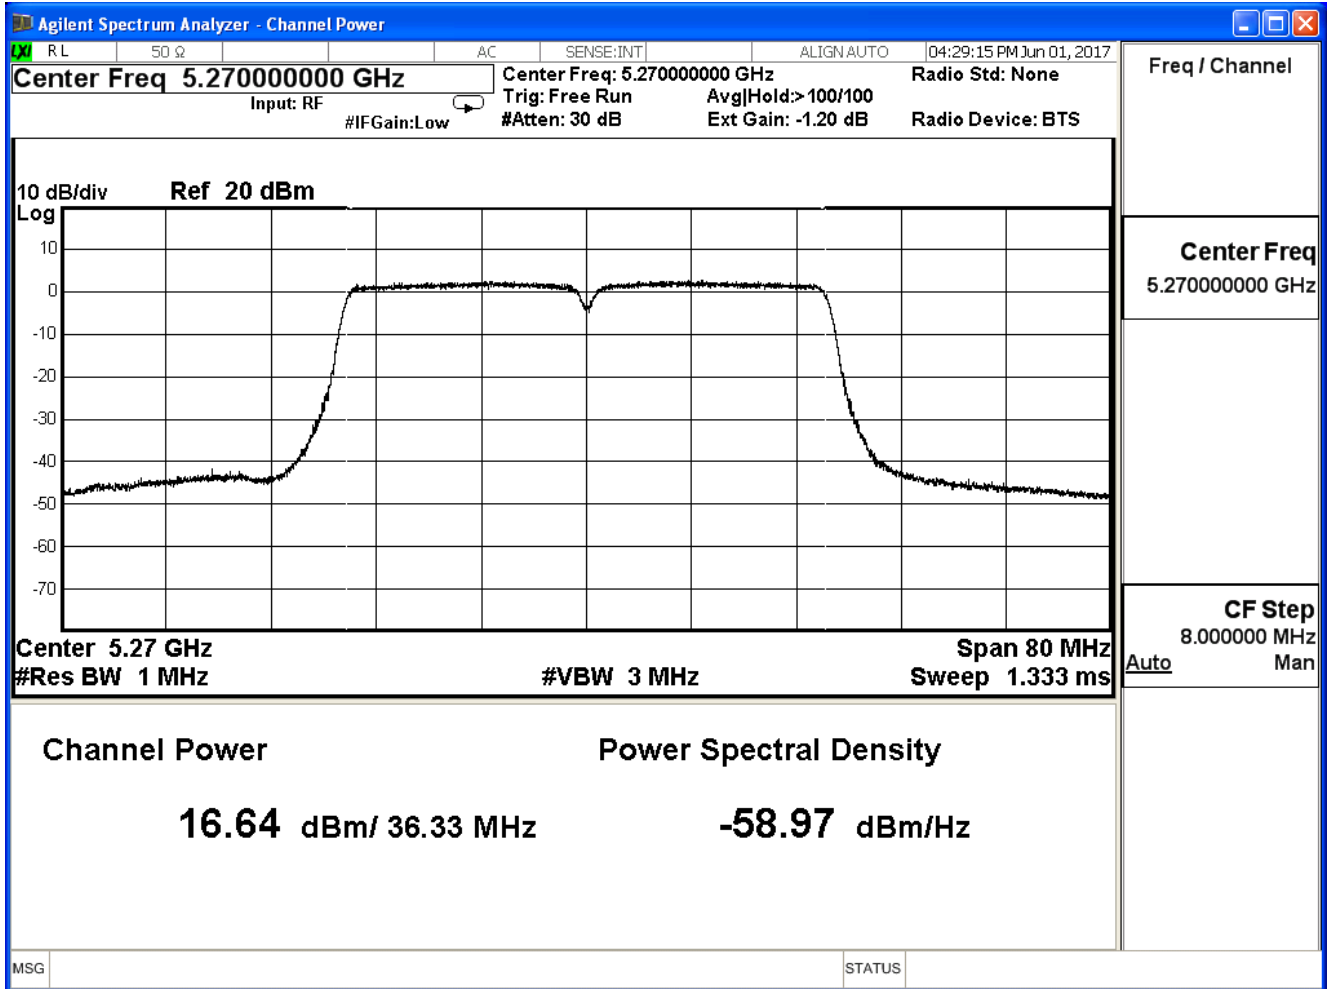

Channel 62 (5310MHz)

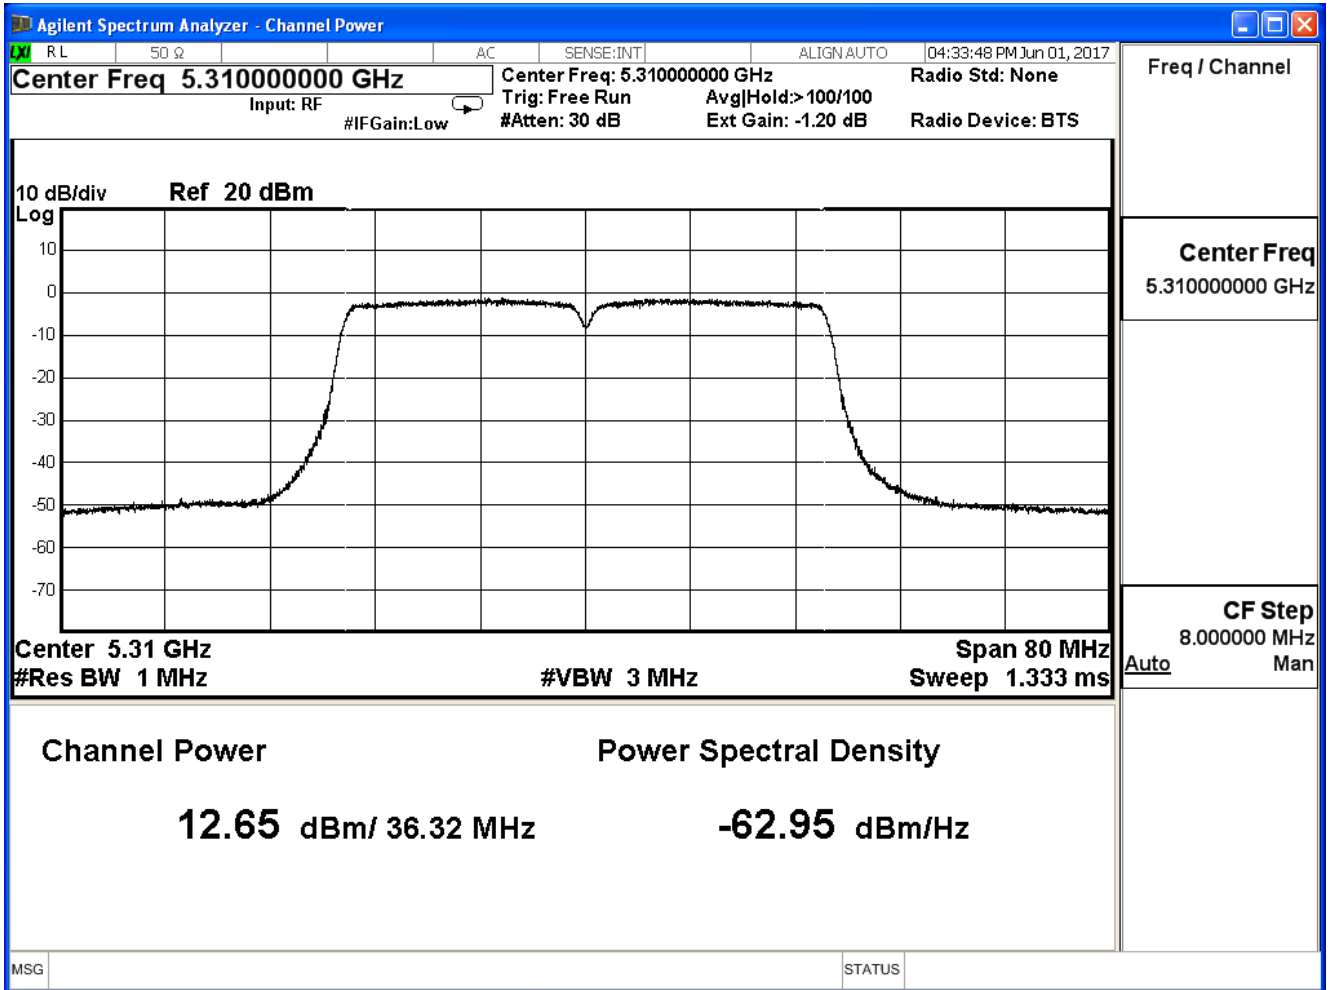

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 3)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
54	5270	16.630	≤ 23.629
62	5310	12.680	≤ 23.629

The worst emission of data rate is MCS 0


Directional gain= $10\log(\text{ANT N})+\text{Gain}=4.77+1.601=6.371$

Limit = $24\text{dBm}-(6.371\text{dBi}-6\text{dBi})=23.629\text{dBm}$

Channel 54 (5270MHz)

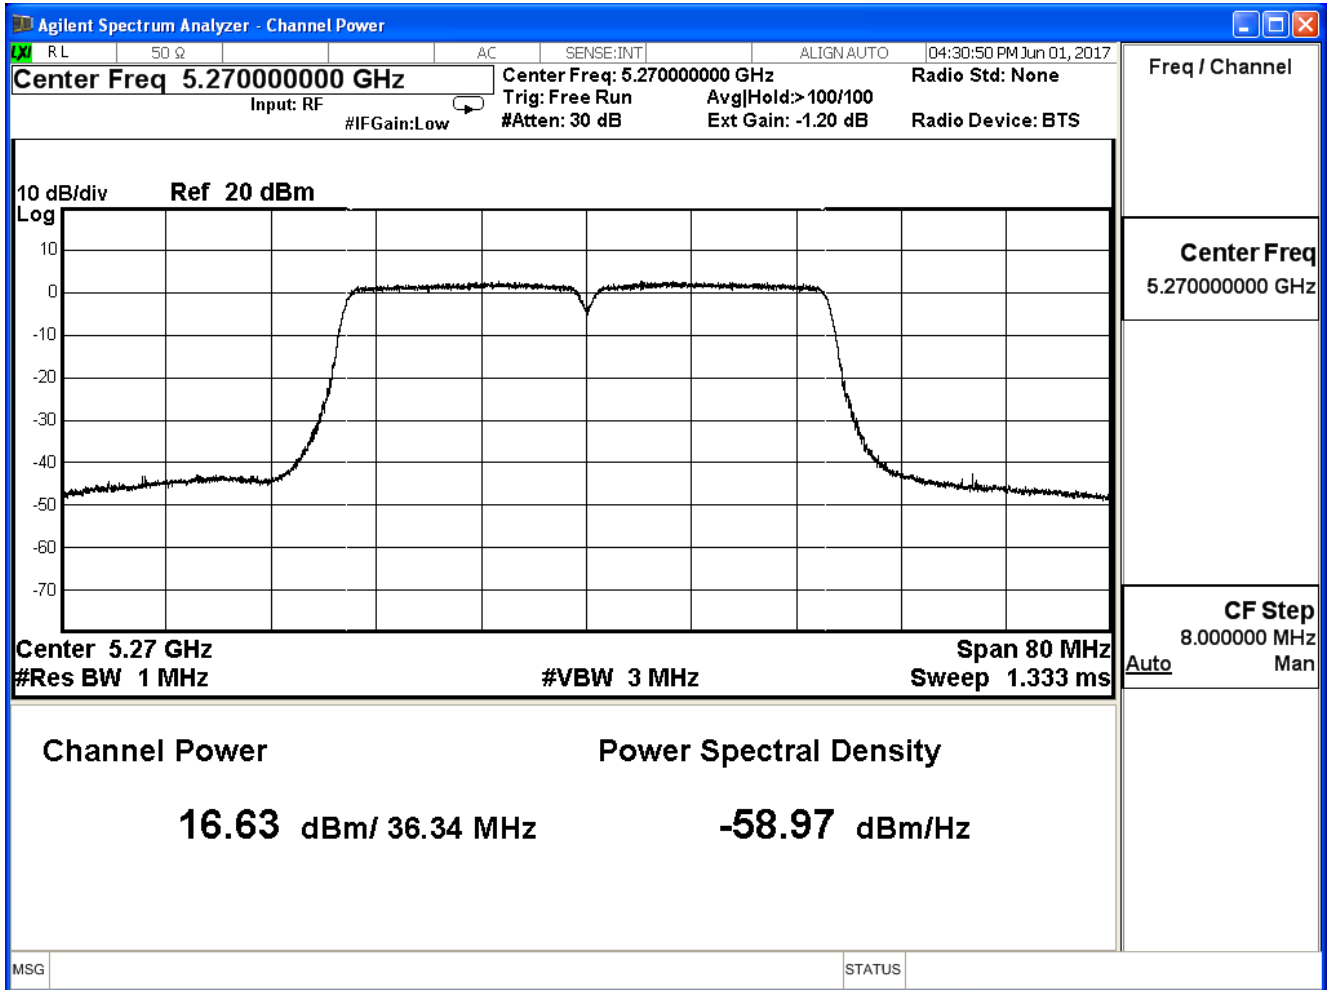

Channel 62 (5310MHz)

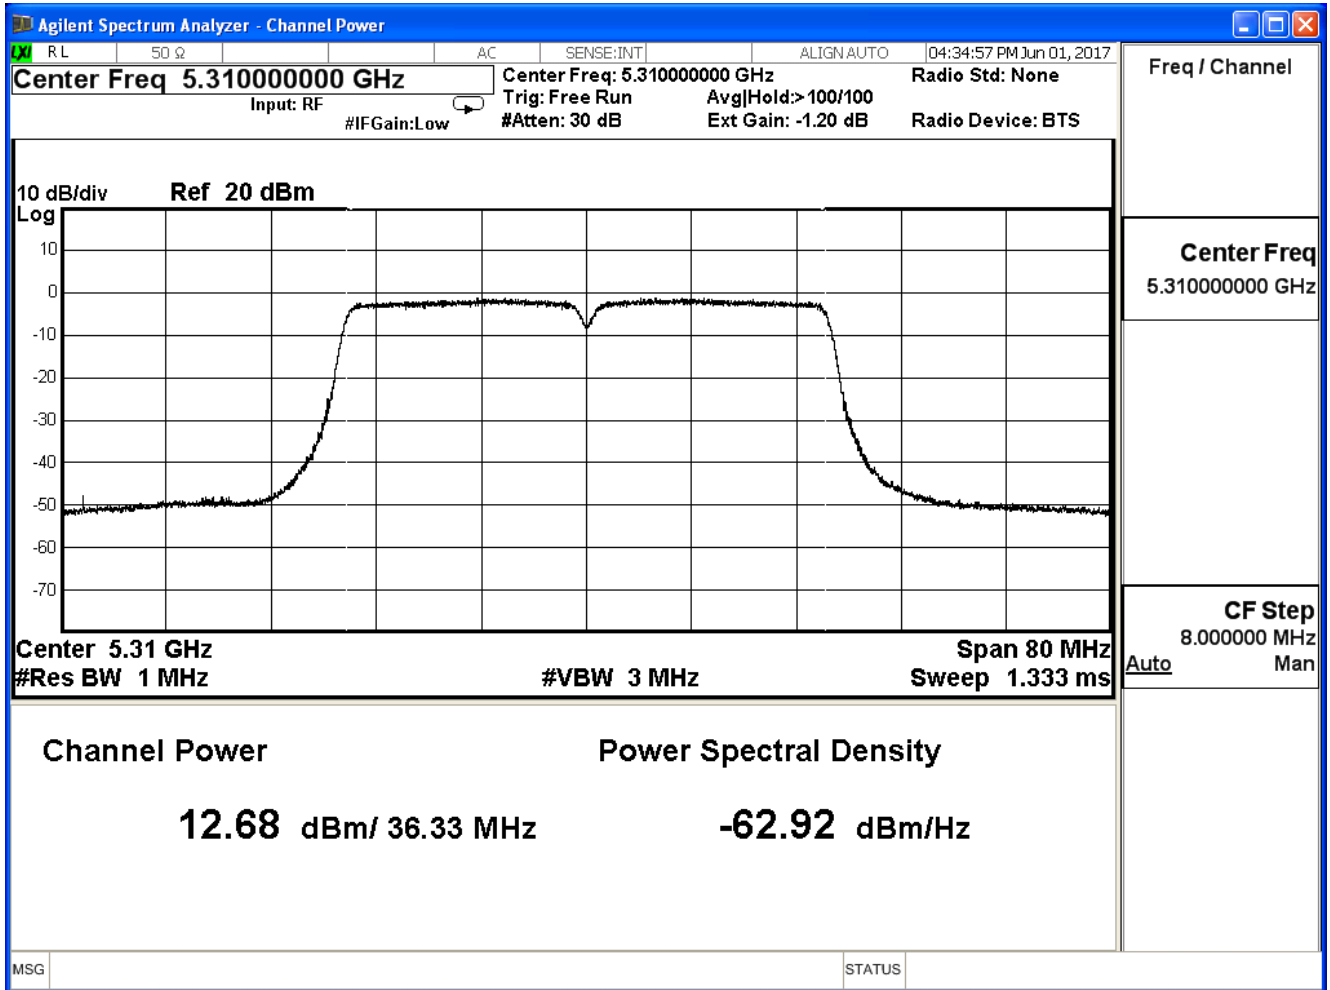

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11n(40MHz)(ANT 0+1+2+3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
54	5270	22.656	≤ 23.629
62	5310	18.693	≤ 23.629

Directional gain= $10\log(\text{ANT N})+\text{Gain}=4.77+1.601=6.371$

Limit = $24\text{dBm}-(6.371\text{dBi}-6\text{dBi})=23.629\text{dBm}$

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11ac(80MHz) (ANT 0)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
58	5290	10.950	≤ 23.629

The worst emission of data rate is MCS0

Directional gain=10log(ANT N)+Gain=4.77+1.601=6.371

Limit =24dBm-(6.371dBi-6dBi)=23.629dBm

Channel 58 (5290MHz)

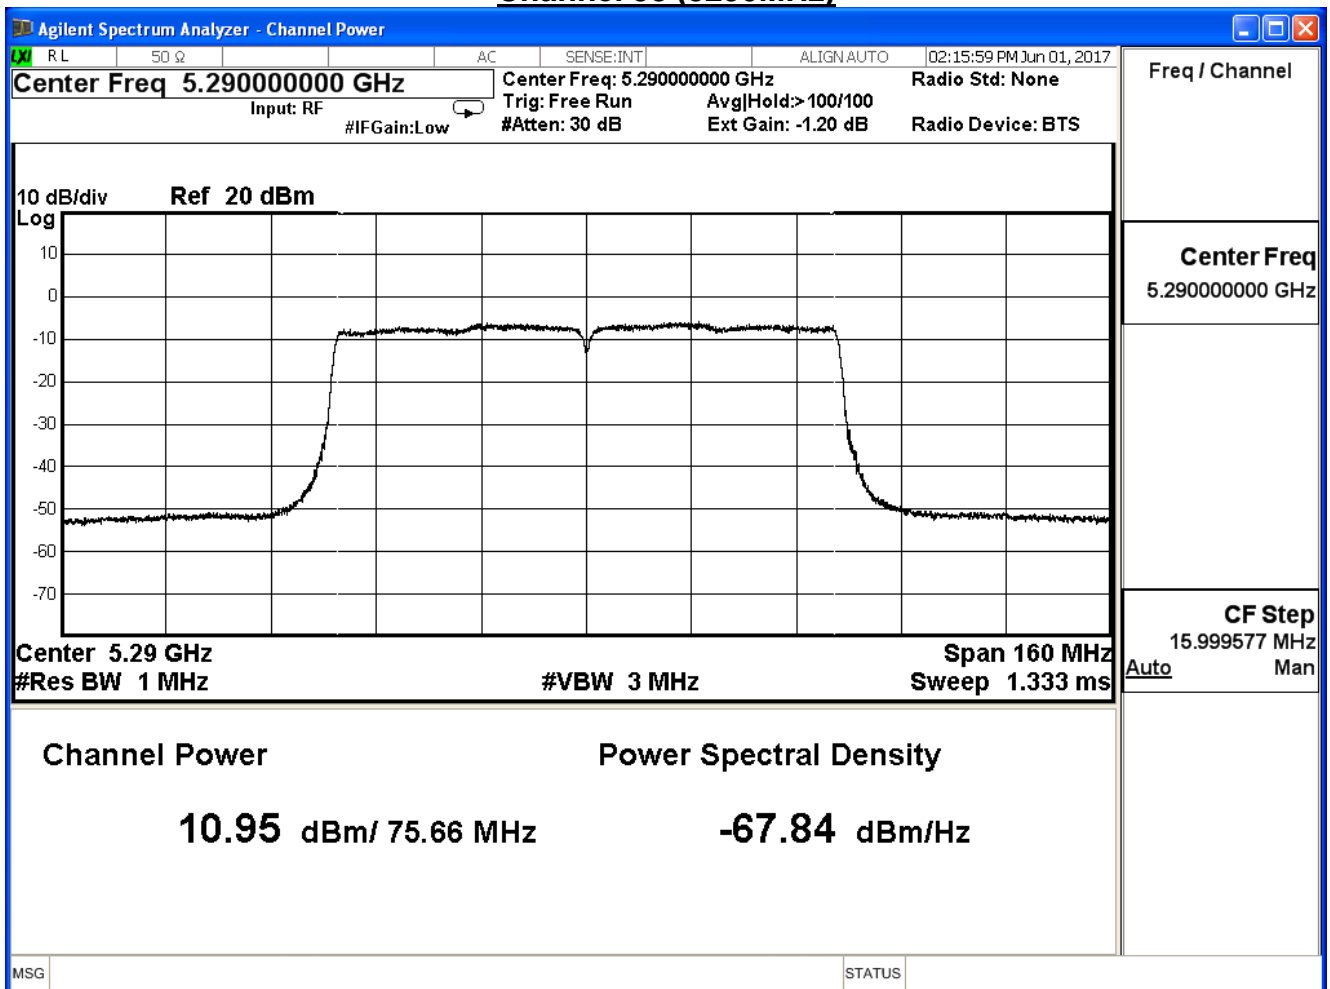

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11ac(80MHz) (ANT 1)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
58	5290	11.020	≤ 23.629

The worst emission of data rate is MCS0

Directional gain=10log(ANT N)+Gain=4.77+1.601=6.371

Limit =24dBm-(6.371dBi-6dBi)=23.629dBm

Channel 58 (5290MHz)

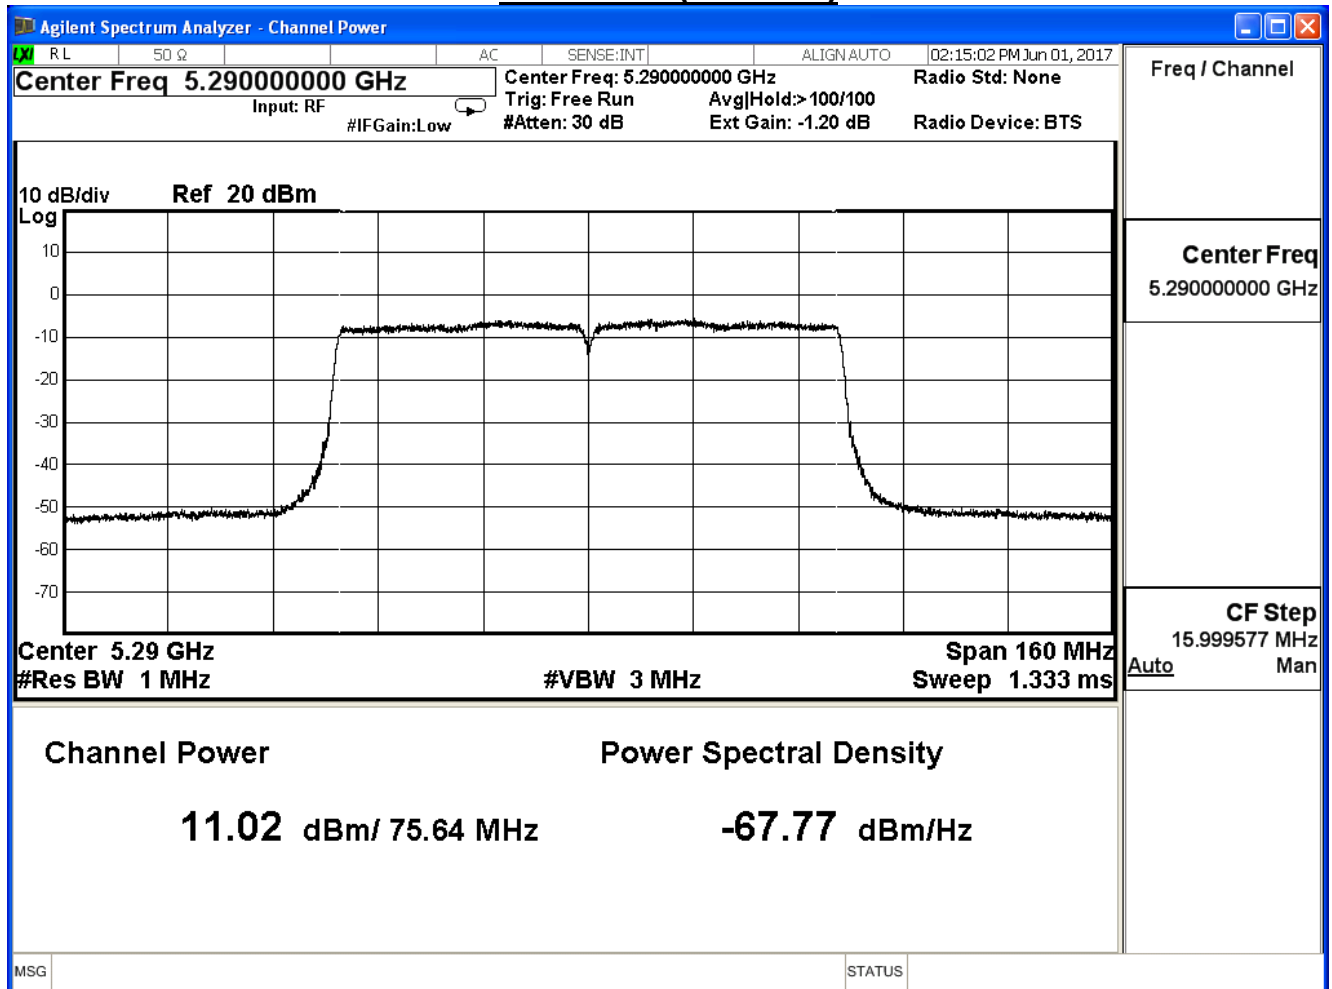

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11ac(80MHz) (ANT 2)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
58	5290	11.040	≤ 23.629

The worst emission of data rate is MCS0

Directional gain=10log(ANT N)+Gain=4.77+1.601=6.371

Limit =24dBm-(6.371dBi-6dBi)=23.629dBm

Channel 58 (5290MHz)

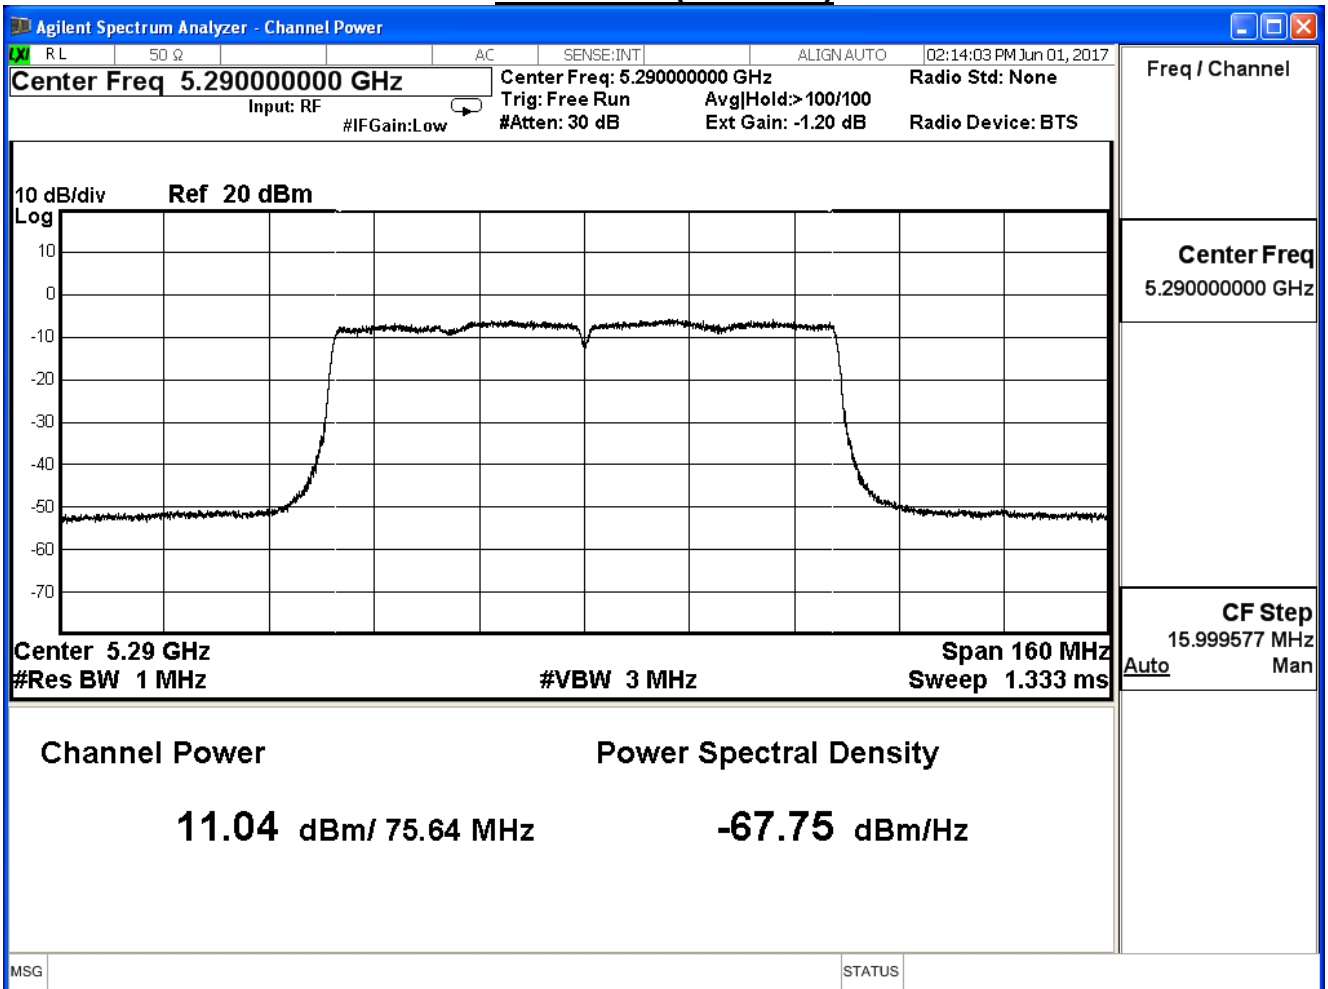

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_AD P: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11ac(80MHz) (ANT 3)


Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
58	5290	11.020	≤ 23.629

The worst emission of data rate is MCS0

$$\text{Directional gain} = 10 \log(\text{ANT N}) + \text{Gain} = 4.77 + 1.601 = 6.371$$

$$\text{Limit} = 24 \text{ dBm} - (6.371 \text{ dBi} - 6 \text{ dBi}) = 23.629 \text{ dBm}$$

Channel 58 (5290MHz)

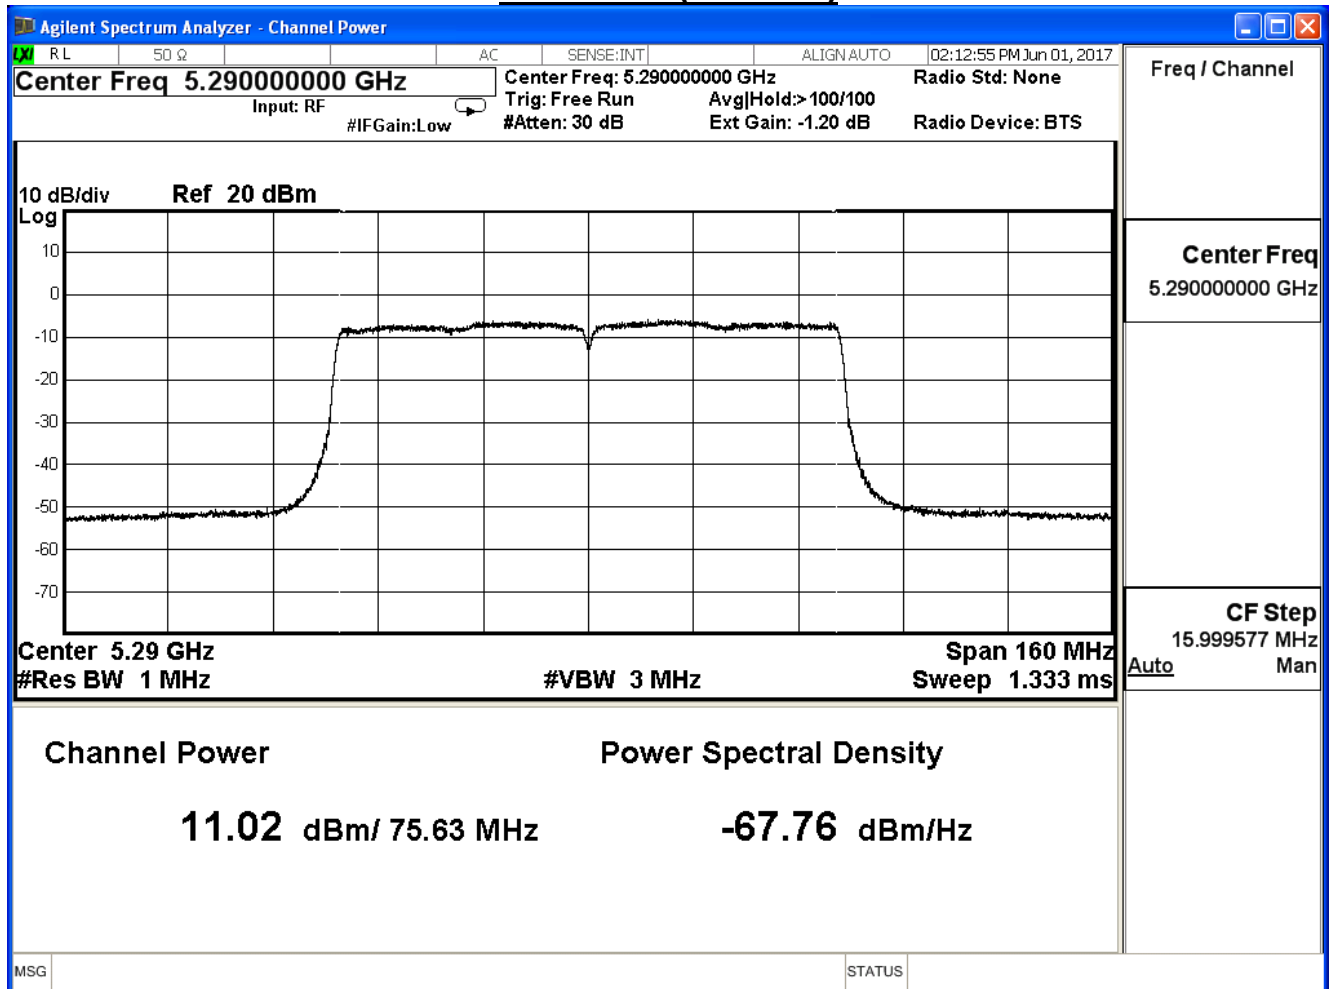

Product	Wireless-AC2900 Dual Band Gigabit Router		
Test Item	Peak Transmit Output		
Test Mode	Mode 3: Tx_ADP: AD890326010-2LF_ Beamforming Mode (802.11 n20/40)		
Date of Test	2017/06/01	Test Site	SR10-H

IEEE 802.11ac(80MHz)(ANT 0+1+2+3)

Channel No.	Frequency (MHz)	Output Power (dBm)	Required Limit (dBm)
58	5290	17.028	≤ 23.629

Directional gain=10log(ANT N)+Gain=4.77+1.601=6.371

Limit =24dBm-(6.371dBi-6dBi)=23.629dBm