


4. Maximum conducted output power

4.1. Test Setup

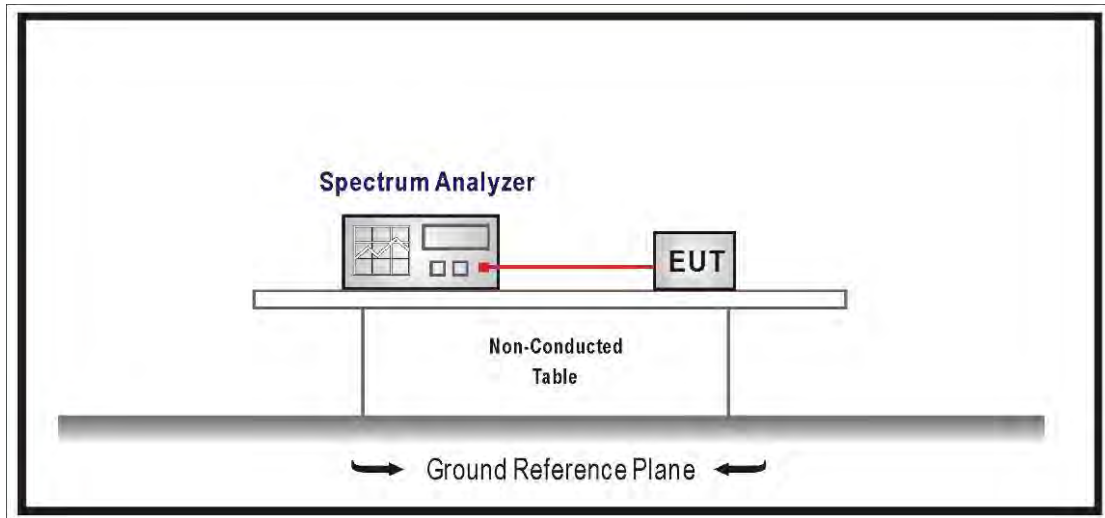

4.2. Limits

1. For the band 5.15-5.25 GHz, the Maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1W. If transmitting antenna of directional gain greater than 6 dBi are used, the Maximum conducted output power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
2. For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. The maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.25-5.35 GHz, the Maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW. If transmitting antenna of directional gain greater than 6 dBi are used, the Maximum conducted output power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
4. For the band 5.725-5.850 GHz, the Maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1W. If transmitting antenna of directional gain greater than 6 dBi are used, the Maximum conducted output power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.

4.3. Test Procedure

The EUT was setup to ANSI C63.10: 2013; tested to U-NII test procedure of 789033 D01 V01R02 for compliance to FCC 47CFR Subpart E requirements. The Method SA-1 of the Maximum conducted output power was used.

Set RBW=1MHz, VBW=3MHz with RMS detector and trace average 100 traces in power averaging mode. Set span to encompass the entire emission bandwidth (EBW) of the signal. Compute power by integrating the spectrum across the 26 dB EBW of the signal.

4.4. Test Result

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11a (ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 19.20 | ≤ 30 |
| 44 | 5220 | 20.27 | ≤ 30 |
| 48 | 5240 | 20.27 | ≤ 30 |


The worst emission of data rate is 6 Mbps.

| Maximum conducted output power (dBm) | | | | | | | | | |
|--------------------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|----------------|
| Channel No | Frequency (MHz) | Data Rate | | | | | | | Required Limit |
| | | 6 | 12 | 18 | 24 | 36 | 48 | 54 | |
| 36 | 5180 | 19.200 | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 44 | 5220 | 20.270 | 20.130 | 20.000 | 19.850 | 19.720 | 19.580 | 19.440 | |
| 48 | 5240 | 20.270 | -- | -- | -- | -- | -- | -- | |


Channel 36

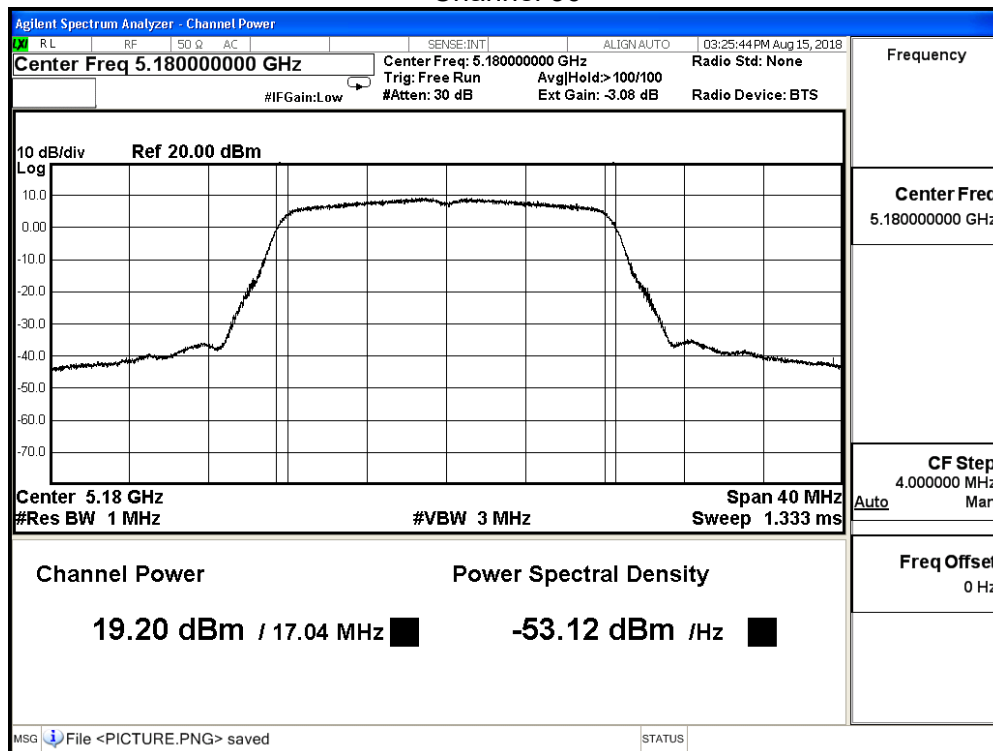

Channel 44

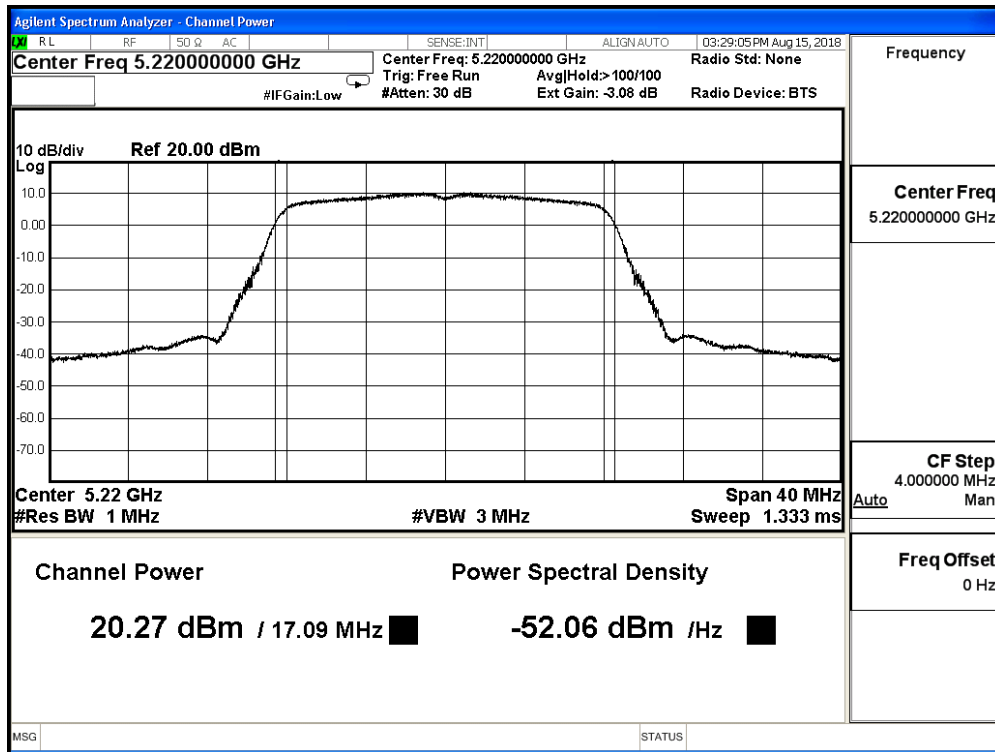

Channel 48

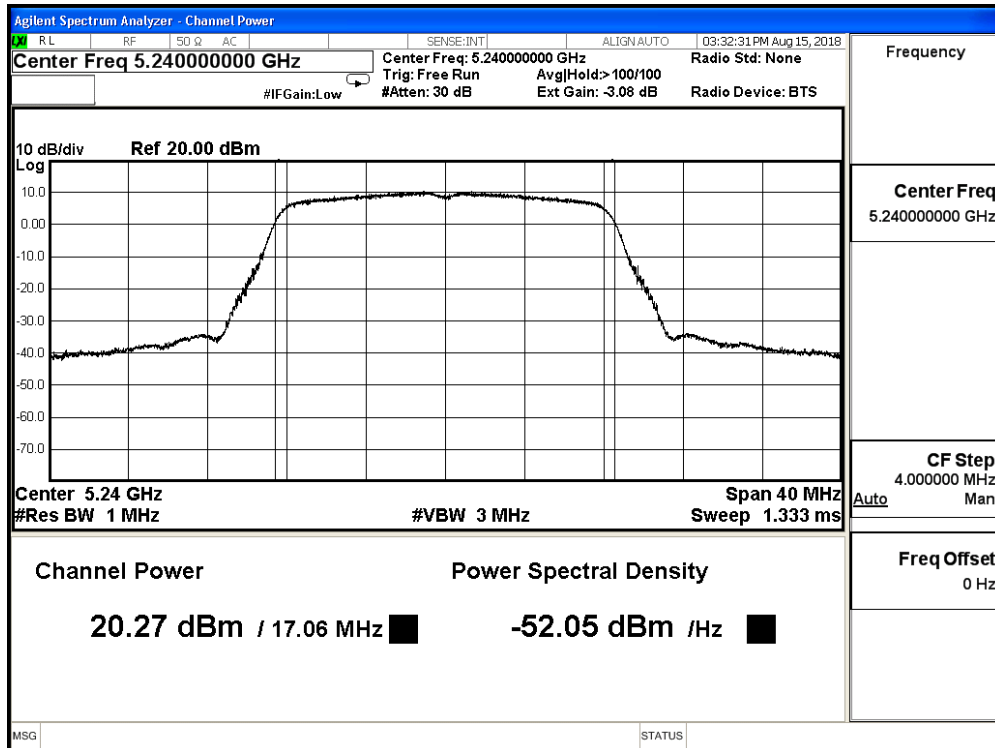

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11a (ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 18.64 | ≤ 30 |
| 44 | 5220 | 19.49 | ≤ 30 |
| 48 | 5240 | 19.27 | ≤ 30 |


The worst emission of data rate is 6 Mbps.

| Maximum conducted output power (dBm) | | | | | | | | | |
|--------------------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|----------------|
| Channel No | Frequency (MHz) | Data Rate | | | | | | | Required Limit |
| | | 6 | 12 | 18 | 24 | 36 | 48 | 54 | |
| 36 | 5180 | 18.640 | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 44 | 5220 | 19.490 | 19.360 | 19.220 | 19.080 | 18.930 | 18.780 | 18.630 | |
| 48 | 5240 | 19.270 | -- | -- | -- | -- | -- | -- | |


Channel 36

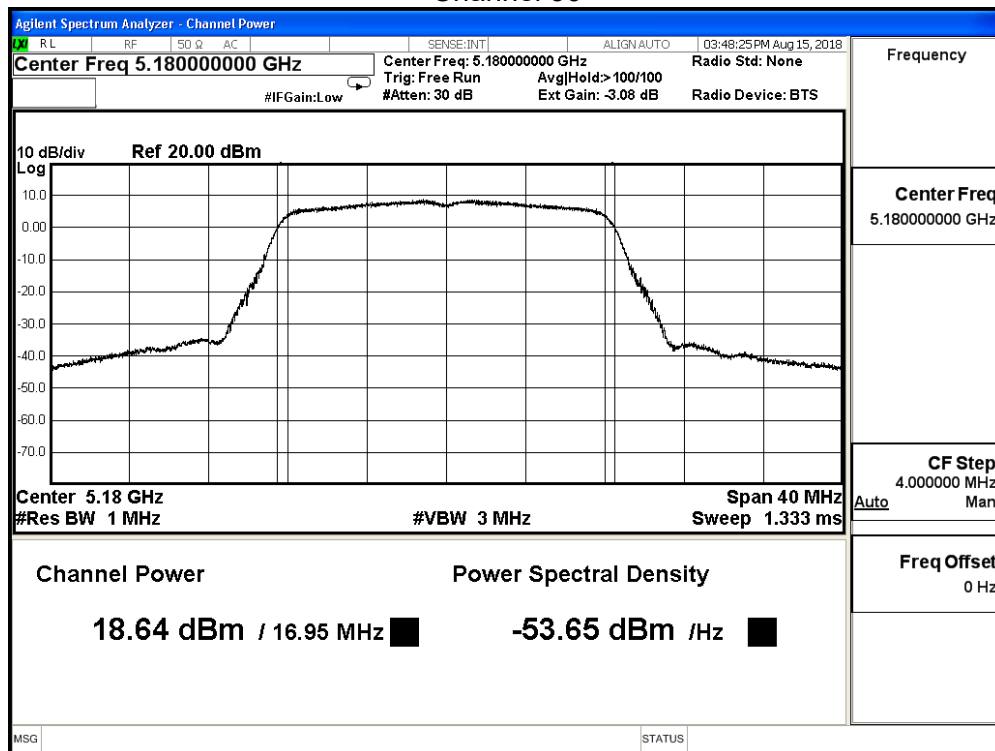

Channel 44

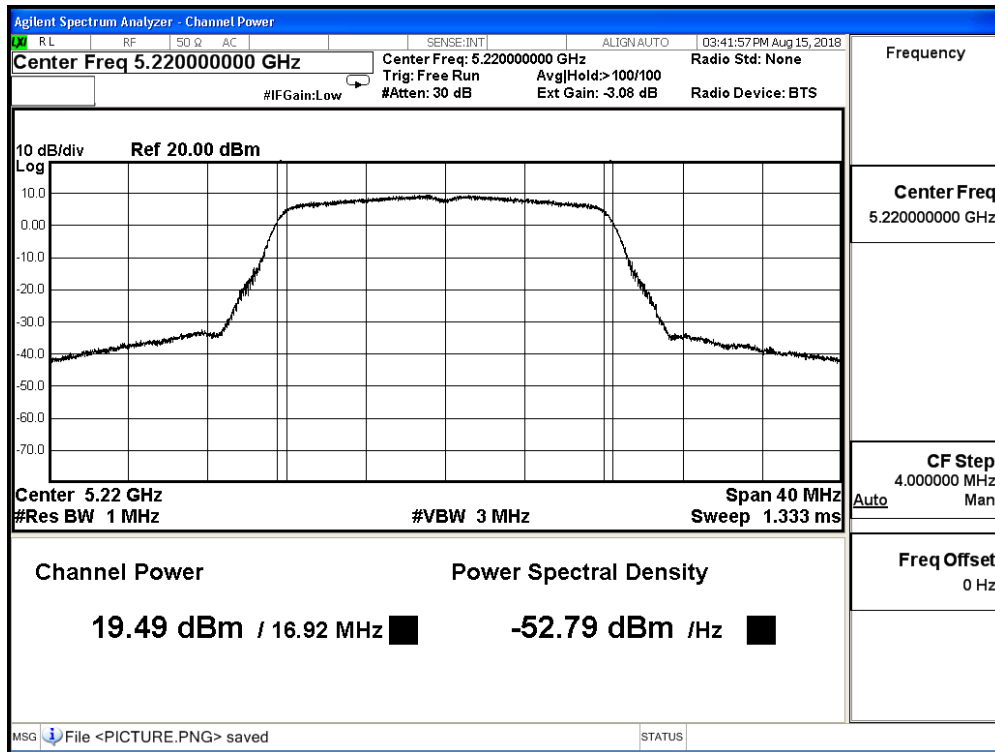

Channel 48

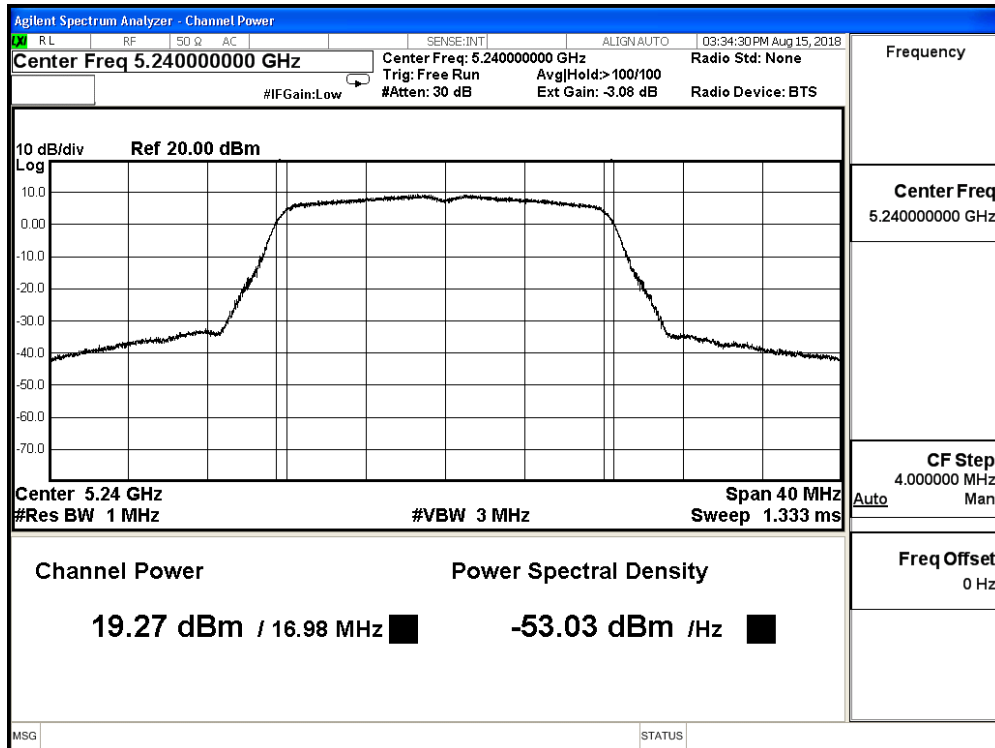

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11a (ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 19.19 | ≤ 30 |
| 44 | 5220 | 19.59 | ≤ 30 |
| 48 | 5240 | 19.83 | ≤ 30 |


The worst emission of data rate is 6 Mbps.

| Maximum conducted output power (dBm) | | | | | | | | | |
|--------------------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|----------------|
| Channel No | Frequency (MHz) | Data Rate | | | | | | | Required Limit |
| | | 6 | 12 | 18 | 24 | 36 | 48 | 54 | |
| 36 | 5180 | 19.190 | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 44 | 5220 | 19.590 | 19.450 | 19.300 | 19.150 | 19.000 | 18.860 | 18.720 | |
| 48 | 5240 | 19.830 | -- | -- | -- | -- | -- | -- | |


Channel 36

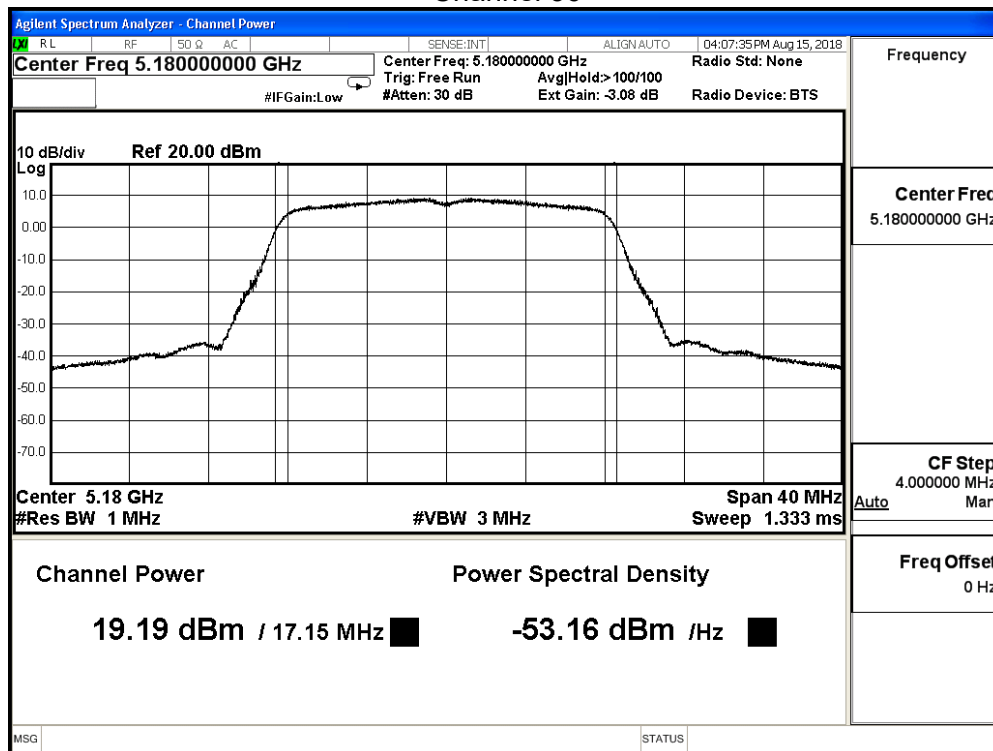

Channel 44

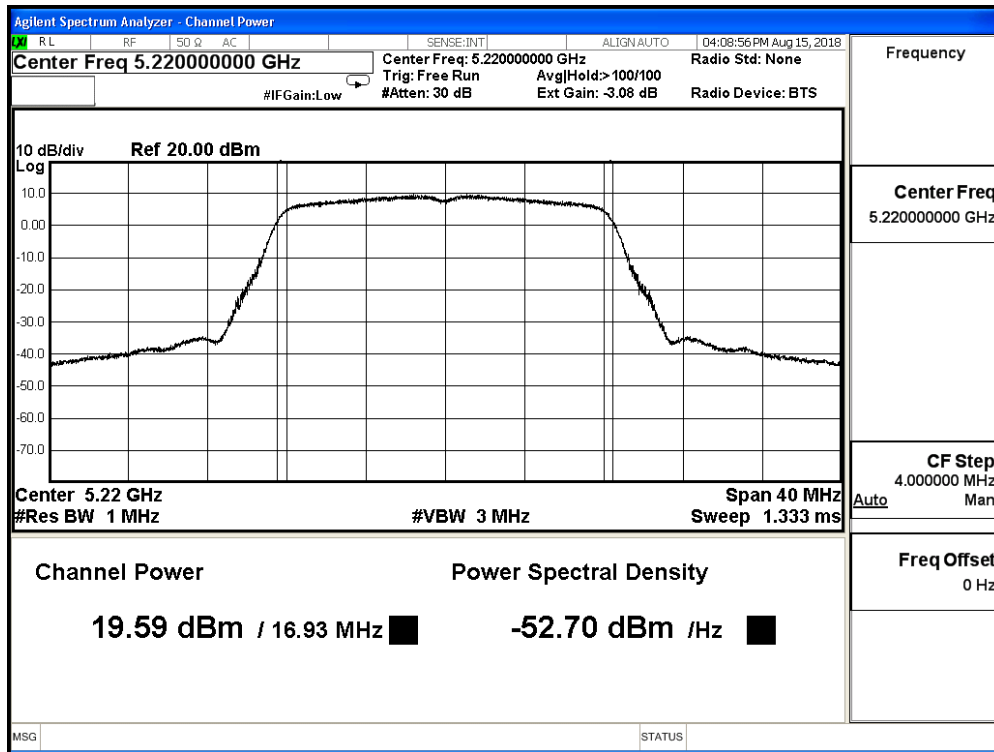

Channel 48

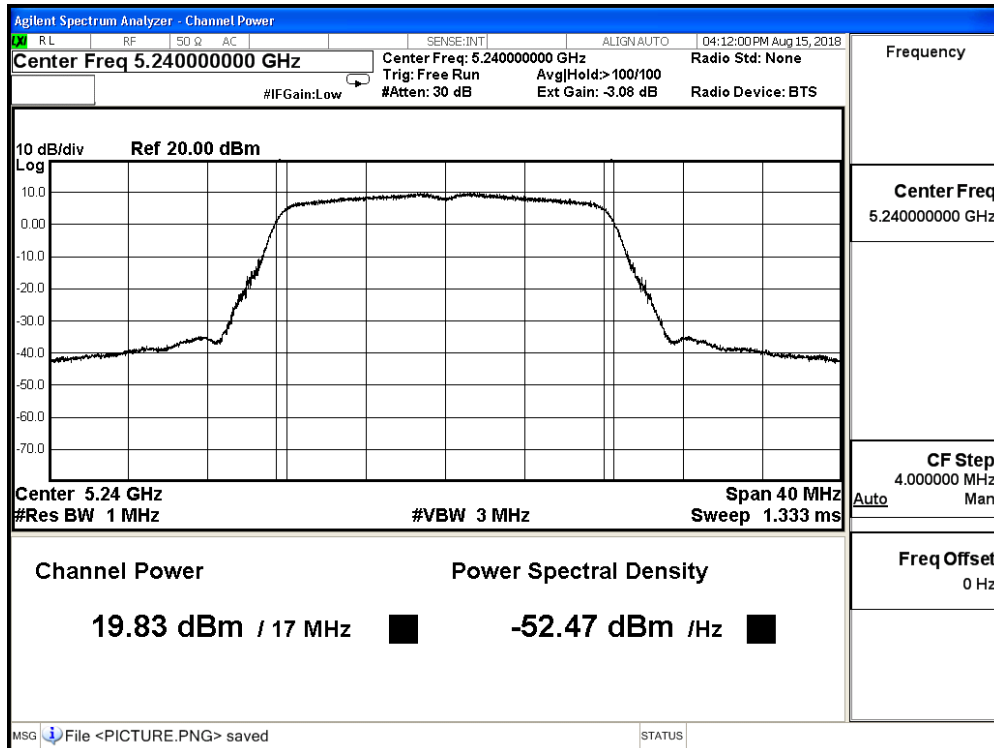

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11a (ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 20.14 | ≤ 30 |
| 44 | 5220 | 20.83 | ≤ 30 |
| 48 | 5240 | 20.34 | ≤ 30 |


The worst emission of data rate is 6 Mbps.

| Maximum conducted output power (dBm) | | | | | | | | | |
|--------------------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|----------------|
| Channel No | Frequency (MHz) | Data Rate | | | | | | | Required Limit |
| | | 6 | 12 | 18 | 24 | 36 | 48 | 54 | |
| 36 | 5180 | 20.140 | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 44 | 5220 | 20.830 | 20.680 | 20.540 | 20.410 | 20.280 | 20.150 | 20.000 | |
| 48 | 5240 | 20.340 | -- | -- | -- | -- | -- | -- | |


Channel 36

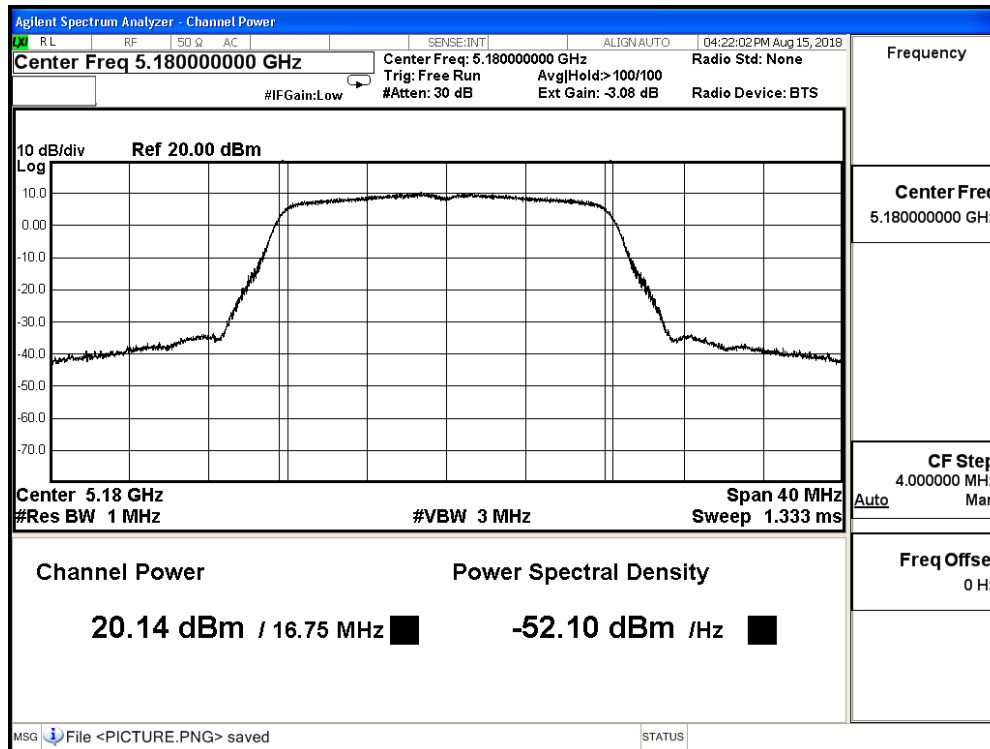

Channel 44

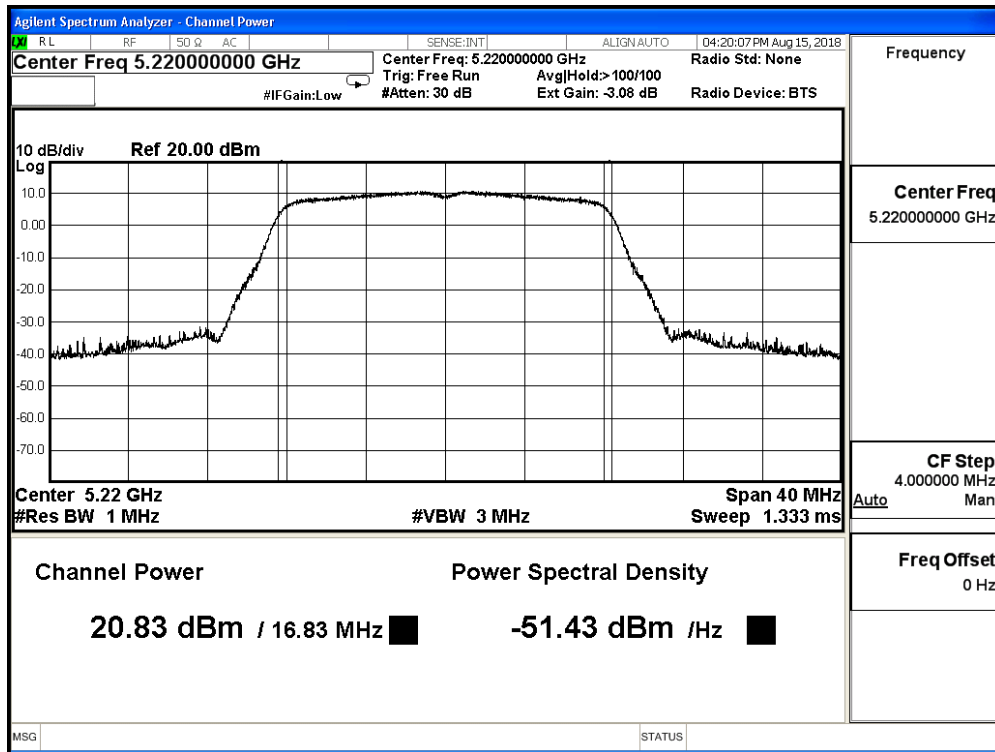

Channel 48

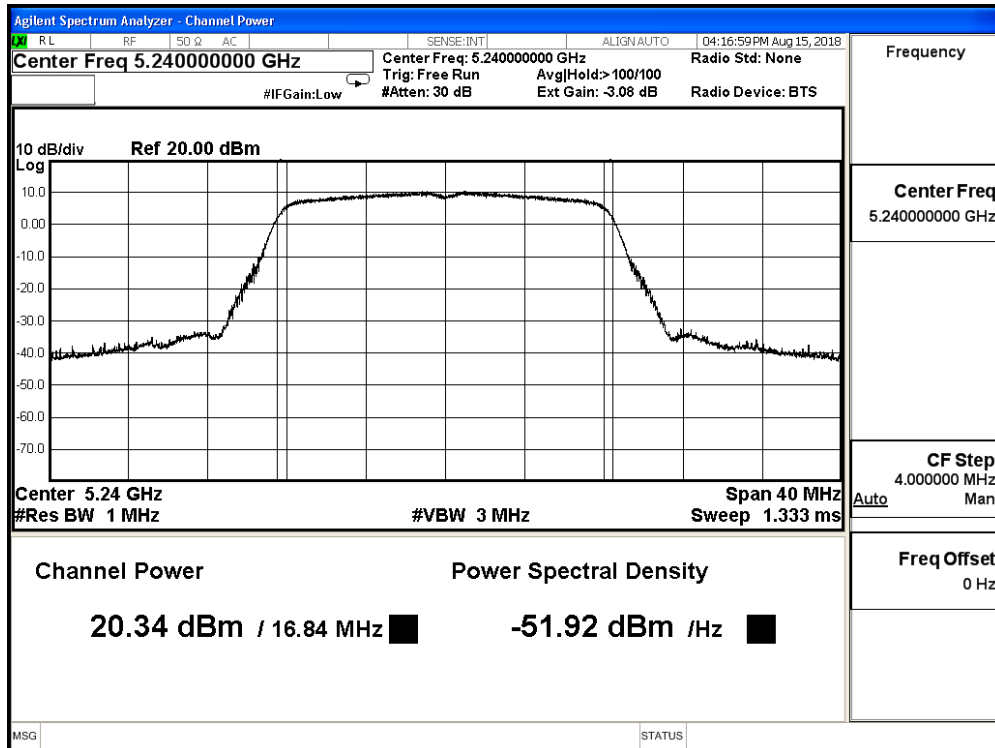

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

IEEE 802.11a (ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 25.347 | ≤ 30 |
| 44 | 5220 | 26.100 | ≤ 30 |
| 48 | 5240 | 25.969 | ≤ 30 |

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11n(20MHz)(ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 19.97 | ≤ 30 |
| 44 | 5220 | 20.32 | ≤ 30 |
| 48 | 5240 | 19.61 | ≤ 30 |


The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 36 | 5180 | 19.970 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 44 | 5220 | 20.320 | 20.180 | 20.040 | 19.910 | 19.760 | 19.610 | 19.470 | 19.320 | |
| 48 | 5240 | 19.610 | -- | -- | -- | -- | -- | -- | -- | |


Channel 36

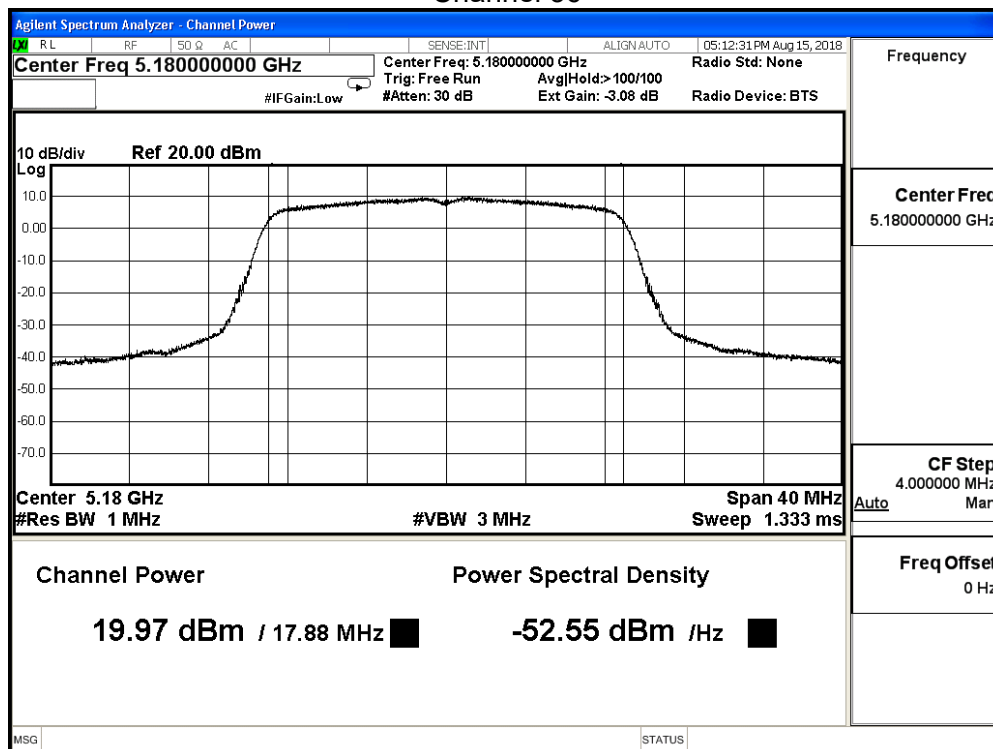

Channel 44

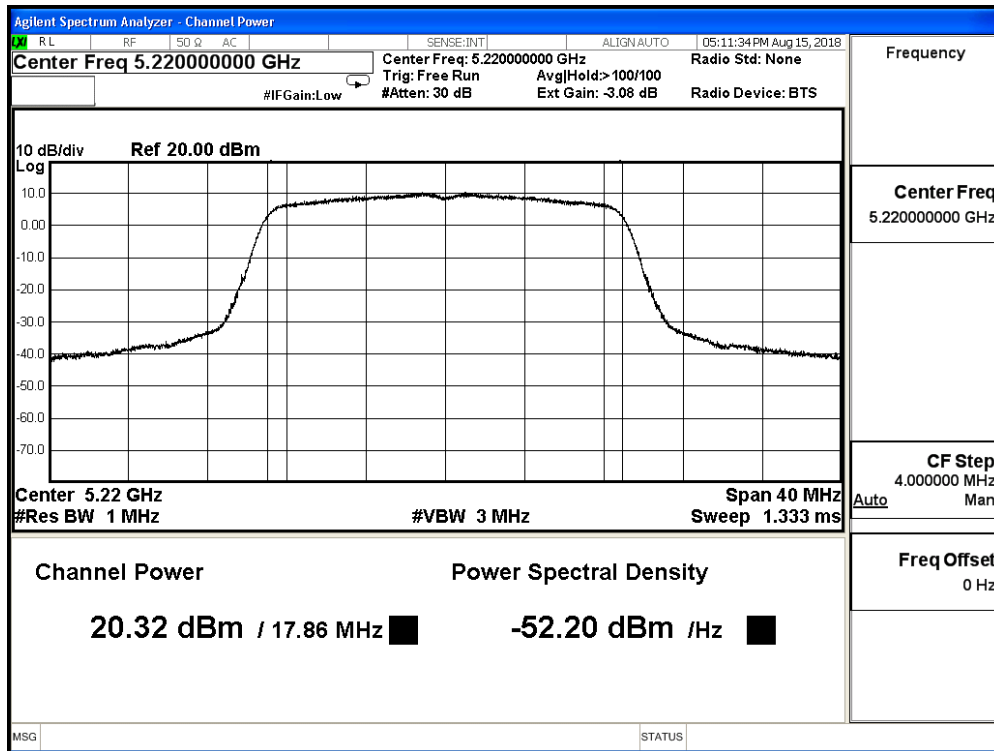

Channel 48

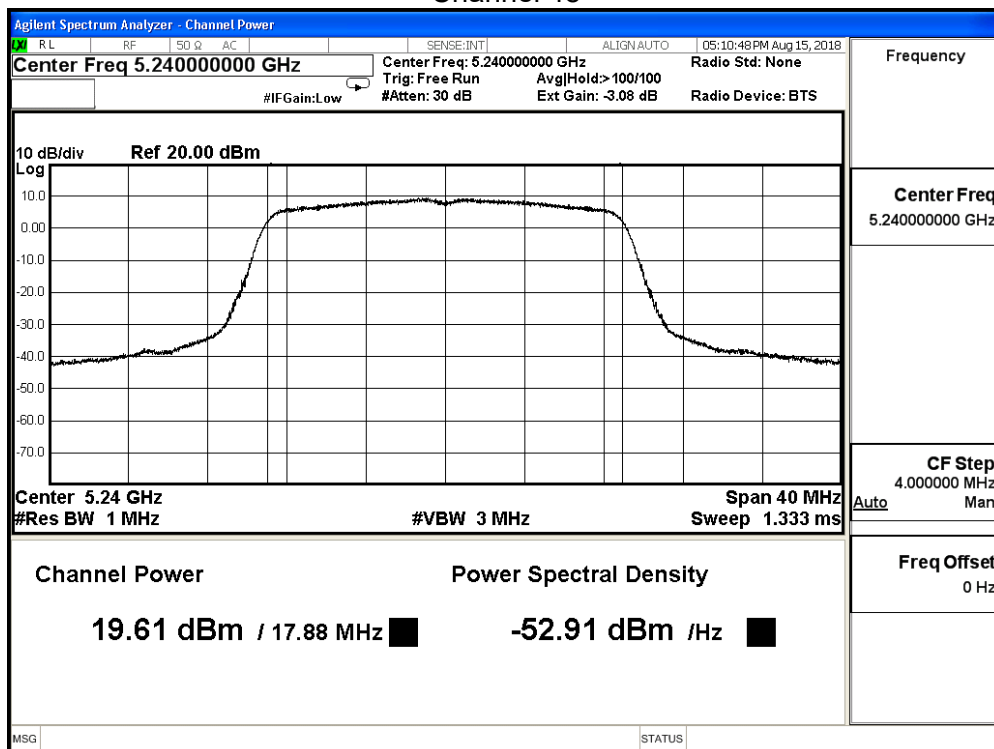

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11n(20MHz)(ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 19.60 | ≤ 30 |
| 44 | 5220 | 19.09 | ≤ 30 |
| 48 | 5240 | 18.98 | ≤ 30 |


The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 36 | 5180 | 19.600 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 44 | 5220 | 19.090 | 18.950 | 18.800 | 18.660 | 18.530 | 18.380 | 18.230 | 18.090 | |
| 48 | 5240 | 18.980 | -- | -- | -- | -- | -- | -- | -- | |


Channel 36

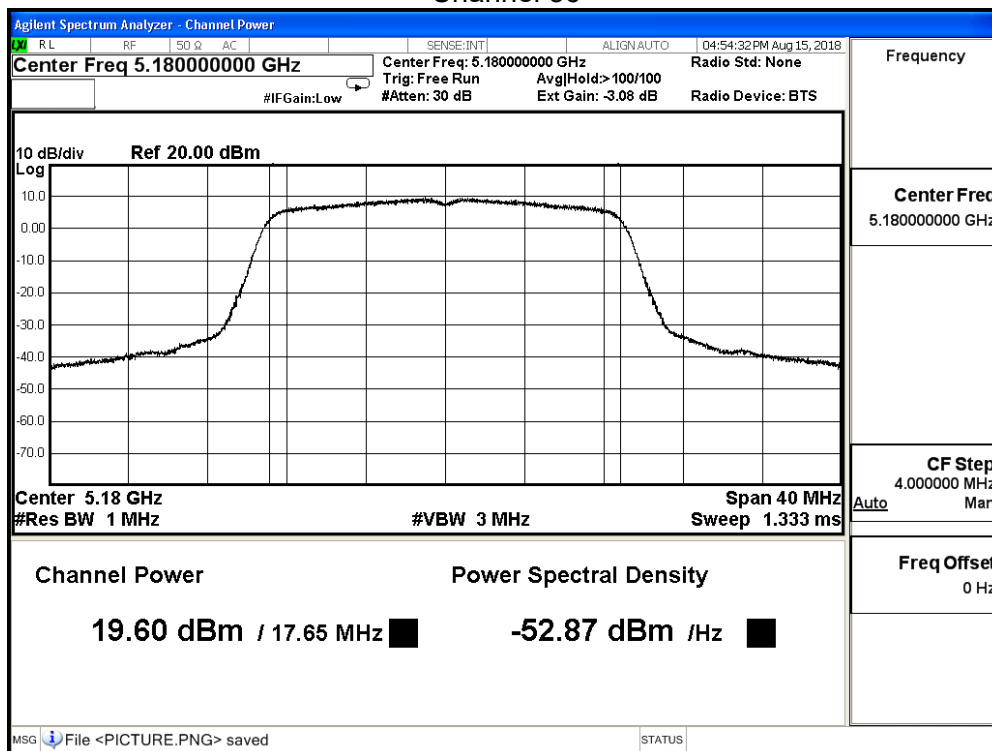

Channel 44

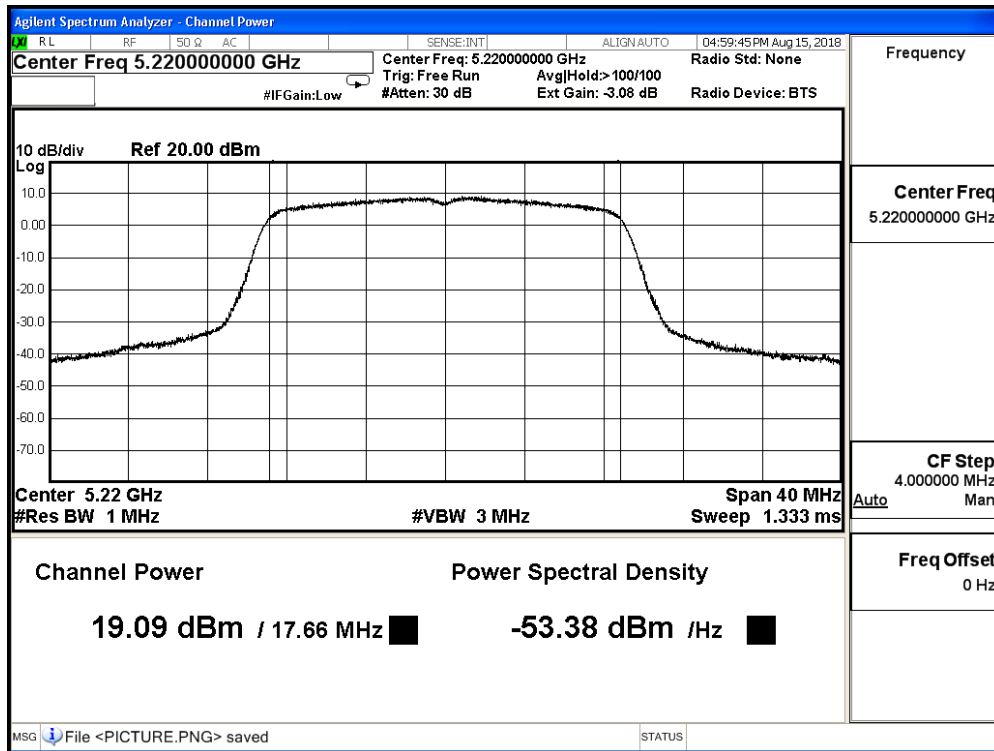

Channel 48

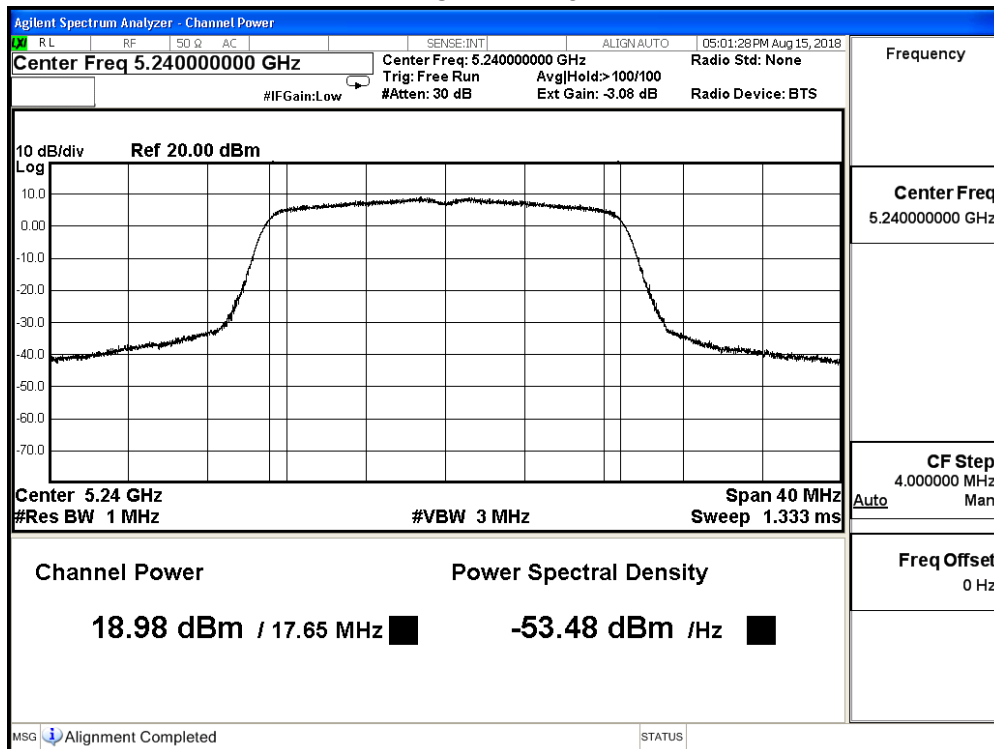

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11n(20MHz)(ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 19.25 | ≤ 30 |
| 44 | 5220 | 19.44 | ≤ 30 |
| 48 | 5240 | 19.23 | ≤ 30 |


The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 36 | 5180 | 19.250 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 44 | 5220 | 19.440 | 19.300 | 19.170 | 19.030 | 18.890 | 18.750 | 18.610 | 18.480 | |
| 48 | 5240 | 19.230 | -- | -- | -- | -- | -- | -- | -- | |


Channel 36

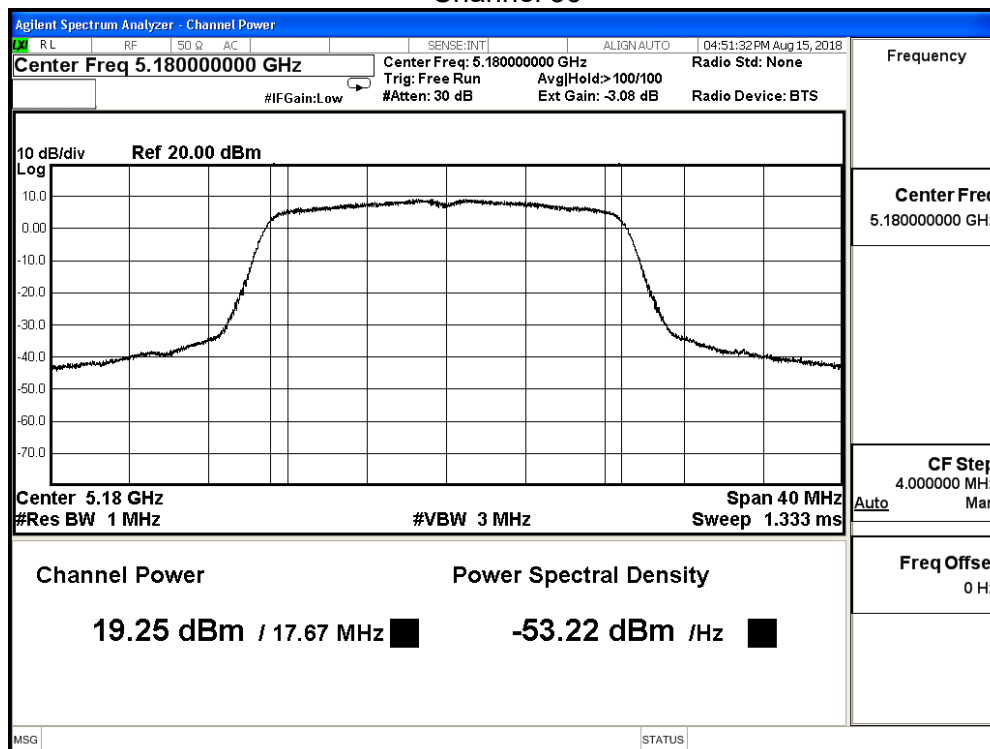

Channel 44

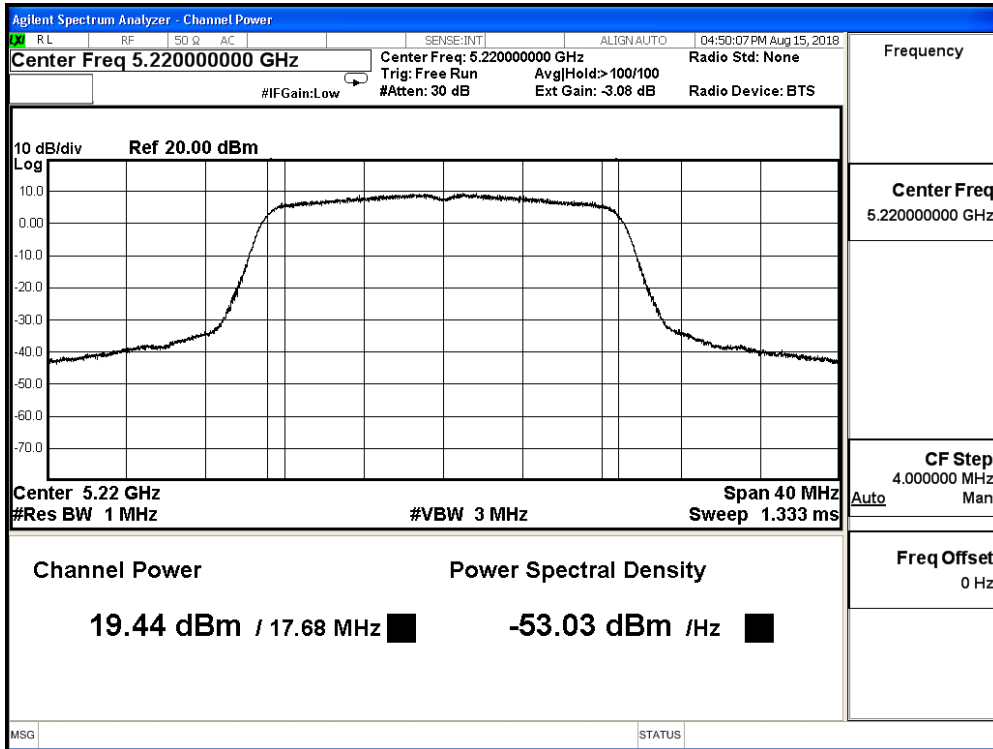

Channel 48

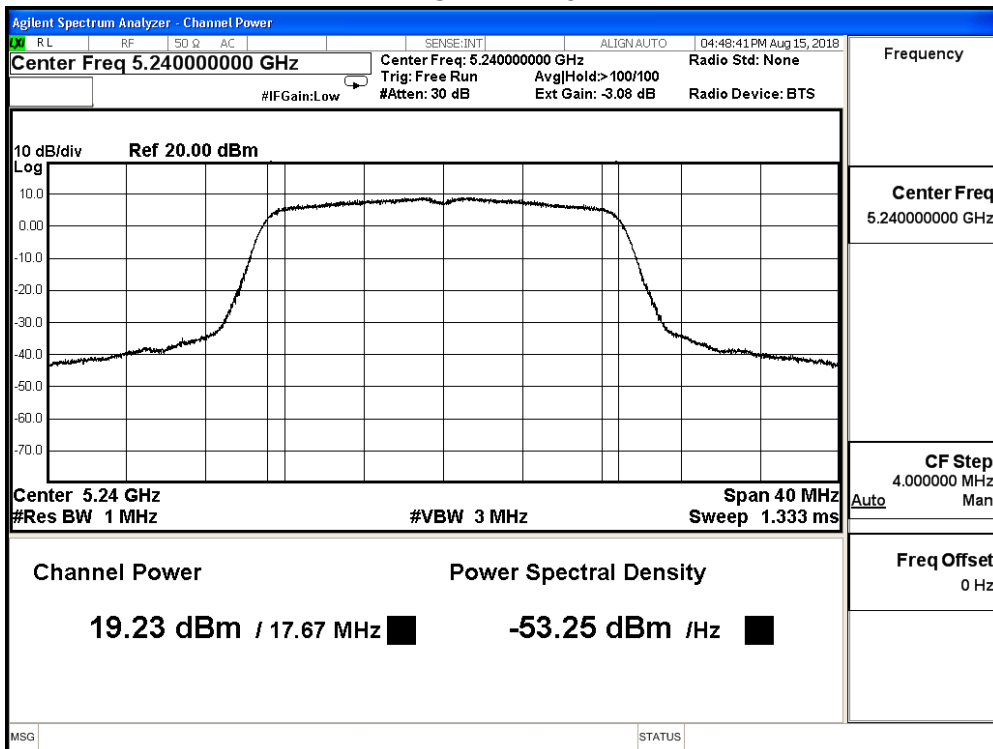

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11n(20MHz)(ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 19.68 | ≤ 30 |
| 44 | 5220 | 19.99 | ≤ 30 |
| 48 | 5240 | 19.87 | ≤ 30 |


The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 36 | 5180 | 19.680 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 44 | 5220 | 19.990 | 19.840 | 19.700 | 19.560 | 19.420 | 19.270 | 19.140 | 19.010 | |
| 48 | 5240 | 19.870 | -- | -- | -- | -- | -- | -- | -- | |


Channel 36

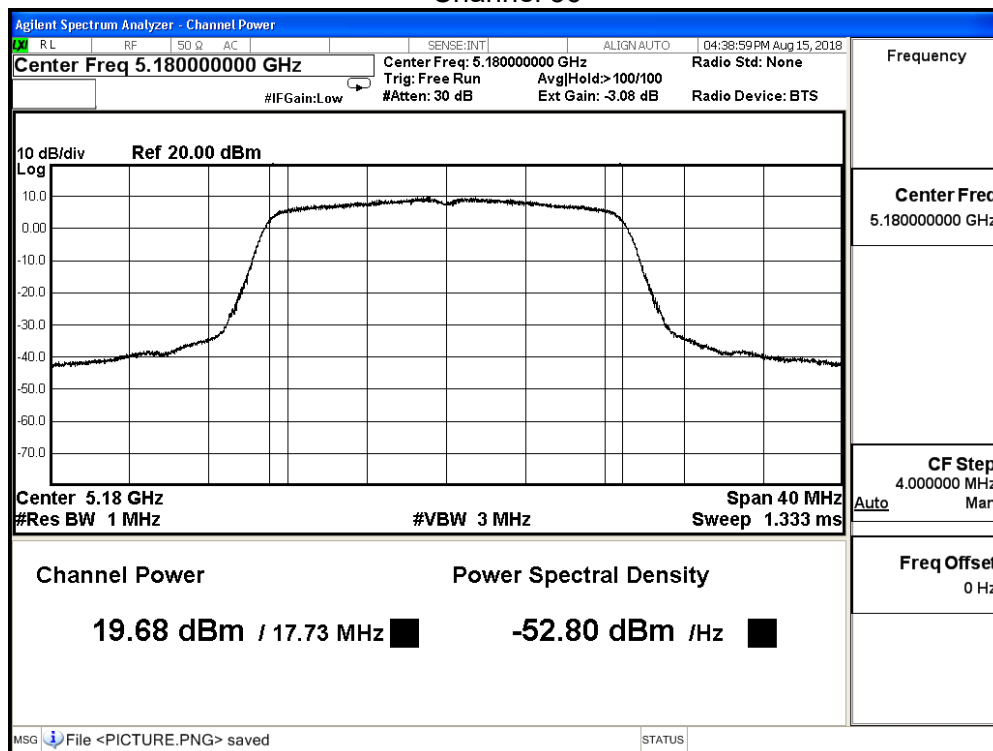

Channel 44

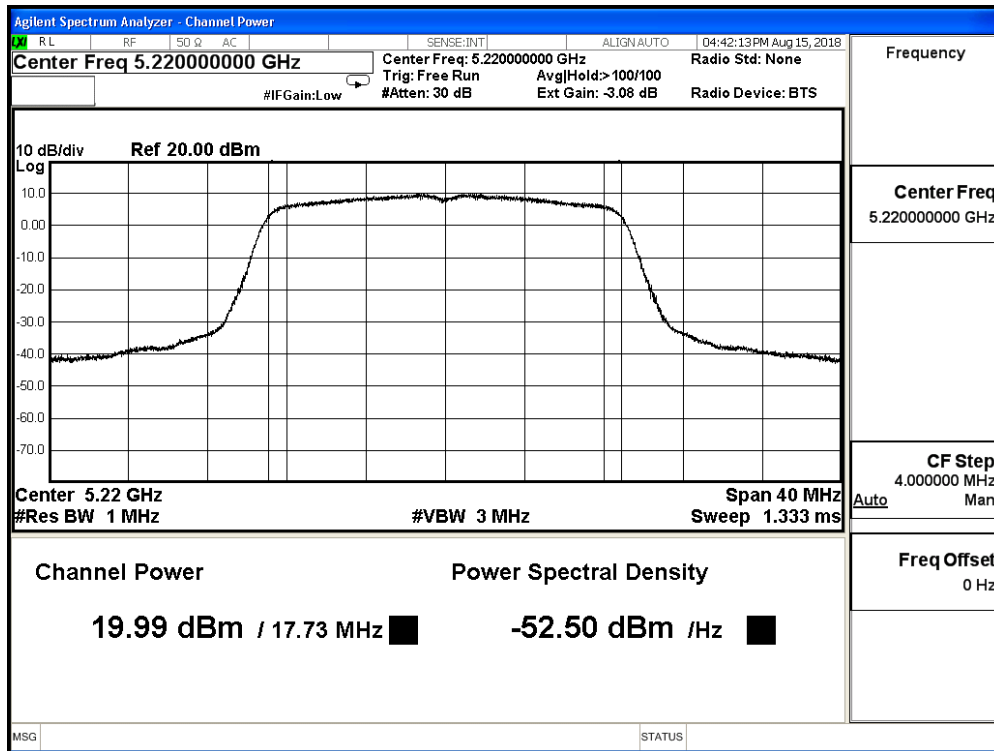

Channel 48

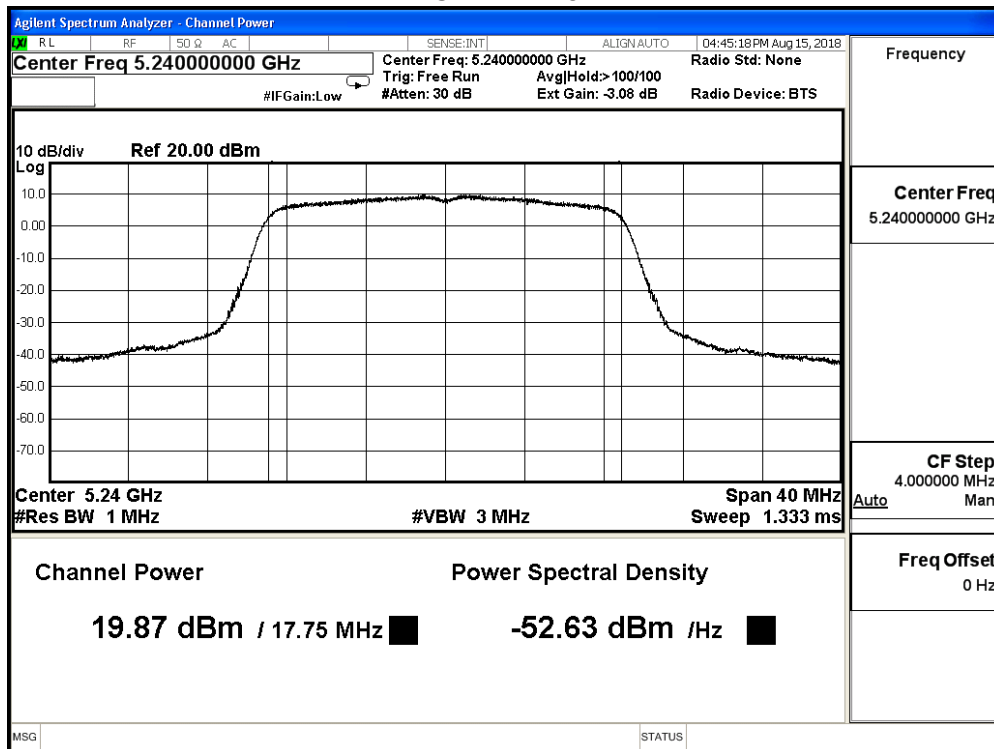

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

IEEE 802.11n(20MHz)(ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 25.653 | ≤ 30 |
| 44 | 5220 | 25.757 | ≤ 30 |
| 48 | 5240 | 25.457 | ≤ 30 |

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11n(40MHz)(ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38 | 5190 | 18.39 | ≤ 30 |
| 46 | 5230 | 19.39 | ≤ 30 |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 38 | 5190 | 18.390 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 46 | 5230 | 19.390 | 19.250 | 19.110 | 18.960 | 18.830 | 18.690 | 18.560 | 18.420 | |

Channel 38

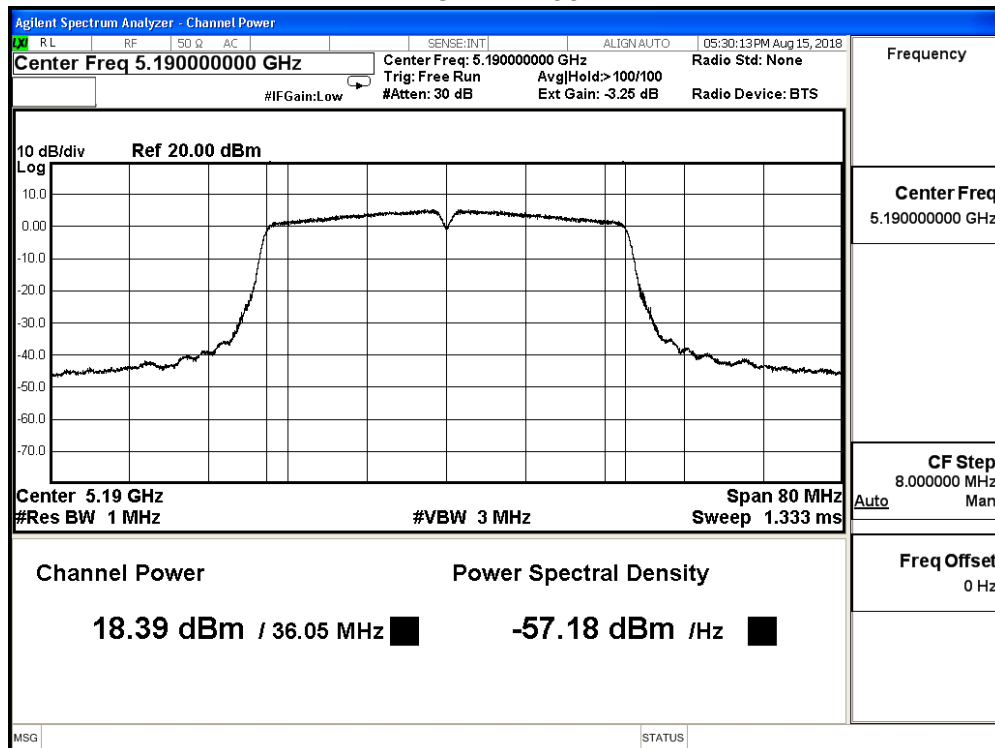

Channel 46

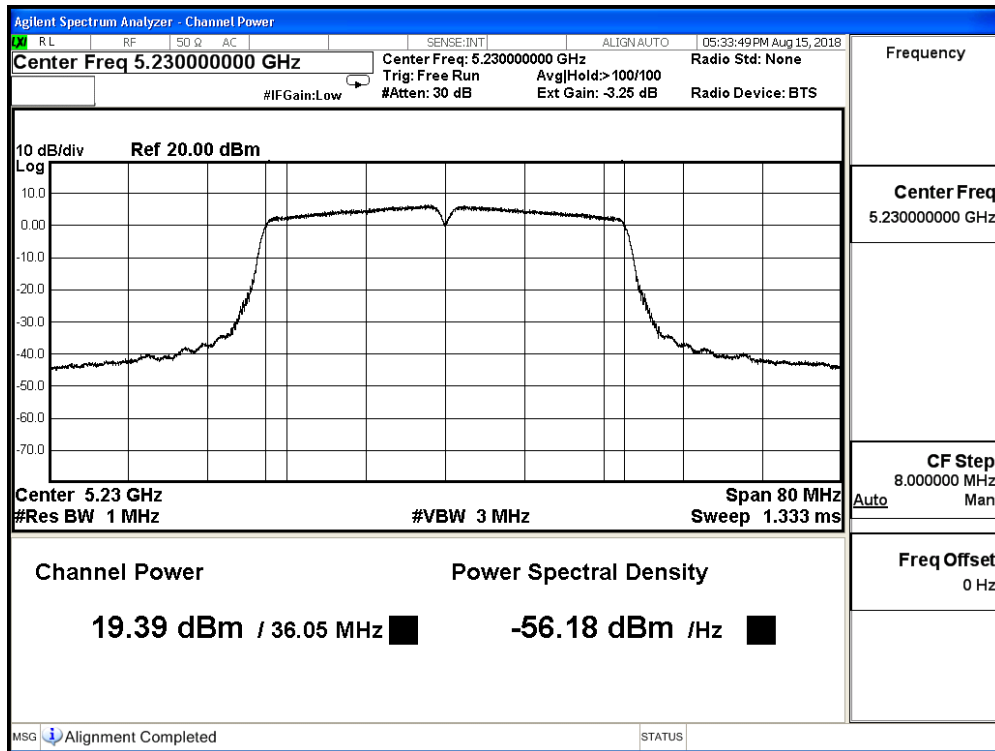

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11n(40MHz)(ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38 | 5190 | 18.09 | ≤ 30 |
| 46 | 5230 | 18.45 | ≤ 30 |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 38 | 5190 | 18.090 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 46 | 5230 | 18.450 | 18.320 | 18.180 | 18.040 | 17.900 | 17.760 | 17.620 | 17.470 | |

Channel 38

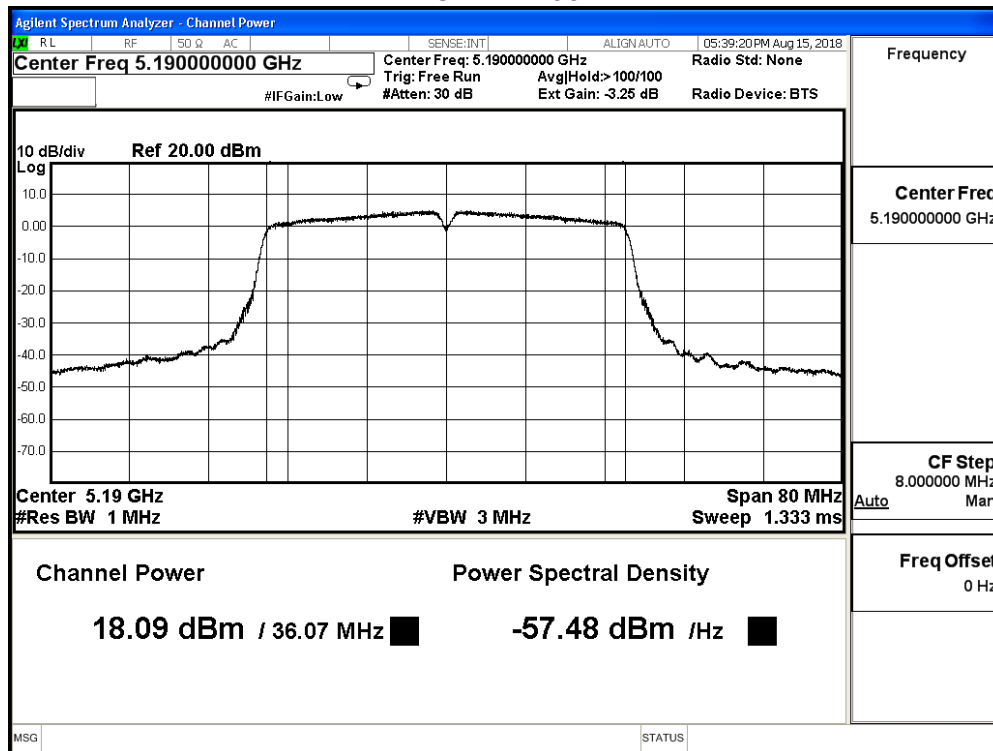

Channel 46

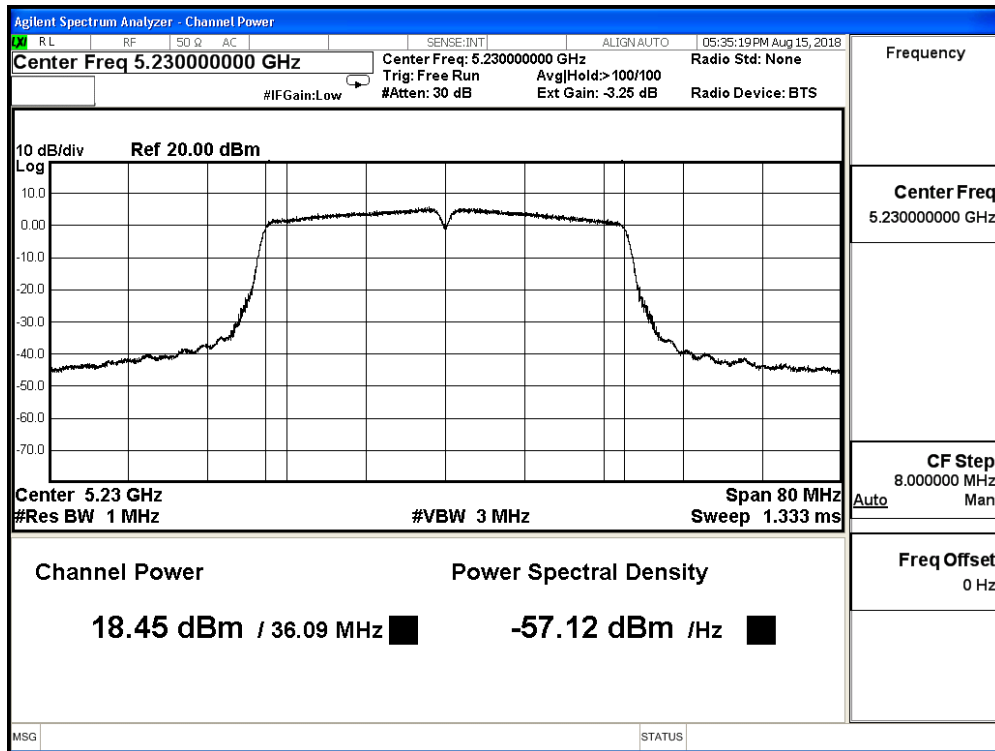

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11n(40MHz)(ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38 | 5190 | 18.12 | ≤ 30 |
| 46 | 5230 | 19.13 | ≤ 30 |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 38 | 5190 | 18.120 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 46 | 5230 | 19.130 | 19.000 | 18.850 | 18.710 | 18.580 | 18.440 | 18.300 | 18.170 | |

Channel 38

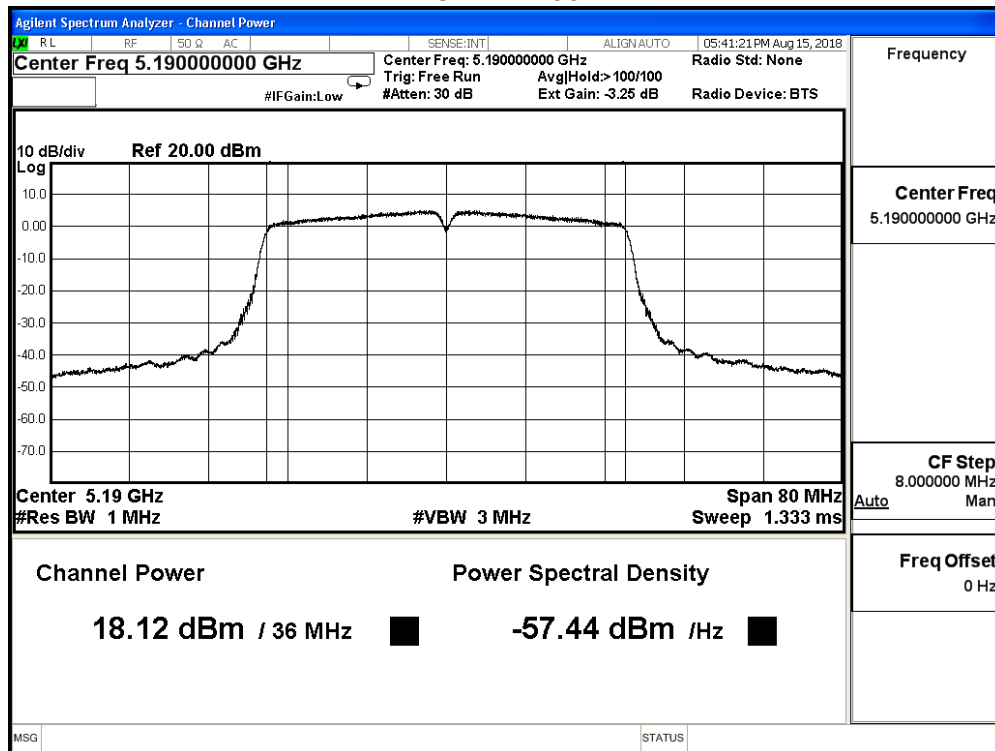

Channel 46

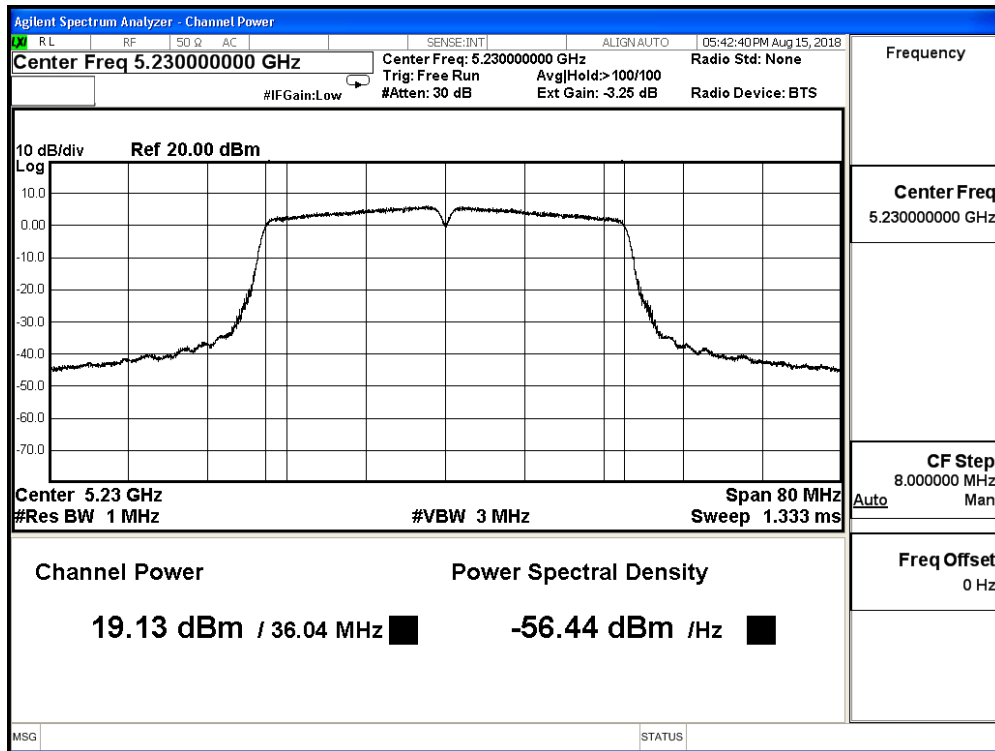

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11n(40MHz)(ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38 | 5190 | 19.17 | ≤ 30 |
| 46 | 5230 | 19.28 | ≤ 30 |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 38 | 5190 | 19.170 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 46 | 5230 | 19.280 | 19.140 | 19.000 | 18.860 | 18.720 | 18.570 | 18.420 | 18.270 | |

Channel 38

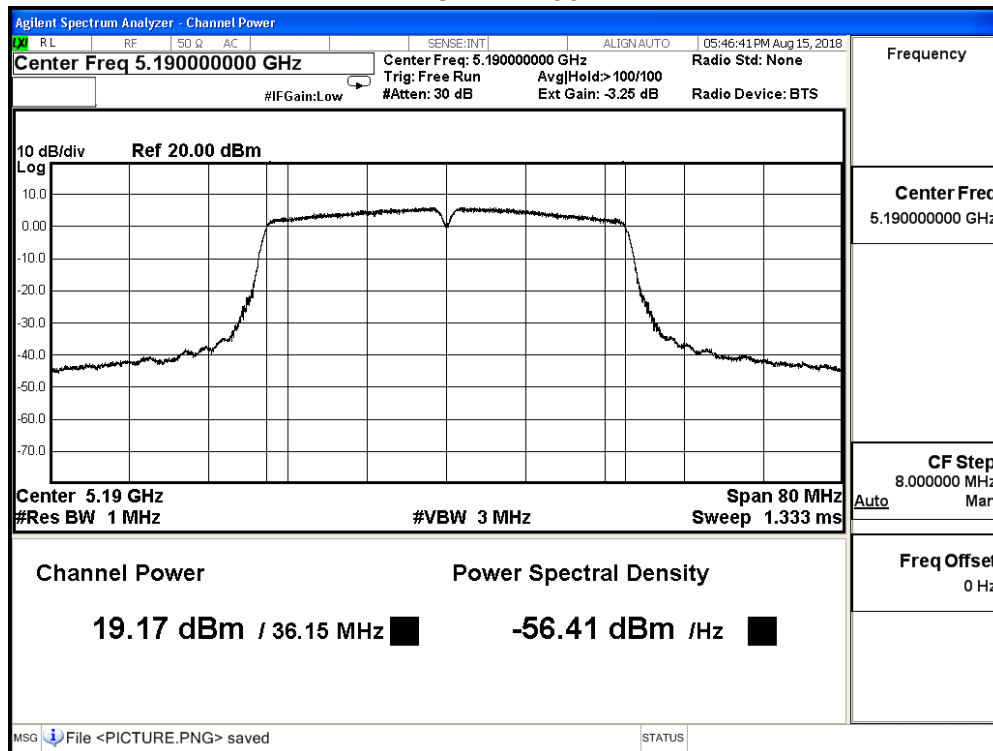

Channel 46

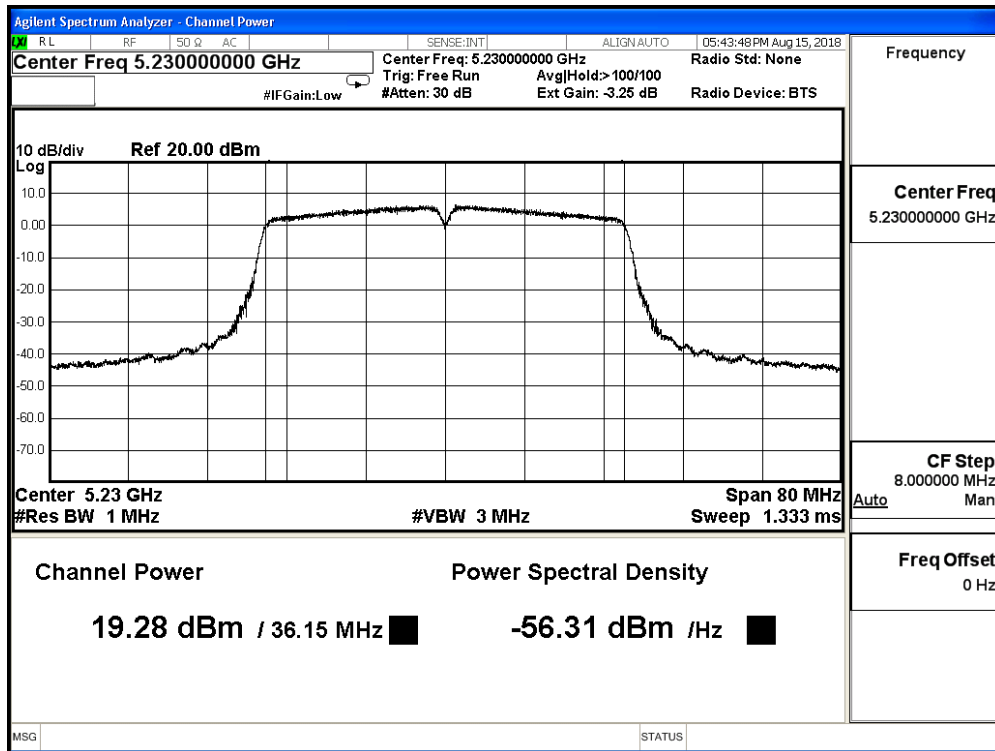

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

IEEE 802.11n(40MHz)(ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38 | 5190 | 24.486 | ≤ 30 |
| 46 | 5230 | 25.098 | ≤ 30 |

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11ac(80MHz) (ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42 | 5210 | 15.67 | ≤ 30 |

The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
| 42 | 5210 | 15.670 | 15.530 | 15.380 | 15.240 | 15.110 | 14.980 | 14.850 | 14.700 | 14.560 | 14.420 | ≤ 30 |

Channel 42

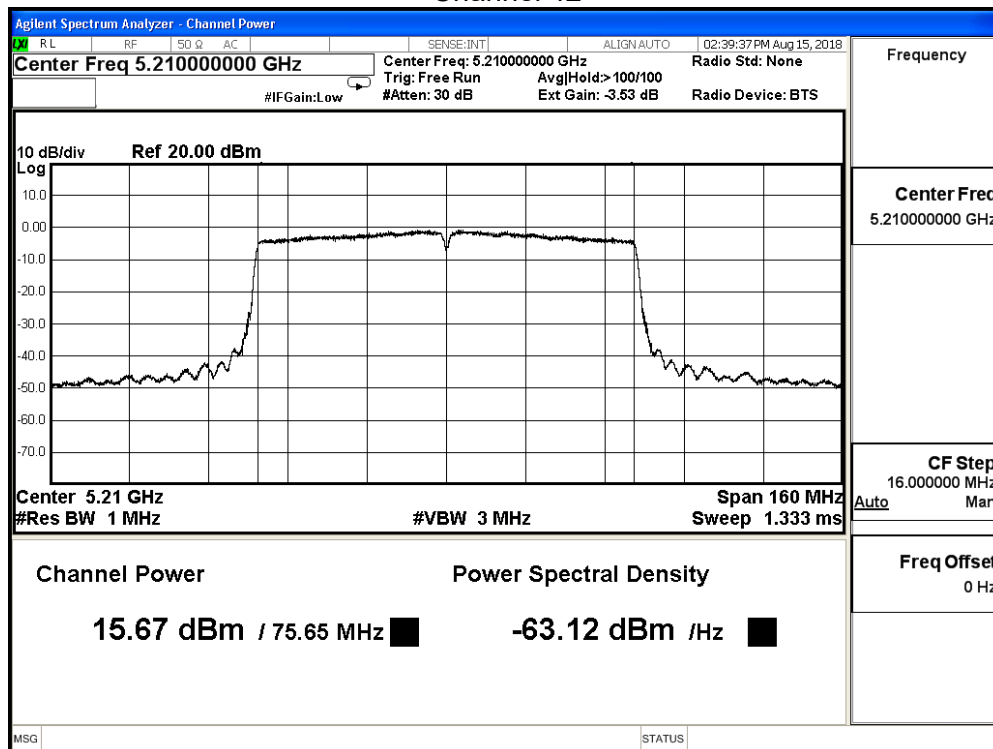

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11ac(80MHz) (ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42 | 5210 | 14.71 | ≤ 30 |

The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
| 42 | 5210 | 14.710 | 14.560 | 14.420 | 14.270 | 14.130 | 13.990 | 13.860 | 13.720 | 13.590 | 13.460 | ≤ 30 |

Channel 42

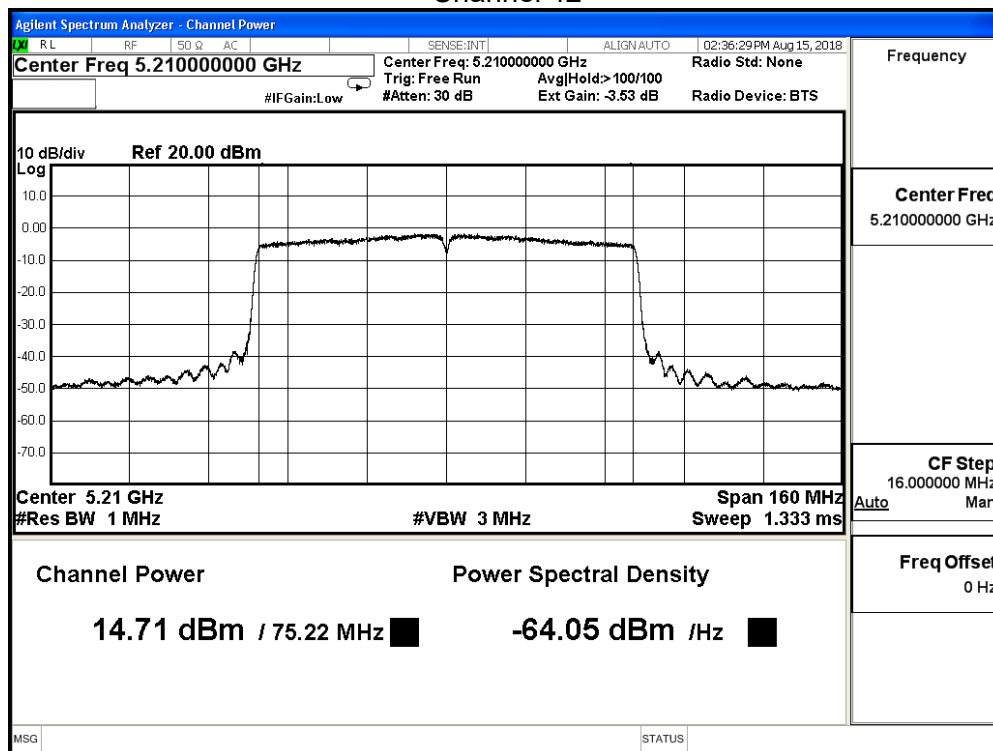

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11ac(80MHz) (ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42 | 5210 | 14.94 | ≤ 30 |

The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
| 42 | 5210 | 14.940 | 14.800 | 14.670 | 14.520 | 14.380 | 14.250 | 14.110 | 13.970 | 13.840 | 13.710 | ≤ 30 |

Channel 42

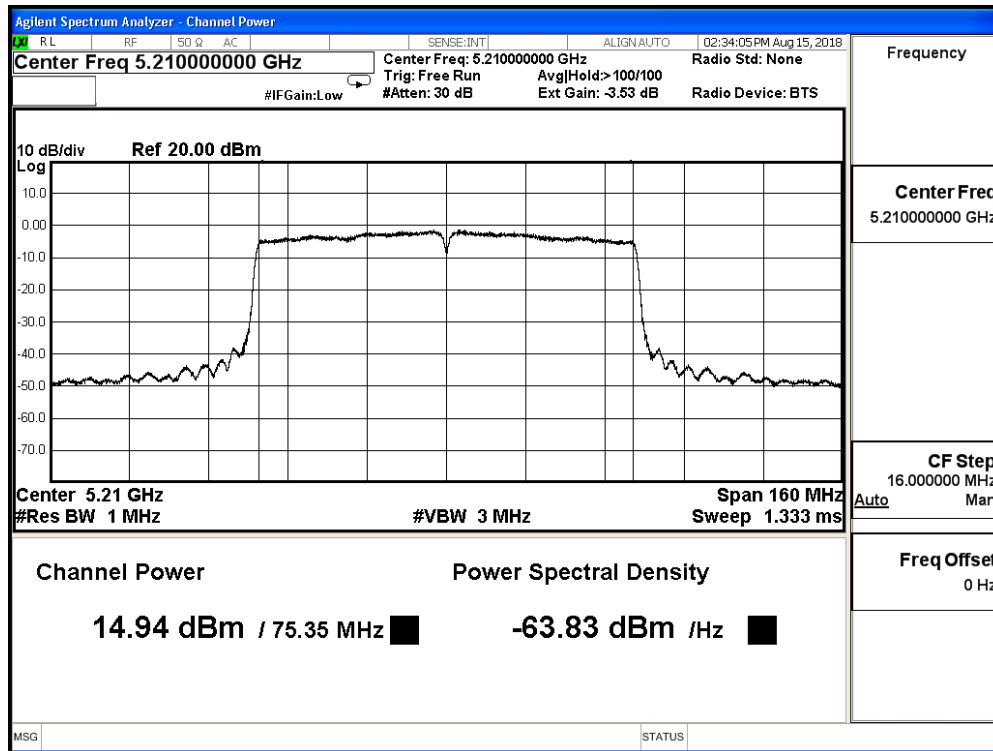

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11ac(80MHz) (ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42 | 5210 | 15.85 | ≤ 30 |

The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
| 42 | 5210 | 15.850 | 15.720 | 15.570 | 15.430 | 15.290 | 15.140 | 14.990 | 14.850 | 14.720 | 14.580 | ≤ 30 |

Channel 42

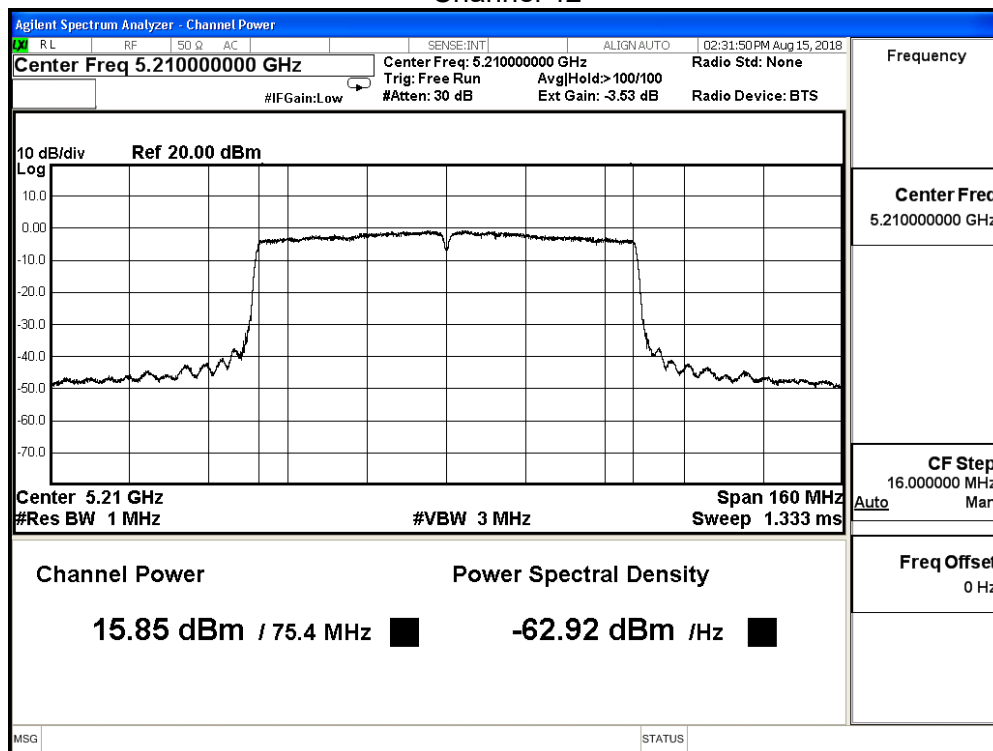

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

IEEE 802.11ac(80MHz)(ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42 | 5210 | 21.339 | ≤ 30 |

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11a (ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 22.27 | ≤ 30 |
| 157 | 5785 | 22.69 | ≤ 30 |
| 165 | 5825 | 23.28 | ≤ 30 |


The worst emission of data rate is 6 Mbps.

| Maximum conducted output power (dBm) | | | | | | | | | |
|--------------------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|----------------|
| Channel No | Frequency (MHz) | Data Rate | | | | | | | Required Limit |
| | | 6 | 12 | 18 | 24 | 36 | 48 | 54 | |
| 149 | 5745 | 22.270 | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 157 | 5785 | 22.690 | 22.550 | 22.410 | 22.270 | 22.130 | 22.000 | 21.870 | |
| 165 | 5825 | 23.280 | -- | -- | -- | -- | -- | -- | |


Channel 149

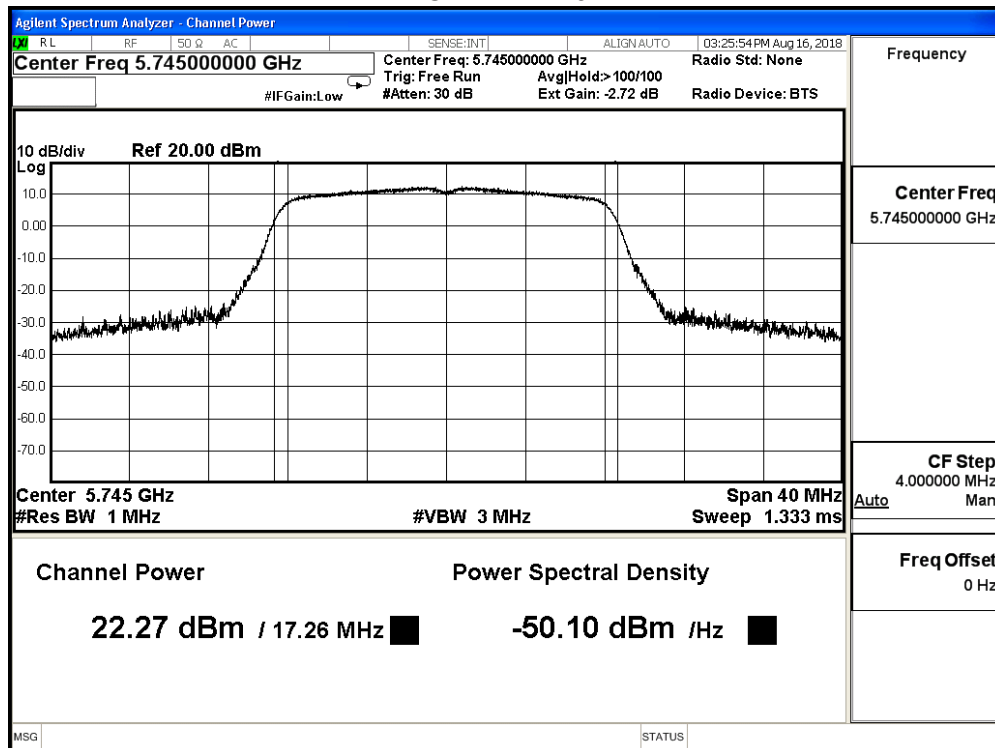

Channel 157 (5785MHz)

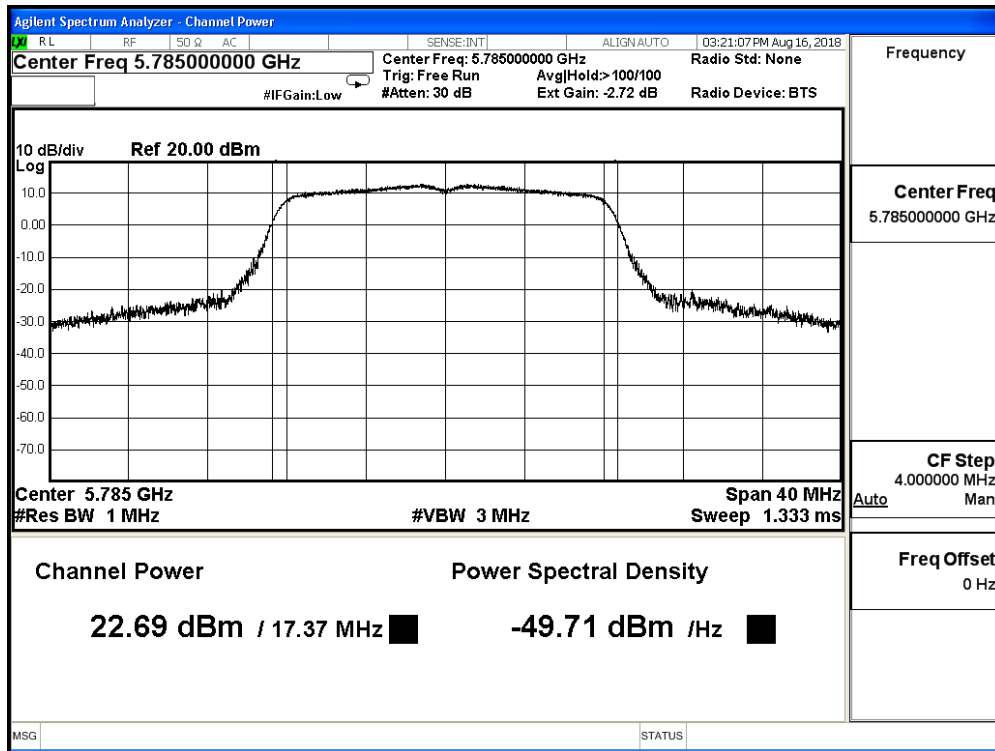

Channel 165 (5825MHz)

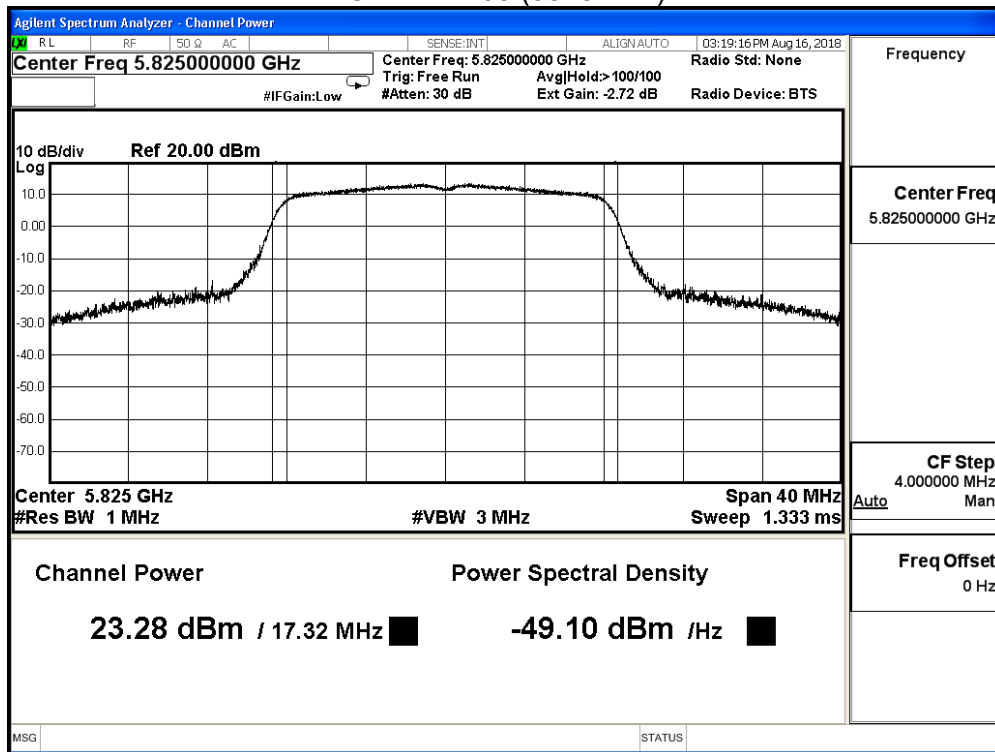

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11a (ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 21.64 | ≤ 30 |
| 157 | 5785 | 22.41 | ≤ 30 |
| 165 | 5825 | 23.14 | ≤ 30 |


The worst emission of data rate is 6 Mbps.

| Maximum conducted output power (dBm) | | | | | | | | | |
|--------------------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|----------------|
| Channel No | Frequency (MHz) | Data Rate | | | | | | | Required Limit |
| | | 6 | 12 | 18 | 24 | 36 | 48 | 54 | |
| 149 | 5745 | 21.640 | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 157 | 5785 | 22.410 | 22.270 | 22.130 | 21.980 | 21.840 | 21.690 | 21.550 | |
| 165 | 5825 | 23.140 | -- | -- | -- | -- | -- | -- | |


Channel 149 (5745MHz)

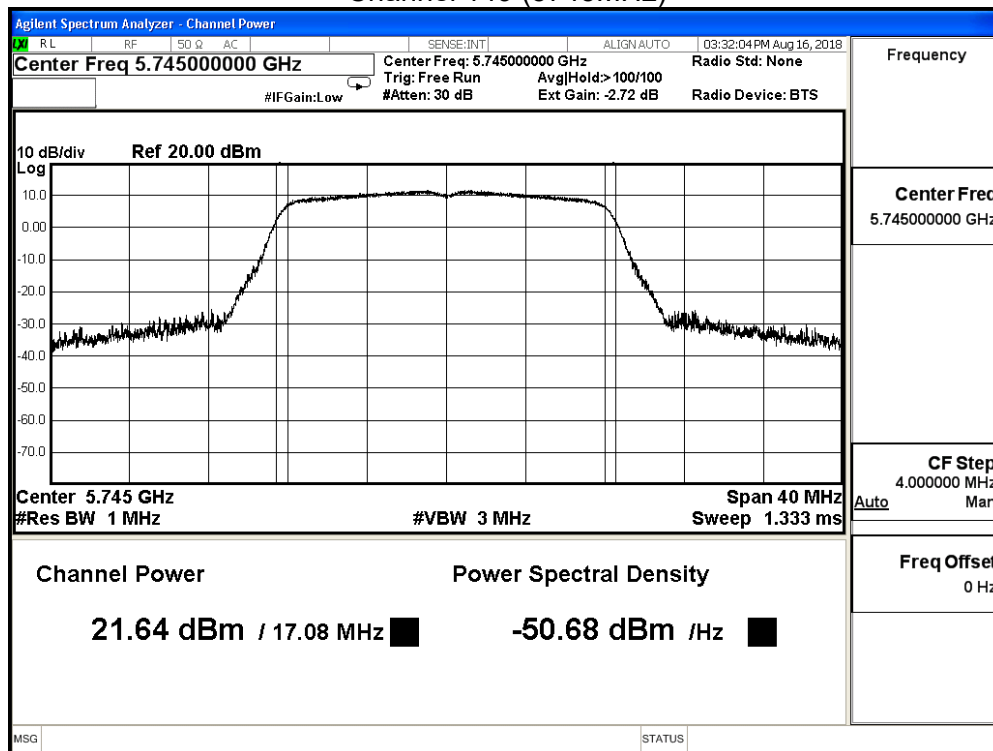

Channel 157 (5785MHz)

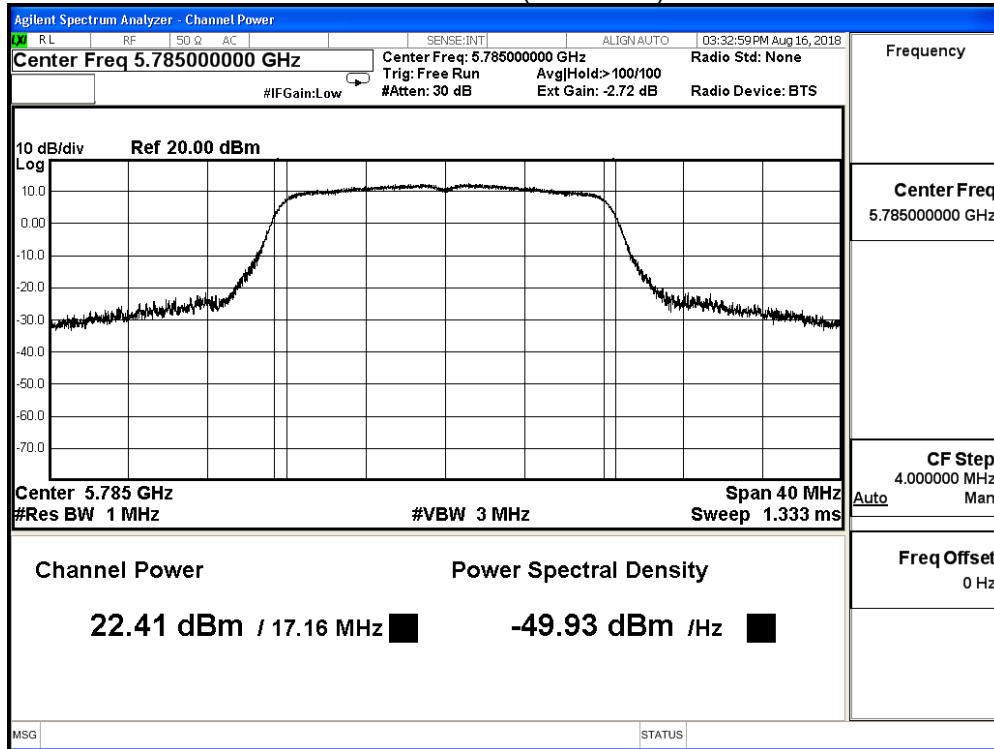

Channel 165 (5825MHz)

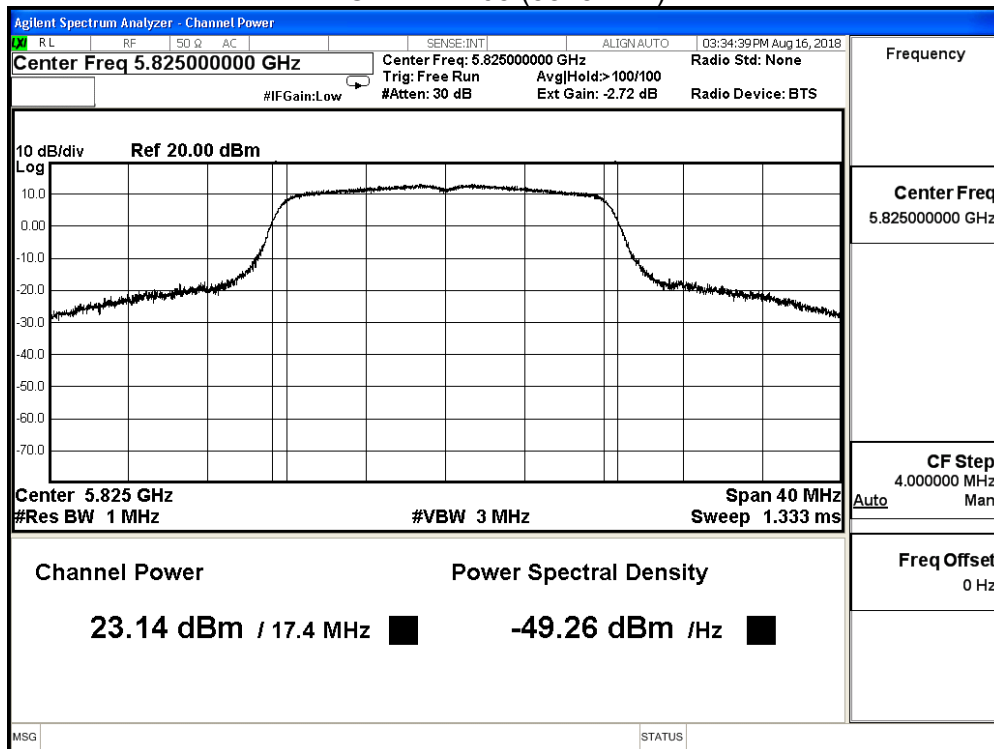

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11a (ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 21.91 | ≤ 30 |
| 157 | 5785 | 22.78 | ≤ 30 |
| 165 | 5825 | 23.46 | ≤ 30 |


The worst emission of data rate is 6 Mbps.

| Maximum conducted output power (dBm) | | | | | | | | | |
|--------------------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|----------------|
| Channel No | Frequency (MHz) | Data Rate | | | | | | | Required Limit |
| | | 6 | 12 | 18 | 24 | 36 | 48 | 54 | |
| 149 | 5745 | 21.910 | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 157 | 5785 | 22.780 | 22.640 | 22.500 | 22.350 | 22.220 | 22.070 | 21.940 | |
| 165 | 5825 | 23.460 | -- | -- | -- | -- | -- | -- | |


Channel 149

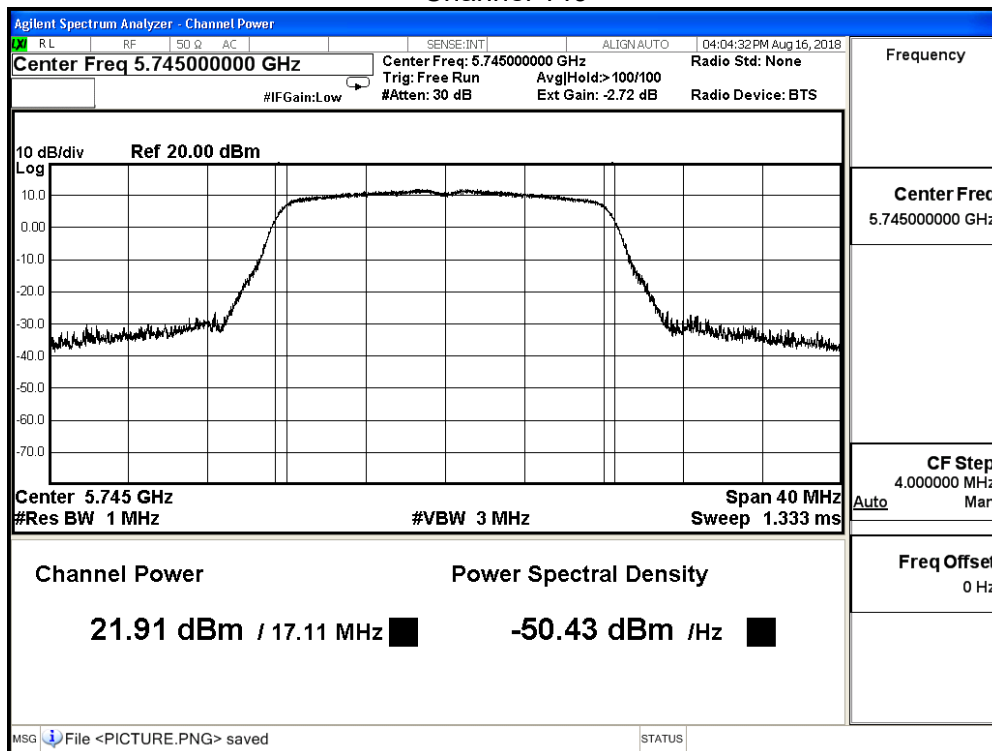

Channel 157 (5785MHz)

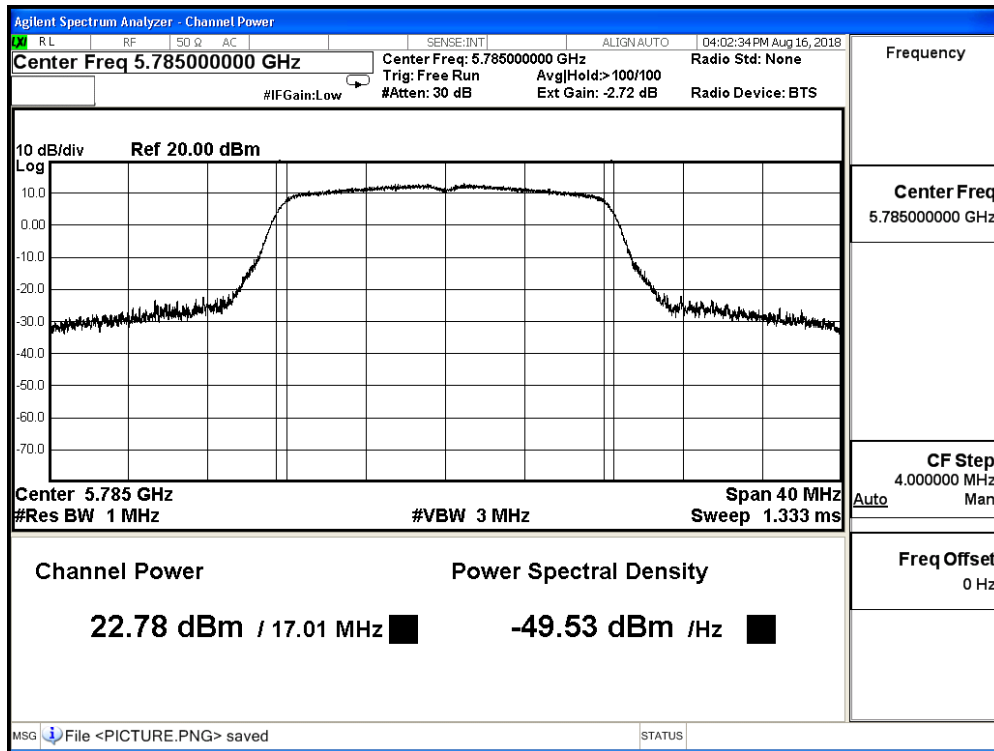

Channel 165 (5825MHz)

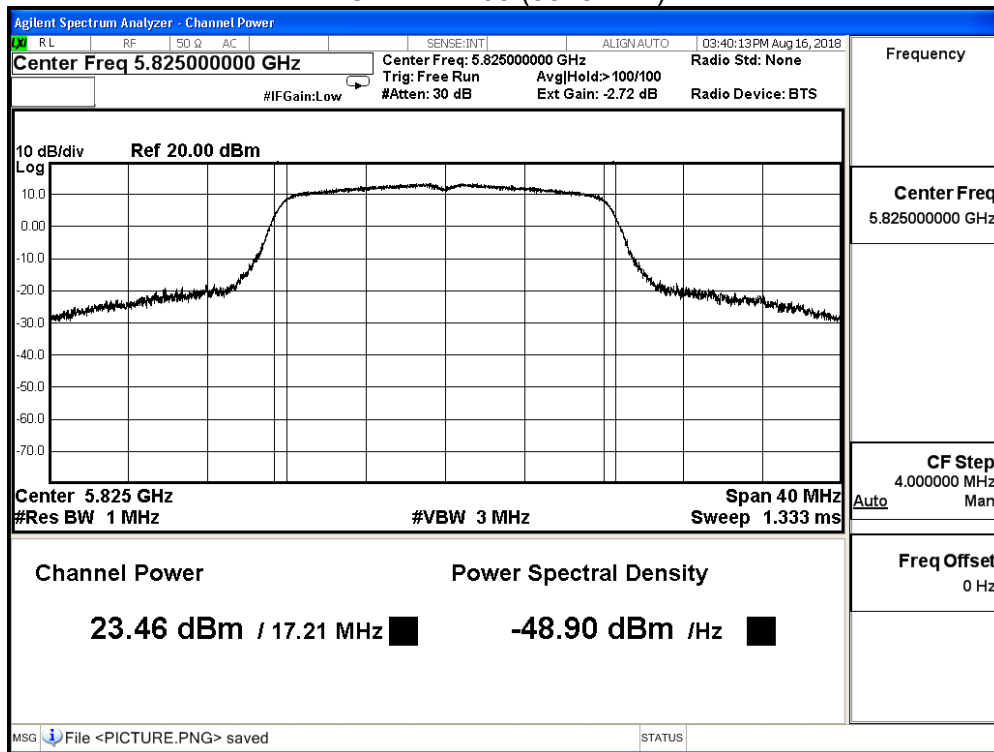

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11a (ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 22.89 | ≤ 30 |
| 157 | 5785 | 23.37 | ≤ 30 |
| 165 | 5825 | 24.09 | ≤ 30 |


The worst emission of data rate is 6 Mbps.

| Maximum conducted output power (dBm) | | | | | | | | | |
|--------------------------------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|----------------|
| Channel No | Frequency (MHz) | Data Rate | | | | | | | Required Limit |
| | | 6 | 12 | 18 | 24 | 36 | 48 | 54 | |
| 149 | 5745 | 22.890 | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 157 | 5785 | 23.370 | 23.230 | 23.090 | 22.950 | 22.800 | 22.650 | 22.510 | |
| 165 | 5825 | 24.090 | -- | -- | -- | -- | -- | -- | |


Channel 149 (5745MHz)

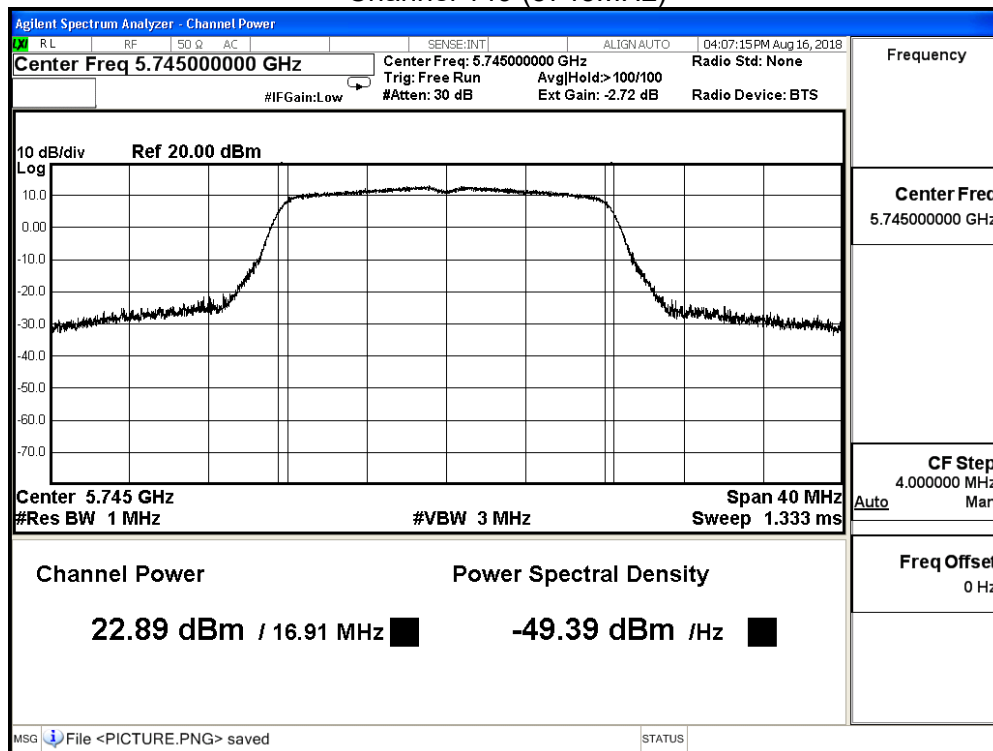

Channel 157 (5785MHz)

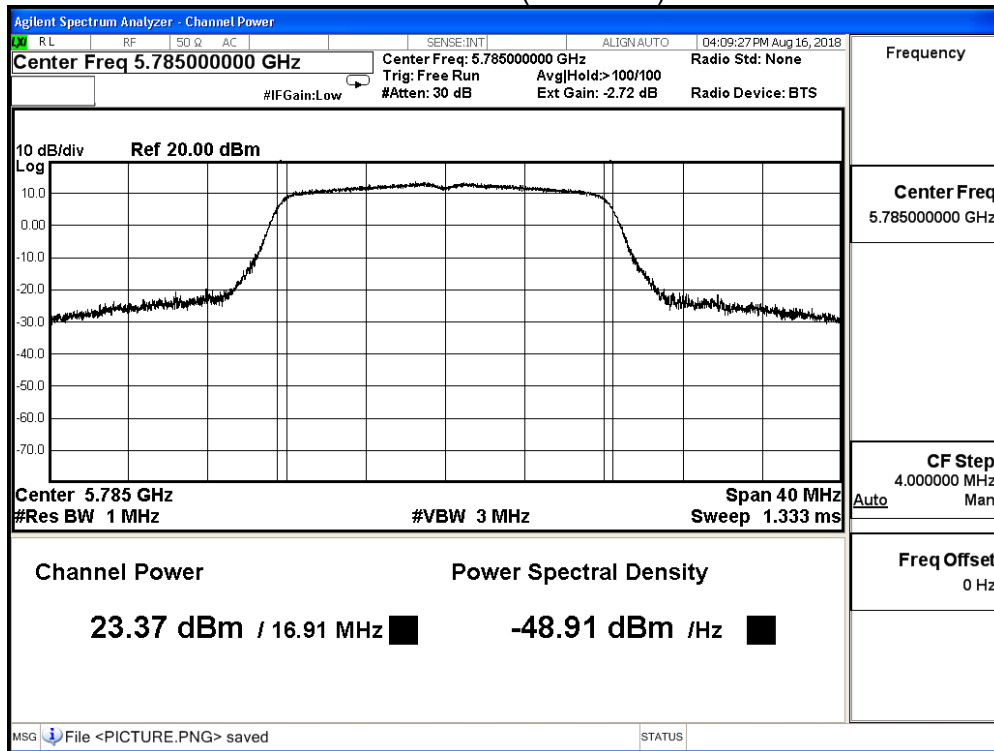

Channel 165 (5825MHz)

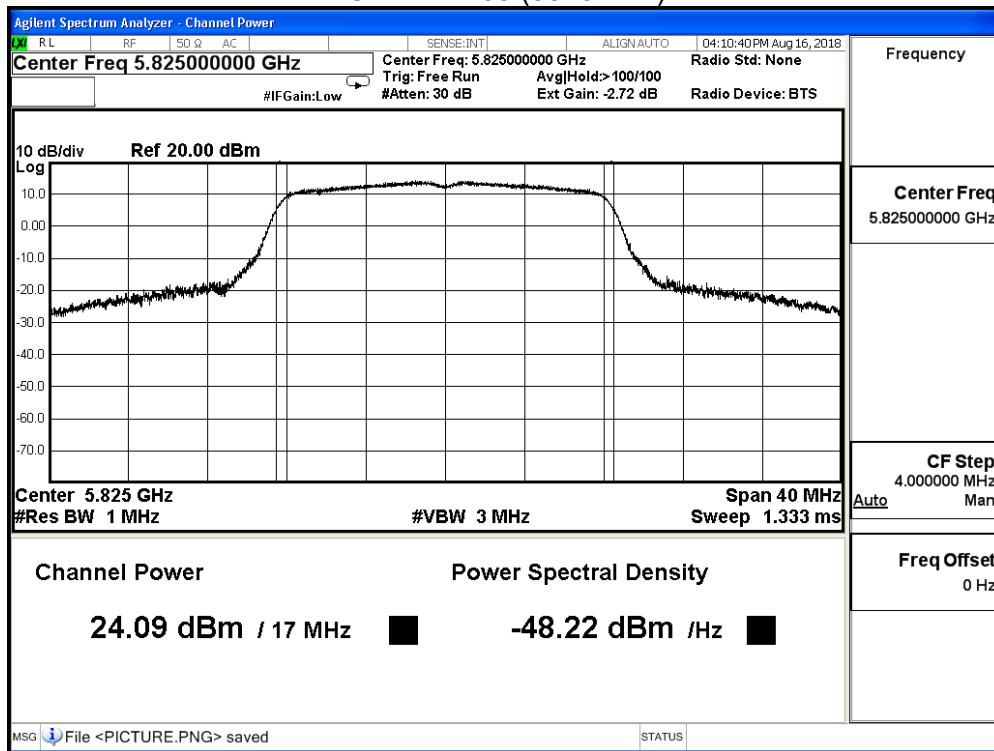

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

IEEE 802.11a (ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 28.224 | ≤ 30 |
| 157 | 5785 | 28.847 | ≤ 30 |
| 165 | 5825 | 29.529 | ≤ 30 |

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11n_20MHz (ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 22.73 | ≤ 30 |
| 157 | 5785 | 22.82 | ≤ 30 |
| 165 | 5825 | 22.87 | ≤ 30 |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 149 | 5745 | 22.730 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 157 | 5785 | 22.820 | 22.670 | 22.540 | 22.400 | 22.260 | 22.120 | 21.980 | 21.840 | |
| 165 | 5825 | 22.870 | -- | -- | -- | -- | -- | -- | -- | |


Channel 149 (5745MHz)

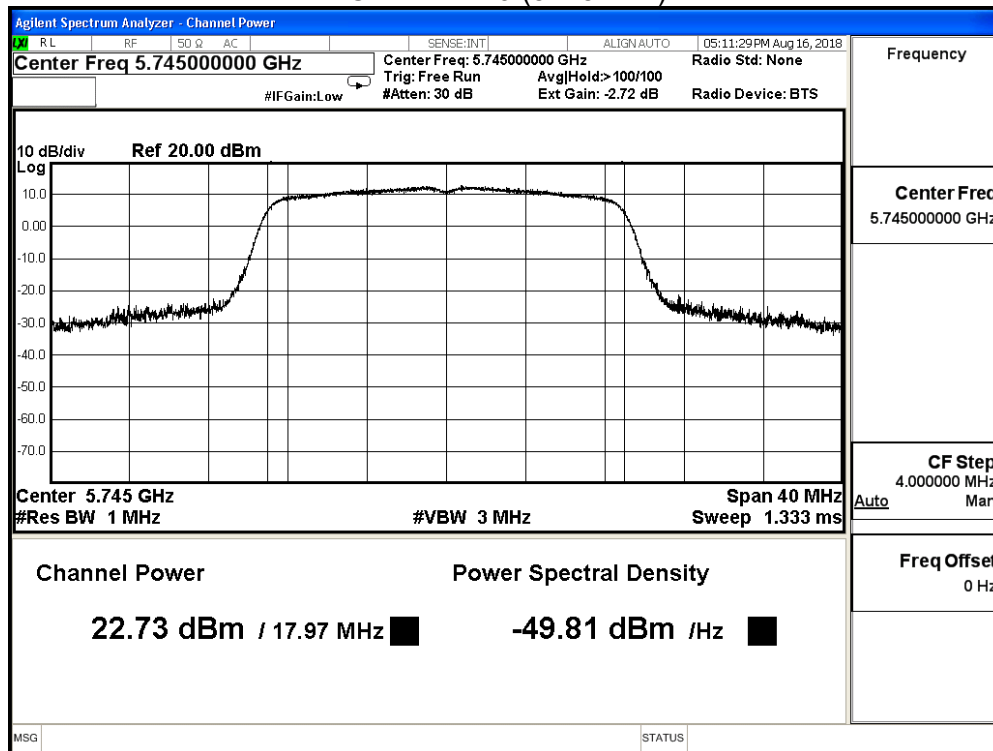

Channel 157 (5785MHz)

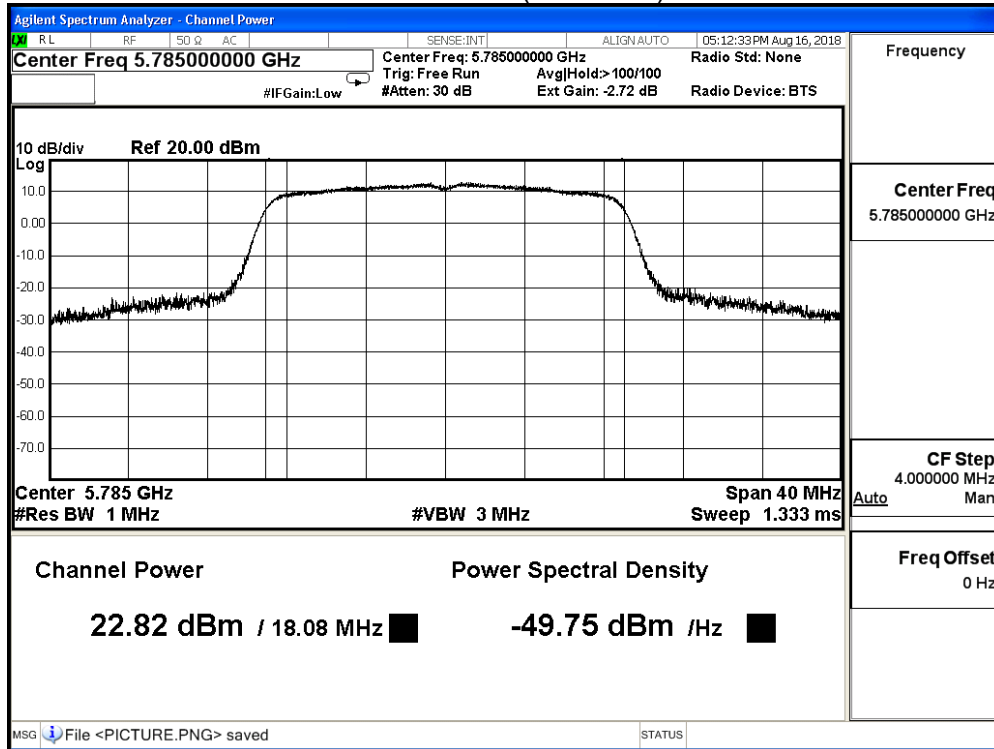

Channel 165 (5825MHz)

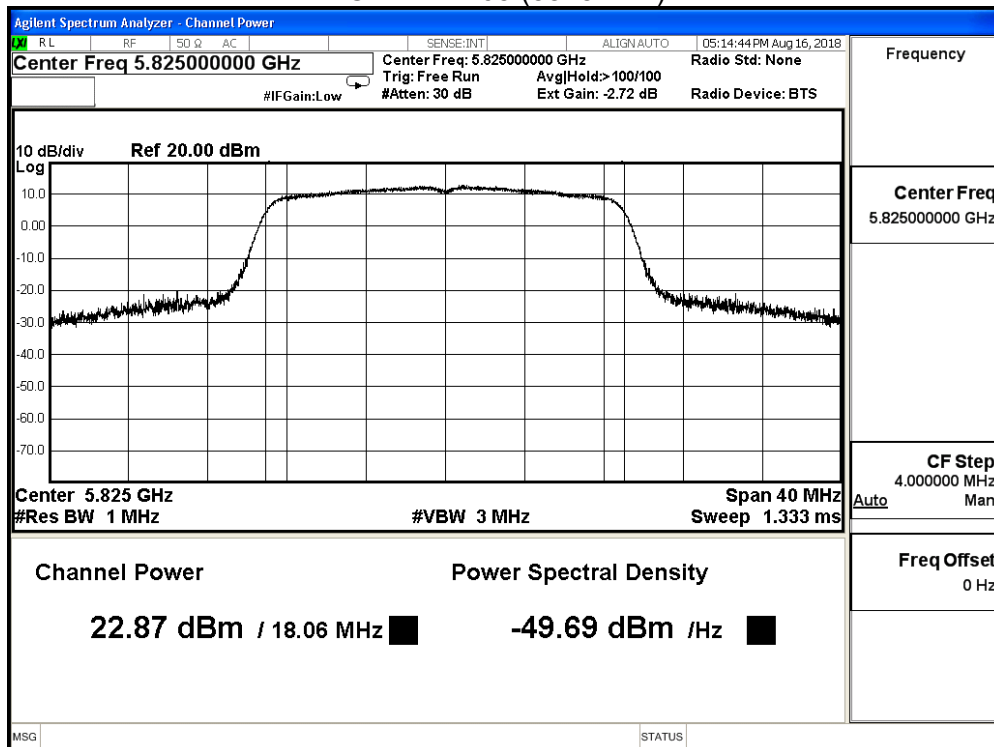

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11n_20MHz (ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 22.07 | ≤ 30 |
| 157 | 5785 | 22.62 | ≤ 30 |
| 165 | 5825 | 22.80 | ≤ 30 |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 149 | 5745 | 22.070 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 157 | 5785 | 22.620 | 22.480 | 22.350 | 22.210 | 22.060 | 21.920 | 21.770 | 21.630 | |
| 165 | 5825 | 22.800 | -- | -- | -- | -- | -- | -- | -- | |


Channel 149 (5745MHz)

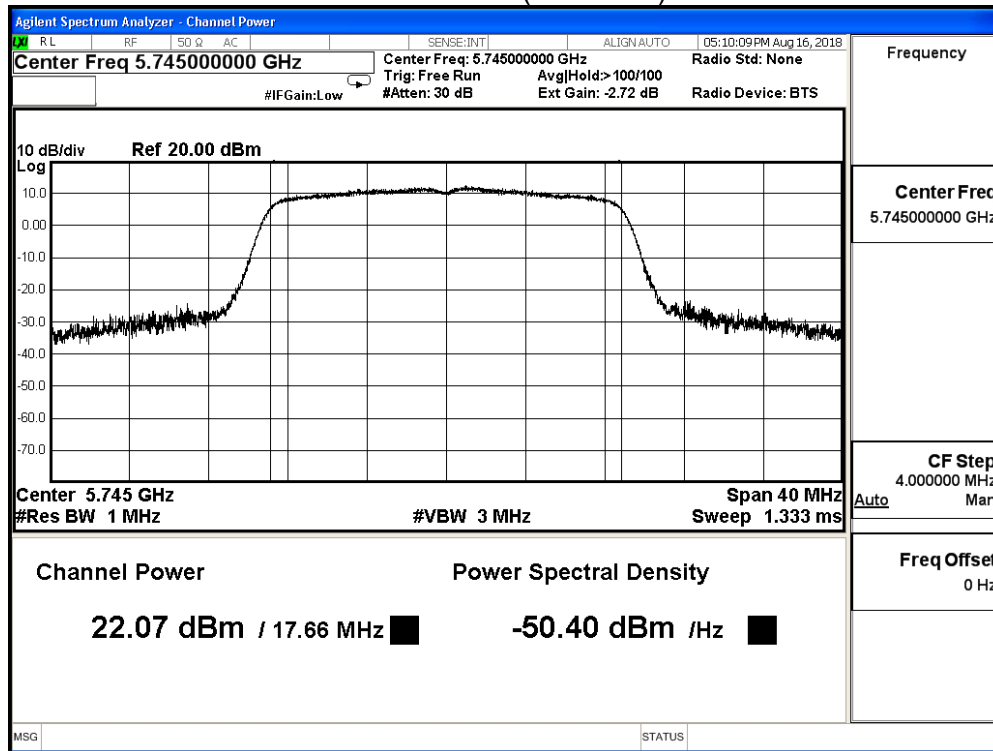

Channel 157 (5785MHz)

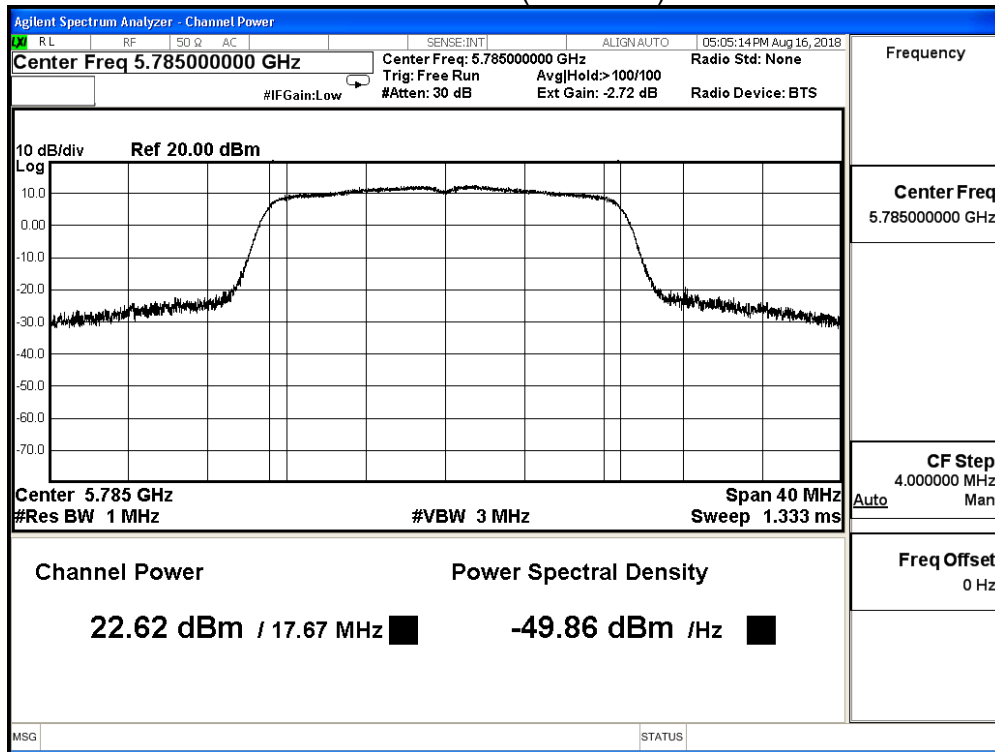

Channel 165 (5825MHz)

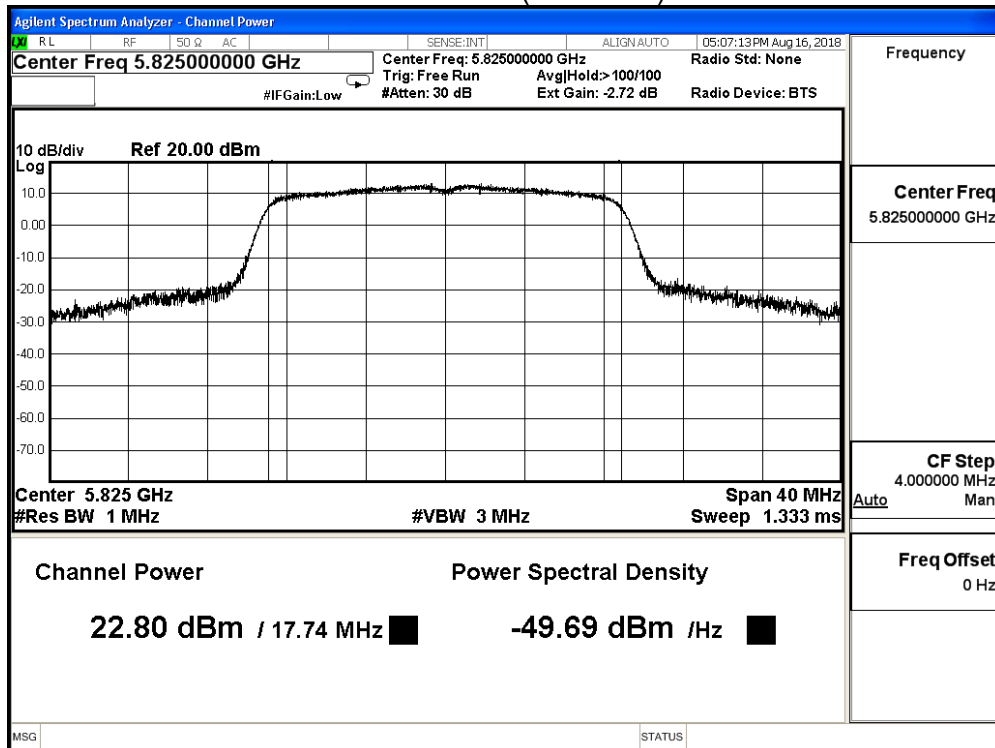

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11n_20MHz (ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 22.53 | ≤ 30 |
| 157 | 5785 | 22.60 | ≤ 30 |
| 165 | 5825 | 22.39 | ≤ 30 |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 149 | 5745 | 22.530 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 157 | 5785 | 22.600 | 22.450 | 22.320 | 22.180 | 22.040 | 21.900 | 21.760 | 21.630 | |
| 165 | 5825 | 22.390 | -- | -- | -- | -- | -- | -- | -- | |


Channel 149 (5745MHz)

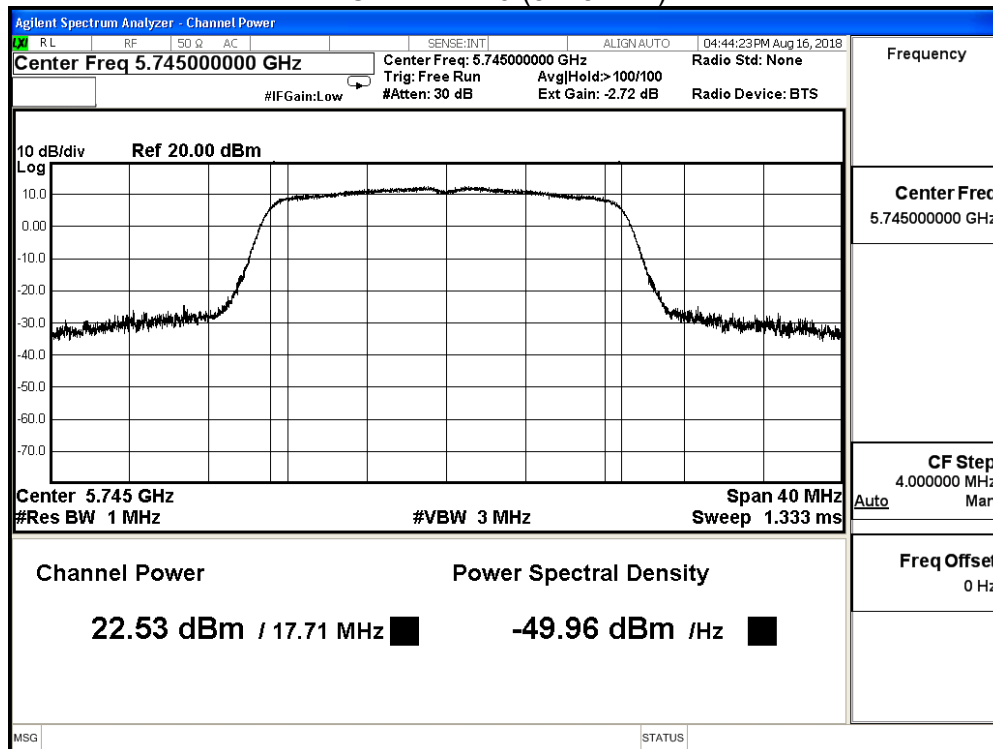

Channel 157 (5785MHz)

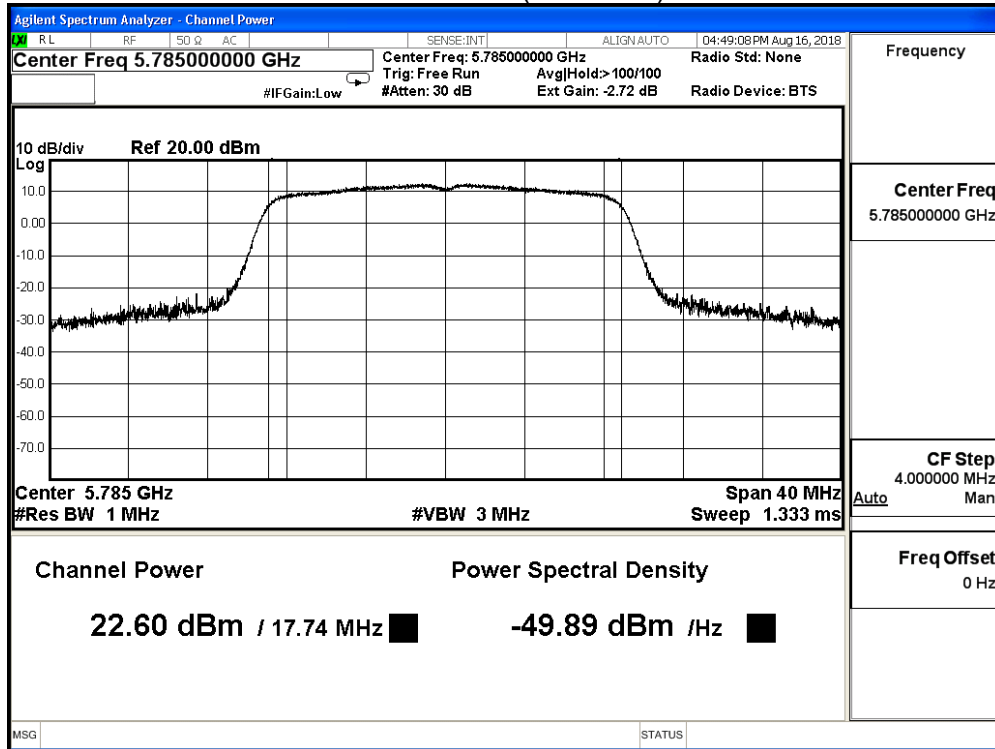

Channel 165 (5825MHz)

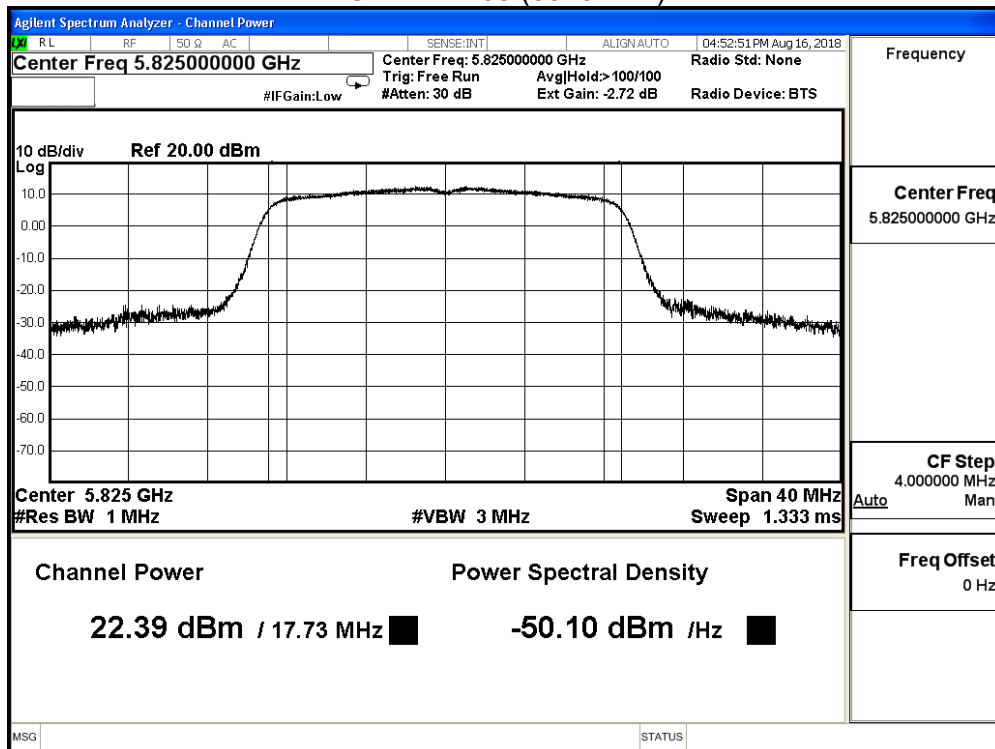

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE 802.11n_20MHz (ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 23.21 | ≤ 30 |
| 157 | 5785 | 23.14 | ≤ 30 |
| 165 | 5825 | 23.10 | ≤ 30 |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 149 | 5745 | 23.210 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 157 | 5785 | 23.140 | 23.000 | 22.850 | 22.710 | 22.560 | 22.420 | 22.280 | 22.130 | |
| 165 | 5825 | 23.100 | -- | -- | -- | -- | -- | -- | -- | |


Channel 149 (5745MHz)

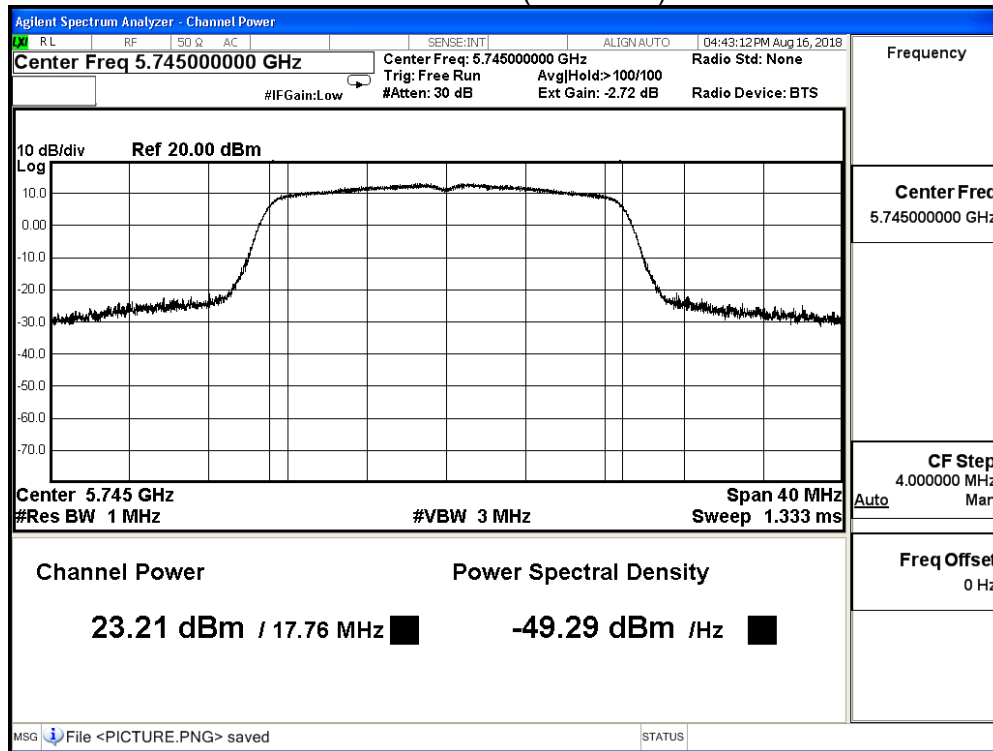

Channel 157 (5785MHz)

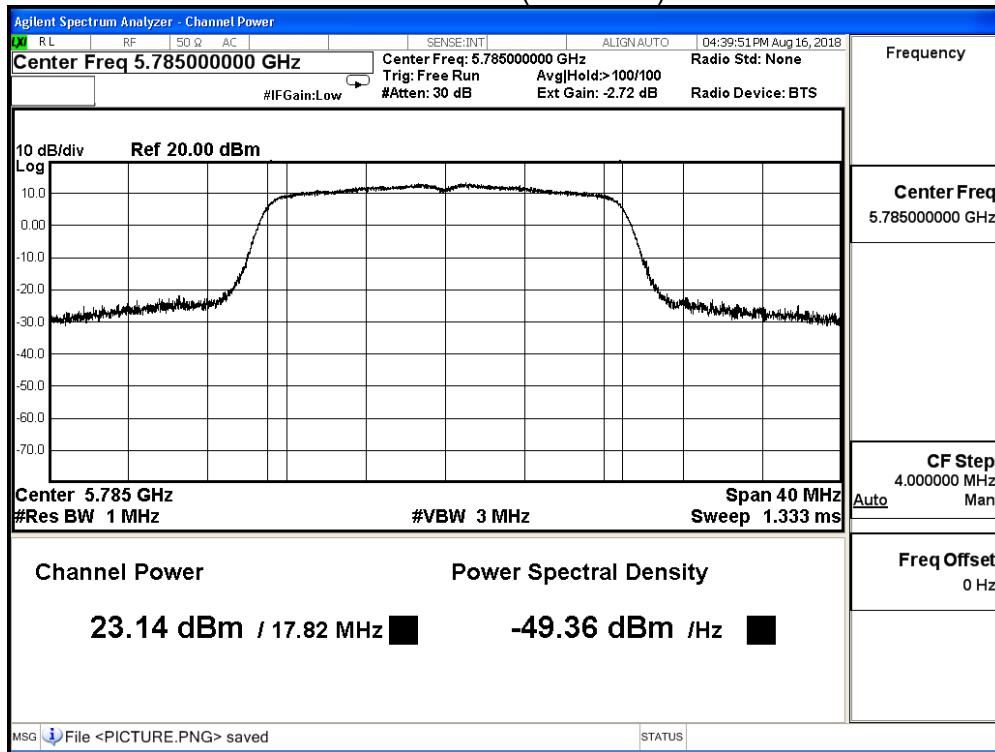

Channel 165 (5825MHz)

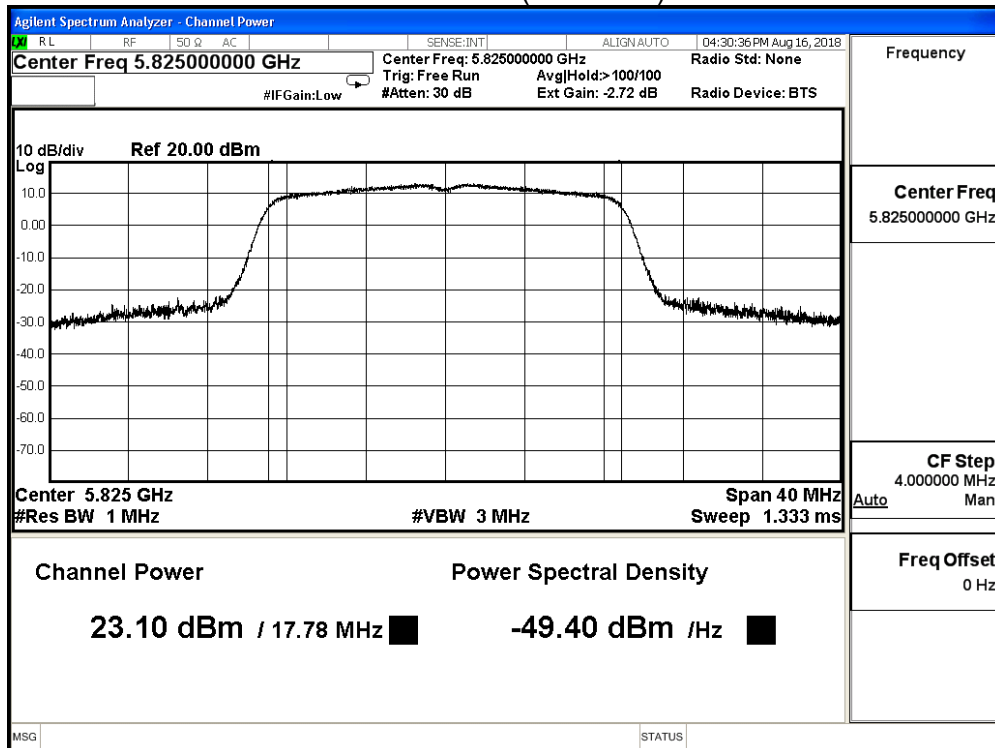

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode CDD WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

IEEE 802.11n_20MHz (ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 28.675 | ≤ 30 |
| 157 | 5785 | 28.821 | ≤ 30 |
| 165 | 5825 | 28.818 | ≤ 30 |

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE802.11n_40MHz(ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 151 | 5755 | 23.97 | ≤ 30 |
| 159 | 5795 | 23.63 | ≤ 30 |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 151 | 5755 | 23.970 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 159 | 5795 | 23.630 | 23.480 | 23.340 | 23.210 | 23.070 | 22.940 | 22.790 | 22.650 | |

Channel 151 (5755MHz)

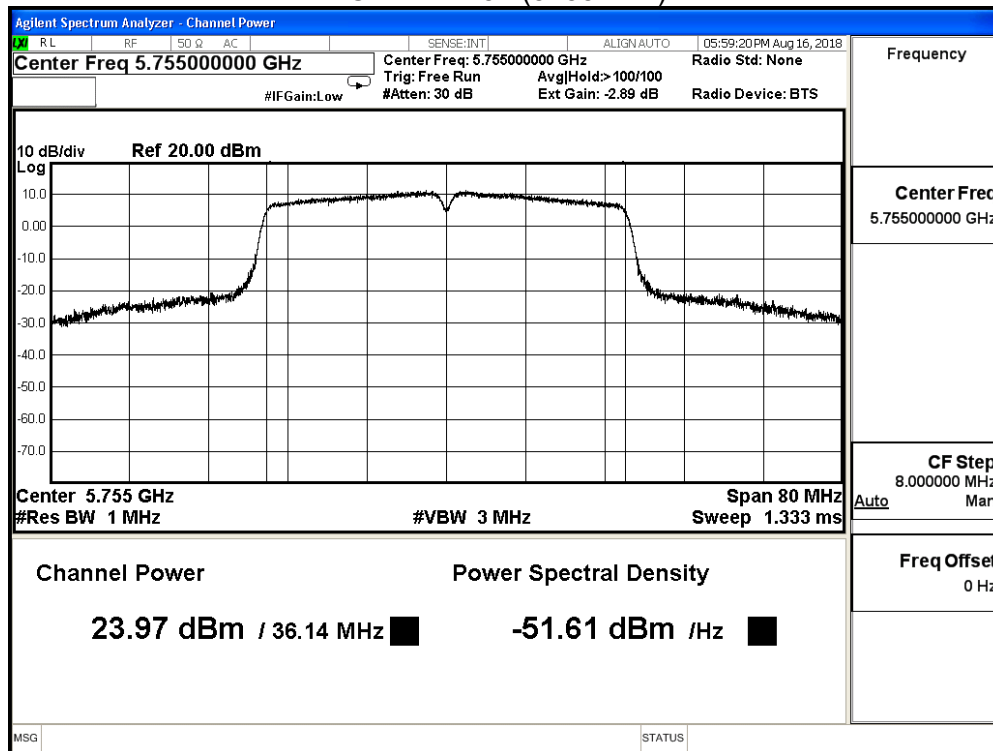

Channel 159 (5795MHz)

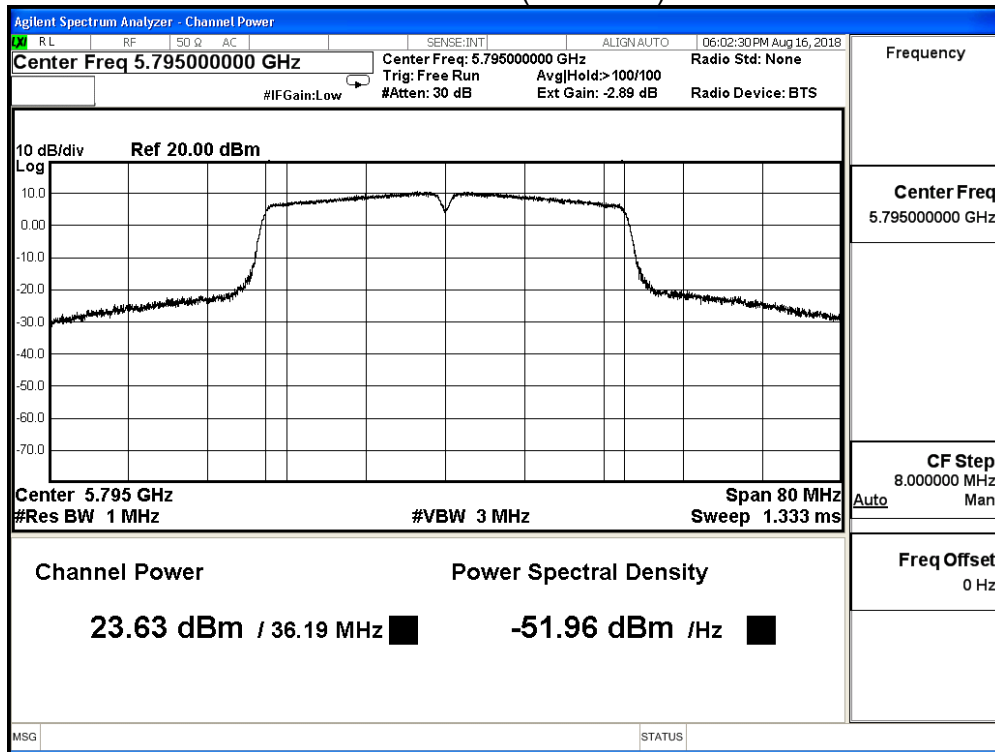

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE802.11n_40MHz(ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 151 | 5755 | 23.29 | ≤ 30 |
| 159 | 5795 | 23.18 | ≤ 30 |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 151 | 5755 | 23.290 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 159 | 5795 | 23.180 | 23.040 | 22.890 | 22.750 | 22.600 | 22.460 | 22.310 | 22.170 | |

Channel 151 (5755MHz)

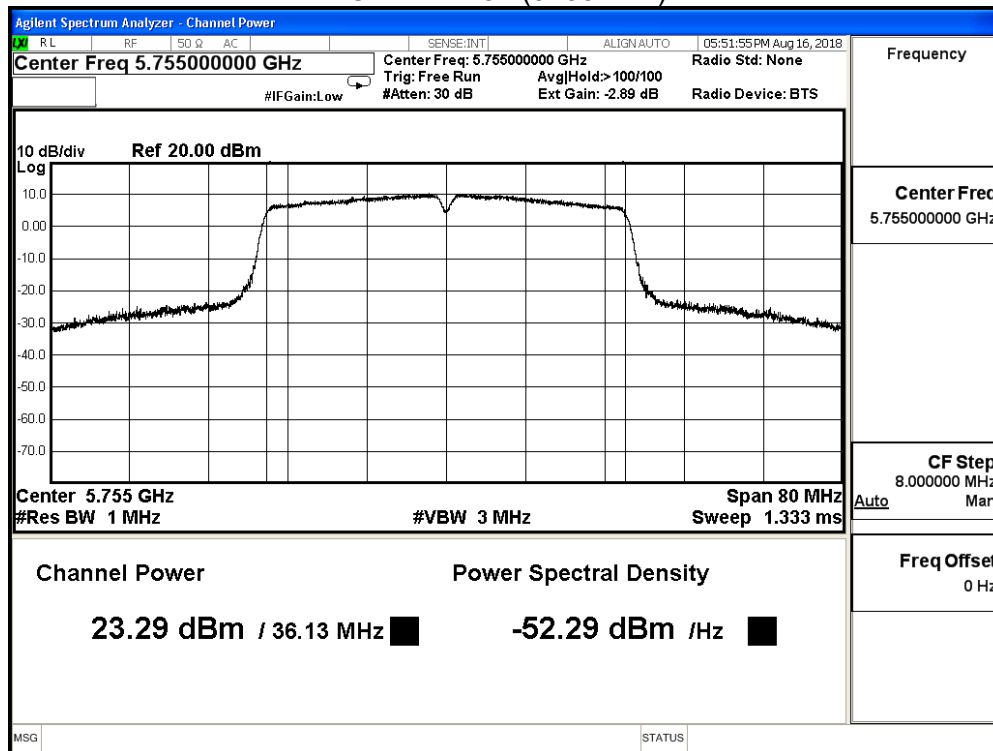

Channel 159 (5795MHz)

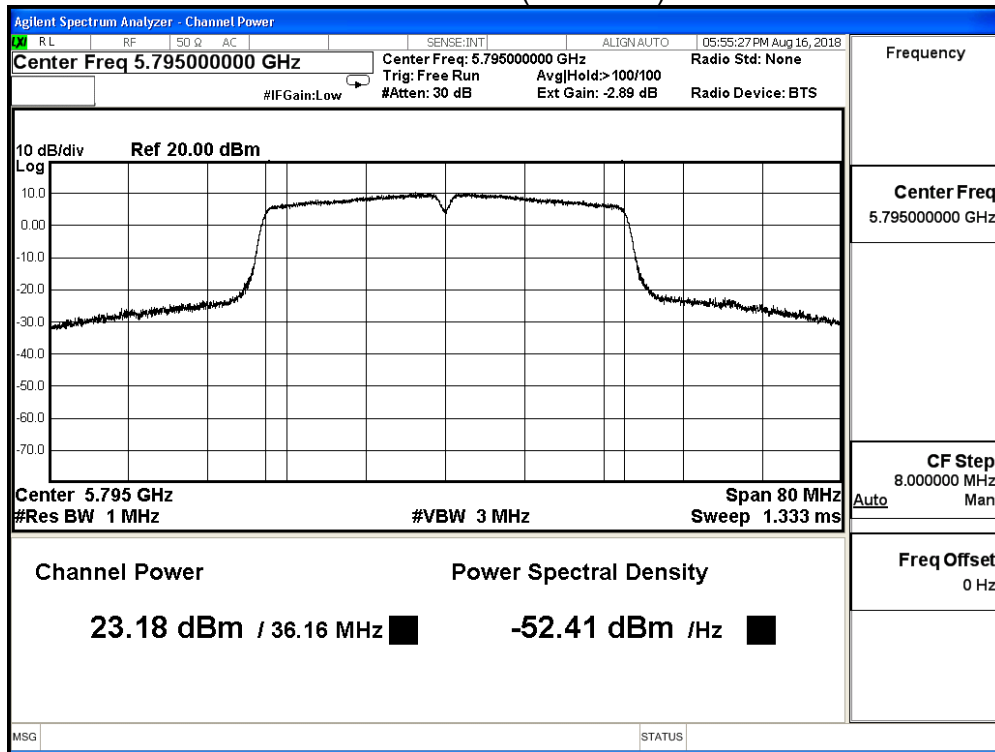

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE802.11n_40MHz(ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 151 | 5755 | 23.11 | ≤ 30 |
| 159 | 5795 | 23.40 | ≤ 30 |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 151 | 5755 | 23.110 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 159 | 5795 | 23.400 | 23.260 | 23.110 | 22.970 | 22.830 | 22.690 | 22.550 | 22.410 | |

Channel 151 (5755MHz)

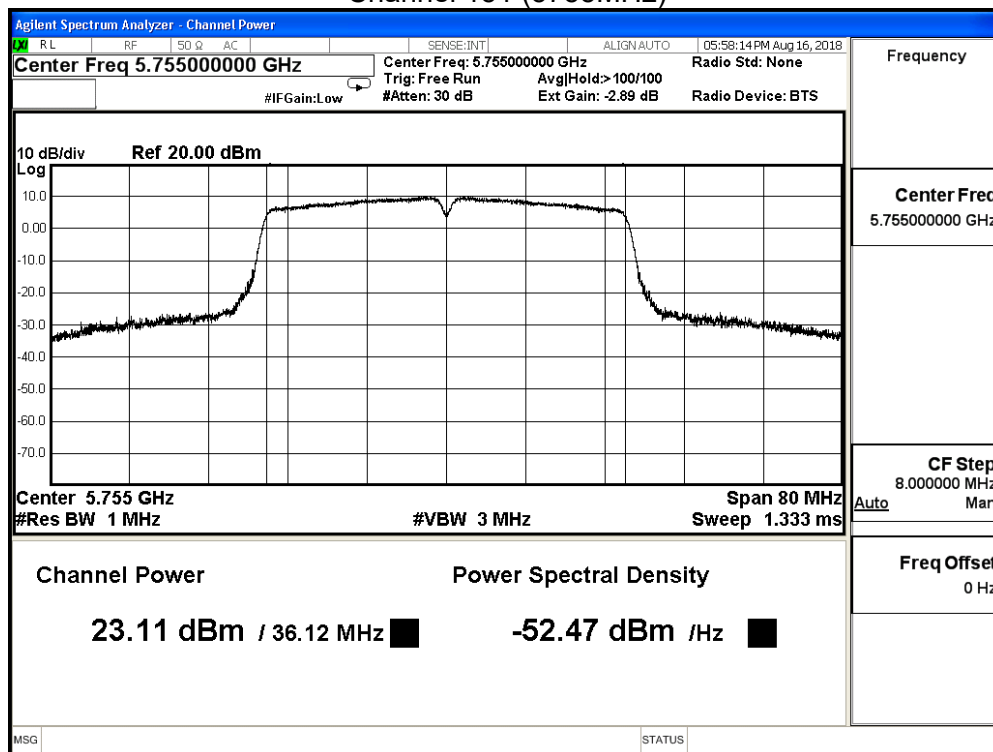

Channel 159 (5795MHz)

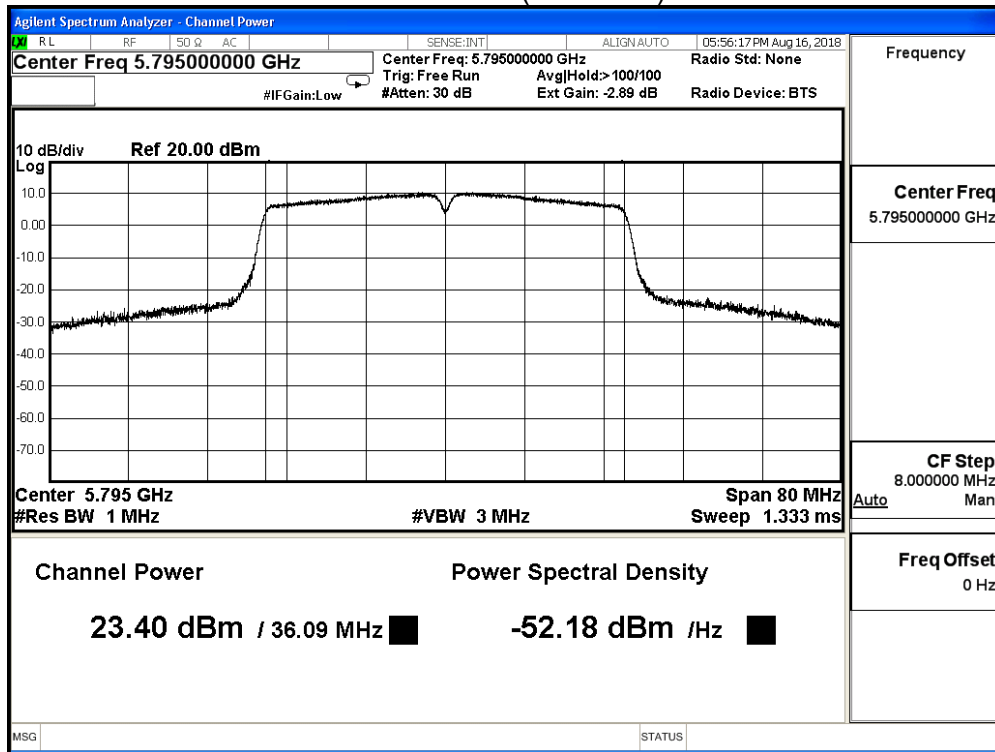

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE802.11n_40MHz(ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 151 | 5755 | 23.82 | ≤ 30 |
| 159 | 5795 | 23.62 | ≤ 30 |


The worst emission of data rate is MCS 0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 151 | 5755 | 23.820 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 159 | 5795 | 23.620 | 23.480 | 23.350 | 23.200 | 23.060 | 22.920 | 22.780 | 22.640 | |

Channel 151 (5755MHz)

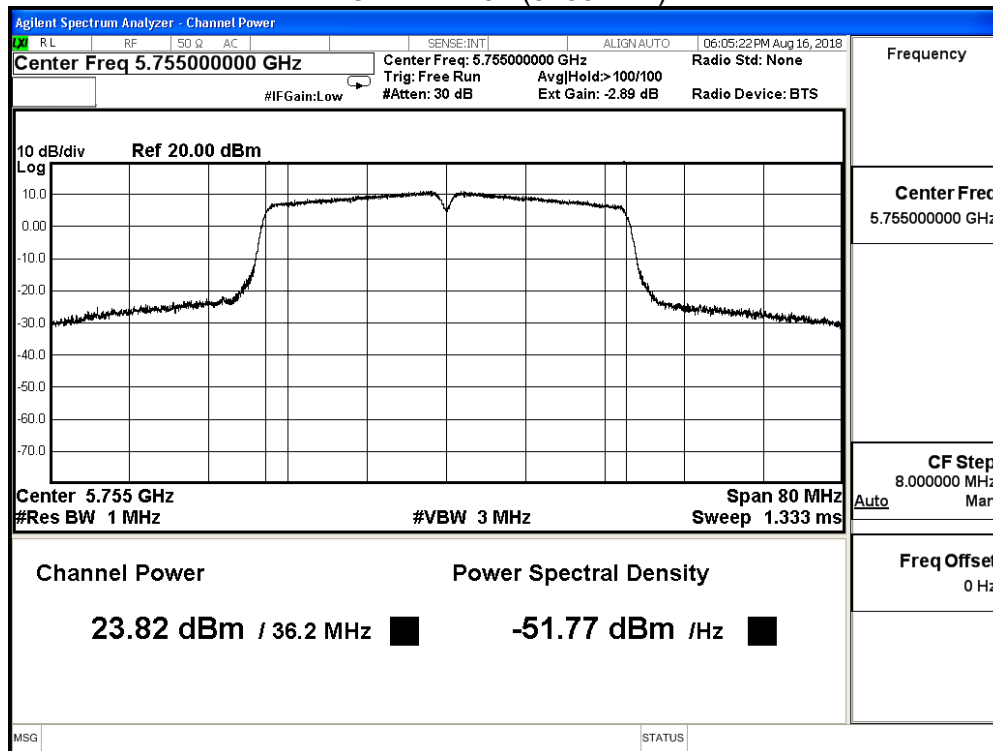

Channel 159 (5795MHz)

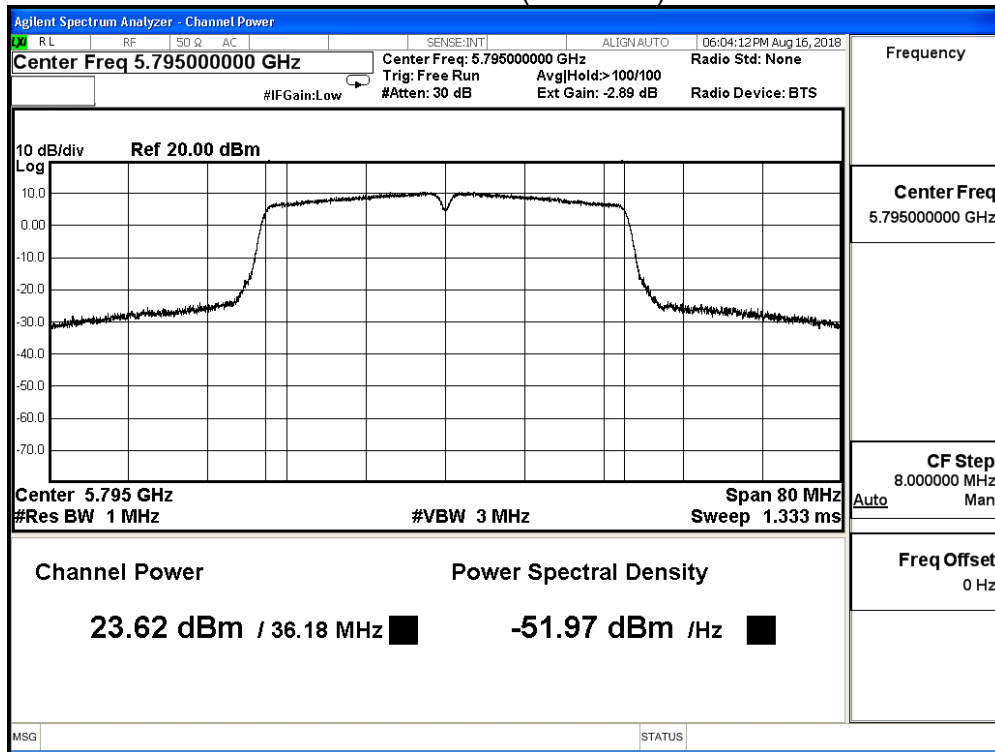

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode CDD WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

IEEE802.11n_40MHz(ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 151 | 5755 | 29.583 | ≤ 30 |
| 159 | 5795 | 29.482 | ≤ 30 |

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE802.11ac_80MHz (ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 155 | 5775 | 20.69 | ≤ 30 |

The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
| 155 | 5775 | 20.690 | 20.540 | 20.390 | 20.240 | 20.100 | 19.960 | 19.830 | 19.690 | 19.550 | 19.420 | ≤ 30 |

Channel 155 (5775MHz)

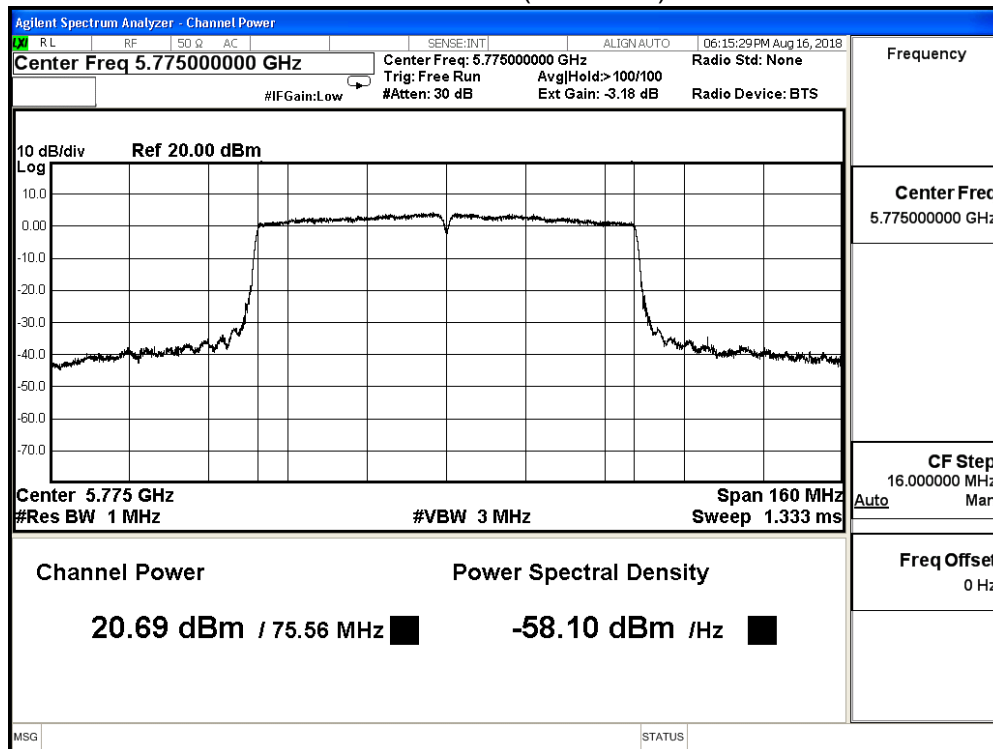

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE802.11ac_80MHz (ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 155 | 5775 | 20.48 | ≤ 30 |

The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
| 155 | 5775 | 20.480 | 20.350 | 20.210 | 20.060 | 19.920 | 19.790 | 19.660 | 19.520 | 19.370 | 19.230 | ≤ 30 |

Channel 155 (5775MHz)

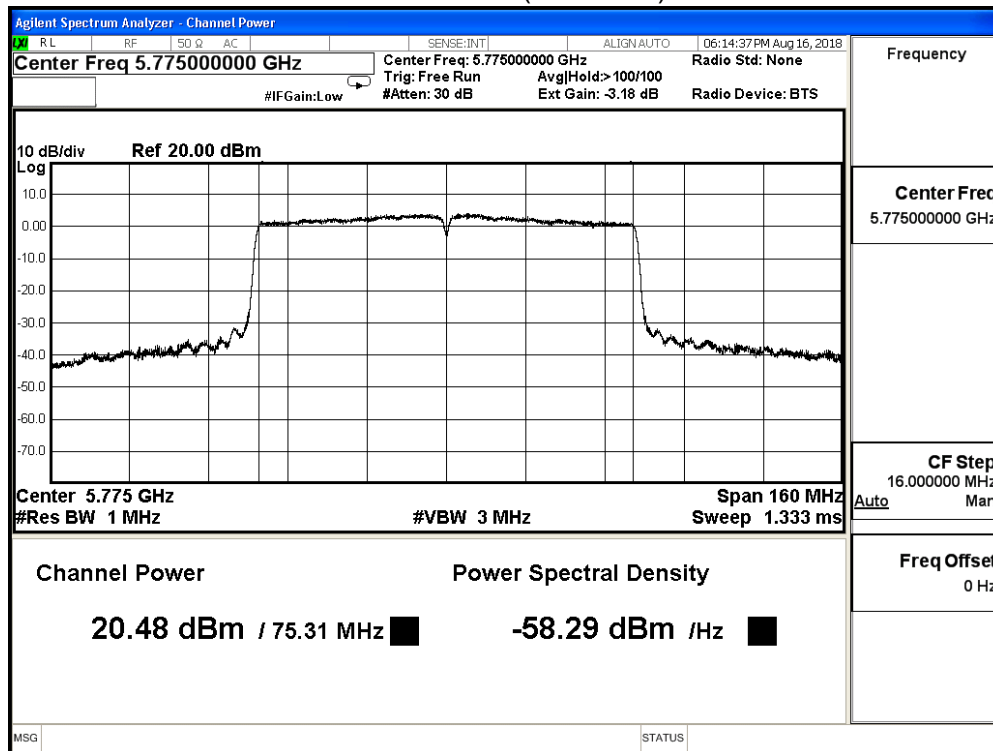

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE802.11ac_80MHz (ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 155 | 5775 | 20.38 | ≤ 30 |

The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
| 155 | 5775 | 20.380 | 20.230 | 20.080 | 19.940 | 19.800 | 19.660 | 19.510 | 19.370 | 19.230 | 19.080 | ≤ 30 |

Channel 155 (5775MHz)

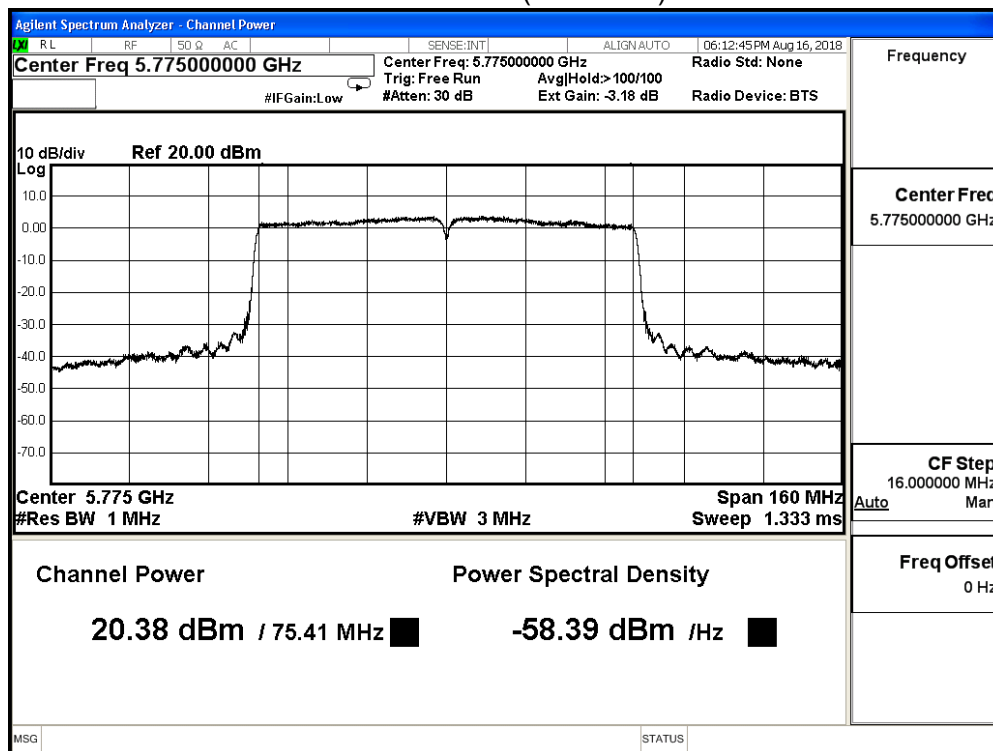

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |


IEEE802.11ac_80MHz (ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 155 | 5775 | 20.97 | ≤ 30 |

The worst emission of data rate is MCS0

| Channel No | Frequency (MHz) | MCS Index | | | | | | | | | | Required Limit |
|------------|-----------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
| 155 | 5775 | 20.970 | 20.840 | 20.710 | 20.570 | 20.430 | 20.280 | 20.140 | 20.000 | 19.860 | 19.730 | ≤ 30 |

Channel 155 (5775MHz)

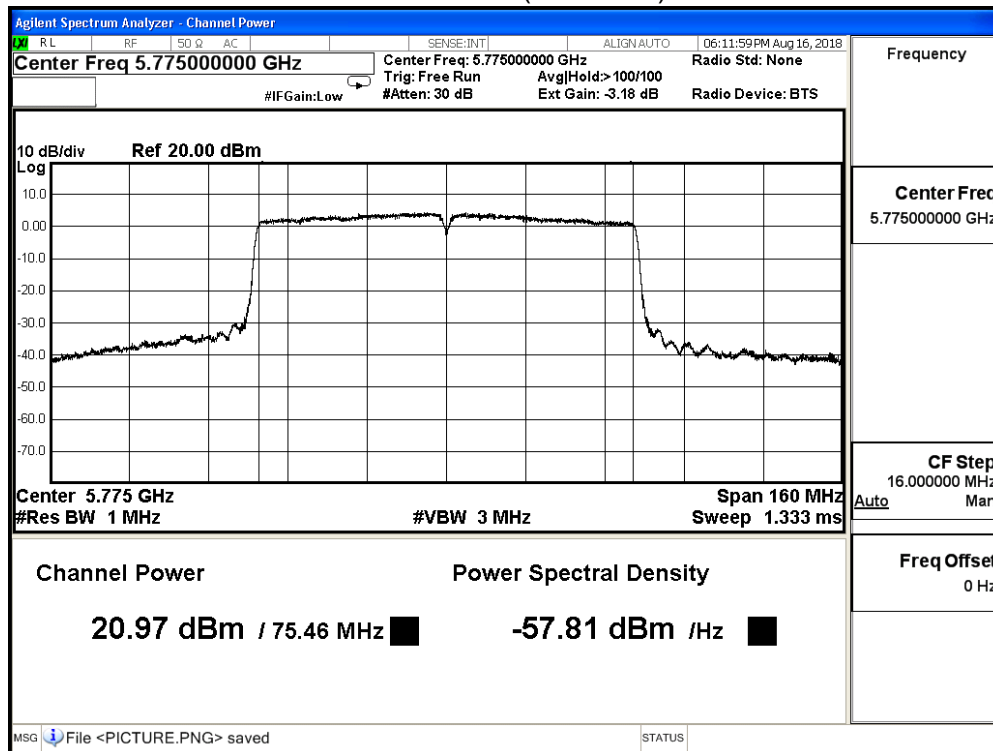

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

IEEE802.11ac_80MHz (ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 155 | 5775 | 26.657 | ≤ 30 |

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11n(20MHz)(ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 18.33 | ≤ 27.749 |
| 44 | 5220 | 18.54 | ≤ 27.749 |
| 48 | 5240 | 18.32 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm


Channel 36

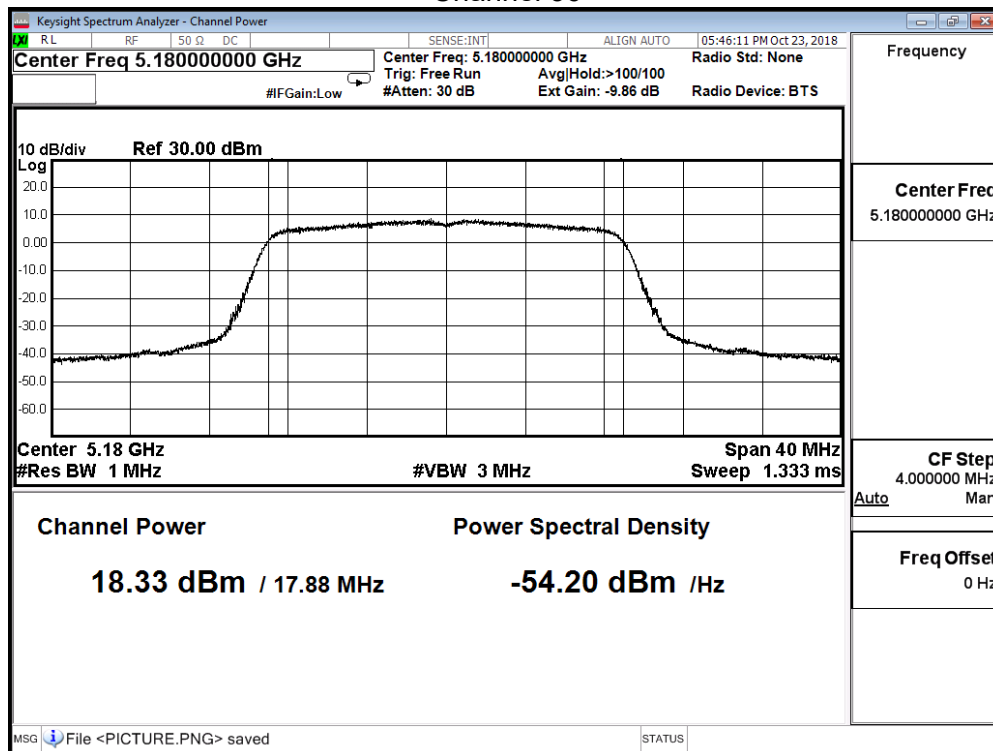

Channel 44

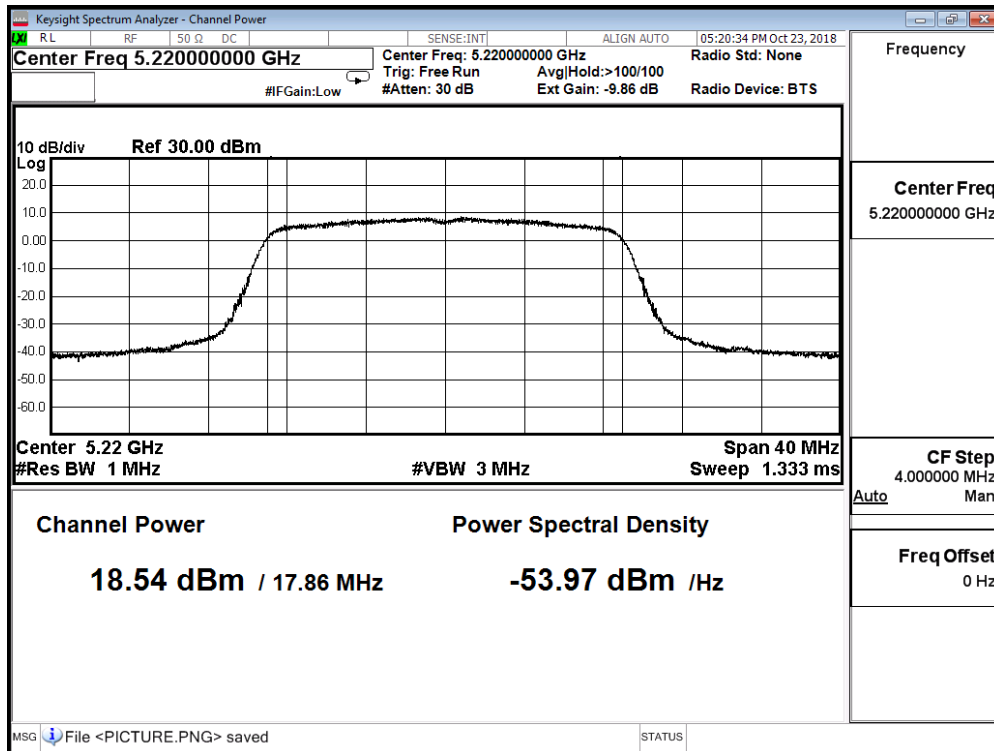

Channel 48

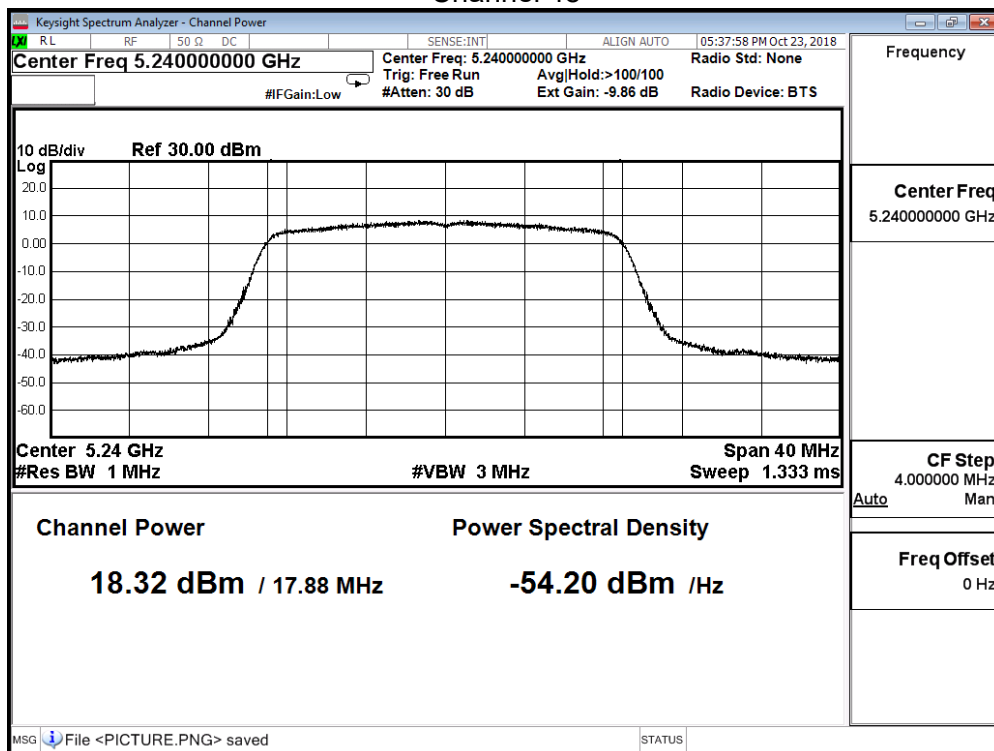

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11n(20MHz)(ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 18.57 | ≤ 27.749 |
| 44 | 5220 | 18.89 | ≤ 27.749 |
| 48 | 5240 | 18.86 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm


Channel 36

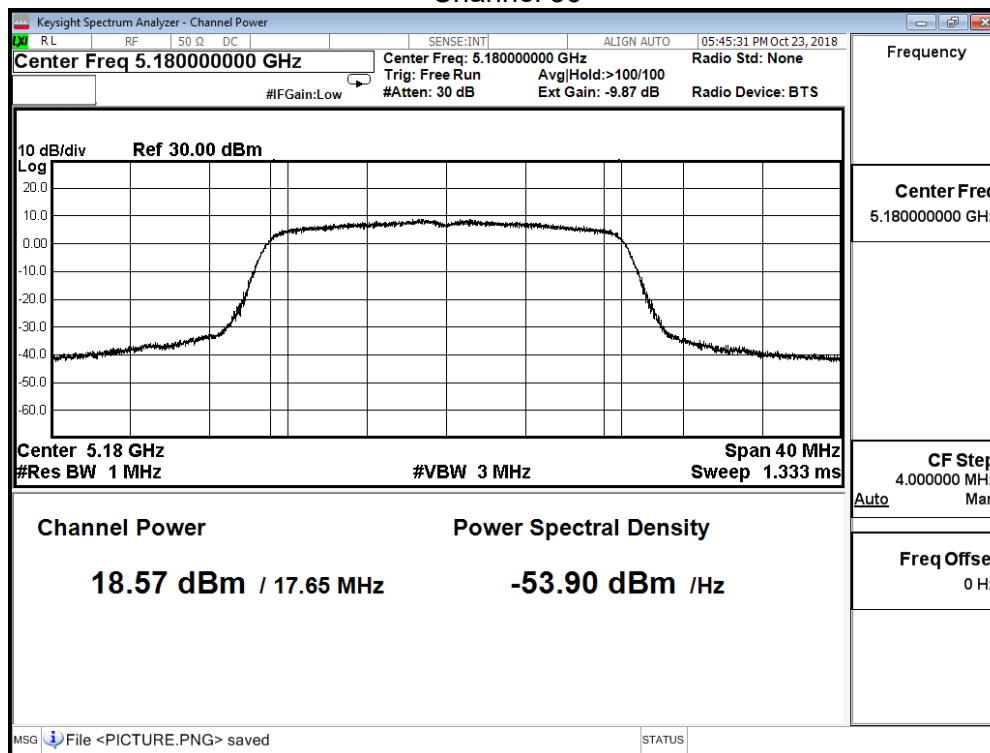

Channel 44

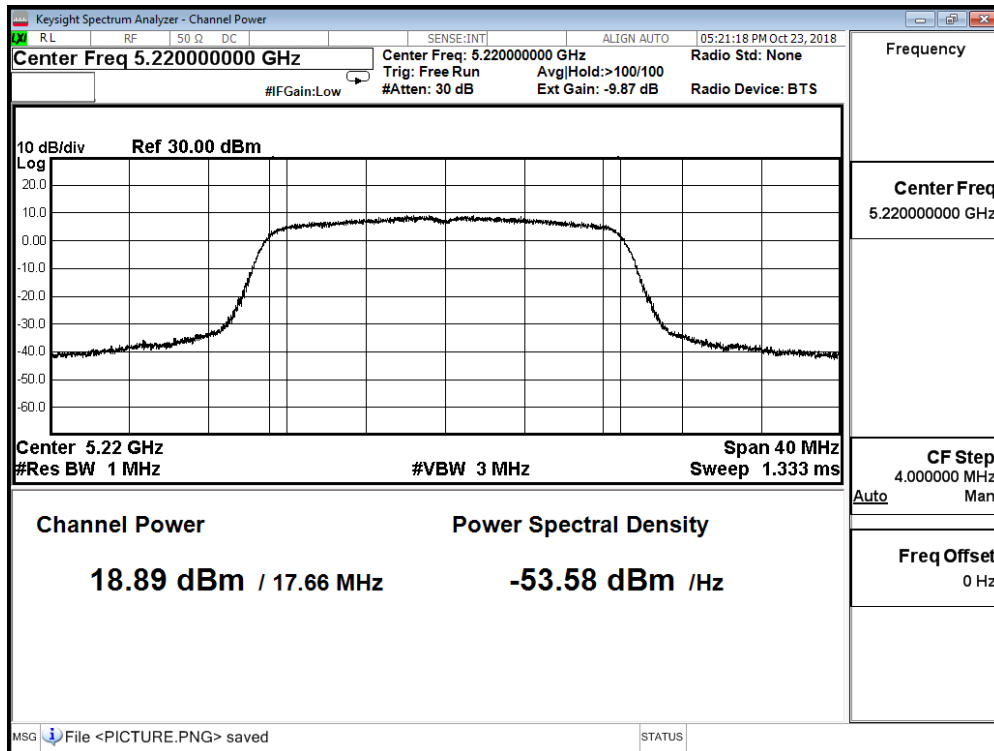

Channel 48

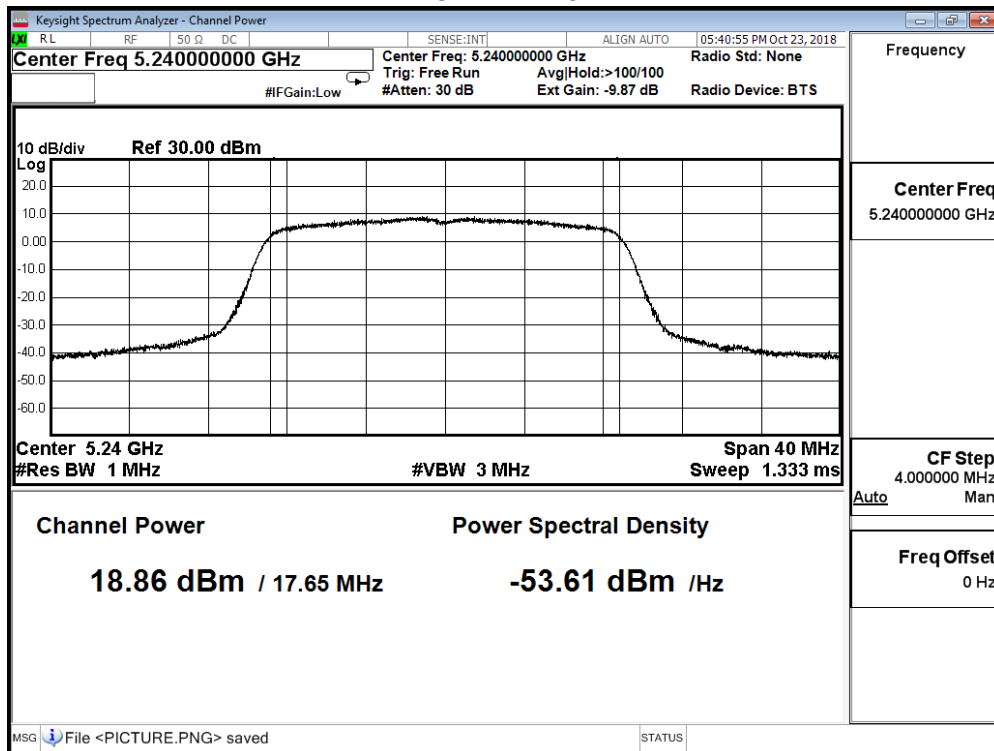

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11n(20MHz)(ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 20.23 | ≤ 27.749 |
| 44 | 5220 | 20.62 | ≤ 27.749 |
| 48 | 5240 | 20.65 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm


Channel 36

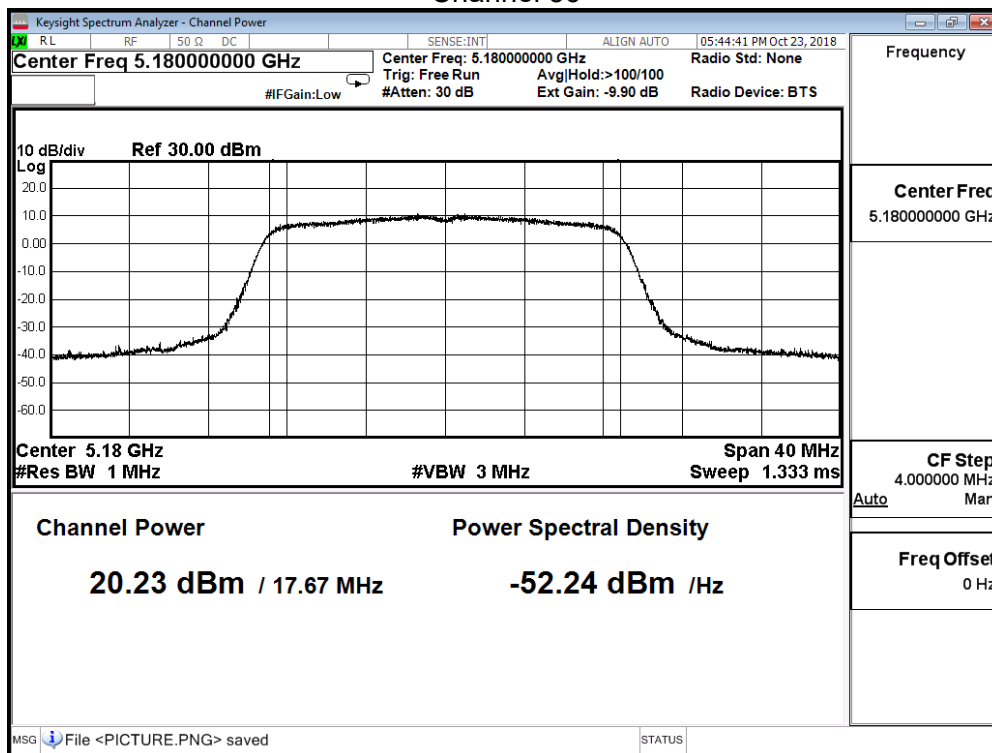

Channel 44

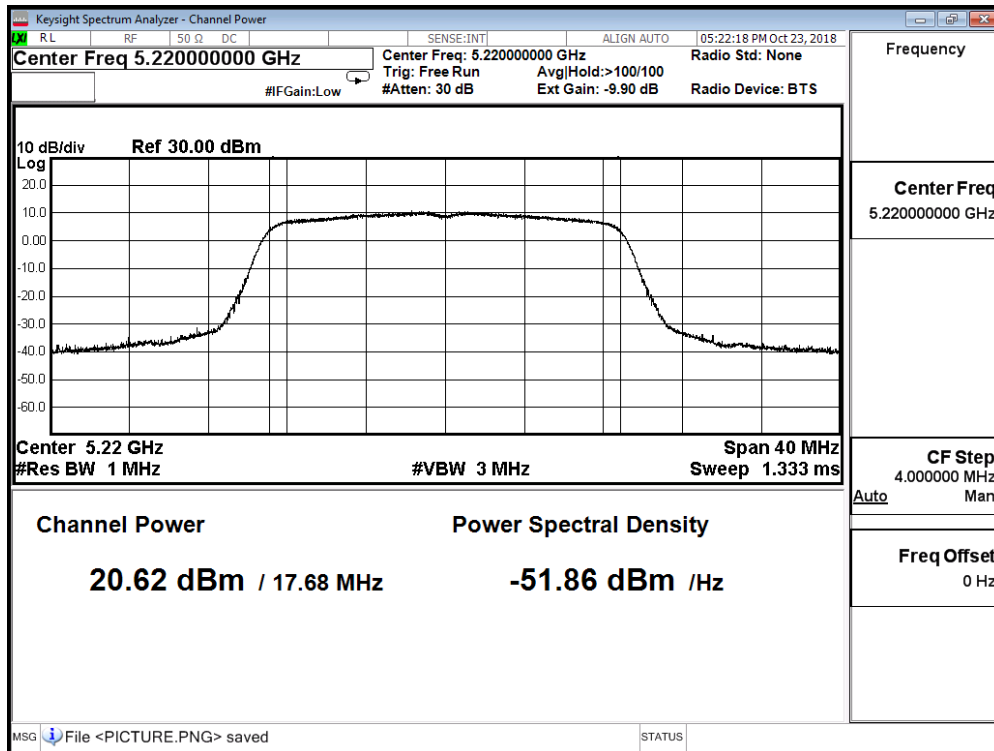

Channel 48

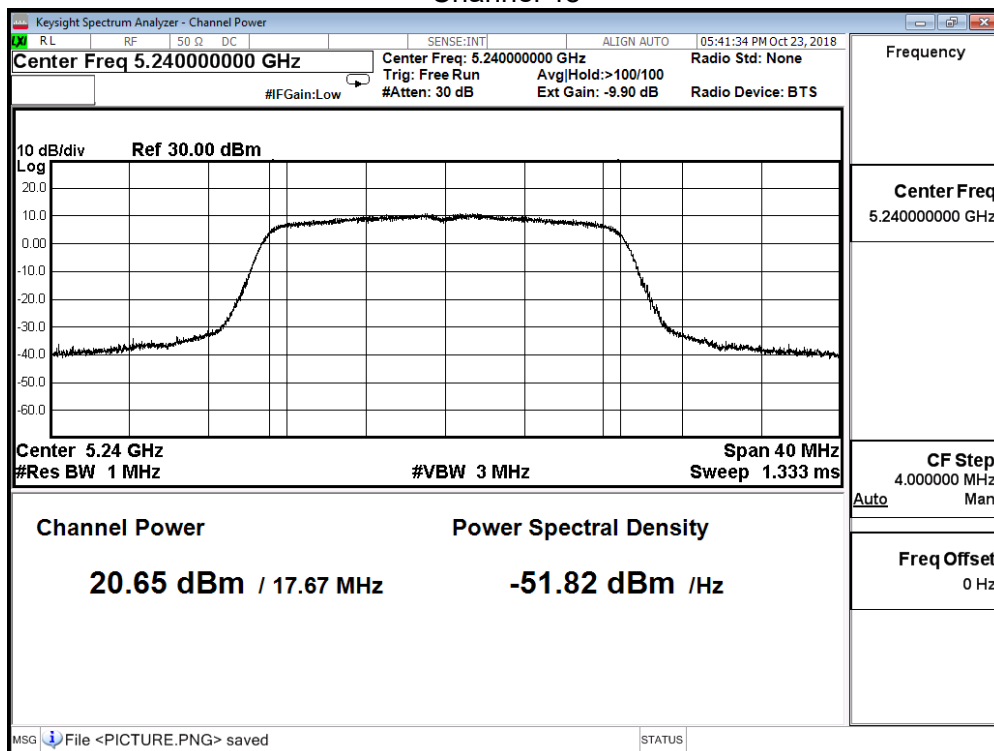

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11n(20MHz)(ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 19.67 | ≤ 27.749 |
| 44 | 5220 | 19.55 | ≤ 27.749 |
| 48 | 5240 | 19.64 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm


Channel 36

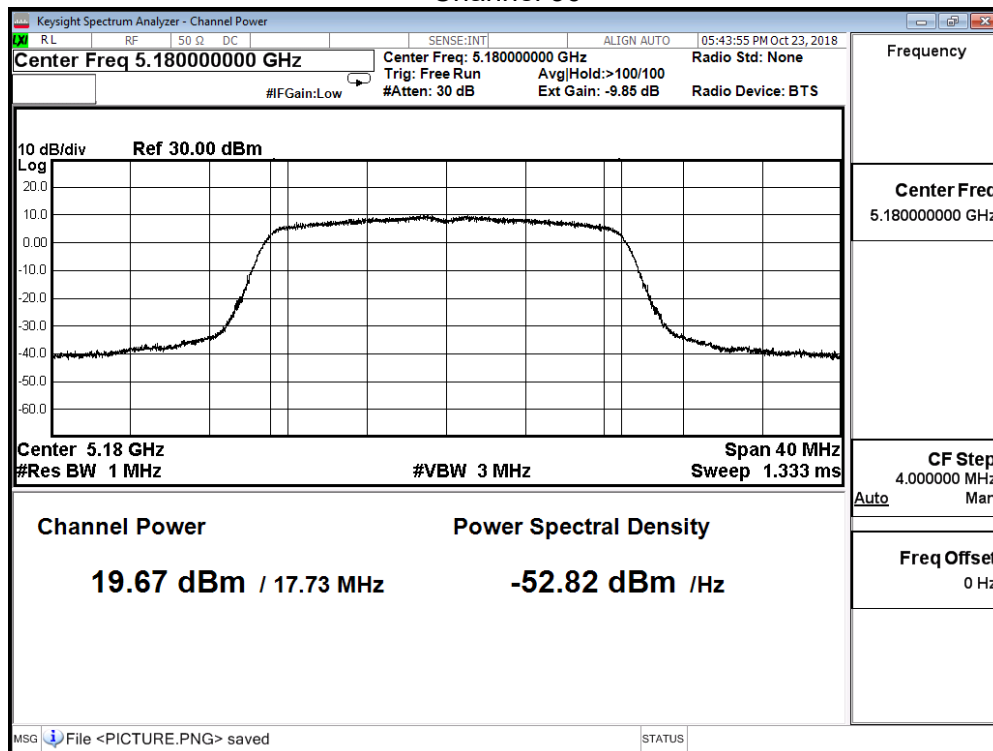

Channel 44

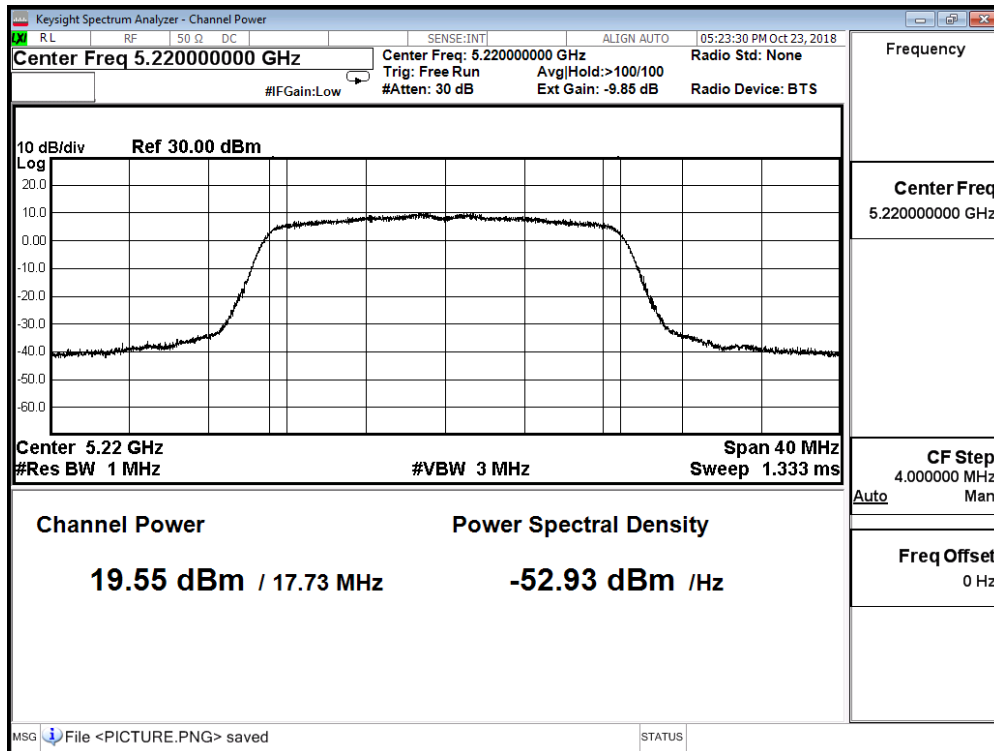

Channel 48

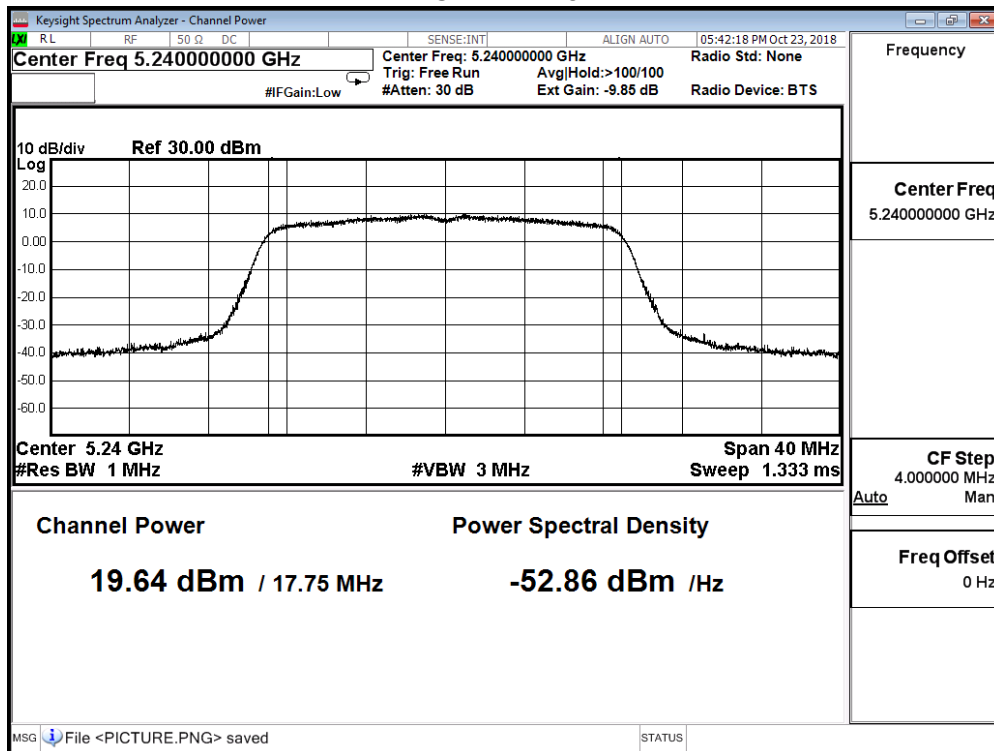

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |

IEEE 802.11n(20MHz)(ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 36 | 5180 | 25.291 | ≤ 27.749 |
| 44 | 5220 | 25.495 | ≤ 27.749 |
| 48 | 5240 | 25.478 | ≤ 27.749 |

Directional gain= $10\log(\text{ANT N})+\text{Gain}=4.77+3.481=8.251$

Limit = $30\text{dBm}-(8.251\text{dBi}-6\text{dBi})=27.749\text{dBm}$

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11n(40MHz)(ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38 | 5190 | 18.02 | ≤ 27.749 |
| 46 | 5230 | 20.13 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 38

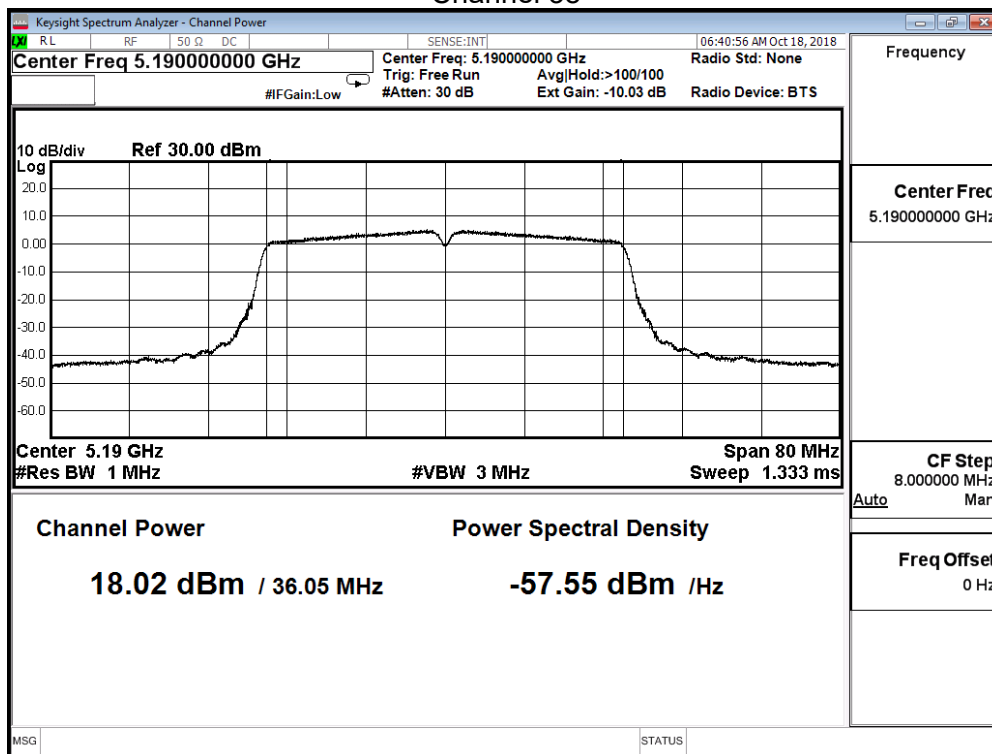

Channel 46

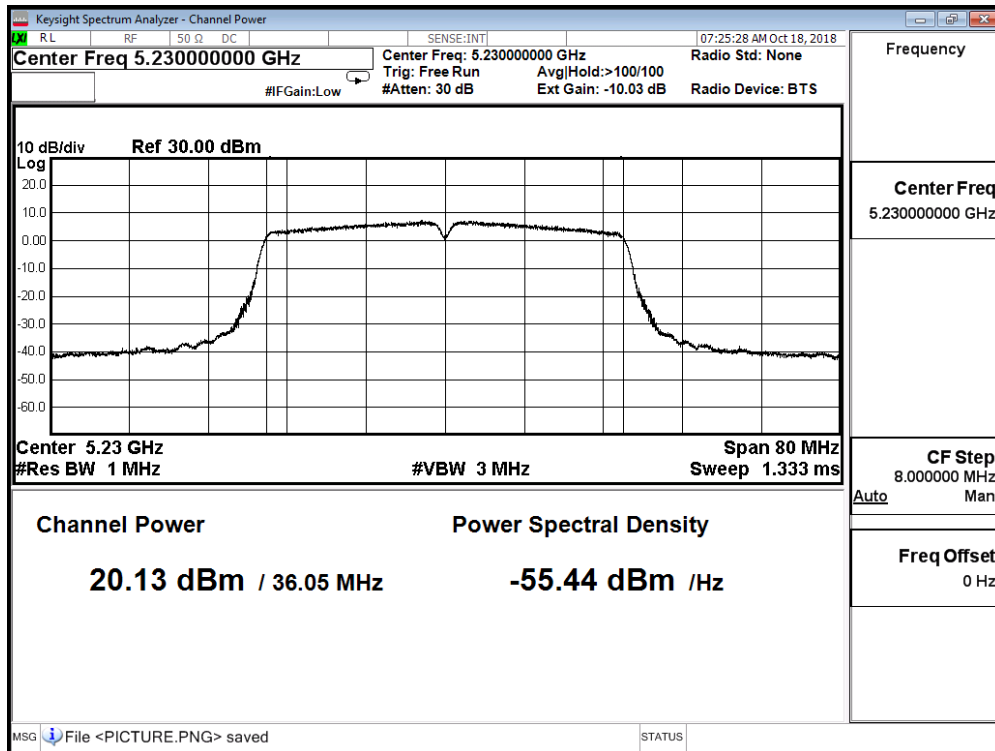

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11n(40MHz)(ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38 | 5190 | 17.77 | ≤ 27.749 |
| 46 | 5230 | 19.52 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 38

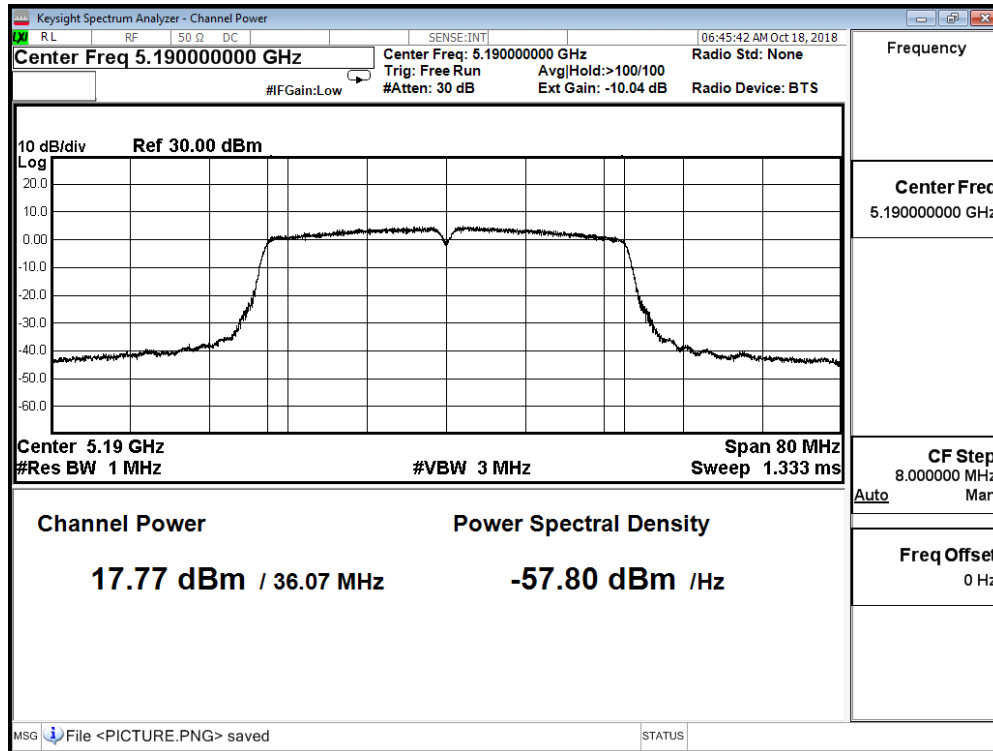

Channel 46

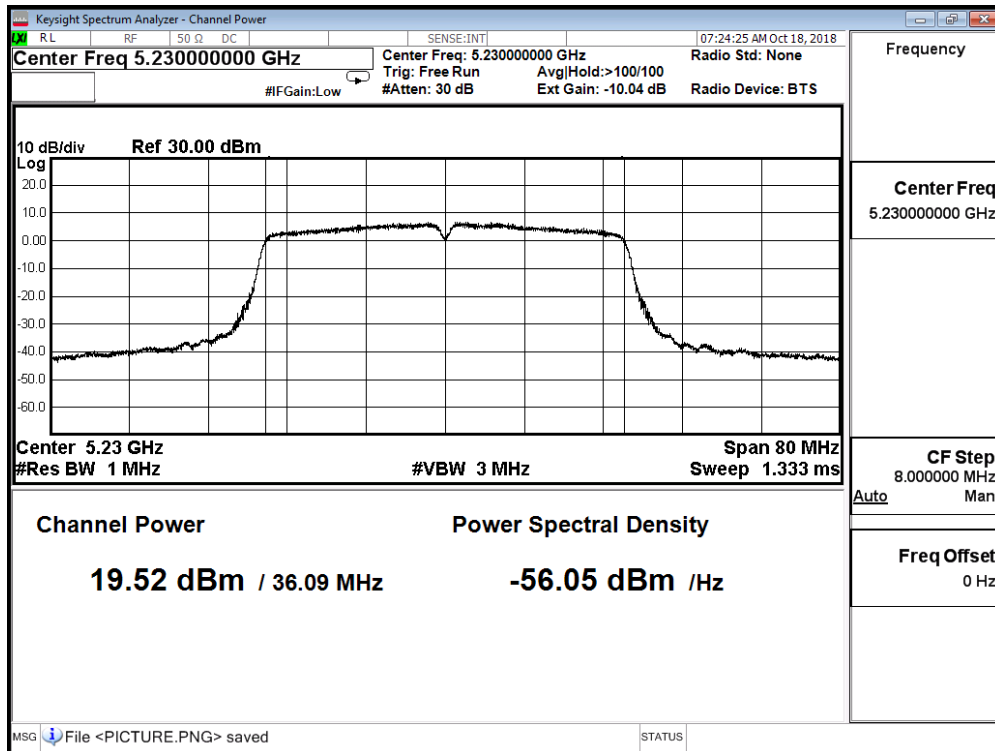

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11n(40MHz)(ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38 | 5190 | 19.42 | ≤ 27.749 |
| 46 | 5230 | 21.50 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 38

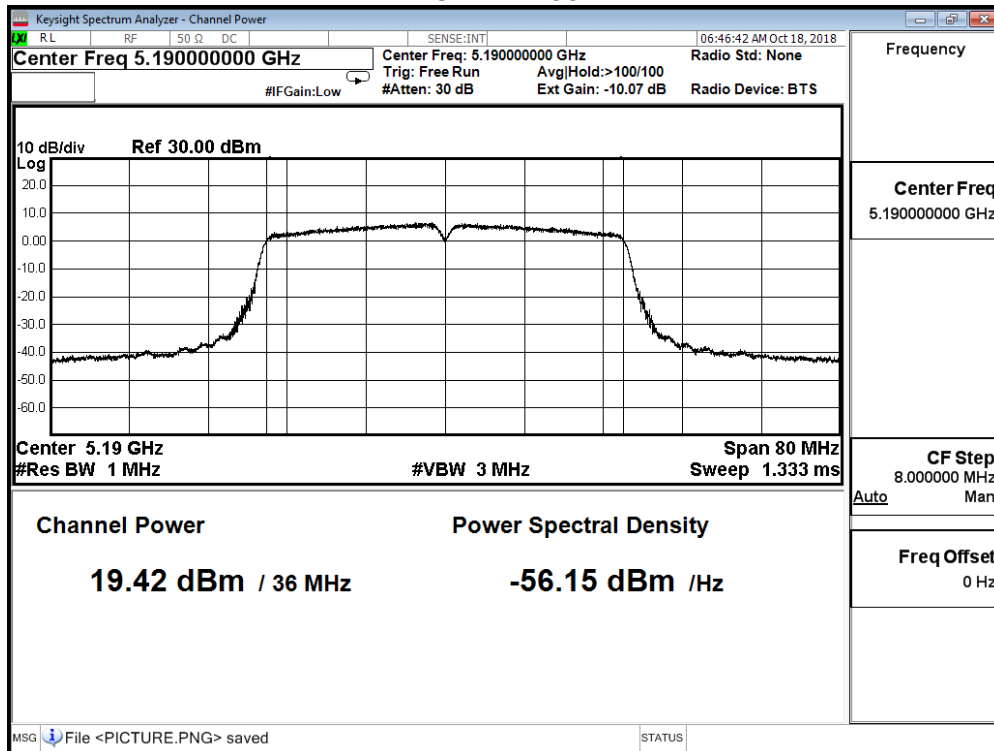

Channel 46

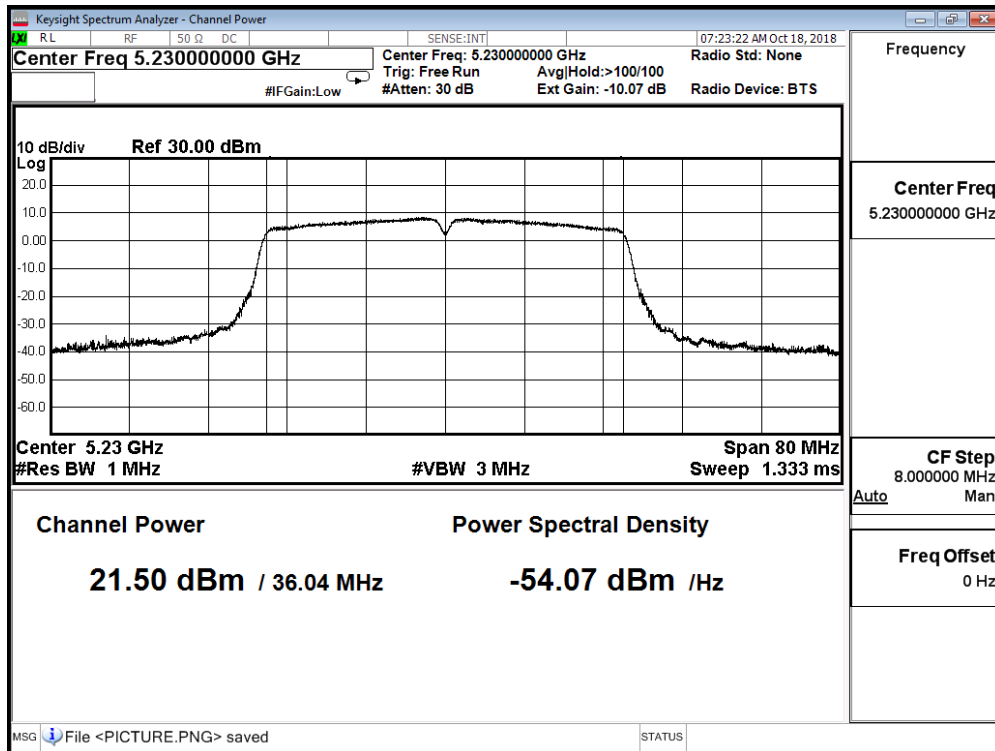

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11n(40MHz)(ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38 | 5190 | 18.83 | ≤ 27.749 |
| 46 | 5230 | 20.57 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 38

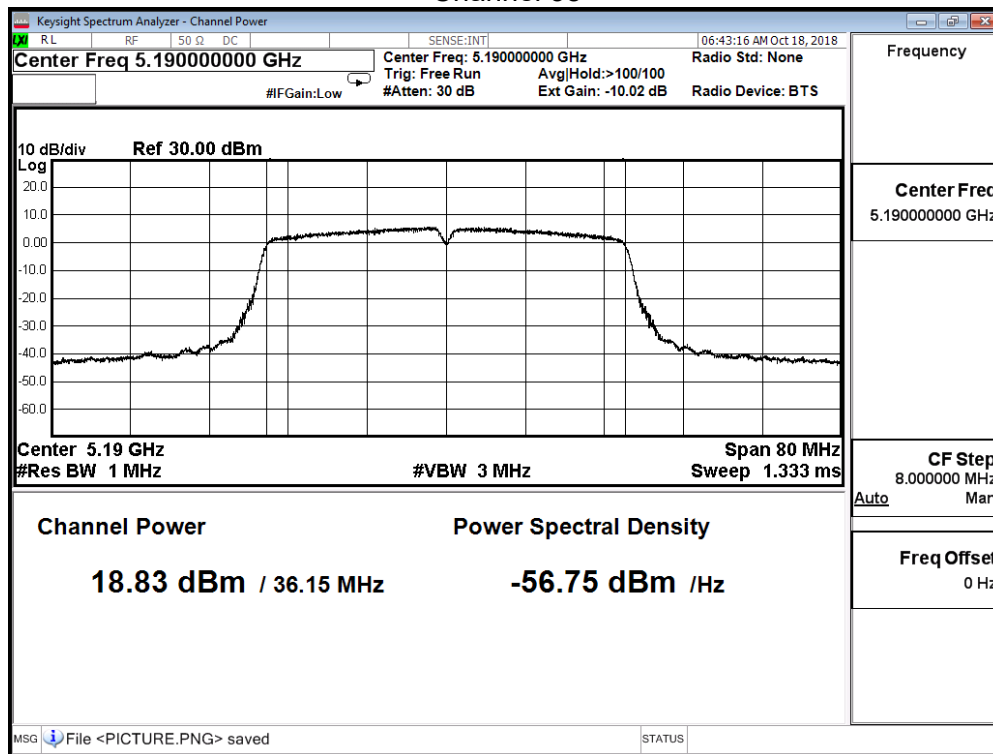

Channel 46

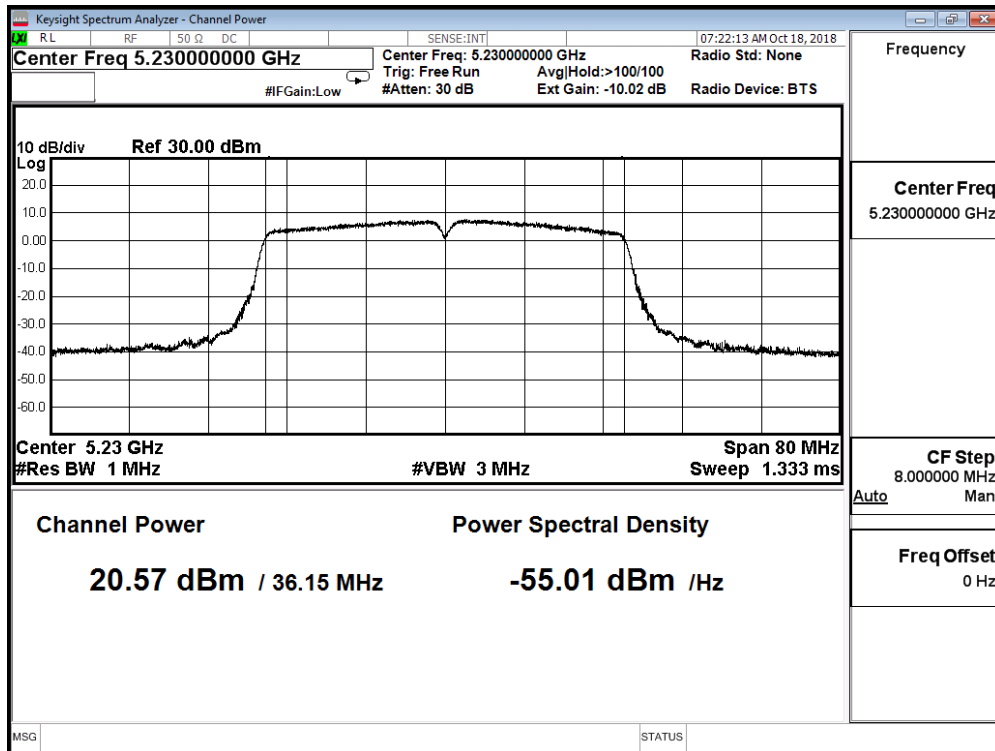

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |

IEEE 802.11n(40MHz)(ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 38 | 5190 | 24.580 | ≤ 27.749 |
| 46 | 5230 | 26.511 | ≤ 27.749 |

Directional gain= $10\log(\text{ANT N})+\text{Gain}=4.77+3.481=8.251$

Limit = $30\text{dBm}-(8.251\text{dBi}-6\text{dBi})=27.749\text{dBm}$

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11ac(80MHz) (ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42 | 5210 | 15.56 | ≤ 27.749 |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 42

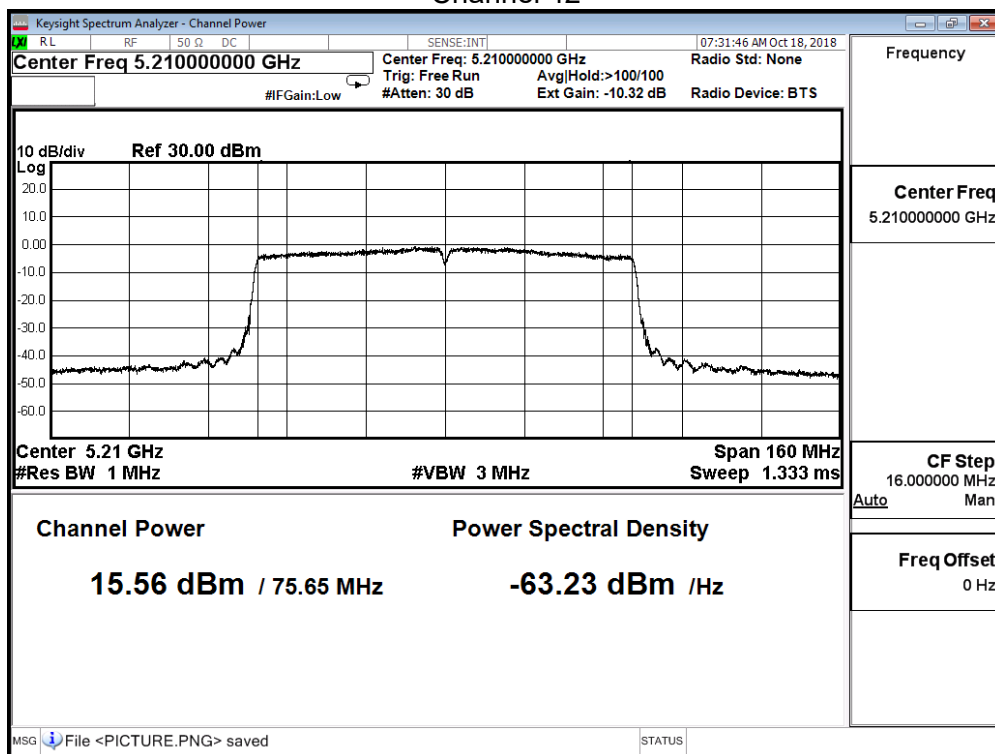

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11ac(80MHz) (ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42 | 5210 | 14.98 | ≤ 27.749 |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 42

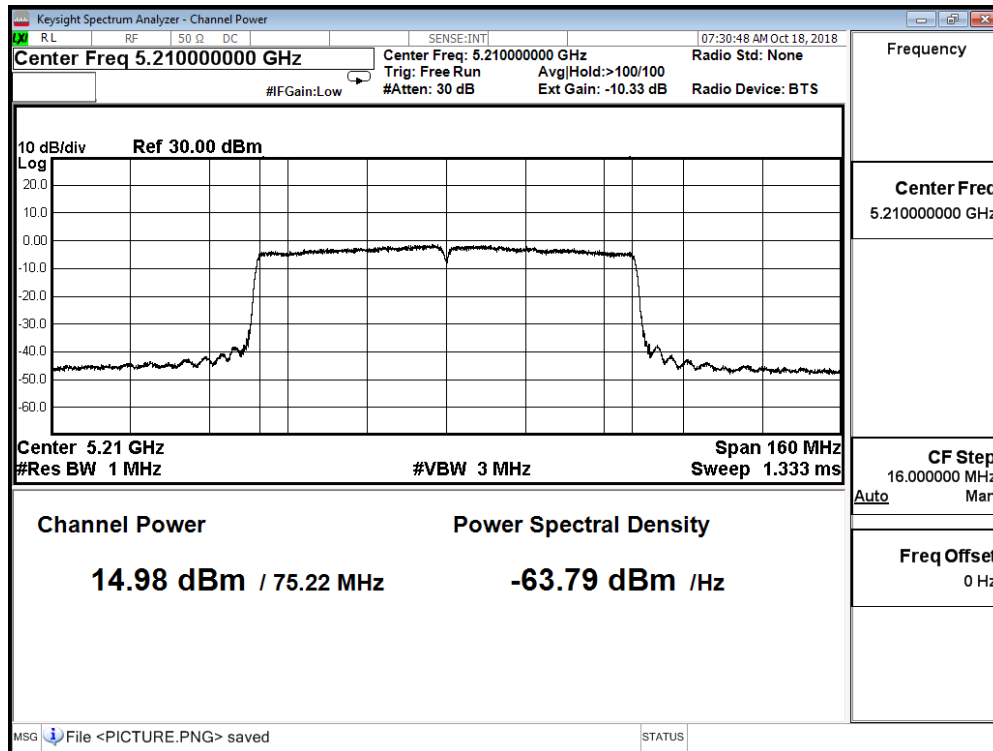

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11ac(80MHz) (ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42 | 5210 | 17.02 | ≤ 27.749 |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 42

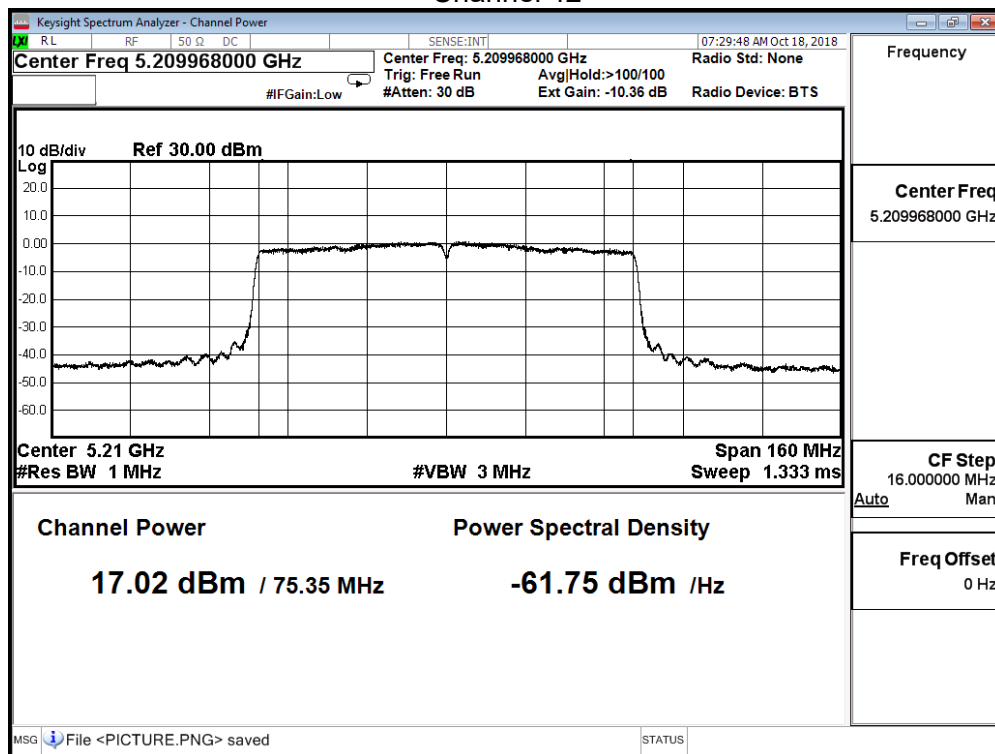

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11ac(80MHz) (ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42 | 5210 | 16.07 | ≤ 27.749 |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 42

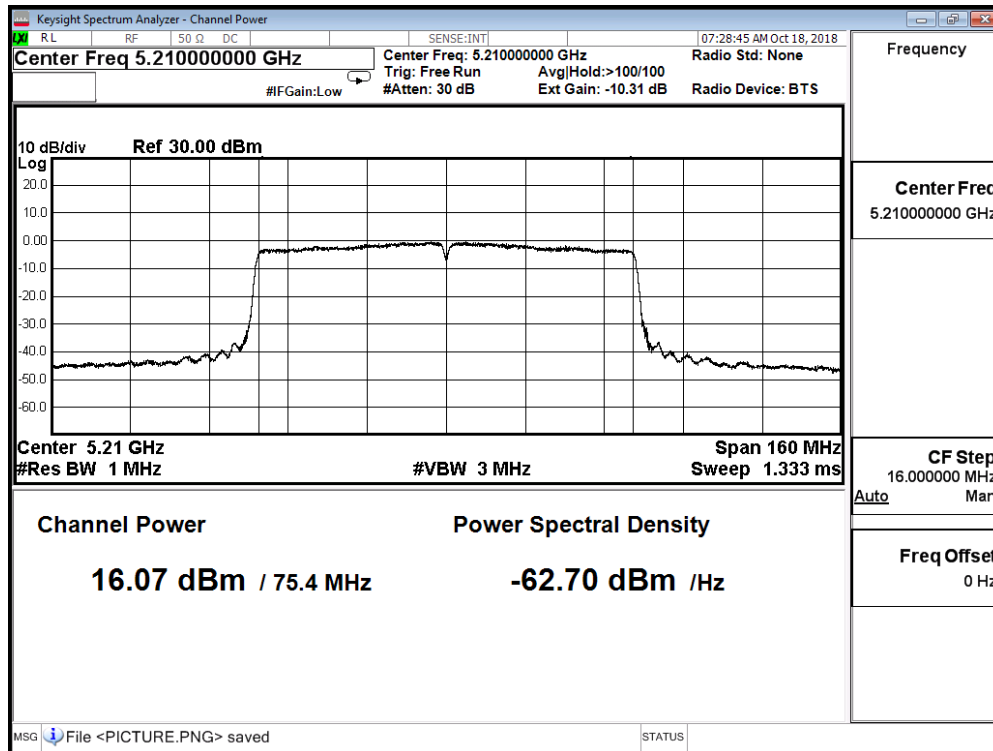

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |

IEEE 802.11ac(80MHz)(ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 42 | 5210 | 21.994 | ≤ 27.749 |

Directional gain= $10\log(\text{ANT N})+\text{Gain}=4.77+3.481=8.251$ Limit = $30\text{dBm}-(8.251\text{dBi}-6\text{dBi})=27.749\text{dBm}$

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11n_20MHz (ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 17.79 | ≤ 27.749 |
| 157 | 5785 | 20.26 | ≤ 27.749 |
| 165 | 5825 | 20.48 | ≤ 27.749 |


$T_{\text{Directional gain}} = 10 \log(\text{ANT N}) + \text{Gain} = 4.77 + 3.481 = 8.251$

$\text{Limit} = 30 \text{ dBm} - (8.251 \text{ dBi} - 6 \text{ dBi}) = 27.749 \text{ dBm}$


Channel 149 (5745MHz)

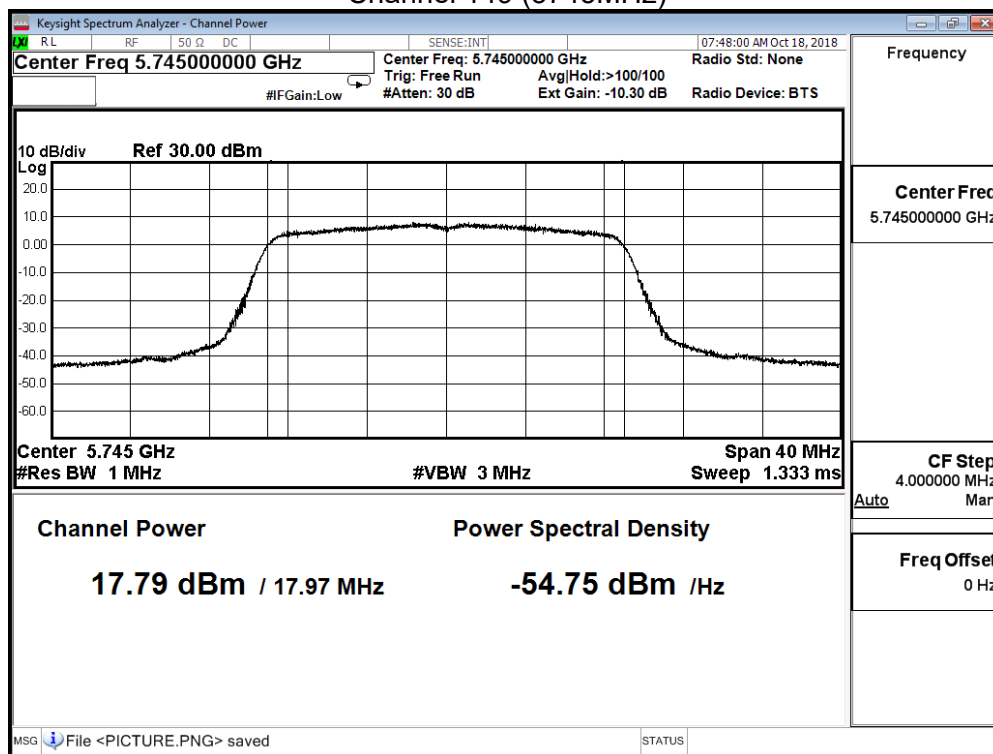

Channel 157 (5785MHz)

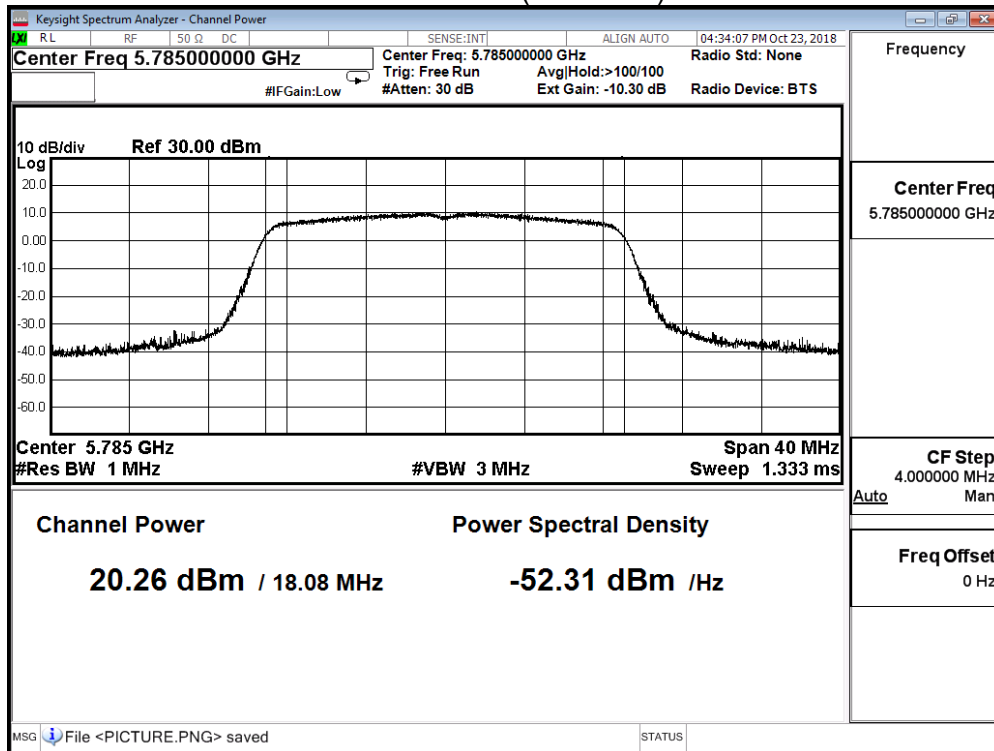

Channel 165 (5825MHz)

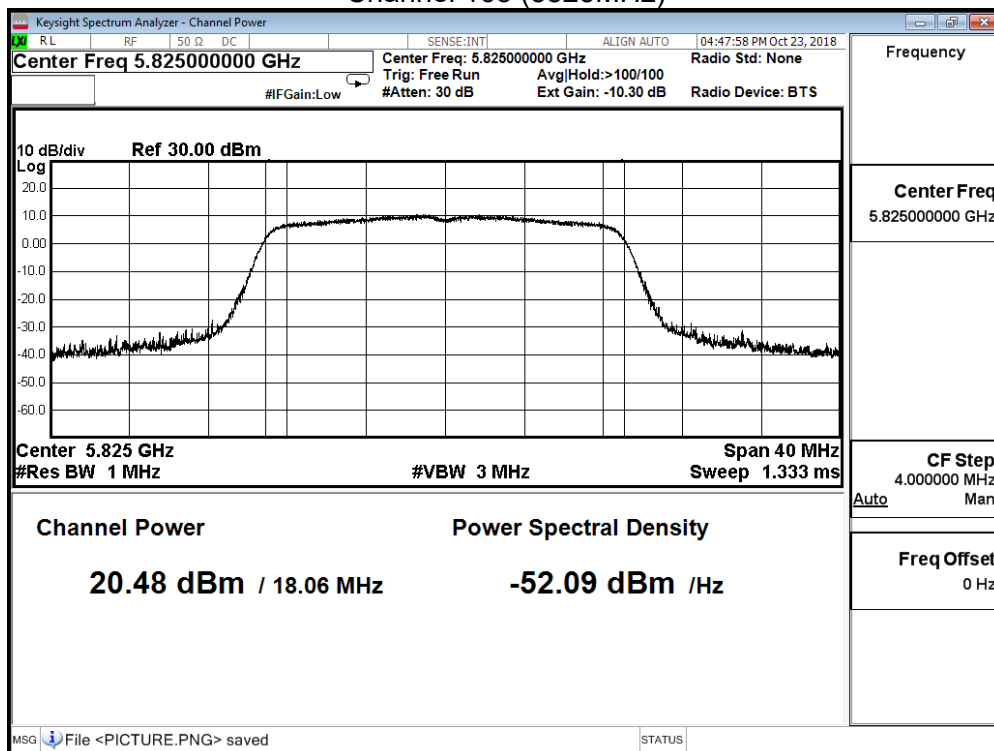

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11n_20MHz (ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 18.89 | ≤ 27.749 |
| 157 | 5785 | 21.53 | ≤ 27.749 |
| 165 | 5825 | 21.27 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm


Channel 149 (5745MHz)

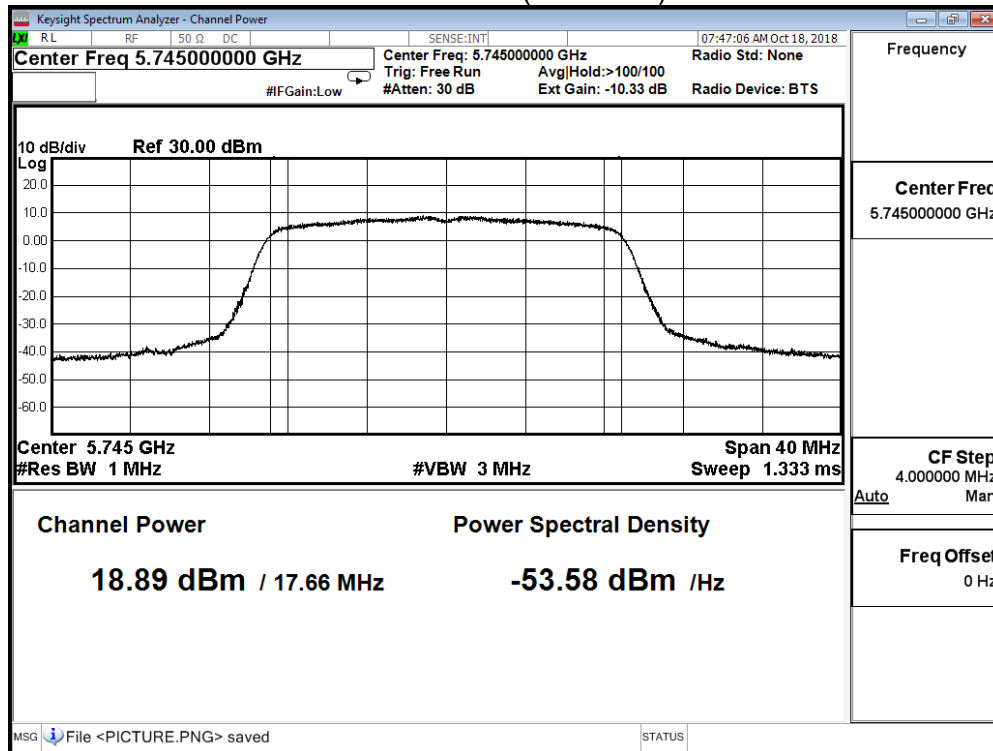

Channel 157 (5785MHz)

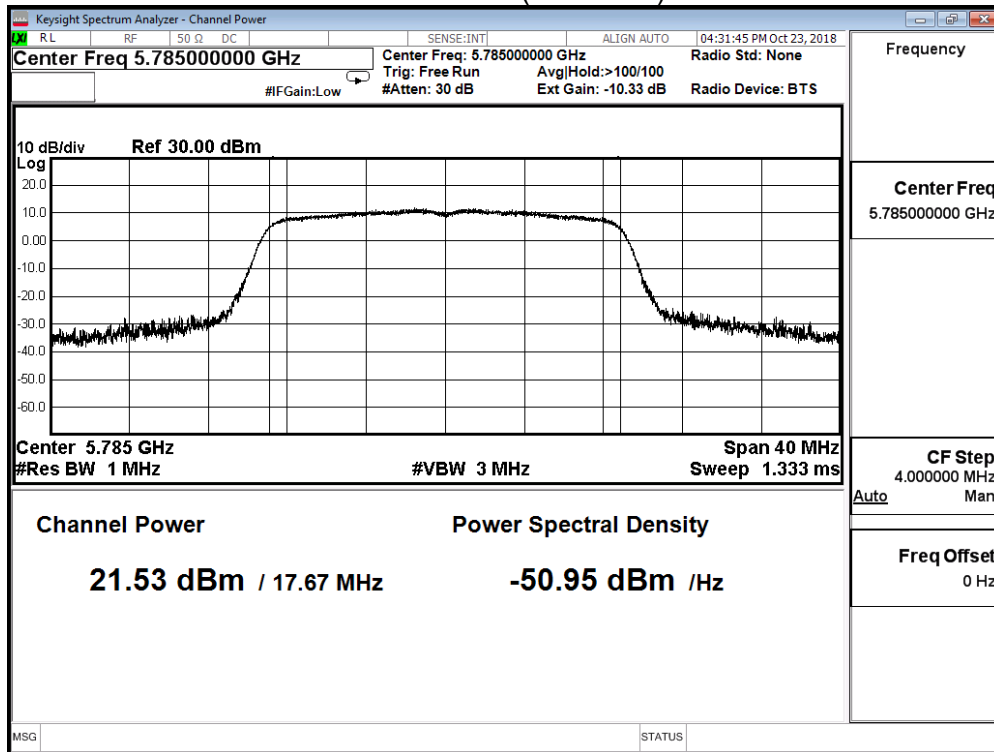

Channel 165 (5825MHz)

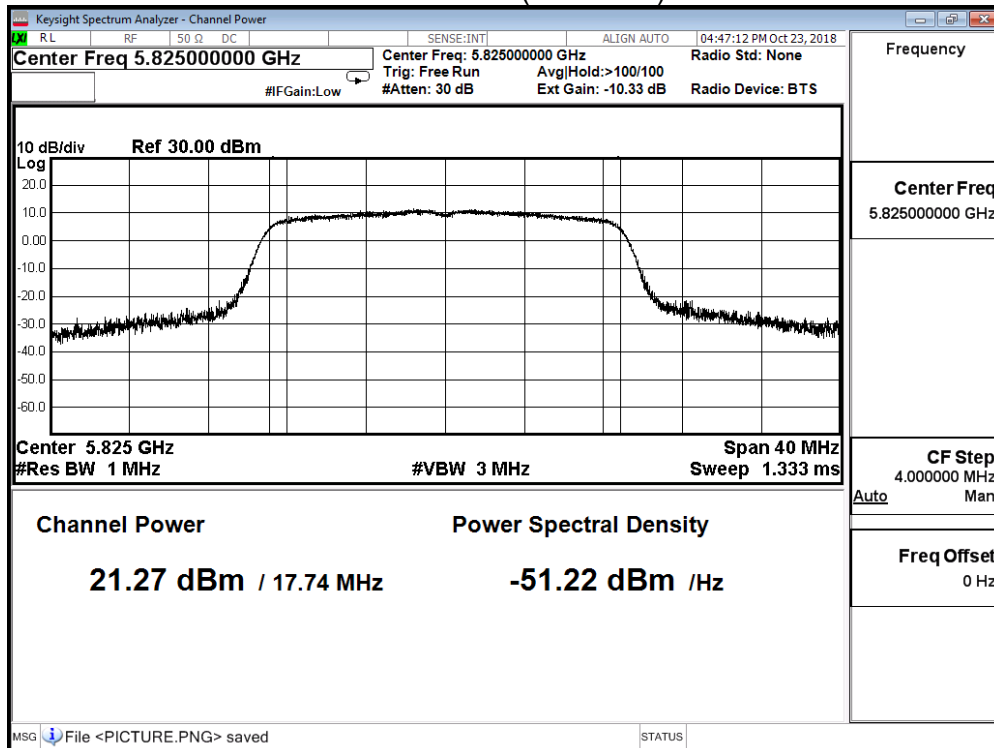

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11n_20MHz (ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 19.96 | ≤ 27.749 |
| 157 | 5785 | 22.28 | ≤ 27.749 |
| 165 | 5825 | 22.18 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm


Channel 149 (5745MHz)

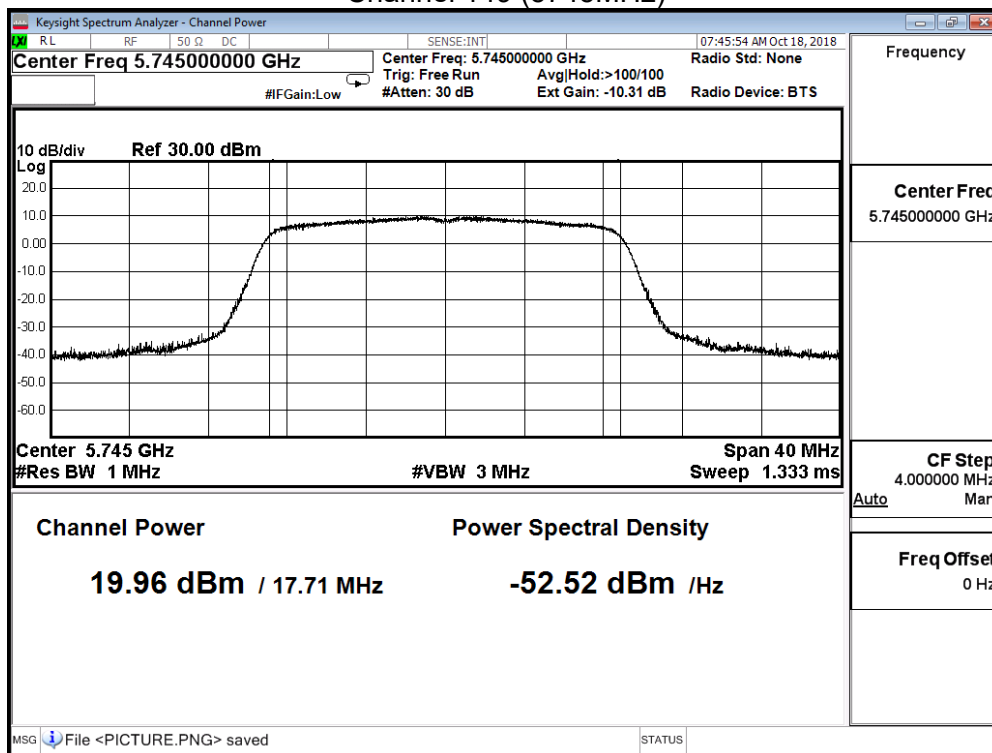

Channel 157 (5785MHz)

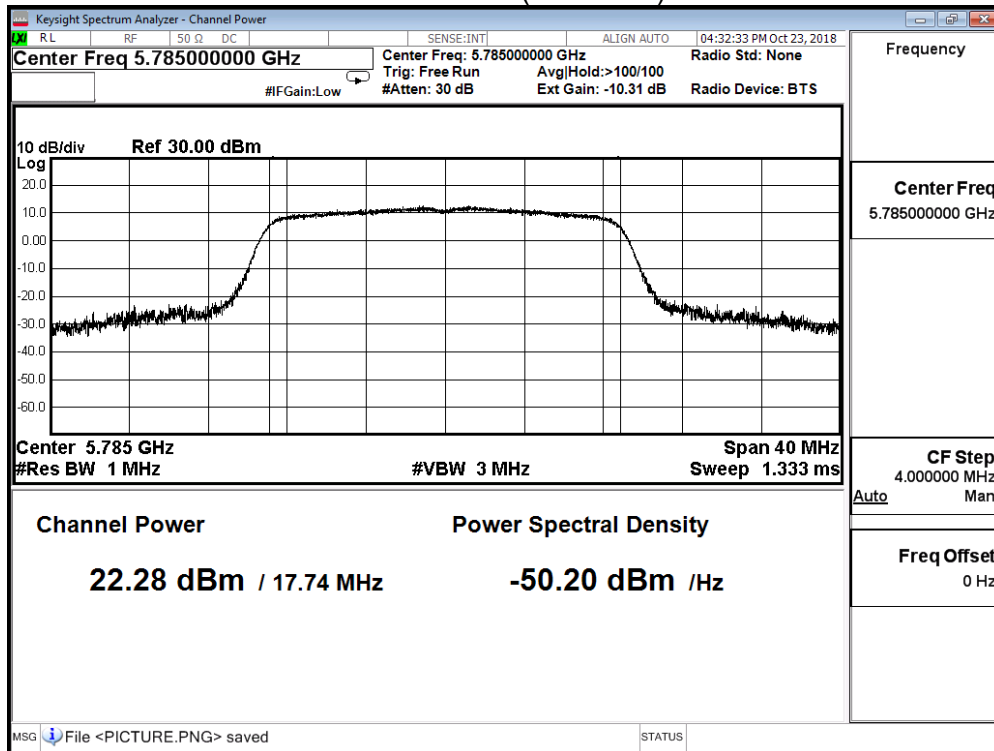

Channel 165 (5825MHz)

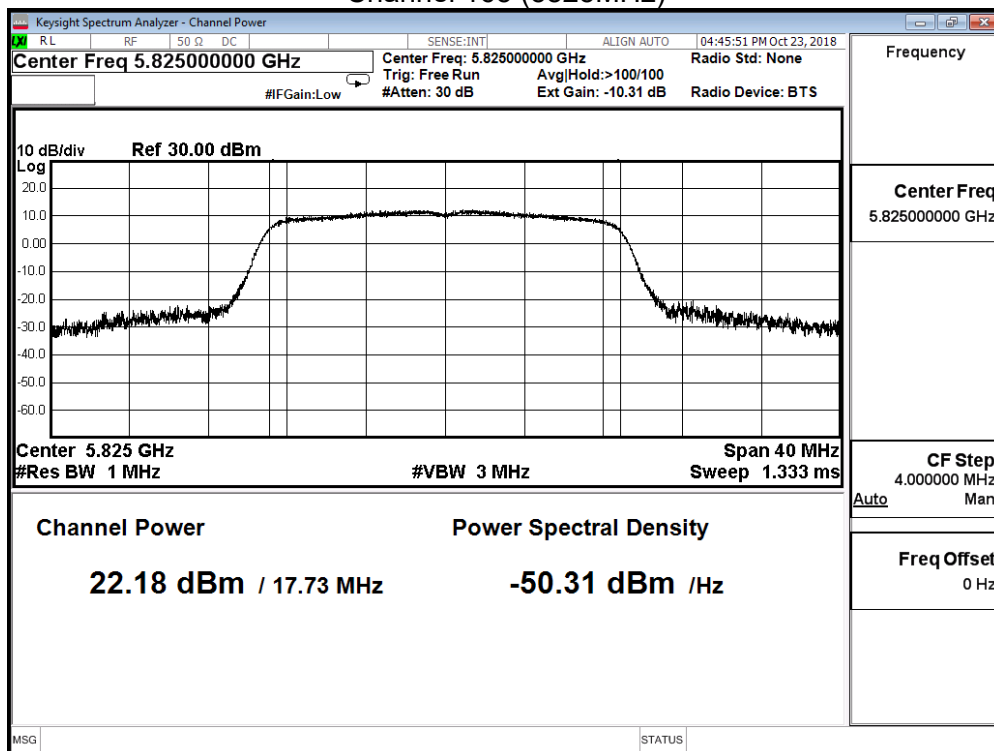

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE 802.11n_20MHz (ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 19.04 | ≤ 27.749 |
| 157 | 5785 | 20.83 | ≤ 27.749 |
| 165 | 5825 | 20.81 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm


Channel 149 (5745MHz)

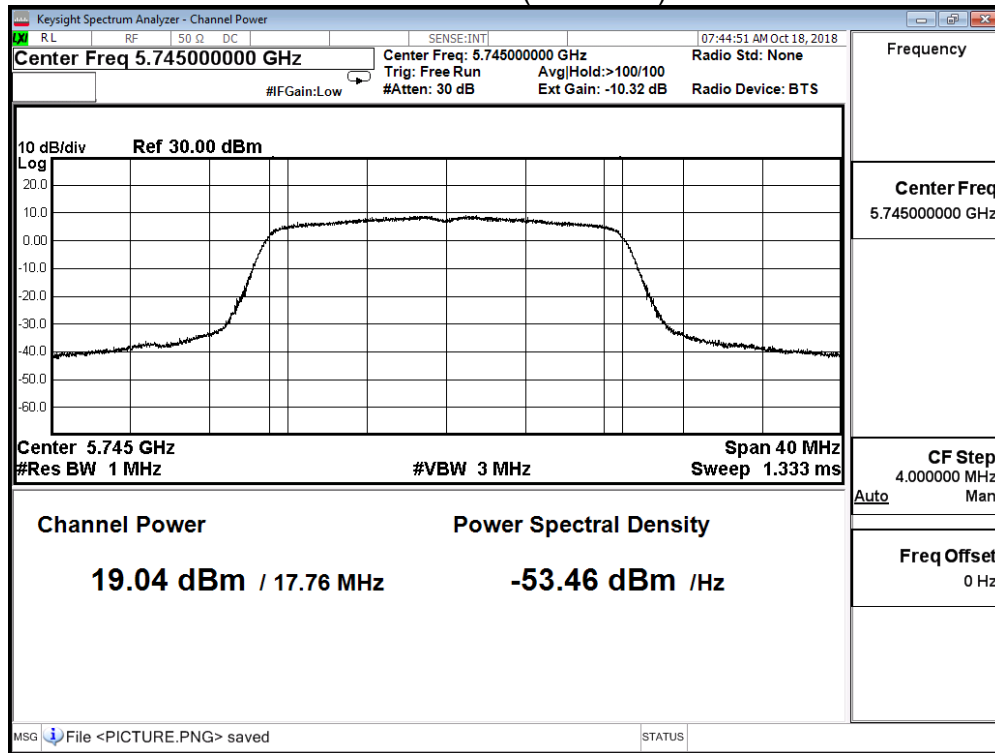

Channel 157 (5785MHz)

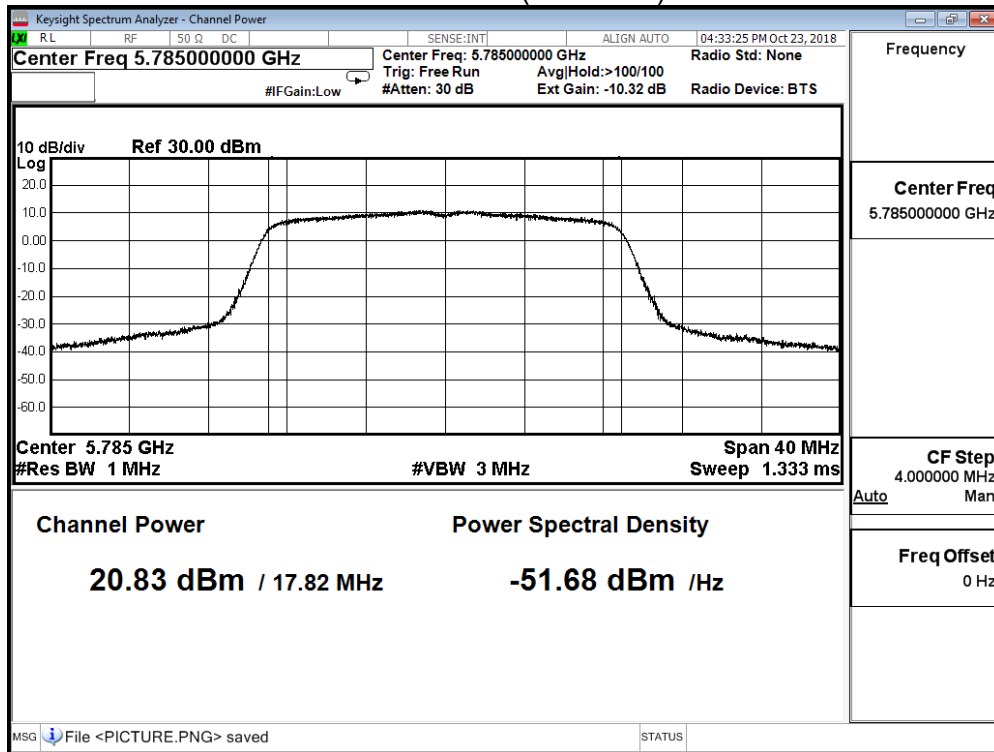

Channel 165 (5825MHz)

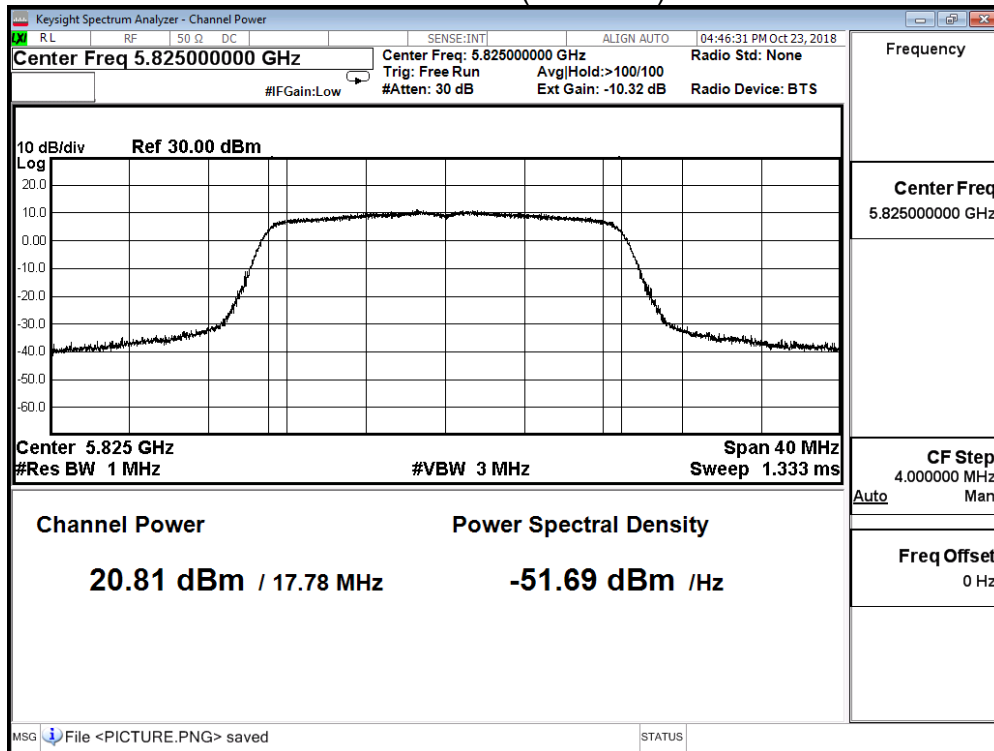

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |

IEEE 802.11n_20MHz (ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 149 | 5745 | 25.008 | ≤ 27.749 |
| 157 | 5785 | 27.312 | ≤ 27.749 |
| 165 | 5825 | 27.254 | ≤ 27.749 |

Directional gain= $10\log(\text{ANT N})+\text{Gain}=4.77+3.481=8.251$

Limit = $30\text{dBm}-(8.251\text{dBi}-6\text{dBi})=27.749\text{dBm}$

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE802.11n_40MHz(ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 151 | 5755 | 20.18 | ≤ 27.749 |
| 159 | 5795 | 20.41 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 151 (5755MHz)

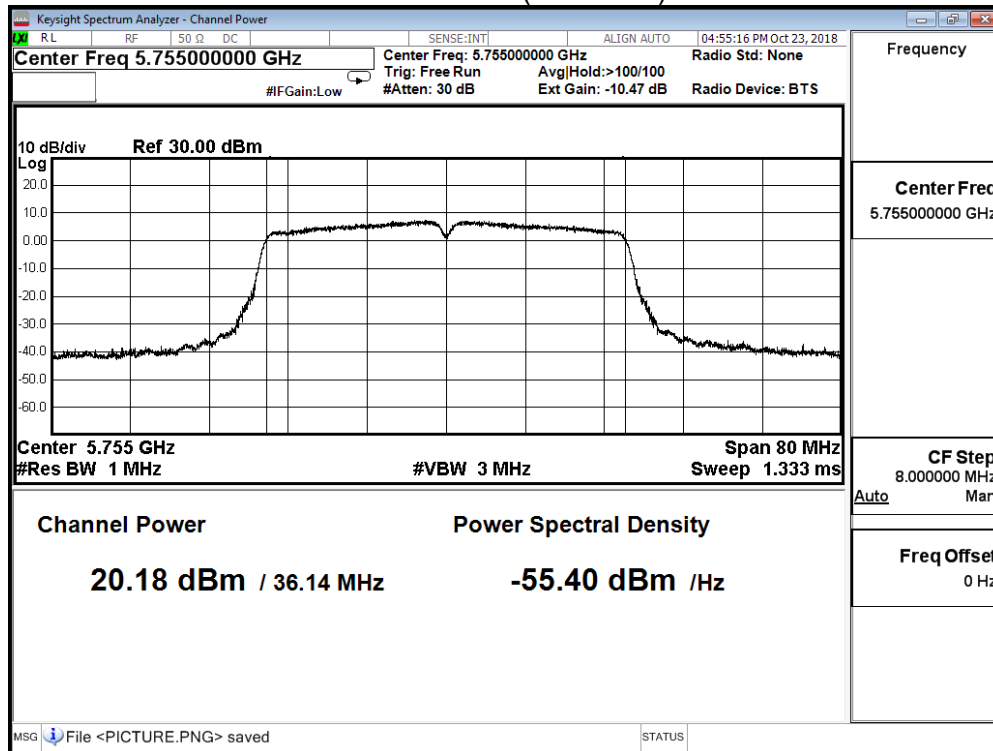

Channel 159 (5795MHz)

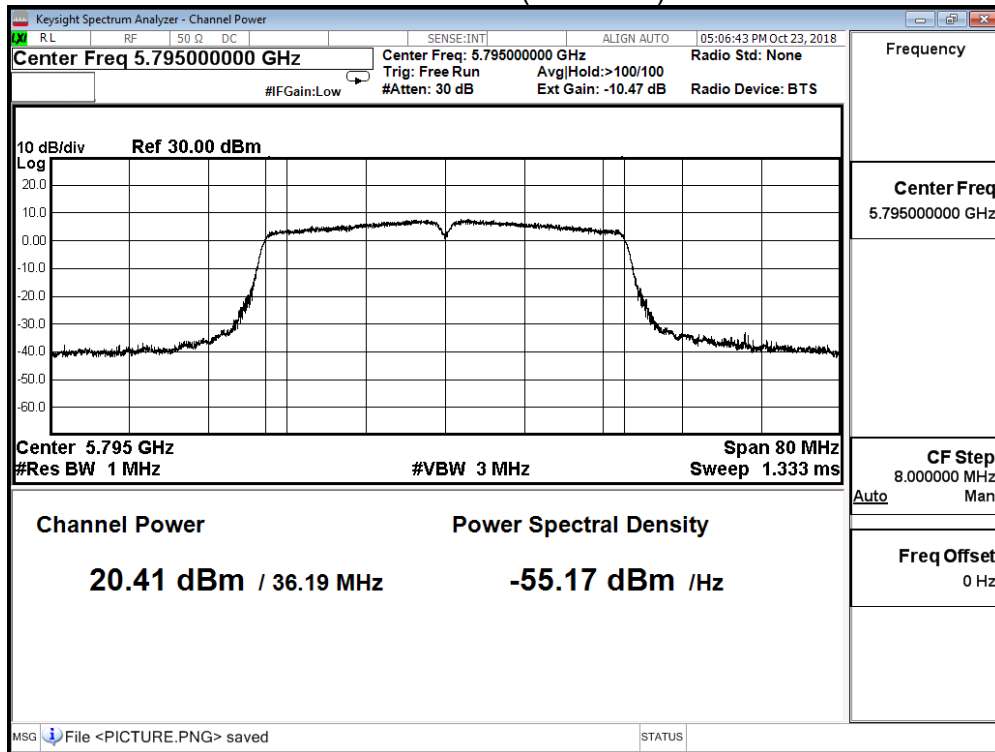

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE802.11n_40MHz(ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 151 | 5755 | 21.79 | ≤ 27.749 |
| 159 | 5795 | 21.39 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 151 (5755MHz)

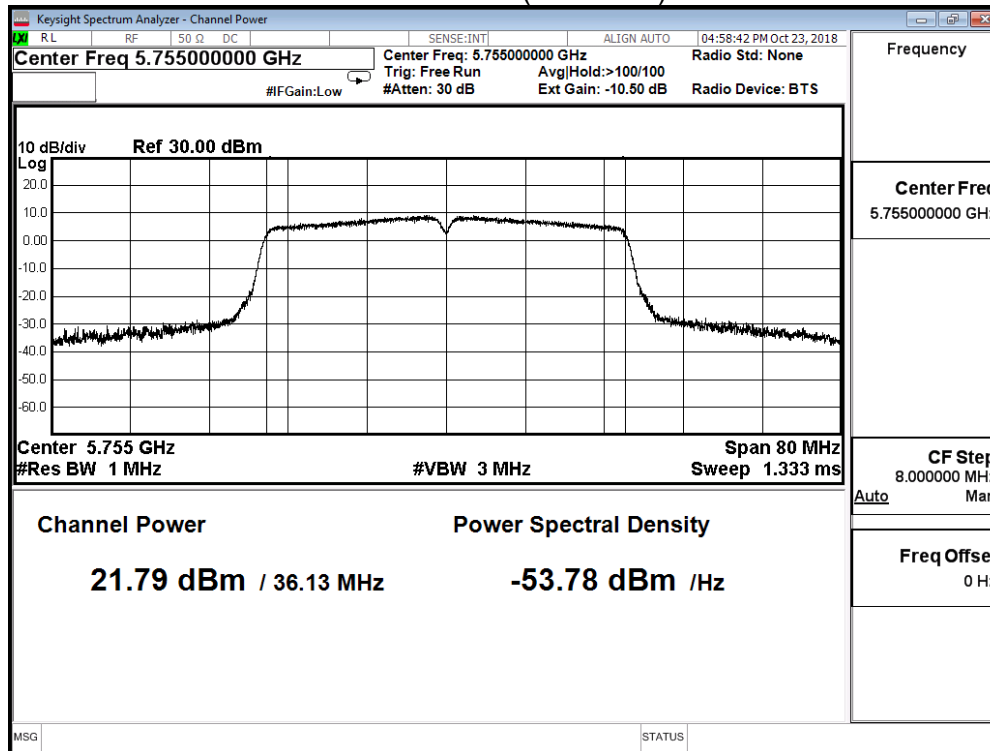

Channel 159 (5795MHz)

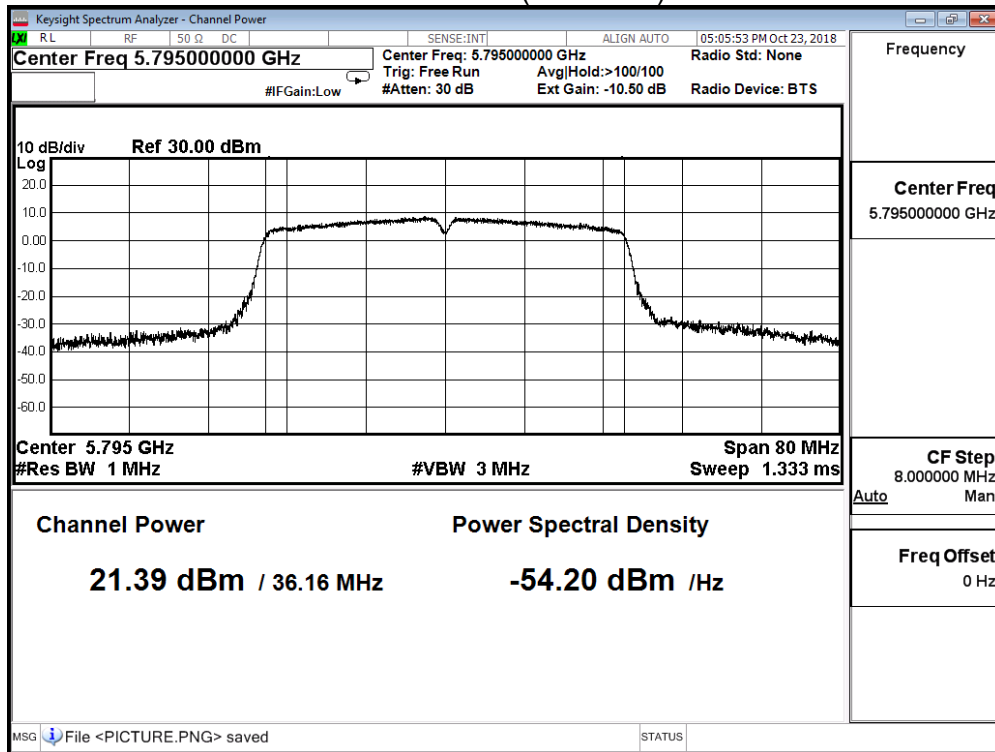

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE802.11n_40MHz(ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 151 | 5755 | 22.23 | ≤ 27.749 |
| 159 | 5795 | 22.32 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 151 (5755MHz)

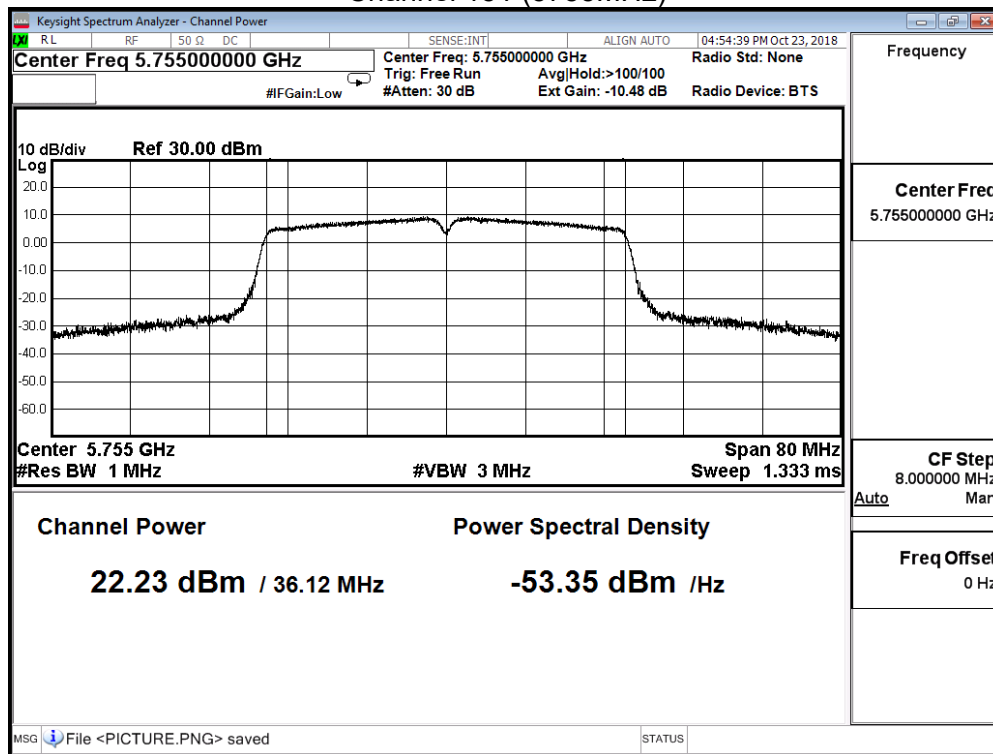

Channel 159 (5795MHz)

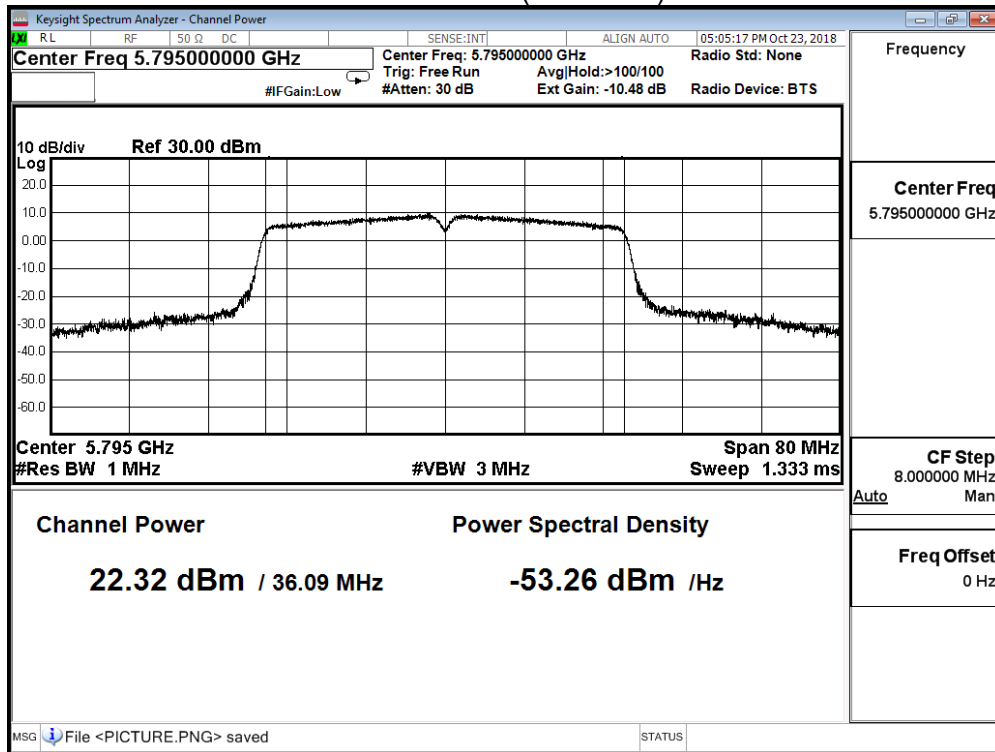

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE802.11n_40MHz(ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 151 | 5755 | 20.83 | ≤ 27.749 |
| 159 | 5795 | 20.87 | ≤ 27.749 |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 151 (5755MHz)

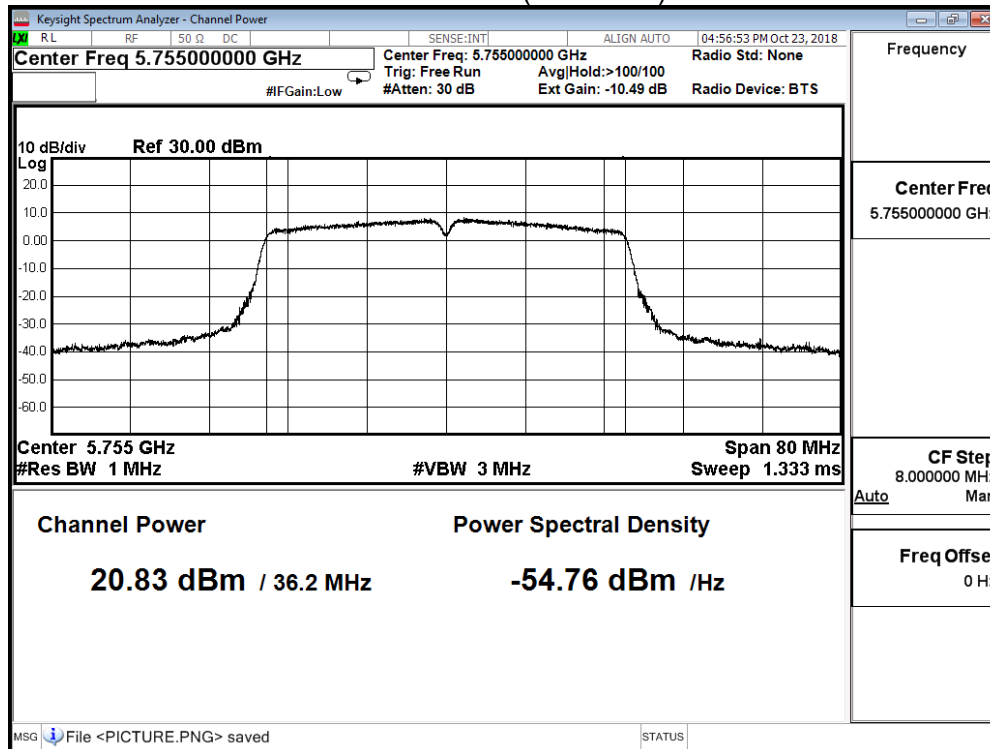

Channel 159 (5795MHz)

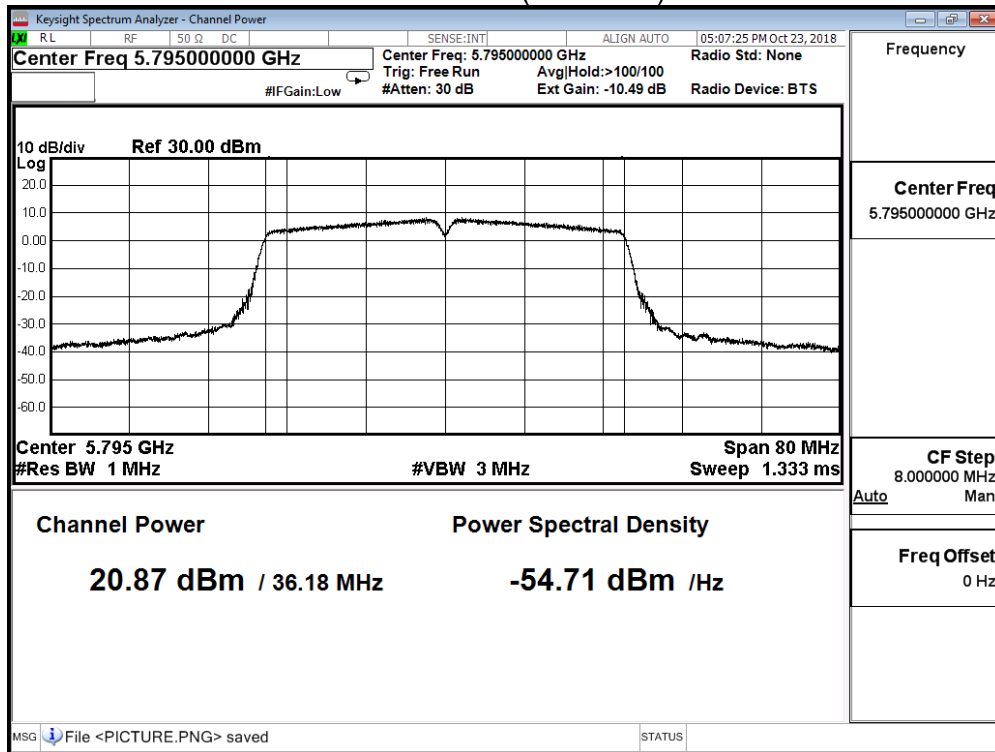

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |

IEEE802.11n_40MHz(ANT 0+1+2+3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 151 | 5755 | 27.351 | ≤ 27.749 |
| 159 | 5795 | 27.327 | ≤ 27.749 |

Directional gain= $10\log(\text{ANT N}) + \text{Gain} = 4.77 + 3.481 = 8.251$

Limit = $30\text{dBm} - (8.251\text{dBi} - 6\text{dBi}) = 27.749\text{dBm}$

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE802.11ac_80MHz (ANT 0)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 155 | 5775 | 19.62 | ≤ 27.749 |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 155 (5775MHz)

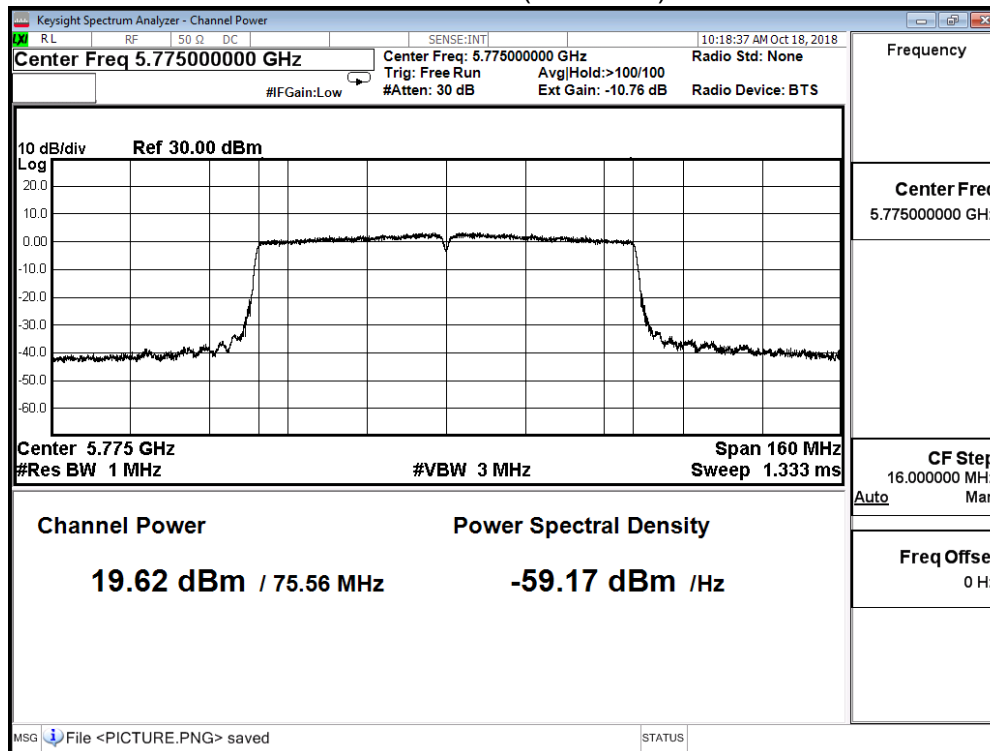

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE802.11ac_80MHz (ANT 1)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 155 | 5775 | 20.42 | ≤ 27.749 |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 155 (5775MHz)

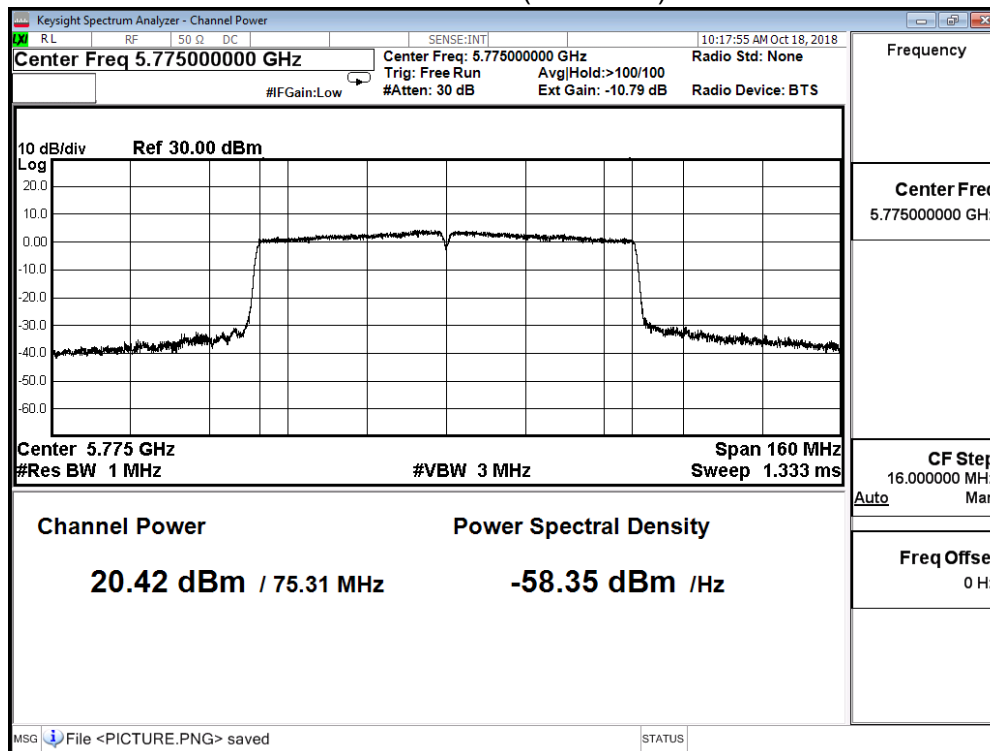

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE802.11ac_80MHz (ANT 2)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 155 | 5775 | 21.58 | ≤ 27.749 |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 155 (5775MHz)

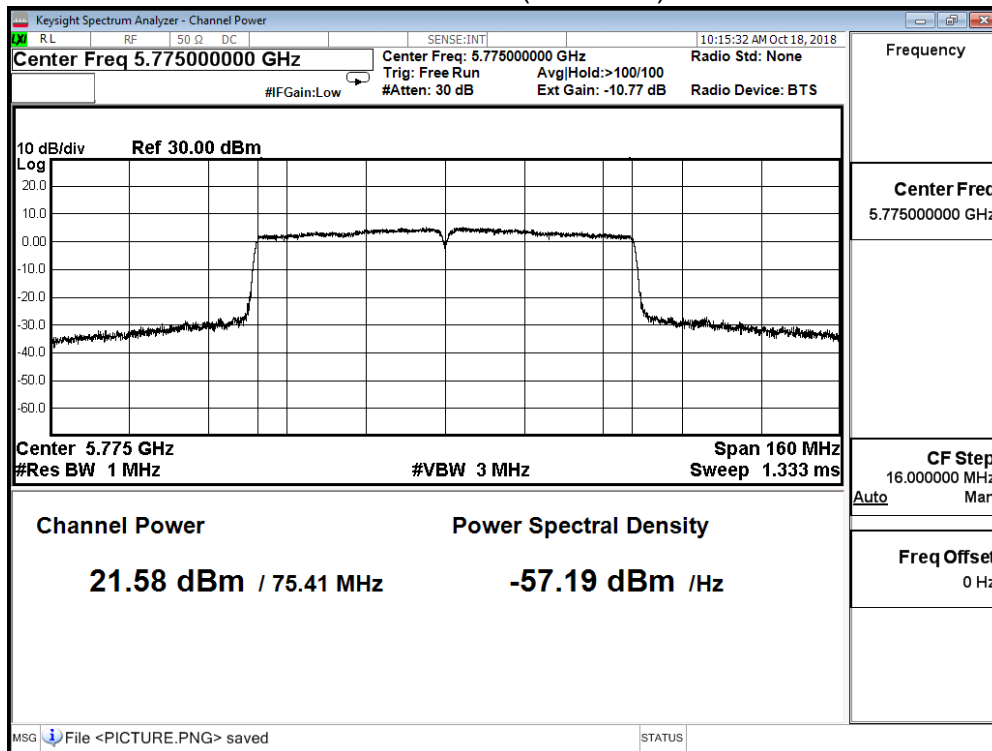

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


IEEE802.11ac_80MHz (ANT 3)

| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 155 | 5775 | 20.37 | ≤27.749 |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

Channel 155 (5775MHz)

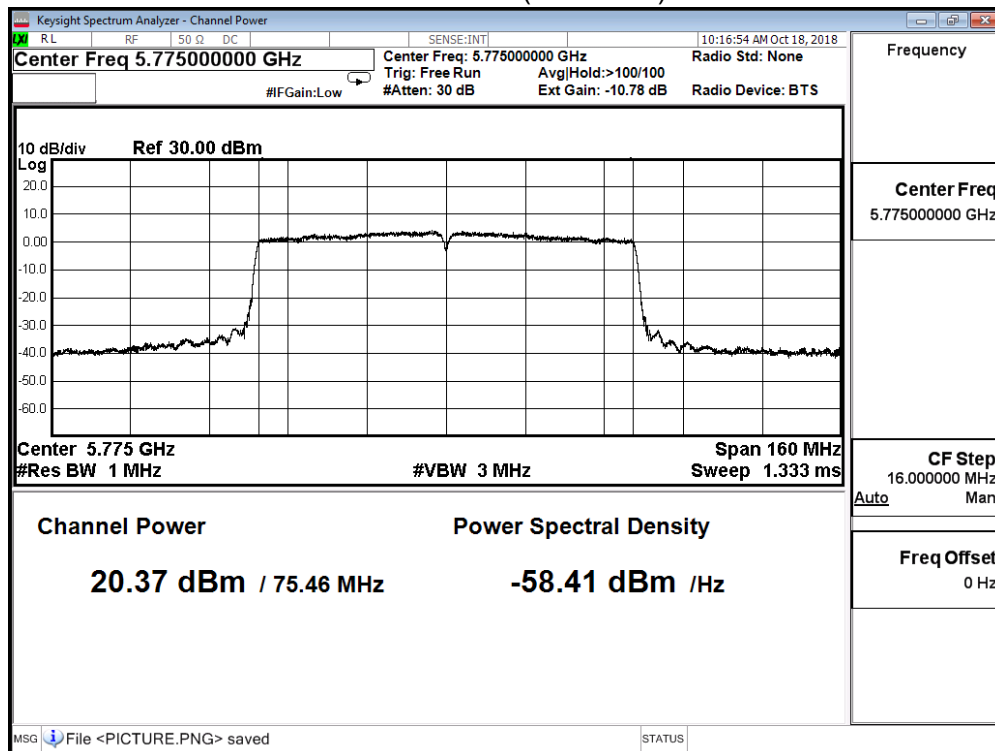

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum conducted output power | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |

IEEE802.11ac_80MHz (ANT 0+1+2+3)


| Channel No. | Frequency (MHz) | Output Power (dBm) | Required Limit (dBm) |
|-------------|-----------------|--------------------|----------------------|
| 155 | 5775 | 26.576 | ≤ 27.749 |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =30dBm-(8.251dBi-6dBi)=27.749dBm

5. Maximum power spectral density

5.1. Test Setup

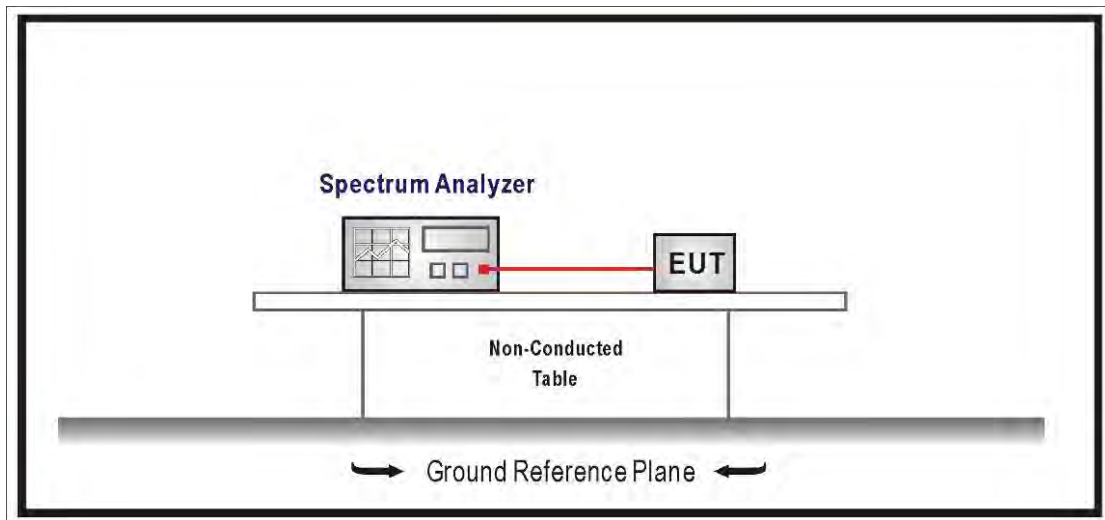

5.2. Limits

1. For the band 5.15-5.25 GHz, the Maximum power spectral density shall not exceed 17 dBm in any 1MHz band. If transmitting antenna of directional gain greater than 6 dBi are used, the Maximum power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
2. For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi
3. For the band 5.25-5.35 GHz, the Maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antenna of directional gain greater than 6 dBi are used, the Maximum power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
4. For the band 5.725-5.850 GHz, the Maximum power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna of directional gain greater than 6 dBi are used, the Maximum power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi..

5.3. Test Procedure

The EUT was setup to ANSI C63.10: 2013; tested to U-NII test procedure of KDB 789033.v01r02 for compliance to FCC 47CFR Subpart E requirements.

For Band1 : Set RBW=1MHz, VBW=3MHz with RMS detector. The PPSD is the highest level found across the emission in any 1-MHz band after 100 sweeps of averaging.

For Band4 : Set RBW=500KHz, VBW=1.5MHz with RMS detector. The PPSD is the highest level found across the emission in any 500KHz band after 100 sweeps of averaging.

5.4. Test Result


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

| IEEE 802.11a (ANT0+1+2+3) | | | | |
|---------------------------|-----------------|---------------------|---------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 36 | 5180 | 14.224 | ≤ 14.749 | Pass |
| 44 | 5220 | 14.424 | ≤ 14.749 | Pass |
| 48 | 5240 | 14.674 | ≤ 14.749 | Pass |


Directional gain= $10\log(\text{ANT N}) + \text{Gain} = 4.77 + 3.481 = 8.251$

Limit = $17\text{dBm} - (8.251\text{dBi} - 6\text{dBi}) = 14.749\text{dBm}$


Channel 36

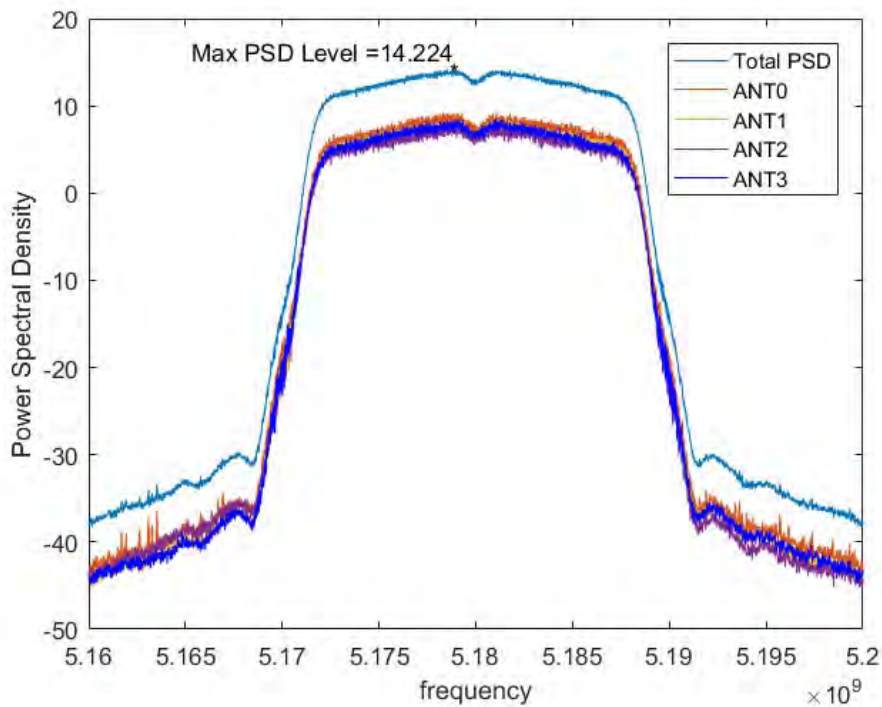

Channel 44

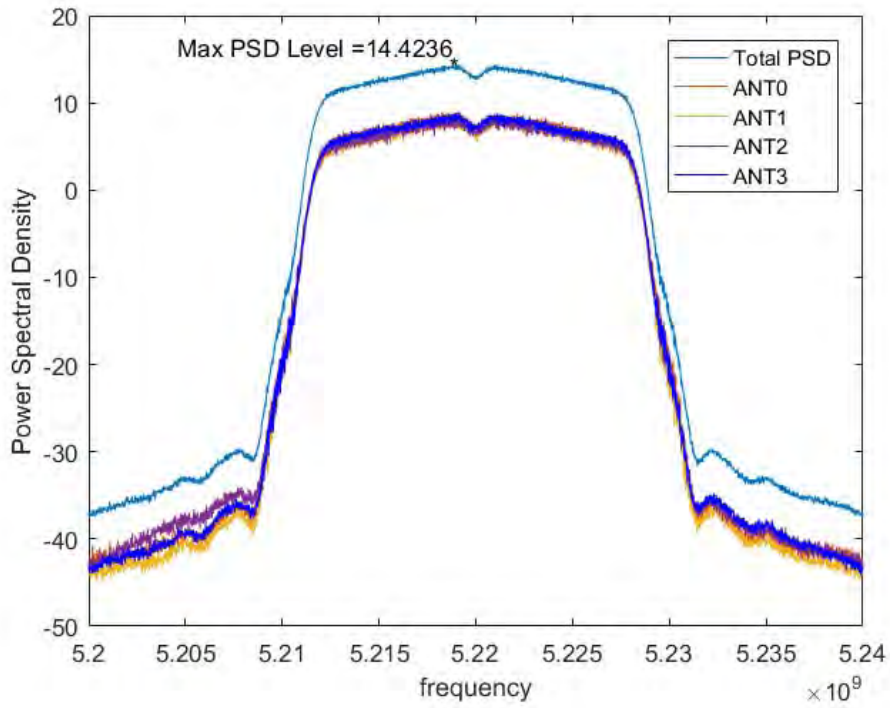

Channel 48

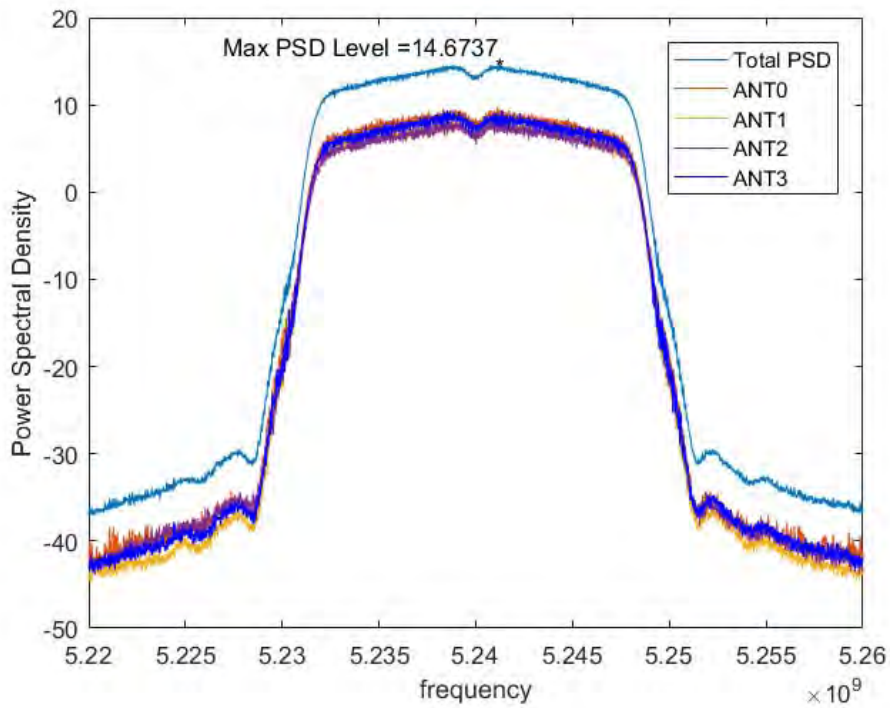


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

| IEEE 802.11n(20MHz)(ANT0+1+2+3) | | | | |
|---------------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 36 | 5180 | 14.472 | ≤ 14.749 | Pass |
| 44 | 5220 | 14.711 | ≤ 14.749 | Pass |
| 48 | 5240 | 14.624 | ≤ 14.749 | Pass |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =17dBm-(8.251dBi-6dBi)=14.749dBm


Channel 36

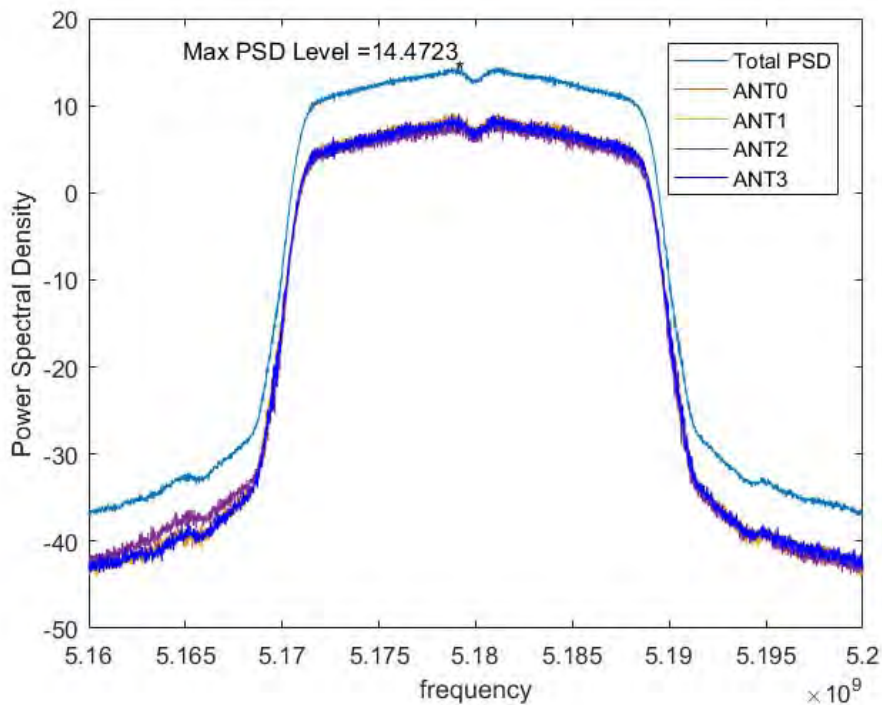

Channel 44

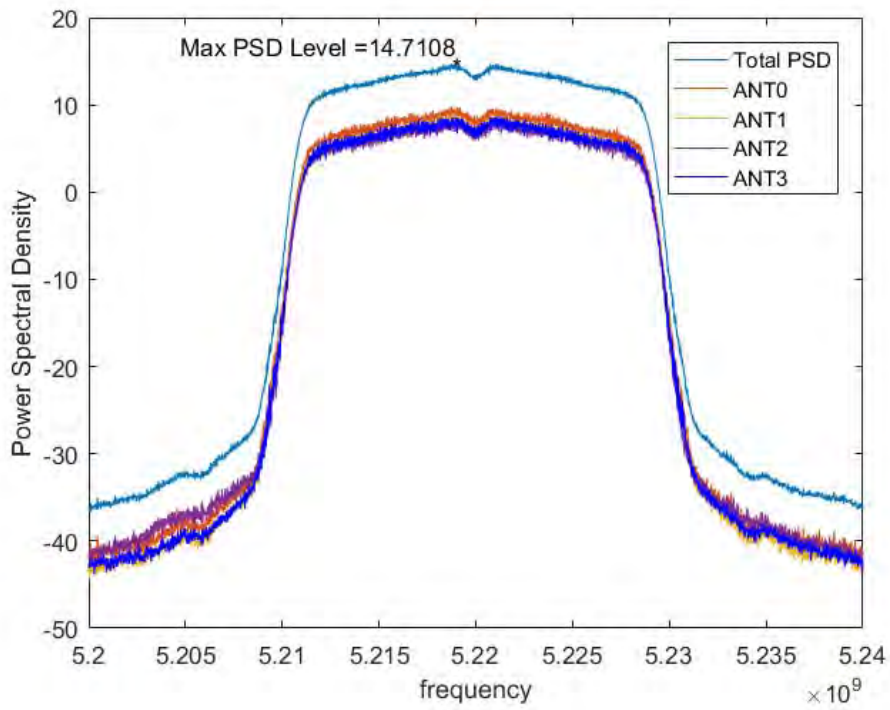

Channel 48

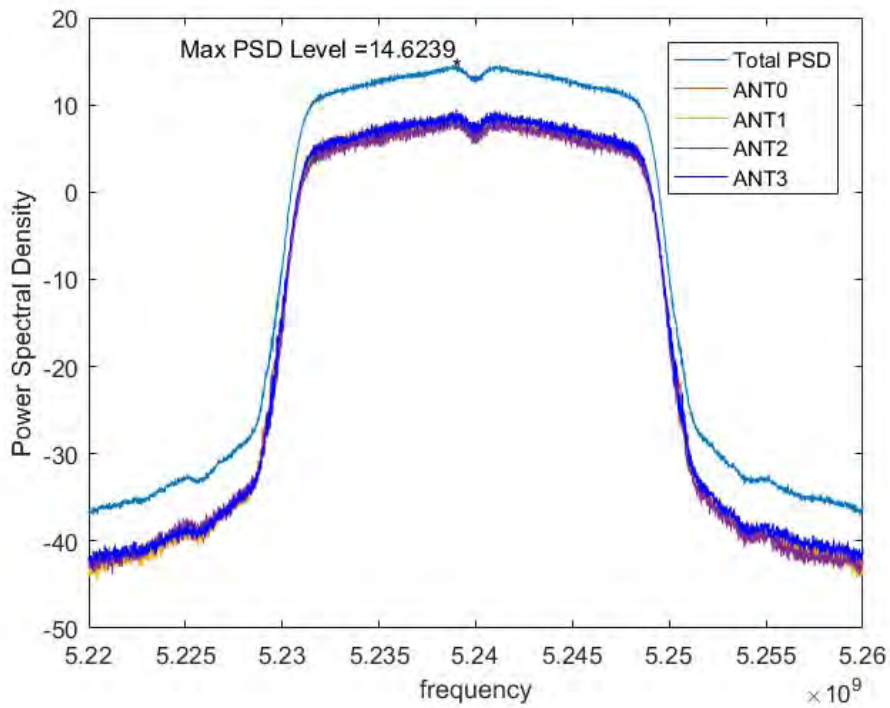


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

| IEEE 802.11n(40MHz)(ANT0+1+2+3) | | | | |
|---------------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 38 | 5190 | 10.590 | ≤ 14.749 | Pass |
| 46 | 5230 | 10.892 | ≤ 14.749 | Pass |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =17dBm-(8.251dBi-6dBi)=14.749dBm

Channel 38

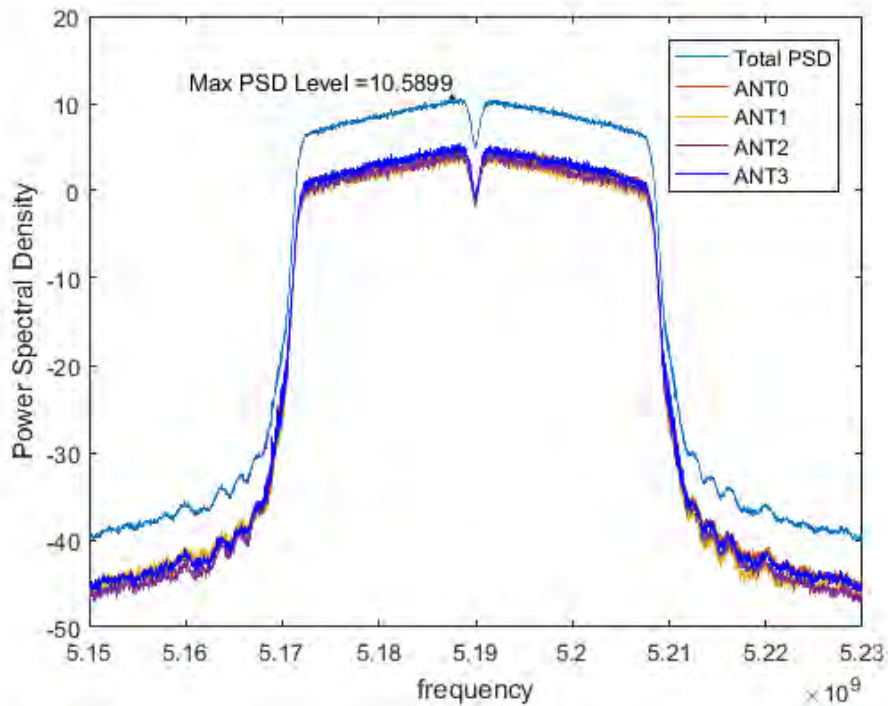

Channel 46

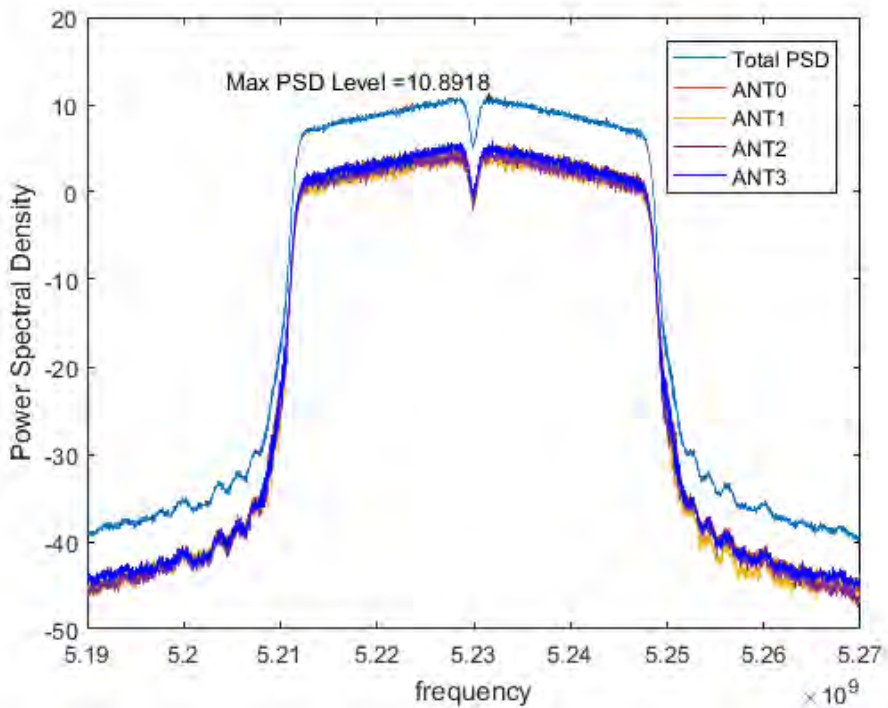


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

| IEEE 802.11ac(80MHz)(ANT0+1+2+3) | | | | |
|----------------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 42 | 5210 | 4.281 | ≤ 14.749 | Pass |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =17dBm-(8.251dBi-6dBi)=14.749dBm

Channel 42

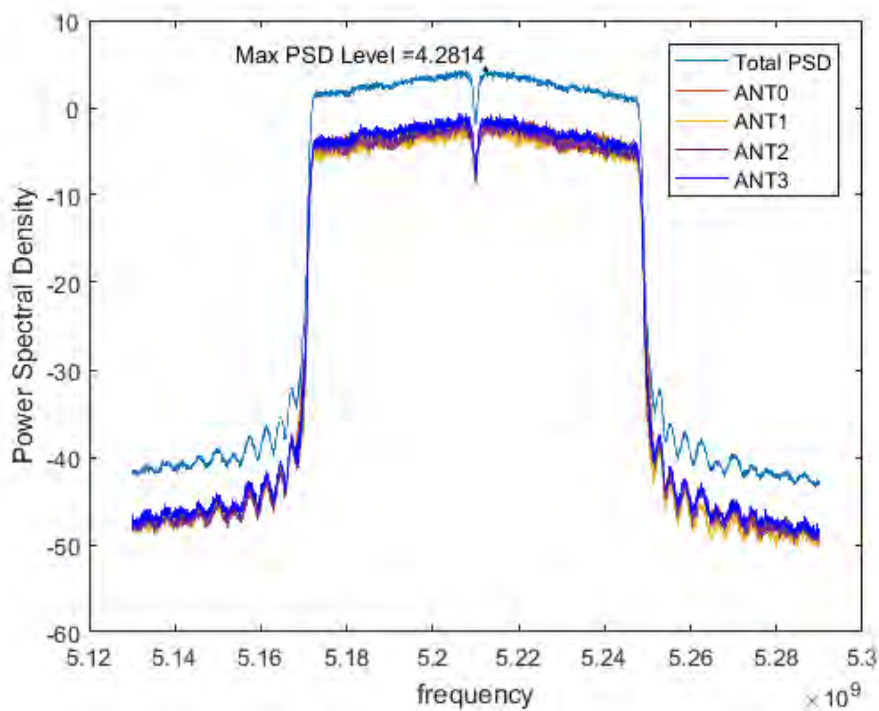


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

| IEEE 802.11a (ANT0+1+2+3) | | | | |
|---------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 149 | 5745 | 16.069 | ≤ 27.75 | Pass |
| 157 | 5785 | 16.876 | ≤ 27.75 | Pass |
| 165 | 5825 | 17.174 | ≤ 27.75 | Pass |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =17dBm-(8.251dBi-6dBi)=14.749dBm


Channel 149

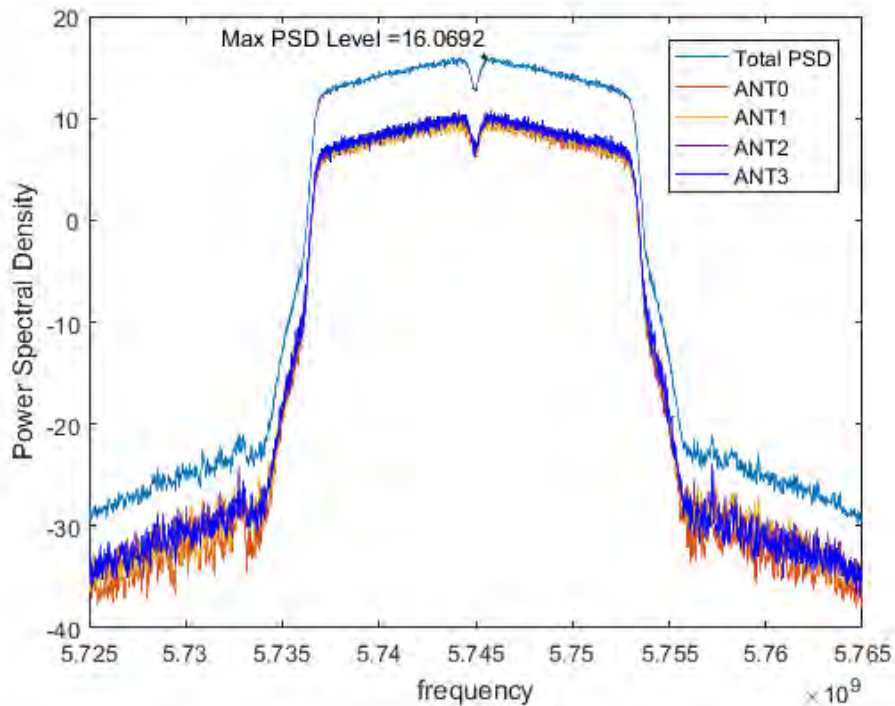

Channel 157

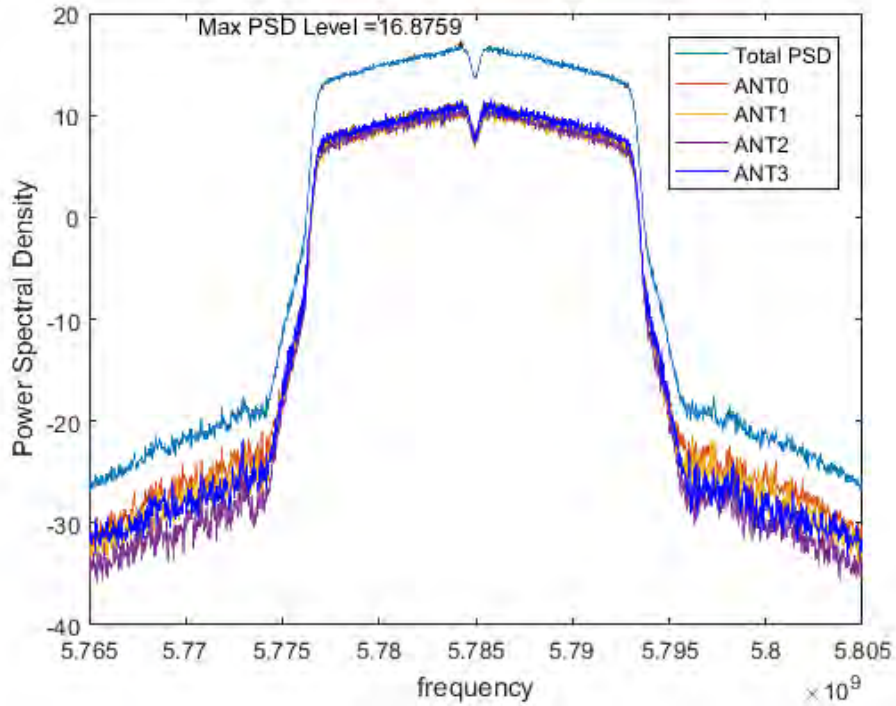

Channel 165

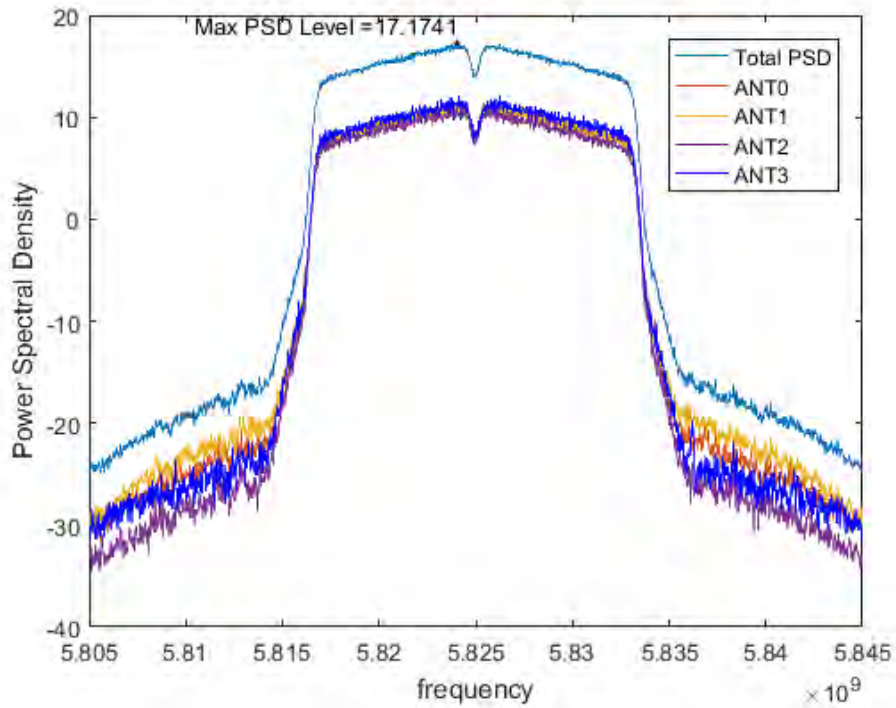


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

| IEEE 802.11n(20MHz)(ANT0+1+2+3) | | | | |
|---------------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 149 | 5745 | 16.043 | ≤ 27.75 | Pass |
| 157 | 5785 | 16.416 | ≤ 27.75 | Pass |
| 165 | 5825 | 16.687 | ≤ 27.75 | Pass |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =17dBm-(8.251dBi-6dBi)=14.749dBm


Channel 149

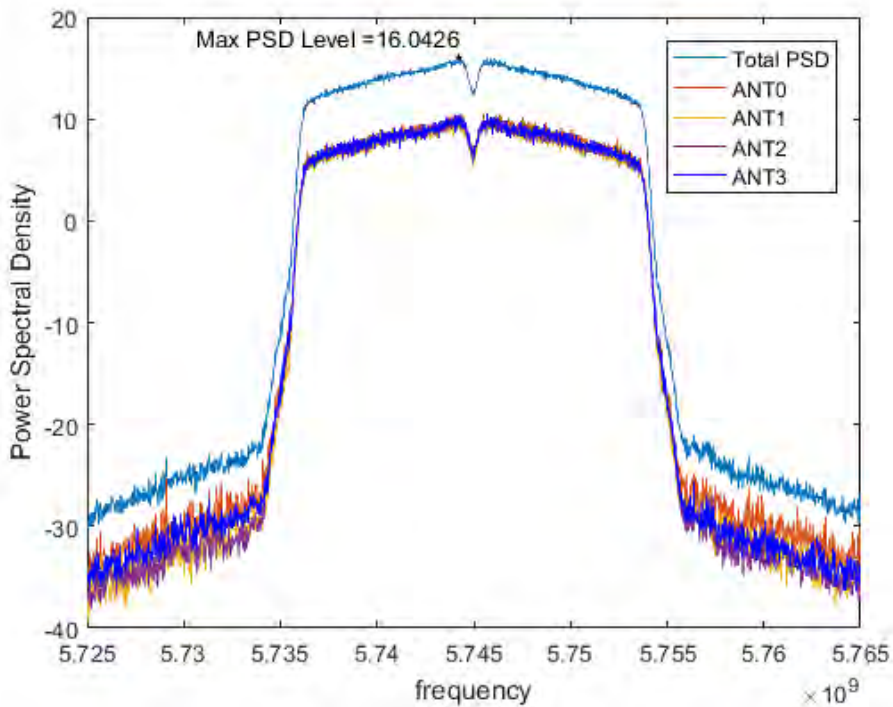

Channel 157

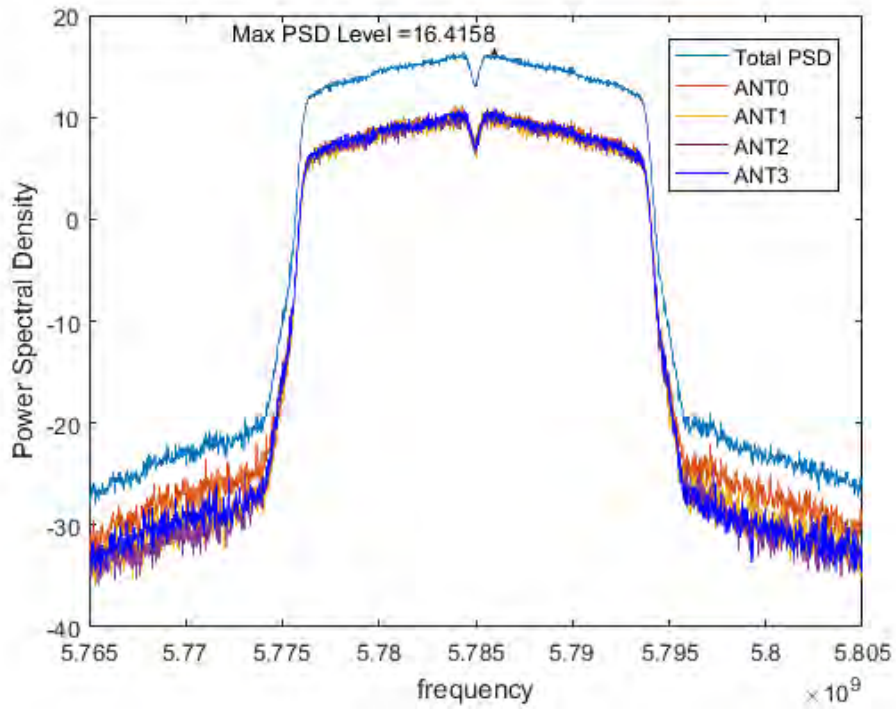

Channel 165

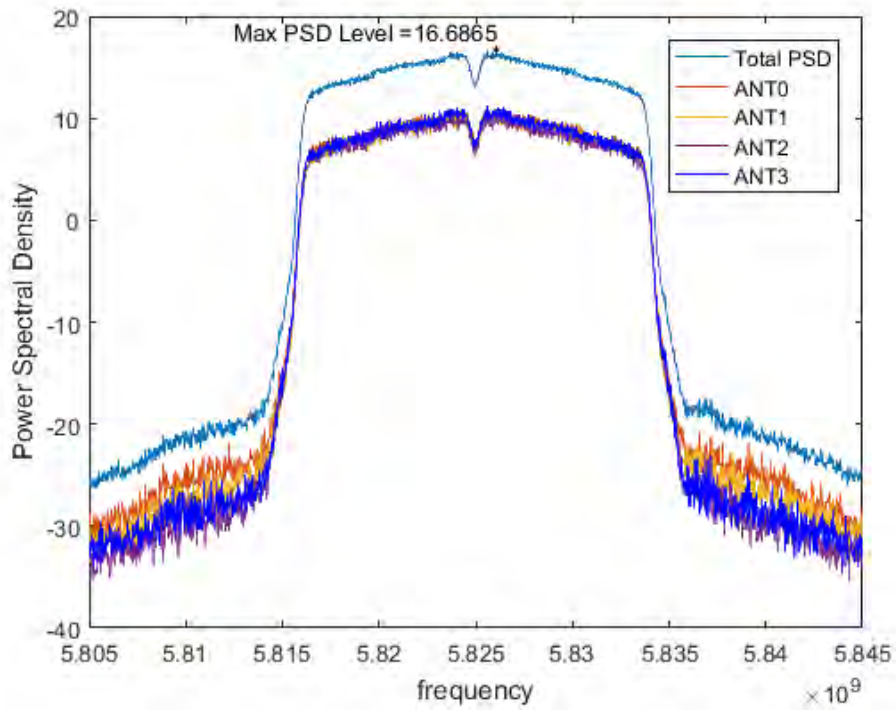


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

| IEEE 802.11n(40MHz)(ANT0+1+2+3) | | | | |
|---------------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 151 | 5755 | 13.352 | ≤ 27.75 | Pass |
| 159 | 5795 | 13.301 | ≤ 27.75 | Pass |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =17dBm-(8.251dBi-6dBi)=14.749dBm

Channel 151

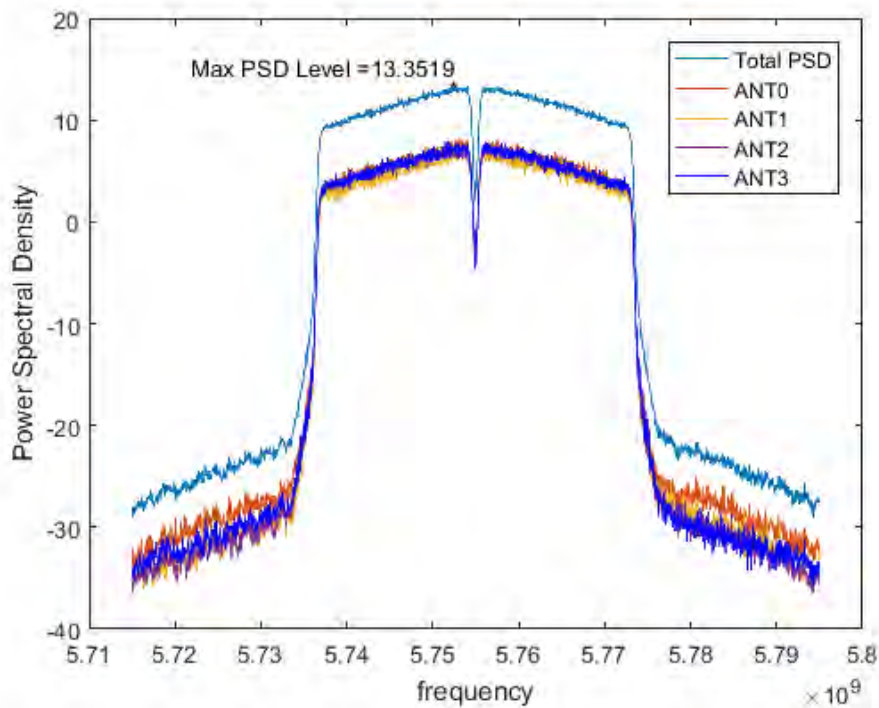

Channel 159

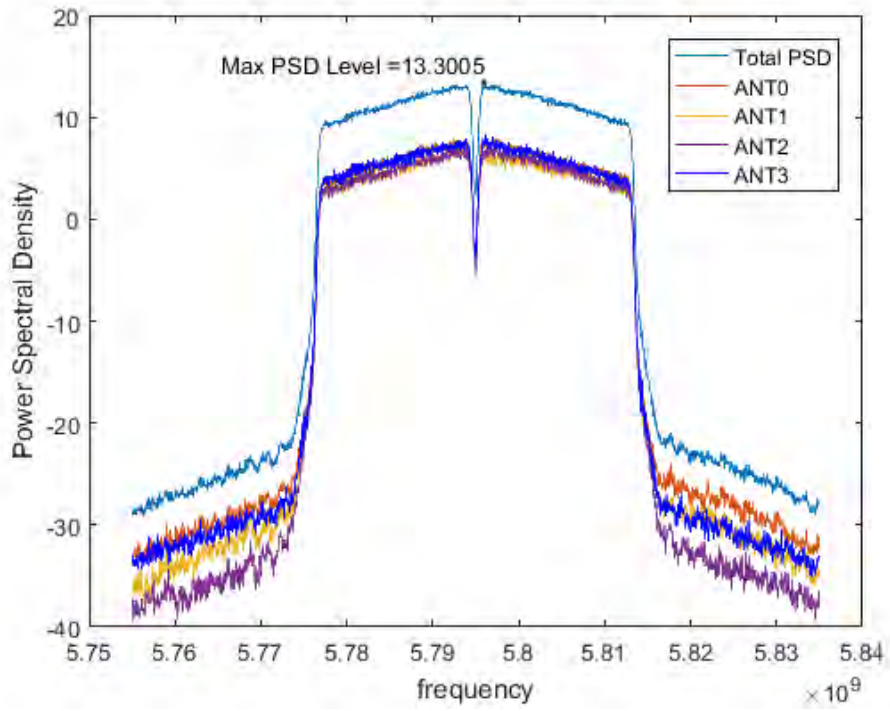


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/15 | Test Site | SR10-H |

| IEEE 802.11ac(80MHz)(ANT0+1+2+3) | | | | |
|----------------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 155 | 5775 | 6.969 | ≤ 27.75 | Pass |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =17dBm-(8.251dBi-6dBi)=14.749dBm

Channel 155

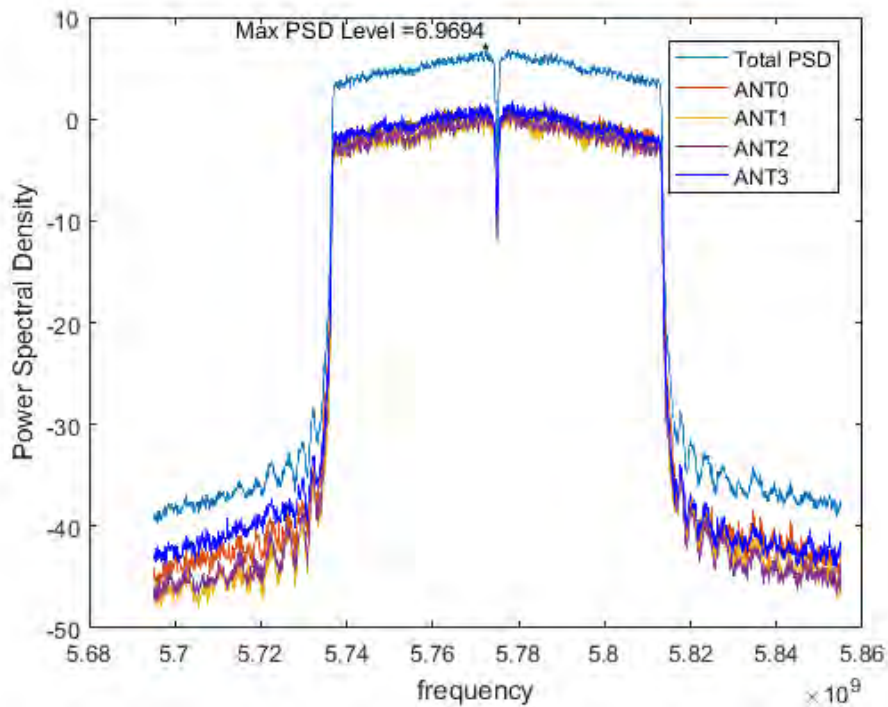


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


| IEEE 802.11n(20MHz)(ANT0+1+2+3) | | | | |
|---------------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 36 | 5180 | 14.250 | ≤ 14.749 | Pass |
| 44 | 5220 | 14.530 | ≤ 14.749 | Pass |
| 48 | 5240 | 14.430 | ≤ 14.749 | Pass |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251


Limit =17dBm-(8.251dBi-6dBi)=14.749dBm

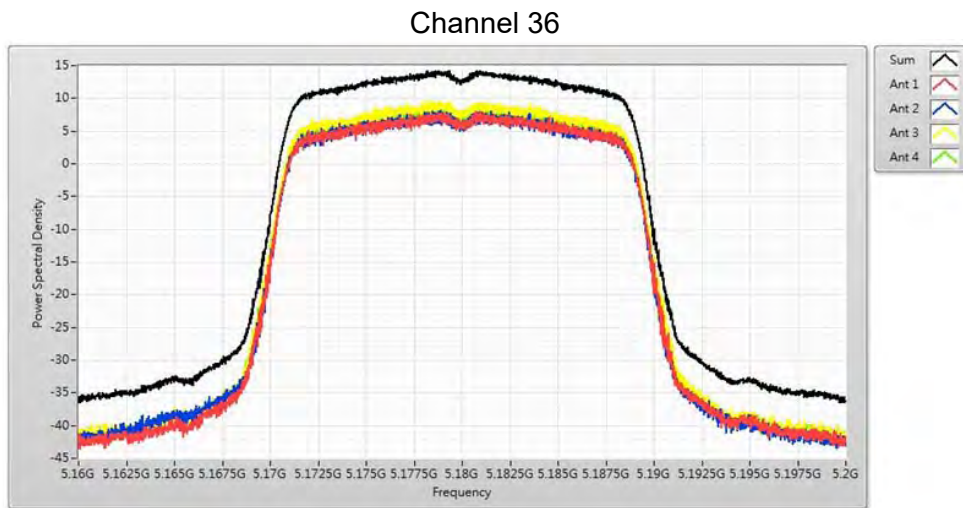

Channel 44

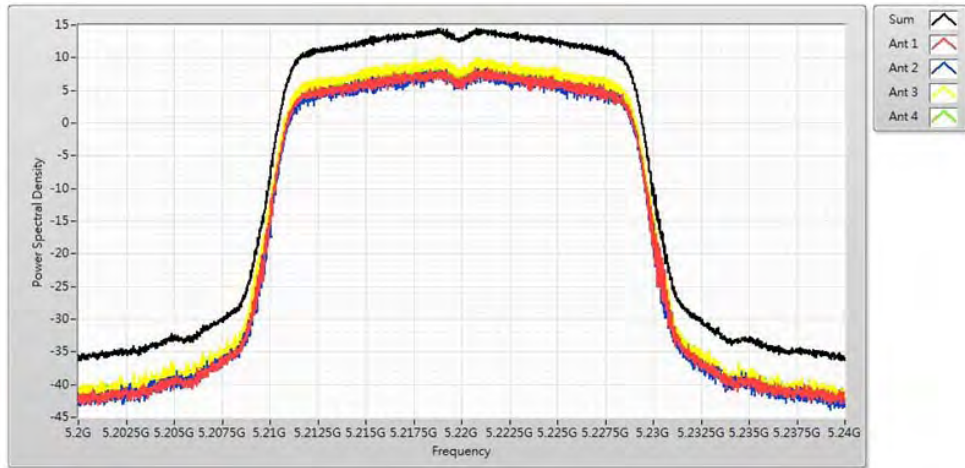

Channel 48

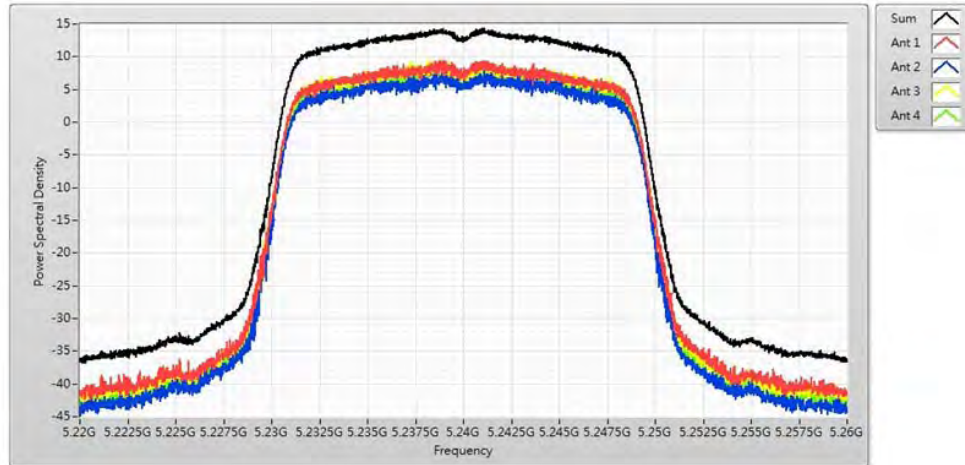


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |

| IEEE 802.11n(40MHz)(ANT0+1+2+3) | | | | |
|---------------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 38 | 5190 | 12.360 | ≤ 14.749 | Pass |
| 46 | 5230 | 13.230 | ≤ 14.749 | Pass |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =17dBm-(8.251dBi-6dBi)=14.749dBm

Channel 38

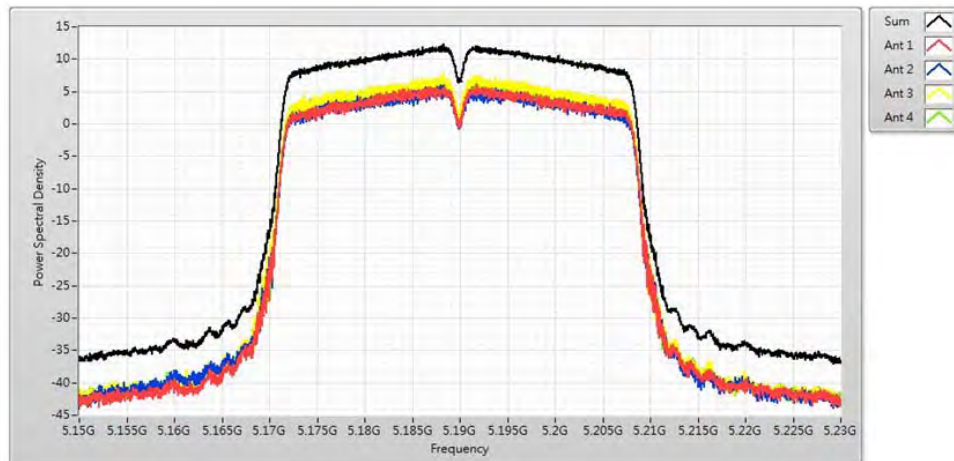

Channel 46




| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 2: Transmit Mode BF WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |

| IEEE 802.11ac(80MHz)(ANT0+1+2+3) | | | | |
|----------------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 42 | 5210 | 5.790 | ≤ 14.749 | Pass |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =17dBm-(8.251dBi-6dBi)=14.749dBm

Channel 42

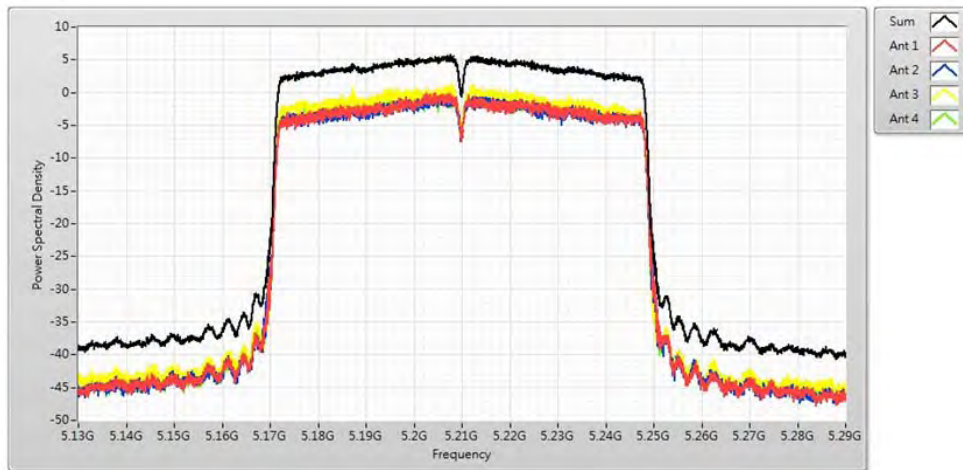


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |


| IEEE 802.11n(20MHz)(ANT0+1+2+3) | | | | |
|---------------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 149 | 5745 | 12.910 | ≤ 27.75 | Pass |
| 157 | 5785 | 14.740 | ≤ 27.75 | Pass |
| 165 | 5825 | 14.800 | ≤ 27.75 | Pass |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251


Limit =17dBm-(8.251dBi-6dBi)=14.749dBm

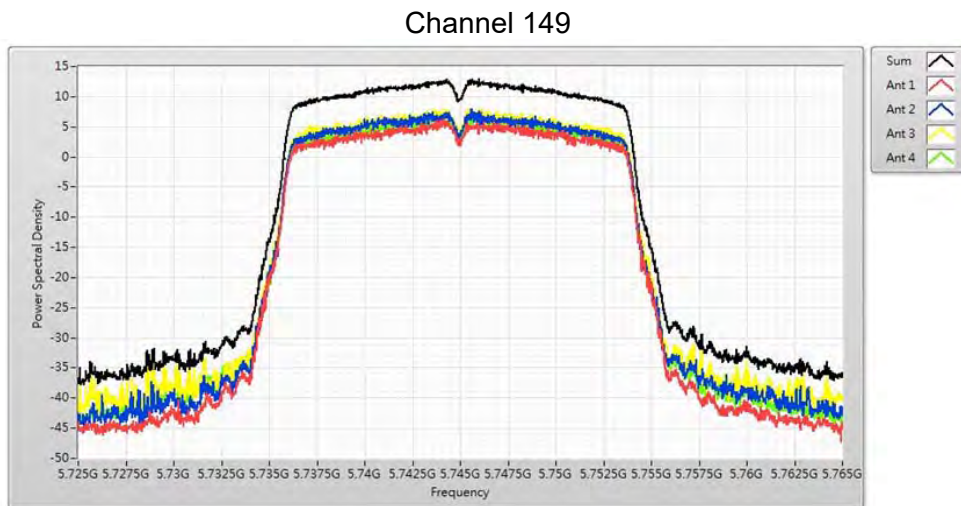

Channel 157

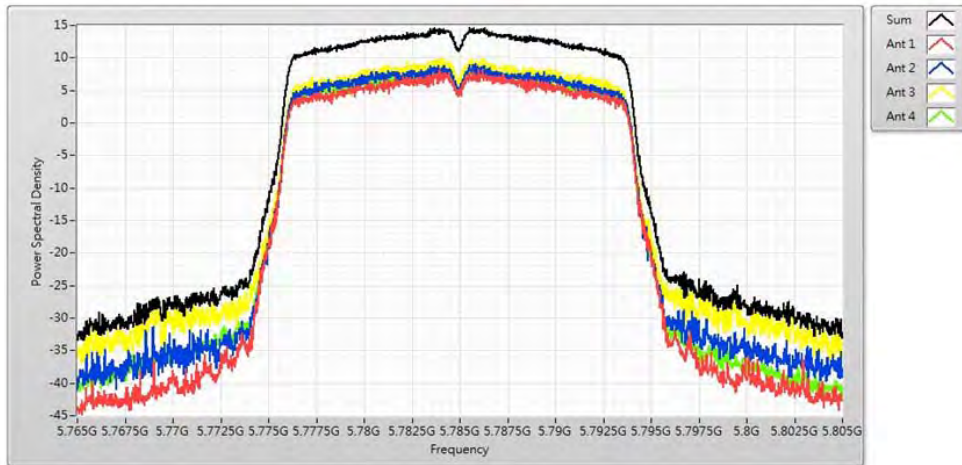

Channel 165

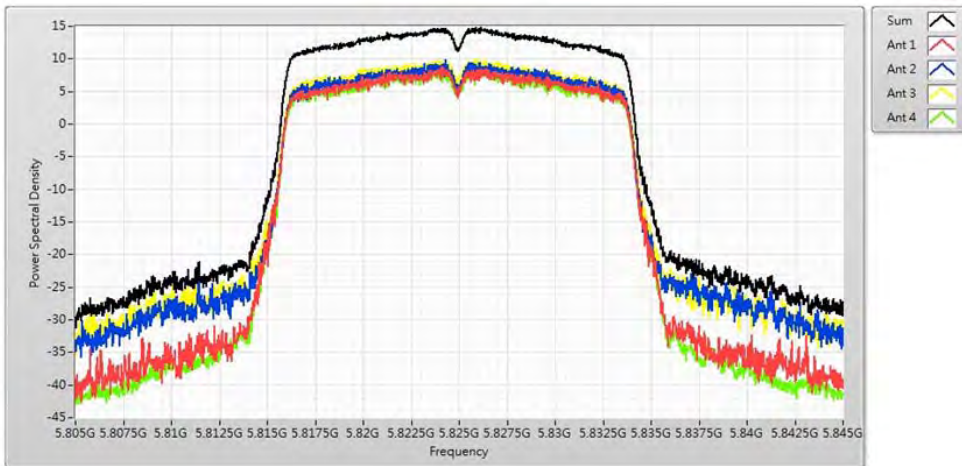


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |

| IEEE 802.11n(40MHz)(ANT0+1+2+3) | | | | |
|---------------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 151 | 5755 | 11.430 | ≤ 27.75 | Pass |
| 159 | 5795 | 11.420 | ≤ 27.75 | Pass |


Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =17dBm-(8.251dBi-6dBi)=14.749dBm

Channel 151

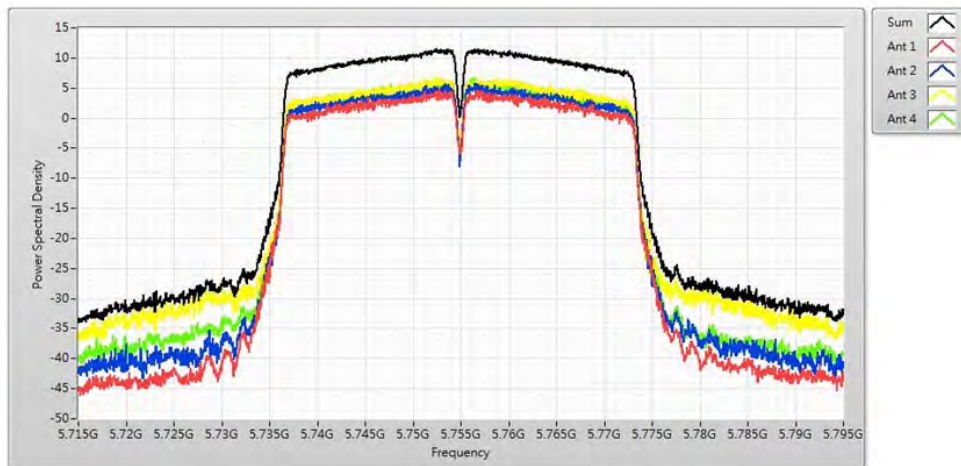

Channel 159

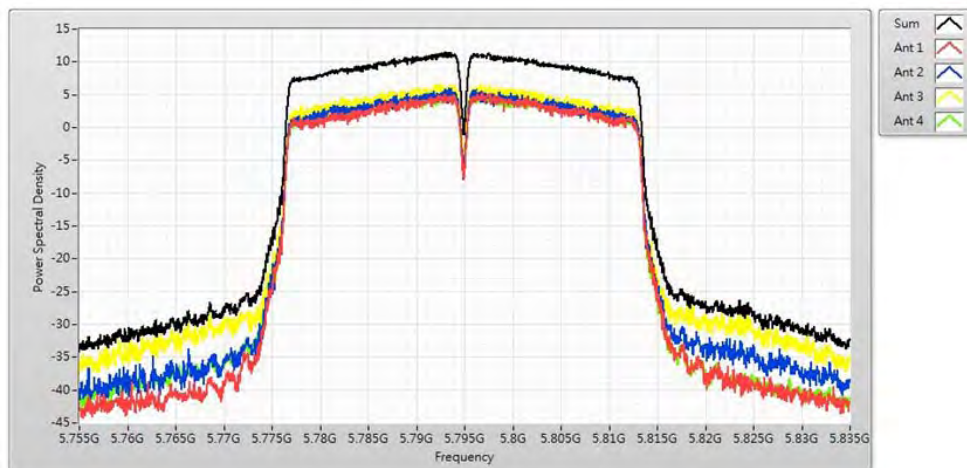

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum power spectral density | | |
| Test Mode | Mode 2: Transmit Mode_BF_WA-30P12FU | | |
| Date of Test | 2018/10/23 | Test Site | SR10-H |

| IEEE 802.11ac(80MHz)(ANT0+1+2+3) | | | | |
|----------------------------------|-----------------|---------------------|-------------|--------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
| 155 | 5775 | 7.080 | ≤ 27.75 | Pass |

Directional gain=10log(ANT N)+Gain=4.77+3.481=8.251

Limit =17dBm-(8.251dBi-6dBi)=14.749dBm

Channel 155

